


802.11a Power Spectral Density – Ant 1


Channel 36 (5180MHz)




Channel 44 (5220MHz)

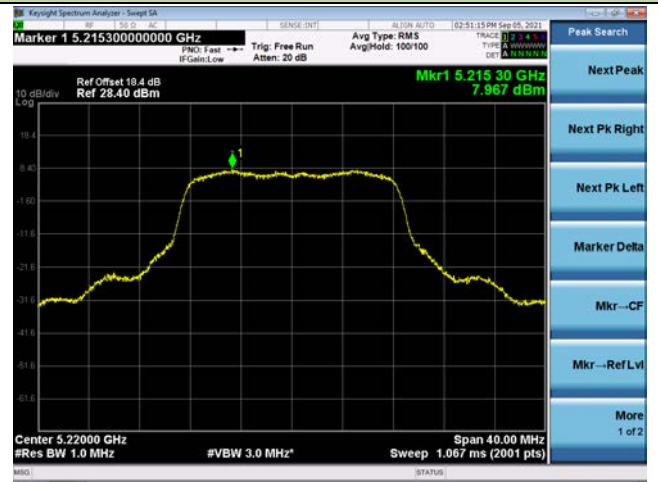


Channel 48 (5240MHz)

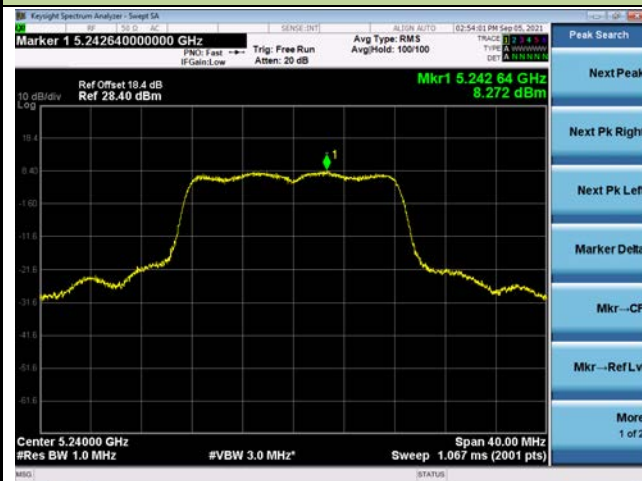


Channel 52 (5260MHz)

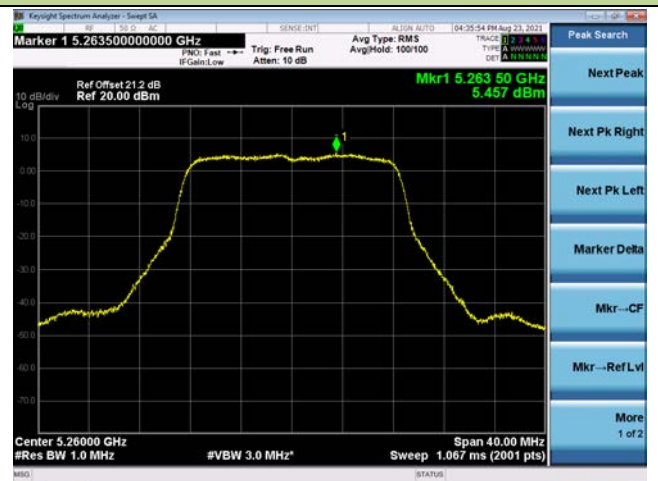

Channel 60 (5300MHz)

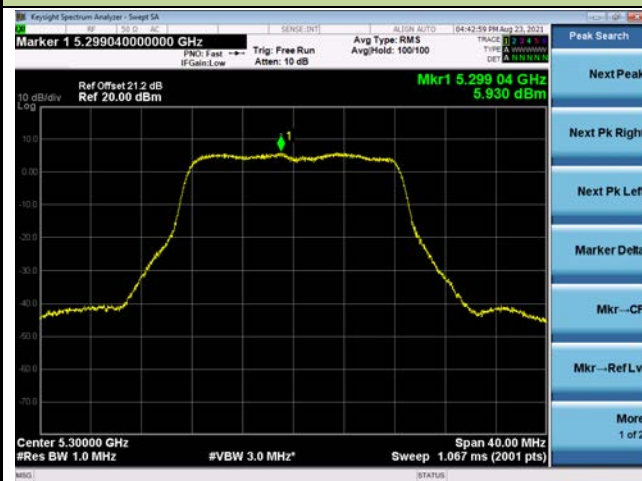


Channel 64 (5320MHz)

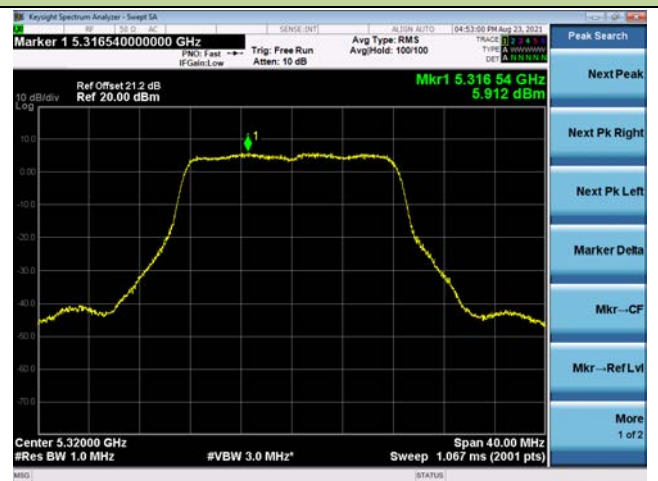


802.11a Power Spectral Density – Ant 1


Channel 100 (5500MHz)

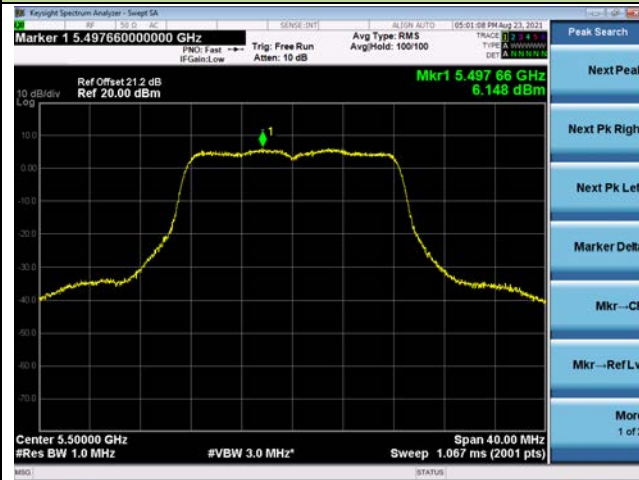


Channel 116 (5580MHz)

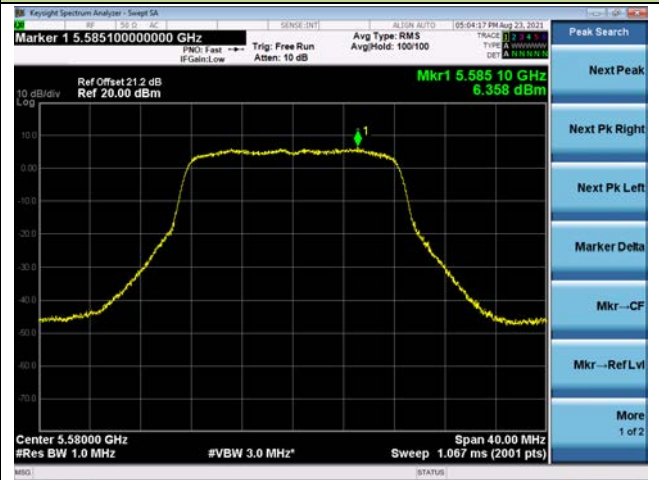


Channel 140 (5700MHz)

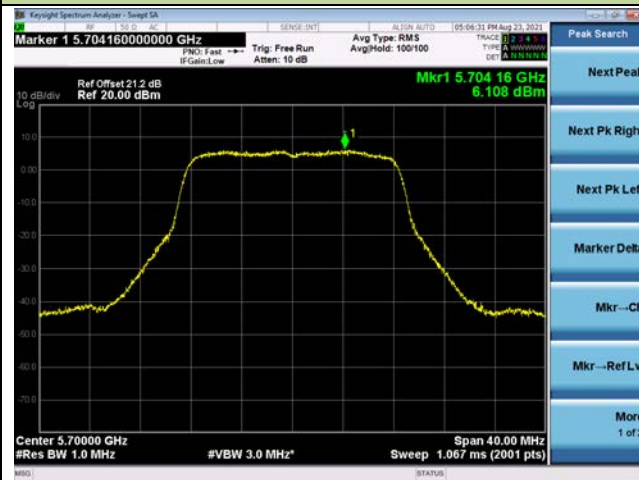


Channel 144 (5720MHz)

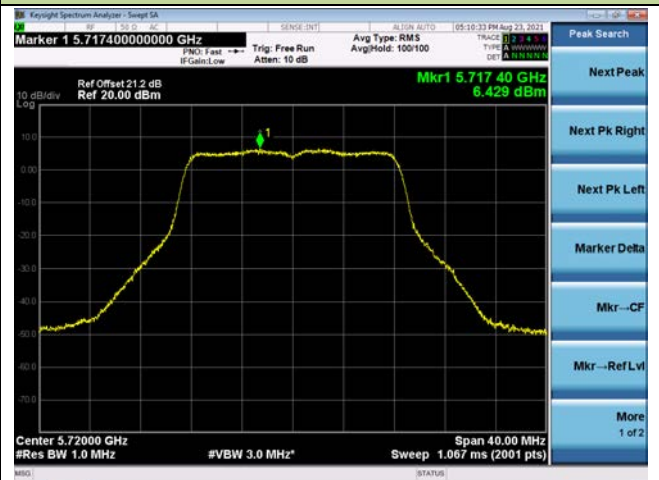

Channel 149 (5745MHz)

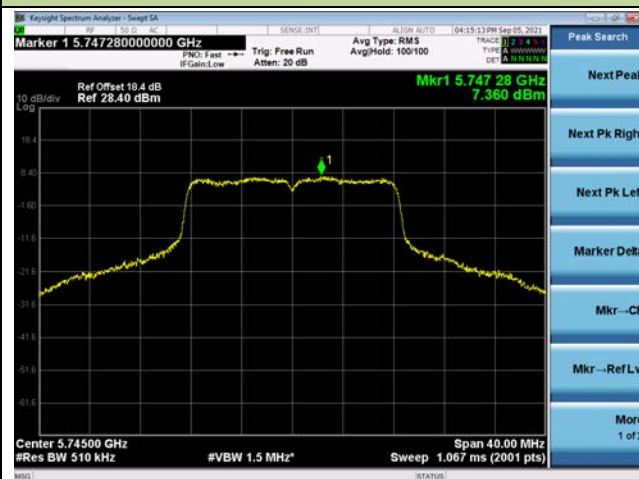


Channel 157 (5785MHz)

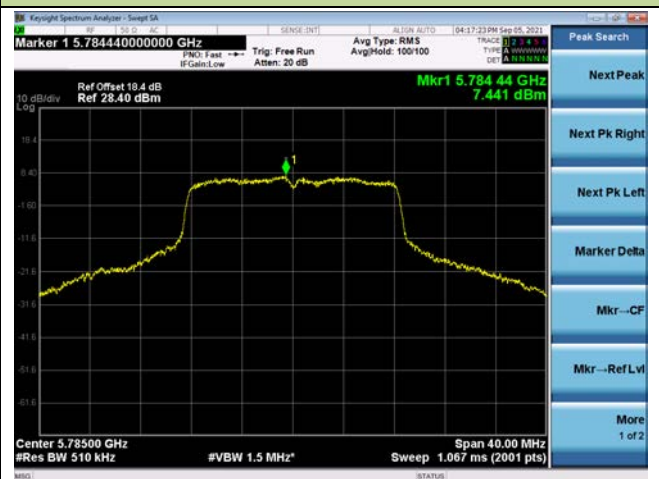

802.11a Power Spectral Density – Ant 1

Channel 165 (5825MHz)

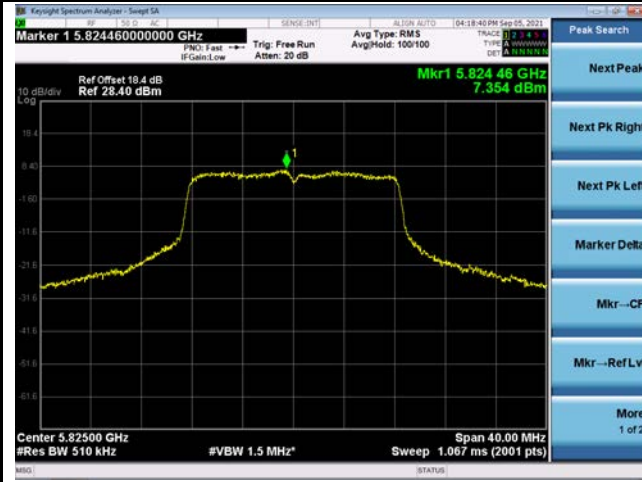


802.11ac-VHT20 Power Spectral Density – Ant 1

Channel 36 (5180MHz)




Channel 44 (5220MHz)

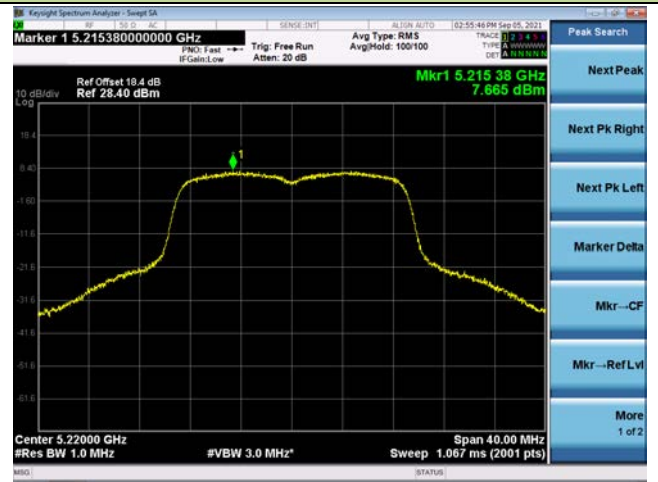


Channel 48 (5240MHz)




Channel 52 (5260MHz)

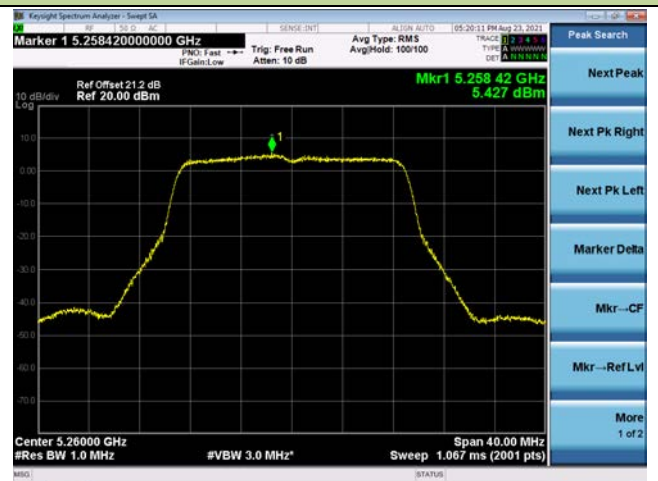

Channel 60 (5300MHz)

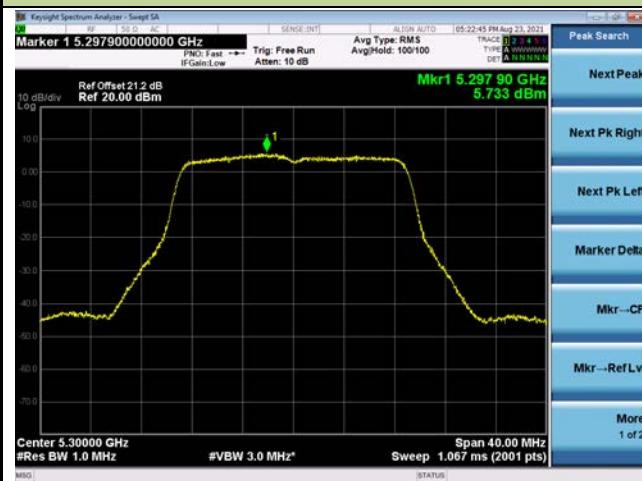


Channel 64 (5320MHz)

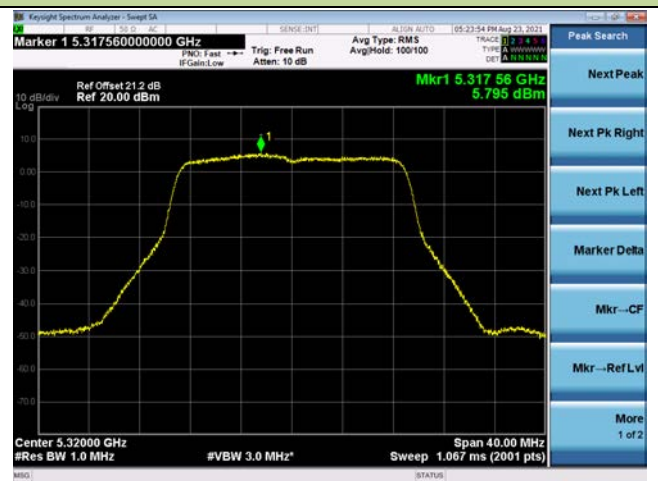


802.11ac-VHT20 Power Spectral Density – Ant 1


Channel 100 (5500MHz)

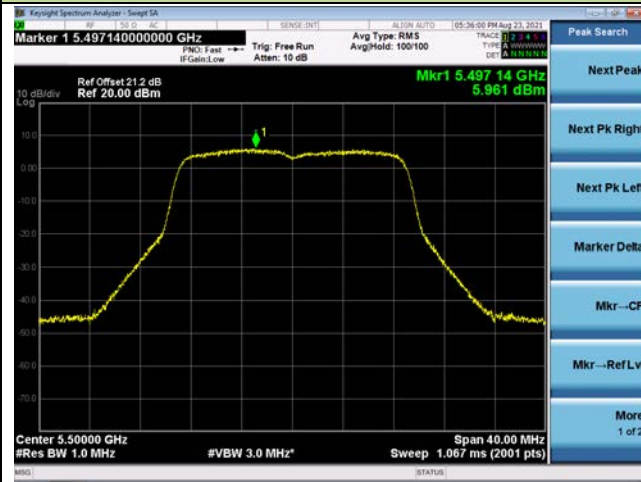

Channel 116 (5580MHz)

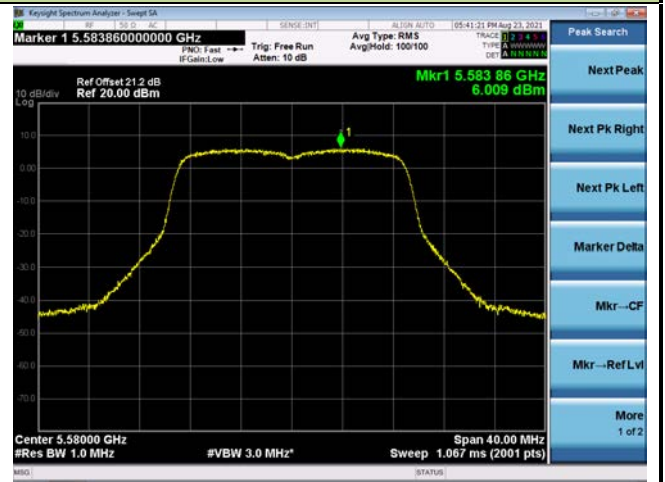


Channel 140 (5700MHz)

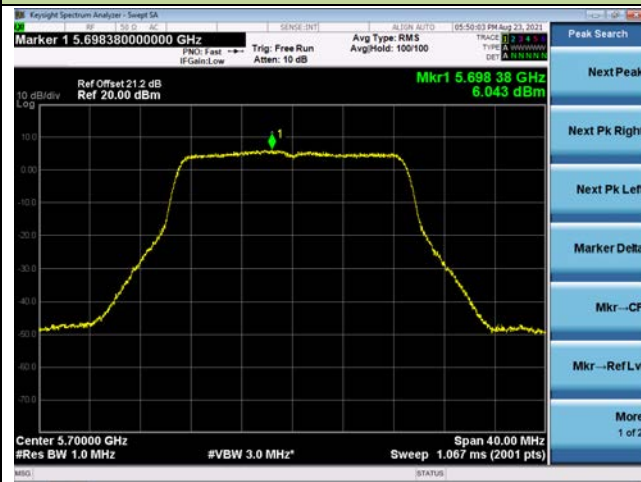


Channel 144 (5720MHz)



Channel 149 (5745MHz)

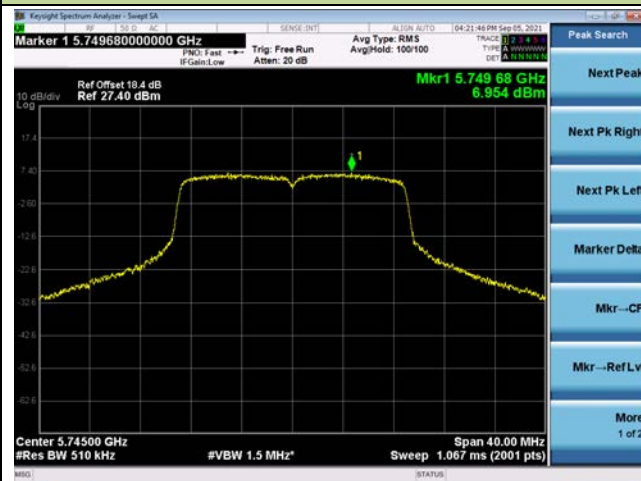


Channel 157 (5785MHz)

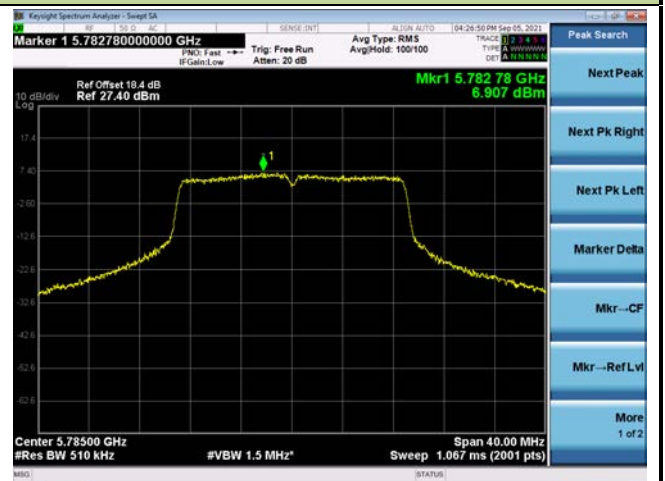

802.11ac-VHT20 Power Spectral Density – Ant 1

Channel 165 (5825MHz)

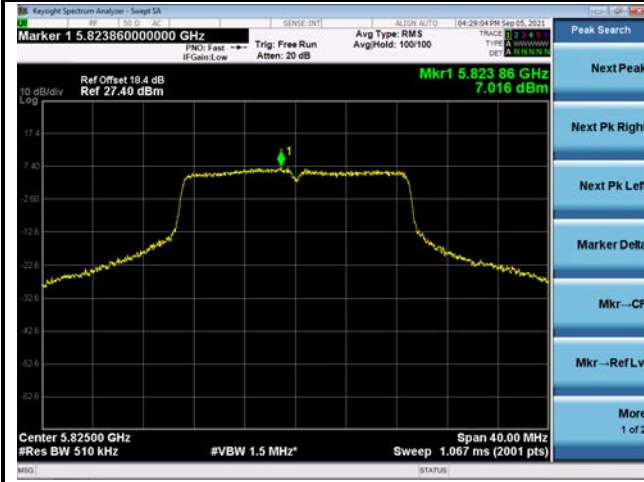

802.11ac-VHT40 Power Spectral Density – Ant 1

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)



Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 110 (5550MHz)



802.11ac-VHT40 Power Spectral Density – Ant 1


Channel 134 (5670MHz)




Channel 142 (5710MHz)



Channel 151 (5755MHz)

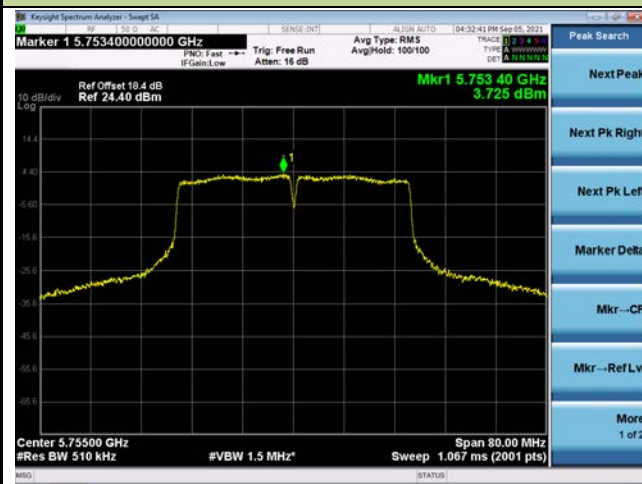

Channel 159 (5795MHz)

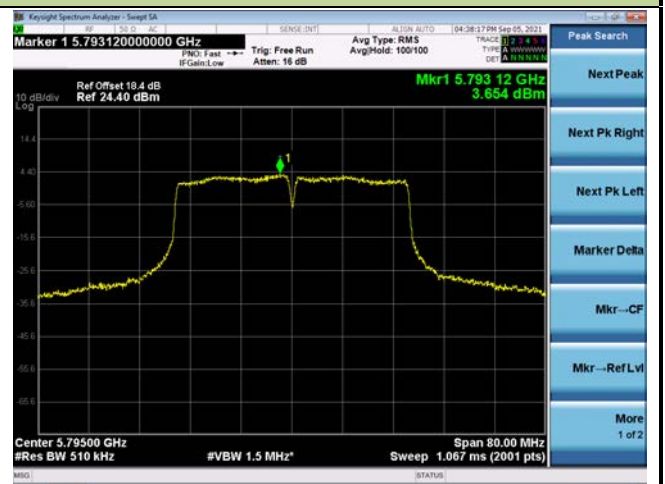

802.11ac-VHT80 Power Spectral Density – Ant 1

Channel 42 (5210MHz)



Channel 58 (5290MHz)



Channel 106 (5530MHz)




Channel 122 (5610MHz)



Channel 138 (5690MHz)



Channel 155 (5775MHz)

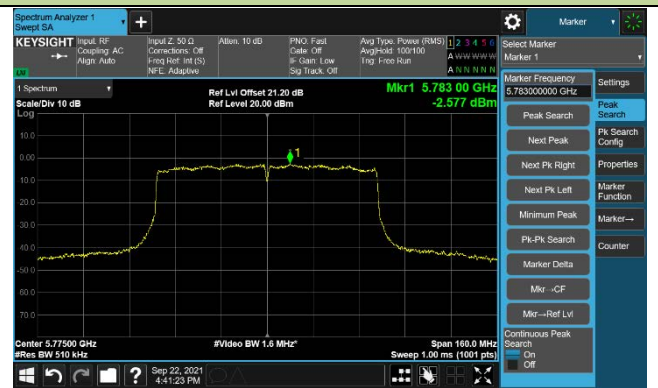

802.11ax-HE20 Power Spectral Density – Ant 1

Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)

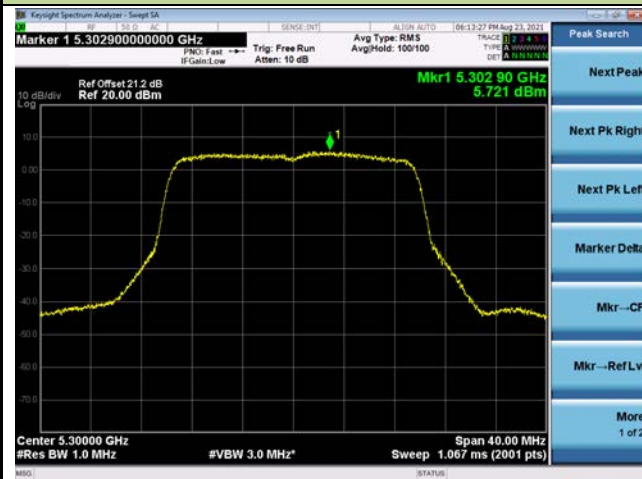


Channel 64 (5320MHz)



802.11ax-HE20 Power Spectral Density – Ant 1


Channel 100 (5500MHz)

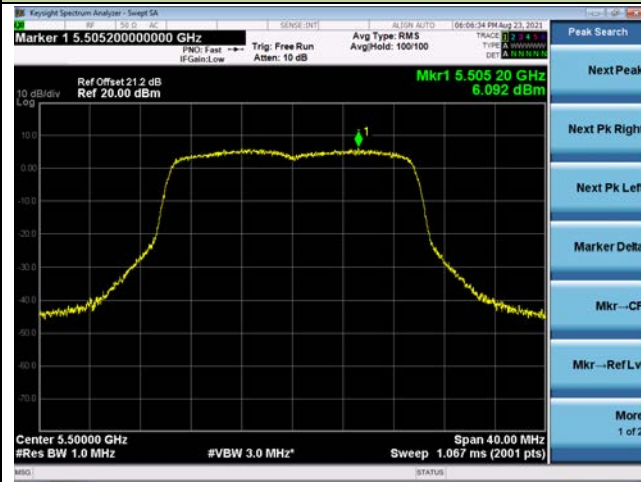

Channel 116 (5580MHz)




Channel 140 (5700MHz)

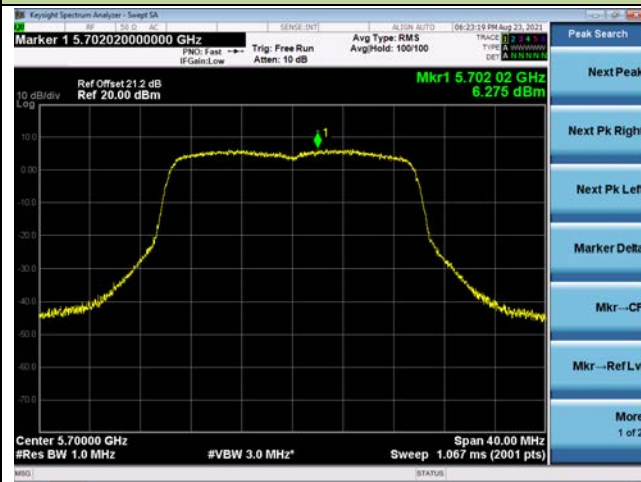


Channel 144 (5720MHz)



Channel 149 (5745MHz)

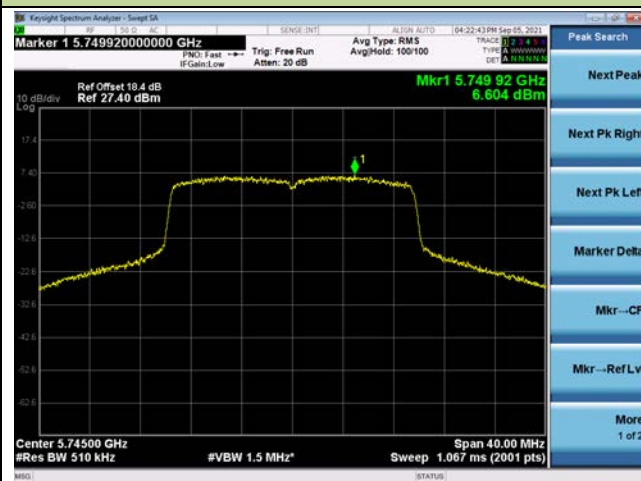


Channel 157 (5785MHz)

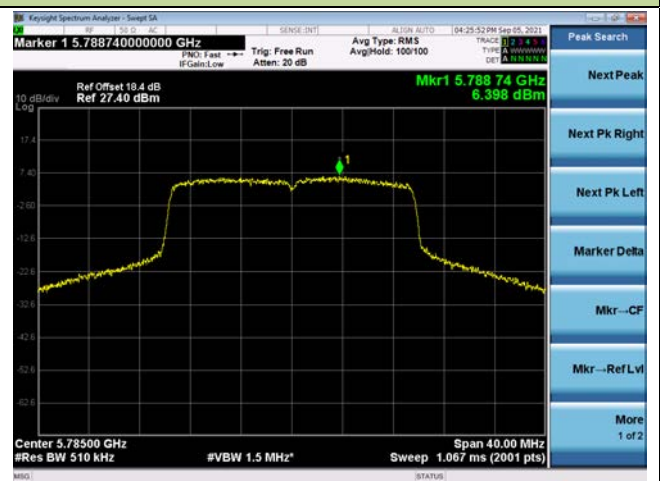

802.11ax-HE20 Power Spectral Density – Ant 1

Channel 165 (5825MHz)

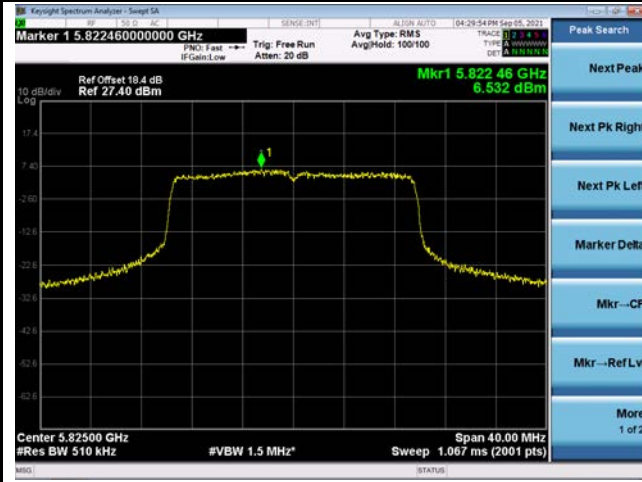

802.11ax-HE40 Power Spectral Density – Ant 1

Channel 38 (5190MHz)



Channel 46 (5230MHz)



Channel 54 (5270MHz)



Channel 62 (5310MHz)



Channel 102 (5510MHz)



Channel 110 (5550MHz)




802.11ax-HE40 Power Spectral Density – Ant 1

Channel 134 (5670MHz)



Channel 142 (5710MHz)

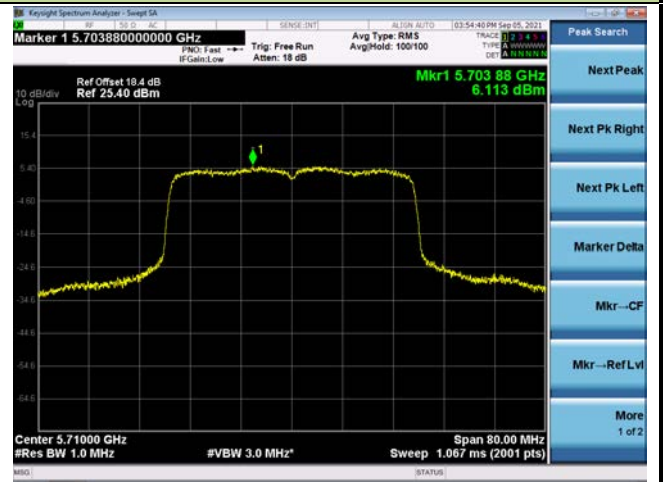

Channel 151 (5755MHz)



Channel 159 (5795MHz)



802.11ax-HE80 Power Spectral Density – Ant 1

Channel 42 (5210MHz)




Channel 58 (5290MHz)




Channel 106 (5530MHz)



Channel 122 (5610MHz)

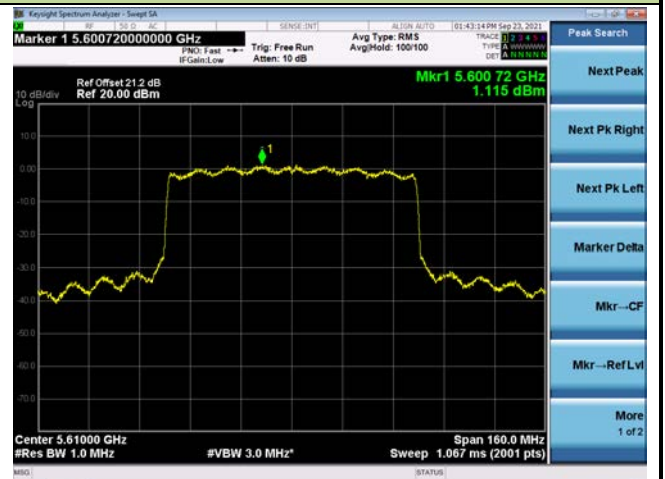

Channel 138 (5690MHz)

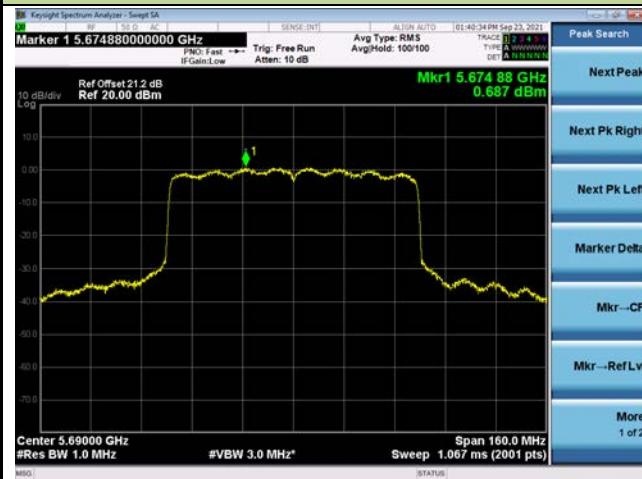

Channel 155 (5775MHz)



7.6. Radiated Spurious Emission Measurement

7.6.1.Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2.Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.6.3.Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4.Test Setup

Below 1GHz Test Setup:

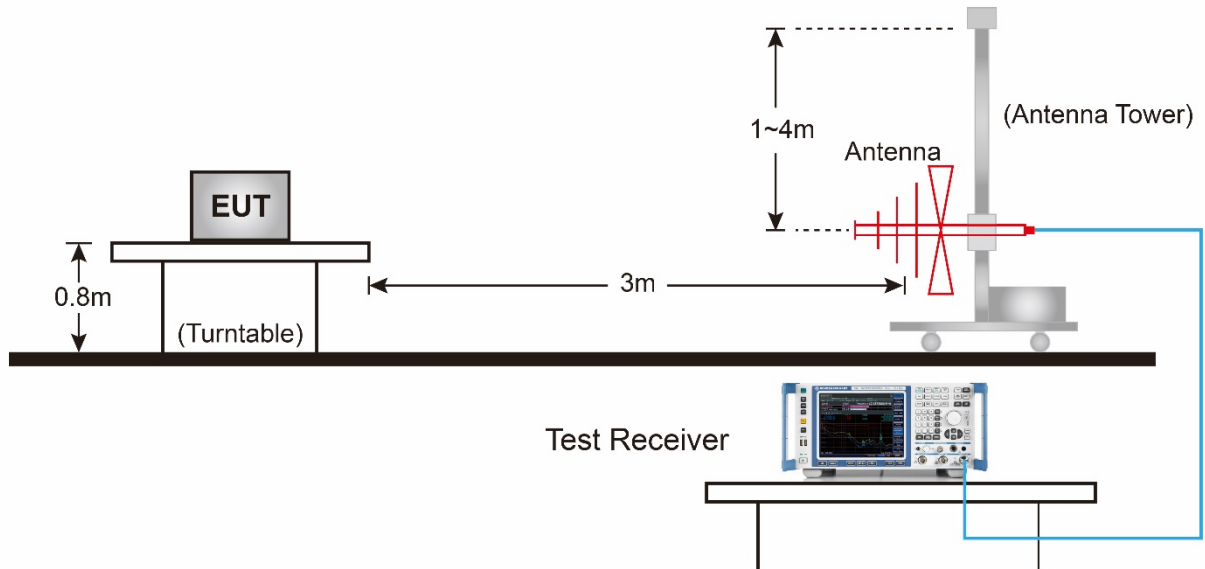


Above 1GHz Test Setup:

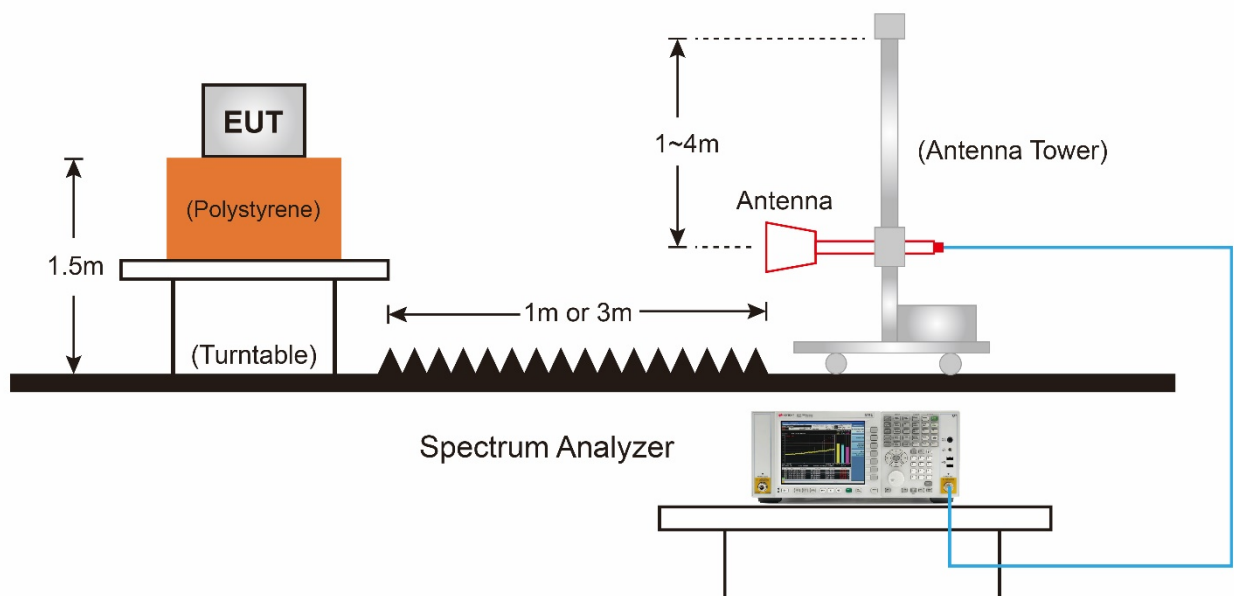

7.6.5.Test Result

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

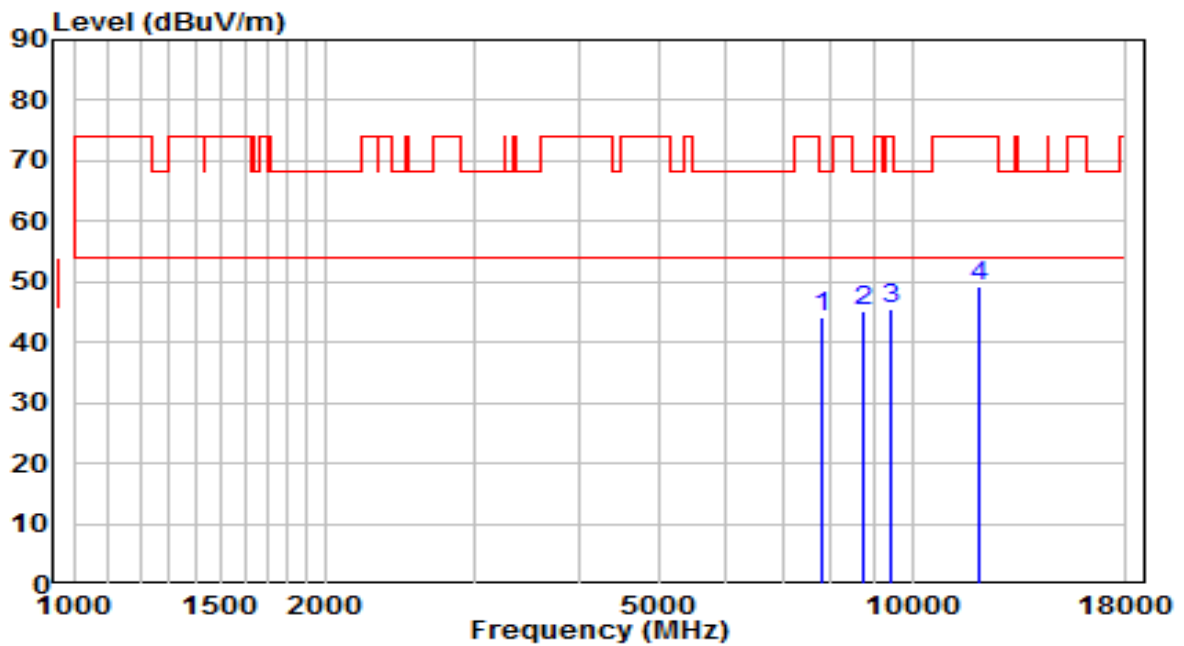


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7834.000	30.73	13.29	44.02	-24.18	68.20	Peak
2	* 8752.000	30.83	14.27	45.10	-23.10	68.20	Peak
3	9406.500	29.78	15.56	45.34	-28.66	74.00	Peak
4	12024.500	30.29	18.89	49.18	-24.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5180MHz	Test Voltage	AC 120V/60Hz

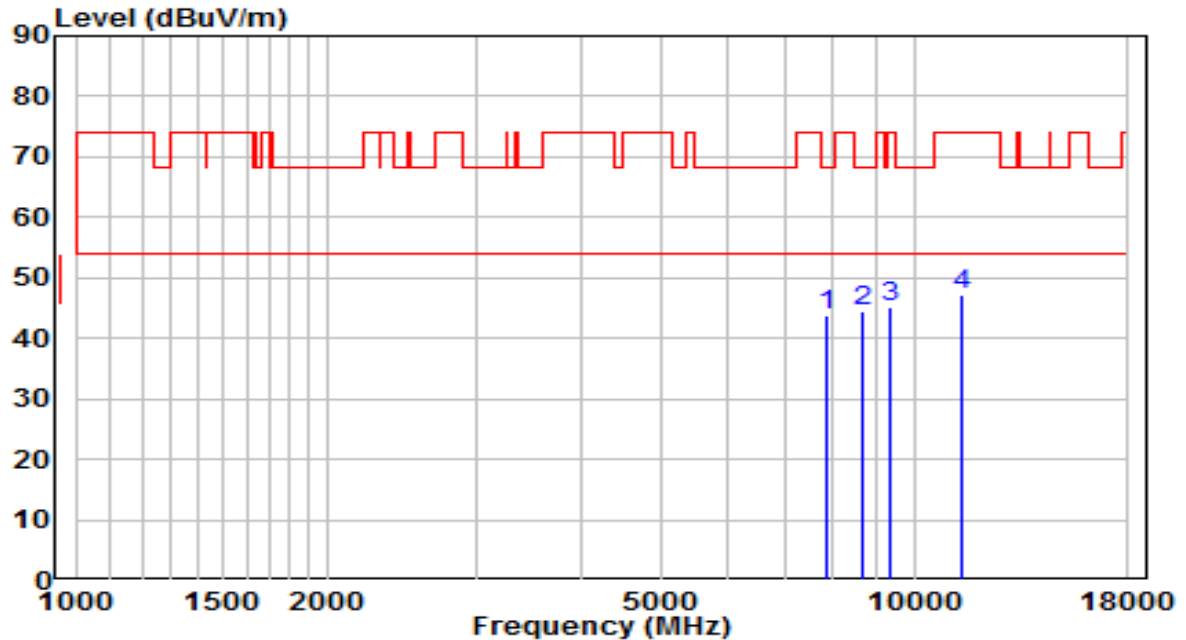


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7859.500	30.35	13.31	43.66	-24.54	68.20	Peak
2	* 8692.500	30.32	14.13	44.44	-23.76	68.20	Peak
3	9389.500	29.53	15.53	45.07	-28.93	74.00	Peak
4	11361.500	27.33	19.84	47.17	-26.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	AC 120V/60Hz

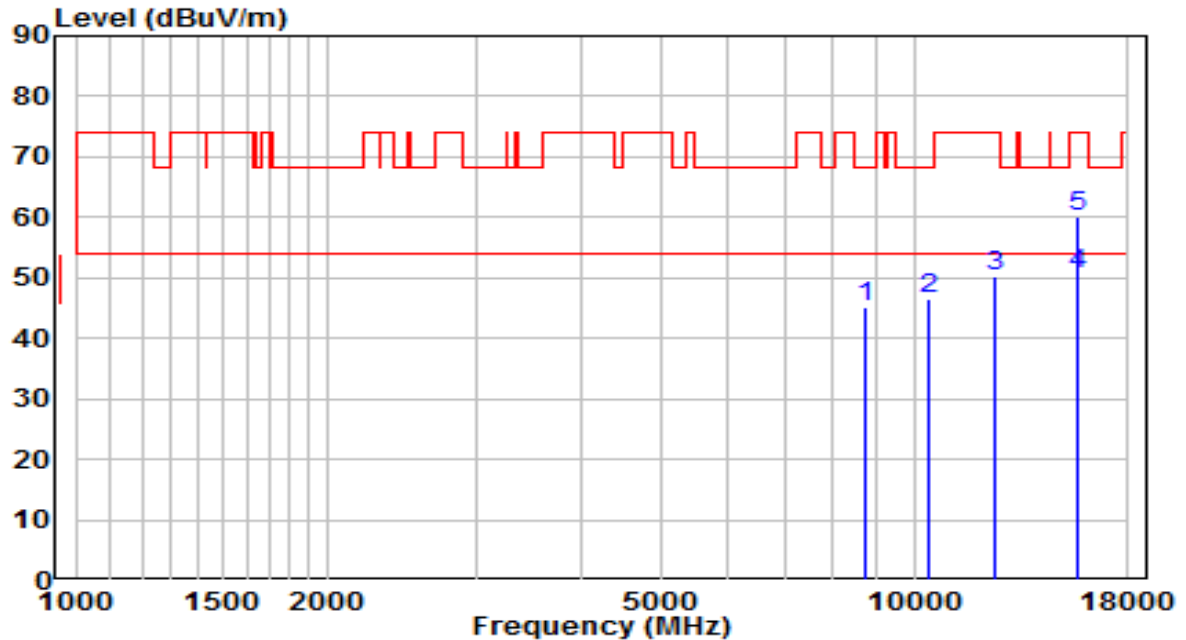


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8769.000	30.81	14.31	45.12	-23.08	68.20	Peak
2	10409.500	28.40	18.21	46.61	-21.59	68.20	Peak
3	12466.500	31.92	18.44	50.36	-23.64	74.00	Peak
4	* 15659.420	29.53	20.95	50.48	-3.52	54.00	Average
5	15662.500	39.12	20.95	60.06	-13.94	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5220MHz	Test Voltage	AC 120V/60Hz

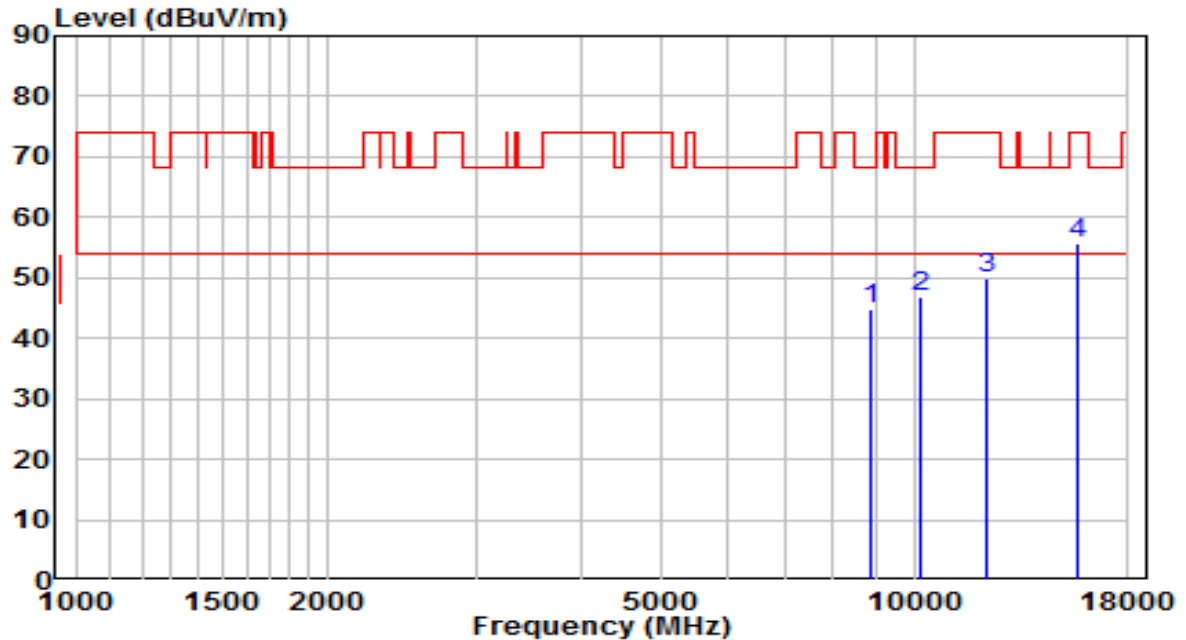


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8871.000	30.17	14.56	44.73	-23.47	68.20	Peak
2	10171.500	29.78	17.25	47.03	-21.17	68.20	Peak
3	12177.500	31.24	18.74	49.98	-24.02	74.00	Peak
4	* 15662.500	34.79	20.95	55.74	-18.26	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	AC 120V/60Hz

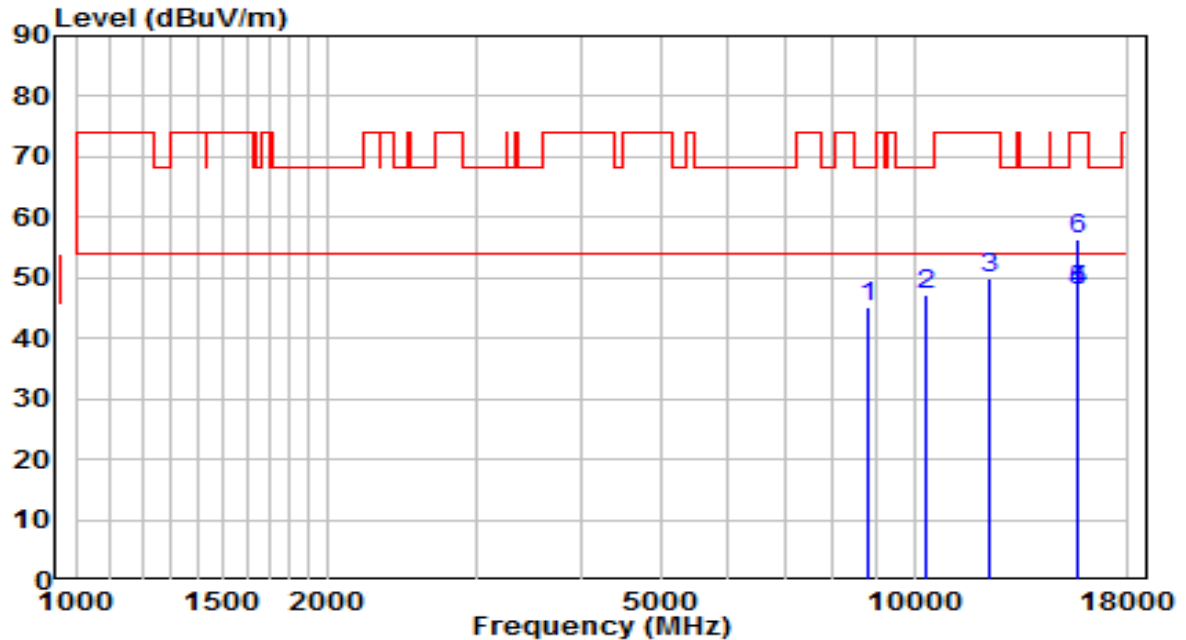


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8803.000	30.80	14.40	45.20	-23.00	68.20	Peak
2	10324.500	29.49	17.86	47.35	-20.85	68.20	Peak
3	12262.500	31.29	18.65	49.94	-24.06	74.00	Peak
4	15719.290	27.07	20.81	47.87	-26.13	74.00	Peak
5	* 15719.290	27.07	20.81	47.87	-6.13	54.00	Average
6	15722.000	35.49	20.80	56.29	-17.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5240MHz	Test Voltage	AC 120V/60Hz

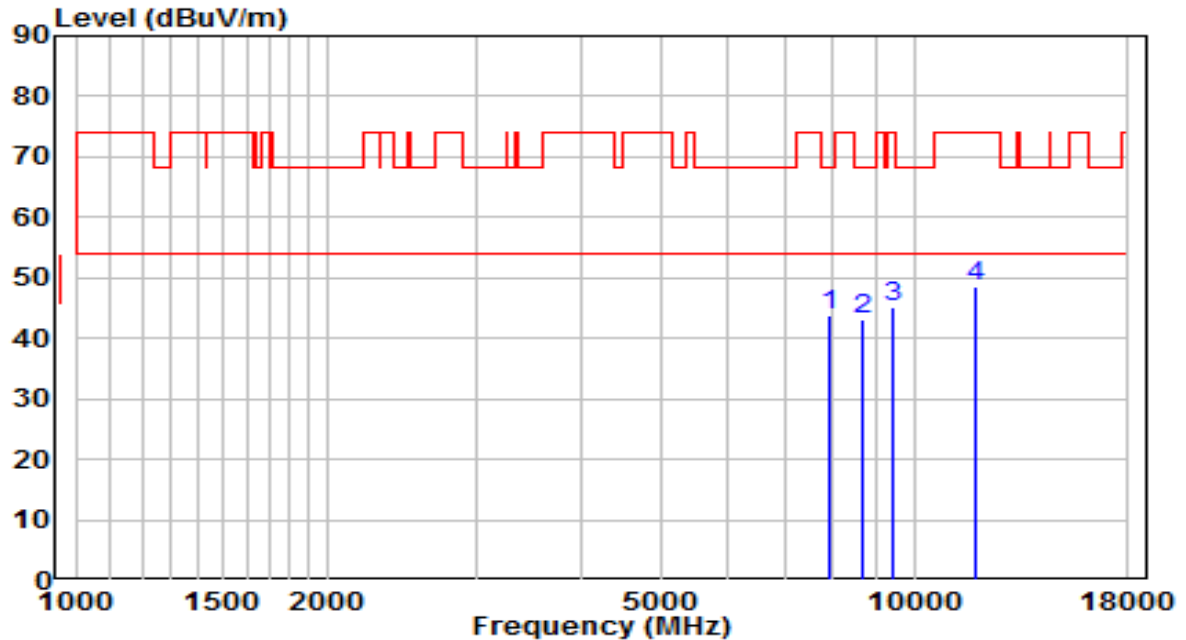


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	7944.500	30.30	13.38	43.68	-24.52	68.20	Peak
2		8709.500	28.97	14.17	43.14	-25.06	68.20	Peak
3		9415.000	29.74	15.58	45.32	-28.68	74.00	Peak
4		11829.000	29.18	19.31	48.48	-25.52	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260MHz	Test Voltage	AC 120V/60Hz

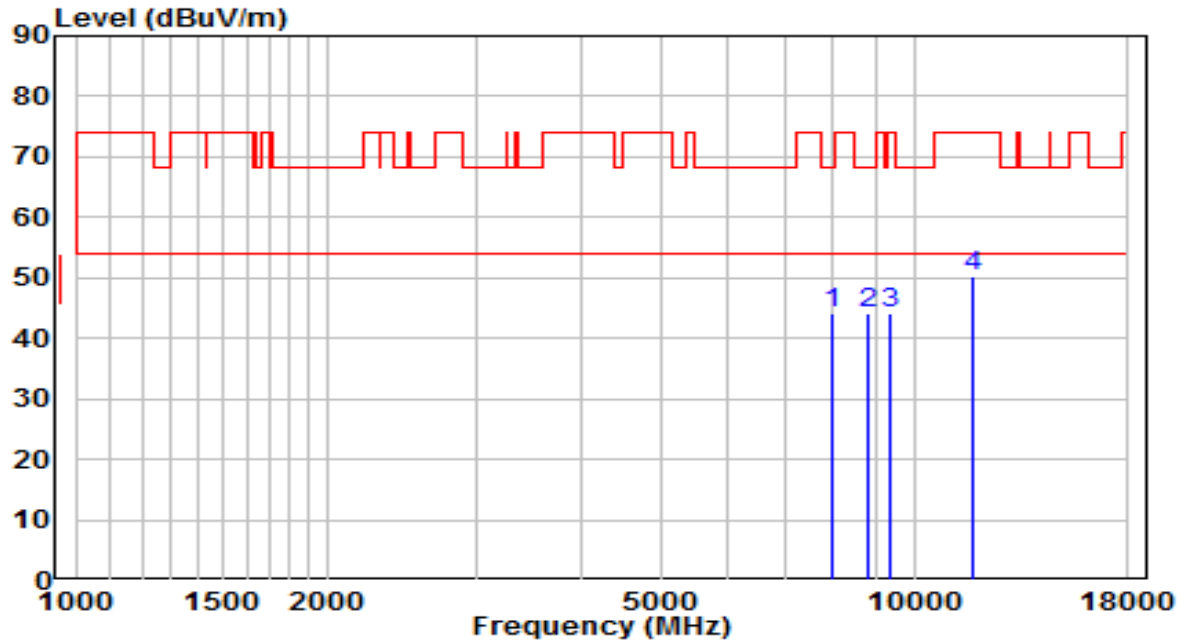


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7961.500	30.71	13.40	44.11	-24.09	68.20	Peak
2	8820.000	29.74	14.44	44.18	-24.02	68.20	Peak
3	9355.500	28.66	15.48	44.14	-29.86	74.00	Peak
4	* 11718.500	30.86	19.56	50.41	-23.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5260MHz	Test Voltage	AC 120V/60Hz

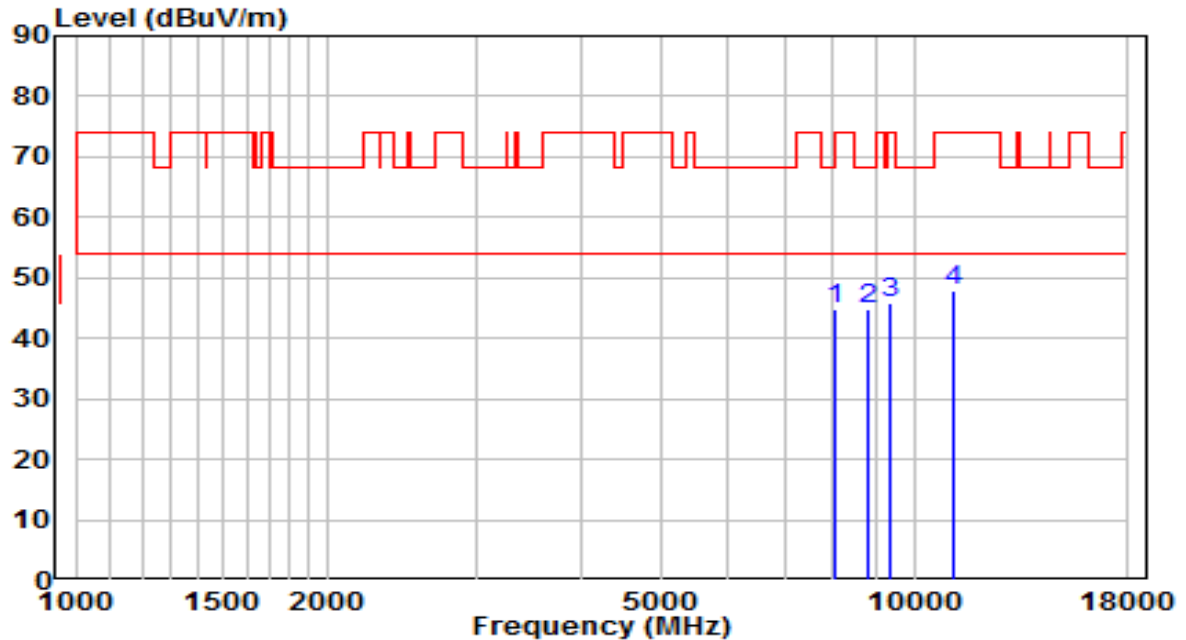


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8021.000	31.42	13.44	44.86	-23.34	68.20	Peak
2	* 8828.500	30.53	14.46	44.99	-23.21	68.20	Peak
3	9355.500	30.37	15.48	45.85	-28.15	74.00	Peak
4	11115.000	28.58	19.46	48.04	-25.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300MHz	Test Voltage	AC 120V/60Hz

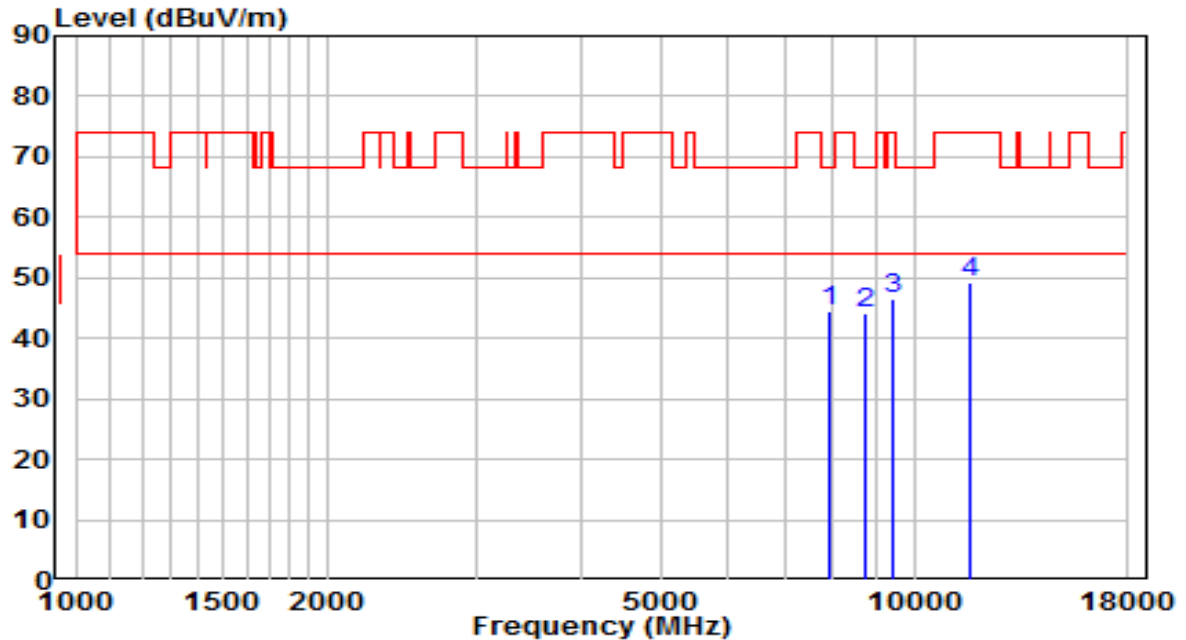


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	7944.500	30.95	13.38	44.34	-23.86	68.20	Peak
2		8760.500	29.98	14.29	44.28	-23.92	68.20	Peak
3		9457.500	30.80	15.65	46.45	-27.55	74.00	Peak
4		11693.000	29.63	19.61	49.25	-24.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5300MHz	Test Voltage	AC 120V/60Hz

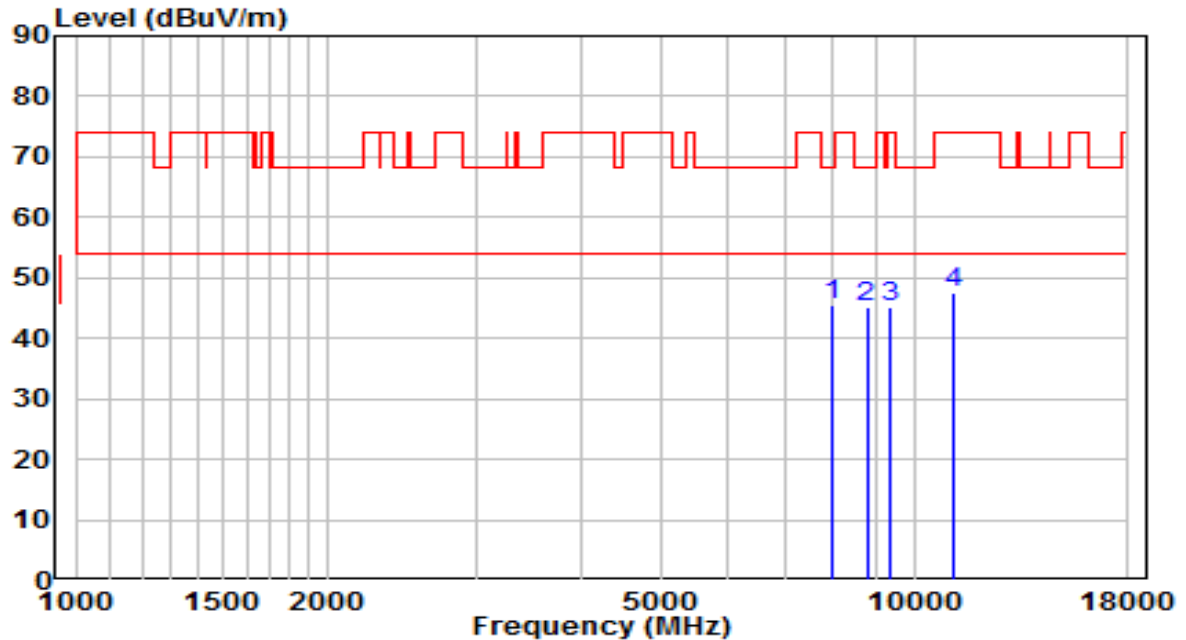


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	7978.500	32.04	13.41	45.45	-22.75	68.20	Peak
2		8777.500	30.87	14.33	45.21	-22.99	68.20	Peak
3		9364.000	29.58	15.49	45.07	-28.93	74.00	Peak
4		11115.000	27.97	19.46	47.42	-26.58	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	AC 120V/60Hz

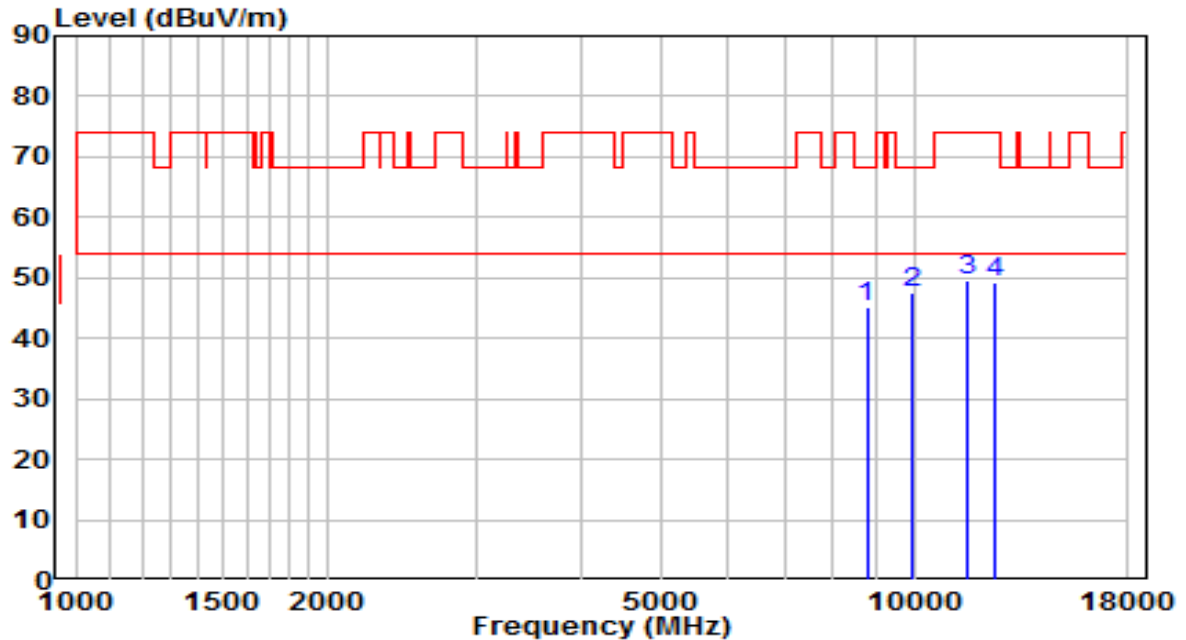


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8777.500	30.88	14.33	45.21	-22.99	68.20	Peak
2	* 9976.000	30.89	16.52	47.41	-20.79	68.20	Peak
3	11565.500	29.85	19.90	49.75	-24.25	74.00	Peak
4	12500.500	30.98	18.41	49.38	-24.62	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5320MHz	Test Voltage	AC 120V/60Hz

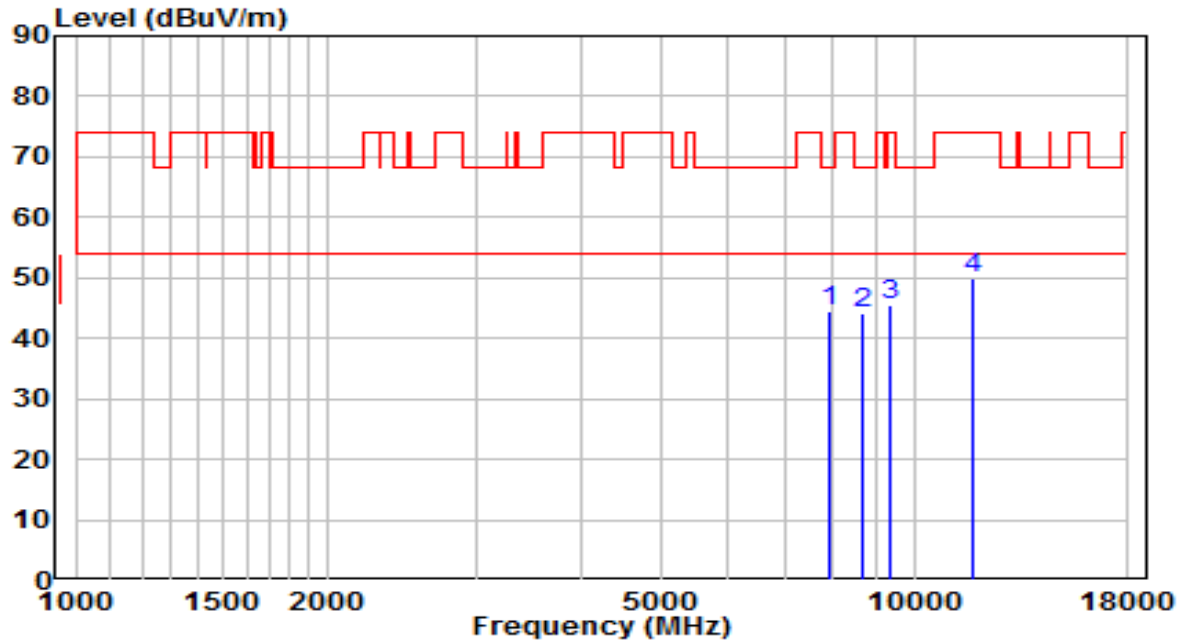


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	7910.500	31.10	13.36	44.46	-23.74	68.20	Peak
2		8675.500	30.11	14.08	44.20	-24.00	68.20	Peak
3		9381.000	30.02	15.52	45.54	-28.46	74.00	Peak
4		11744.000	30.53	19.50	50.03	-23.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	AC 120V/60Hz

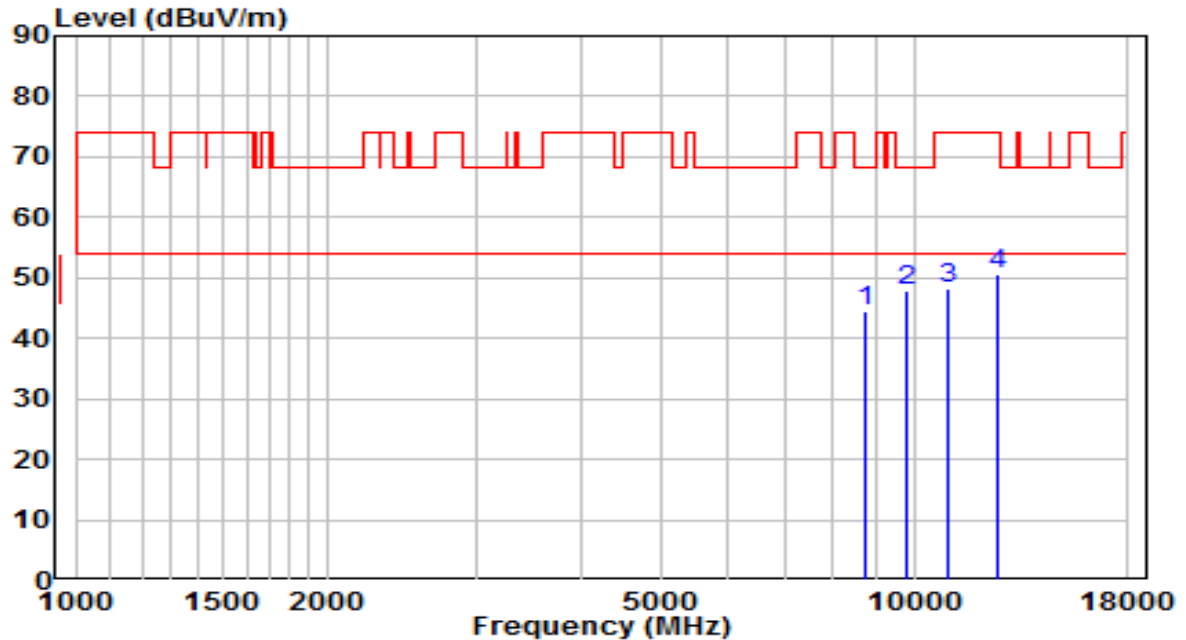


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8752.000	30.31	14.27	44.59	-23.61	68.20	Peak
2	* 9806.000	31.76	16.23	48.00	-20.20	68.20	Peak
3	10996.000	29.08	19.27	48.35	-25.65	74.00	Peak
4	12611.000	31.96	18.73	50.70	-23.30	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5500MHz	Test Voltage	AC 120V/60Hz

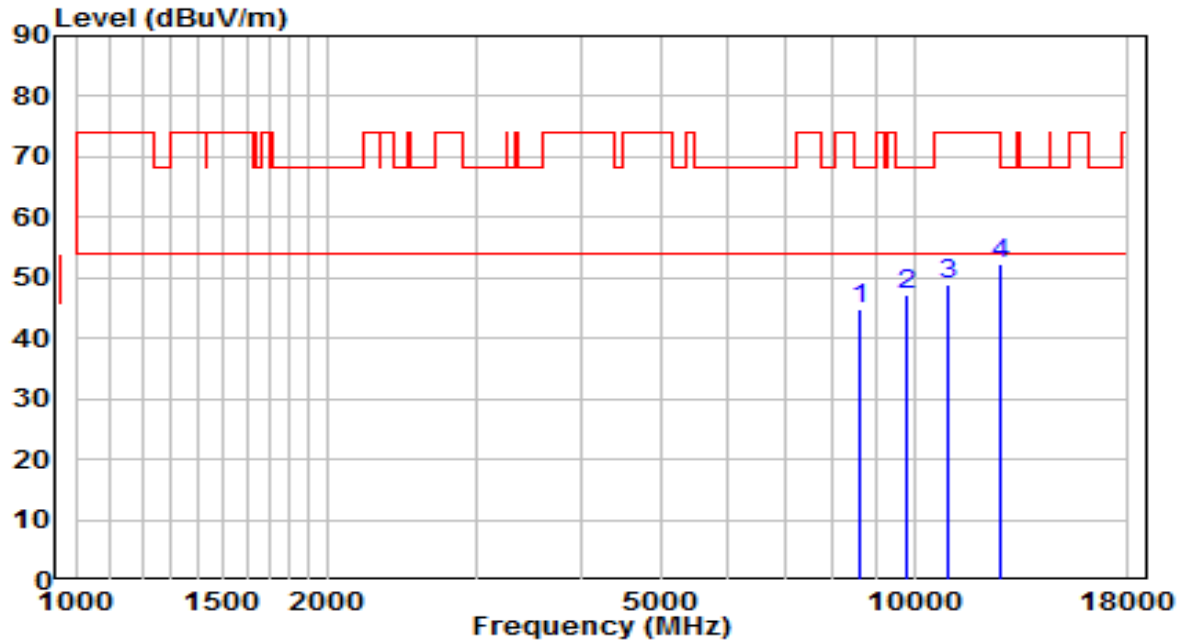


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8599.000	30.99	13.90	44.88	-23.32	68.20	Peak
2	* 9806.000	31.03	16.23	47.27	-20.93	68.20	Peak
3	11004.500	29.47	19.29	48.76	-25.24	74.00	Peak
4	12662.000	33.38	18.89	52.27	-21.73	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5580MHz	Test Voltage	AC 120V/60Hz

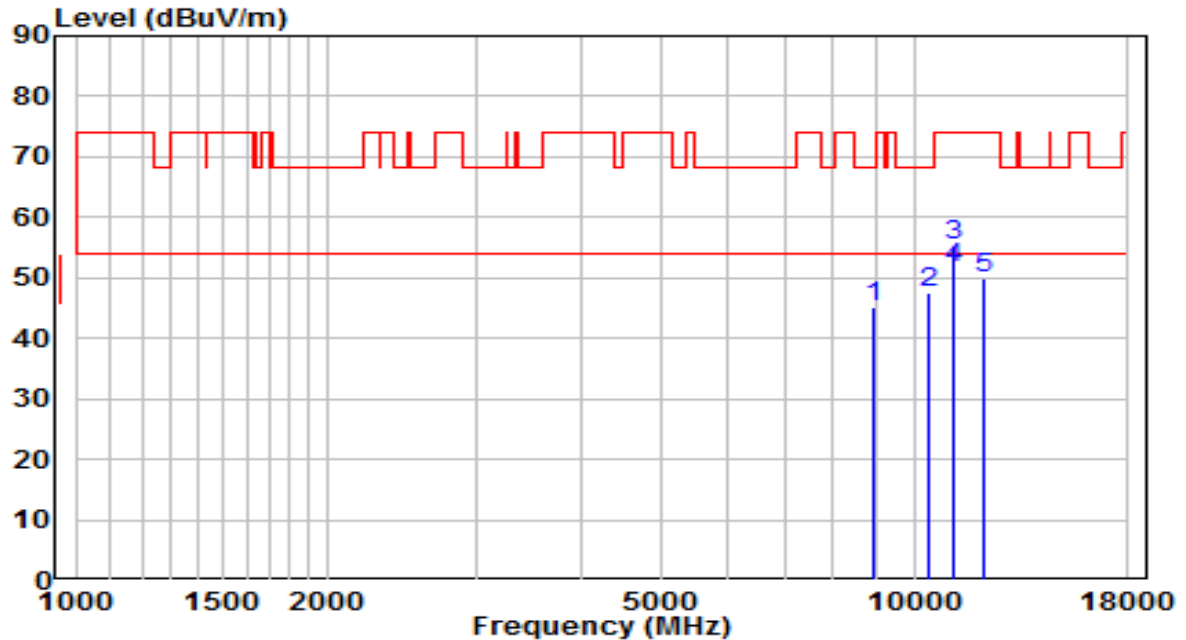


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8913.500	30.54	14.67	45.21	-22.99	68.20	Peak
2	10392.500	29.35	18.14	47.49	-20.71	68.20	Peak
3	11166.000	35.80	19.54	55.34	-18.66	74.00	Peak
4	* 11166.000	31.92	19.54	51.46	-2.54	54.00	Average
5	12075.500	30.92	18.84	49.76	-24.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5580MHz	Test Voltage	AC 120V/60Hz

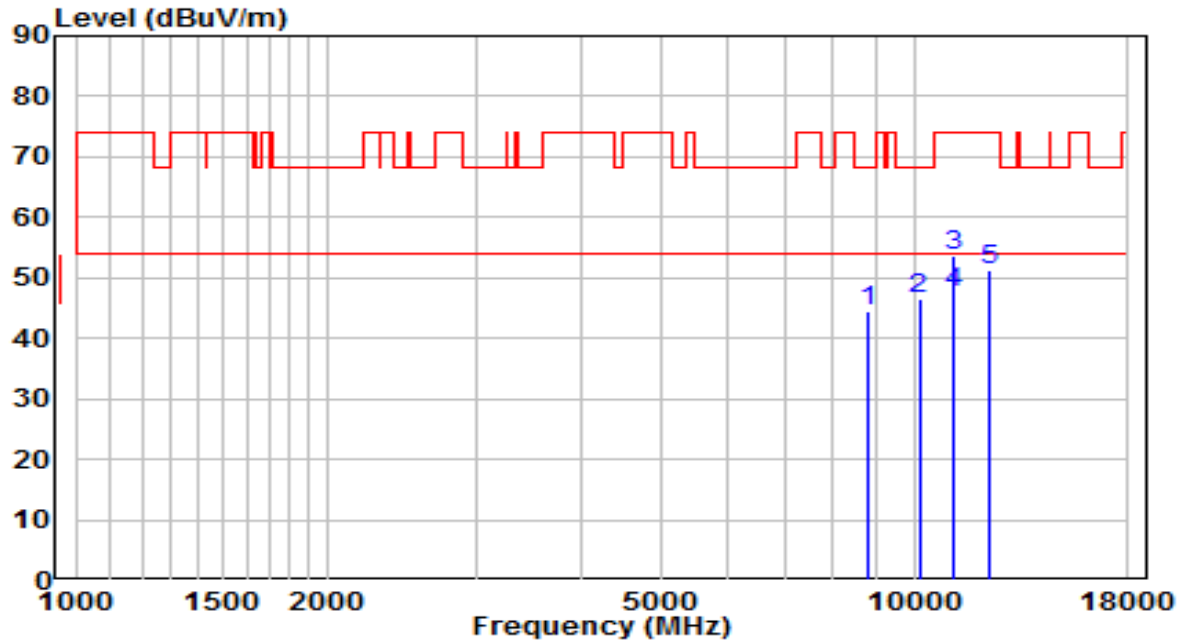


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8794.500	30.09	14.38	44.47	-23.73	68.20	Peak
2	10137.500	29.46	17.11	46.57	-21.63	68.20	Peak
3	11157.500	34.28	19.52	53.80	-20.20	74.00	Peak
4	* 11157.500	28.01	19.52	47.53	-6.47	54.00	Average
5	12313.500	32.80	18.60	51.40	-22.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	AC 120V/60Hz

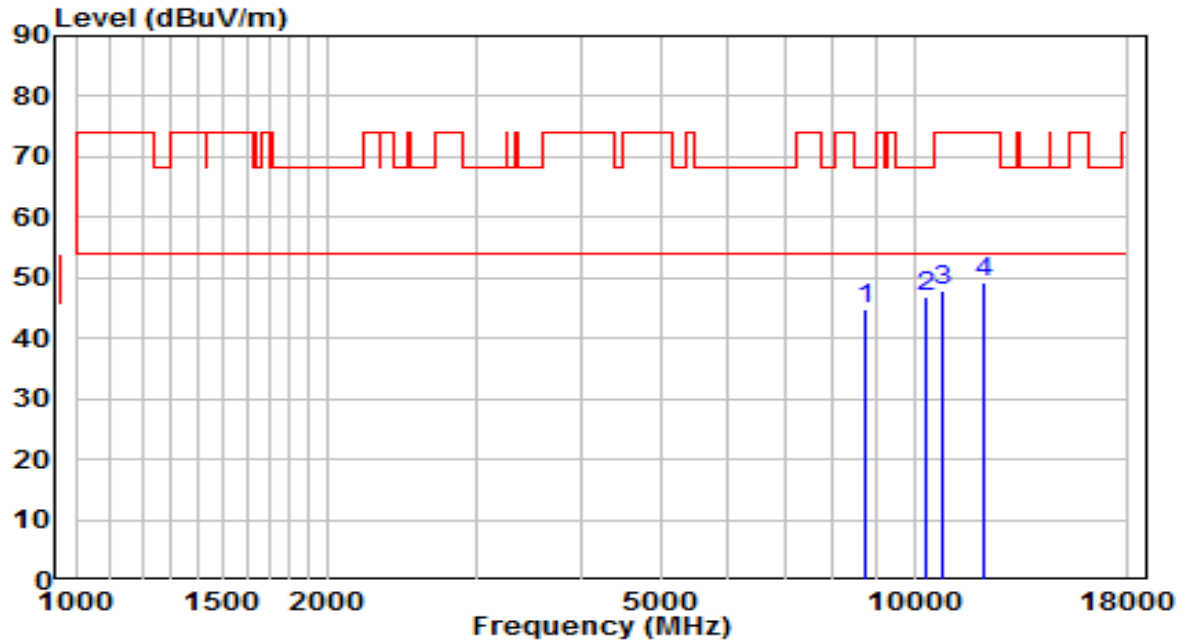


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8760.500	30.51	14.29	44.81	-23.39	68.20	Peak
2	* 10316.000	28.91	17.83	46.74	-21.46	68.20	Peak
3	10826.000	28.87	19.03	47.90	-26.10	74.00	Peak
4	12143.500	30.56	18.77	49.33	-24.67	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5700MHz	Test Voltage	AC 120V/60Hz

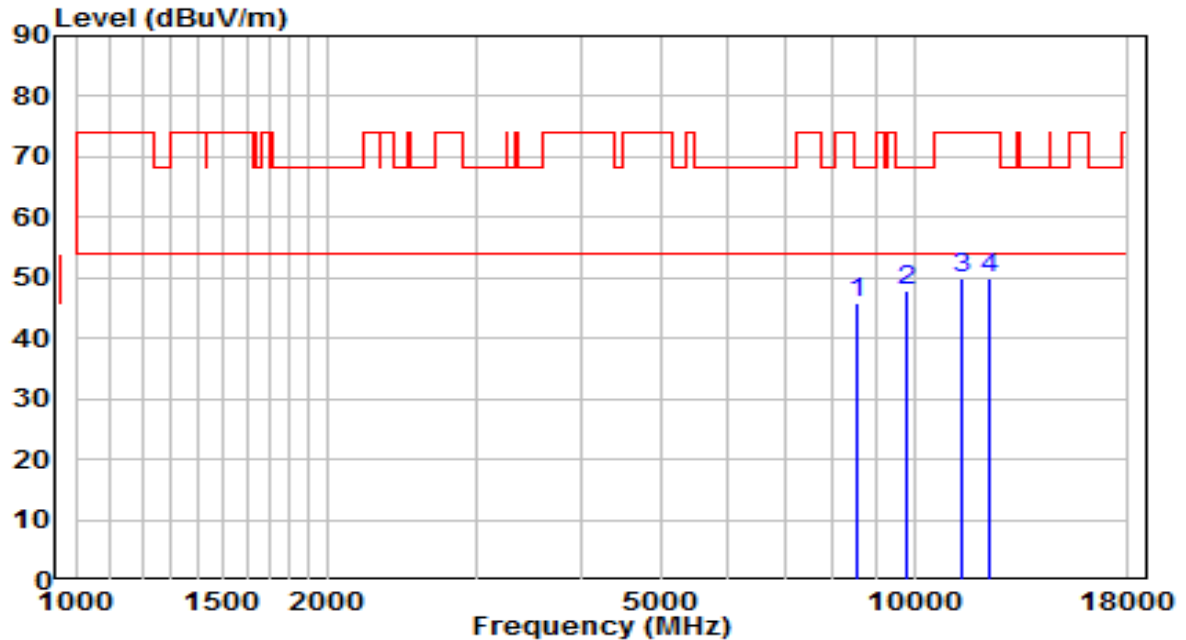


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8556.500	32.04	13.79	45.83	-22.37	68.20	Peak
2	* 9806.000	31.65	16.23	47.88	-20.32	68.20	Peak
3	11395.500	30.09	19.89	49.98	-24.02	74.00	Peak
4	12322.000	31.41	18.59	50.00	-24.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720MHz	Test Voltage	AC 120V/60Hz

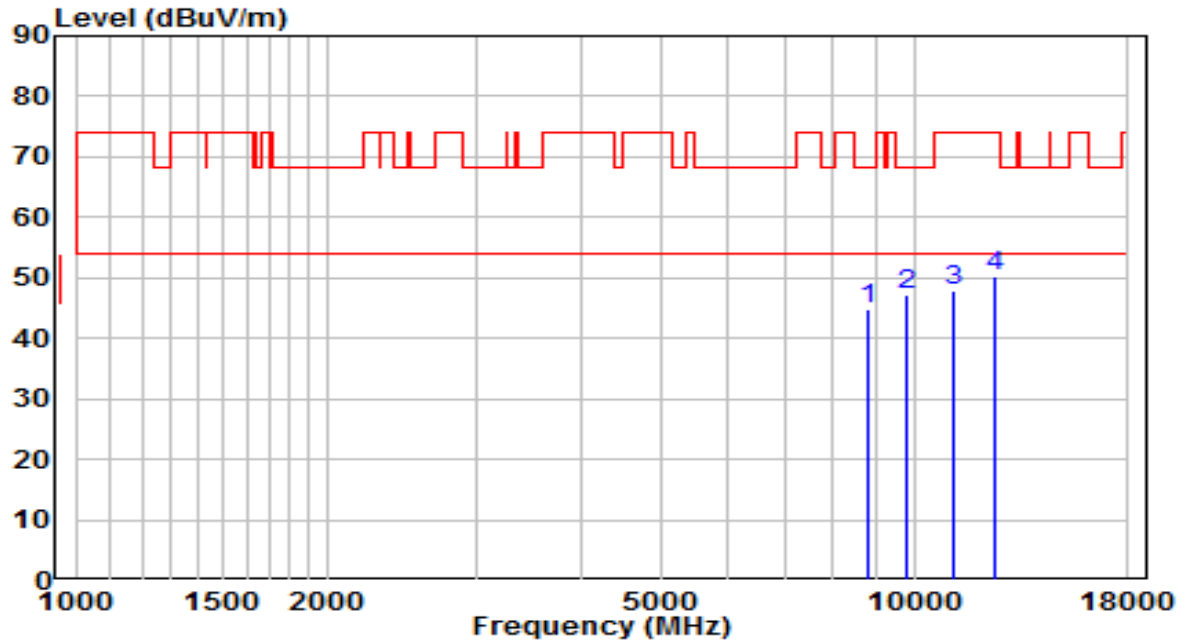


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8837.000	30.50	14.48	44.98	-23.22	68.20	Peak
2	* 9806.000	31.02	16.23	47.25	-20.95	68.20	Peak
3	11123.500	28.30	19.47	47.77	-26.23	74.00	Peak
4	12492.000	31.87	18.41	50.28	-23.72	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5720MHz	Test Voltage	AC 120V/60Hz

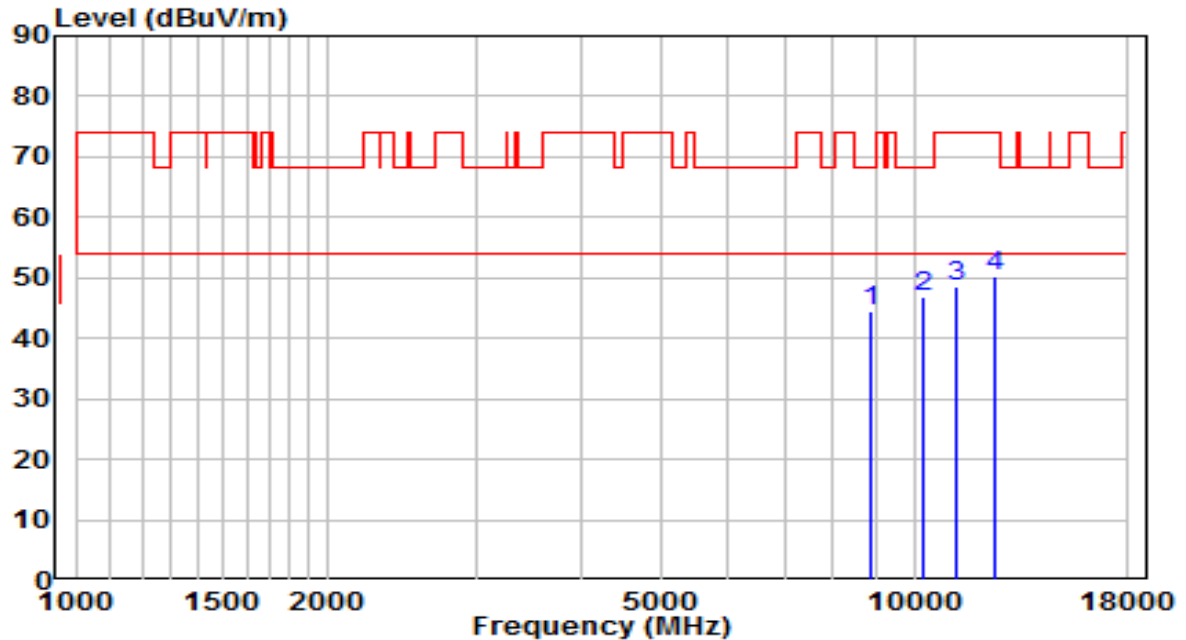


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8862.500	30.05	14.54	44.59	-23.61	68.20	Peak
2	* 10273.500	29.18	17.66	46.84	-21.36	68.20	Peak
3	11251.000	28.73	19.67	48.40	-25.60	74.00	Peak
4	12500.500	31.69	18.41	50.10	-23.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

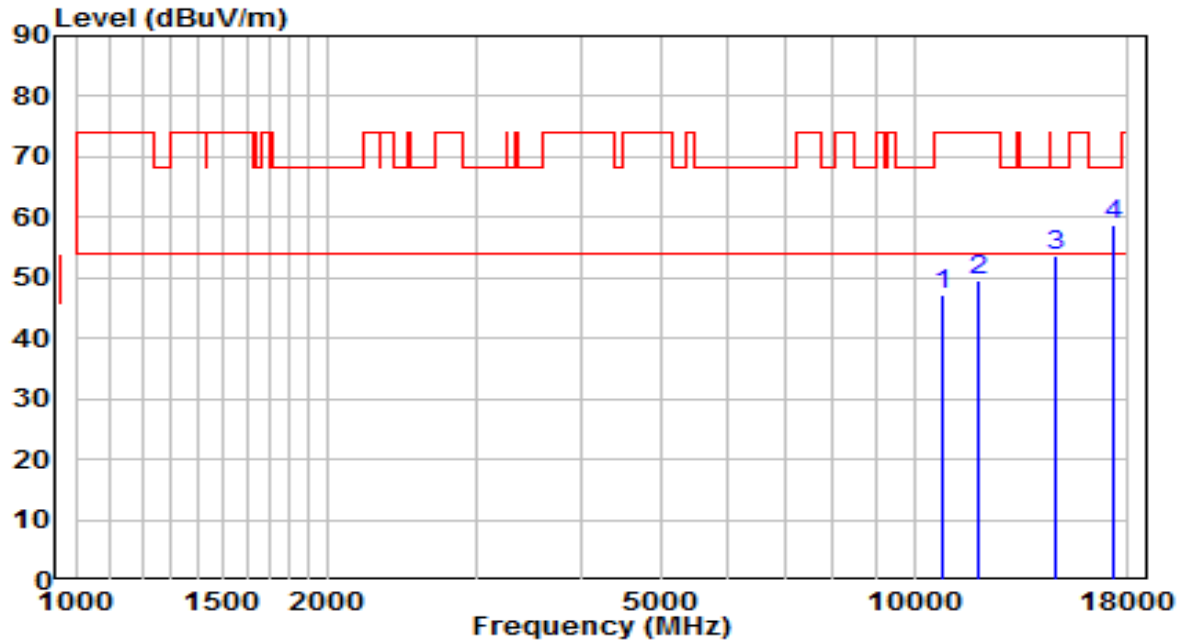


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10817.500	28.29	19.02	47.32	-26.68	74.00	Peak
2	11965.000	30.49	19.00	49.49	-24.51	74.00	Peak
3	14719.000	31.39	22.30	53.69	-14.51	68.20	Peak
4	* 17235.000	32.77	26.08	58.85	-9.35	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5745MHz	Test Voltage	AC 120V/60Hz

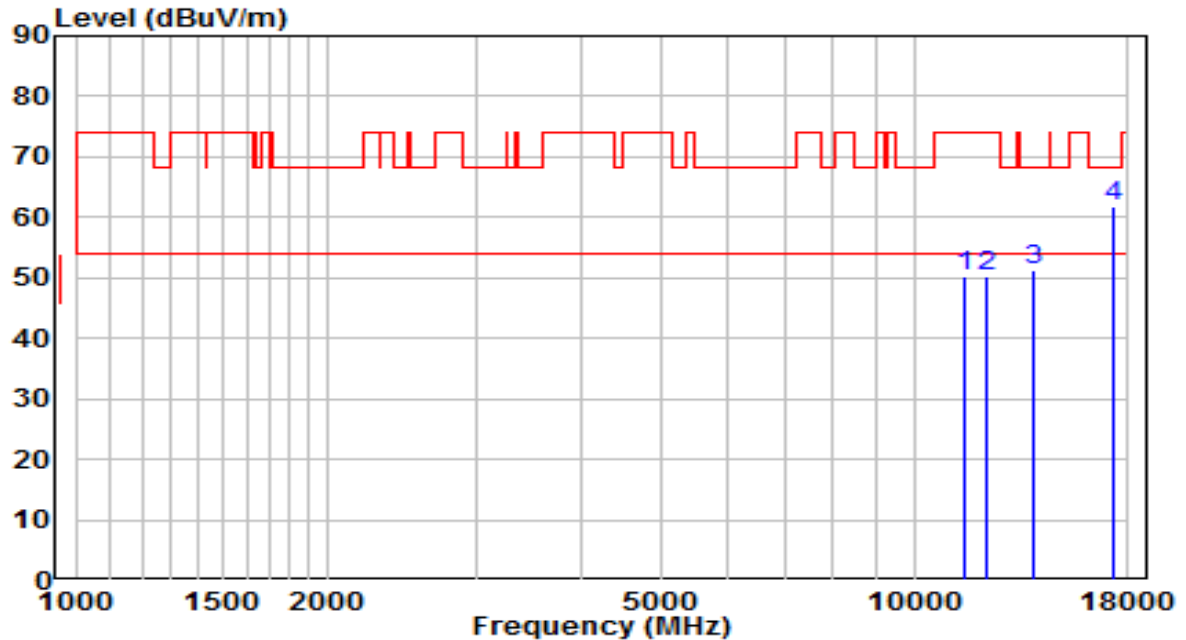


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11489.000	30.10	20.03	50.13	-23.87	74.00	Peak
2	12186.000	31.59	18.73	50.32	-23.68	74.00	Peak
3	13860.500	29.19	22.26	51.45	-16.75	68.20	Peak
4	* 17226.500	35.71	26.02	61.73	-6.47	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	AC 120V/60Hz

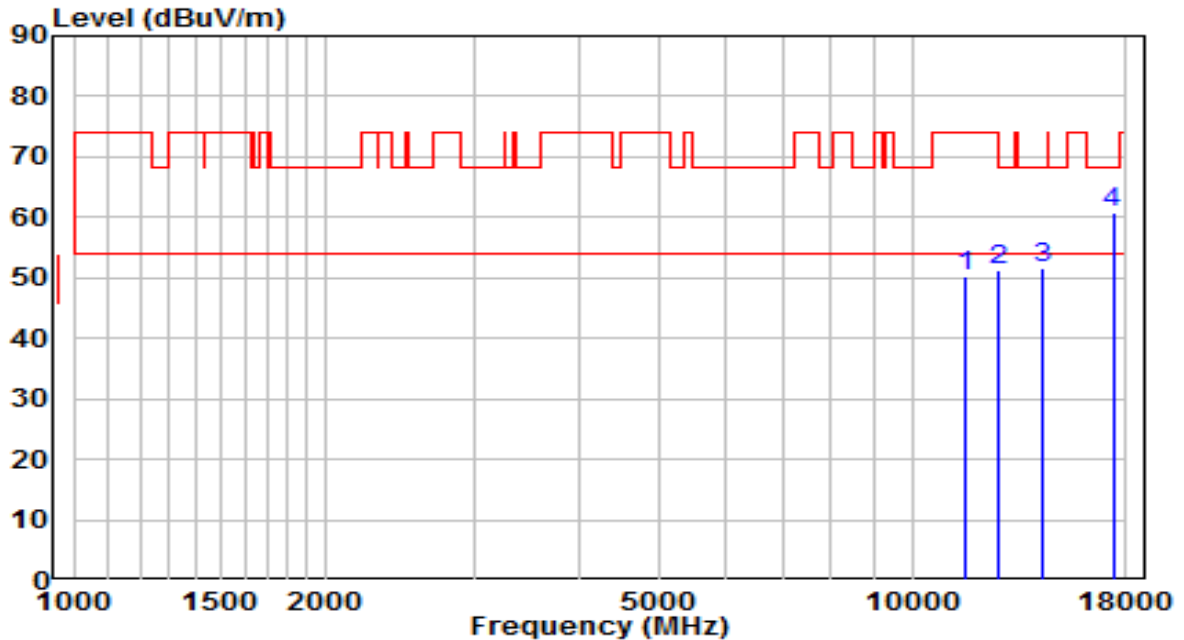


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11565.500	30.52	19.90	50.42	-23.58	74.00	Peak
2	12645.000	32.49	18.84	51.32	-22.68	74.00	Peak
3	14268.500	29.33	22.44	51.77	-16.43	68.20	Peak
4	* 17354.000	33.96	26.87	60.83	-7.37	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5785MHz	Test Voltage	AC 120V/60Hz

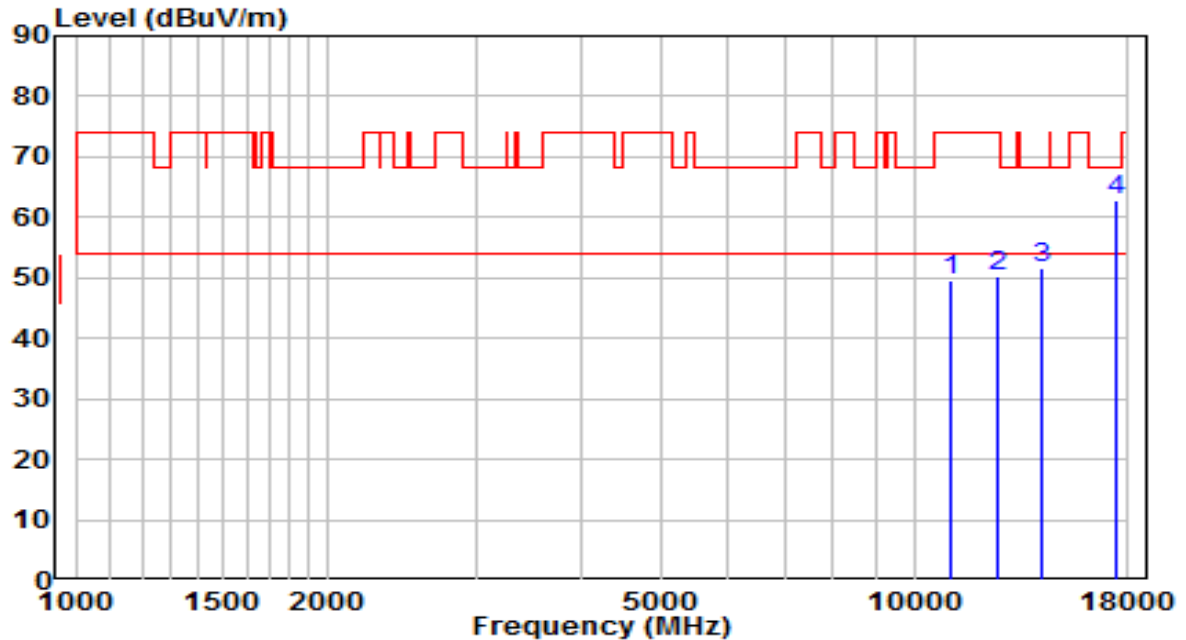


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11072.500	30.21	19.39	49.61	-24.39	74.00	Peak
2	12560.000	31.81	18.58	50.40	-23.60	74.00	Peak
3	14217.500	29.08	22.44	51.52	-16.68	68.20	Peak
4	* 17362.500	35.94	26.92	62.87	-5.33	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

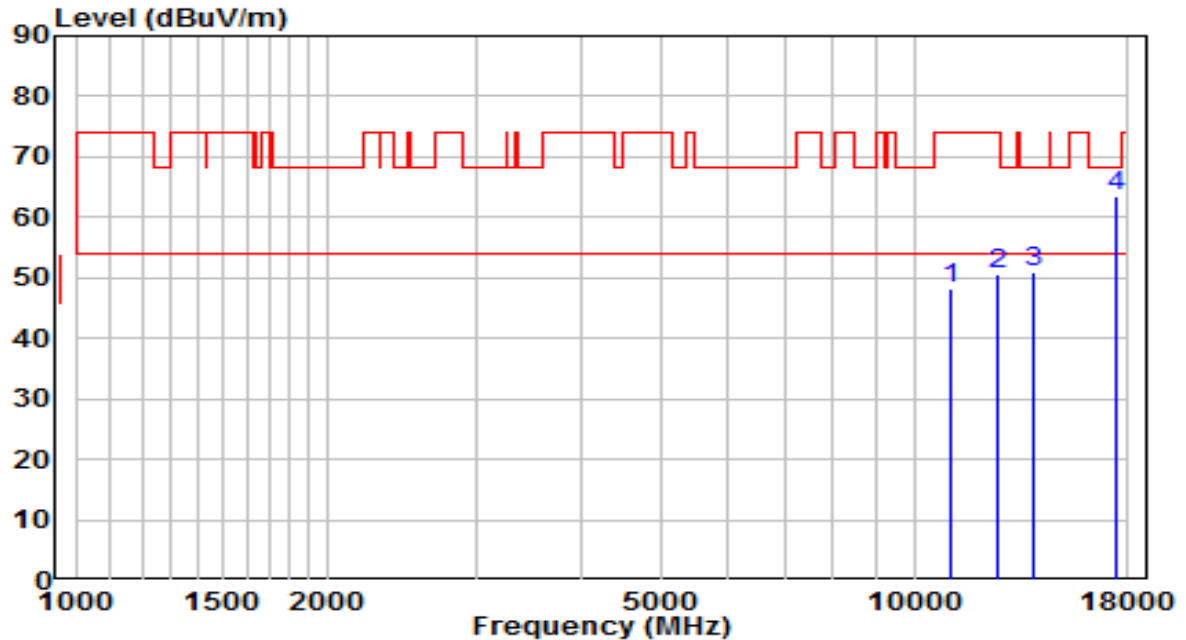


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11038.500	28.84	19.34	48.18	-25.82	74.00	Peak
2	12585.500	31.84	18.66	50.50	-23.50	74.00	Peak
3	13920.000	28.50	22.33	50.83	-17.37	68.20	Peak
4	* 17473.000	35.94	27.66	63.60	-4.60	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11a at Channel 5825MHz	Test Voltage	AC 120V/60Hz

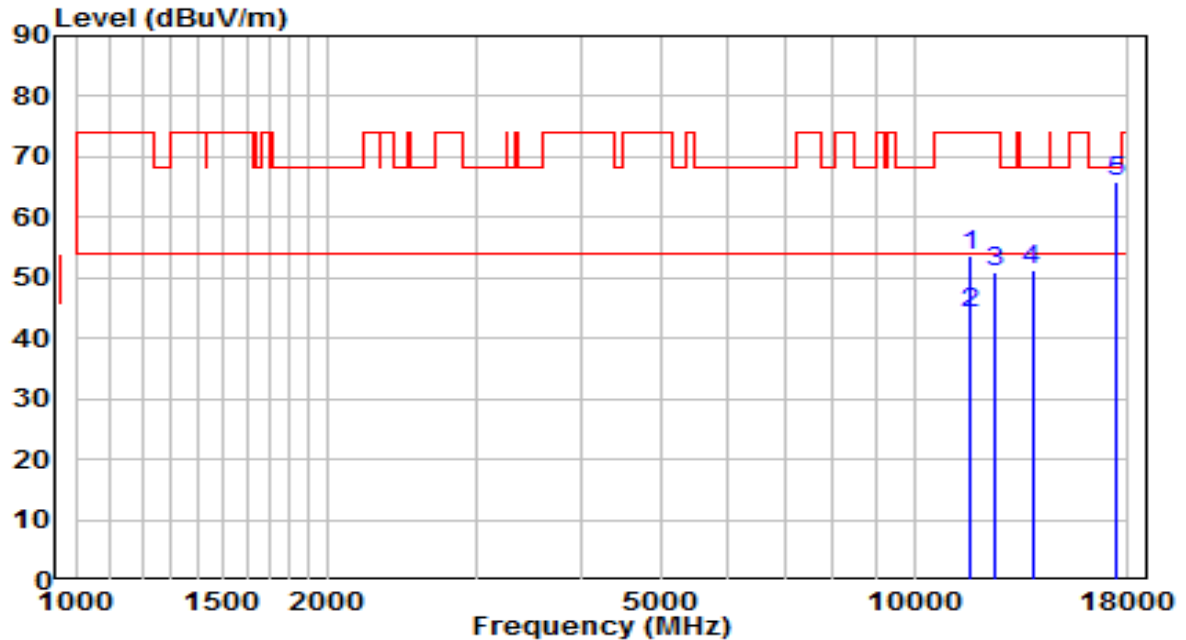


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11650.500	34.05	19.71	53.76	-20.24	74.00	Peak
2	11650.500	24.45	19.71	44.16	-9.84	54.00	Average
3	12526.000	32.47	18.48	50.95	-23.05	74.00	Peak
4	13826.500	29.10	22.22	51.32	-16.88	68.20	Peak
5	* 17473.000	38.26	27.66	65.92	-2.28	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

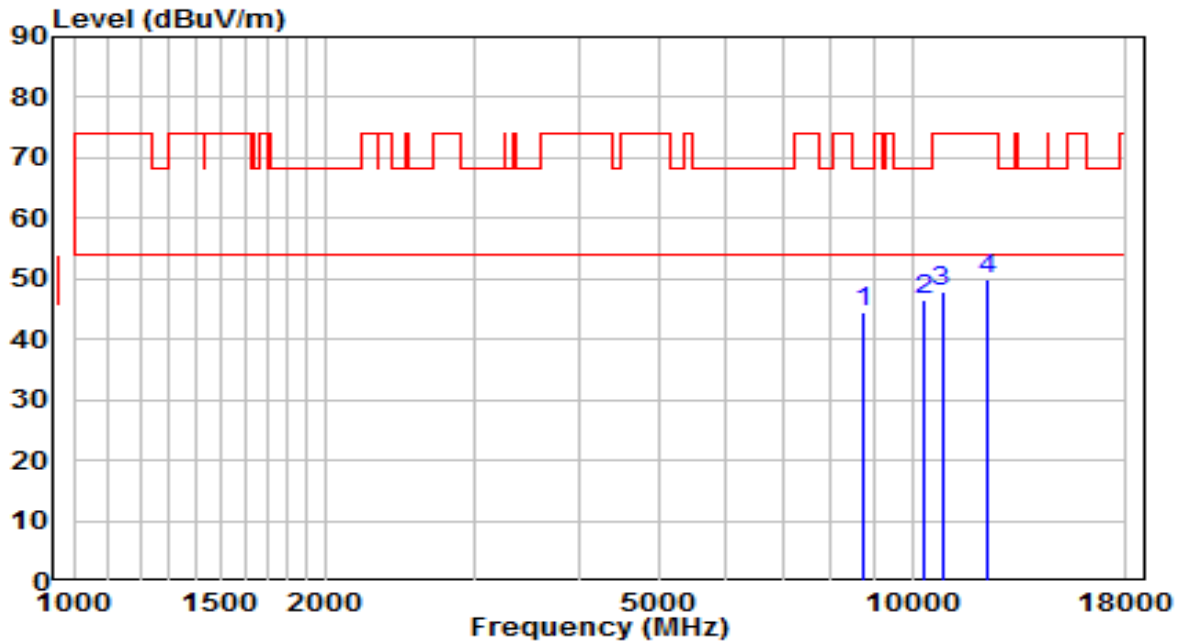


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8718.000	30.45	14.19	44.64	-23.56	68.20	Peak
2	*	10341.500	28.63	17.93	46.57	-21.63	68.20	Peak
3		10851.500	28.83	19.07	47.90	-26.10	74.00	Peak
4		12305.000	31.42	18.61	50.02	-23.98	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

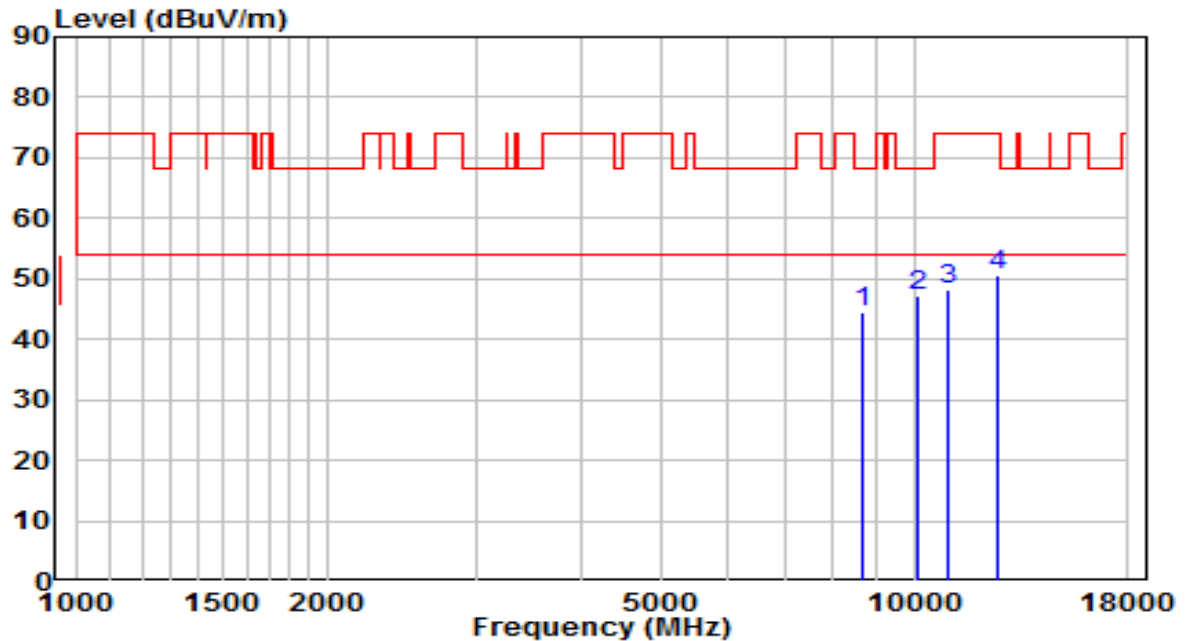


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8675.500	30.48	14.08	44.56	-23.64	68.20	Peak
2	* 10078.000	30.49	16.87	47.36	-20.84	68.20	Peak
3	10979.000	28.91	19.25	48.16	-25.84	74.00	Peak
4	12619.500	31.71	18.76	50.47	-23.53	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

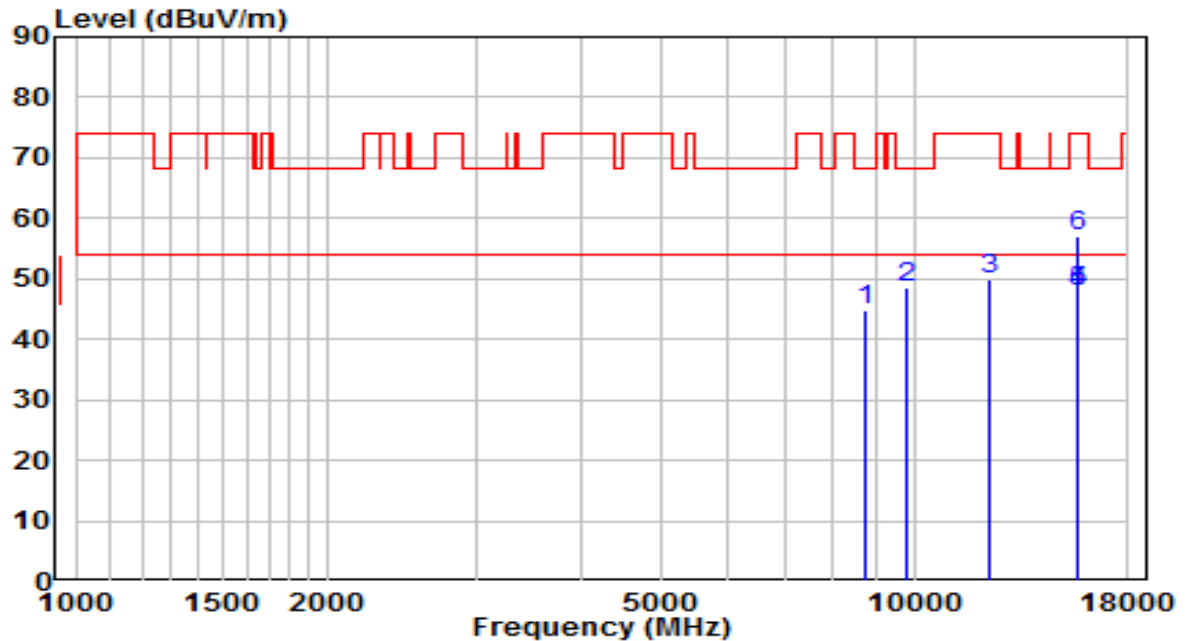


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8769.000	30.39	14.31	44.70	-23.50	68.20	Peak
2	9806.000	32.18	16.23	48.42	-19.78	68.20	Peak
3	12296.500	31.18	18.61	49.79	-24.21	74.00	Peak
4	15659.310	26.85	20.95	47.81	-26.19	74.00	Peak
5	* 15659.310	26.85	20.95	47.81	-6.19	54.00	Average
6	15671.000	35.99	20.93	56.92	-17.08	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

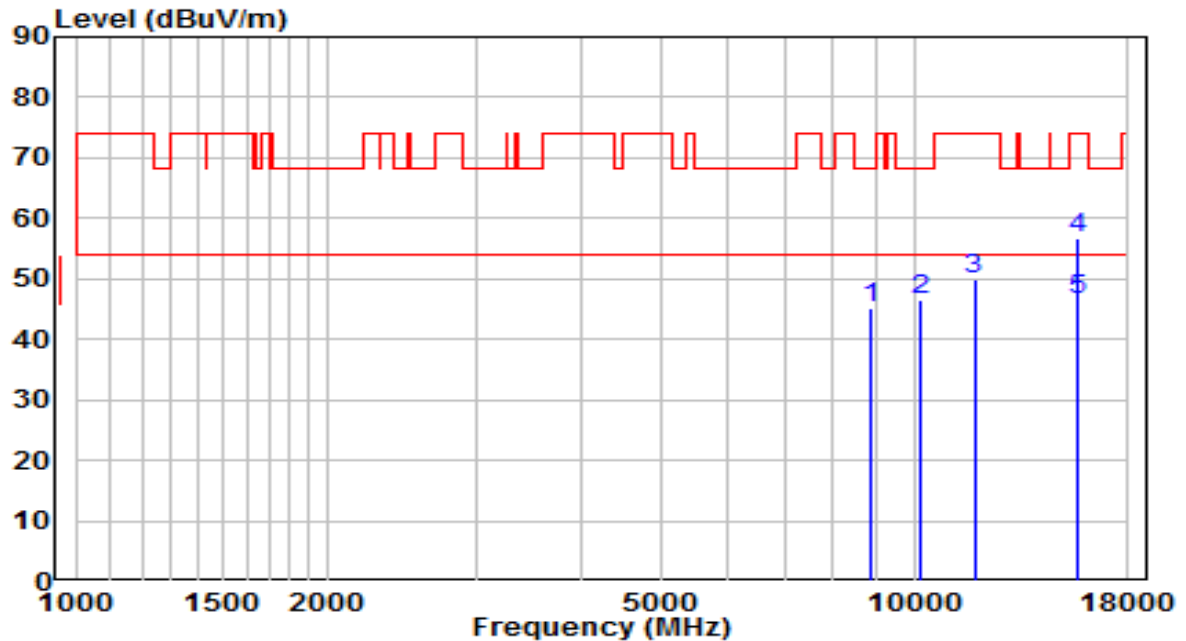


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8871.000	30.61	14.56	45.17	-23.03	68.20	Peak
2	10163.000	29.37	17.22	46.59	-21.61	68.20	Peak
3	11795.000	30.42	19.38	49.80	-24.20	74.00	Peak
4	15654.000	35.74	20.97	56.71	-17.29	74.00	Peak
5	* 15654.000	25.47	20.97	46.44	-7.56	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

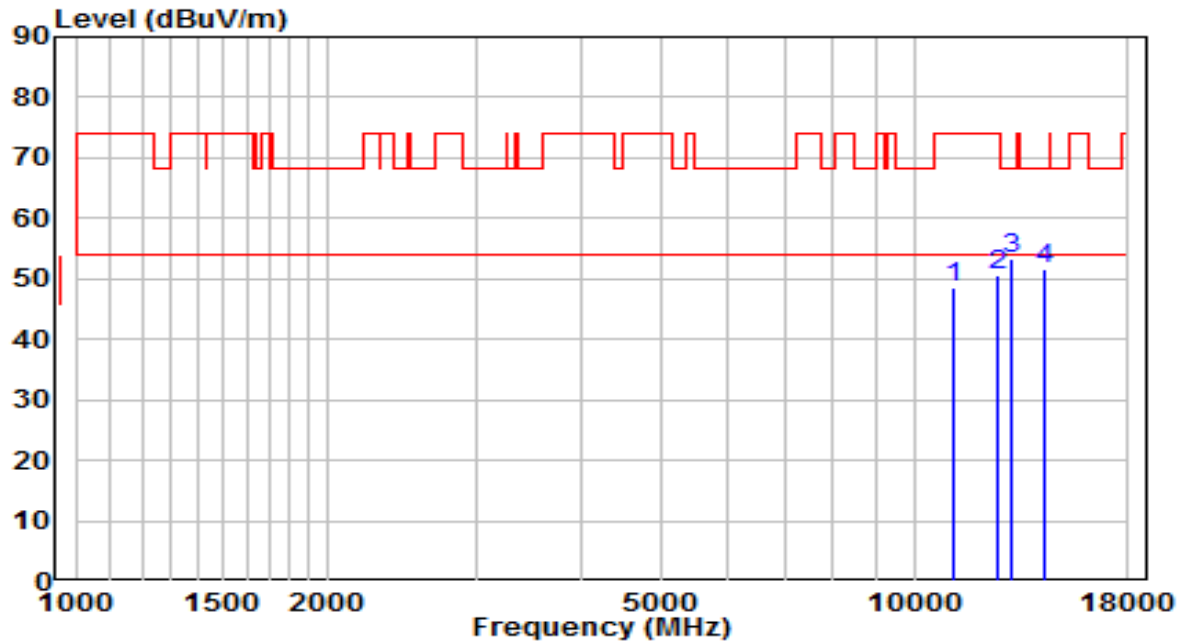


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11157.500	29.02	19.52	48.54	-25.46	74.00	Peak
2	12602.500	31.74	18.71	50.45	-23.55	74.00	Peak
3	* 13019.000	33.47	19.96	53.43	-14.77	68.20	Peak
4	14294.000	29.26	22.44	51.70	-16.50	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

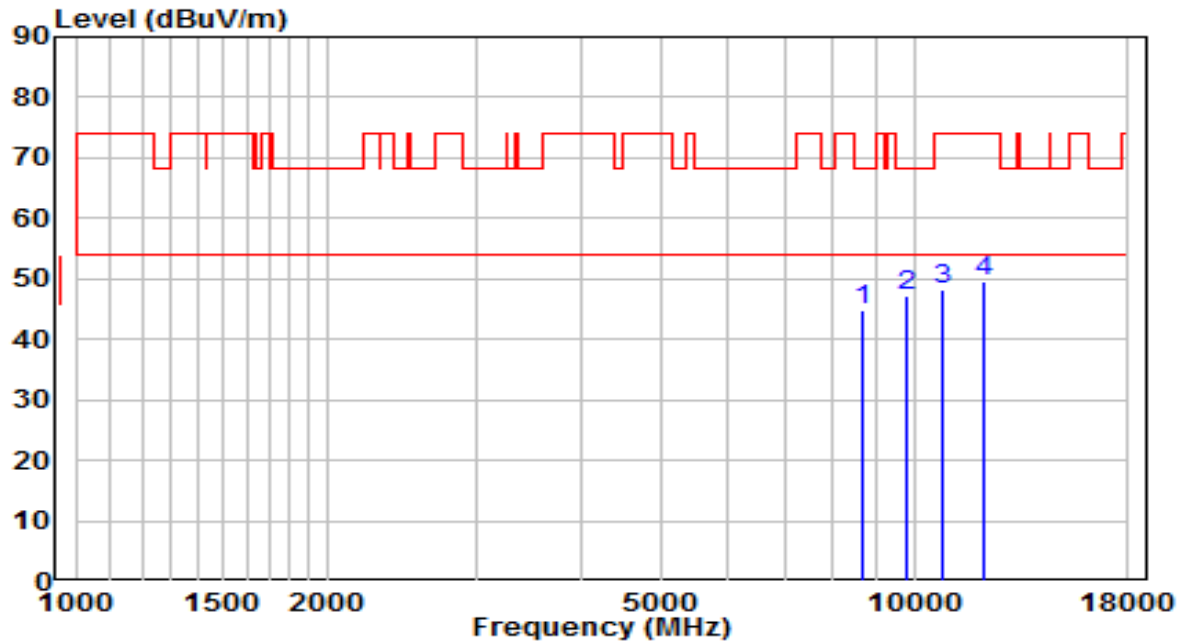


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8684.000	30.80	14.11	44.91	-23.29	68.20	Peak
2	*	9797.500	30.95	16.22	47.17	-21.03	68.20	Peak
3		10800.500	29.07	19.00	48.07	-25.93	74.00	Peak
4		12152.000	30.96	18.76	49.72	-24.28	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

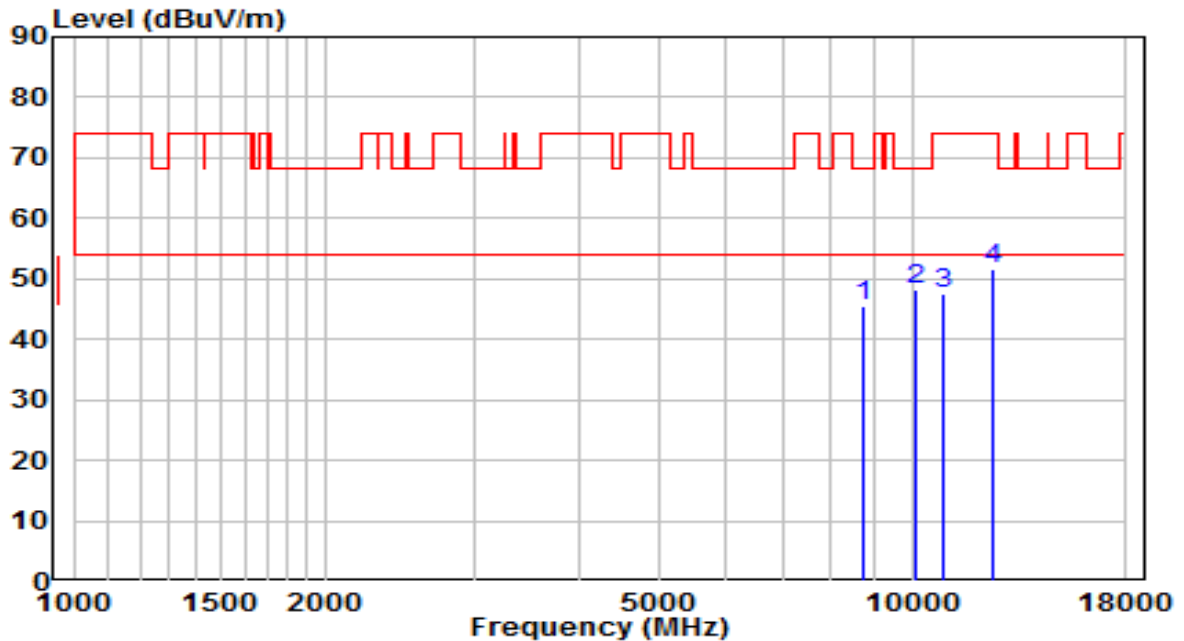


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8760.500	31.24	14.29	45.53	-22.67	68.20	Peak
2	*	10078.000	31.34	16.87	48.21	-19.99	68.20	Peak
3		10868.500	28.57	19.09	47.66	-26.34	74.00	Peak
4		12500.500	33.16	18.41	51.57	-22.43	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

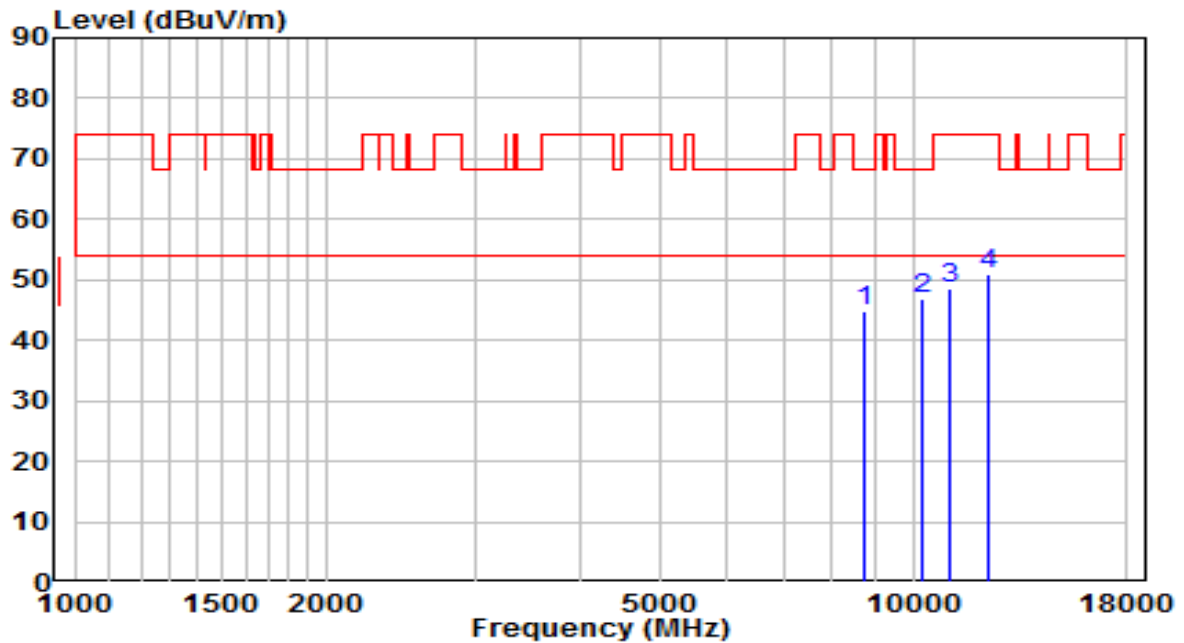


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8760.500	30.64	14.29	44.93	-23.27	68.20	Peak
2	*	10273.500	29.20	17.66	46.86	-21.34	68.20	Peak
3		11064.000	29.24	19.38	48.62	-25.38	74.00	Peak
4		12305.000	32.22	18.61	50.82	-23.18	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

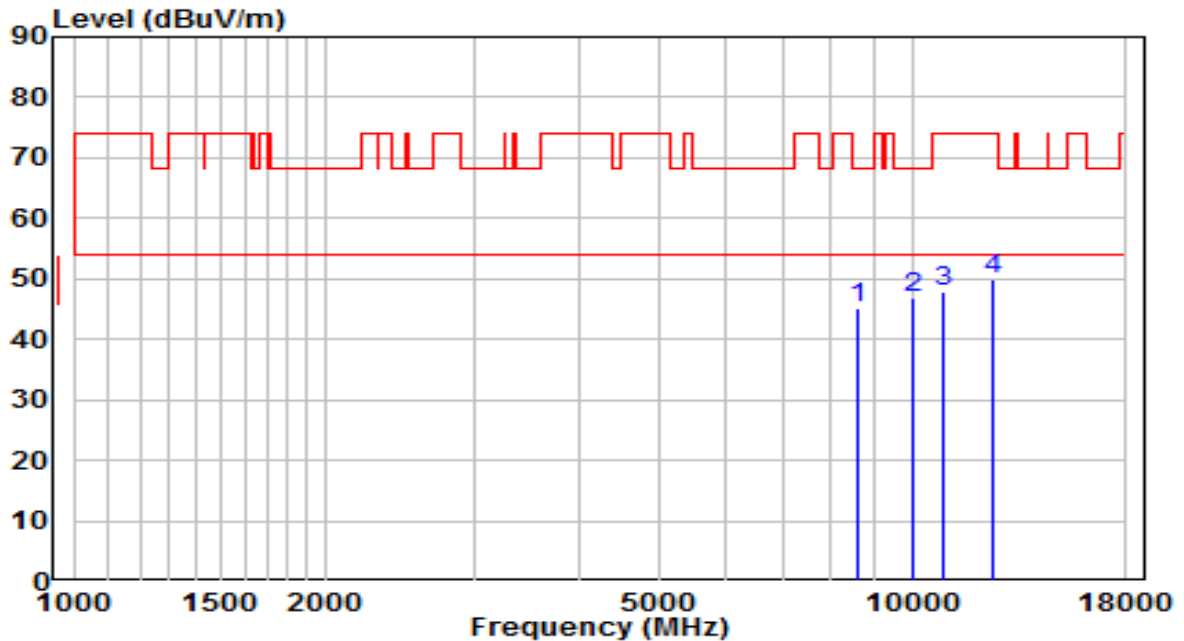


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8624.500	31.09	13.96	45.05	-23.15	68.20	Peak
2	*	10027.000	30.34	16.67	47.01	-21.19	68.20	Peak
3		10868.500	28.69	19.09	47.78	-26.22	74.00	Peak
4		12509.000	31.60	18.43	50.03	-23.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

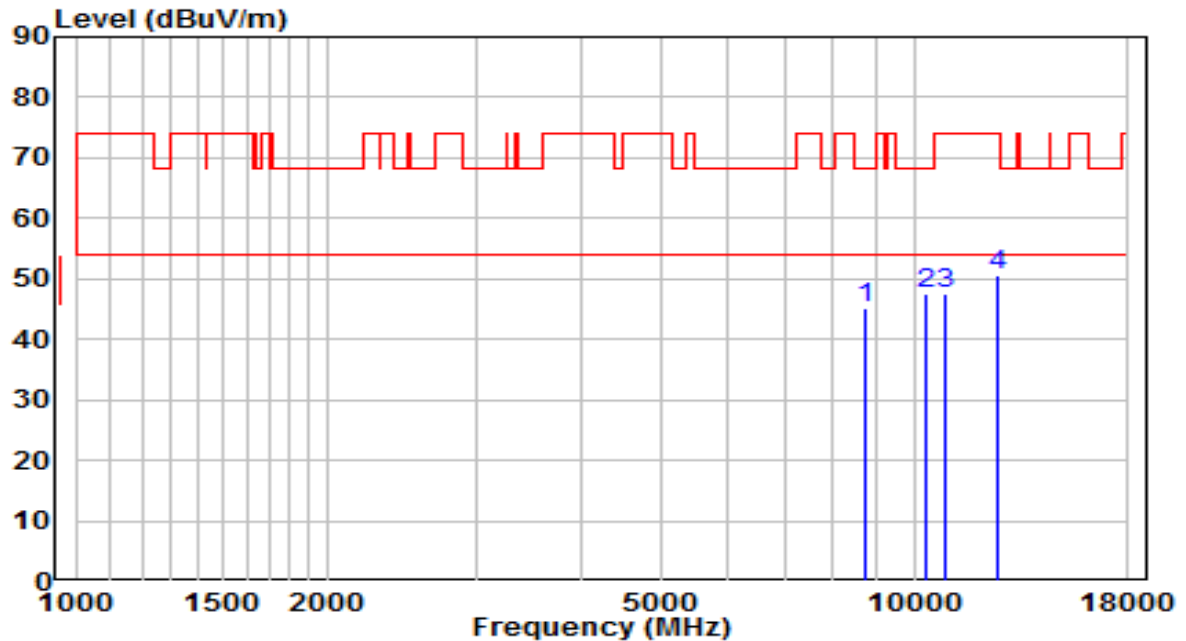


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8760.500	30.78	14.29	45.07	-23.13	68.20	Peak
2	* 10341.500	29.45	17.93	47.38	-20.82	68.20	Peak
3	10860.000	28.38	19.08	47.46	-26.54	74.00	Peak
4	12560.000	32.09	18.58	50.67	-23.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

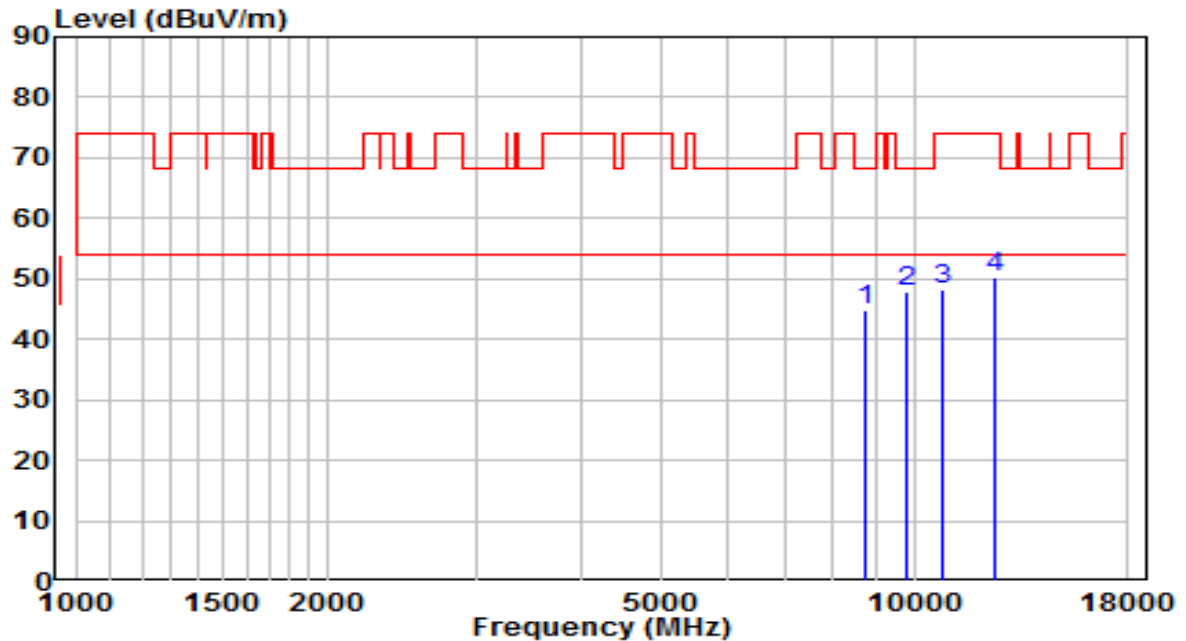


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8769.000	30.38	14.31	44.70	-23.50	68.20	Peak
2	*	9806.000	31.61	16.23	47.85	-20.35	68.20	Peak
3		10843.000	29.20	19.06	48.26	-25.74	74.00	Peak
4		12509.000	31.81	18.43	50.24	-23.76	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

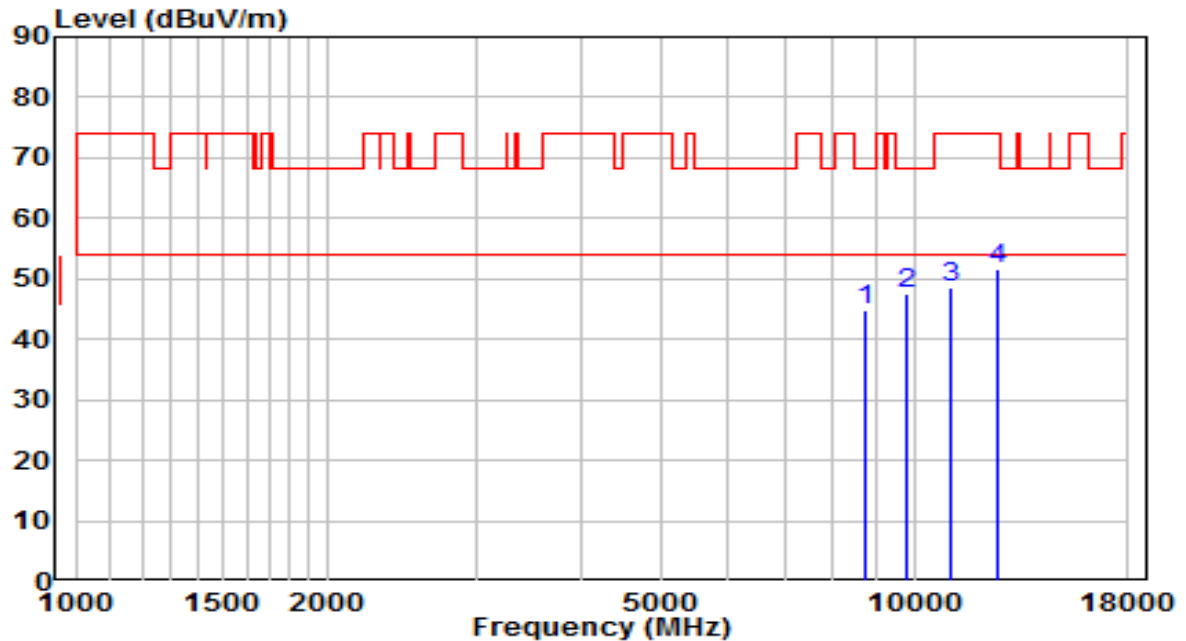


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8735.000	30.70	14.23	44.93	-23.27	68.20	Peak
2	*	9806.000	31.33	16.23	47.57	-20.63	68.20	Peak
3		11047.000	29.23	19.35	48.59	-25.41	74.00	Peak
4		12594.000	33.02	18.68	51.71	-22.29	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

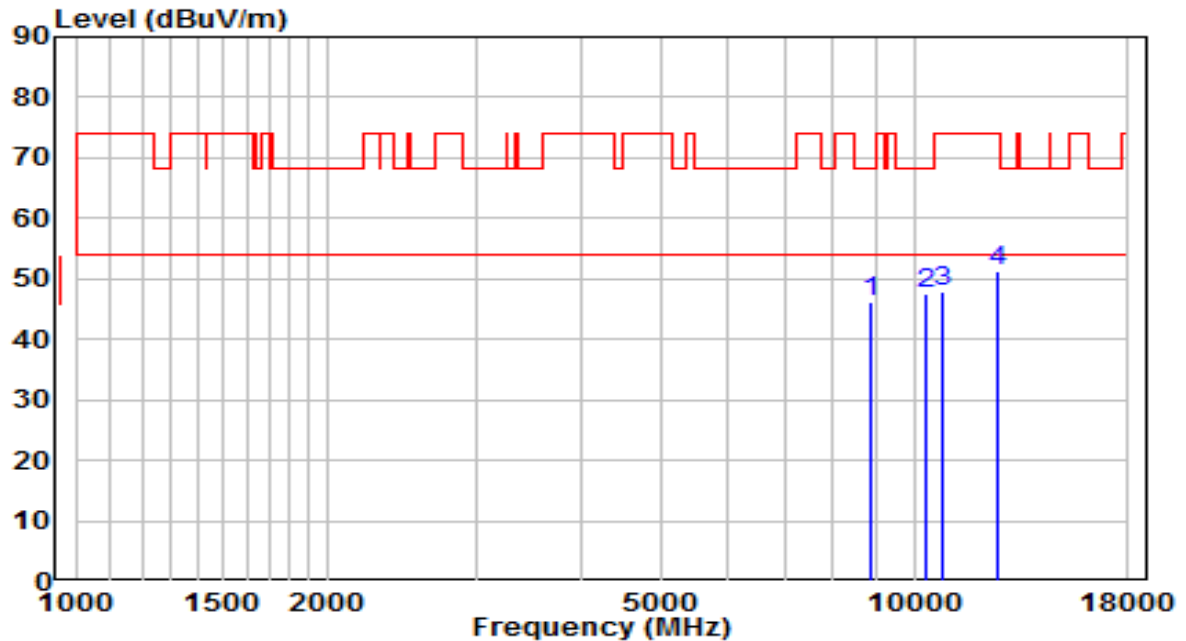


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8888.000	31.41	14.61	46.02	-22.18	68.20	Peak
2	* 10341.500	29.74	17.93	47.67	-20.53	68.20	Peak
3	10843.000	28.67	19.06	47.72	-26.28	74.00	Peak
4	12611.000	32.71	18.73	51.45	-22.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

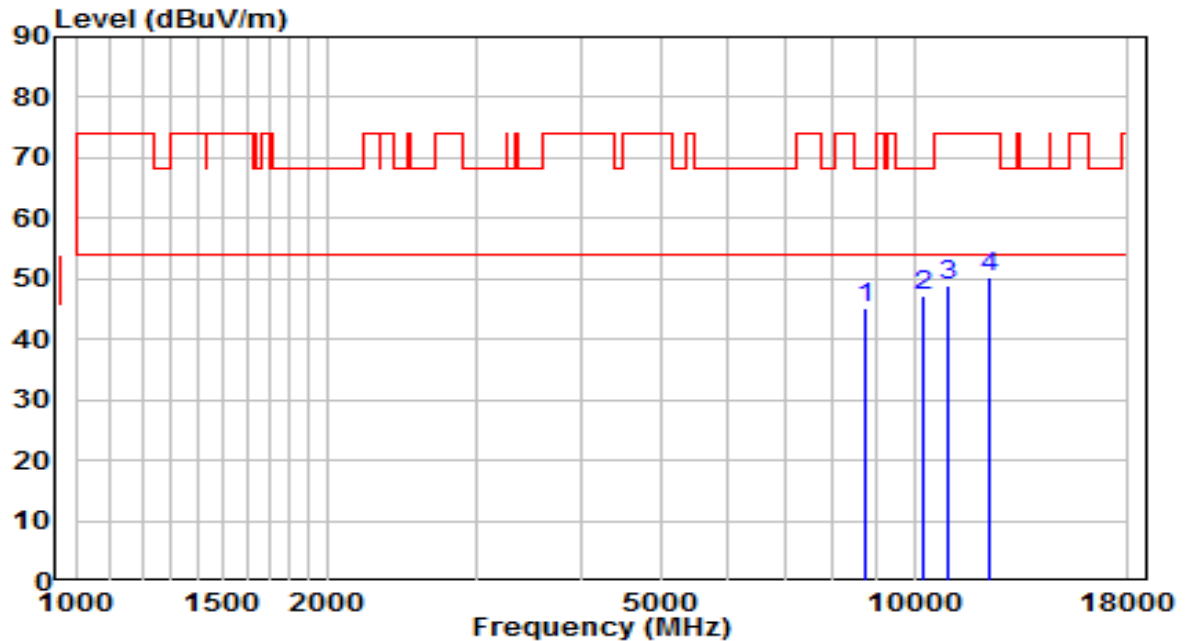


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8769.000	30.69	14.31	45.01	-23.19	68.20	Peak
2	*	10239.500	29.67	17.52	47.20	-21.00	68.20	Peak
3		10987.500	29.58	19.26	48.84	-25.16	74.00	Peak
4		12254.000	31.59	18.66	50.25	-23.75	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

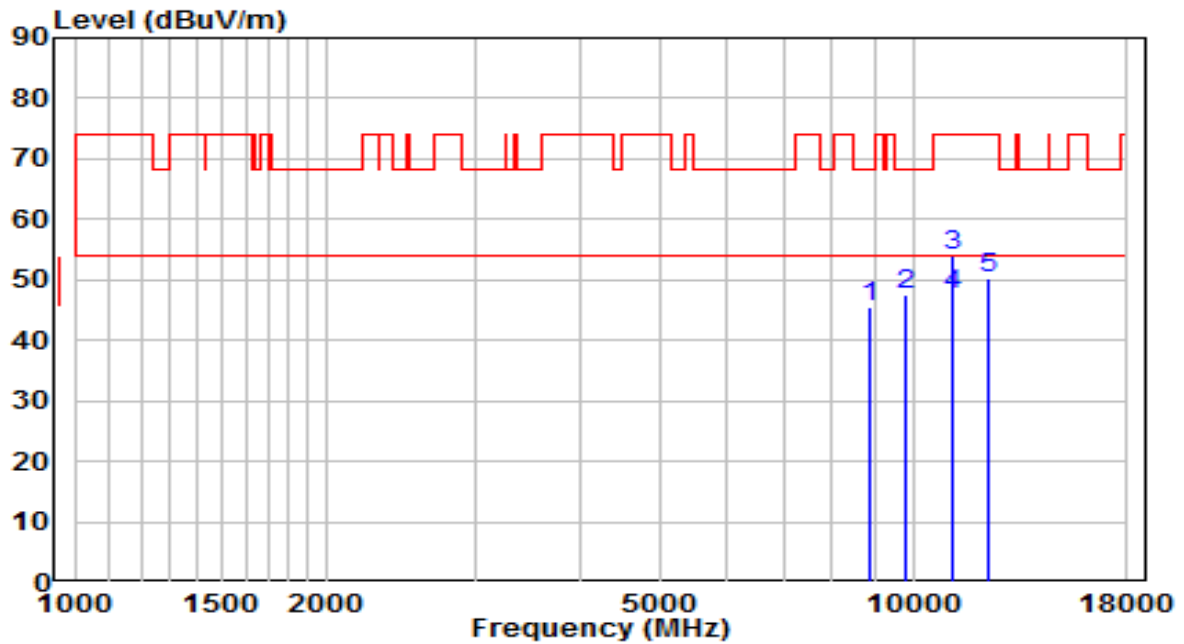


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8896.500	30.93	14.63	45.56	-22.64	68.20	Peak
2	9806.000	31.22	16.23	47.45	-20.75	68.20	Peak
3	11157.500	34.38	19.52	53.90	-20.10	74.00	Peak
4	* 11157.500	28.11	19.52	47.63	-6.37	54.00	Average
5	12305.000	31.69	18.61	50.30	-23.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

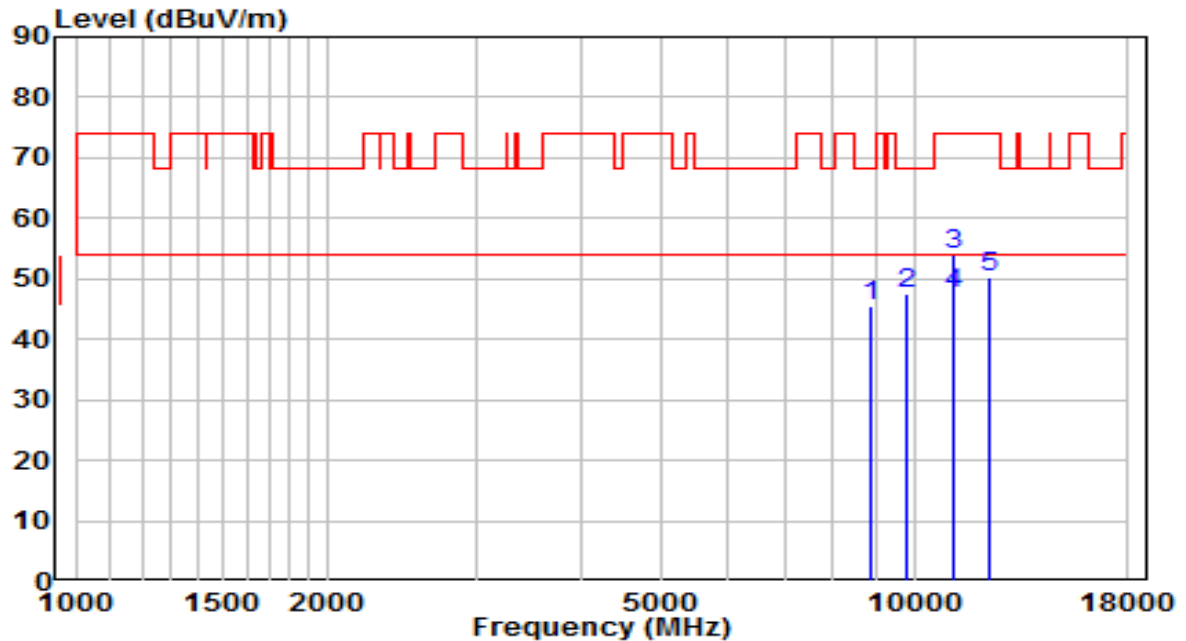


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8896.500	30.93	14.63	45.56	-22.64	68.20	Peak
2	9806.000	31.22	16.23	47.45	-20.75	68.20	Peak
3	11157.500	34.38	19.52	53.90	-20.10	74.00	Peak
4	* 11157.500	28.11	19.52	47.63	-6.37	54.00	Average
5	12305.000	31.69	18.61	50.30	-23.70	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

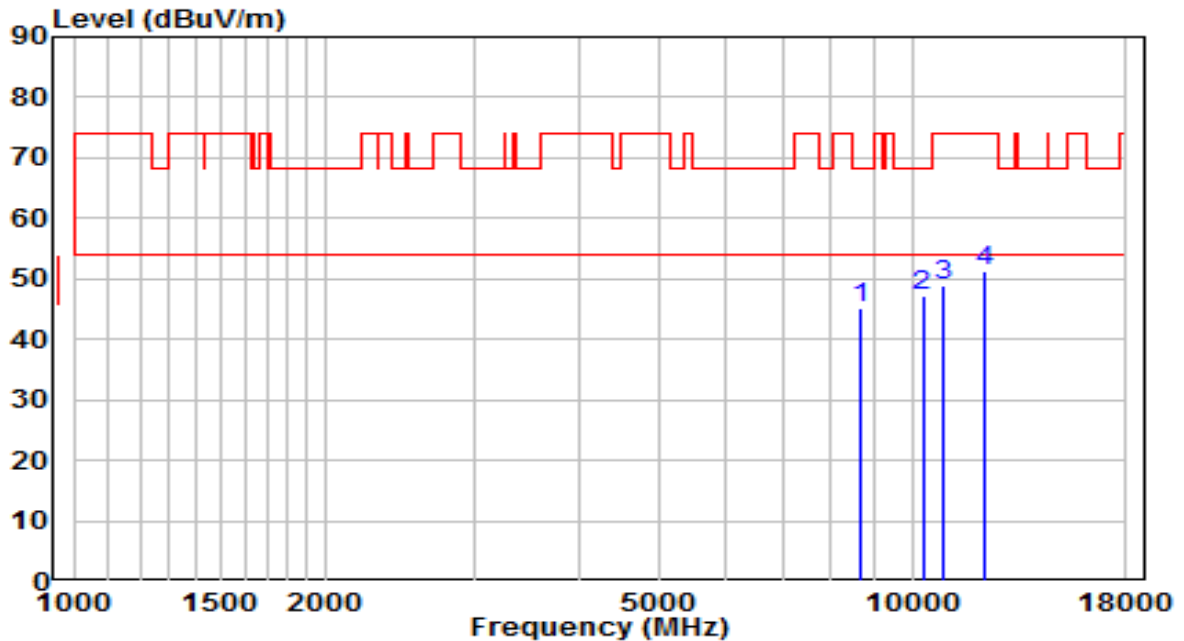


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8667.000	30.94	14.06	45.01	-23.19	68.20	Peak
2	* 10290.500	29.64	17.73	47.37	-20.83	68.20	Peak
3	10860.000	29.90	19.08	48.98	-25.02	74.00	Peak
4	12186.000	32.64	18.73	51.37	-22.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

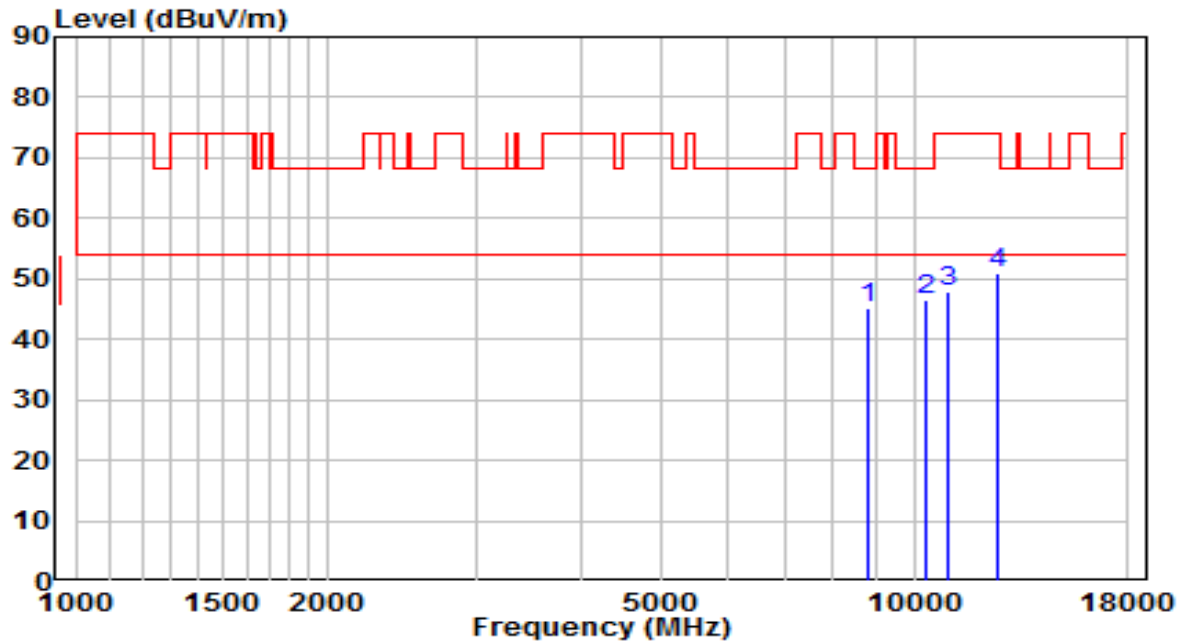


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8837.000	30.63	14.48	45.11	-23.09	68.20	Peak
2	*	10299.000	28.85	17.76	46.61	-21.59	68.20	Peak
3		10987.500	28.56	19.26	47.82	-26.18	74.00	Peak
4		12585.500	32.26	18.66	50.92	-23.08	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

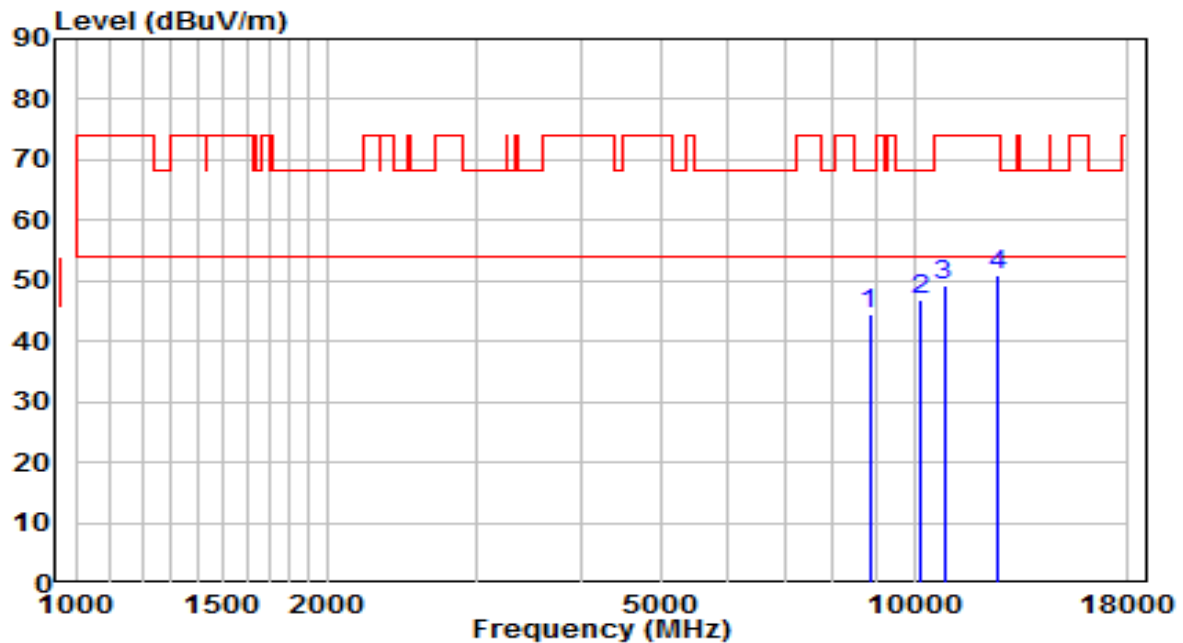


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8845.500	30.07	14.50	44.57	-23.63	68.20	Peak
2	*	10171.500	29.56	17.25	46.81	-21.39	68.20	Peak
3		10851.500	30.12	19.07	49.19	-24.81	74.00	Peak
4		12619.500	32.03	18.76	50.79	-23.21	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

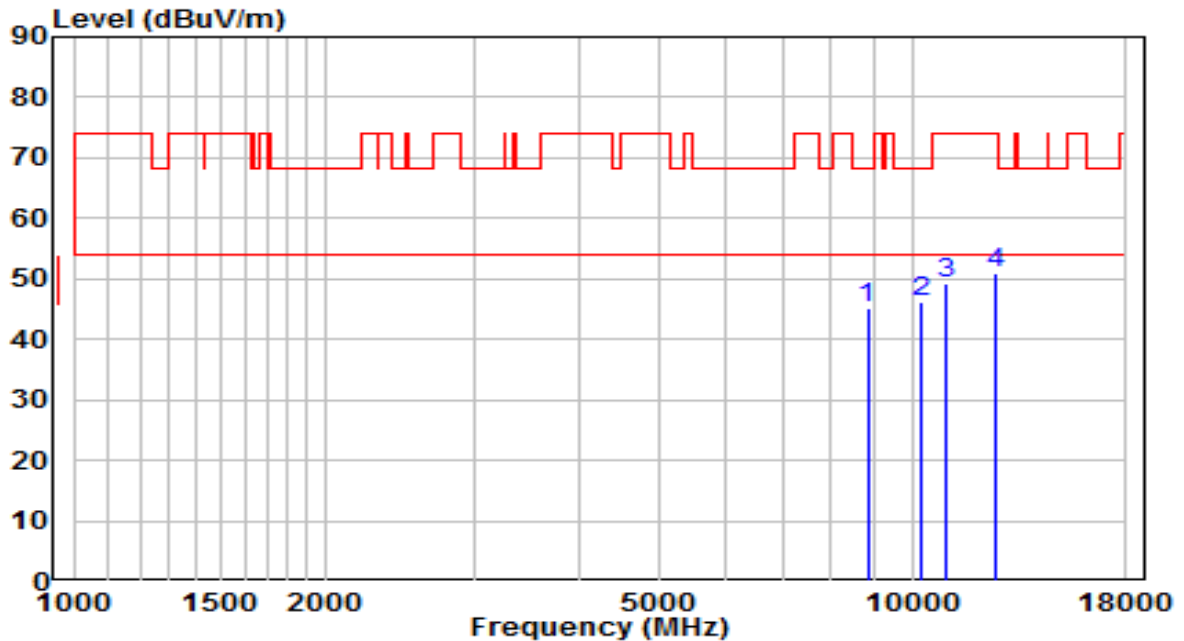


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8845.500	30.51	14.50	45.01	-23.19	68.20	Peak
2	* 10231.000	28.85	17.49	46.34	-21.86	68.20	Peak
3	10970.500	29.96	19.24	49.20	-24.80	74.00	Peak
4	12611.000	32.07	18.73	50.80	-23.20	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

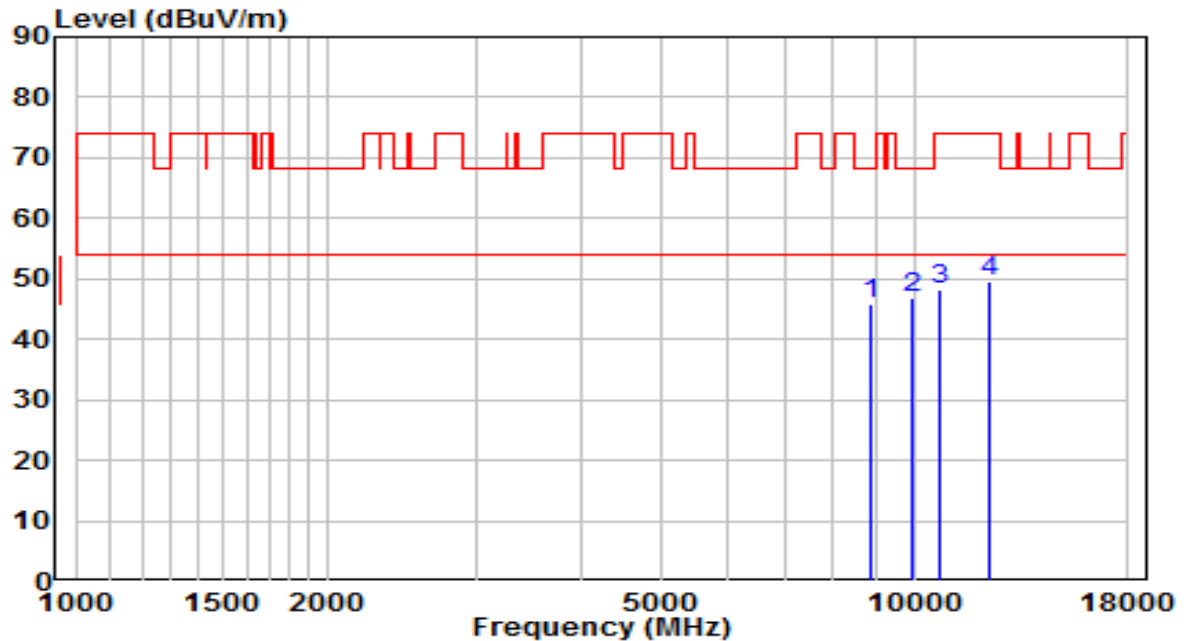


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8862.500	31.28	14.54	45.82	-22.38	68.20	Peak
2	*	9925.000	30.27	16.43	46.70	-21.50	68.20	Peak
3		10715.500	29.28	18.88	48.16	-25.84	74.00	Peak
4		12313.500	31.09	18.60	49.69	-24.31	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

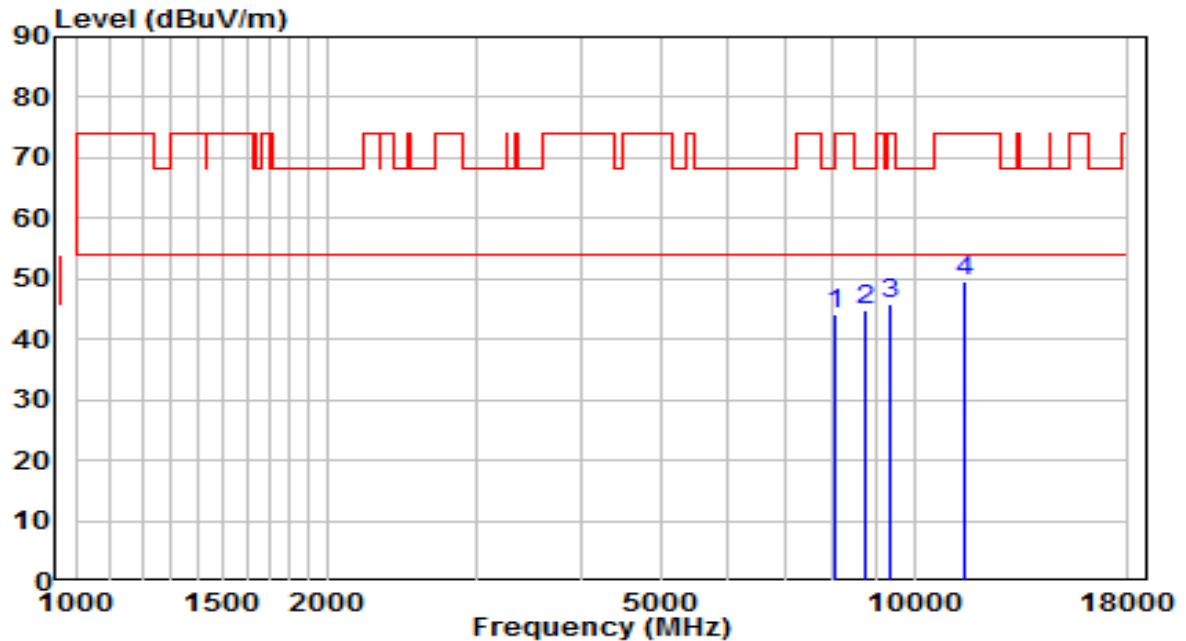


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8021.000	30.67	13.44	44.11	-24.09	68.20	Peak
2	*	8769.000	30.58	14.31	44.89	-23.31	68.20	Peak
3		9389.500	30.37	15.53	45.90	-28.10	74.00	Peak
4		11497.500	29.57	20.05	49.61	-24.39	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

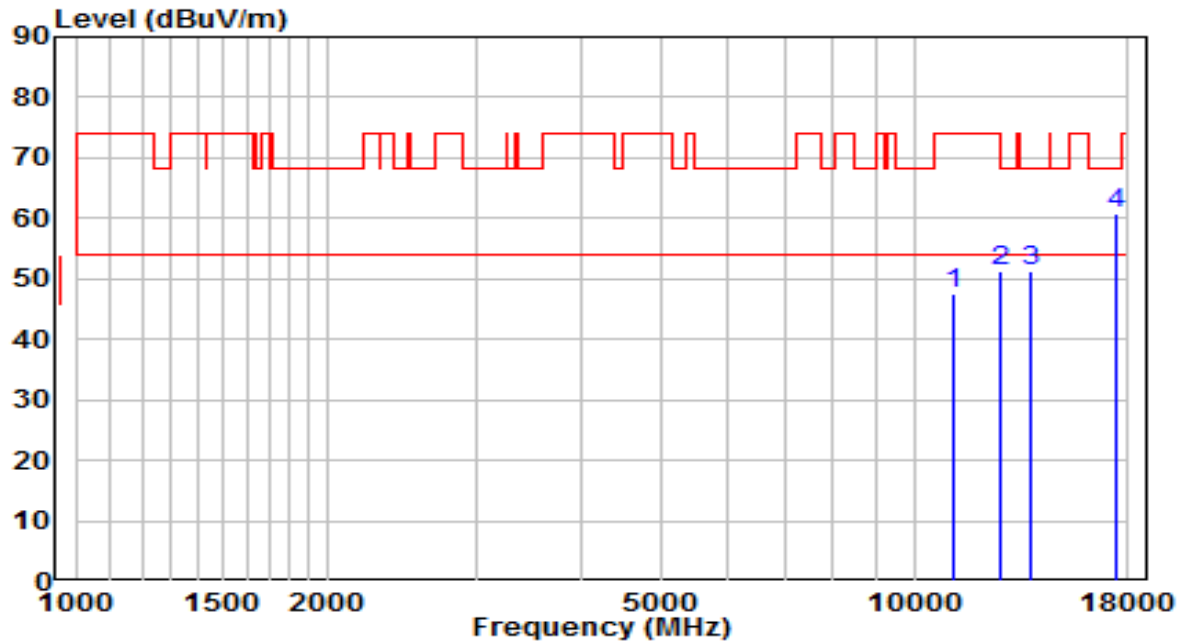


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11140.500	28.19	19.50	47.69	-26.31	74.00	Peak
2	12628.000	32.66	18.79	51.45	-22.55	74.00	Peak
3	13818.000	29.05	22.21	51.26	-16.94	68.20	Peak
4	* 17362.500	33.73	26.92	60.66	-7.54	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

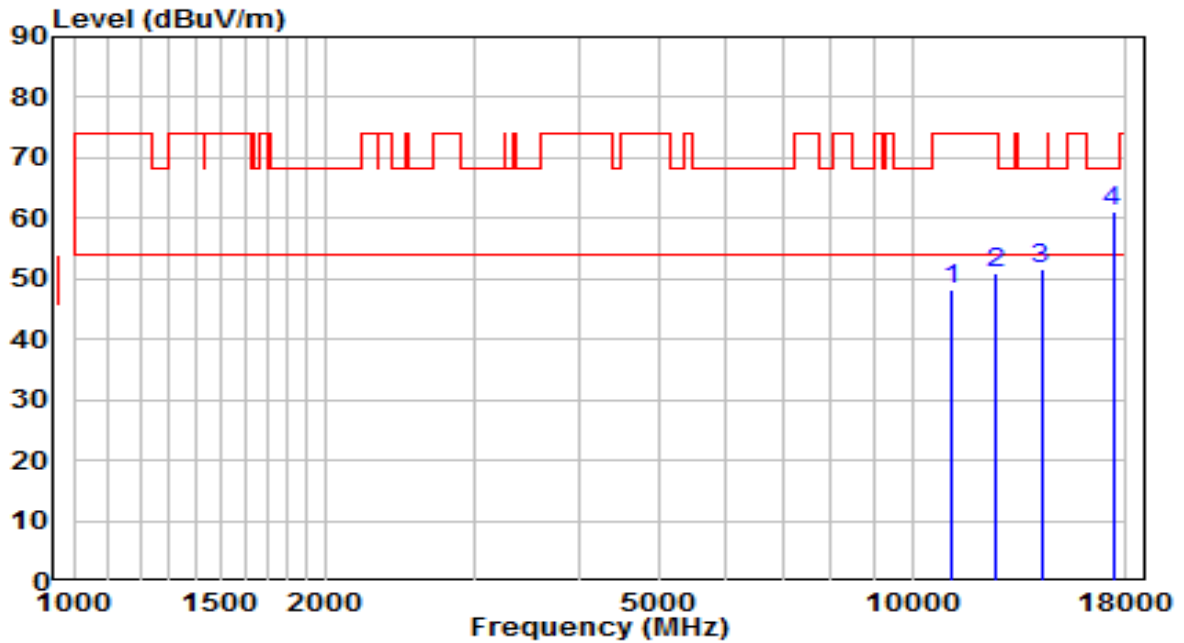


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11123.500	28.83	19.47	48.30	-25.70	74.00	Peak
2	12611.000	32.33	18.73	51.06	-22.94	74.00	Peak
3	14251.500	29.28	22.44	51.72	-16.48	68.20	Peak
4	* 17354.000	34.33	26.87	61.20	-7.00	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

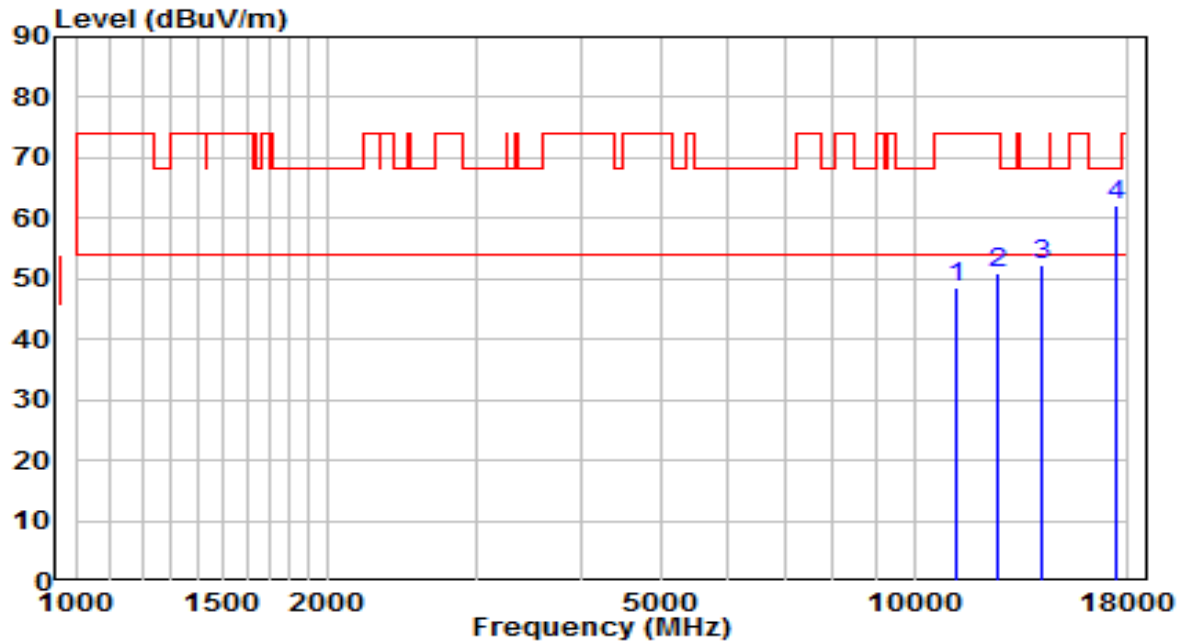


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11242.500	28.86	19.65	48.51	-25.49	74.00	Peak
2	12543.000	32.42	18.53	50.95	-23.05	74.00	Peak
3	14243.000	30.03	22.44	52.47	-15.73	68.20	Peak
4	* 17473.000	34.37	27.66	62.03	-6.17	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

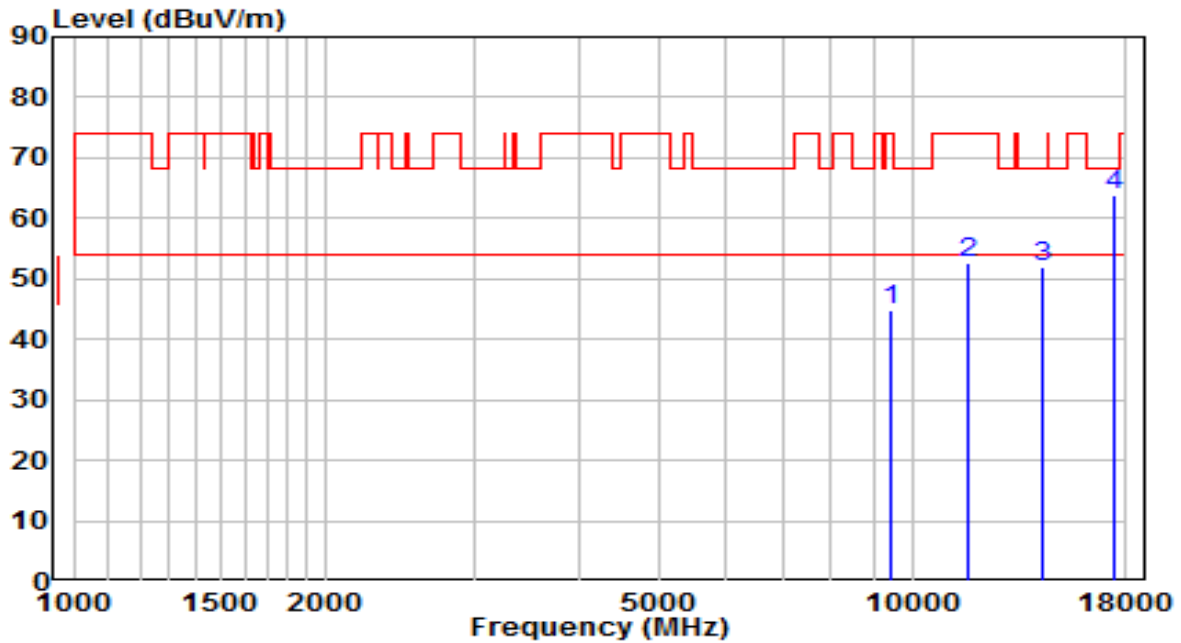


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	9406.500	29.30	15.56	44.86	-29.14	74.00	Peak
2	11659.000	32.93	19.69	52.62	-21.38	74.00	Peak
3	14336.500	29.43	22.44	51.88	-16.32	68.20	Peak
4	* 17464.500	36.11	27.60	63.71	-4.49	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

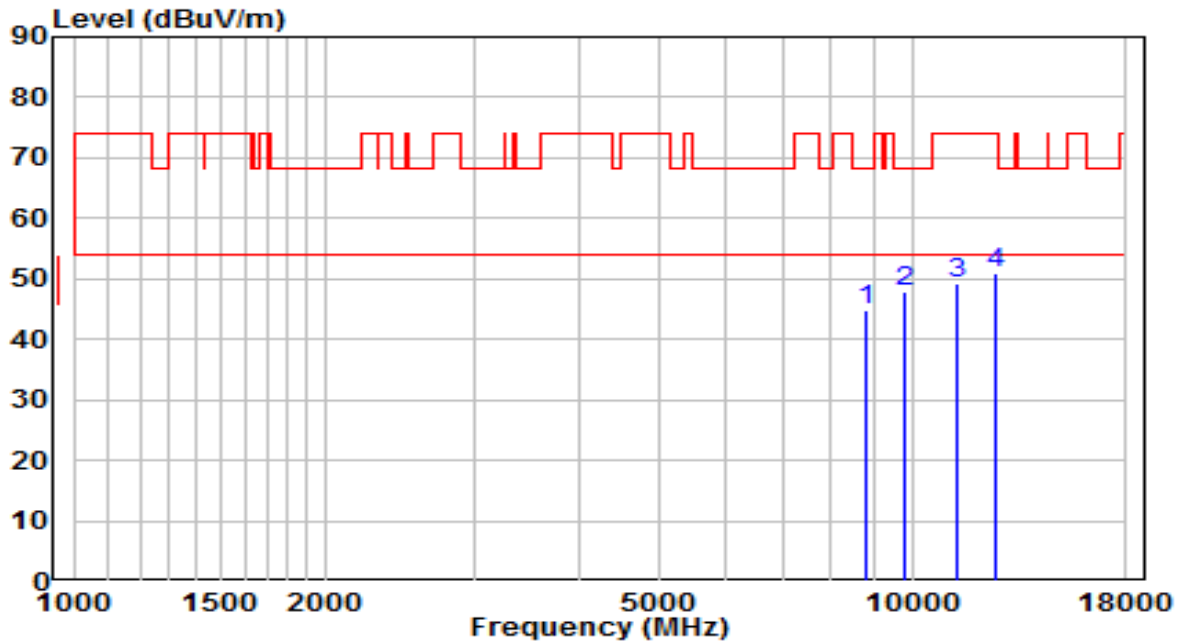


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8803.000	30.59	14.40	44.98	-23.22	68.20	Peak
2	*	9806.000	31.72	16.23	47.96	-20.24	68.20	Peak
3		11310.500	29.35	19.76	49.10	-24.90	74.00	Peak
4		12594.000	32.12	18.68	50.81	-23.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

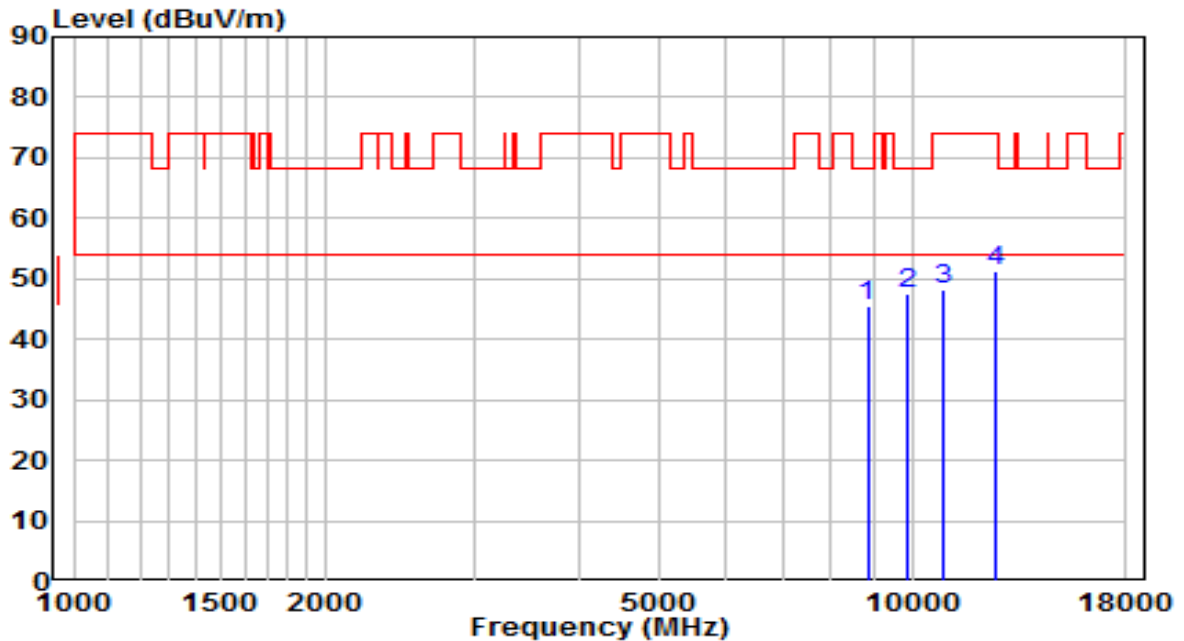


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8845.500	30.85	14.50	45.36	-22.84	68.20	Peak
2	*	9848.500	31.17	16.31	47.48	-20.72	68.20	Peak
3		10928.000	29.19	19.18	48.36	-25.64	74.00	Peak
4		12602.500	32.46	18.71	51.17	-22.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

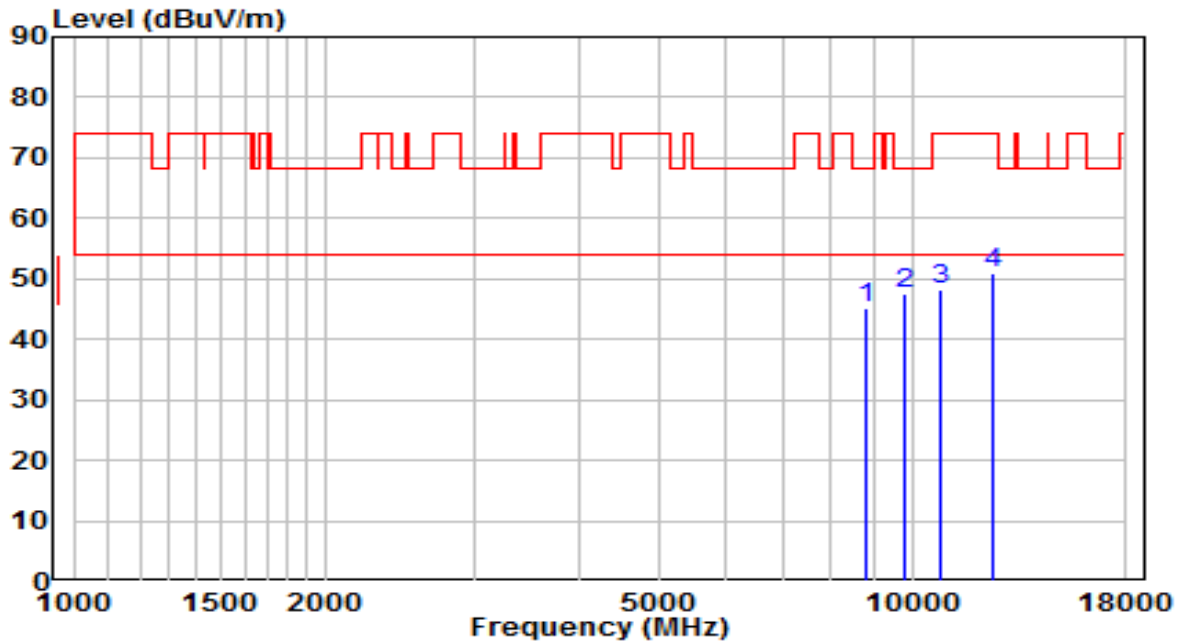


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8828.500	30.56	14.46	45.02	-23.18	68.20	Peak
2	*	9806.000	31.30	16.23	47.53	-20.67	68.20	Peak
3		10834.500	29.34	19.04	48.39	-25.61	74.00	Peak
4		12492.000	32.57	18.41	50.98	-23.02	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

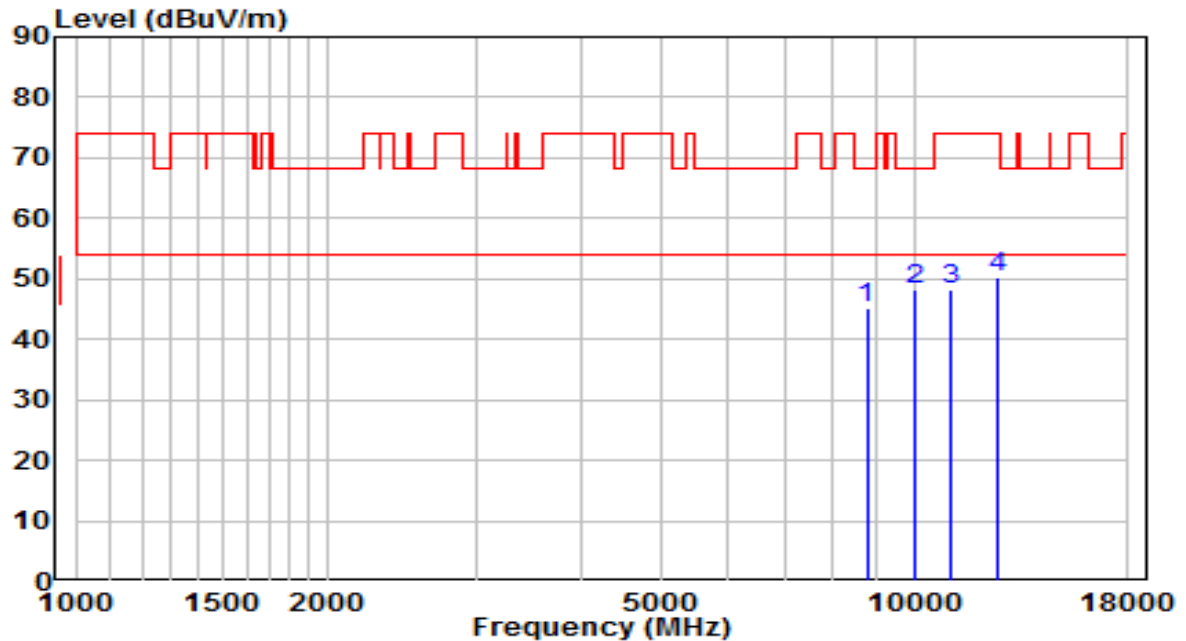


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8777.500	30.74	14.33	45.08	-23.12	68.20	Peak
2	* 9993.000	31.84	16.55	48.39	-19.81	68.20	Peak
3	11081.000	28.72	19.40	48.12	-25.88	74.00	Peak
4	12543.000	31.64	18.53	50.17	-23.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

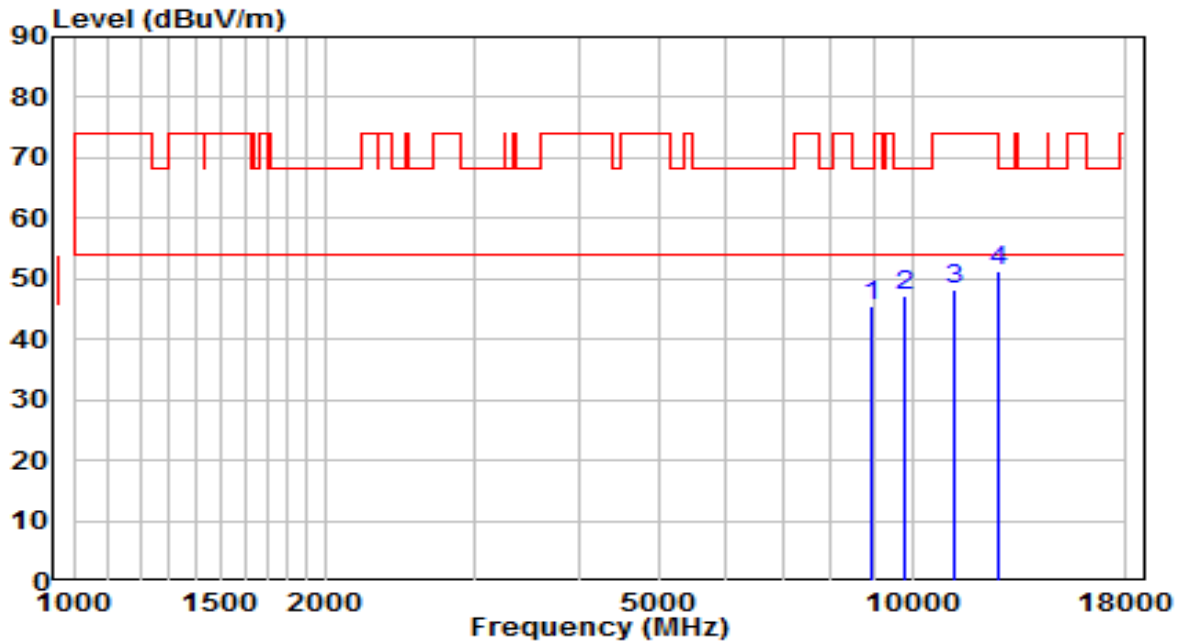


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8922.000	30.82	14.69	45.51	-22.69	68.20	Peak
2	*	9806.000	31.00	16.23	47.23	-20.97	68.20	Peak
3		11200.000	28.67	19.59	48.26	-25.74	74.00	Peak
4		12653.500	32.42	18.86	51.29	-22.71	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

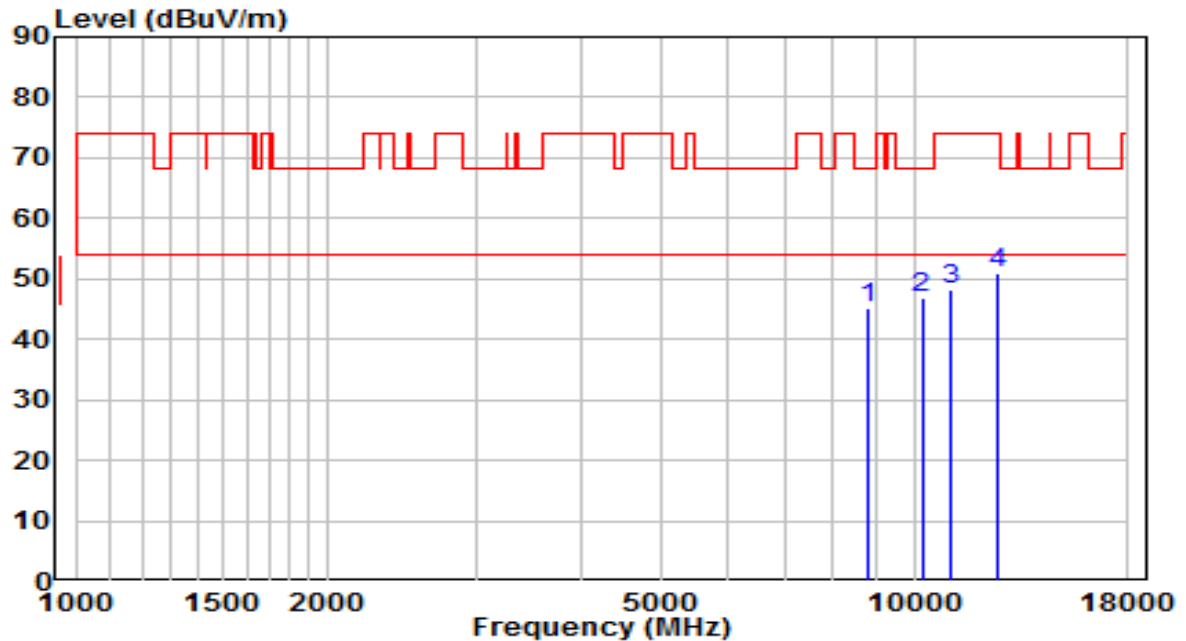


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8837.000	30.67	14.48	45.15	-23.05	68.20	Peak
2	*	10214.000	29.35	17.42	46.77	-21.43	68.20	Peak
3		11064.000	28.90	19.38	48.27	-25.73	74.00	Peak
4		12585.500	32.21	18.66	50.87	-23.13	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

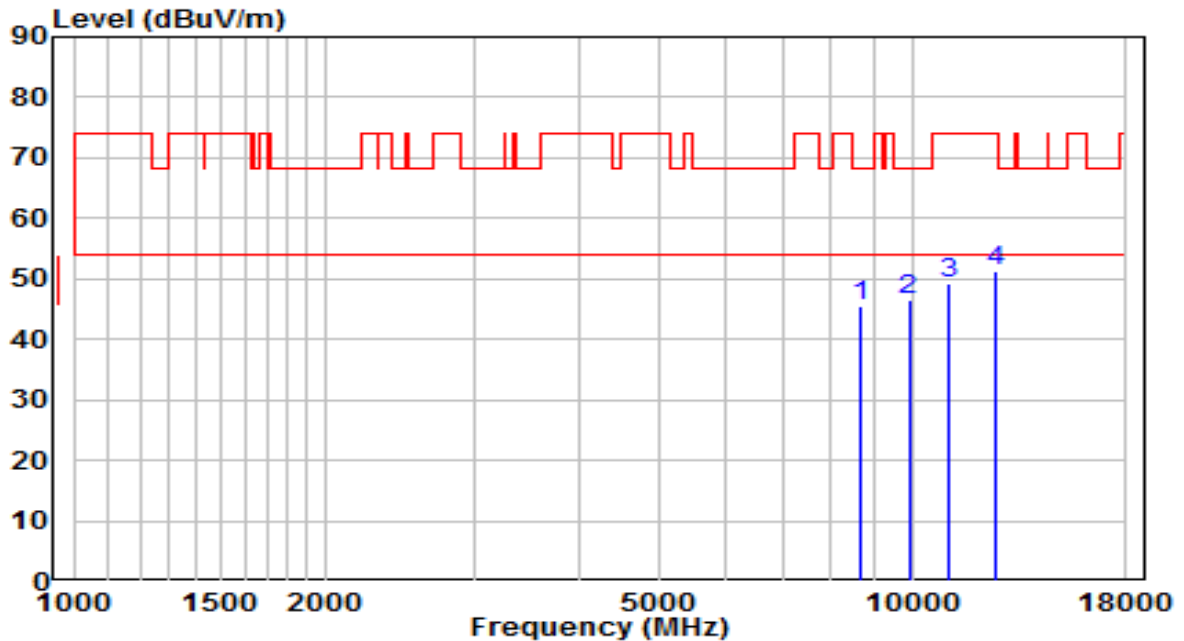


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8709.500	31.40	14.17	45.56	-22.64	68.20	Peak
2	*	9908.000	30.10	16.41	46.51	-21.69	68.20	Peak
3		11072.500	29.98	19.39	49.37	-24.63	74.00	Peak
4		12619.500	32.64	18.76	51.40	-22.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

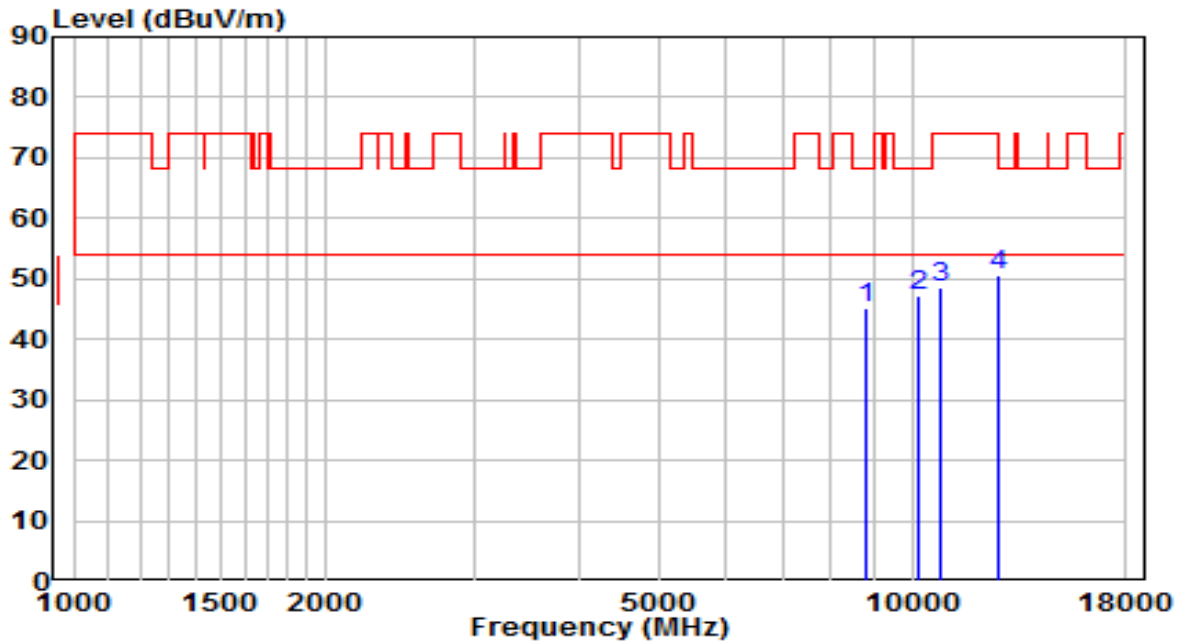


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8794.500	30.87	14.38	45.24	-22.96	68.20	Peak
2	* 10146.000	30.04	17.15	47.18	-21.02	68.20	Peak
3	10843.000	29.57	19.06	48.62	-25.38	74.00	Peak
4	12653.500	31.90	18.86	50.76	-23.24	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

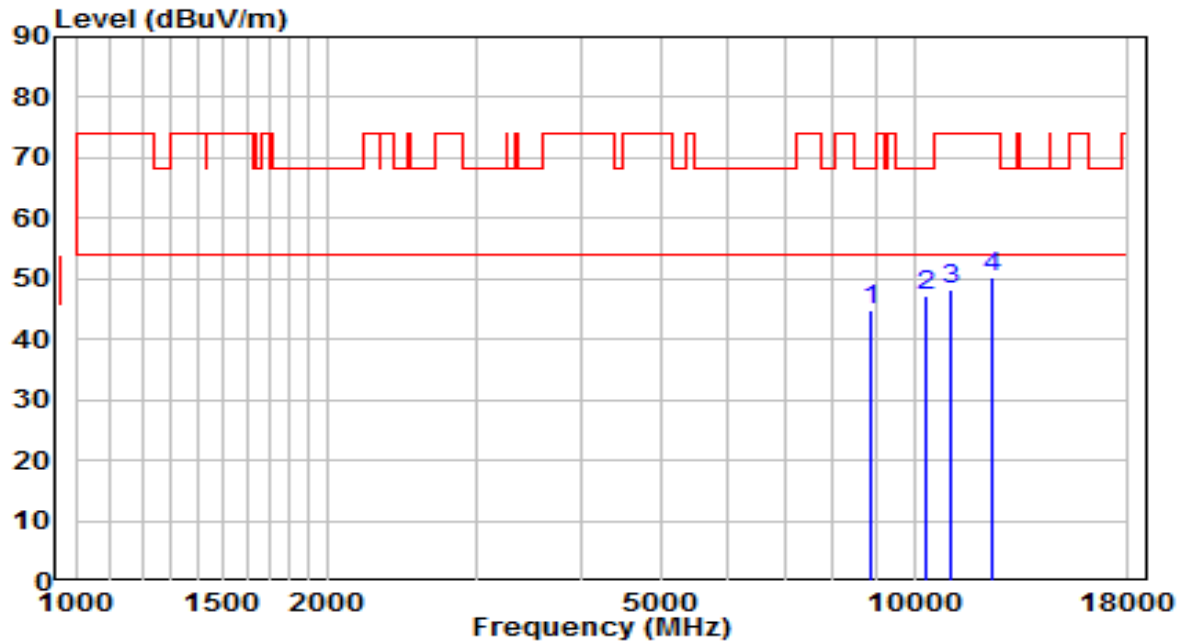


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8888.000	30.38	14.61	44.99	-23.21	68.20	Peak
2	* 10307.500	29.49	17.80	47.29	-20.91	68.20	Peak
3	11030.000	29.01	19.33	48.33	-25.67	74.00	Peak
4	12373.000	31.69	18.54	50.22	-23.78	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

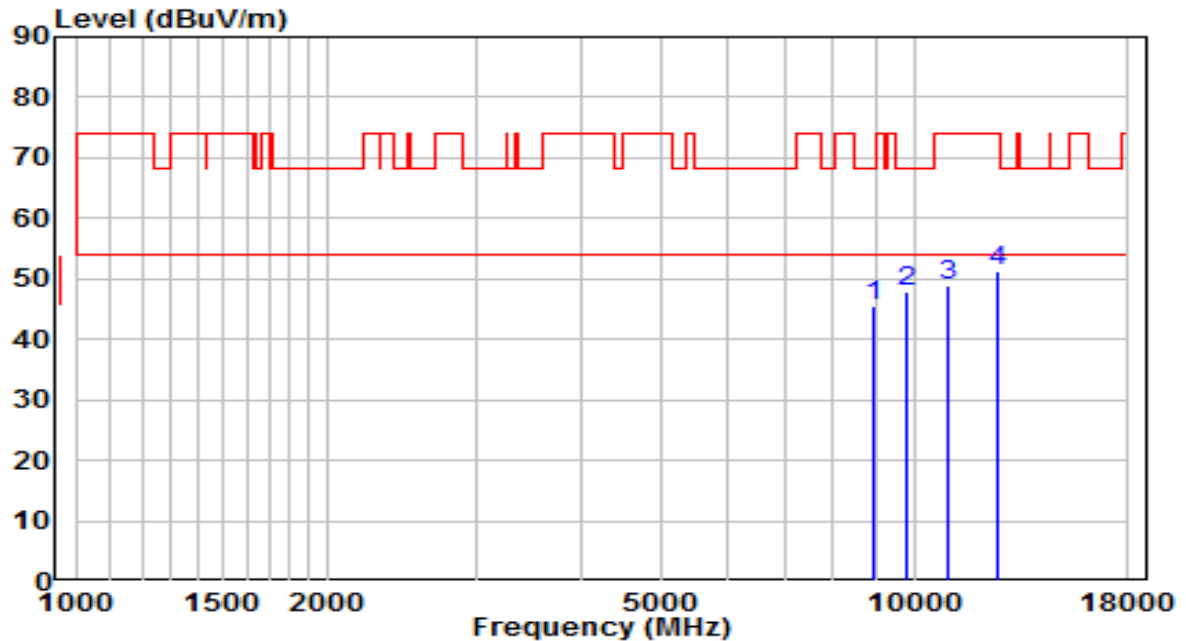


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8947.500	30.64	14.75	45.39	-22.81	68.20	Peak
2	* 9806.000	31.69	16.23	47.93	-20.27	68.20	Peak
3	10996.000	29.48	19.27	48.76	-25.24	74.00	Peak
4	12611.000	32.50	18.73	51.24	-22.76	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

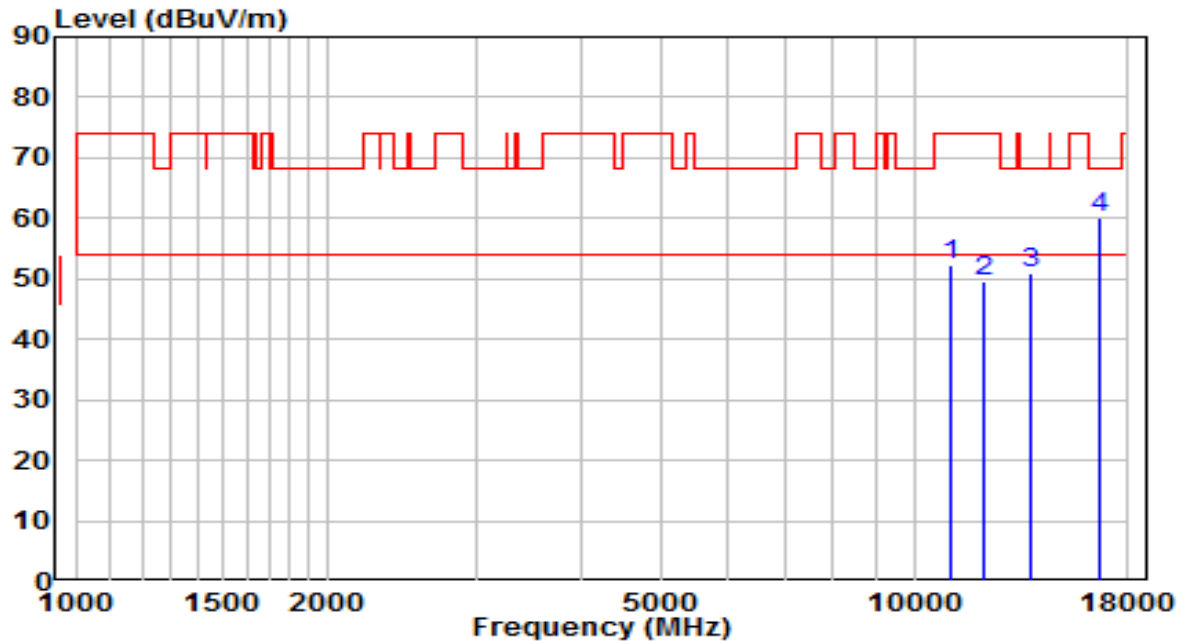


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11098.000	32.74	19.43	52.17	-21.83	74.00	Peak
2	12075.500	30.82	18.84	49.66	-24.34	74.00	Peak
3	13809.500	28.81	22.20	51.01	-17.19	68.20	Peak
4	* 16648.500	37.97	22.23	60.19	-8.01	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

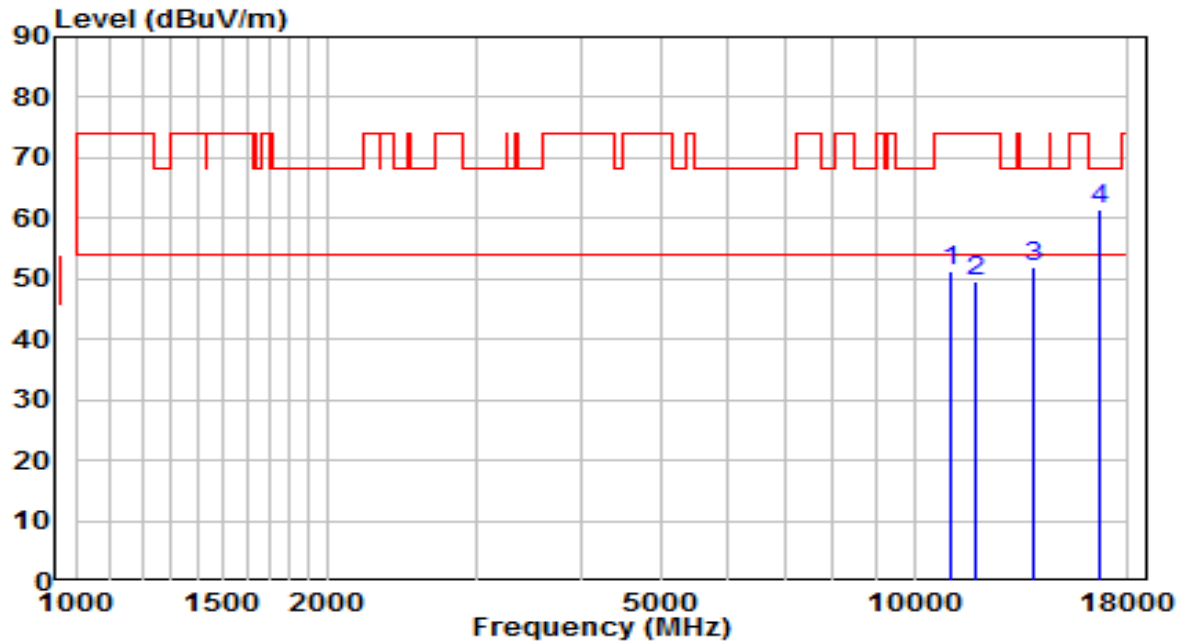


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11098.000	31.97	19.43	51.40	-22.60	74.00	Peak
2	11812.000	30.21	19.34	49.55	-24.45	74.00	Peak
3	13843.500	29.84	22.24	52.08	-16.12	68.20	Peak
4	* 16657.000	39.16	22.28	61.44	-6.76	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

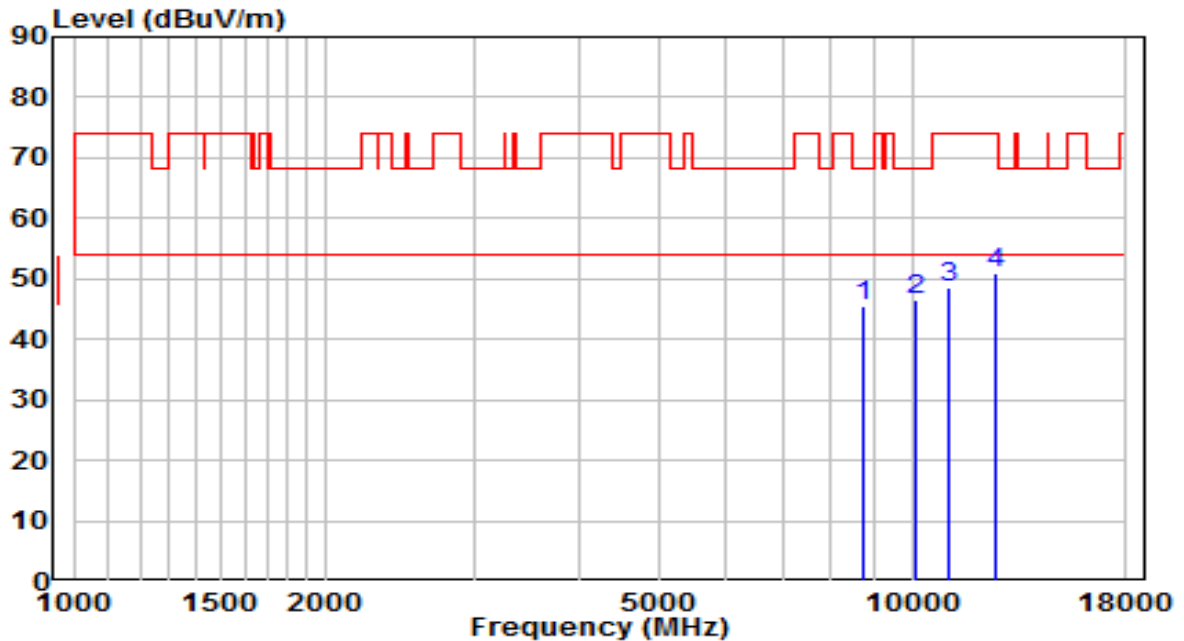


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8743.500	31.10	14.25	45.36	-22.84	68.20	Peak
2	*	10078.000	29.69	16.87	46.57	-21.63	68.20	Peak
3		11098.000	28.99	19.43	48.42	-25.58	74.00	Peak
4		12568.500	32.23	18.61	50.84	-23.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

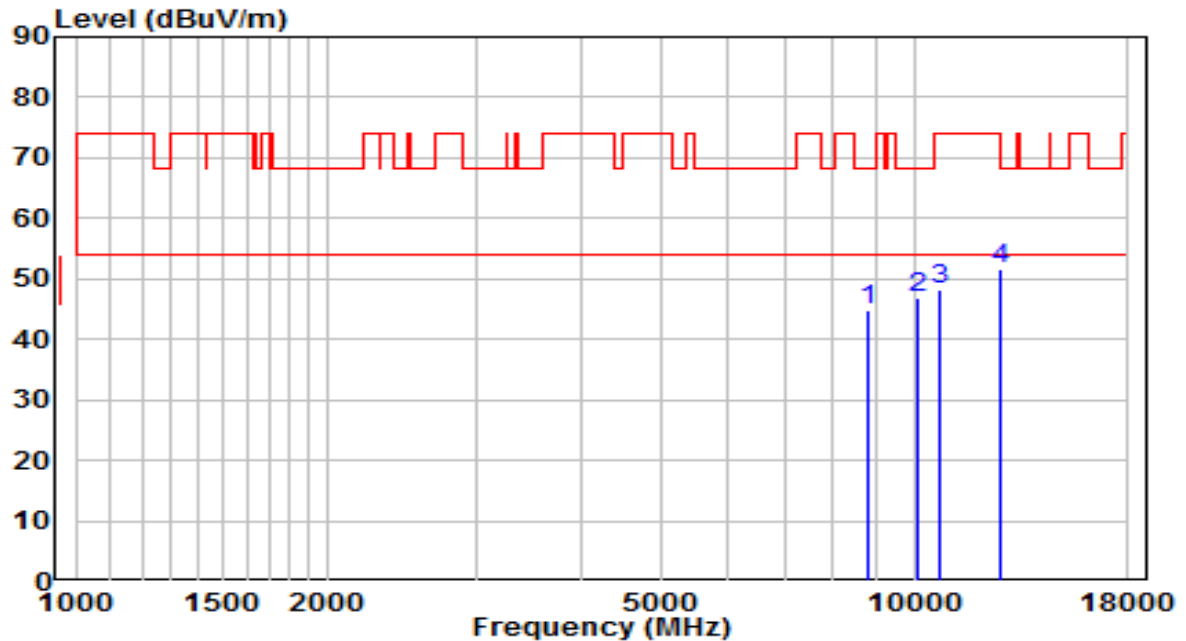


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8820.000	30.43	14.44	44.87	-23.33	68.20	Peak
2	*	10086.500	30.03	16.91	46.94	-21.26	68.20	Peak
3		10749.500	29.29	18.92	48.21	-25.79	74.00	Peak
4		12628.000	32.99	18.79	51.77	-22.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

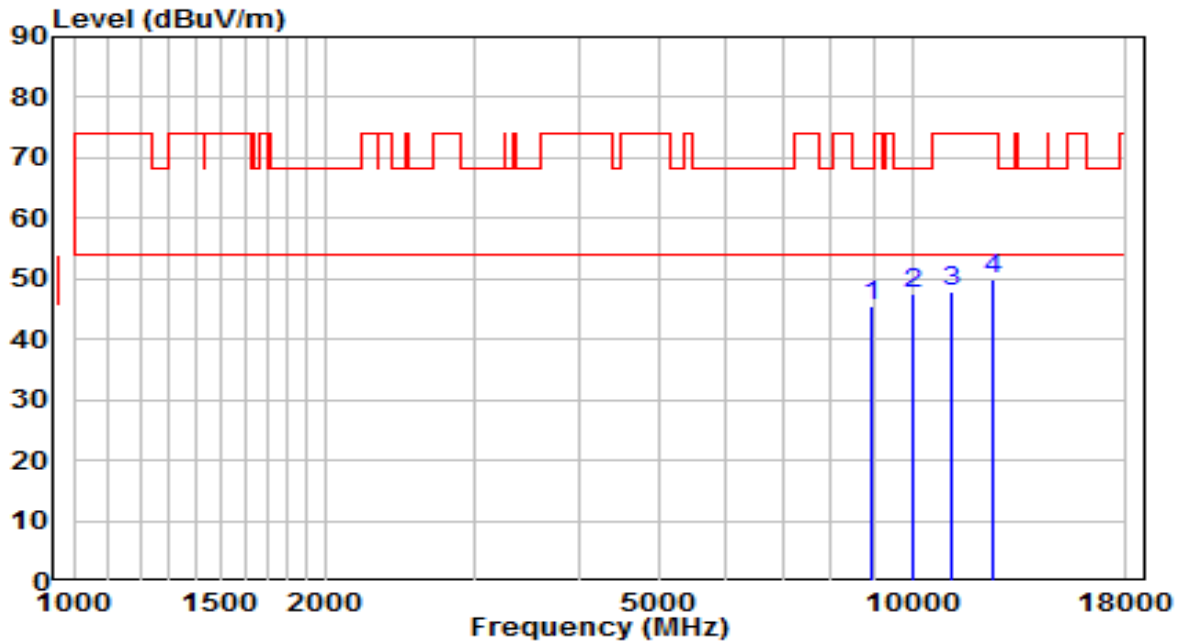


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8939.000	30.72	14.73	45.46	-22.74	68.20	Peak
2	*	9993.000	30.87	16.55	47.42	-20.78	68.20	Peak
3		11140.500	28.38	19.50	47.87	-26.13	74.00	Peak
4		12517.500	31.55	18.46	50.00	-24.00	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

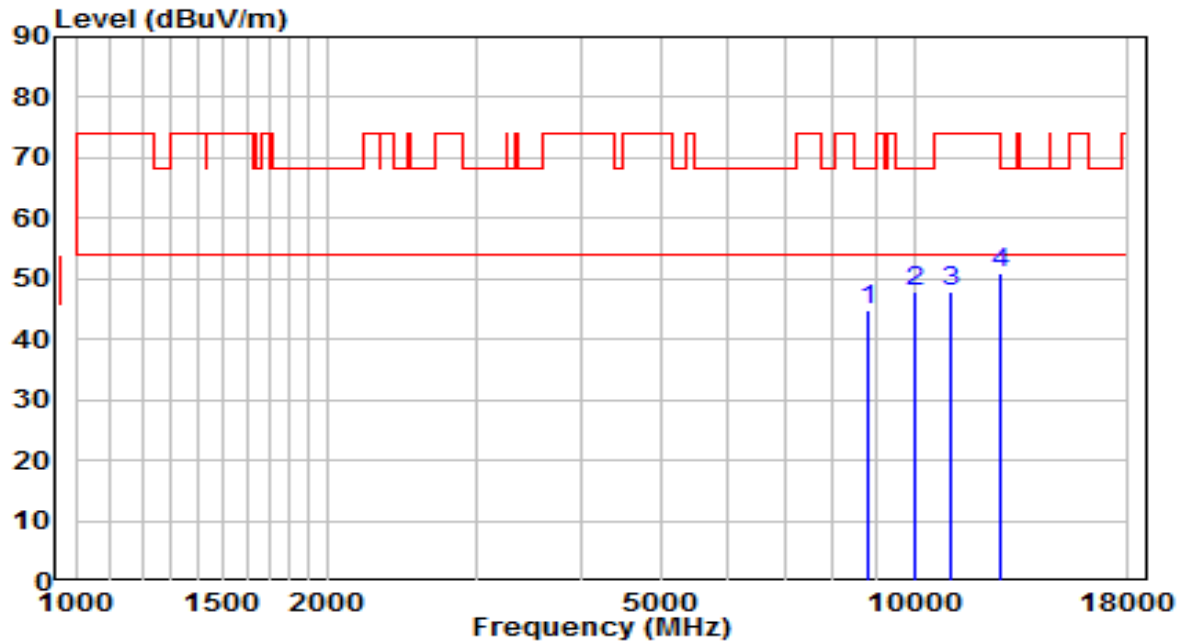


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8820.000	30.48	14.44	44.91	-23.29	68.20	Peak
2	* 9993.000	31.23	16.55	47.78	-20.42	68.20	Peak
3	11072.500	28.59	19.39	47.99	-26.01	74.00	Peak
4	12670.500	32.13	18.91	51.04	-22.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

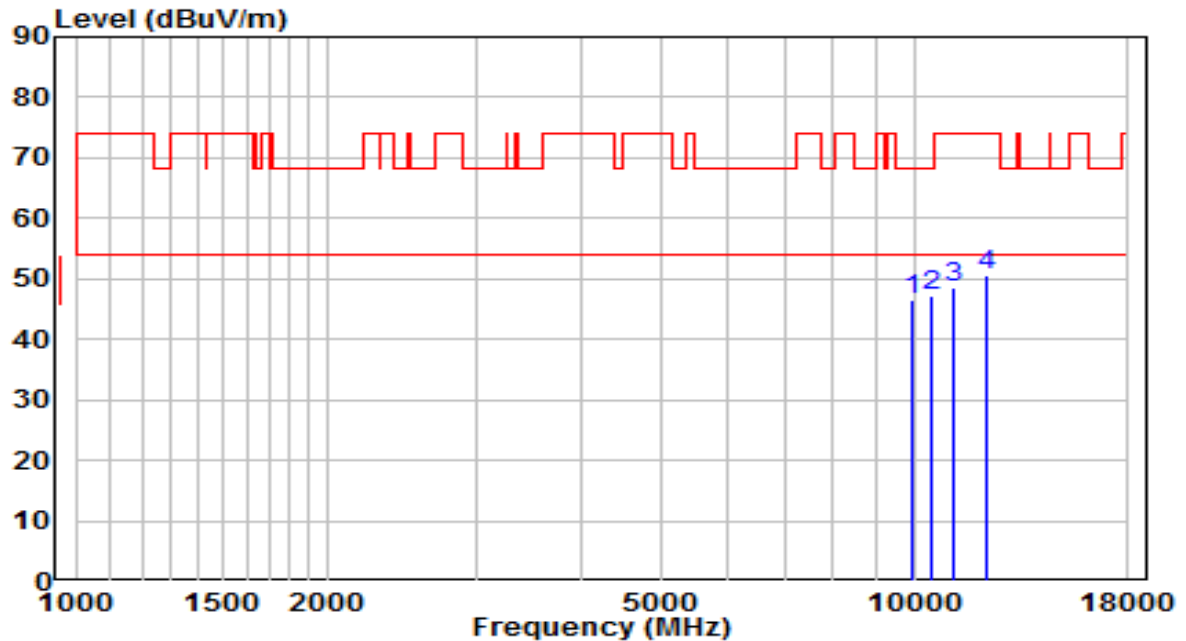


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		9933.500	30.17	16.45	46.62	-21.58	68.20	Peak
2	*	10469.000	28.92	18.45	47.37	-20.83	68.20	Peak
3		11174.500	29.16	19.55	48.71	-25.29	74.00	Peak
4		12177.500	31.94	18.74	50.67	-23.33	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

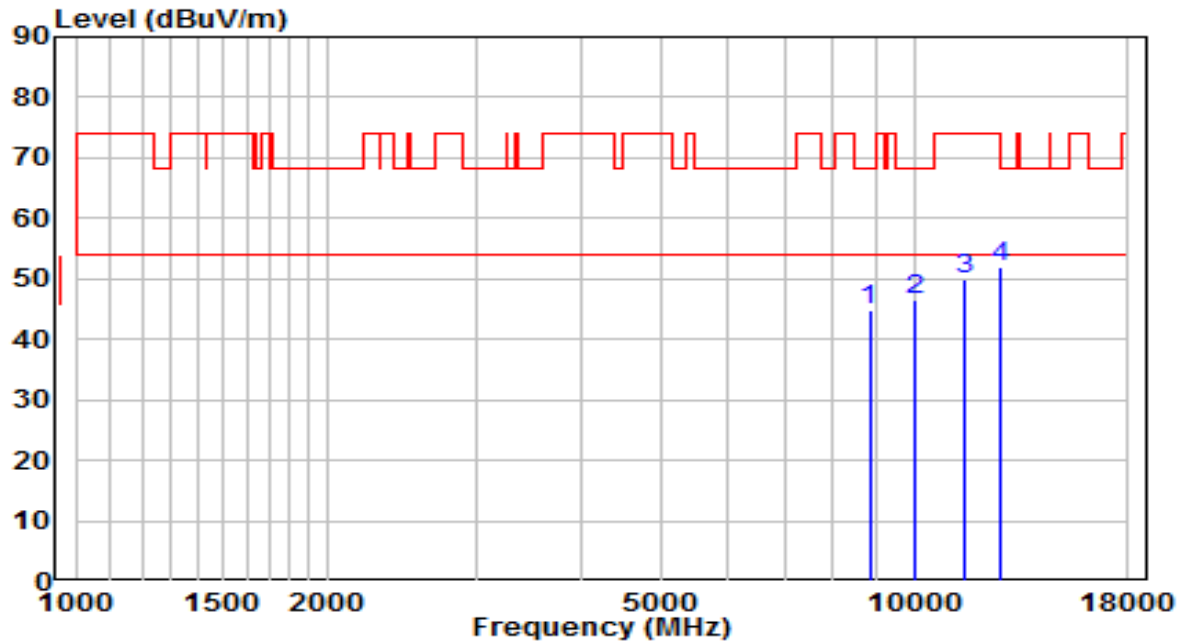


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8845.500	30.21	14.50	44.71	-23.49	68.20	Peak
2	*	10001.500	29.94	16.57	46.50	-21.70	68.20	Peak
3		11506.000	29.73	20.04	49.77	-24.23	74.00	Peak
4		12662.000	33.00	18.89	51.88	-22.12	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

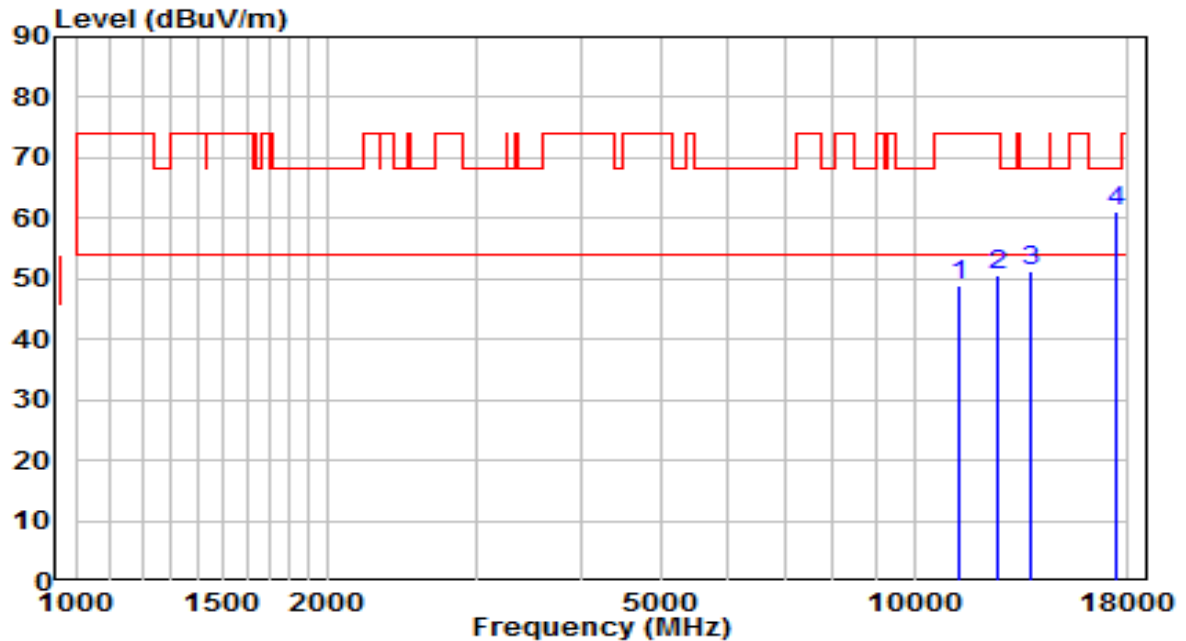


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11353.000	28.97	19.82	48.79	-25.21	74.00	Peak
2	12543.000	32.09	18.53	50.62	-23.38	74.00	Peak
3	13741.500	29.27	22.13	51.40	-16.80	68.20	Peak
4	* 17379.500	34.22	27.04	61.26	-6.94	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT40 at Channel 5795MHz	Test Voltage	AC 120V/60Hz

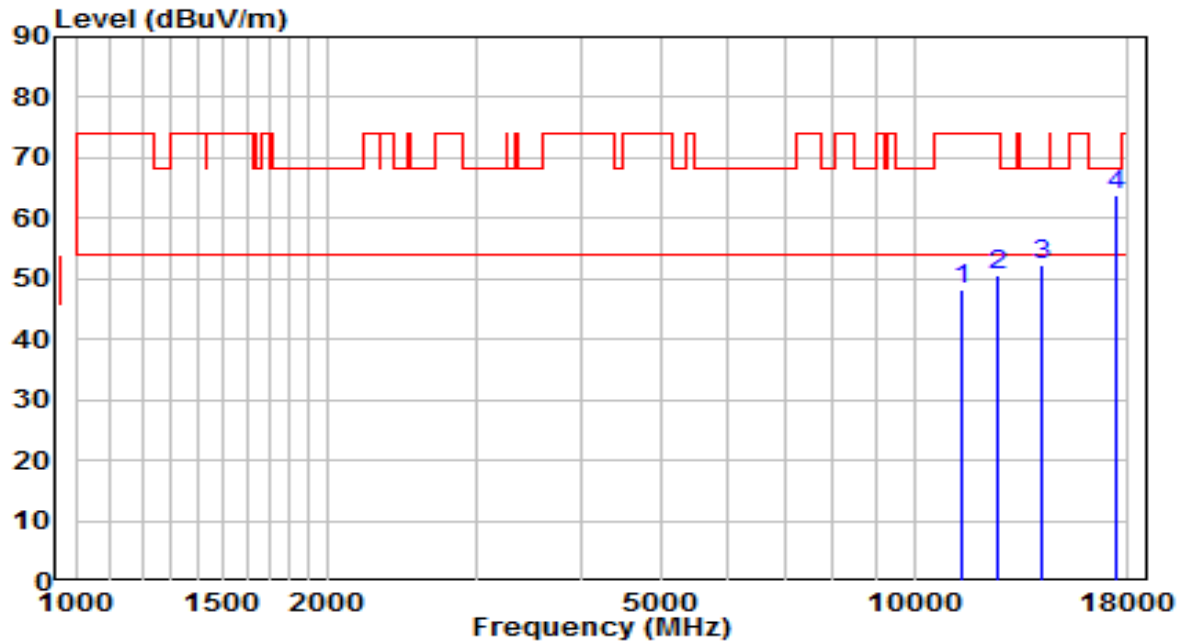


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11378.500	28.48	19.86	48.34	-25.66	74.00	Peak
2	12577.000	32.09	18.63	50.72	-23.28	74.00	Peak
3	14209.000	29.81	22.43	52.25	-15.95	68.20	Peak
4	* 17396.500	36.61	27.15	63.76	-4.44	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

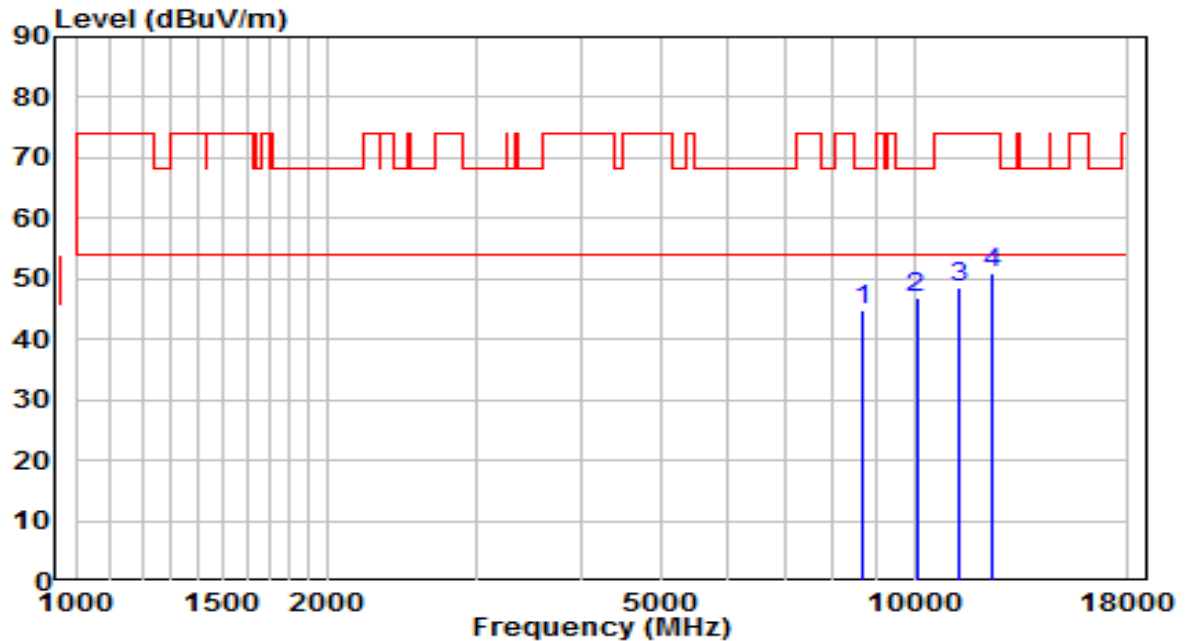


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8701.000	30.56	14.15	44.71	-23.49	68.20	Peak
2	*	10061.000	30.23	16.81	47.03	-21.17	68.20	Peak
3		11285.000	28.92	19.72	48.64	-25.36	74.00	Peak
4		12432.500	32.31	18.47	50.79	-23.21	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5210MHz	Test Voltage	AC 120V/60Hz

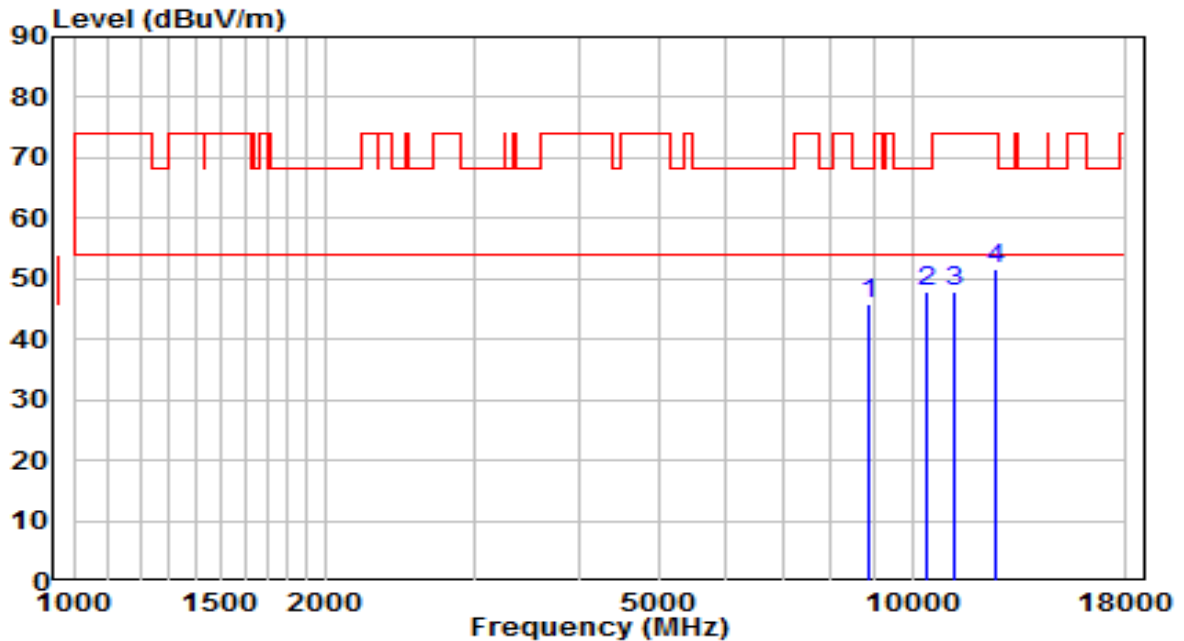


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8896.500	31.33	14.63	45.96	-22.24	68.20	Peak
2	* 10443.500	29.48	18.34	47.82	-20.38	68.20	Peak
3	11191.500	28.25	19.57	47.83	-26.17	74.00	Peak
4	12611.000	32.95	18.73	51.68	-22.32	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	AC 120V/60Hz

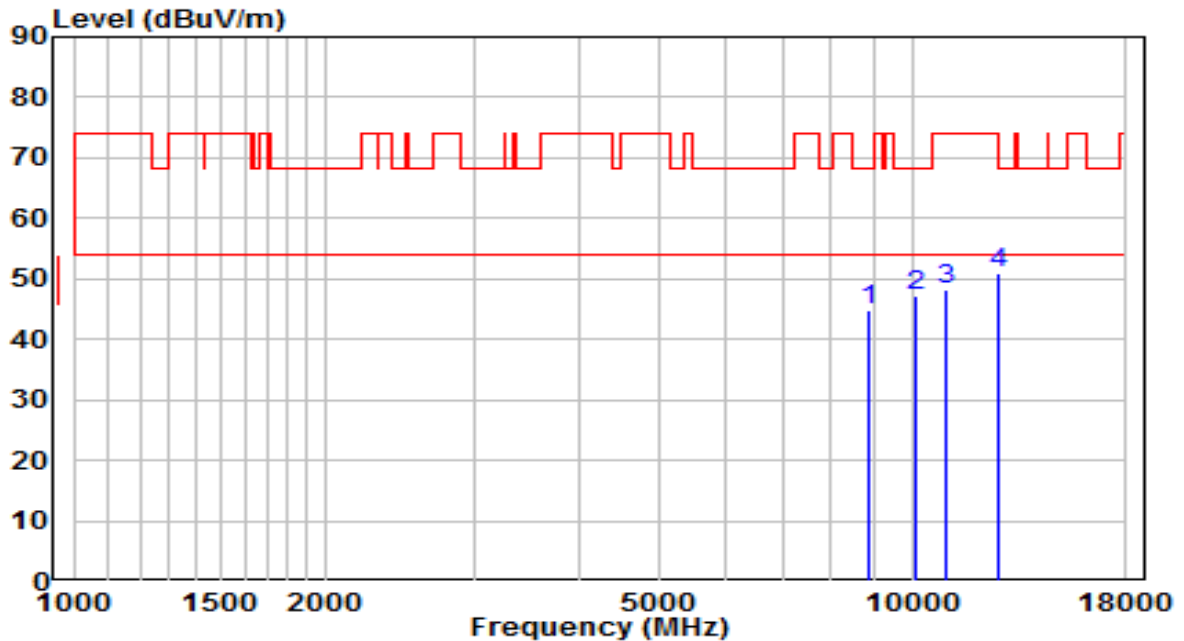


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8862.500	30.32	14.54	44.86	-23.34	68.20	Peak
2	*	10086.500	30.45	16.91	47.35	-20.85	68.20	Peak
3		10953.500	28.92	19.21	48.13	-25.87	74.00	Peak
4		12628.000	32.11	18.79	50.90	-23.10	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5290MHz	Test Voltage	AC 120V/60Hz

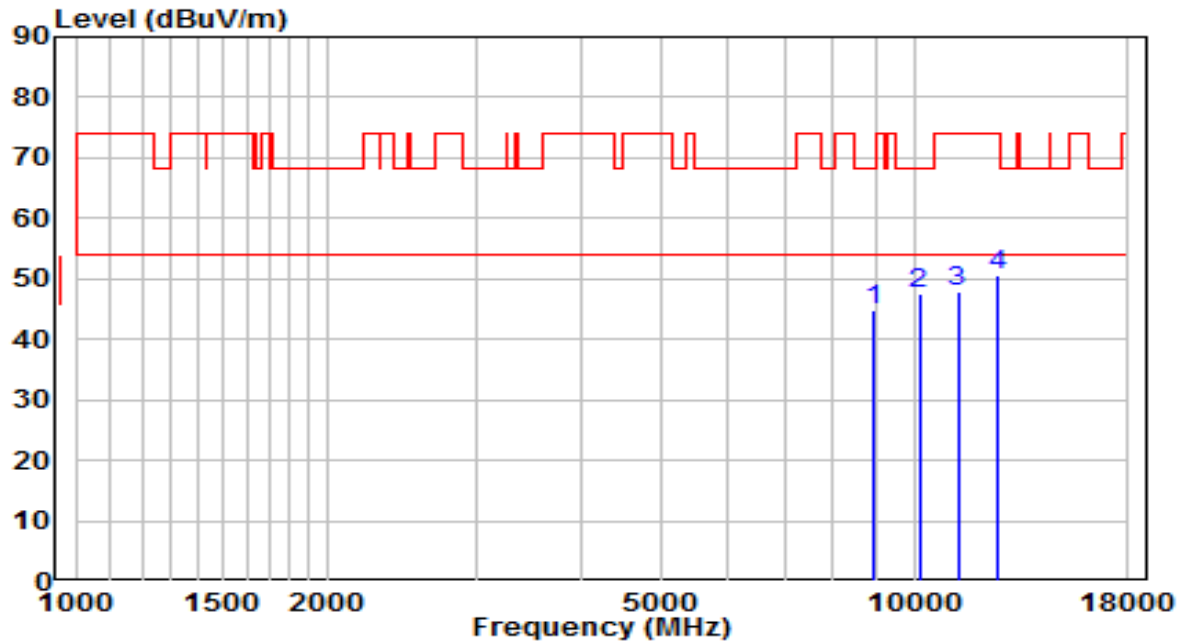


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8956.000	29.92	14.77	44.70	-23.50	68.20	Peak
2	*	10137.500	30.29	17.11	47.40	-20.80	68.20	Peak
3		11268.000	28.33	19.69	48.03	-25.97	74.00	Peak
4		12611.000	32.02	18.73	50.75	-23.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	AC 120V/60Hz

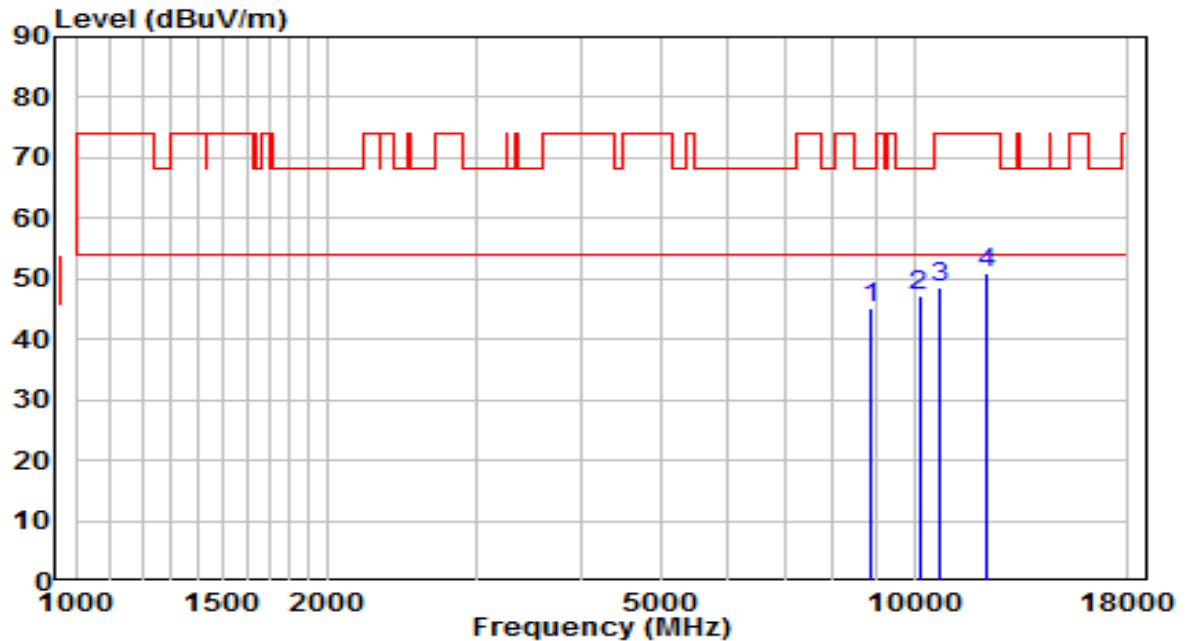


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8854.000	30.66	14.52	45.18	-23.02	68.20	Peak
2	* 10137.500	30.21	17.11	47.33	-20.87	68.20	Peak
3	10698.500	29.62	18.85	48.47	-25.53	74.00	Peak
4	12245.500	32.13	18.67	50.80	-23.20	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5530MHz	Test Voltage	AC 120V/60Hz

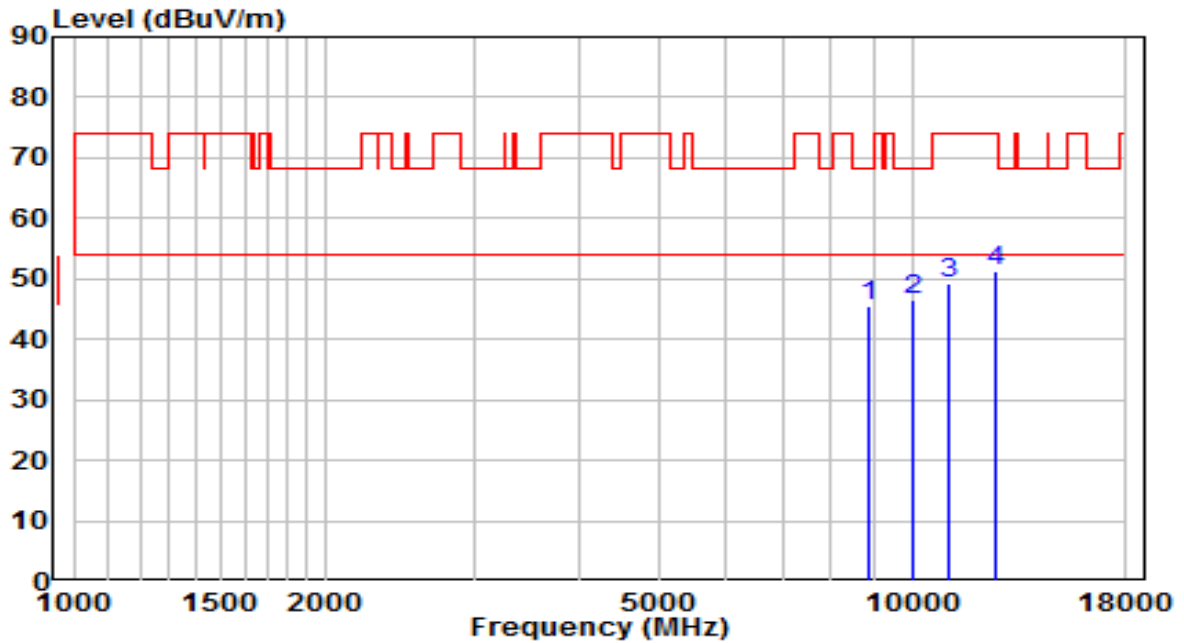


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8854.000	30.95	14.52	45.48	-22.72	68.20	Peak
2	*	9993.000	29.94	16.55	46.49	-21.71	68.20	Peak
3		11081.000	29.72	19.40	49.13	-24.87	74.00	Peak
4		12619.500	32.61	18.76	51.37	-22.63	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	AC 120V/60Hz

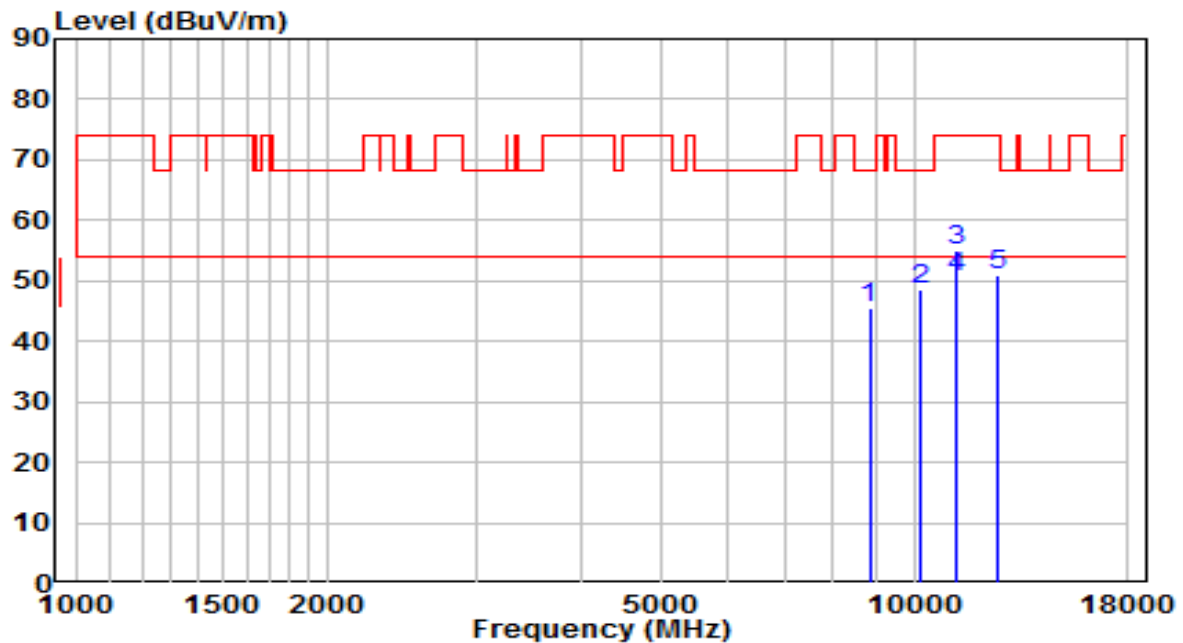


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8845.500	31.03	14.50	45.53	-22.67	68.20	Peak
2	10205.500	31.09	17.39	48.48	-19.72	68.20	Peak
3	11217.000	35.26	19.61	54.87	-19.13	74.00	Peak
4	* 11217.000	30.89	19.61	50.50	-3.50	54.00	Average
5	12568.500	32.45	18.61	51.06	-22.94	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5610MHz	Test Voltage	AC 120V/60Hz

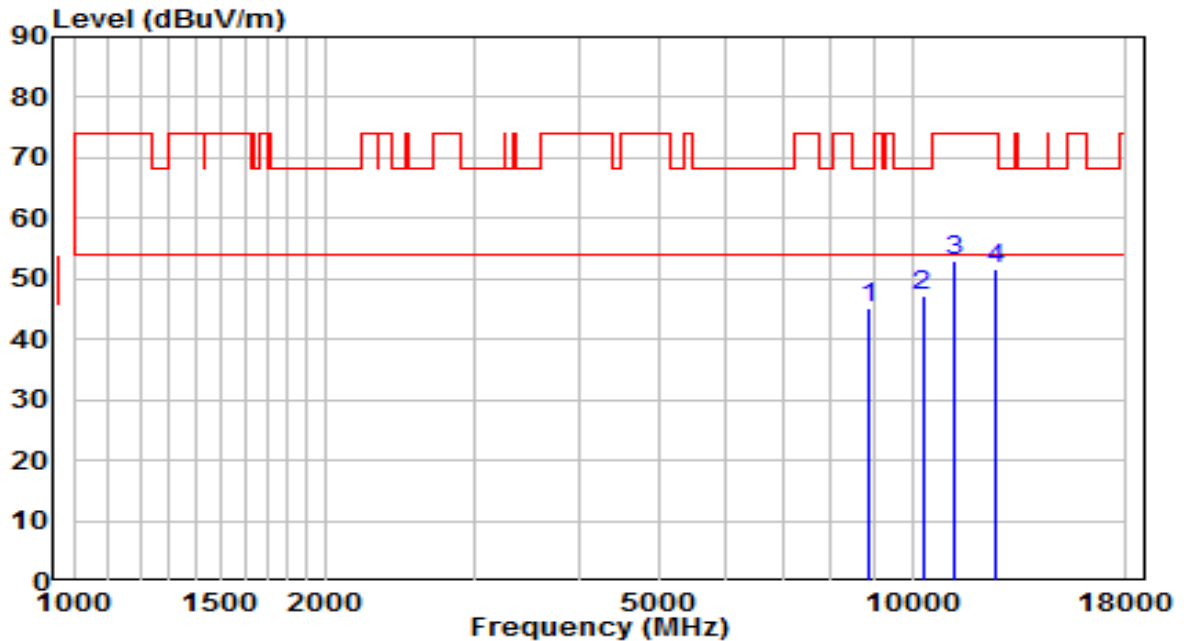


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8862.500	30.78	14.54	45.32	-22.88	68.20	Peak
2	10290.500	29.36	17.73	47.09	-21.11	68.20	Peak
3	* 11217.000	33.29	19.61	52.91	-21.09	74.00	Peak
4	12568.500	32.98	18.61	51.58	-22.42	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	AC 120V/60Hz

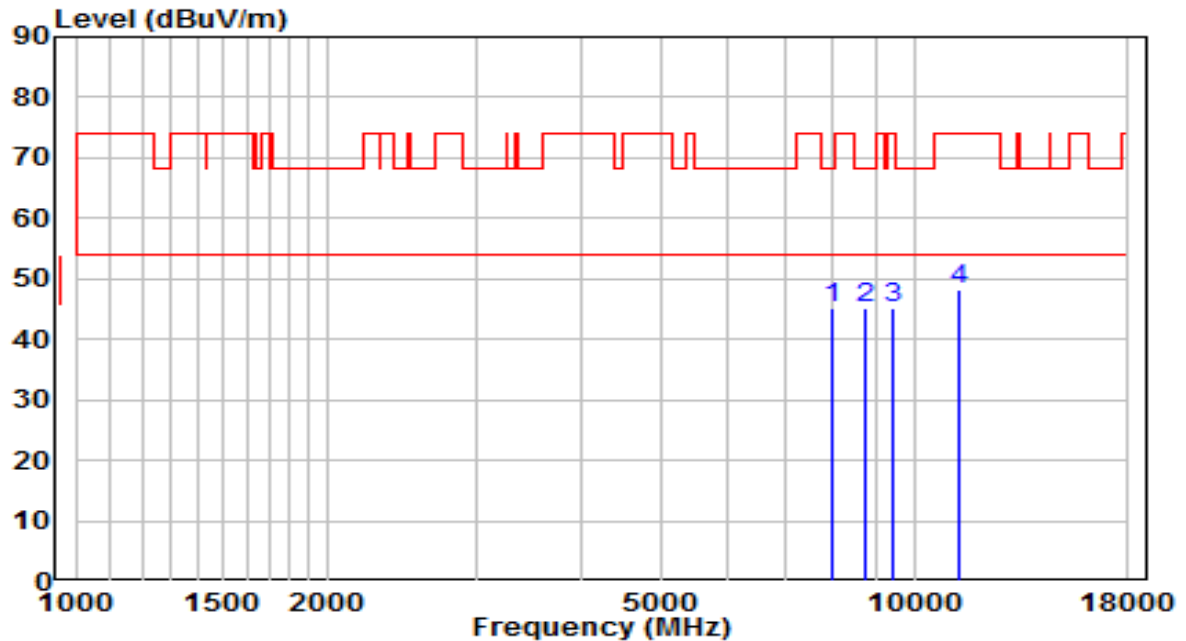


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		7978.500	31.64	13.41	45.05	-23.15	68.20	Peak
2	*	8769.000	30.75	14.31	45.06	-23.14	68.20	Peak
3		9457.500	29.68	15.65	45.33	-28.67	74.00	Peak
4		11327.500	28.36	19.78	48.15	-25.85	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5690MHz	Test Voltage	AC 120V/60Hz

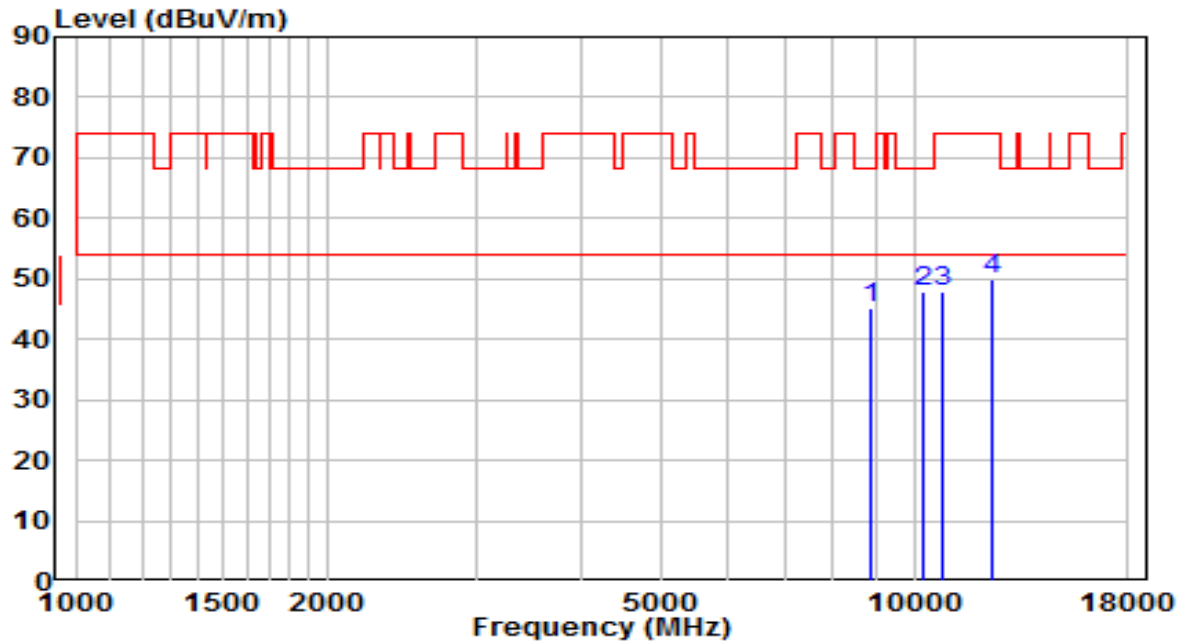


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8879.500	30.49	14.58	45.07	-23.13	68.20	Peak
2	* 10248.000	30.30	17.56	47.85	-20.35	68.20	Peak
3	10843.000	28.74	19.06	47.80	-26.21	74.00	Peak
4	12398.500	31.52	18.51	50.03	-23.97	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

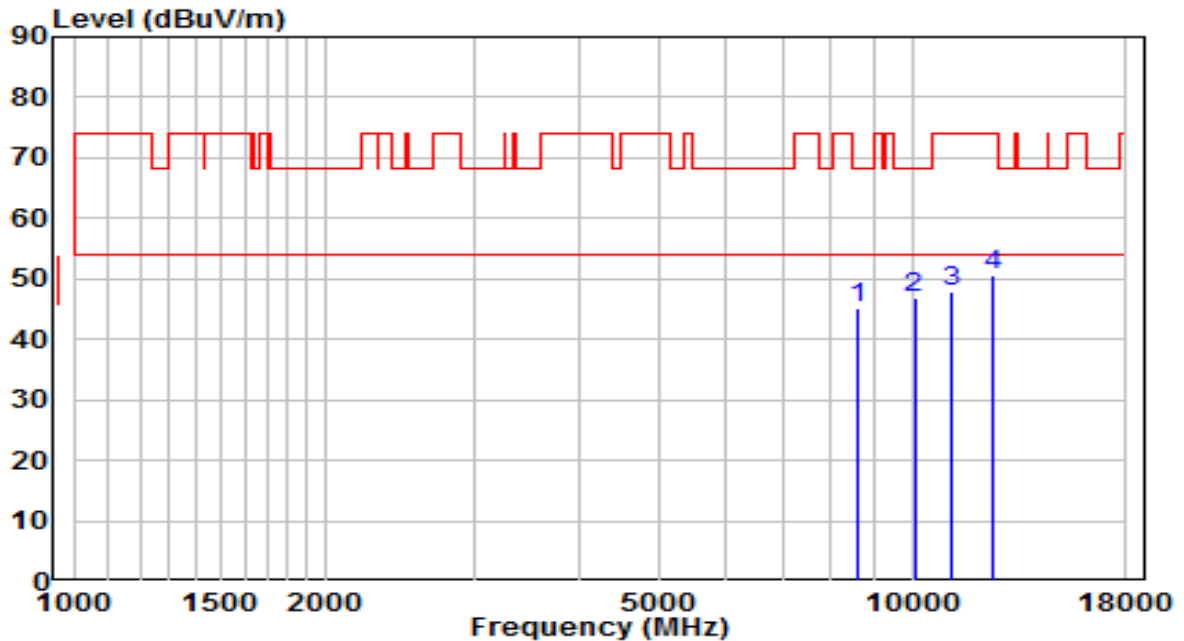


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8624.500	31.21	13.96	45.17	-23.03	68.20	Peak
2	* 10061.000	29.93	16.81	46.74	-21.46	68.20	Peak
3	11132.000	28.50	19.48	47.98	-26.02	74.00	Peak
4	12526.000	32.12	18.48	50.60	-23.40	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ac-VHT80 at Channel 5775MHz	Test Voltage	AC 120V/60Hz

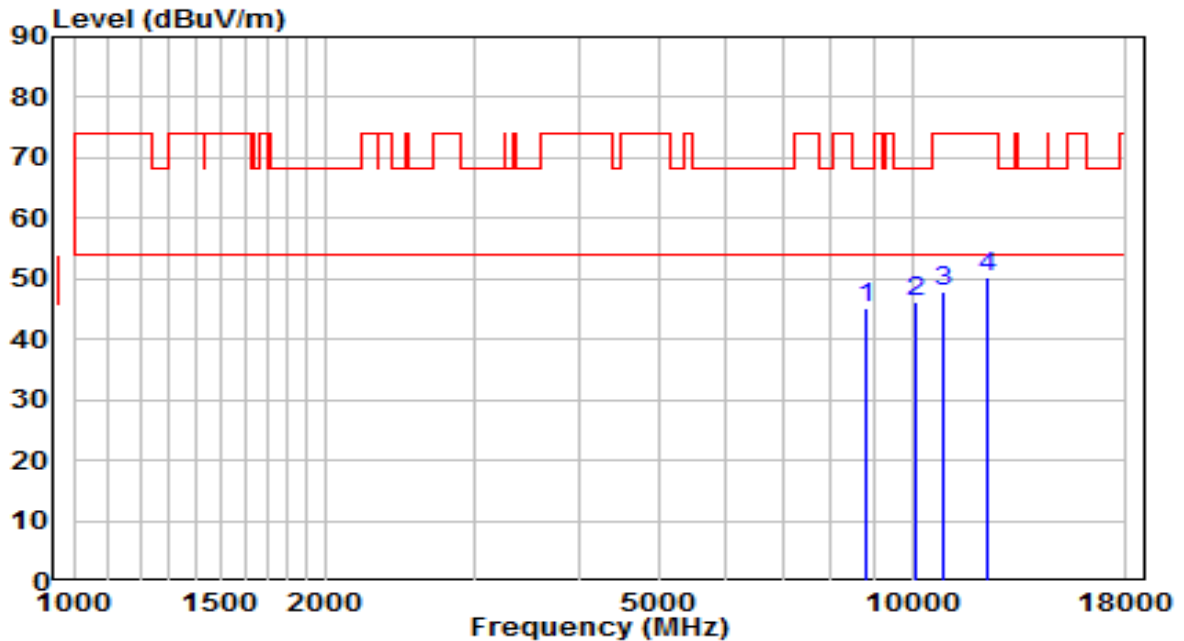


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8786.000	30.92	14.36	45.27	-22.93	68.20	Peak
2	*	10129.000	29.08	17.08	46.16	-22.04	68.20	Peak
3		10902.500	28.91	19.14	48.05	-25.95	74.00	Peak
4		12254.000	31.62	18.66	50.28	-23.72	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

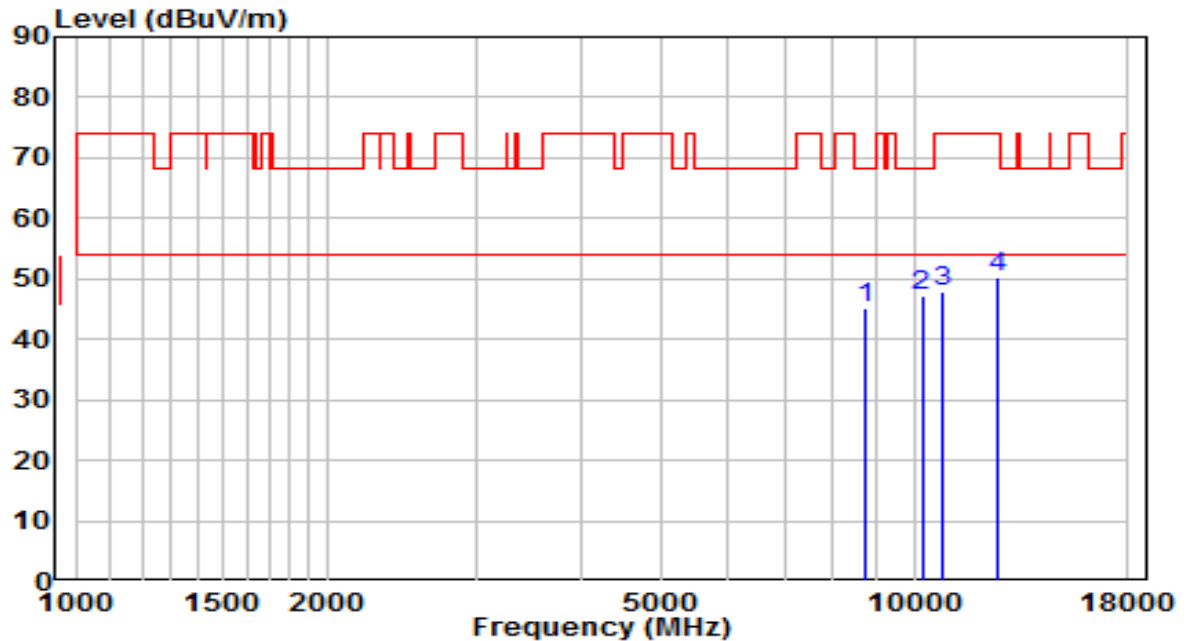


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8769.000	30.82	14.31	45.13	-23.07	68.20	Peak
2	*	10214.000	29.81	17.42	47.23	-20.97	68.20	Peak
3		10843.000	28.73	19.06	47.79	-26.21	74.00	Peak
4		12560.000	31.60	18.58	50.18	-23.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5180MHz	Test Voltage	AC 120V/60Hz

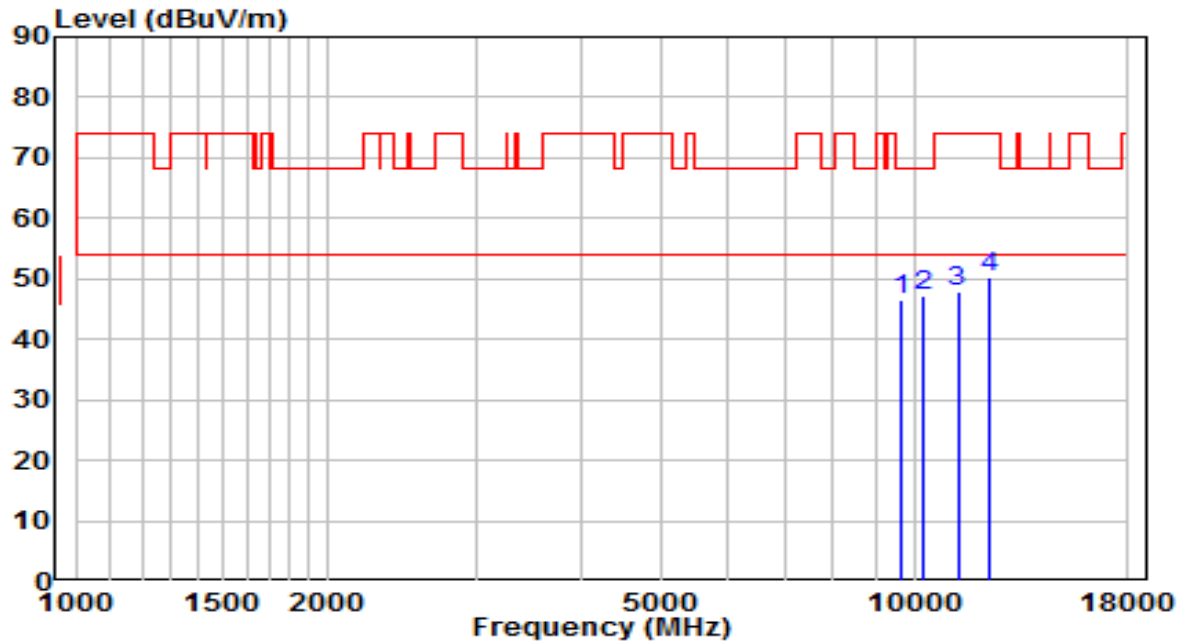


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		9670.000	30.49	16.01	46.50	-21.70	68.20	Peak
2	*	10248.000	29.66	17.56	47.22	-20.98	68.20	Peak
3		11268.000	28.21	19.69	47.90	-26.10	74.00	Peak
4		12262.500	31.53	18.65	50.18	-23.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

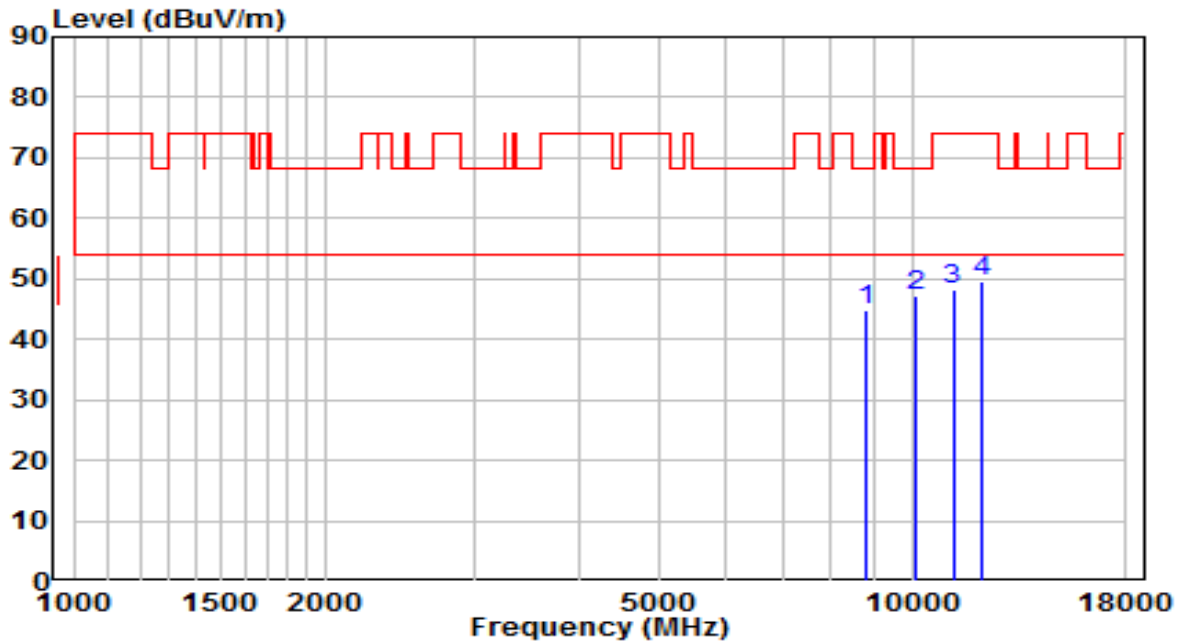


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8803.000	30.54	14.40	44.94	-23.26	68.20	Peak
2	* 10129.000	29.98	17.08	47.05	-21.15	68.20	Peak
3	11183.000	28.65	19.56	48.21	-25.79	74.00	Peak
4	12101.000	30.73	18.82	49.55	-24.45	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5220MHz	Test Voltage	AC 120V/60Hz

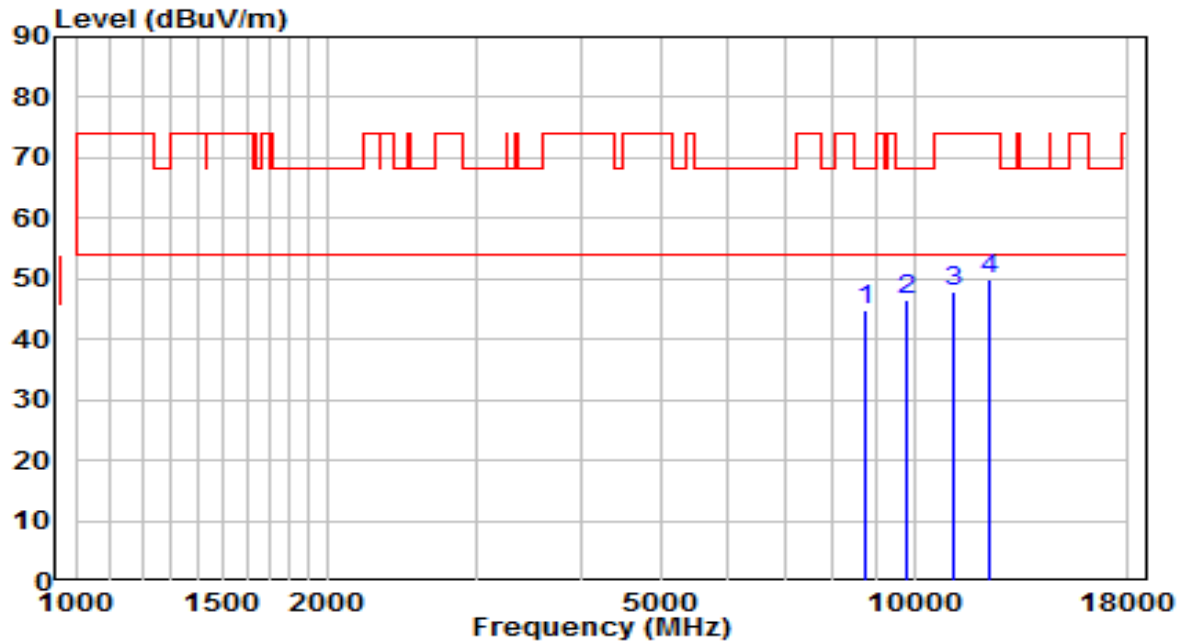


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8769.000	30.62	14.31	44.93	-23.27	68.20	Peak
2	*	9806.000	30.22	16.23	46.45	-21.75	68.20	Peak
3		11132.000	28.50	19.48	47.99	-26.01	74.00	Peak
4		12271.000	31.43	18.64	50.07	-23.93	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

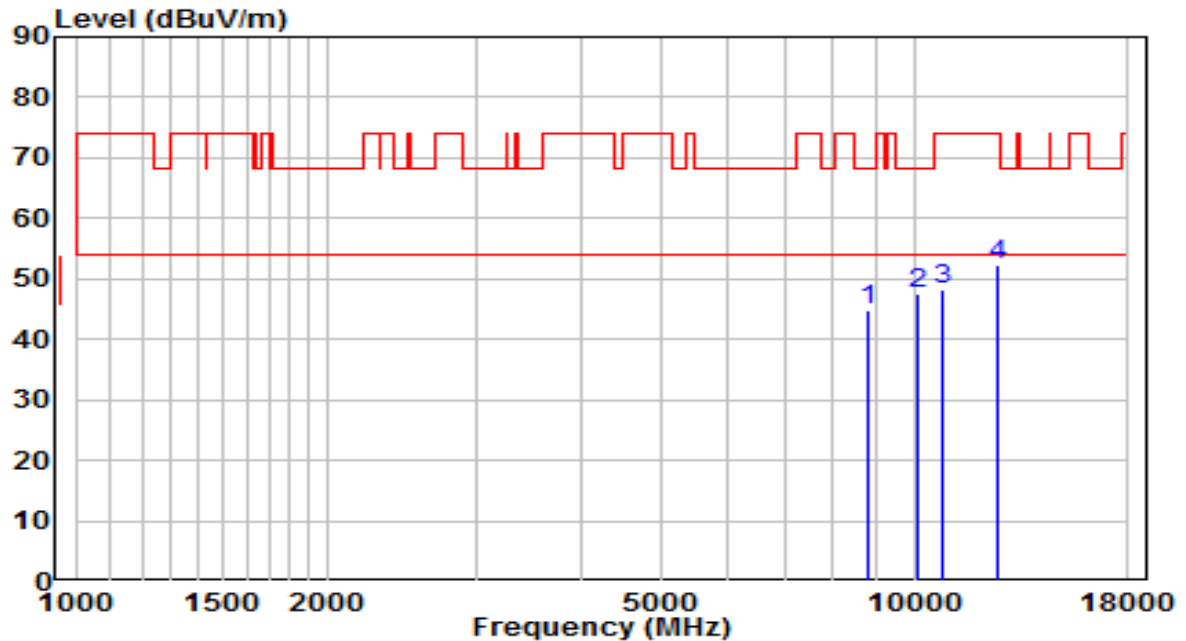


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8820.000	30.52	14.44	44.96	-23.24	68.20	Peak
2	* 10086.500	30.55	16.91	47.46	-20.74	68.20	Peak
3	10843.000	29.13	19.06	48.19	-25.81	74.00	Peak
4	12602.500	33.42	18.71	52.13	-21.87	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5240MHz	Test Voltage	AC 120V/60Hz

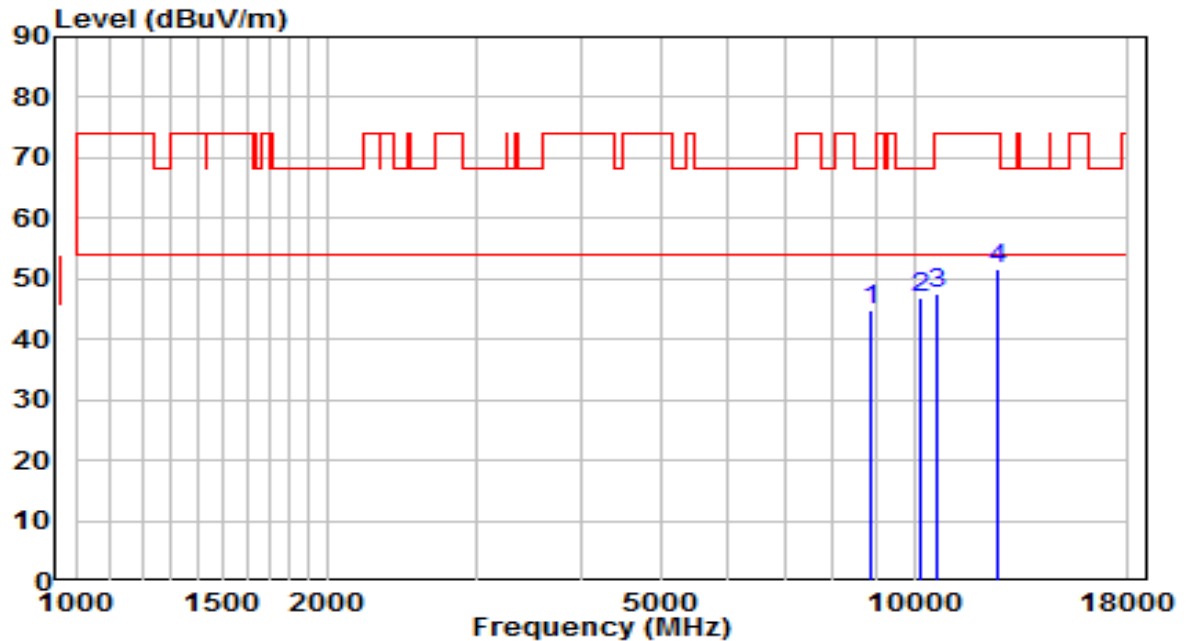


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8871.000	30.29	14.56	44.85	-23.35	68.20	Peak
2	*	10154.500	29.68	17.18	46.86	-21.34	68.20	Peak
3		10681.500	28.80	18.83	47.63	-26.37	74.00	Peak
4		12611.000	32.72	18.73	51.45	-22.55	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

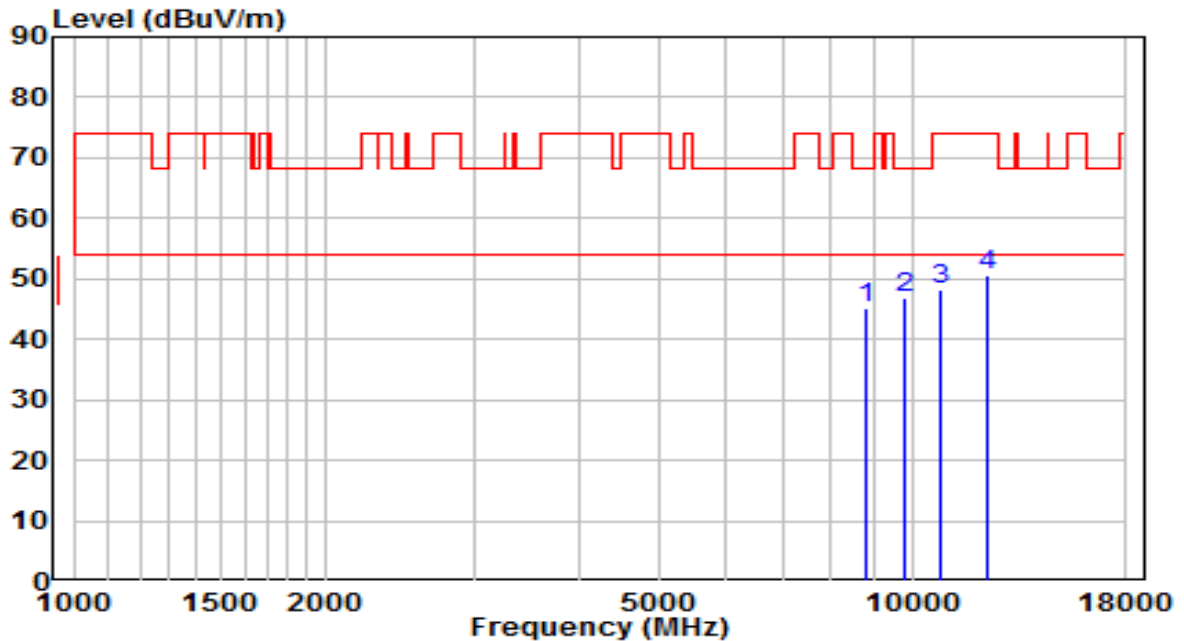


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8828.500	30.58	14.46	45.04	-23.16	68.20	Peak
2	*	9806.000	30.78	16.23	47.01	-21.19	68.20	Peak
3		10843.000	29.09	19.06	48.15	-25.85	74.00	Peak
4		12288.000	31.92	18.62	50.54	-23.46	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5260MHz	Test Voltage	AC 120V/60Hz

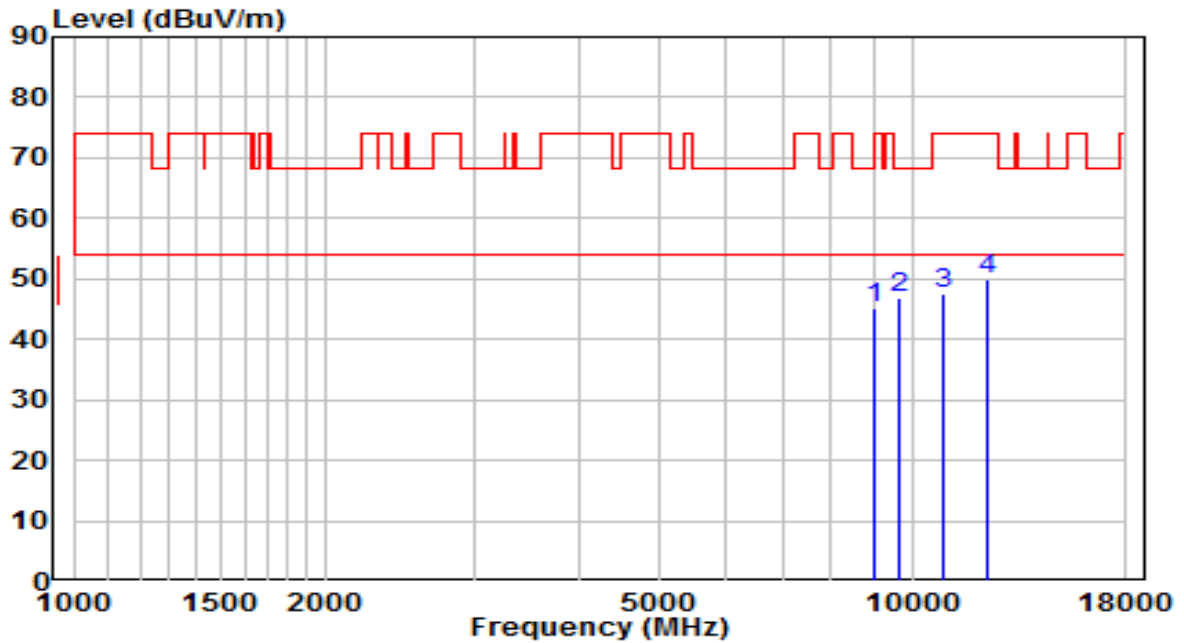


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8981.500	30.43	14.83	45.26	-22.94	68.20	Peak
2	*	9644.500	30.91	15.96	46.87	-21.33	68.20	Peak
3		10877.000	28.56	19.11	47.66	-26.34	74.00	Peak
4		12313.500	31.27	18.60	49.87	-24.13	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

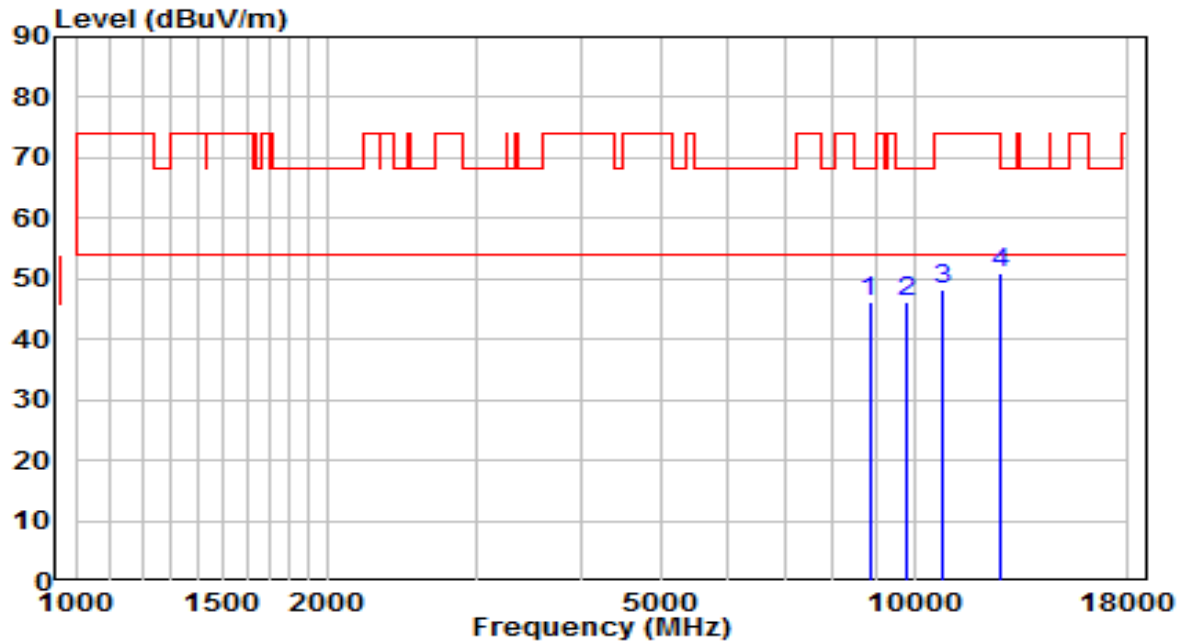


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8845.500	31.57	14.50	46.07	-22.13	68.20	Peak
2	*	9763.500	29.94	16.16	46.11	-22.09	68.20	Peak
3		10843.000	29.14	19.06	48.20	-25.80	74.00	Peak
4		12662.000	32.00	18.89	50.88	-23.12	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5300MHz	Test Voltage	AC 120V/60Hz

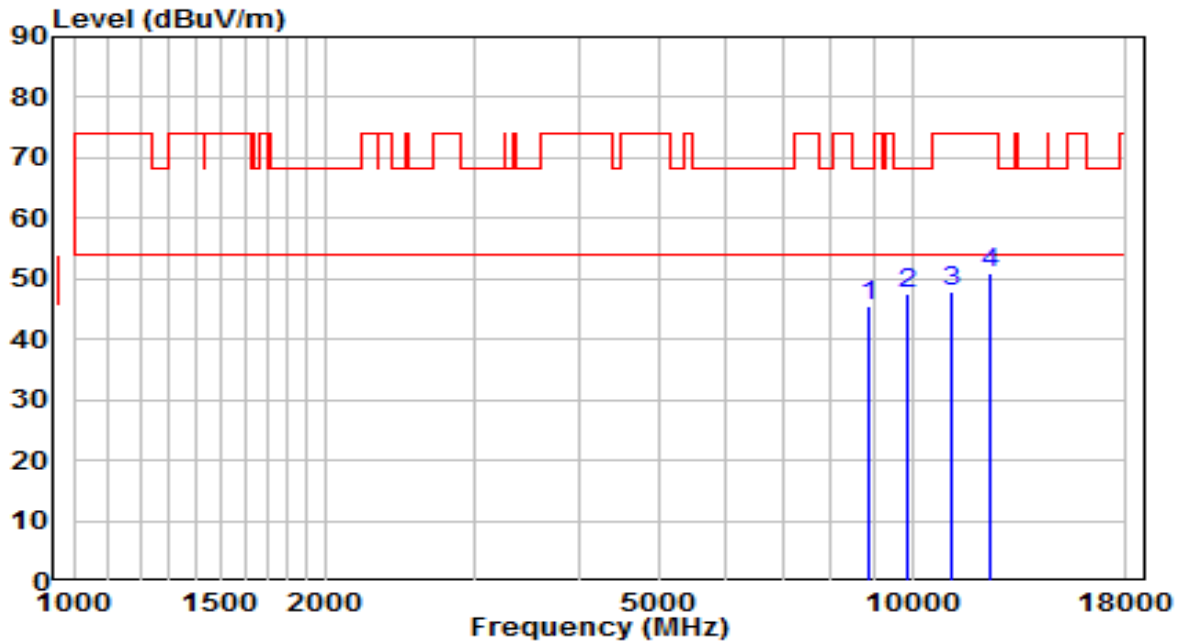


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8888.000	30.82	14.61	45.42	-22.78	68.20	Peak
2	* 9874.000	31.11	16.35	47.46	-20.74	68.20	Peak
3	11115.000	28.49	19.46	47.95	-26.05	74.00	Peak
4	12347.500	32.34	18.56	50.90	-23.10	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

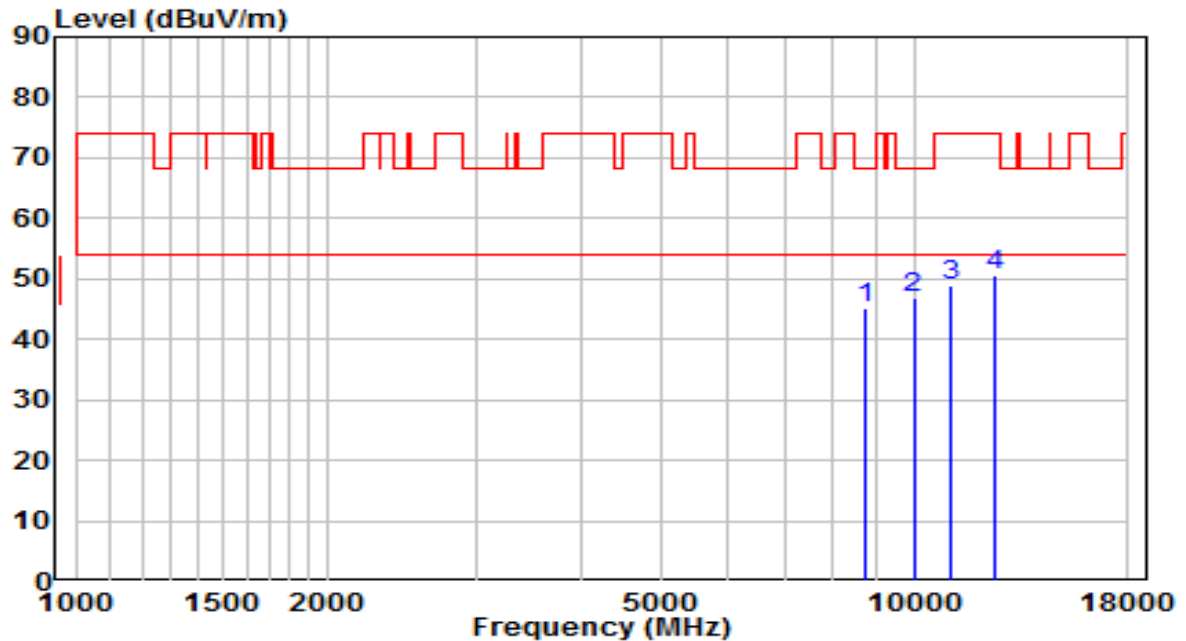


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8760.500	30.82	14.29	45.11	-23.09	68.20	Peak
2	*	9984.500	30.28	16.53	46.81	-21.39	68.20	Peak
3		11089.500	29.39	19.42	48.80	-25.20	74.00	Peak
4		12509.000	32.22	18.43	50.65	-23.35	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5320MHz	Test Voltage	AC 120V/60Hz

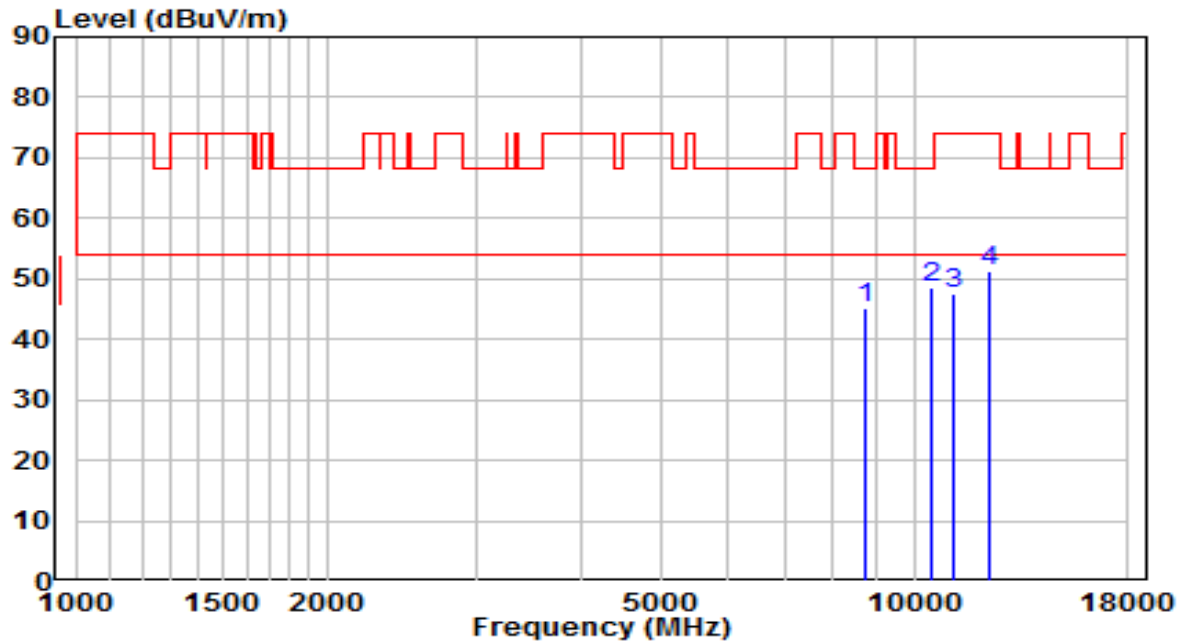


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8769.000	30.84	14.31	45.16	-23.04	68.20	Peak
2	*	10477.500	29.95	18.48	48.43	-19.77	68.20	Peak
3		11157.500	28.17	19.52	47.69	-26.31	74.00	Peak
4		12262.500	32.47	18.65	51.12	-22.88	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

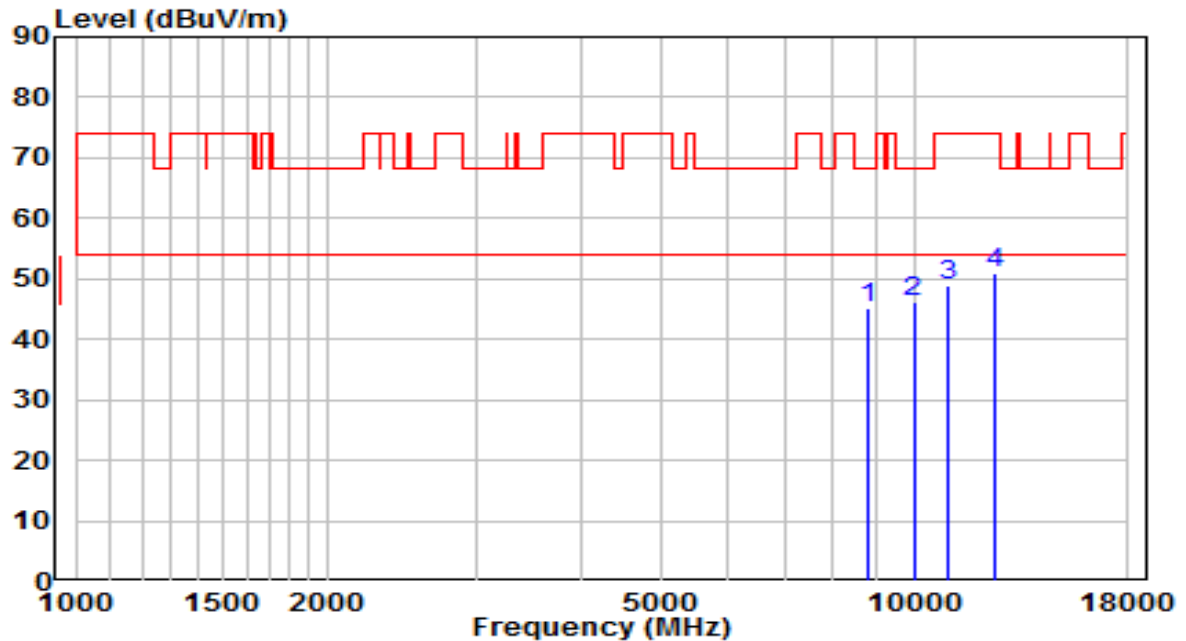


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8828.500	30.70	14.46	45.16	-23.04	68.20	Peak
2	*	9984.500	29.71	16.53	46.24	-21.96	68.20	Peak
3		10996.000	29.65	19.27	48.92	-25.08	74.00	Peak
4		12458.000	32.40	18.45	50.85	-23.15	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5500MHz	Test Voltage	AC 120V/60Hz

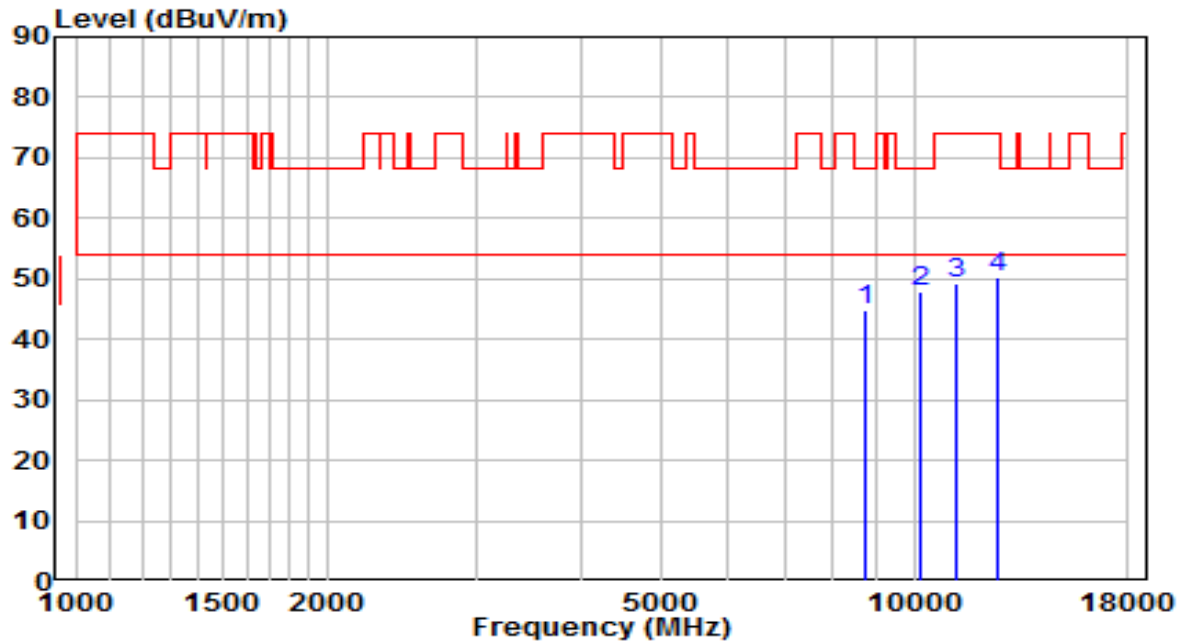


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8760.500	30.41	14.29	44.70	-23.50	68.20	Peak
2	*	10163.000	30.64	17.22	47.85	-20.35	68.20	Peak
3		11200.000	29.59	19.59	49.18	-24.82	74.00	Peak
4		12577.000	31.54	18.63	50.17	-23.83	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

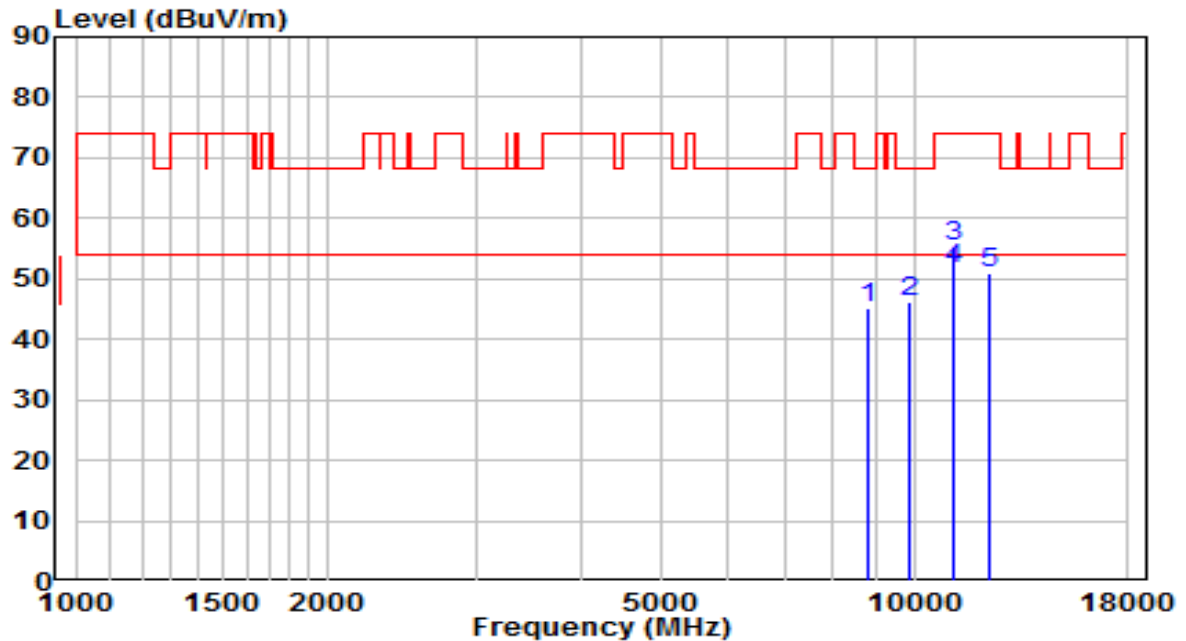


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8803.000	30.65	14.40	45.05	-23.15	68.20	Peak
2	9857.000	29.83	16.32	46.15	-22.05	68.20	Peak
3	11157.500	35.79	19.52	55.31	-18.69	74.00	Peak
4	* 11157.500	32.18	19.52	51.70	-2.30	54.00	Average
5	12279.500	32.31	18.63	50.94	-23.06	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5580MHz	Test Voltage	AC 120V/60Hz

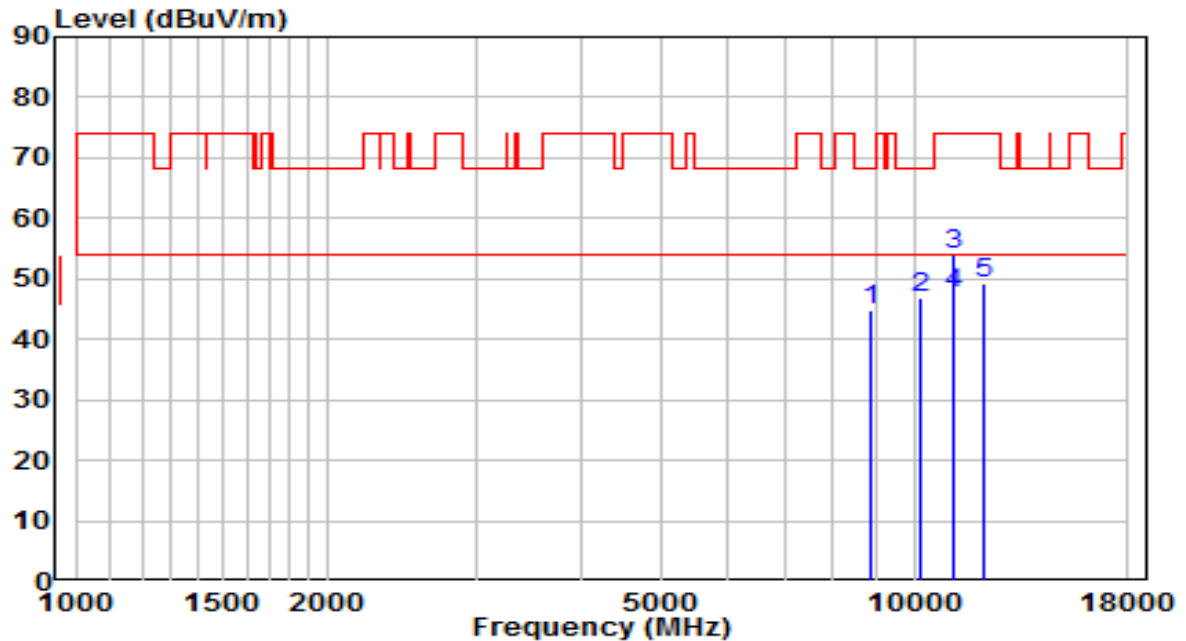


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8905.000	30.28	14.65	44.93	-23.27	68.20	Peak
2	10180.000	29.66	17.28	46.94	-21.26	68.20	Peak
3	11166.000	34.62	19.54	54.16	-19.84	74.00	Peak
4	* 11166.000	27.90	19.54	47.44	-6.56	54.00	Average
5	12152.000	30.65	18.76	49.41	-24.59	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

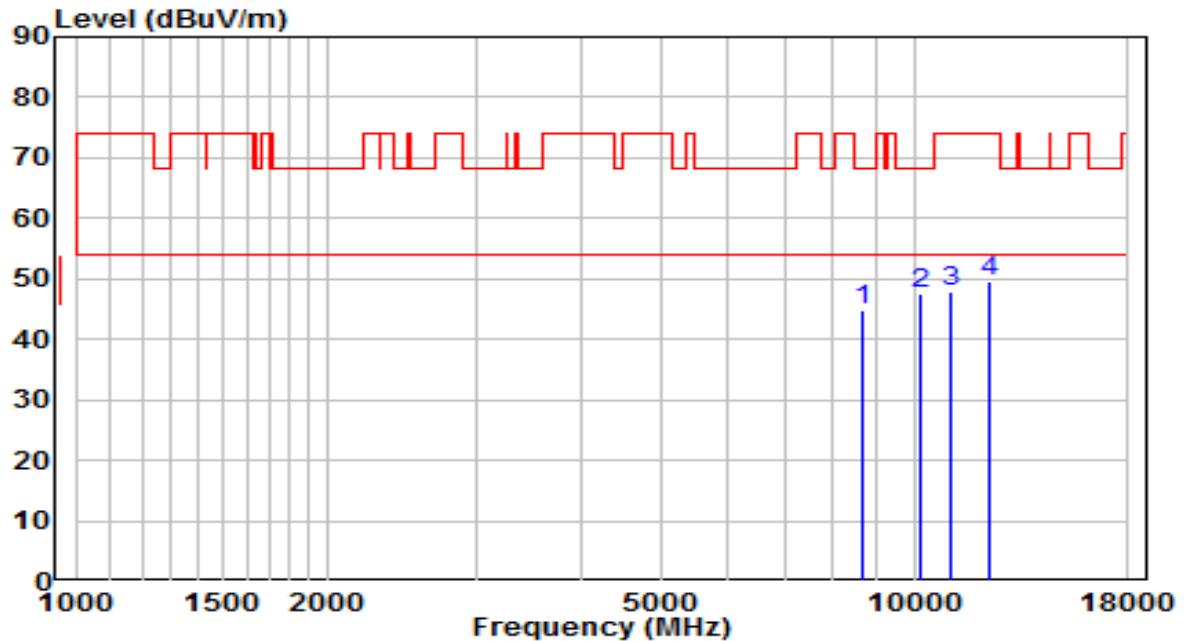


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8701.000	30.78	14.15	44.93	-23.27	68.20	Peak
2	* 10180.000	30.17	17.28	47.45	-20.75	68.20	Peak
3	11055.500	28.64	19.37	48.01	-25.99	74.00	Peak
4	12271.000	31.00	18.64	49.64	-24.36	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5700MHz	Test Voltage	AC 120V/60Hz

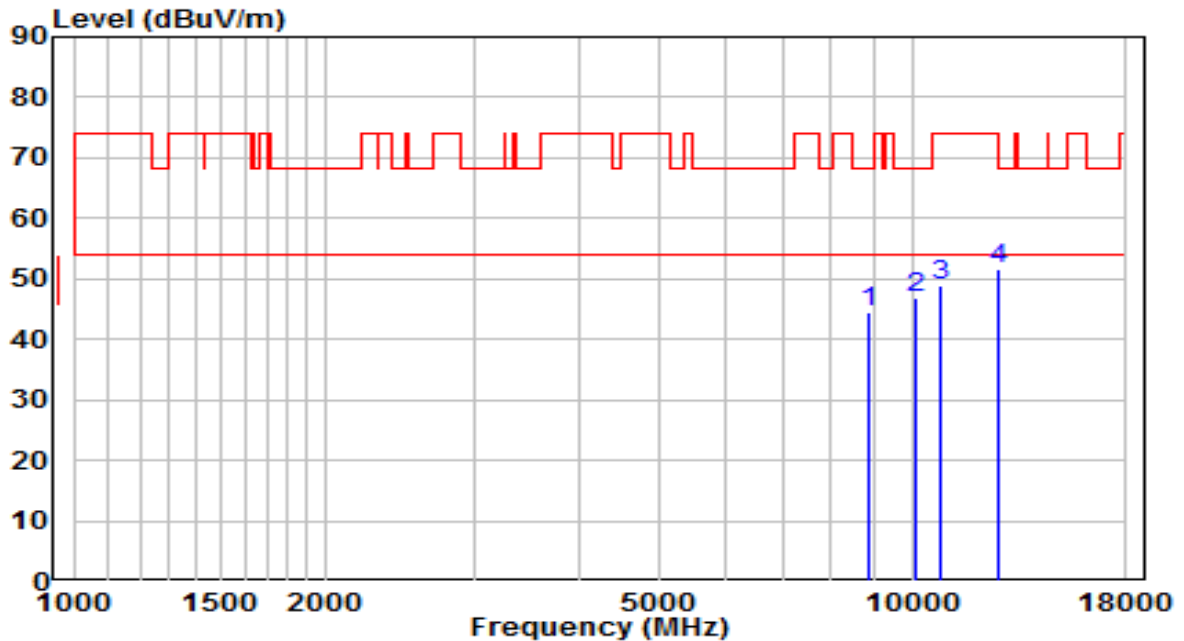


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8871.000	29.99	14.56	44.56	-23.64	68.20	Peak
2	*	10095.000	29.99	16.94	46.93	-21.27	68.20	Peak
3		10817.500	29.80	19.02	48.82	-25.18	74.00	Peak
4		12670.500	32.84	18.91	51.75	-22.25	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

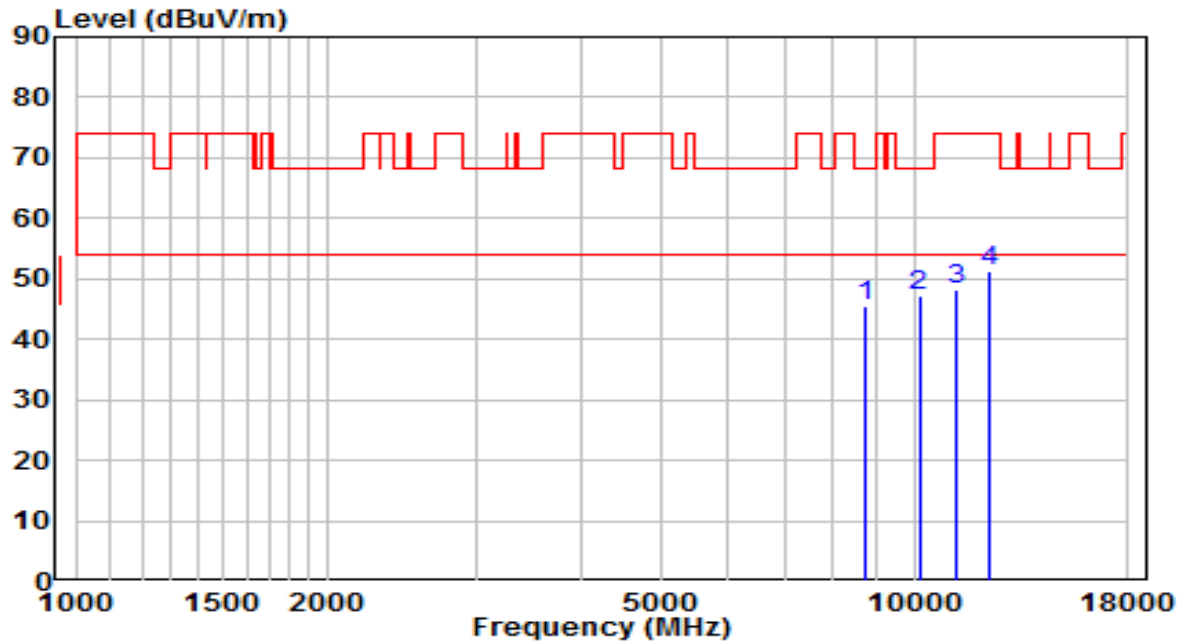


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8752.000	31.20	14.27	45.47	-22.73	68.20	Peak
2	*	10137.500	29.99	17.11	47.10	-21.10	68.20	Peak
3		11200.000	28.63	19.59	48.21	-25.79	74.00	Peak
4		12288.000	32.56	18.62	51.18	-22.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5720MHz	Test Voltage	AC 120V/60Hz

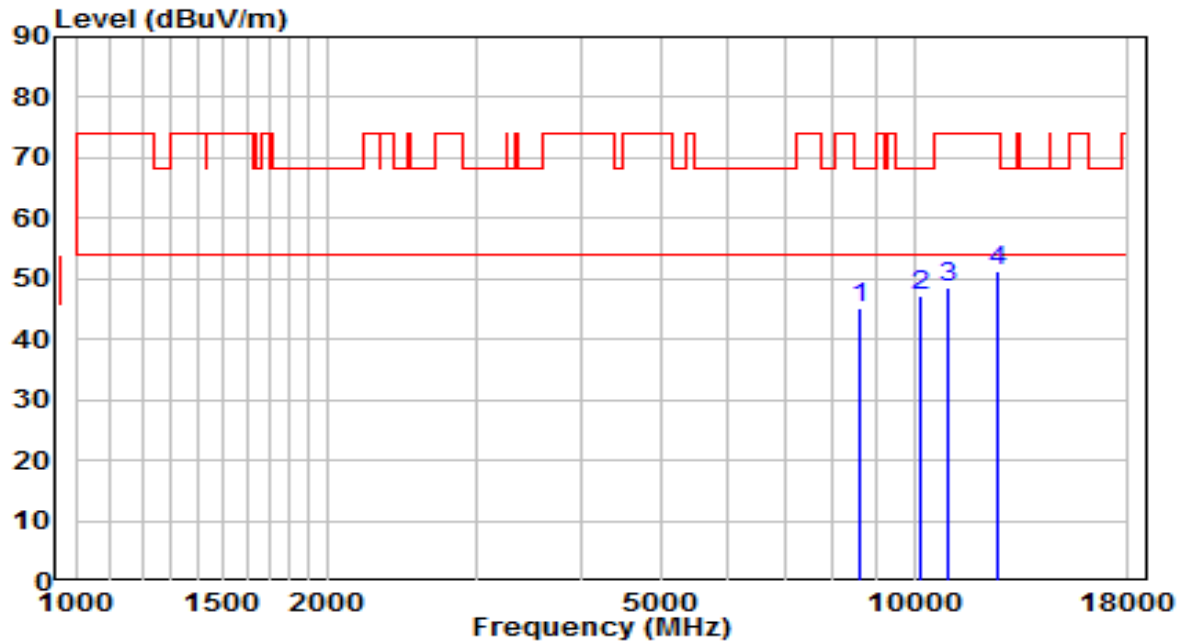


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8624.500	31.06	13.96	45.02	-23.18	68.20	Peak
2	* 10171.500	29.85	17.25	47.10	-21.10	68.20	Peak
3	10979.000	29.19	19.25	48.44	-25.56	74.00	Peak
4	12543.000	32.73	18.53	51.27	-22.73	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

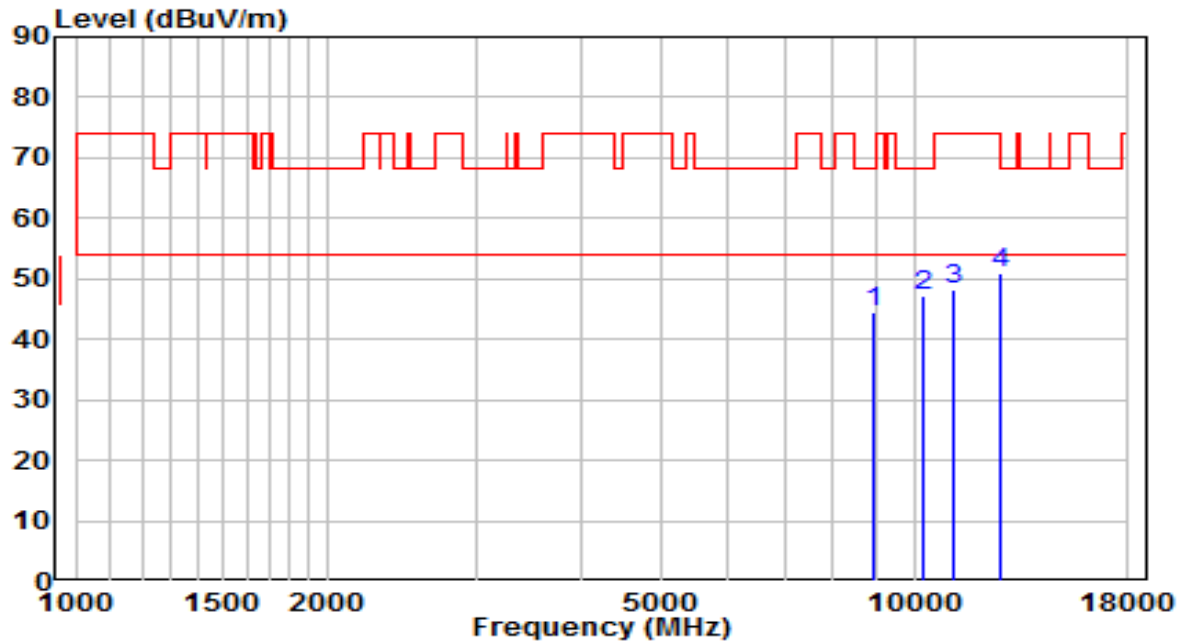


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8939.000	29.84	14.73	44.57	-23.63	68.20	Peak
2	* 10248.000	29.73	17.56	47.29	-20.91	68.20	Peak
3	11106.500	28.71	19.44	48.15	-25.85	74.00	Peak
4	12636.500	32.27	18.81	51.08	-22.92	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5745MHz	Test Voltage	AC 120V/60Hz

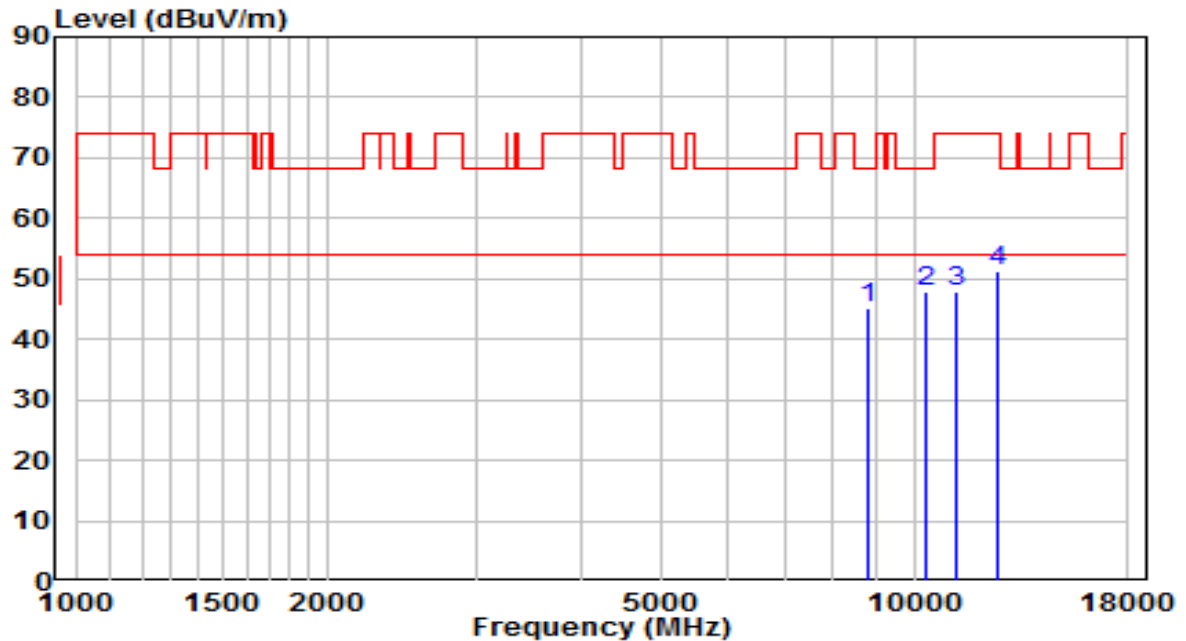


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8820.000	30.73	14.44	45.17	-23.03	68.20	Peak
2	* 10333.000	29.88	17.90	47.78	-20.42	68.20	Peak
3	11217.000	28.13	19.61	47.74	-26.26	74.00	Peak
4	12619.500	32.55	18.76	51.31	-22.69	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

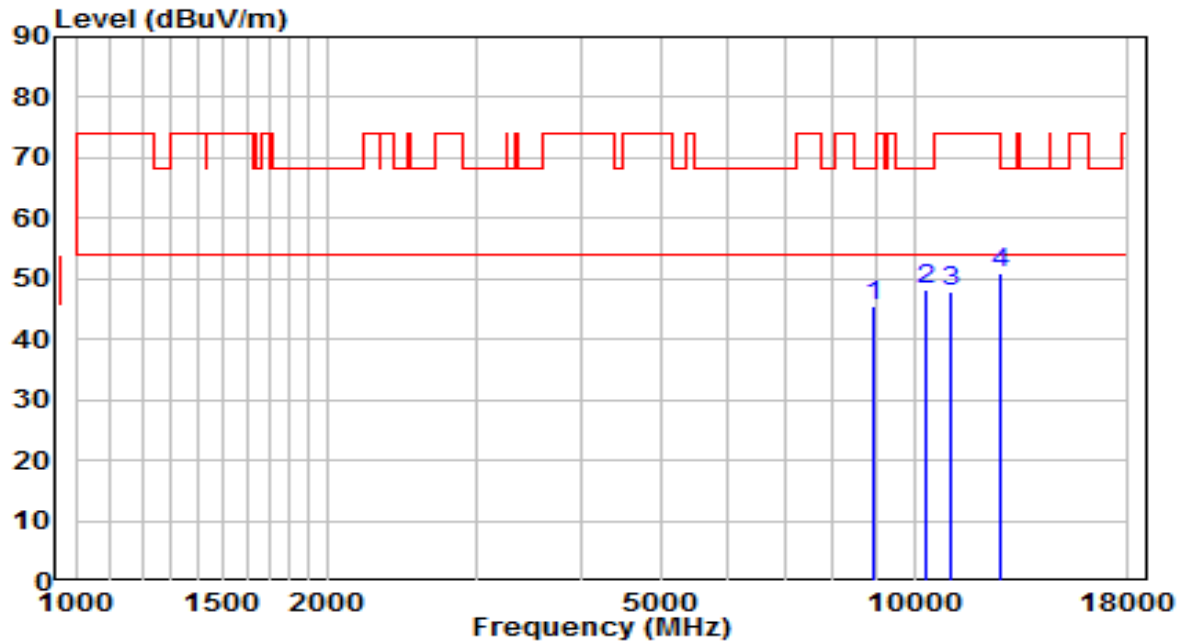


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8947.500	30.69	14.75	45.44	-22.76	68.20	Peak
2	* 10367.000	30.08	18.04	48.12	-20.08	68.20	Peak
3	11064.000	28.38	19.38	47.76	-26.24	74.00	Peak
4	12628.000	32.02	18.79	50.81	-23.19	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5785MHz	Test Voltage	AC 120V/60Hz

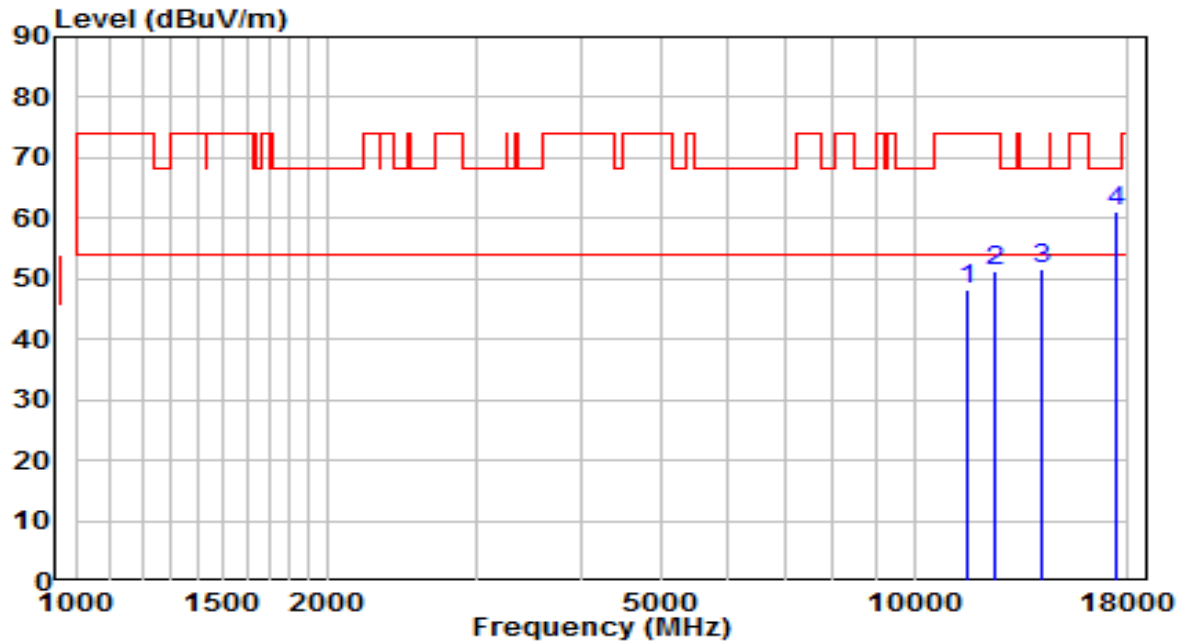


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11557.000	28.19	19.92	48.11	-25.89	74.00	Peak
2	12517.500	32.73	18.46	51.19	-22.81	74.00	Peak
3	14243.000	29.33	22.44	51.76	-16.44	68.20	Peak
4	* 17362.500	34.29	26.92	61.21	-6.99	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

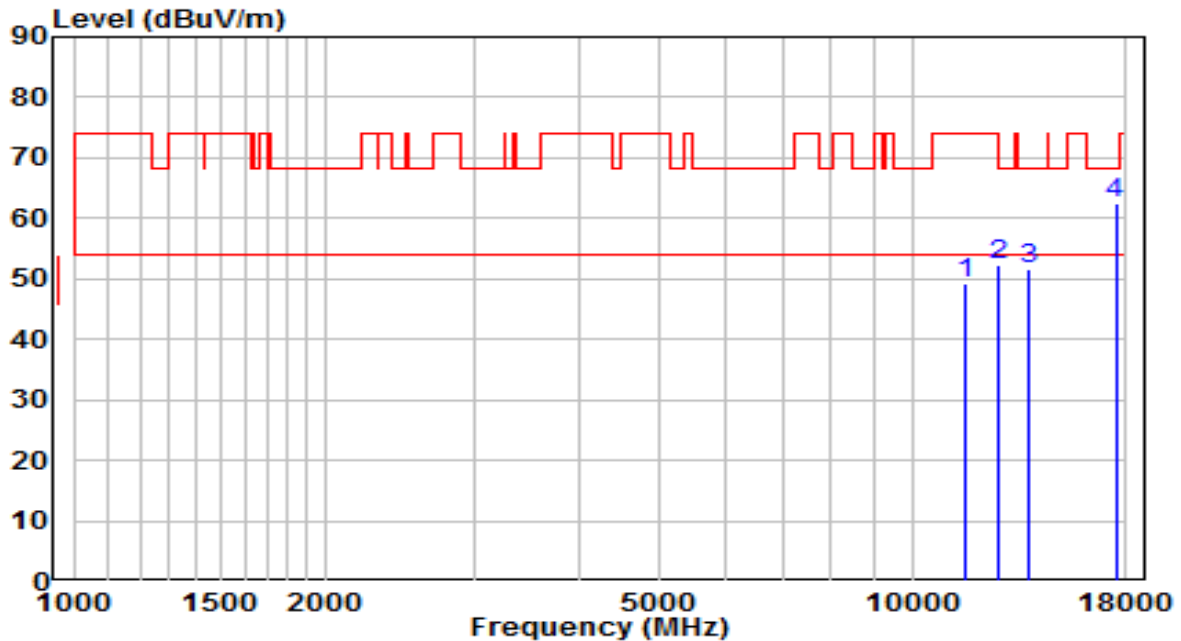


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	11565.500	29.34	19.90	49.24	-24.76	74.00	Peak
2	12662.000	33.36	18.89	52.25	-21.75	74.00	Peak
3	13741.500	29.52	22.13	51.65	-16.55	68.20	Peak
4	* 17481.500	34.69	27.72	62.41	-5.79	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 5825MHz	Test Voltage	AC 120V/60Hz

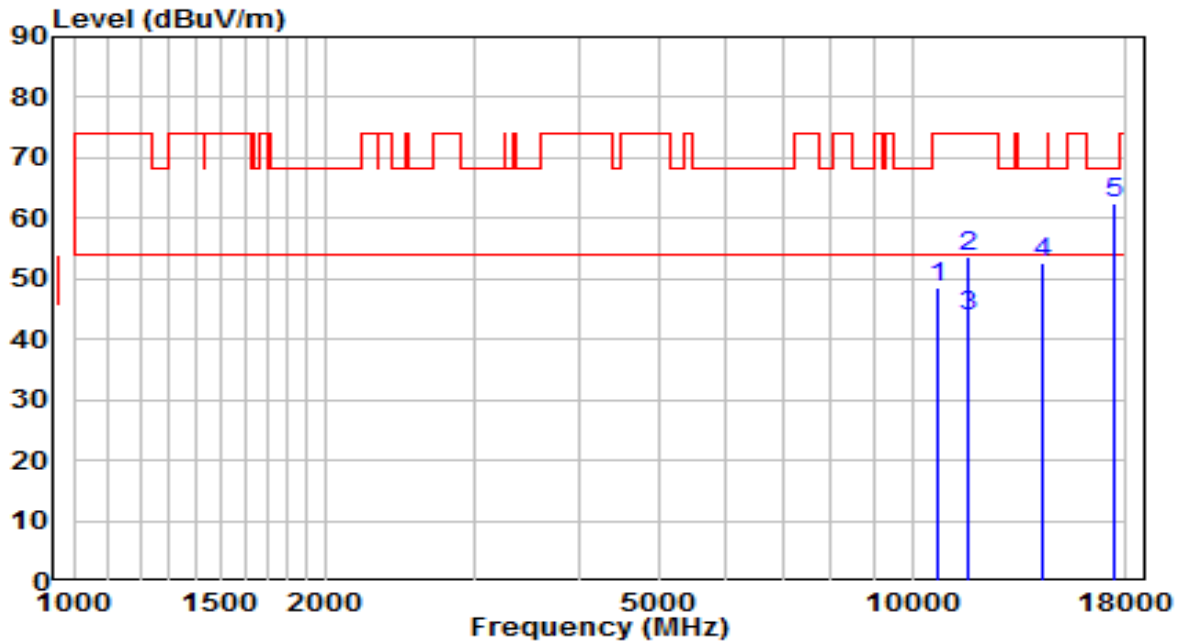


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	10749.500	29.59	18.92	48.51	-25.49	74.00	Peak
2	11659.000	33.89	19.69	53.58	-20.42	74.00	Peak
3	11659.000	24.12	19.69	43.81	-10.19	54.00	Average
4	14260.000	30.20	22.44	52.64	-15.56	68.20	Peak
5	* 17473.000	34.76	27.66	62.42	-5.78	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

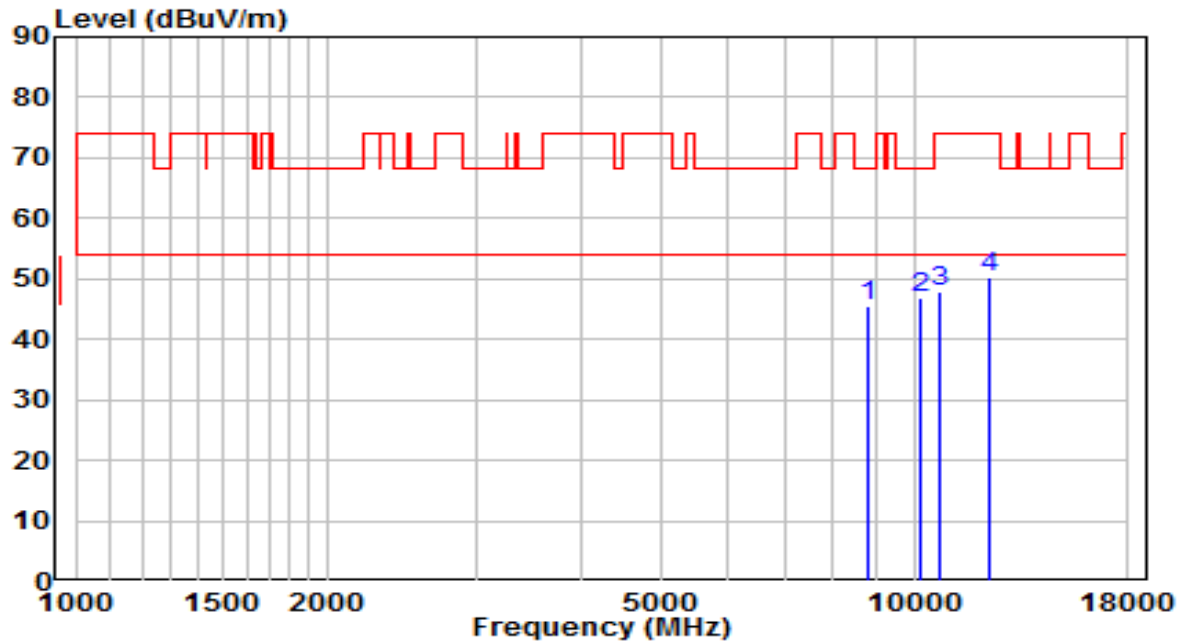


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8786.000	31.32	14.36	45.68	-22.52	68.20	Peak
2	*	10180.000	29.68	17.28	46.97	-21.23	68.20	Peak
3		10749.500	29.01	18.92	47.93	-26.07	74.00	Peak
4		12262.500	31.54	18.65	50.18	-23.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5190MHz	Test Voltage	AC 120V/60Hz

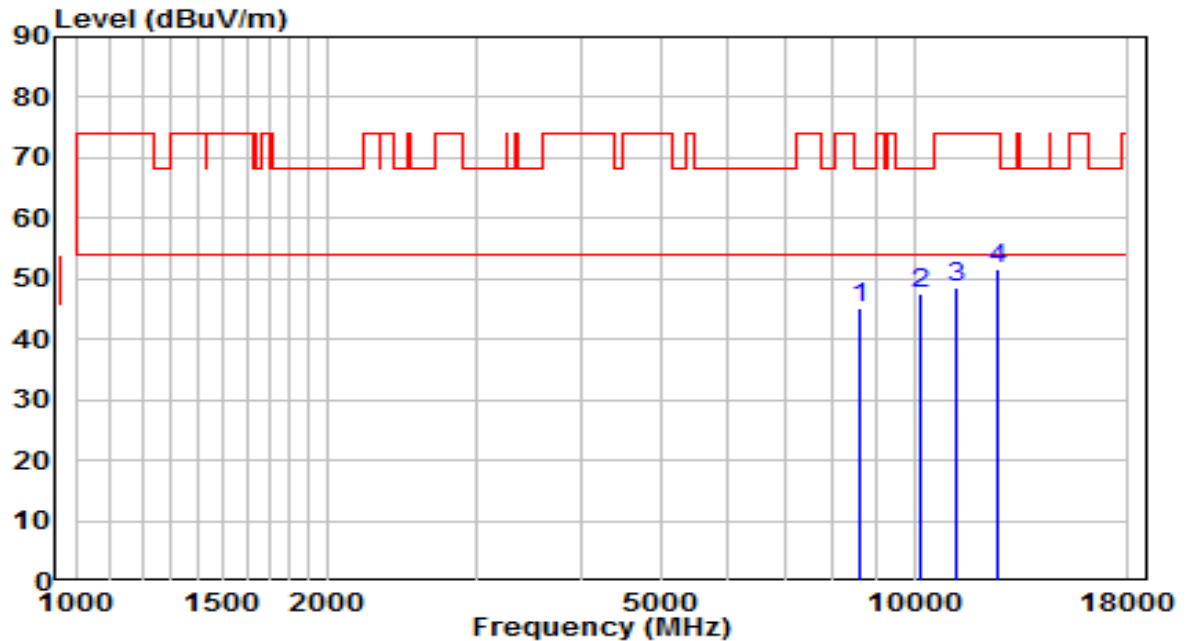


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8641.500	31.01	14.00	45.01	-23.19	68.20	Peak
2	*	10205.500	30.02	17.39	47.41	-20.79	68.20	Peak
3		11191.500	28.83	19.57	48.40	-25.60	74.00	Peak
4		12619.500	32.83	18.76	51.59	-22.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

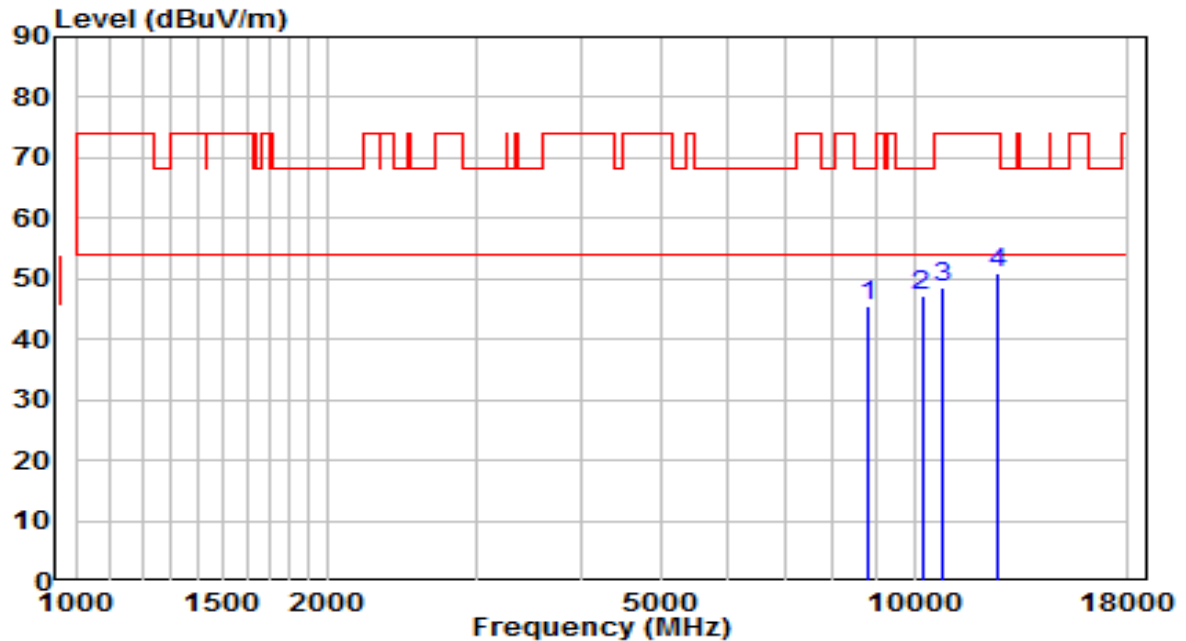


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8820.000	30.95	14.44	45.39	-22.81	68.20	Peak
2	*	10214.000	29.67	17.42	47.09	-21.11	68.20	Peak
3		10775.000	29.71	18.96	48.67	-25.33	74.00	Peak
4		12611.000	32.25	18.73	50.98	-23.02	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5230MHz	Test Voltage	AC 120V/60Hz

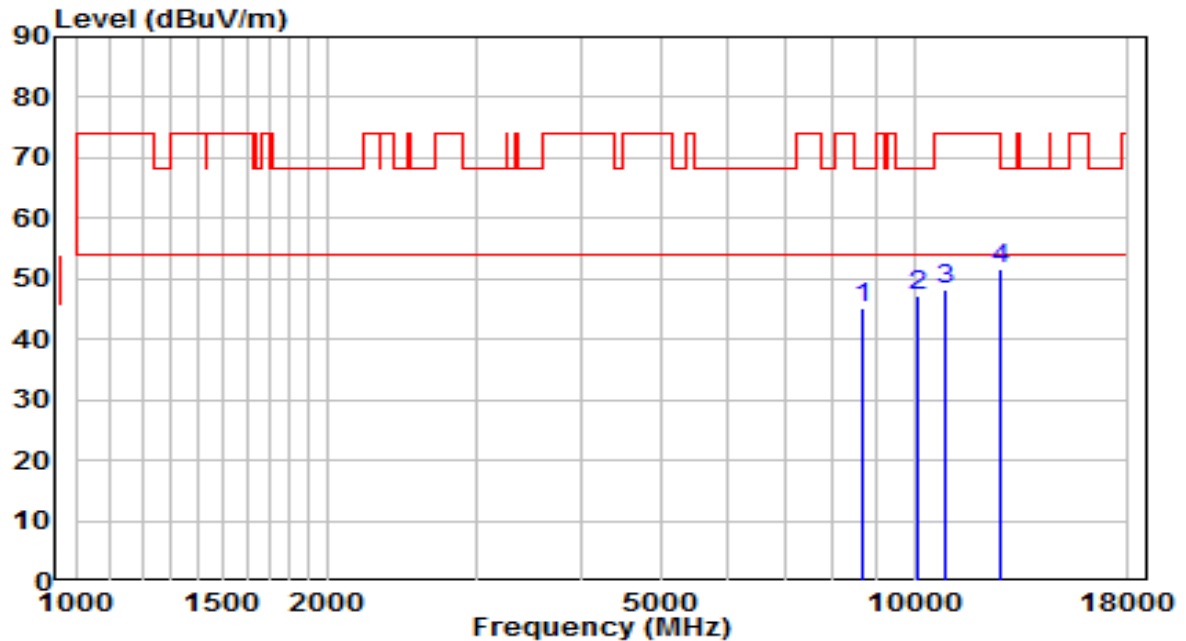


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8675.500	31.07	14.08	45.15	-23.05	68.20	Peak
2	*	10112.000	30.26	17.01	47.27	-20.93	68.20	Peak
3		10860.000	29.11	19.08	48.19	-25.81	74.00	Peak
4		12628.000	32.74	18.79	51.52	-22.48	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

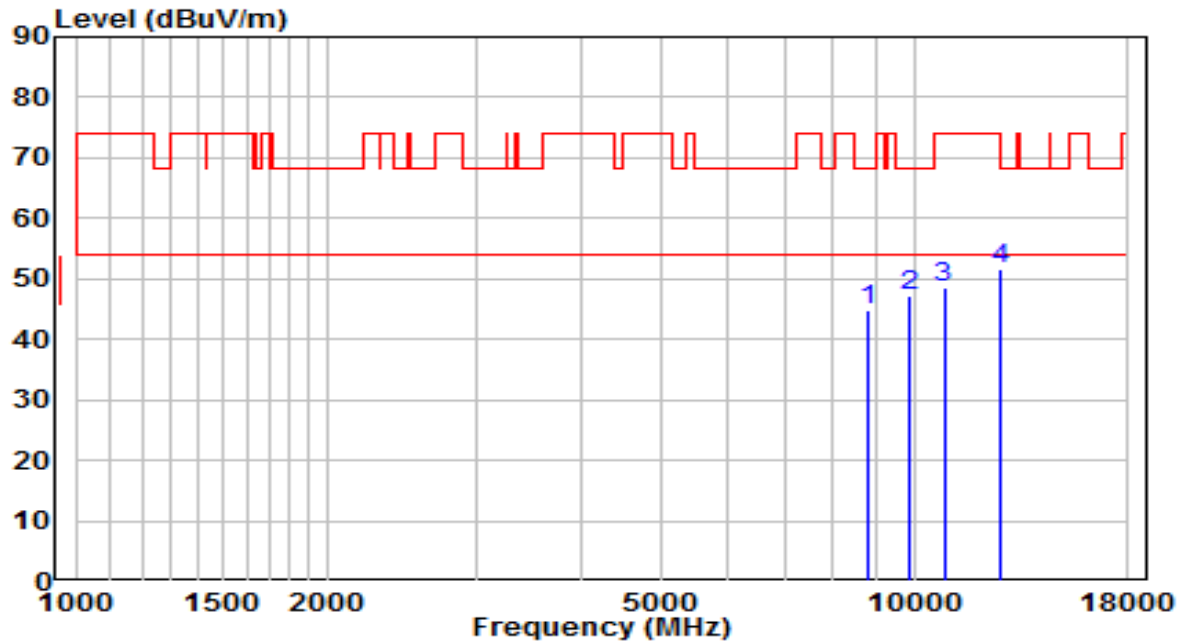


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8837.000	30.33	14.48	44.81	-23.39	68.20	Peak
2	*	9899.500	30.76	16.39	47.15	-21.05	68.20	Peak
3		10851.500	29.48	19.07	48.55	-25.45	74.00	Peak
4		12636.500	32.81	18.81	51.62	-22.38	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5270MHz	Test Voltage	AC 120V/60Hz

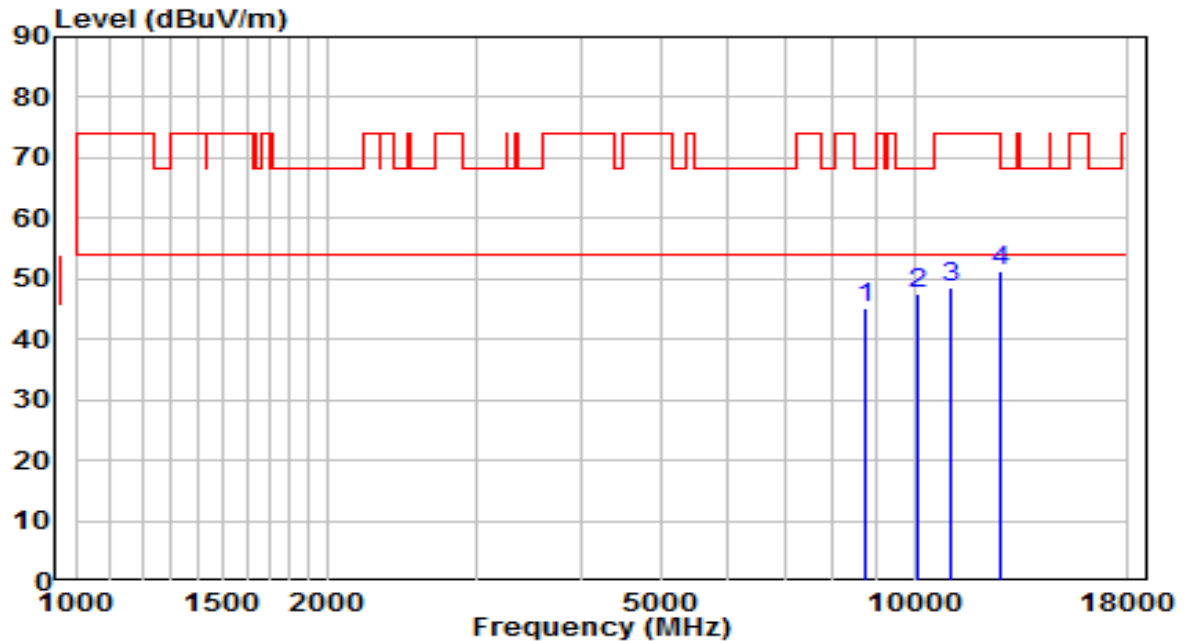


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8760.500	30.73	14.29	45.02	-23.18	68.20	Peak
2	*	10078.000	30.59	16.87	47.46	-20.74	68.20	Peak
3		11030.000	29.32	19.33	48.65	-25.35	74.00	Peak
4		12653.500	32.42	18.86	51.28	-22.72	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

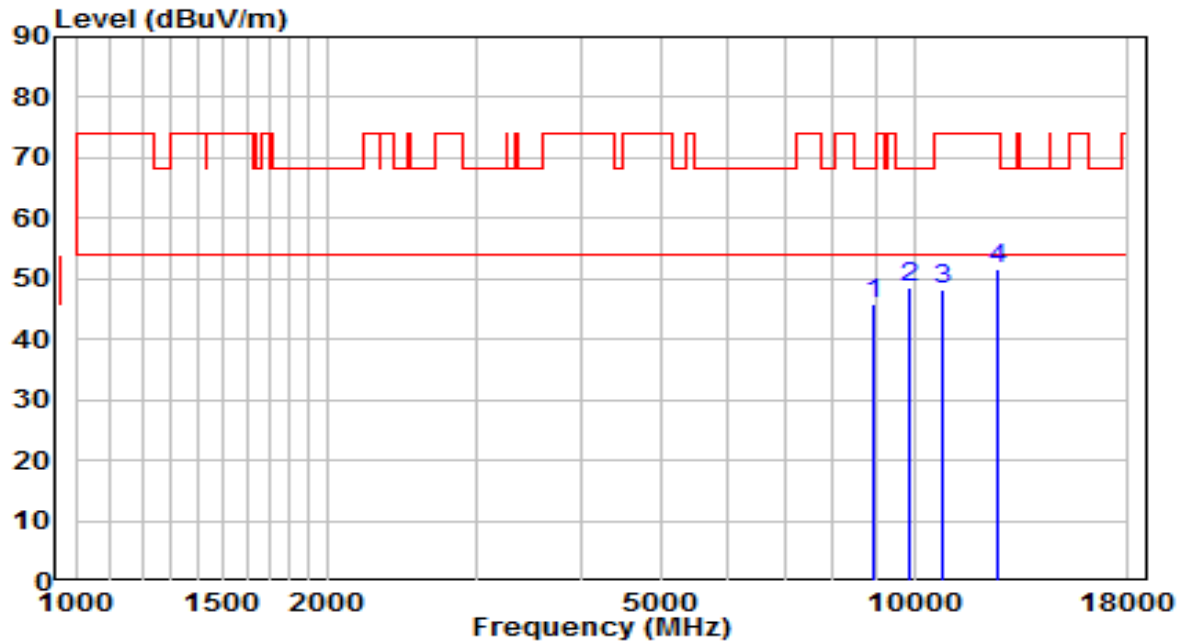


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8930.500	31.30	14.71	46.01	-22.19	68.20	Peak
2	*	9857.000	32.28	16.32	48.60	-19.60	68.20	Peak
3		10826.000	29.19	19.03	48.22	-25.78	74.00	Peak
4		12577.000	33.03	18.63	51.66	-22.34	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5310MHz	Test Voltage	AC 120V/60Hz

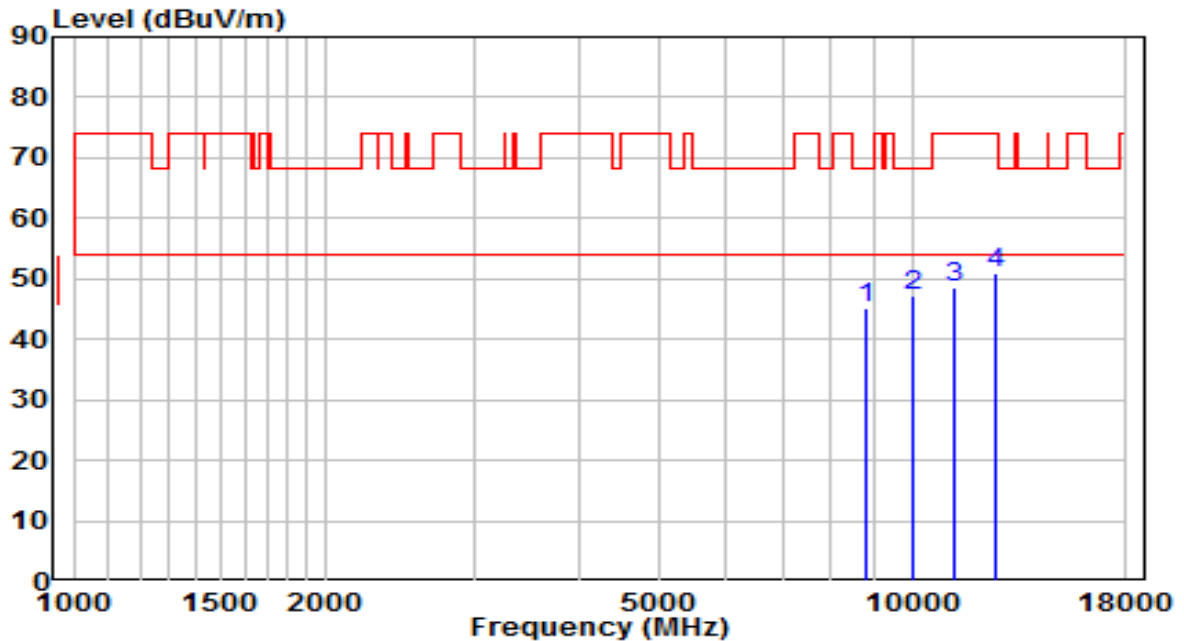


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8786.000	30.85	14.36	45.20	-23.00	68.20	Peak
2	*	10001.500	30.53	16.57	47.09	-21.11	68.20	Peak
3		11208.500	28.91	19.60	48.51	-25.49	74.00	Peak
4		12602.500	32.24	18.71	50.95	-23.05	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

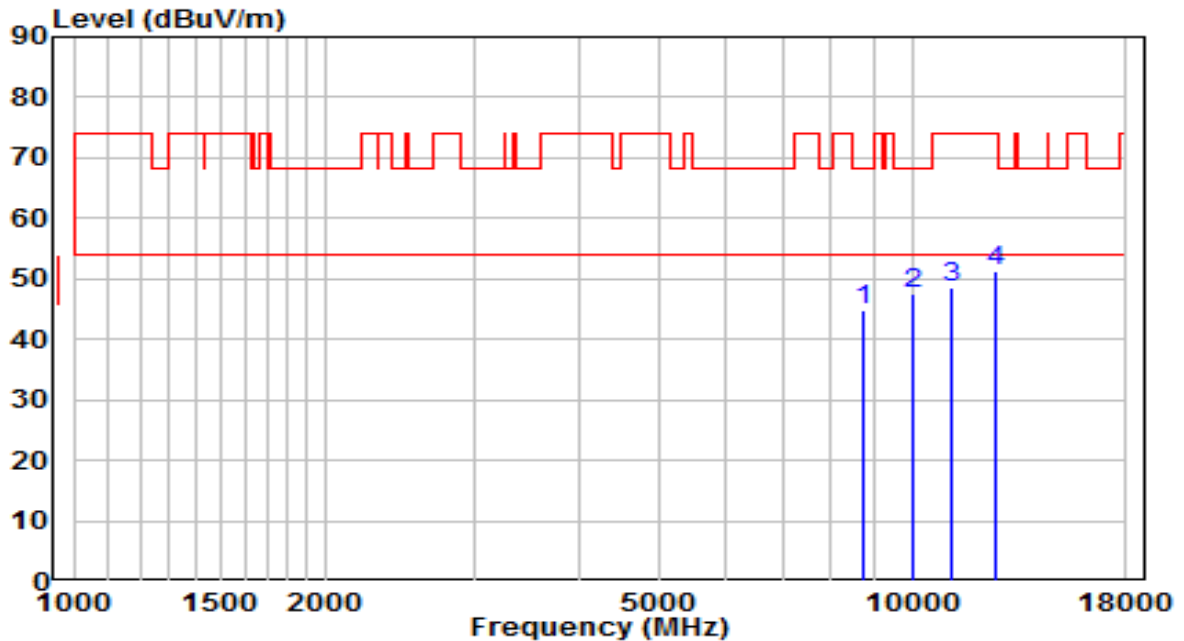


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8735.000	30.58	14.23	44.81	-23.39	68.20	Peak
2	* 10001.500	31.03	16.57	47.60	-20.60	68.20	Peak
3	11123.500	29.03	19.47	48.50	-25.50	74.00	Peak
4	12551.500	32.76	18.56	51.32	-22.68	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5510MHz	Test Voltage	AC 120V/60Hz

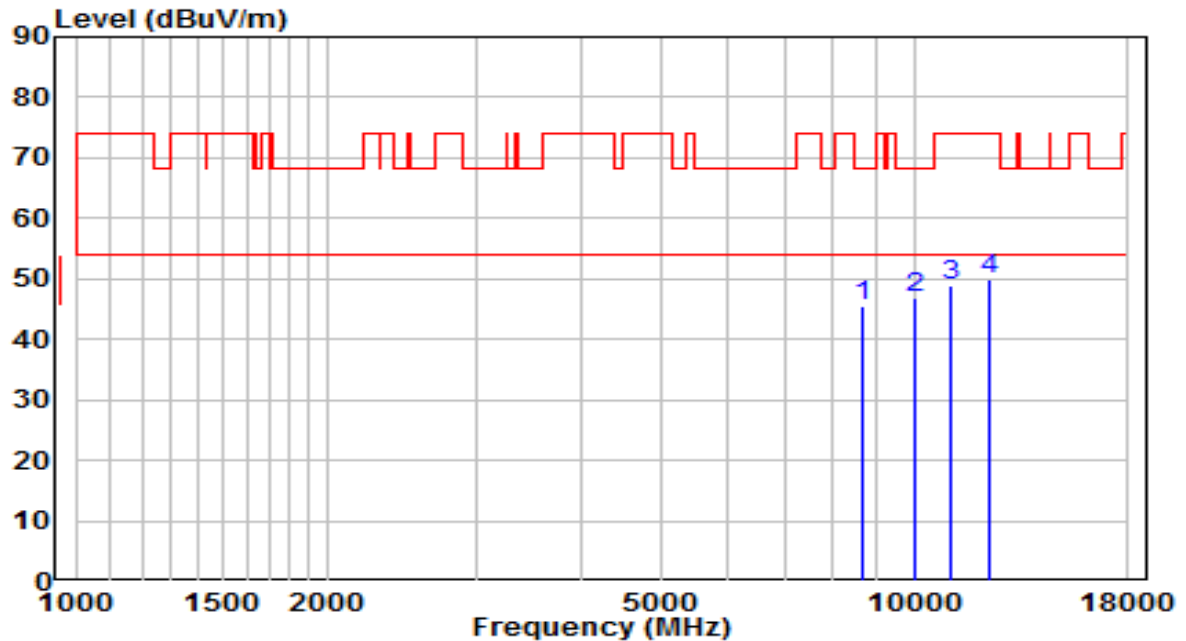


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8709.500	31.45	14.17	45.62	-22.58	68.20	Peak
2	*	10027.000	30.23	16.67	46.89	-21.31	68.20	Peak
3		11072.500	29.63	19.39	49.02	-24.98	74.00	Peak
4		12262.500	31.44	18.65	50.09	-23.91	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

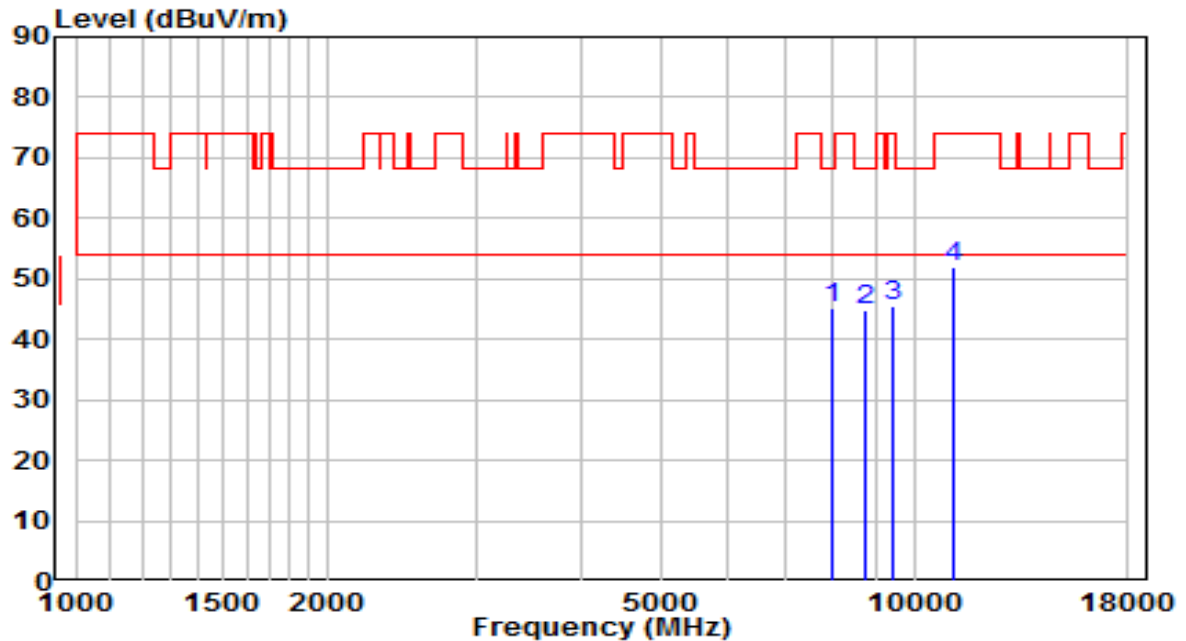


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	7987.000	31.76	13.42	45.18	-23.02	68.20	Peak
2	8760.500	30.61	14.29	44.91	-23.29	68.20	Peak
3	9423.500	29.99	15.59	45.58	-28.42	74.00	Peak
4	* 11106.500	32.65	19.44	52.10	-21.90	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5550MHz	Test Voltage	AC 120V/60Hz

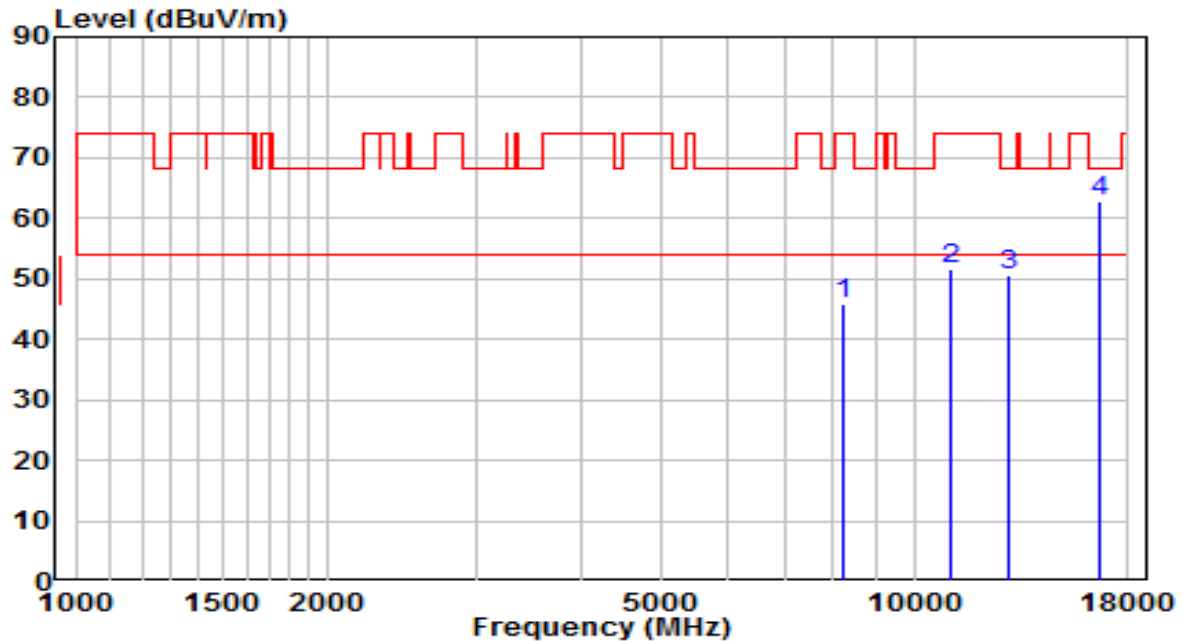


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8242.000	32.27	13.54	45.81	-28.19	74.00	Peak
2	11098.000	32.03	19.43	51.46	-22.54	74.00	Peak
3	12985.000	30.61	19.85	50.46	-17.74	68.20	Peak
4	* 16648.500	40.49	22.23	62.72	-5.48	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

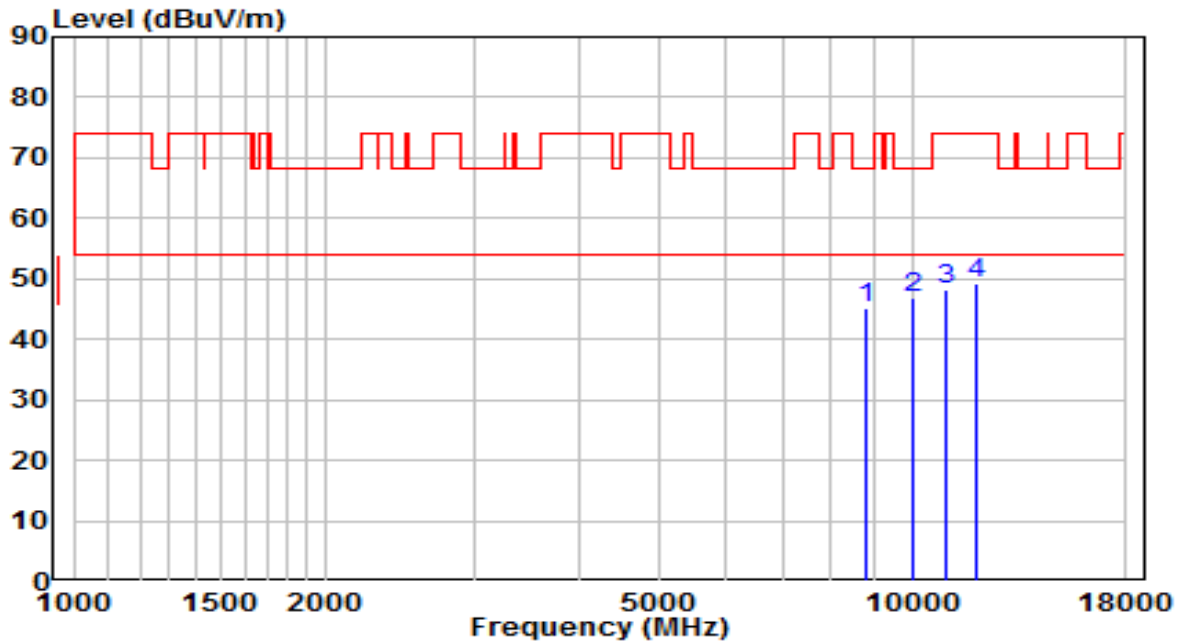


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8820.000	30.85	14.44	45.29	-22.91	68.20	Peak
2	*	10010.000	30.18	16.60	46.78	-21.42	68.20	Peak
3		10962.000	29.06	19.23	48.29	-25.71	74.00	Peak
4		11914.000	30.07	19.11	49.18	-24.82	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5670MHz	Test Voltage	AC 120V/60Hz

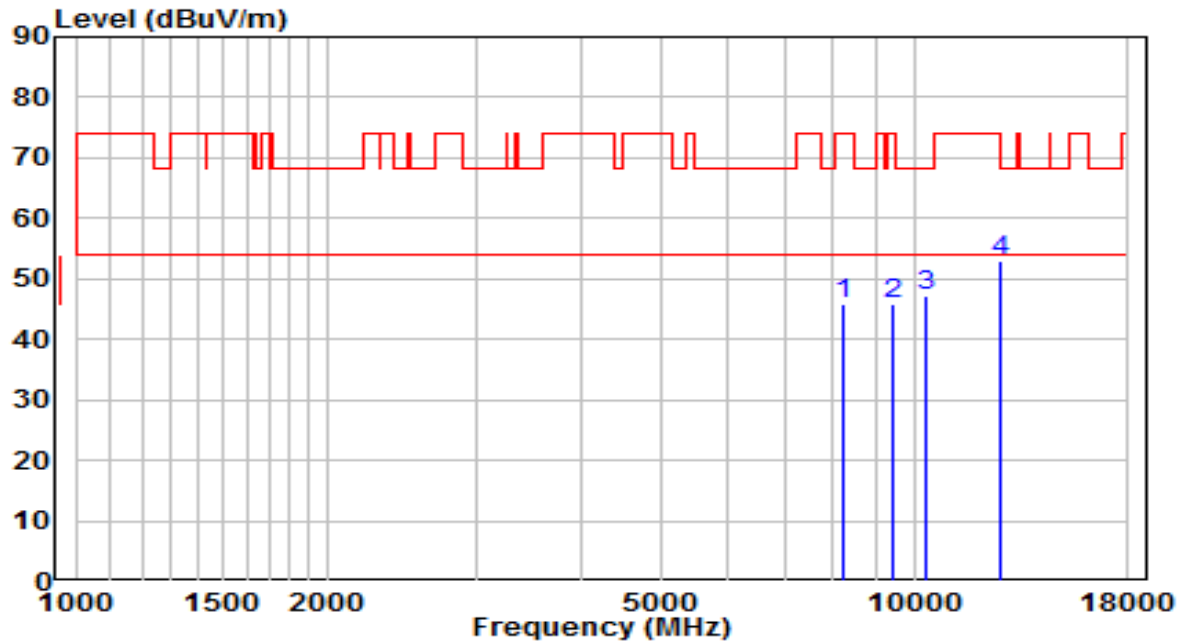


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	8233.500	32.16	13.54	45.70	-28.30	74.00	Peak
2	9449.000	30.23	15.63	45.86	-28.14	74.00	Peak
3	10316.000	29.31	17.83	47.14	-21.06	68.20	Peak
4	* 12704.500	34.06	19.01	53.08	-15.12	68.20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

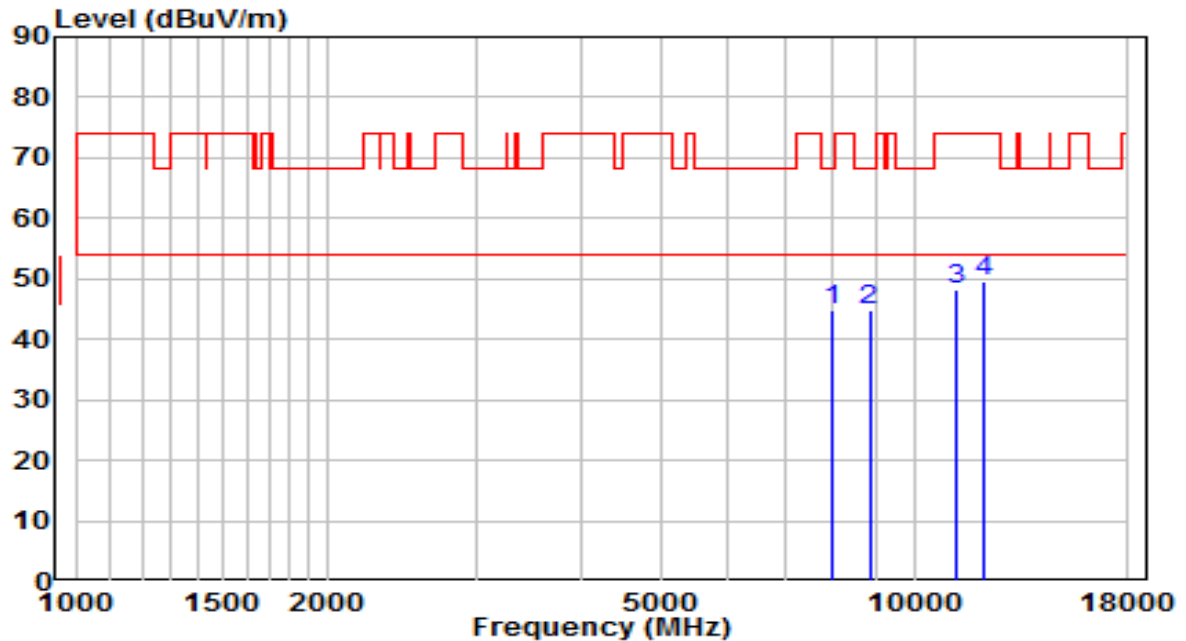


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1	*	7970.000	31.48	13.41	44.89	-23.31	68.20	Peak
2		8845.500	30.31	14.50	44.82	-23.38	68.20	Peak
3		11200.000	28.70	19.59	48.29	-25.71	74.00	Peak
4		12135.000	30.88	18.78	49.66	-24.34	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5710MHz	Test Voltage	AC 120V/60Hz

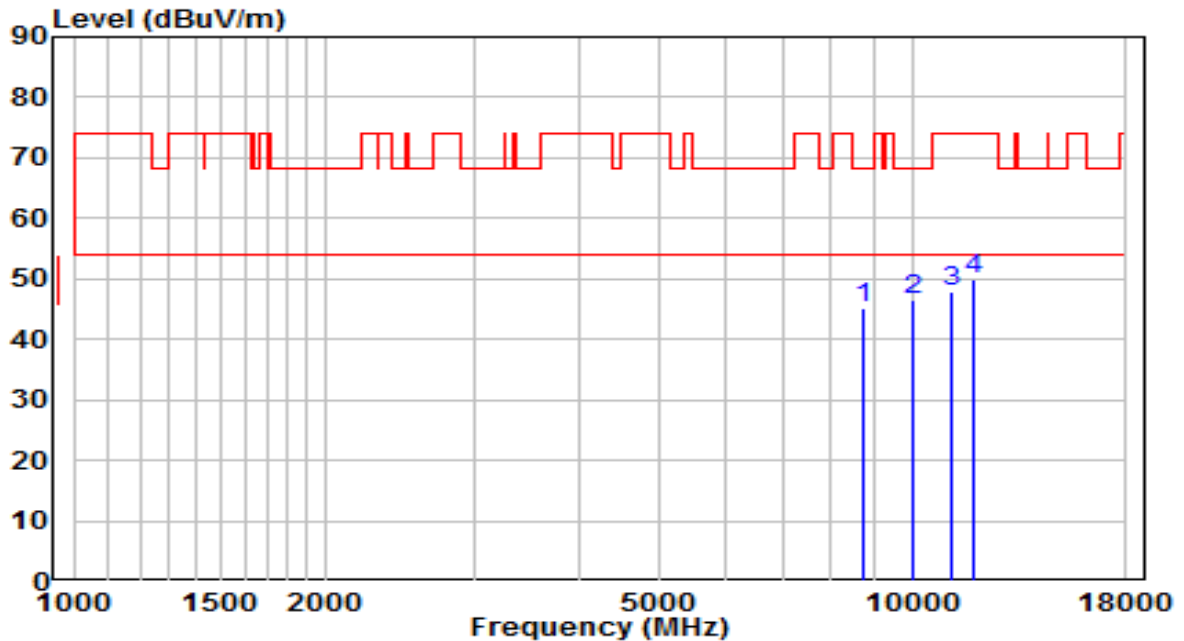


No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8718.000	31.13	14.19	45.32	-22.88	68.20	Peak
2	*	10035.500	29.82	16.70	46.52	-21.68	68.20	Peak
3		11115.000	28.35	19.46	47.81	-26.19	74.00	Peak
4		11820.500	30.55	19.33	49.88	-24.12	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).

EUT	HAN Access Point	Date of Test	2021-09-24
Factor	BBHA 9120D (1GHz~18GHz)	Temp. / Humidity	25.4°C/42%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 5755MHz	Test Voltage	AC 120V/60Hz

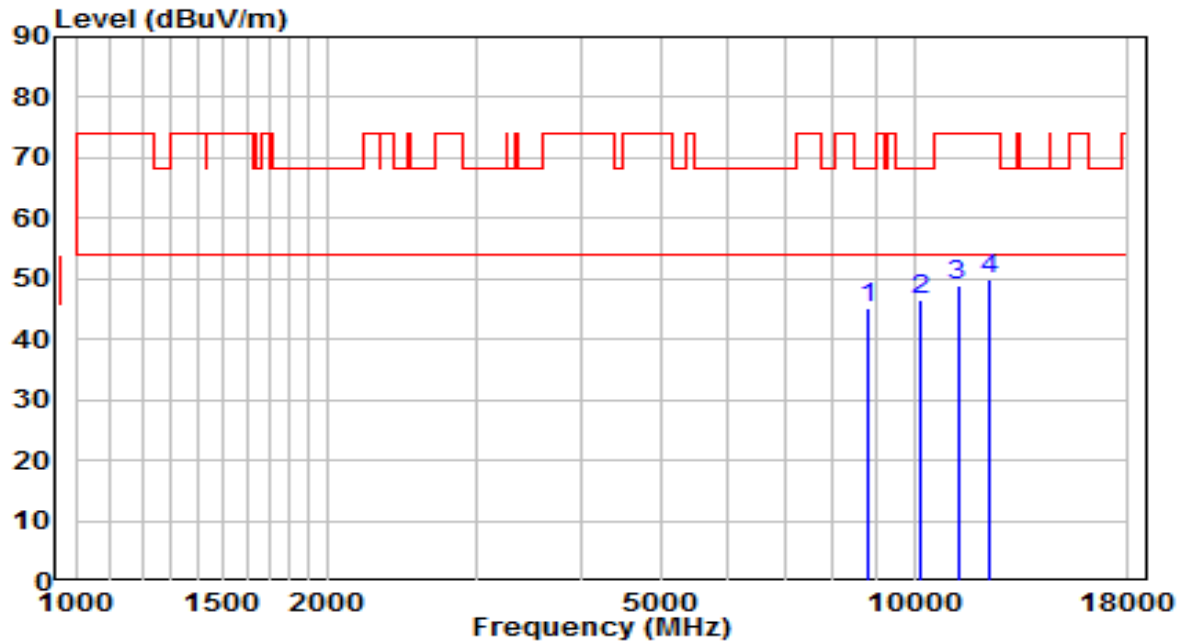

No		Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Remark (QP/PK/AV)
1		8794.500	30.78	14.38	45.16	-23.04	68.20	Peak
2	*	10205.500	29.27	17.39	46.65	-21.55	68.20	Peak
3		11268.000	29.13	19.69	48.83	-25.17	74.00	Peak
4		12271.000	31.38	18.64	50.02	-23.98	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (Correction Factor).