

# **FCC Part 15C Test Report**

**FCC ID: 2ALOSE7** 

Product Name:	Wireless Headset
Trademark:	hoco.
Model Name :	E7
Serial Model:	Please refer to page 6.
Prepared For :	Haoku Technology Development(SHENZHEN)Co.,Ltd
Address :	Room 408,4F,Building A,Weidonglong Business Building,Meilong Road,Longhua New District,Shenzhen City,P.R.China
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101, Yousong Road, Longhua New District, Shenzhen, China
Test Date:	Mar. 21 -Apr. 01, 2017
Date of Report :	Apr. 01, 2017
Report No.:	BCTC-FY170301512-2E

Report No.: BCTC-170301512-2E



# **VERIFICATION OF COMPLIANCE**

	<ul> <li>Haoku Technology Development(SHENZHEN)Co.,Ltd</li> <li>Room 408,4F,Building A,Weidonglong Business</li> <li>Building,Meilong Road,Longhua New District,Shenzhen</li> <li>City,P.R.China</li> </ul>			
	Haoku Technology Development(SHENZHEN)Co.,Ltd Room 408,4F,Building A,Weidonglong Business Building,Meilong Road,Longhua New District,Shenzhen City,P.R.China			
Product description	•			
Product name:	Wireless Headset			
Trademark:	hoco.			
Model Name:	E7			
Standards:	ANSI C63.10-2013 FCC Part15.249			
	s been tested by BCTC, and the test results show that the n compliance with the FCC requirements. And it is applicable only the report.			
document may be altered or rev the document.	ced except in full, without the written approval of BCTC, this ised by BCTC, personal only, and shall be noted in the revision of			
Test Result	Pass			
Testing Engineer	Frie Yang			
	Eric Yang			
Reviewer (Supervisor)	Fade Jang			
	Jade Yang			
Approved &	0 4 1 9			

Authorized
Signer(Manager)

Carson Zhang

to

Report No.: BCTC-170301512-2E



Shenzhen BCTC Technology Co., Ltd. Report No.: BCTC-170301512-2E

Table of C	Contents	Page
1 . SUN	MMARY OF TEST RESULTS	5
1.1 7	TEST FACILITY	5
1.2 N	MEASUREMENT UNCERTAINTY	5
2 . GEN	NERAL INFORMATION	6
2.1 (	GENERAL DESCRIPTION OF EUT	6
2.2 [	DESCRIPTION OF TEST MODES	7
2.3 1	TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	7
2.4 E	BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	D 8
2.5 [	DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.6 E	EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC	C EMISSION TEST	11
3.1 3 3 3 3 3.2 F 3 3 3	CONDUCTED EMISSION MEASUREMENT 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 3.1.2 TEST PROCEDURE 3.1.3 DEVIATION FROM TEST STANDARD 3.1.4 TEST SETUP 3.1.5 EUT OPERATING CONDITIONS 3.1.6 TEST RESULTS RADIATED EMISSION MEASUREMENT 3.2.1 RADIATED EMISSION LIMITS 3.2.2 TEST PROCEDURE 3.2.3 DEVIATION FROM TEST STANDARD 3.2.4 TEST SETUP 3.2.5 EUT OPERATING CONDITIONS 3.2.6 TEST RESULTS	11 11 12 12 12 13 15 16 17 18 19 20
	NDWIDTH TEST	25
4.1 /	APPLIED PROCEDURES / LIMIT	25
=	1.1.1 TEST PROCEDURE	25
	1.1.2 DEVIATION FROM STANDARD	25
	I.1.3 TEST SETUP I.1.4 EUT OPERATION CONDITIONS	25 25
	1.1.5 TEST RESULTS	26
	KHZ BANDWIDTH OF FREQUENCY BAND EDGE	28 29



Shenzhen BCTC Technology Co., Ltd. Report No.: BCTC-170301512-2E

Table of Contents	Page
5.2 TEST SETUP	29
5.3 EUT OPERATION CONDITIONS	29
5.4 TEST RESULTS	29
6 . ANTENNA REQUIREMENT	32
6.1 STANDARD REQUIREMENT	32
6.2 EUT ANTENNA	32
7 . EUT TEST PHOTO	33
8 PHOTOS OF THE FUT	35



### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C				
Standard Section	Test Item	Judgment	Remark	
15.207	Conducted Emission	PASS		
15.249	Fundamental &Radiated Spurious Emission Measurement	PASS		
15.249	Bandwidth	PASS		
15.205	Band Edge Emission	PASS		
15.203	Antenna Requirement	PASS		

#### NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registration No.:187086

#### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately 95 %  $^{\circ}$ 

No.	Item	Uncertainty
1	Conducted Emission Test	±1.38dB
2	RF power,conducted	±0.16dB
3	Spurious emissions,conducted	±0.21dB
4	All emissions,radiated(<1G)	±4.68dB
5	All emissions,radiated(>1G)	±4.89dB
6	Temperature	±0.5°C
7	Humidity	±2%



# 2. GENERAL INFORMATION

# 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Headset			
Trade Name	hoco.			
Model Name	E7			
Serial Model	EPB03,EPB04,EPB05,E1,E2, E3, E4, E5, E6, E8, E9, E10, E11, E12, E13, E14, E15, E16, E17, E18, E19, E20, E21, E22, E23, E24, E25, ES1, ES2, ES3, ES4, ES5, ES6, ES7, ES8, ES9, ES10, ES11, ES12, ES13, ES14, ES15, ES16, ES17, ES18, ES19, ES20, W1, W2, W3, W4, W5, W6, W7, W8, W9, W10, W11, W12, W13, W14, W15, BE1, BE2, BE3, BE4, BE5, BE6, BE7, BE8, BE9, BE10, BE11, BE12, BE13, BE14, B15, BE16, BE17, BE18, BE19, BE20, BC1, BC2, BC3, BC4, BC5, BC6, BC7, BC8, BC9, BC10, BC11, BC12, BC13, BC14, BC15, BW1, BW2, BW3, BW4, BW5, BW6, BW7, BW8, BW9, BW10			
Model Difference	All the model are the same model names.	ame circuit and RF module,except		
Product Description	Operation Frequency: 2402~2480 MHz  Modulation Type: GFSK  Bit Rate of Transmitter 2M  Number Of Channel 40 CH  Antenna Designation: Please see Note 3.  Based on the application, features, or specification exhibite User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please to the User's Manual.			
Channel List	Please refer to the Note 2			
Battery	Model: A8A-501000  AC Power Input: 100-240V~ 50/60Hz 0.2A  Output: 5V 1000mA			
Connecting I/O Port(s)	Please refer to the User's Manual			
hardware version				
Software version				
Serial number				



#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2

	Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
01	2402	11	2422	21	2442	
02	2404	12	2424	22	2444	
03	2406	13	2426	23	2446	
~	~	~	~	~	~	
09	2418	19	2438	39	2478	
10	2420	20	2440	40	2480	

#### 3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	Chip Antenna	2dBi	N/A

#### 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Conducted & Radiated Emission			
Final Test Mode	Description		
Mode 1	CH01		
Mode 2	CH20		
Mode 3	CH40		
Mode 4	Link Mode		

#### Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

# 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Frequency	2402 MHz	2440 MHz	2480 MHz
Channel	Low	Middle	High



### 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


#### Conducted Emission



# Radiated Spurious Emission Test

E-1 EUT

## RF test setup:



#### Note:

- 1. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.
- 2. Using the notebook and the transform board to control the fixed transmitting frequency and other test mode. After finishing the test setting, the notebook and the transform board will be removed during measurements.



# 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Headset	hoco.	E7	N/A	EUT
E-2	Adapter	N/A	A8A-501000	N/A	Lab Provide
E-3	Notebook	Lenovo	S2	N/A	Lab Provide
E-4	Transfrom board	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	USB cable unshielded

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length\_"</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



# 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Test equipment

	Kind of	Manufactu			Last	Calibrated	Calibratio
Item	Equipment	rer	Type No.	Type No.   Serial No.		until	n period
1	Test Receiver	R&S	ESCI	1166.5950K 03-101165- ha	2016.06.06	2017.06.05	1 year
2	LISN	R&S	NSLK81 26	812646 6	2015.08.24	2016.08.23	1 year
3	LISN	R&S	NSLK81 26	812648 7	2015.08.24	2016.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 7	2016.06.07	2017.06.06	1 year
5	RF cables	R&S	R204	R20X	2016.07.06	2017.07.05	1 year

Radiation test, Band-edge test and 20db bandwith test quipment

1 Kaan	adiation test, band-edge test and zoob bandwith test quipment								
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibratio n period		
1	Spectrum Analyzer	Agilent	E4407B	MY4510804 0	2016.07.06	2017.07.05	1 year		
2	Test Receiver	R&S	ESPI	101318	2016.06.07	2017.06.06	1 year		
3	Bilog Antenna	R&S	VULB 9168	VULB91 68-438	2016.07.06	2017.07.05	1 year		
4	50Ω Coaxial Switch	Anritsu	MP59B	620026441 6	2016.06.07	2017.06.06	1 year		
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2016.06.07	2017.06.06	1 year		
6	Horn Antenna	R&S	HF906	10027	2016.07.06	2017.07.05	1 year		
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.07.06	2017.07.05	1 year		
8	Amplifier	R&S	BBV9743	9743-01 9	2015.08.25	2016.08.24	1 year		
9	Loop Antenna	ARA	PLA-1030/B	1029	2016.06.08	2017.06.07	1 year		
10	RF cables	R&S	R203	R20X	2016.07.06	2017.07.05	1 year		
11	Antenna connector	Florida RFLa bs	Lab-Fle	RF 01#	2016.07.06	2017.07.05	1 year		



## 3. EMC EMISSION TEST

# 3.1 CONDUCTED EMISSION MEASUREMENT

# 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A	(dBuV)	Class B	Standard	
PREQUENCY (MHZ)	Quasi-peak	Average	Quas -peak	Average	Stariuaru
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

### Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

# The following table is the setting of the receiver

Receiver Parameters	Setting		
Attenuation	10 dB		
Start Frequency	0.15 MHz		
Stop Frequency	30 MHz		
IF Bandwidth	9 kHz		




#### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 3.1.4 TEST SETUP

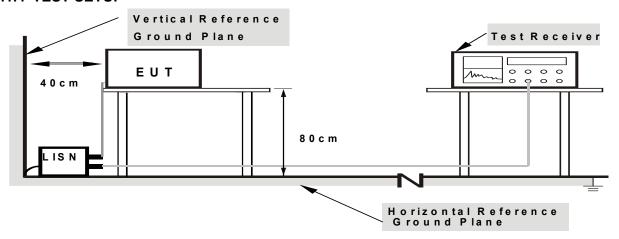

Note: 1.Support units were connected to second LISN.

2.B oth of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



# 3.1.6 TEST RESULTS

Temperature :	25℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	L
LIEST VOITAGE .	Input: AC120V/60Hz Output: DC 3.7V	Test Mode:	Mode 4

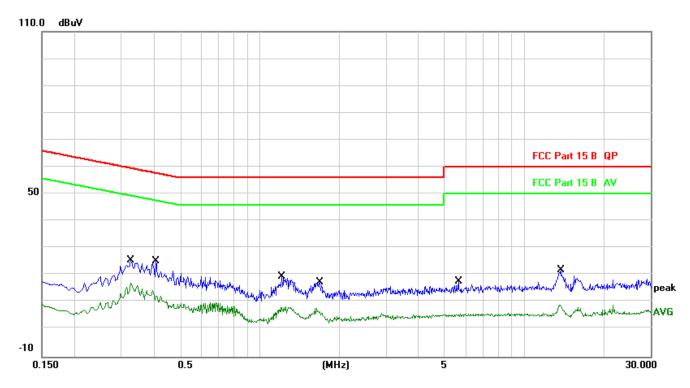


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.3260	15.94	9.66	25.60	59.55	-33.95	QP		
2		0.3260	7.38	9.66	17.04	49.55	-32.51	AVG		
3	*	0.4060	15.67	9.67	25.34	57.73	-32.39	QP		
4		0.4060	4.71	9.67	14.38	47.73	-33.35	AVG		
5		1.2140	9.91	9.69	19.60	56.00	-36.40	QP		
6		1.2140	-1.35	9.69	8.34	46.00	-37.66	AVG		
7		1.6860	7.66	9.70	17.36	56.00	-38.64	QP		
8		1.6860	-1.71	9.70	7.99	46.00	-38.01	AVG		
9		5.6420	7.98	9.76	17.74	60.00	-42.26	QP		
10		5.6420	-4.09	9.76	5.67	50.00	-44.33	AVG		
11		13.7140	11.99	9.84	21.83	60.00	-38.17	QP		
12		13.7140	-0.76	9.84	9.08	50.00	-40.92	AVG		



Shenzhen BCTC Technology Co., Ltd.

Temperature :	<b>25</b> ℃	Relative Humidity:	54%
Pressure :	1010hPa	Phase :	N
Test vollage .	Input: AC120V/60Hz Output: DC 3.7V	Test Mode :	Mode 4

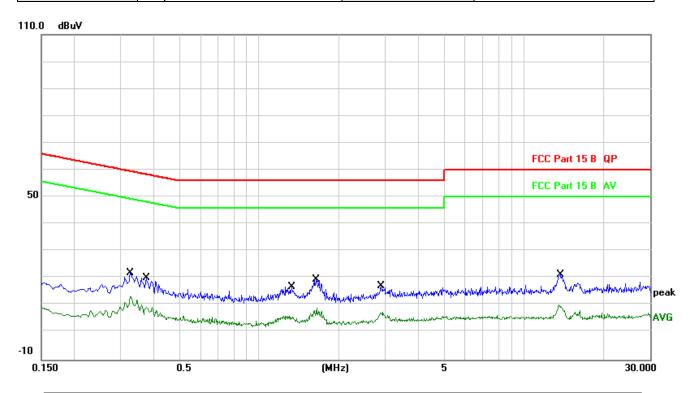

MHz         dBuV         dB         dBuV         dB uV         dVG           3         0.3260         3.58         9.66         13.24         49.55         -36.31         AVG           4         0.3740         0.45         9.67         10.12         48.41         -38.34         QP           5         1.3260         7.29         9.70         16.99         56.00         -39.92         AVG           7         1.6380         9.82         9.70         19.52         56.00         -36.48         QP           8	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
2 * 0.3260       3.58       9.66       13.24       49.55 -36.31       AVG         3 0.3740       10.40       9.67       20.07       58.41 -38.34       QP         4 0.3740       0.45       9.67       10.12       48.41 -38.29       AVG         5 1.3260       7.29       9.70       16.99       56.00 -39.01       QP         6 1.3260       -3.62       9.70       6.08       46.00 -39.92       AVG         7 1.6380       9.82       9.70       19.52       56.00 -36.48       QP         8 1.6380       -0.78       9.70       8.92       46.00 -37.08       AVG         9 2.8900       7.53       9.72       17.25       56.00 -38.75       QP         10 2.8900       -2.29       9.72       7.43       46.00 -38.57       AVG			MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
3 0.3740 10.40 9.67 20.07 58.41 -38.34 QP  4 0.3740 0.45 9.67 10.12 48.41 -38.29 AVG  5 1.3260 7.29 9.70 16.99 56.00 -39.01 QP  6 1.3260 -3.62 9.70 6.08 46.00 -39.92 AVG  7 1.6380 9.82 9.70 19.52 56.00 -36.48 QP  8 1.6380 -0.78 9.70 8.92 46.00 -37.08 AVG  9 2.8900 7.53 9.72 17.25 56.00 -38.75 QP  10 2.8900 -2.29 9.72 7.43 46.00 -38.57 AVG	1		0.3260	12.39	9.66	22.05	59.55	-37.50	QP		
4       0.3740       0.45       9.67       10.12       48.41 -38.29       AVG         5       1.3260       7.29       9.70       16.99       56.00 -39.01       QP         6       1.3260       -3.62       9.70       6.08       46.00 -39.92       AVG         7       1.6380       9.82       9.70       19.52       56.00 -36.48       QP         8       1.6380       -0.78       9.70       8.92       46.00 -37.08       AVG         9       2.8900       7.53       9.72       17.25       56.00 -38.75       QP         10       2.8900       -2.29       9.72       7.43       46.00 -38.57       AVG	2	*	0.3260	3.58	9.66	13.24	49.55	-36.31	AVG		
5     1.3260     7.29     9.70     16.99     56.00 -39.01     QP       6     1.3260     -3.62     9.70     6.08     46.00 -39.92     AVG       7     1.6380     9.82     9.70     19.52     56.00 -36.48     QP       8     1.6380     -0.78     9.70     8.92     46.00 -37.08     AVG       9     2.8900     7.53     9.72     17.25     56.00 -38.75     QP       10     2.8900     -2.29     9.72     7.43     46.00 -38.57     AVG	3		0.3740	10.40	9.67	20.07	58.41	-38.34	QP		
6 1.3260 -3.62 9.70 6.08 46.00 -39.92 AVG 7 1.6380 9.82 9.70 19.52 56.00 -36.48 QP 8 1.6380 -0.78 9.70 8.92 46.00 -37.08 AVG 9 2.8900 7.53 9.72 17.25 56.00 -38.75 QP 10 2.8900 -2.29 9.72 7.43 46.00 -38.57 AVG	4		0.3740	0.45	9.67	10.12	48.41	-38.29	AVG		
7 1.6380 9.82 9.70 19.52 56.00 -36.48 QP 8 1.6380 -0.78 9.70 8.92 46.00 -37.08 AVG 9 2.8900 7.53 9.72 17.25 56.00 -38.75 QP 10 2.8900 -2.29 9.72 7.43 46.00 -38.57 AVG	5		1.3260	7.29	9.70	16.99	56.00	-39.01	QP		
8 1.6380 -0.78 9.70 8.92 46.00 -37.08 AVG 9 2.8900 7.53 9.72 17.25 56.00 -38.75 QP 10 2.8900 -2.29 9.72 7.43 46.00 -38.57 AVG	6		1.3260	-3.62	9.70	6.08	46.00	-39.92	AVG		
9 2.8900 7.53 9.72 17.25 56.00 -38.75 QP 10 2.8900 -2.29 9.72 7.43 46.00 -38.57 AVG	7		1.6380	9.82	9.70	19.52	56.00	-36.48	QP		
10 2.8900 -2.29 9.72 7.43 46.00 -38.57 AVG	8		1.6380	-0.78	9.70	8.92	46.00	-37.08	AVG		
	9		2.8900	7.53	9.72	17.25	56.00	-38.75	QP		
44 42.0070 44.50 0.04 24.24 00.00 20.00 0.0	10		2.8900	-2.29	9.72	7.43	46.00	-38.57	AVG		
11 13.6979 11.50 9.84 21.34 60.00 -38.66 QP	11		13.6979	11.50	9.84	21.34	60.00	-38.66	QP		
12 13.6979 0.39 9.84 10.23 50.00 -39.77 AVG	12		13.6979	0.39	9.84	10.23	50.00	-39.77	AVG		



### 3.2 RADIATED EMISSION MEASUREMENT

## 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

- · · · · · · · · · · · · · · · · · · ·							
Frequencies	Field Strength	Measurement Distance					
(MHz)	(micorvolts/meter)	(meters)					
0.009~0.490	2400/F(KHz)	300					
0.490~1.705	24000/F(KHz)	30					
1.705~30.0	30	30					
30~88	100	3					
88~216	150	3					
216~960	200	3					
Above 960	500	3					

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

	Class B (dBu	V/m) (at 3M)
FREQUENCY (MHz)	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	1000 MHz	
Stop Frequency	10th carrier harmonic	
RB / VB (emission in restricted	1 MHz / 1 MHz for Dook, 1 MHz / 10Hz for Average	
band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
  - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported





Report No.: BCTC-170301512-2E


# 3.2.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.2.4 TEST SETUP

# (A) Radiated Emission Test-Up Frequency Below 30MHz

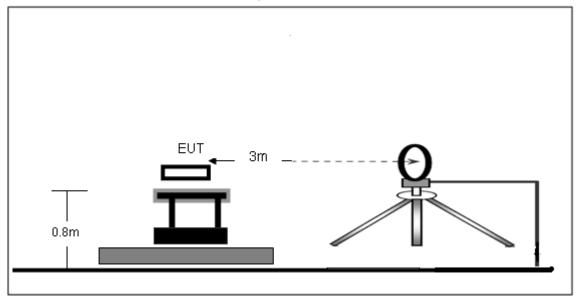


# (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

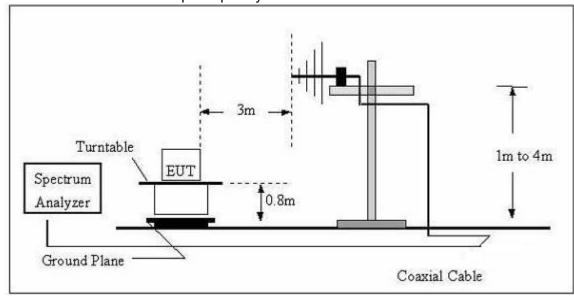



# (C) Radiated Emission Test-Up Frequency Above 1GHz

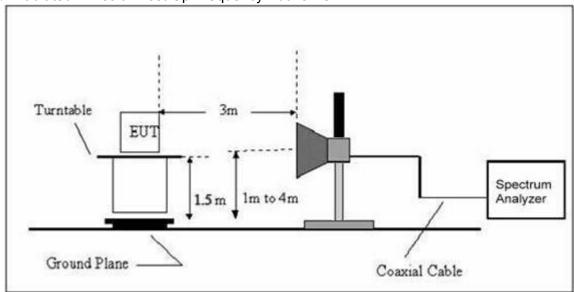

## 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



#### 3.2.6 TEST RESULTS

Radiated Spurious Emission (Below 30MHz)

Temperature :	<b>20</b> ℃	Relative Humidity:	48%
Pressure:	1010 hPa	Polarization :	
Test Voltage :	DC 3.7V From Battery		
Test Mode :	Link Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
				PASS
				PASS

# NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



# Radiated Spurious Emission (Between 30MHz – 1GHz)

Temperature :	<b>26</b> ℃	Relative Humidity:	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V From Battery		
Test Mode : (Worst)	Link Mode		

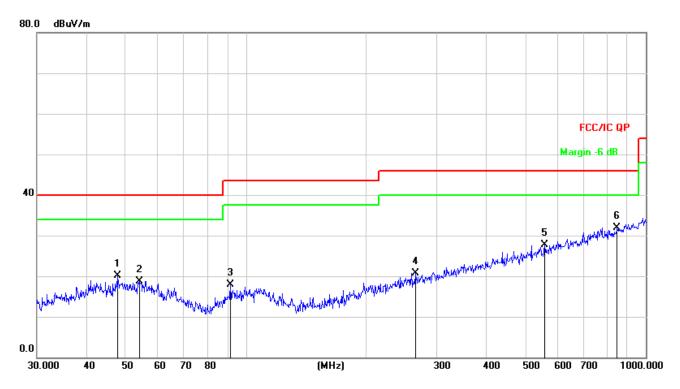


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		47.6586	34.77	-14.73	20.04	40.00	-19.96	QP
2		54.2610	33.72	-14.94	18.78	40.00	-21.22	QP
3		91.4949	35.69	-17.84	17.85	43.50	-25.65	QP
4	2	265.6757	33.95	-13.21	20.74	46.00	-25.26	QP
5	į	558.7302	33.71	-5.92	27.79	46.00	-18.21	QP
6	* {	348.0563	32.31	-0.33	31.98	46.00	-14.02	QP



Shenzhen BCTC Technology Co., Ltd.

Temperature :	26 ℃	Relative Humidity:	54%			
Pressure:	1010 hPa	Polarization :	Vertical			
Test Voltage :	DC 3.7V From Battery					
Test Mode : (Worst)	Link Mode					

Report No.: BCTC-170301512-2E

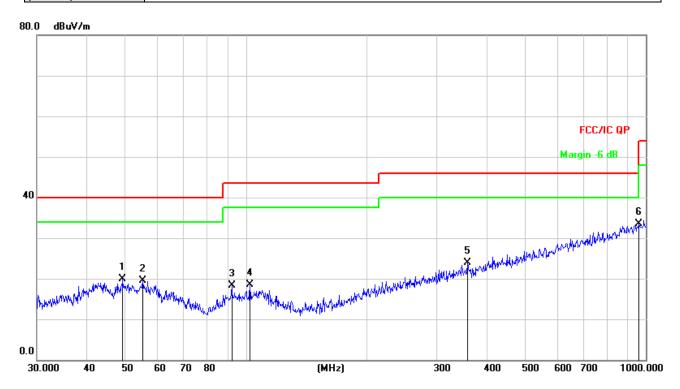

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		49.1865	34.66	-14.67	19.99	40.00	-20.01	QP
2		55.2207	34.77	-15.18	19.59	40.00	-20.41	QP
3		92.1388	36.08	-17.70	18.38	43.50	-25.12	QP
4		102.3597	34.80	-16.33	18.47	43.50	-25.03	QP
5		357.9287	34.28	-10.39	23.89	46.00	-22.11	QP
6	*	958.7943	32.08	1.38	33.46	46.00	-12.54	QP



# Radiated Spurious Emission (1GHz to 10<sup>th</sup> harmonics)

# **GFSK**

GFSK	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dBµV)	(PK/QP/Ave)	(H/V)	(dB)	(dBµV/m)	(dBµV/m)	rtosuit
	2402.00	91.62	PK	Н	13.85	105.47	114.00	Pass
	2402.00	74.93	Ave	Н	13.85	88.78	94.00	Pass
	4804.00	50.33	PK	Н	19.33	69.66	74.00	Pass
_	4804.00	38.86	Ave	Н	19.33	58.19	54.00	Pass
Lower Channel	12355.00	28.19	PK	Н	17.81	46	74.00	Pass
2402MHz	17850.00	21.62	PK	Н	25.39	47.01	74.00	Pass
	2402.00	93.57	PK	V	13.85	107.42	114.00	Pass
	2402.00	73.42	Ave	V	13.85	87.27	94.00	Pass
	4804.00	46.98	PK	٧	19.33	66.31	74.00	Pass
	4804.00	26.45	Ave	>	19.33	45.78	54.00	Pass
	12355.00	27.74	PK	V	17.81	45.55	74.00	Pass
	17850.00	21.29	PK	٧	25.39	46.68	74.00	Pass
	2440.00	92.89	PK	Н	13.94	106.83	114.00	Pass
	2440.00	73.31	Ave	Н	13.94	87.25	94.00	Pass
	4880.00	46.34	PK	Η	19.43	65.77	74.00	Pass
	4880.00	30.61	Ave	Н	19.43	50.04	54.00	Pass
	12355.00	27.48	PK	Η	17.81	45.29	74.00	Pass
Middle Channel	17850.00	21.39	PK	Н	25.39	46.78	74.00	Pass
2440MHz	2440.00	93.52	PK	<b>V</b>	13.94	107.46	114.00	Pass
	2440.00	74.76	Ave	٧	13.94	88.7	94.00	Pass
	4880.00	49.69	PK	>	19.43	69.12	74.00	Pass
	4880.00	29.55	Ave	<b>V</b>	19.43	48.98	54.00	Pass
	12355.00	27.14	PK	<b>V</b>	17.81	44.95	74.00	Pass
	17850.00	21.26	PK	V	25.39	46.65	74.00	Pass
Upper	2480.00	93.25	PK	Н	14.02	107.27	114.00	Pass
Channel 2480MHz	2480.00	73.74	Ave	Н	14.02	87.76	94.00	Pass
∠48UIVIHZ	4960.00	46.87	PK	Н	19.51	66.38	74.00	Pass



Shenzhen BCTC Technology Co., Ltd. Report No.: BCTC-170301512-2E

4960.00	29.91	Ave	Н	19.51	49.42	54.00	Pass
12355.00	26.35	PK	Н	17.81	44.16	74.00	Pass
17850.00	21.16	PK	Н	25.39	46.55	74.00	Pass
2480.00	92.74	PK	V	14.02	106.76	114.00	Pass
2480.00	73.64	Ave	V	14.02	87.66	94.00	Pass
4960.00	45.72	PK	V	19.51	65.23	74.00	Pass
4960.00	26.89	Ave	V	19.51	46.4	54.00	Pass
12355.00	27.47	PK	V	17.81	45.28	74.00	Pass
17850.00	21.33	PK	V	25.39	46.72	74.00	Pass

### Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



#### 4. BANDWIDTH TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C							
Section	Test Item	Limit	Frequency Range (MHz)	Result			
15.249	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS			

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100KHz
VB	≥RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW≥ RBW, Sweep time = Auto.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP



### **4.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




#### 4.1.5 TEST RESULTS


Temperature:	<b>25</b> ℃	Relative Humidity:	54%	
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery	
Test Mode :	CH01 / CH20 /CH40			

	Frequency	20dB Bandwidth (MHz)	Result
GFSK	2402 MHz	1.197	PASS
	2440 MHz	1.191	PASS
	2480 MHz	1.199	PASS

## **GFSK**

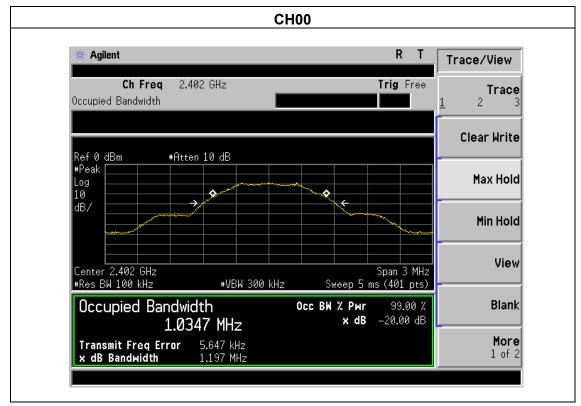



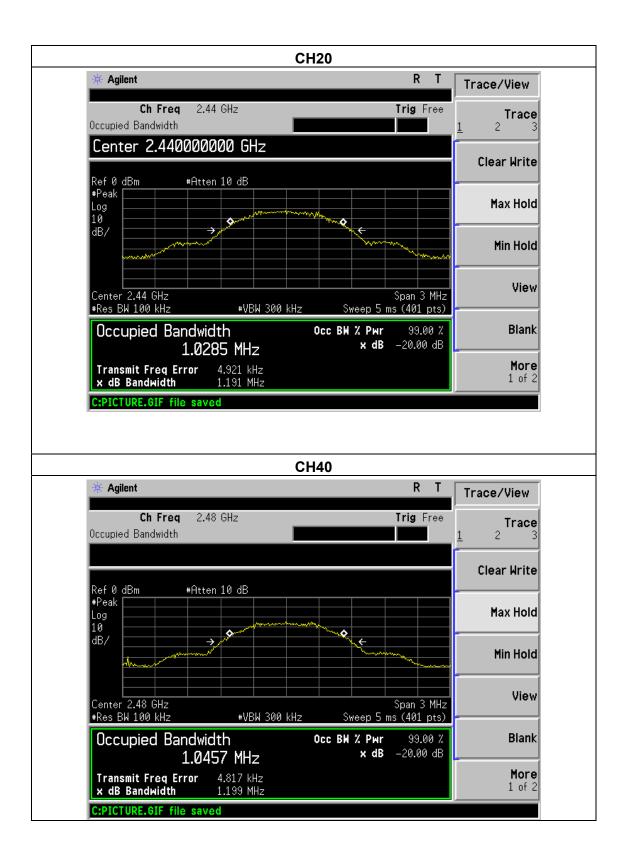

Report No.: BCTC-170301512-2E



# 5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **TEST PROCEDURE**

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



## **5.1 DEVIATION FROM STANDARD**

No deviation.

### **5.2 TEST SETUP**

# **5.3 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### **5.4 TEST RESULTS**

Temperature :	<b>25</b> ℃	Relative Humidity:	54%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V From Battery
Test Mode :	CH01/CH40		


	Frequency (MHz)	Antenna polarization (H/V)	Frequency (MHz)	Reading	Factor (dB)	Emission (dBuV/m)	Band edge Limit (dBuV/m)		Result
	(100)	(* " * )				PK	PK	AV	Pass
GFSK	<2400	Н	2390.00	33.17	13.83	47.00	74.00	54.00	Pass
	<2400	V	2390.00	34.68	13.83	48.51	74.00	54.00	Pass
	<2400	Н	2400.00	33.92	13.85	47.77	74.00	54.00	Pass
	<2400	V	2400.00	34.65	13.85	48.50	74.00	54.00	Pass
	>2483.5	Н	2483.50	35.34	14.02	49.36	74.00	54.00	Pass
	>2483.5	V	2483.50	35.19	14.02	49.21	74.00	54.00	Pass
	>2483.5	Н	2485.50	33.52	14.04	47.56	74.00	54.00	Pass
	>2483.5	V	2485.50	35.76	14.04	49.80	74.00	54.00	Pass

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.


Report No.: BCTC-170301512-2E







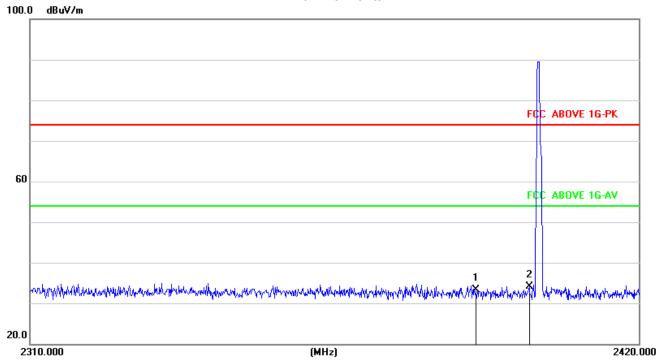


### 2402 Vertical

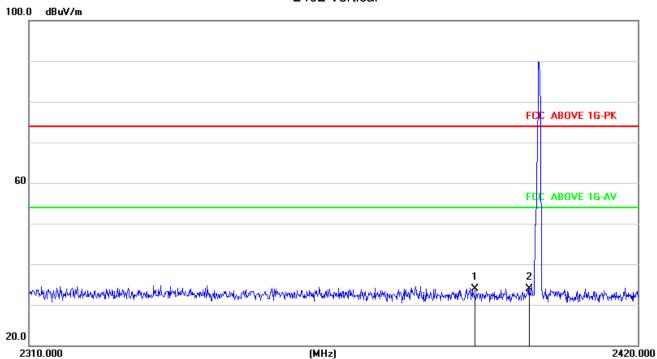



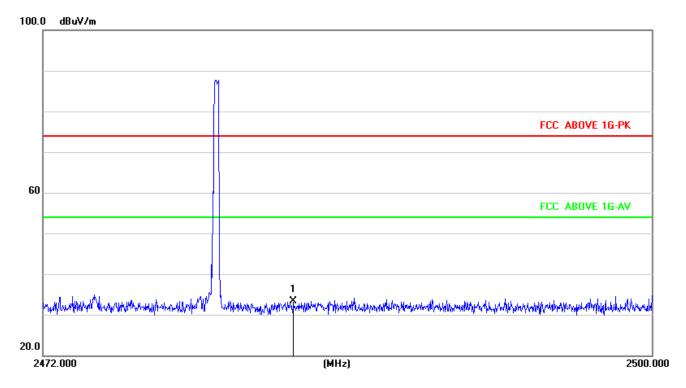

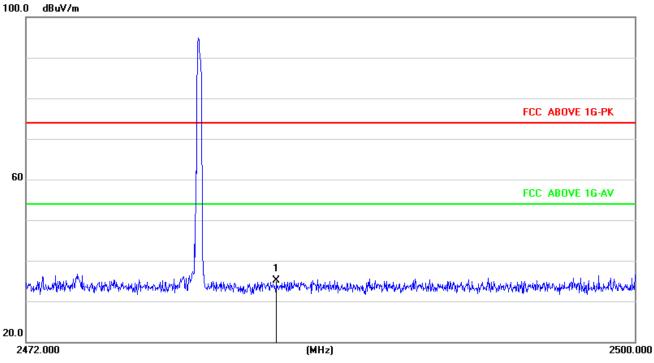



# **6. ANTENNA REQUIREMENT**

### **6.1 STANDARD REQUIREMENT**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2 EUT ANTENNA**

The EUT antenna is Integrated (Chip) antenna. It complies with the standard requirement.

Report No.: BCTC-170301512-2E






# 7. EUT TEST PHOTO










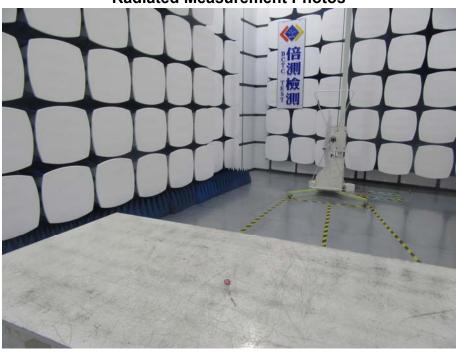

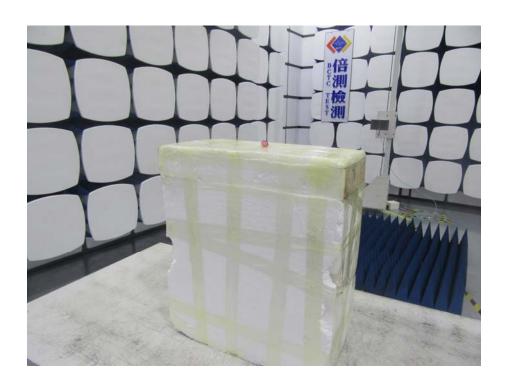


# 8. PHOTOS OF THE EUT








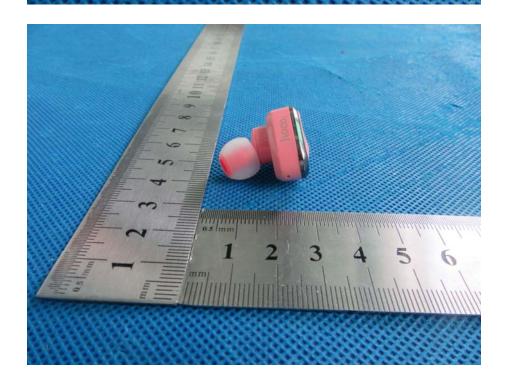





Shenzhen BCTC Technology Co., Ltd.

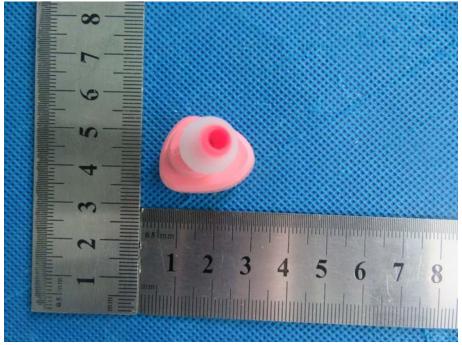

\*\*\* END OF REPORT \*\*\*\*