

Radio Test Report

FCC ID: 2ALRR-PRIMELAB20

IC: 22610-PRIMELAB20

Report No. : TB-RF177370
Applicant : WATER ID GmbH
Equipment Under Test (EUT)
EUT Name : PrimeLab 2.0
Model No. : PrimeLab 2.0
Series Model No. : ----
Brand Name : ----
Sample ID : 20201104-17-1#& 20201104-17-2#
Receipt Date : 2020-11-13
Test Date : 2020-11-14 to 2021-07-04
Issue Date : 2021-07-27
Standards : FCC Part 15 Subpart E 15.407
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 March 2019
Test Method : ANSI C63.10: 2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above.

Witness Engineer :

Wade Lv

Wade Lv

Engineer Supervisor :


IVAN SU

Ivan Su

Engineer Manager :

Ray Lai

Ray Lai

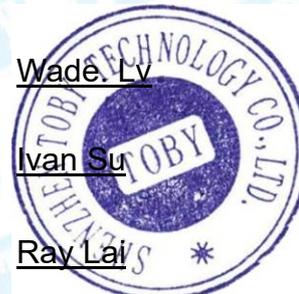

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT.....	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	7
1.4 Description of Support Units	7
1.6 Description of Test Software Setting	10
1.7 Measurement Uncertainty	12
1.8 Test Facility.....	12
2. TEST SUMMARY	13
3. TEST SOFTWARE.....	13
4. TEST EQUIPMENT.....	14
5. CONDUCTED EMISSION TEST	15
5.1 Test Standard and Limit.....	15
5.2 Test Setup.....	15
5.3 Test Procedure.....	15
5.4 Deviation From Test Standard.....	16
5.5 EUT Operating Mode	16
5.6 Test Data.....	16
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS.....	17
6.1 Test Standard and Limit.....	17
6.2 Test Setup.....	18
6.3 Test Procedure.....	19
6.4 Deviation From Test Standard.....	20
6.5 EUT Operating Mode	20
6.6 Test Data.....	20
7. RESTRICTED BANDS REQUIREMENT	21
7.1 Test Standard and Limit.....	21
7.2 Test Setup.....	22
7.3 Test Procedure.....	22
7.4 Deviation From Test Standard.....	23
7.5 EUT Operating Mode	23
7.6 Test Data.....	23
8. BANDWIDTH TEST.....	24
8.1 Test Standard and Limit.....	24
8.2 Test Setup.....	24
8.3 Test Procedure.....	24
8.4 Deviation From Test Standard.....	26
8.5 EUT Operating Mode	26
8.6 Test Data.....	26

9.	MAXIMUM CONDUCTED OUTPUT POWER.....	27
9.1	Test Standard and Limit.....	27
9.2	Test Setup.....	28
9.3	Test Procedure.....	28
9.4	Deviation From Test Standard.....	28
9.5	EUT Operating Mode	28
9.6	Test Data.....	28
10.	POWER SPECTRAL DENSITY TEST	29
10.1	Test Standard and Limit	29
10.2	Test Setup.....	29
10.3	Test Procedure.....	29
10.4	Deviation From Test Standard.....	30
10.5	Antenna Connected Construction.....	30
10.6	Test Data.....	30
11.	FREQUENCY STABILITY	31
11.1	Test Standard and Limit	31
11.2	Test Setup.....	31
11.3	Test Procedure.....	31
11.4	Deviation From Test Standard.....	32
11.5	Antenna Connected Construction.....	32
11.6	Test Data.....	32
12.	ANTENNA REQUIREMENT	33
12.1	Test Standard and Limit	33
12.2	Deviation From Test Standard.....	33
12.3	Antenna Connected Construction.....	33
12.4	Test Data.....	33
	ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	34
	ATTACHMENT B--UNWANTED EMISSIONS DATA	36
	ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT.....	140
	ATTACHMENT E--MAXIMUM CONDUCTED OUTPUT POWER	223
	ATTACHMENT F--POWER SPECTRAL DENSITY TEST	261
	ATTACHMENT G-- FREQUENCY STABILITY	302

1. General Information about EUT

1.1 Client Information

Applicant	:	WATER ID GmbH
Address	:	Daimlerstrasse 20 Eggenstein, Germany D-76344
Manufacturer	:	WATER ID GmbH
Address	:	Daimlerstrasse 20 Eggenstein, Germany D-76344

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	PrimeLab 2.0
HVIN/Models No.	:	PrimeLab 2.0
Model Different	:	N/A
Product Description	:	Operation Frequency: U-NII-1: 5180MHz~5240MHz, U-NII-2A: 5260MHz~5320MHz U-NII-2C: 5500MHz~5720MHz, U-NII-3: 5745MHz~5825MHz
		Antenna Gain: 2.0dBi FPC Antenna
		Modulation Type: 802.11a: OFDM (QPSK, BPSK, 16QAM) 802.11n: OFDM (QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (QPSK, BPSK, 16QAM, 64QAM, 256QAM)
		Bit Rate of Transmitter: 802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 150Mbps 802.11ac: at most 433.3 Mbps
Power Rating	:	Adapter (GPE011G-050200-Z) Input: 100-240V~, 50/60Hz, 0.3A Output: DC 5V2A 10.0W MAX DC 3.7V by 8400mAh Li-ion Polymer battery
Software Version	:	1.0
Hardware Version	:	1.0
Remark:		
(1) The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.		
(2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		
(3) Antenna information provided by the applicant.		

(4) Channel List:

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5180~5240MHz (U-NII-1)	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz		

For 20 MHz Bandwidth, use channel 36, 40, 44, 48. For 40 MHz Bandwidth, use channel 38, 46.
For 80 MHz Bandwidth, use channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5260~5320 MHz (U-NII-2A)	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310MHz
	56	5280MHz	64	5320 MHz
	58	5290MHz		

For 20 MHz Bandwidth, use channel 52, 56, 60, 64. For 40 MHz Bandwidth, use channel 54, 62.
For 80 MHz Bandwidth, use channel 58.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5500~5720 MHz (U-NII-2C)	100	5500 MHz	124	5620 MHz
	102	5510 MHz	126	5630 MHz
	104	5520 MHz	128	5640 MHz
	106	5530 MHz	132	5660 MHz
	108	5540 MHz	134	5670 MHz
	110	5550 MHz	136	5680 MHz
	112	5560 MHz	138	5690 MHz
	116	5580 MHz	140	5700 MHz
	118	5590 MHz	142	5710 MHz
	120	5600 MHz	144	5720 MHz
	122	5610 MHz		

For 20 MHz Bandwidth, use channel 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 144
For 40 MHz Bandwidth, use channel 102, 110, 118, 126, 134, 142
For 80 MHz Bandwidth, use channel 106, 122, 138.


Note: For the protection of Environment, the5600-5650MHz band restricted in Canada. So the CH 118/120/122/124/126/128 was restricted use in Canada.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5745~5825MHz (U-NII-3)	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz


For 20 MHz Bandwidth, use channel 149, 153, 157, 161, 165. For 40 MHz Bandwidth, use channel 151, 159.
For 80 MHz Bandwidth, use channel 155.

1.3 Block Diagram Showing the Configuration of System Tested

Conducted Test

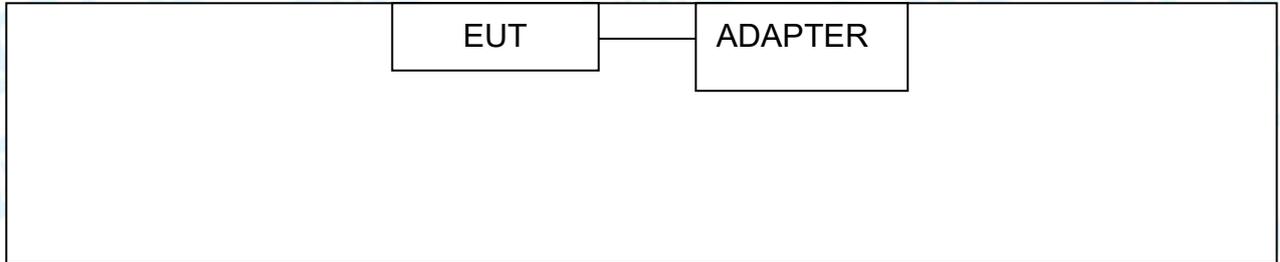

Radiated Test

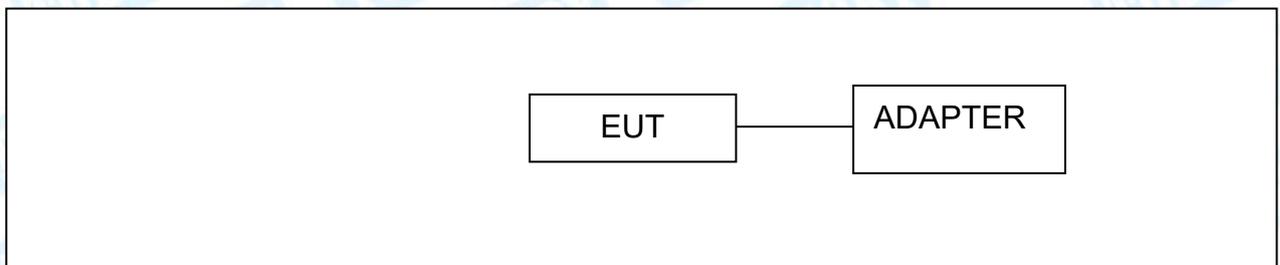

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
---	----	----	---	---
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test		
Final Test Mode	Description	
Mode 1	Charging + TX a Mode(5180MHz)	
For Radiated Test Below 1GHz		
Final Test Mode	Description	
Mode 2	Charging + TX a Mode(5180MHz)	
For Radiated Above 1GHz and RF Conducted Test		
Test Band	Final Test Mode	Description
U-NII-1	Mode 3	TX Mode 802.11a Mode Channel 36/40/48
	Mode 4	TX Mode 802.11n(HT20) Mode Channel 36/40/48
	Mode 5	TX Mode 802.11ac(VHT20) Mode Channel 36/40/48
	Mode 6	TX Mode 802.11n(HT40) Mode Channel 38/46
	Mode 7	TX Mode 802.11ac(VHT40) Mode Channel 38/46
	Mode 8	TX Mode 802.11ac(VHT80) Mode Channel 42
U-NII-2A	Mode 9	TX Mode 802.11a Mode Channel 52/60/64
	Mode 10	TX Mode 802.11n(HT20) Mode Channel 52/60/64
	Mode 11	TX Mode 802.11ac(VHT20) Mode Channel 52/60/64
	Mode 12	TX Mode 802.11n(HT40) Mode Channel 54/62
	Mode 13	TX Mode 802.11ac(VHT40) Mode Channel 54/62
U-NII-2C	Mode 14	TX Mode 802.11ac(VHT80) Mode Channel 58
	Mode 15	TX Mode 802.11a Mode Channel 100/116/144
	Mode 16	TX Mode 802.11n(HT20) Mode Channel 100/116/144
	Mode 17	TX Mode 802.11ac(VHT20) Mode Channel 100/116/144
	Mode 18	TX Mode 802.11n(HT40) Mode Channel 102/110/142
U-NII-3	Mode 19	TX Mode 802.11ac(VHT40) Mode Channel 102/110/142
	Mode 20	TX Mode 802.11ac(VHT80) Mode Channel 106/138
	Mode 21	TX Mode 802.11a Mode Channel 149/157/165
	Mode 22	TX Mode 802.11n(HT20) Mode Channel 149/157/165
	Mode 23	TX Mode 802.11ac(vHT20) Mode Channel 149/157/165
	Mode 24	TX Mode 802.11n(HT40) Mode Channel 151/159
	Mode 25	TX Mode 802.11ac(VHT40) Mode Channel 151/159
	Mode 26	TX Mode 802.11ac(VHT80) Mode Channel 155

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

- 802.11a Mode: OFDM (6 Mbps)
- 802.11n (HT20) Mode: MCS 0
- 802.11n (HT40) Mode: MCS 0
- 802.11ac(VHT20) Mode: MCS 0/ Nss1
- 802.11ac(VHT40) Mode: MCS 0/ Nss1
- 802.11ac(VHT80) Mode: MCS 0/ Nss1

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software: Putty.exe		
U-NII-1		
Mode	Frequency (MHz)	Parameters
802.11a	5180	13
	5200	13
	5240	13
802.11n(HT20)	5180	13
	5200	13
	5240	13
802.11ac(VHT20)	5180	13
	5200	13
	5240	13
802.11n(HT40)	5190	13
	5230	13
802.11ac(VHT40)	5190	13
	5230	13
802.11ac(VHT80)	5210	13
U-NII-2A		
Mode	Frequency (MHz)	Parameters
802.11a	5260	13
	5300	13
	5320	13
802.11n(HT20)	5260	13
	5300	13
	5320	13
802.11ac(VHT20)	5260	13
	5300	13
	5320	13
802.11n(HT40)	5270	13
	5310	13
802.11ac(VHT40)	5270	13
	5310	13
802.11ac(VHT80)	5290	13

U-NII-2C		
Mode	Frequency (MHz)	Parameters
802.11a	5500	13
	5580	13
	5720	13
802.11n(HT20)	5500	13
	5580	13
	5720	13
802.11ac(VHT20)	5500	13
	5580	13
	5720	13
802.11n(HT40)	5510	13
	5550	13
	5710	13
802.11ac(VHT40)	5510	13
	5550	13
	5710	13
802.11ac(VHT80)	5530	13
	5690	13
U-NII-3		
Mode	Frequency (MHz)	Parameters
802.11a	5745	13
	5785	13
	5825	13
802.11n(HT20)	5745	13
	5785	13
	5825	13
802.11ac(VHT20)	5745	13
	5785	13
	5825	13
802.11n(HT40)	5755	13
	5795	13
802.11ac(VHT40)	5755	13
	5795	13
802.11ac(VHT80)	5775	13

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F.,Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.

2. Test Summary

Standard Section		Test Item	Test Sample(s)	Judgment	Remark
FCC	IC				
FCC 15.207(a)	RSS-Gen 8.8	Conducted Emission	20201104-17-1#	PASS	N/A
FCC 15.209 & 15.407(b)	RSS-Gen 8.9 & RSS 247 5.5	Radiated Unwanted Emissions	20201104-17-1#	PASS	N/A
FCC 15.203	RSS-247 6.8	Antenna Requirement	20201104-17-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.2)	-26dB Emission Bandwidth	20201104-17-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.2) RSS GEN 6.7	99% Occupied Bandwidth	20201104-17-2#	PASS	N/A
FCC 15.407(e)	RSS-247(6.2.4.1)	-6dB Min Emission Bandwidth	20201104-17-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.1& 6.2.2.1&6.2.3.1& 6.2.4.1)	Maximum Conducted Output Power	20201104-17-2#	PASS	N/A
FCC 15.407(a)	RSS-247(6.2.1.1& 6.2.2.1&6.2.3.1& 6.2.4.1)	Power Spectral Density	20201104-17-2#	PASS	N/A
FCC 15.407(b)& 15.205	RSS-Gen 8.10& RSS-247 5.5	Emissions in Restricted Bands	20201104-17-2#	PASS	N/A
FCC 15.407(b)&15.209	RSS-Gen 8.9 & RSS 247 5.5	Conducted Unwanted Emissions	20201104-17-2#	PASS	N/A
FCC 15.407(g)	RSS-Gen 8.11	Frequency Stability	20201104-17-2#	PASS	N/A
/	/	On Time and Duty Cycle	20201104-17-2#	/	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0
RF Test System	JS1120	Tonscend	V2.6.88.0336

4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 06, 2020	Jul. 05, 2021
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 06, 2020	Jul. 05, 2021
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 06, 2020	Jul. 05, 2021
LISN	Rohde & Schwarz	ENV216	101131	Jul. 06, 2020	Jul. 05, 2021
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 07, 2020	Jul. 06, 2021
Pre-amplifier	Sonoma	310N	185903	Feb. 25, 2021	Feb. 24, 2022
Pre-amplifier	HP	8449B	3008A00849	Feb. 25, 2021	Feb. 24, 2022
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Feb. 25, 2021	Feb. 24, 2022
Cable	HUBER+SUHNER	100	SUCOFLEX	Feb. 25, 2021	Feb. 24, 2022
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 06, 2020	Jul. 05, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 11, 2020	Sep. 10, 2021

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

RSS-Gen 8.8
FCC Part 15.207


5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

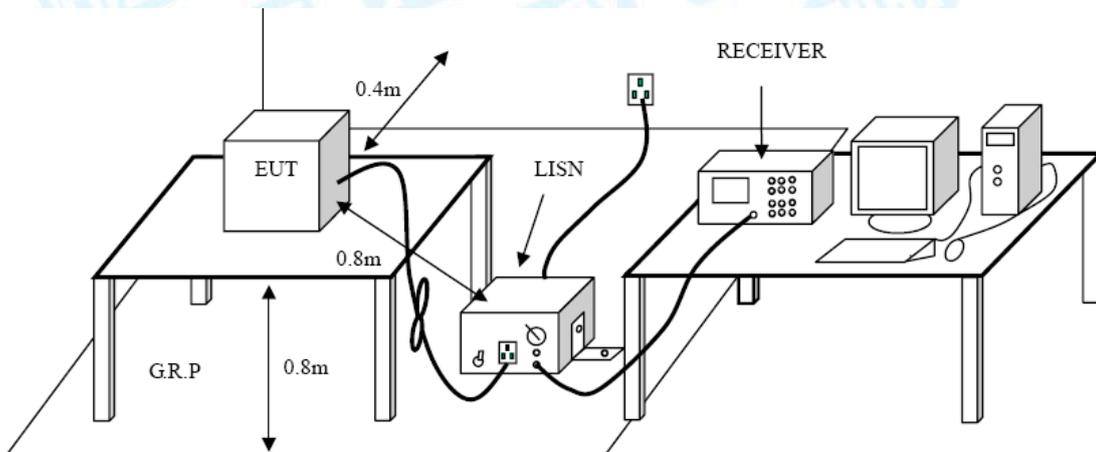

5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated and Conducted Unwanted Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard

RSS-Gen 8.9 & RSS 247 5.5
FCC Part 15.209 & FCC Part 15.407(b)

6.1.2 Test Limit

General field strength limits at frequencies Below 30MHz			
Frequency (MHz)	Field Strength ($\mu\text{A/m}$)*	Field Strength (microvolt/meter)**	Measurement Distance (meters)
0.009~0.490	6.37/F (F in kHz)	2400/F(KHz)	300
0.490~1.705	63.7/F (F in kHz)	24000/F(KHz)	30
1.705~30.0	0.08	30	30

Note: 1, The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.
2, *is for RSS Standard, **is for FCC Standard.

General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

Note:
(1) The tighter limit applies at the band edges.
(2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 Test Setup


Radiated measurement

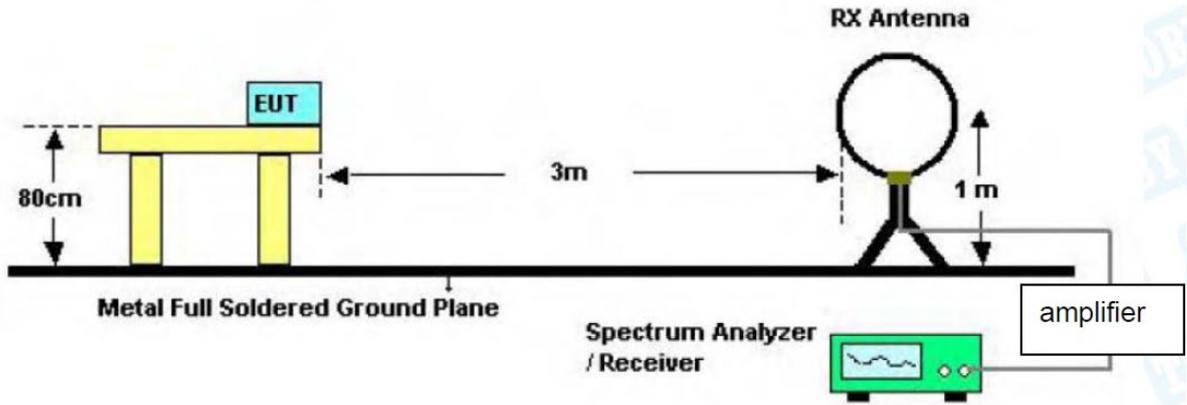


Below 30MHz Test Setup

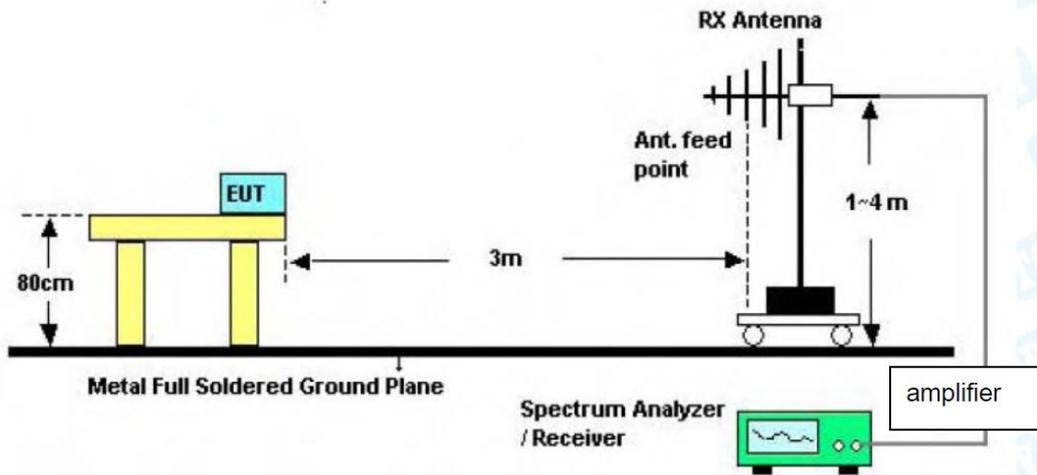

Below 1000MHz Test Setup

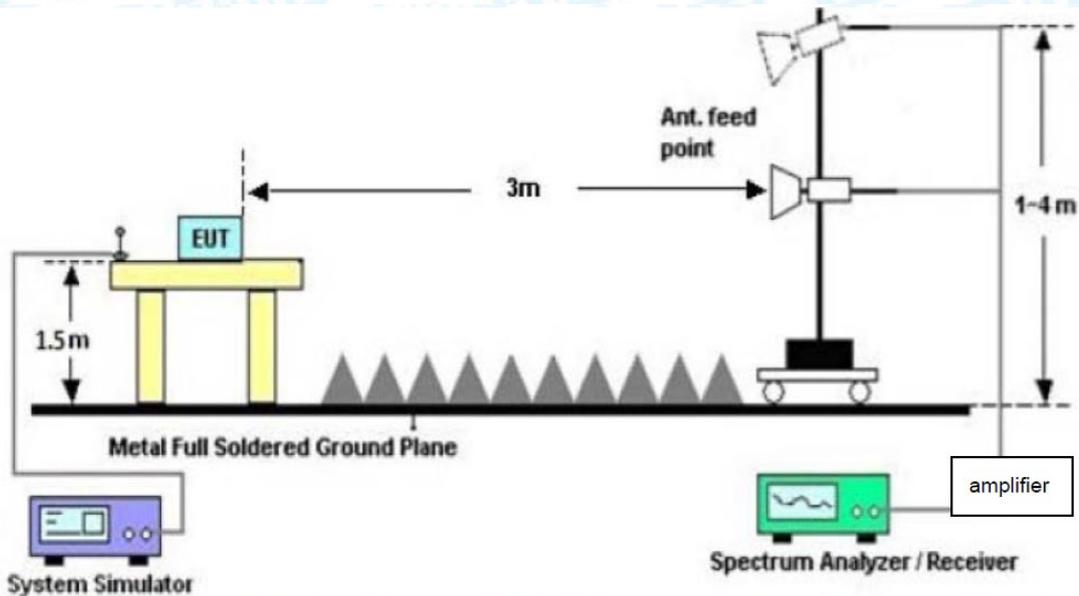

Above 1GHz Test Setup

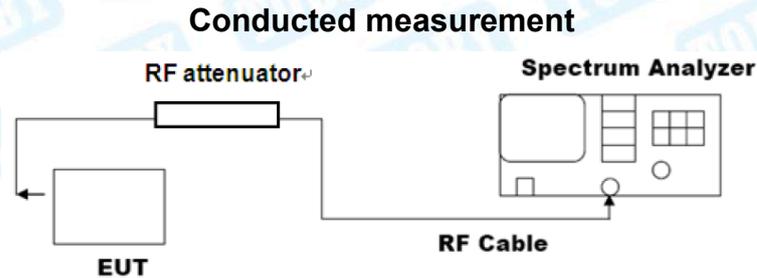

6.3 Test Procedure

---Radiated measurement

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.

--- Conducted measurement

● Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

● Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

Please refer to the Attachment B.

7. Restricted Bands Requirement

7.1 Test Standard and Limit

7.1.1 Test Standard

RSS-Gen 8.10 & RSS 247 5.5
FCC Part 15.205 & FCC Part 15.407(b)

7.1.2 Test Limit

Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27(Note 2)	68.3
	10(Note 2)	105.3
	15.6(Note 2)	110.9
	27(Note 2)	122.3

NOTE:

1, The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts)}$$

2, According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.


Note: According the ANSI C63.10 11.12.2 antenna-port conducted measurements may also be used as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test forcabinet/case emissions is required.

7.2 Test Setup

Radiated measurement

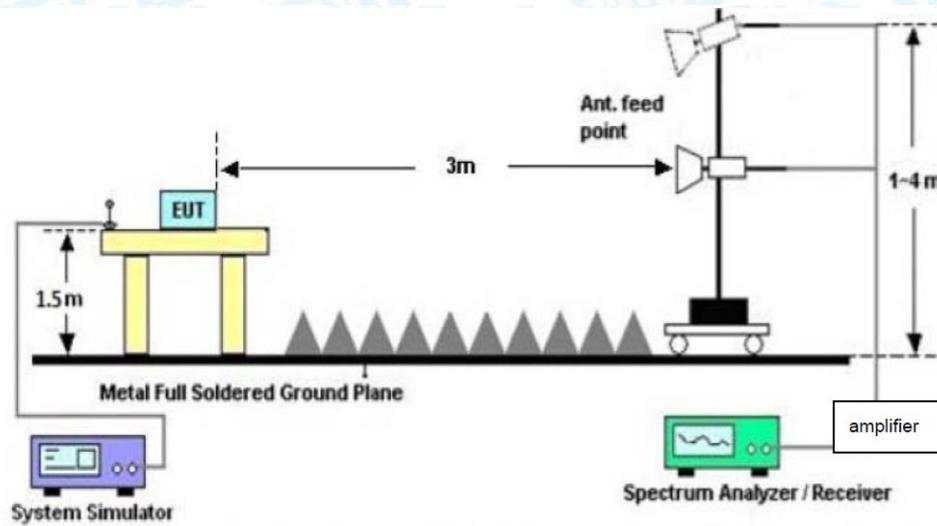

Conducted measurement

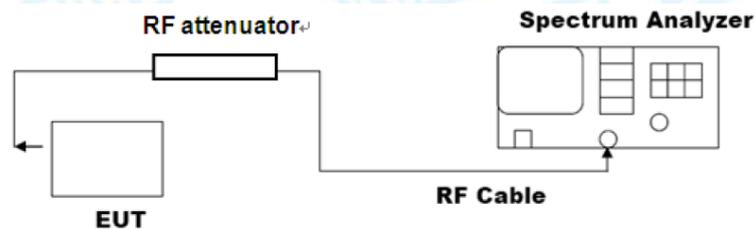

7.3 Test Procedure

---Radiated measurement

- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- The Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.

--- Conducted measurement

- a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).
- c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies ≤ 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).
- d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).
- e) Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log d + 104.8$$

where

E is the electric field strength in dBuV/m

EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m

- f) Compare the resultant electric field strength level with the applicable regulatory limit.

- g) Perform the radiated spurious emission test.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Remark: The test uses antenna-port conducted measurements as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements.

Please refer to the Attachment C.

8. Bandwidth Test

8.1 Test Standard and Limit


8.1.1 Test Standard

RSS 247 (6.2.1.2) & RSS 247 (6.2.1.4)
FCC Part 15.407(a) & FCC Part 15.407(e)

8.1.2 Test Limit

Test Item	Limit	Frequency Range (MHz)
26 Bandwidth	N/A	5150~5250
		5250~5350
		5500~5725
6 dB Bandwidth	>500kHz	5725~5850
99% Bandwidth	N/A	5150~5250
		5250~5350
		5500~5725
		5725~5850

8.2 Test Setup

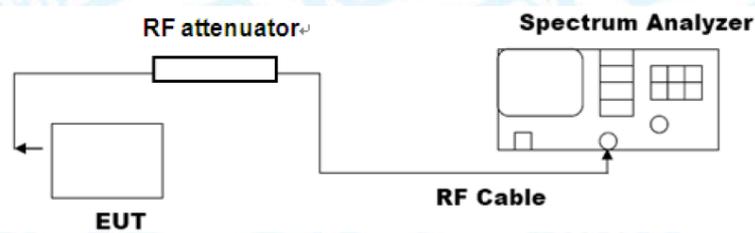

8.3 Test Procedure

---Emission bandwidth

● The procedure for this method is as follows:

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

NOTE—The automatic bandwidth measurement capability of a spectrum analyzer or an EMI receiver may be employed if it implements the functionality described in the preceding items.

---DTS bandwidth

● The steps for the first option are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

---occupied bandwidth

● The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Mode

Please refer to the description of test mode.

8.6 Test Data

Please refer to the Attachment D.

9. Maximum Conducted Output Power

9.1 Test Standard and Limit

9.1.1 Test Standard


RSS 247 (6.2.11&6.2.2.1&6.2.3.1&6.2.4.1)

FCC Part 15.407(a)

9.1.2 Test Limit

RSS-247				
Limit	Frequency Range(MHz)			
	5150~5250	5250~5350	5500~5725	5725~5850
Max Conducted TX Power	N/A	The maximum conducted output power shall not exceed 250 mW or 11 + 10 log10B, dBm		1 Watt (30dBm)
Max E.I.R.P	For other devices, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log10B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10B, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.		4 W (36 dBm) with 6 dBi antenna
TPC	NO	YES, if Max_EIRP ≥ 500 mW (27 dBm) and able to lower EIRP below 24dBm NO, if Max_EIRP < 500mW (27dBm)		NO
FCC Part 15 Subpart E(15.407)				
Limit	Frequency Range(MHz)			
	5150~5250	5250~5350	5500~5725	5725~5850
Max Conducted TX Power	Master Device: 1 Watt(30dBm) Client Device: 250mW(24dBm)	24dBm (250 mW) or 11 dBm+ 10 log B, whichever is lower (B= 26-dB emission BW)		1 Watt (30dBm)
Max E.I.R.P	4 W (36 dBm) with 6 dBi antenna 200 W (53 dBm) for fixed P-t-P application with 23 dBiantenna Additional rule for outdoor operation: Max_EIRP< 125 mW(21 dBm) at any elevation angle > 30°from horizon	1 W (30 dBm) with 6 dBi antenna		4 W (36 dBm) with 6 dBi antenna
TPC	NO	YES, if Max_EIRP ≥ 500 mW (27 dBm) and able to lower EIRP below 24dBm NO, if Max_EIRP < 500mW (27dBm)		NO

9.2 Test Setup

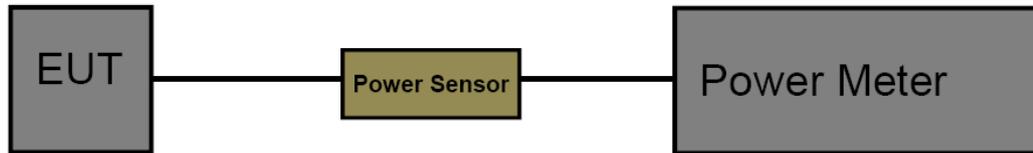

9.3 Test Procedure

- The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Mode

Please refer to the description of test mode.

9.6 Test Data

Please refer to the Attachment E.

10. Power Spectral Density Test

10.1 Test Standard and Limit

10.1.1 Test Standard


RSS 247 (6.2.11&6.2.2.1&6.2.3.1&6.2.4.1)

FCC Part 15.407(a)

10.1.2 Test Limit

Test Item	Limit		Frequency Range(MHz)
Power Spectral Density	FCC	Master Device: 17dBm/MHz Client Device: 11dBm/MHz	5150~5250
	IC	10dBm/MHz	
		11dBm/MHz	5250~5350
		11dBm/MHz	5500~5725
		30dBm/500kHz	5725~5850

10.2 Test Setup

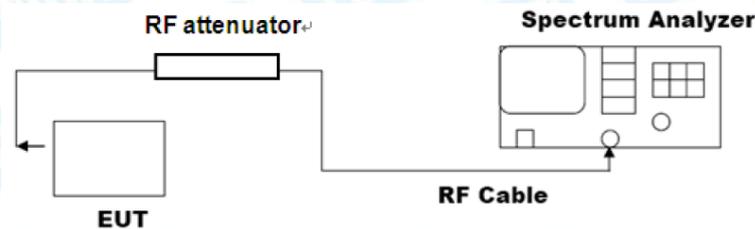

10.3 Test Procedure

● Notwithstanding that some regulatory requirements refer to peak power spectral density (PPSD), in some cases the intent is to measure the maximum value of the time average of the power spectral density during a period of continuous transmission. The procedure for this method is as follows:

- a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power..." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)
- b) Use the peak search function on the instrument to find the peak of the spectrum.
- c) Make the following adjustments to the peak value of the spectrum, if applicable:
 - 1) If method SA-2 or SA-2A was used, then add $[10 \log (1 / D)]$, where D is the duty cycle, to the peak of the spectrum.
 - 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and

power averaging.

d) The result is the PPSD.

e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities.⁹⁵ This requirement also permits use of resolution bandwidths less than 1 MHz"provided that the measured power is integrated to show the total power over the measurement bandwidth"(i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:

1) Set $RBW \geq 1 / T$, where T is defined in 12.2 a).

2) Set $VBW \geq [3 * RBW]$.

3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

10.4 Deviation From Test Standard

No deviation

10.5 Antenna Connected Construction

Please refer to the description of test mode.

10.6 Test Data

Please refer to the Attachment F.

11. Frequency Stability

11.1 Test Standard and Limit

11.1.1 Test Standard


RSS-Gen 8.11

FCC Part 15.407(g)

11.1.2 Test Limit

If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.

11.2 Test Setup

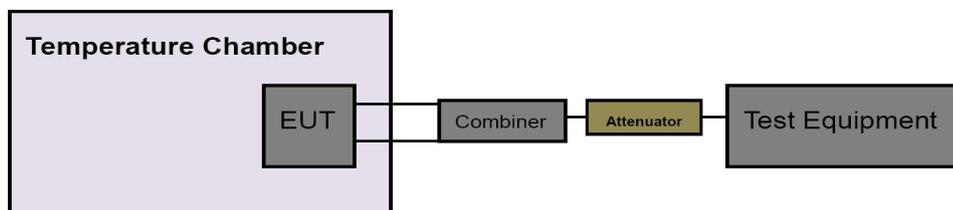

11.3 Test Procedure

● Determining compliance with the peak excursion requirement shall be done by confirming that the ratio of the maximum of the peak-max-hold spectrum to the maximum of the average spectrum for continuous transmission does not exceed the regulatory requirement.⁹⁶ The procedure for this method is as follows:

a) The following guidance for limiting the number of tests applies only to peak excursion measurements:

1) Testing each modulation mode on a single channel in a single operating band is sufficient to determine compliance with the peak excursion requirement. (If all modulation modes are not available on a single channel in a single band, then testing must be extended to other channels and bands as needed to ensure that all modulation modes are tested.)

2) Tests must include all variations in signal structure, such as:

i) All signal types [e.g., direct sequence spread spectrum (DSSS) and OFDM].

ii) All modulation types [e.g., binary phase-shift keying (BPSK), quadrature phase-shift keying (QPSK), 16-QAM, 64-QAM, and 256-QAM].

iii) All bandwidth modes.

iv) All variations in signal parameters (e.g., changes in subcarrier spacing or number of subcarriers).

3) For a given signal structure, testing of multiple error-correction coding rates is not required (e.g., 1/2, 2/3, and 3/4).

4) For MIMO devices, testing of a single output port is sufficient to determine compliance with the peak excursion requirement. If a given signal structure can be exercised with various combinations of spatial multiplexing (such as different numbers of spatial

streams), beamforming, and cyclic delay diversity, peak excursion tests are not required to include those variations.

b) The procedure is as follows:

- 1) Set the span of the spectrum analyzer or EMI receiver to view the entire emission bandwidth or occupied bandwidth.
- 2) Find the maximum of the peak-max-hold spectrum:
 - i) Set RBW = 1 MHz.
 - ii) VBW \square 3 MHz.
 - iii) Detector = peak.
 - iv) Trace mode = max-hold.
 - v) Allow the sweeps to continue until the trace stabilizes.
 - vi) Use the peak search function to find the peak of the spectrum.
- 3) Use the procedure found in 12.5 to measure the PPSD.
- 4) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

11.4 Deviation From Test Standard

No deviation

11.5 Antenna Connected Construction

Please refer to the description of test mode.

11.6 Test Data

Please refer to the Attachment G.

12. Antenna Requirement

12.1 Test Standard and Limit

12.1.1 Test Standard

RSS 247 6.8

FCC Part 15.203

12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2 Deviation From Test Standard

No deviation

12.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 2dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


12.4 Test Data

The EUT antenna is a FPC Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A-- Conducted Emission Test Data

Temperature:	24.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V 60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

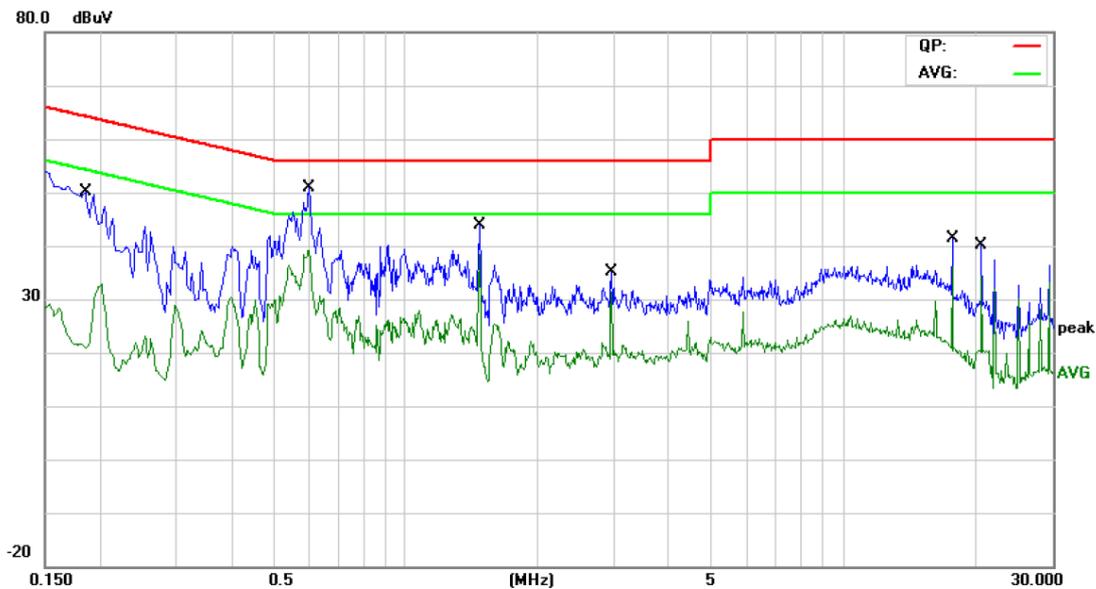


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1860	30.69	9.70	40.39	64.21	-23.82	QP
2		0.1860	10.84	9.70	20.54	54.21	-33.67	AVG
3		0.6020	37.66	9.70	47.36	56.00	-8.64	QP
4		0.6020	28.27	9.70	37.97	46.00	-8.03	AVG
5		1.4740	32.19	9.75	41.94	56.00	-14.06	QP
6	*	1.4740	28.92	9.75	38.67	46.00	-7.33	AVG
7		2.9500	24.76	9.89	34.65	56.00	-21.35	QP
8		2.9500	21.90	9.89	31.79	46.00	-14.21	AVG
9		17.6980	29.77	10.00	39.77	60.00	-20.23	QP
10		17.6980	25.90	10.00	35.90	50.00	-14.10	AVG
11		20.6460	28.57	10.02	38.59	60.00	-21.41	QP
12		20.6460	23.54	10.02	33.56	50.00	-16.44	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Temperature:	24.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V 60Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

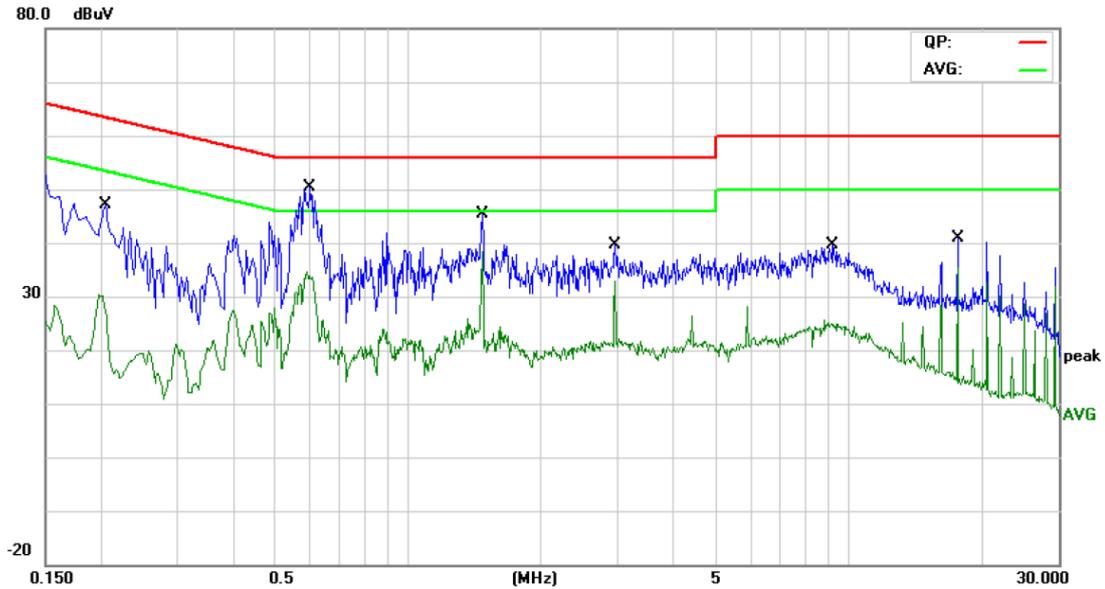

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.2060	28.44	9.80	38.24	63.36	-25.12	QP
2		0.2060	14.62	9.80	24.42	53.36	-28.94	AVG
3		0.5980	36.49	9.80	46.29	56.00	-9.71	QP
4		0.5980	24.14	9.80	33.94	46.00	-12.06	AVG
5		1.4740	33.76	9.80	43.56	56.00	-12.44	QP
6	*	1.4740	29.02	9.80	38.82	46.00	-7.18	AVG
7		2.9500	27.19	9.80	36.99	56.00	-19.01	QP
8		2.9500	22.08	9.80	31.88	46.00	-14.12	AVG
9		9.2220	20.52	9.90	30.42	60.00	-29.58	QP
10		9.2220	13.01	9.90	22.91	50.00	-27.09	AVG
11		17.6980	29.57	10.00	39.57	60.00	-20.43	QP
12		17.6980	25.40	10.00	35.40	50.00	-14.60	AVG

Remark:
 1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
 2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Attachment B--Unwanted Emissions Data

---Radiated Unwanted Emissions


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB Below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V 60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2		
Remark:	Only worse case is reported.		

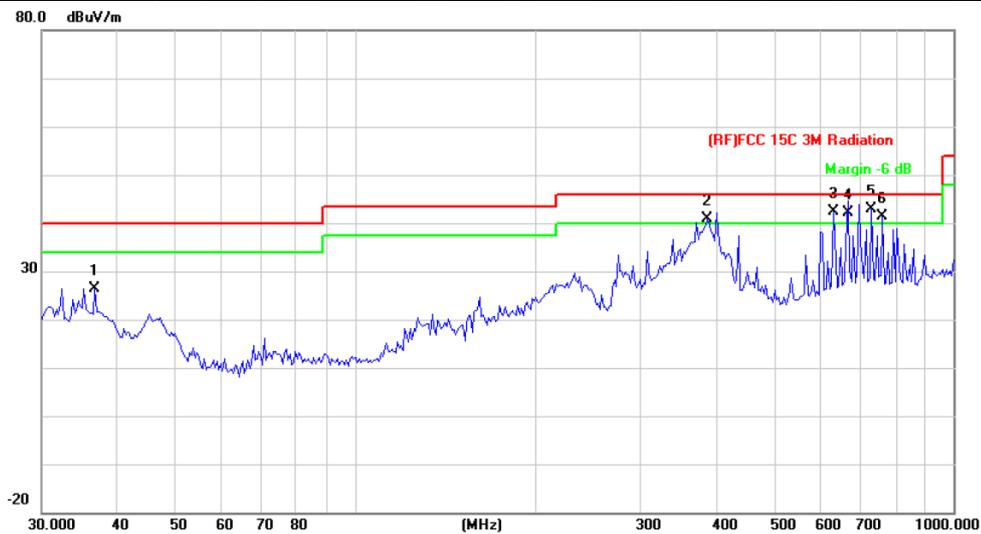


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		36.7662	43.95	-17.50	26.45	40.00	-13.55	peak
2	!	387.9920	53.70	-12.86	40.84	46.00	-5.16	peak
3	!	629.4772	50.44	-8.11	42.33	46.00	-3.67	peak
4	!	665.8035	49.82	-7.59	42.23	46.00	-3.77	QP
5	*	729.3583	49.67	-6.67	43.00	46.00	-3.00	peak
6	!	760.7036	47.74	-6.40	41.34	46.00	-4.66	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V 60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2		
Remark:	Only worse case is reported.		

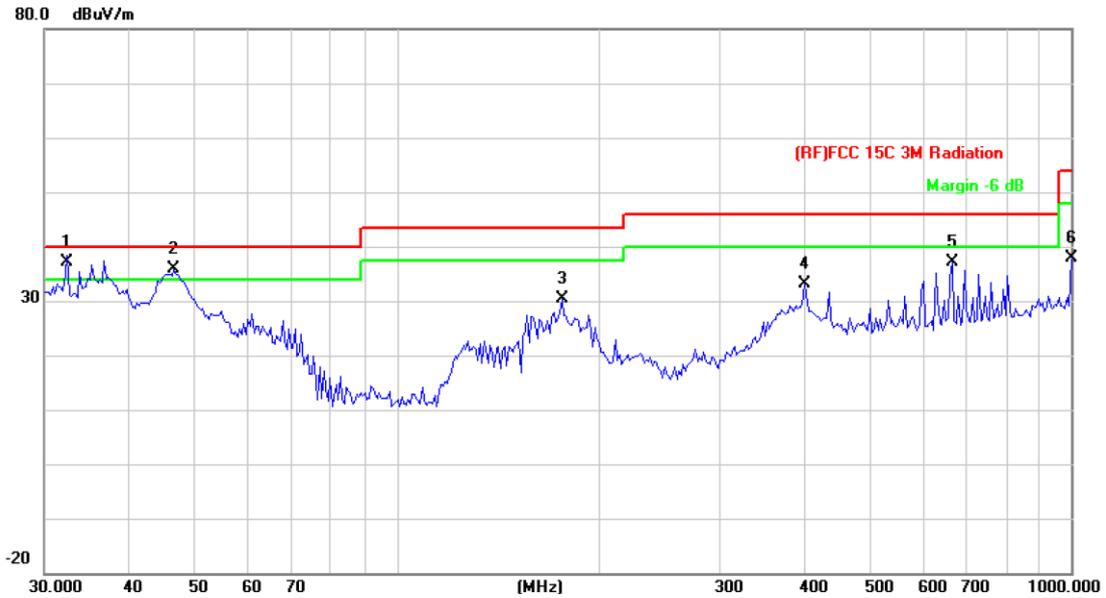

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	32.4059	51.86	-14.74	37.12	40.00	-2.88	QP
2	!	46.6664	57.81	-21.96	35.85	40.00	-4.15	peak
3		175.6516	50.63	-20.28	30.35	43.50	-13.15	peak
4		401.8385	45.44	-12.28	33.16	46.00	-12.84	peak
5		665.8035	44.63	-7.59	37.04	46.00	-8.96	peak
6		1000.0000	41.89	-3.90	37.99	54.00	-16.01	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Above 1GHz

5180MHz-5240MHz(U-NII-1)

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10360.224	42.30	18.05	60.35	68.30	-7.95	peak
2		10360.245	27.28	18.05	45.33	54.00	-8.67	AVG
Remark:								
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10360.124	27.07	18.05	45.12	54.00	-8.88	AVG
2		10360.142	41.20	18.05	59.25	68.30	-9.05	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10400.141	41.22	18.14	59.36	68.30	-8.94	peak
2	*	10400.241	28.19	18.14	46.33	54.00	-7.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10400.224	41.07	18.14	59.21	68.30	-9.09	peak
2	*	10400.525	27.22	18.14	45.36	54.00	-8.64	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10480.145	26.95	18.31	45.26	54.00	-8.74	AVG
2	*	10480.244	42.00	18.31	60.31	68.30	-7.99	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10480.124	40.93	18.31	59.24	68.30	-9.06	peak
2	*	10480.323	28.04	18.31	46.35	54.00	-7.65	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
							Detector	
1		10360.210	27.19	18.05	45.24	54.00	-8.76	AVG
2	*	10360.224	42.29	18.05	60.34	68.30	-7.96	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
							Detector	
1		10360.114	27.32	18.05	45.37	54.00	-8.63	AVG
2	*	10360.145	42.27	18.05	60.32	68.30	-7.98	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10400.124	41.08	18.14	59.22	68.30	-9.08	peak
2	*	10400.224	27.54	18.14	45.68	54.00	-8.32	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10400.323	42.17	18.14	60.31	68.30	-7.99	peak
2		10400.412	27.73	18.14	45.87	54.00	-8.13	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10480.241	41.44	18.31	59.75	68.30	-8.55	peak
2	*	10480.277	27.37	18.31	45.68	54.00	-8.32	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10480.351	42.14	18.31	60.45	68.30	-7.85	peak
2		10480.457	27.08	18.31	45.39	54.00	-8.61	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10360.144	42.19	18.05	60.24	68.30	-8.06	peak
2		10360.231	27.31	18.05	45.36	54.00	-8.64	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10360.241	28.28	18.05	46.33	54.00	-7.67	AVG
2		10360.325	42.19	18.05	60.24	68.30	-8.06	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)							
<hr/>								
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10400.024	27.18	18.14	45.32	54.00	-8.68	AVG
2	*	10400.241	42.11	18.14	60.25	68.30	-8.05	peak
<hr/>								
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)							
<hr/>								
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10400.023	42.10	18.14	60.24	68.30	-8.06	peak
2		10400.024	27.18	18.14	45.32	54.00	-8.68	AVG
<hr/>								
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11 ac(VHT20) Mode 5240MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10480.123	40.93	18.31	59.24	68.30	-9.06	peak
2	*	10480.241	27.02	18.31	45.33	54.00	-8.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10480.145	27.95	18.31	46.26	54.00	-7.74	AVG
2		10480.214	42.01	18.31	60.32	68.30	-7.98	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10380.224	27.12	18.09	45.21	54.00	-8.79	AVG
2		10380.524	41.15	18.09	59.24	68.30	-9.06	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10380.124	29.24	18.09	47.33	54.00	-6.67	AVG
2		10380.224	43.26	18.09	61.35	68.30	-6.95	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10460.234	26.95	18.27	45.22	54.00	-8.78	AVG
2	*	10460.241	42.04	18.27	60.31	68.30	-7.99	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10460.147	27.08	18.27	45.35	54.00	-8.65	AVG
2	*	10460.235	41.98	18.27	60.25	68.30	-8.05	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10380.214	41.23	18.09	59.32	68.30	-8.98	peak
2	*	10380.324	27.15	18.09	45.24	54.00	-8.76	AVG
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10380.121	42.15	18.09	60.24	68.30	-8.06	peak
2	*	10380.225	28.14	18.09	46.23	54.00	-7.77	AVG
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m) 4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 								

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10460.244	41.97	18.27	60.24	68.30	-8.06	peak
2	*	10460.351	27.96	18.27	46.23	54.00	-7.77	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10460.244	27.96	18.27	46.23	54.00	-7.77	AVG
2		10460.541	40.98	18.27	59.25	68.30	-9.05	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10420.124	28.04	18.19	46.23	54.00	-7.77	AVG
2		10420.234	42.04	18.19	60.23	68.30	-8.07	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10420.124	27.13	18.19	45.32	54.00	-8.68	AVG
2	*	10420.214	42.16	18.19	60.35	68.30	-7.95	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

5260MHz-5320MHz(U-NII-2A)

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10520.174	41.85	18.38	60.23	68.30	-8.07	peak
2	*	10520.244	27.95	18.38	46.33	54.00	-7.67	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10520.114	26.84	18.38	45.22	54.00	-8.78	AVG
2		10520.241	40.99	18.38	59.37	68.30	-8.93	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10560.314	43.53	18.43	61.96	68.30	-6.34	peak
2		10560.741	26.93	18.43	45.36	54.00	-8.64	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10560.225	26.80	18.43	45.23	54.00	-8.77	AVG
2	*	10560.327	41.88	18.43	60.31	68.30	-7.99	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10640.124	41.77	18.55	60.32	68.30	-7.98	peak
2		10640.234	26.68	18.55	45.23	54.00	-8.77	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10640.241	27.78	18.55	46.33	54.00	-7.67	AVG
2		10640.457	40.79	18.55	59.34	68.30	-8.96	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	10520.041	40.94	18.38	59.32	68.30	-8.98	peak
2	* 10520.524	26.85	18.38	45.23	54.00	-8.77	AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	* 10520.124	27.95	18.38	46.33	54.00	-7.67	AVG
2	10520.352	41.87	18.38	60.25	68.30	-8.05	peak
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10560.344	41.89	18.43	60.32	68.30	-7.98	peak
2	*	10560.541	27.80	18.43	46.23	54.00	-7.77	AVG
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10560.324	26.81	18.43	45.24	54.00	-8.76	AVG
2		10560.455	37.81	18.43	56.24	68.30	-12.06	peak
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>10640.141</td> <td>41.80</td> <td>18.55</td> <td>60.35</td> <td>68.30</td> <td>-7.95</td> <td>peak</td> </tr> <tr> <td>2</td> <td></td> <td>10640.244</td> <td>26.69</td> <td>18.55</td> <td>45.24</td> <td>54.00</td> <td>-8.76</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1	*	10640.141	41.80	18.55	60.35	68.30	-7.95	peak	2		10640.244	26.69	18.55	45.24	54.00	-8.76	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1	*	10640.141	41.80	18.55	60.35	68.30	-7.95	peak																															
2		10640.244	26.69	18.55	45.24	54.00	-8.76	AVG																															
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																																							

Temperature:	23.9°C	Relative Humidity:	42%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>10640.325</td> <td>41.77</td> <td>18.55</td> <td>60.32</td> <td>68.30</td> <td>-7.98</td> <td>peak</td> </tr> <tr> <td>2</td> <td></td> <td>10640.414</td> <td>26.69</td> <td>18.55</td> <td>45.24</td> <td>54.00</td> <td>-8.76</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1	*	10640.325	41.77	18.55	60.32	68.30	-7.98	peak	2		10640.414	26.69	18.55	45.24	54.00	-8.76	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1	*	10640.325	41.77	18.55	60.32	68.30	-7.98	peak																															
2		10640.414	26.69	18.55	45.24	54.00	-8.76	AVG																															
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																																							

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10520.241	27.95	18.38	46.33	54.00	-7.67	AVG
2		10520.355	41.94	18.38	60.32	68.30	-7.98	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10520.241	41.94	18.38	60.32	68.30	-7.98	peak
2		10520.325	26.95	18.38	45.33	54.00	-8.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)							
No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	
1	*	10560.124	27.90	18.43	46.33	54.00	-7.67	AVG
2		10560.352	39.89	18.43	58.32	68.30	-9.98	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)							
No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	
1	*	10560.352	42.80	18.43	61.23	68.30	-7.07	peak
2		10560.412	26.93	18.43	45.36	54.00	-8.64	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11 ac(VHT20) Mode 5320MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10640.325	41.67	18.55	60.22	68.30	-8.08	peak
2		10640.452	26.78	18.55	45.33	54.00	-8.67	AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10640.231	41.77	18.55	60.32	68.30	-7.98	peak
2	*	10640.412	27.78	18.55	46.33	54.00	-7.67	AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10540.124	41.69	18.41	60.10	68.30	-8.20	peak
2	*	10540.355	27.47	18.41	45.88	54.00	-8.12	AVG
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		10540.255	39.95	18.41	58.36	68.30	-9.94	peak
2	*	10540.477	27.92	18.41	46.33	54.00	-7.67	AVG
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		10620.012	26.72	18.52	45.24	54.00	-8.76	AVG
2	*	10620.033	41.73	18.52	60.25	68.30	-8.05	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	10620.124	27.72	18.52	46.24	54.00	-7.76	AVG
2		10620.324	41.70	18.52	60.22	68.30	-8.08	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10540.235	42.14	18.41	60.55	68.30	-7.75	peak
2		10540.354	26.92	18.41	45.33	54.00	-8.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10540.124	43.91	18.41	62.32	68.30	-5.98	peak
2		10540.325	27.81	18.41	46.22	54.00	-7.78	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
<hr/>							
No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	10620.325	26.81	18.52	45.33	54.00	-8.67	AVG
2	* 10620.418	41.83	18.52	60.35	68.30	-7.95	peak
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
<hr/>							
No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	10620.251	26.84	18.52	45.36	54.00	-8.64	AVG
2	* 10620.412	41.81	18.52	60.33	68.30	-7.97	peak
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10580.124	27.79	18.46	46.25	54.00	-7.75	AVG
2		10580.326	41.86	18.46	60.32	68.30	-7.98	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	10580.236	41.75	18.46	60.21	68.30	-8.09	peak
2		10580.246	26.80	18.46	45.26	54.00	-8.74	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

5500MHz-5720MHz(U-NII-2C)

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11000.125	41.19	19.03	60.22	68.30	-8.08	peak
2	*	11000.365	27.30	19.03	46.33	54.00	-7.67	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11000.202	27.22	19.03	46.25	54.00	-7.75	AVG
2		11000.324	41.29	19.03	60.32	68.30	-7.98	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG(dBμV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th>Detector</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>11160.123</td> <td>41.80</td> <td>19.22</td> <td>61.02</td> <td>68.30</td> <td>-7.28</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>11160.124</td> <td>29.15</td> <td>19.22</td> <td>48.37</td> <td>54.00</td> <td>-5.63</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		1		11160.123	41.80	19.22	61.02	68.30	-7.28	peak	2	*	11160.124	29.15	19.22	48.37	54.00	-5.63	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector																															
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB																																
1		11160.123	41.80	19.22	61.02	68.30	-7.28	peak																															
2	*	11160.124	29.15	19.22	48.37	54.00	-5.63	AVG																															
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																																							

Temperature:	23.9°C	Relative Humidity:	42%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th>Detector</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>11160.325</td> <td>41.14</td> <td>19.22</td> <td>60.36</td> <td>68.30</td> <td>-7.94</td> <td>peak</td> </tr> <tr> <td>2</td> <td></td> <td>11160.341</td> <td>26.14</td> <td>19.22</td> <td>45.36</td> <td>54.00</td> <td>-8.64</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		1	*	11160.325	41.14	19.22	60.36	68.30	-7.94	peak	2		11160.341	26.14	19.22	45.36	54.00	-8.64	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector																															
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB																																
1	*	11160.325	41.14	19.22	60.36	68.30	-7.94	peak																															
2		11160.341	26.14	19.22	45.36	54.00	-8.64	AVG																															
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 																																							

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11a Mode 5720MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11440.123	38.82	19.54	58.36	68.30	-9.94	peak
2	*	11440.254	25.77	19.54	45.31	54.00	-8.69	AVG
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11a Mode 5720MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	11440.241	26.78	19.54	46.32	54.00	-7.68	AVG
2		11440.255	40.79	19.54	60.33	68.30	-7.97	peak
<p>Remark:</p> <ol style="list-style-type: none"> 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit. 								

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		11000.235	26.58	19.03	45.61	54.00	-8.39
2	*	11000.451	42.20	19.03	61.23	68.30	-7.07
							AVG
							peak
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11 n(HT20) Mode 5500MHz (U-NII-2C)						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		11000.474	40.29	19.03	59.32	68.30	-8.98
2	*	11000.587	26.32	19.03	45.35	54.00	-8.65
							peak
							AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	11160.236	41.03	19.22	60.25	68.30	-8.05	peak
2		11160.351	26.11	19.22	45.33	54.00	-8.67	AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11160.254	40.10	19.22	59.32	68.30	-8.98	peak
2	*	11160.354	27.11	19.22	46.33	54.00	-7.67	AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT20) Mode 5720MHz (U-NII-2C)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11440.352	40.33	19.54	59.87	68.30	-8.43	peak
2		11440.412	25.79	19.54	45.33	54.00	-8.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT20) Mode 5720MHz (U-NII-2C)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11440.234	25.70	19.54	45.24	54.00	-8.76	AVG
2		11440.357	39.80	19.54	59.34	68.30	-8.96	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11000.245	25.31	19.03	44.34	54.00	-9.66	AVG
2	*	11000.325	42.96	19.03	61.99	68.30	-6.31	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(VHT20) Mode 5500MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11000.234	25.31	19.03	44.34	54.00	-9.66	AVG
2	*	11000.451	39.61	19.03	58.64	68.30	-9.66	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11 ac(VHT20) Mode 5580MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11160.365	38.10	19.22	57.32	68.30	-10.98	peak
2	*	11160.524	25.34	19.22	44.56	54.00	-9.44	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11 ac(VHT20) Mode 5580MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11160.254	41.02	19.22	60.24	68.30	-8.06	peak
2		11160.325	26.10	19.22	45.32	54.00	-8.68	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11 ac(VHT20) Mode 5720MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		11440.124	39.80	19.54	59.34	68.30	-8.96	peak
2	*	11440.532	27.83	19.54	47.37	54.00	-6.63	AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11 ac(VHT20) Mode 5720MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	11440.235	25.69	19.54	45.23	54.00	-8.77	AVG
2		11440.365	38.77	19.54	58.31	68.30	-9.99	peak
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11020.124	42.50	19.06	61.56	68.30	-6.74	peak
2		11020.524	27.29	19.06	46.35	54.00	-7.65	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11020.125	27.30	19.06	46.36	54.00	-7.64	AVG
2	*	11020.344	42.18	19.06	61.24	68.30	-7.06	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	11100.235	27.20	19.15	46.35	54.00	-7.65	AVG
2		11100.254	41.09	19.15	60.24	68.30	-8.06	peak
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)							
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	11100.235	26.75	19.15	45.90	54.00	-8.10	AVG
2		11100.241	40.19	19.15	59.34	68.30	-8.96	peak
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT40) Mode 5710MHz (U-NII-2C)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11420.356	26.71	19.52	46.23	54.00	-7.77	AVG
2		11420.524	40.69	19.52	60.21	68.30	-8.09	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT40) Mode 5710MHz (U-NII-2C)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11420.235	40.85	19.52	60.37	68.30	-7.93	peak
2		11420.354	25.81	19.52	45.33	54.00	-8.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11019.125	25.30	19.05	44.35	54.00	-9.65	AVG
2		11019.253	39.11	19.05	58.16	68.30	-10.14	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11020.235	41.26	19.06	60.32	68.30	-7.98	peak
2		11020.325	26.27	19.06	45.33	54.00	-8.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11100.352	40.09	19.15	59.24	68.30	-9.06	peak
2	*	11100.452	26.07	19.15	45.22	54.00	-8.78	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11100.365	25.19	19.15	44.34	54.00	-9.66	AVG
2	*	11100.542	41.07	19.15	60.22	68.30	-8.08	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11420.231	40.72	19.52	60.24	68.30	-8.06	peak
2		11420.365	26.17	19.52	45.69	54.00	-8.31	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5710MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11420.253	26.84	19.52	46.36	54.00	-7.64	AVG
2	*	11420.523	41.74	19.52	61.26	68.30	-7.04	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C		Relative Humidity:	42%			
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	*	11060.326	29.21	19.11	48.32	54.00	-5.68 AVG
2		11060.365	42.14	19.11	61.25	68.30	-7.05 peak
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C		Relative Humidity:	42%			
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		11060.235	26.14	19.11	45.25	54.00	-8.75 AVG
2	*	11060.532	41.22	19.11	60.33	68.30	-7.97 peak
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11380.254	25.86	19.47	45.33	54.00	-8.67	AVG
2	*	11380.365	40.86	19.47	60.33	68.30	-7.97	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5690MHz (U-NII-2C)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11380.231	41.43	19.47	60.90	68.30	-7.40	peak
2		11380.235	25.76	19.47	45.23	54.00	-8.77	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

5745MHz-5825MHz(U-NII-3)

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11490.532	25.63	19.60	45.23	54.00	-8.77	AVG
2		11490.566	39.75	19.60	59.35	68.30	-8.95	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11490.251	40.72	19.60	60.32	68.30	-7.98	peak
2	*	11490.365	26.73	19.60	46.33	54.00	-7.67	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)							
No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	11570.457	40.86	19.68	60.54	68.30	-7.76	peak
2		11570.524	26.02	19.68	45.70	54.00	-8.30	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)							
No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		11570.254	26.01	19.68	45.69	54.00	-8.31	AVG
2	*	11570.523	40.57	19.68	60.25	68.30	-8.05	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
							Detector	
1		11650.362	24.54	19.76	44.30	54.00	-9.70	AVG
2	*	11650.524	40.48	19.76	60.24	68.30	-8.06	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
							Detector	
1		11650.413	26.60	19.76	46.36	54.00	-7.64	AVG
2	*	11650.524	41.13	19.76	60.89	68.30	-7.41	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11490.124	26.75	19.60	46.35	54.00	-7.65	AVG
2		11490.352	40.96	19.60	60.56	68.30	-7.74	peak
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11490.245	26.09	19.60	45.69	54.00	-8.31	AVG
2	*	11490.365	40.97	19.60	60.57	68.30	-7.73	peak
Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11570.237	41.87	19.68	61.55	68.30	-6.75	peak
2		11570.525	26.67	19.68	46.35	54.00	-7.65	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11570.254	40.57	19.68	60.25	68.30	-8.05	peak
2		11570.365	25.65	19.68	45.33	54.00	-8.67	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11650.413	40.59	19.76	60.35	68.30	-7.95	peak
2		11650.523	26.08	19.76	45.84	54.00	-8.16	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11650.352	25.61	19.76	45.37	54.00	-8.63	AVG
2	*	11650.366	40.49	19.76	60.25	68.30	-8.05	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11490.235	40.75	19.60	60.35	68.30	-7.95	peak
2	*	11490.254	26.75	19.60	46.35	54.00	-7.65	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11490.412	40.73	19.60	60.33	68.30	-7.97	peak
2	*	11490.524	26.73	19.60	46.33	54.00	-7.67	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11570.325	40.65	19.68	60.33	68.30	-7.97	peak
2		11570.524	25.56	19.68	45.24	54.00	-8.76	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11570.123	26.00	19.68	45.68	54.00	-8.32	AVG
2	*	11570.523	40.67	19.68	60.35	68.30	-7.95	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11650.124	40.56	19.76	60.32	68.30	-7.98	peak
2		11650.532	25.57	19.76	45.33	54.00	-8.67	AVG
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11650.125	25.60	19.76	45.36	54.00	-8.64	AVG
2	*	11650.352	40.56	19.76	60.32	68.30	-7.98	peak
Remark:								
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)								
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)								
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)								
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.								
5. No report for the emission which more than 20dB below the prescribed limit.								

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		11510.453	25.60	19.63	45.23	54.00	-8.77
							AVG
2	*	11510.523	41.72	19.63	61.35	68.30	-6.95
							peak
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		11510.235	26.03	19.63	45.66	54.00	-8.34
							AVG
2	*	11510.524	40.62	19.63	60.25	68.30	-8.05
							peak
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)							
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		11590.251	40.66	19.69	60.35	68.30	-7.95
2	*	11590.523	26.64	19.69	46.33	54.00	-7.67
							peak
							AVG
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
<hr/>							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
							Detector
1		11590.365	25.67	19.69	45.36	54.00	-8.64
2	*	11590.425	40.66	19.69	60.35	68.30	-7.95
							peak
							AVG
<hr/>							
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		11510.415	40.72	19.63	60.35	68.30	-7.95 peak
2	*	11510.562	26.72	19.63	46.35	54.00	-7.65 AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.			

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		11510.416	40.70	19.63	60.33	68.30	-7.97 peak
2	*	11510.635	26.72	19.63	46.35	54.00	-7.65 AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.			

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Horizontal							
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	11590.365	40.66	19.69	60.35	68.30	-7.95	peak
2		11590.451	26.29	19.69	45.98	54.00	-8.02	AVG
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)				

Temperature:	23.9°C	Relative Humidity:	42%					
Test Voltage:	AC 120V/60Hz							
Ant. Pol.	Vertical							
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		11590.457	25.63	19.69	45.32	54.00	-8.68	AVG
2	*	11590.562	40.68	19.69	60.37	68.30	-7.93	peak
				Remark: 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB) 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV) 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m) 4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. 5. No report for the emission which more than 20dB below the prescribed limit.				

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		11550.235	40.58	19.66	60.24	68.30	-8.06 peak
2	*	11550.356	26.99	19.66	46.65	54.00	-7.35 AVG
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

Temperature:	23.9°C	Relative Humidity:	42%				
Test Voltage:	AC 120V/60Hz						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		11550.457	25.71	19.66	45.37	54.00	-8.63 AVG
2	*	11550.636	40.69	19.66	60.35	68.30	-7.95 peak
Remark:							
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)							
2. Peak/AVG (dBµV/m)= Corr. (dB/m)+ Read Level (dBµV)							
3. Margin (dB) = Peak/AVG (dBµV/m)-Limit PK/AVG(dBµV/m)							
4. The tests evaluated1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz.							
5. No report for the emission which more than 20dB below the prescribed limit.							

---Conducted Unwanted Emissions


TestMode	Antenna	Channel	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	30~1000	967.59	-51.35	<=-27	PASS
			1000~40000	39963.6	-38.46	<=-27	PASS
		5200	30~1000	994.97	-53.14	<=-27	PASS
			1000~40000	39946.7	-38.8	<=-27	PASS
		5240	30~1000	882.62	-53.11	<=-27	PASS
			1000~40000	39051	-39.54	<=-27	PASS
		5260	30~1000	889.76	-52.72	<=-27	PASS
			1000~40000	39945.4	-38.81	<=-27	PASS
		5280	30~1000	717.17	-52.09	<=-27	PASS
			1000~40000	39938.9	-39.32	<=-27	PASS
		5320	30~1000	962.28	-54.4	<=-27	PASS
			1000~40000	39957.1	-40.04	<=-27	PASS
		5500	30~1000	890.41	-53.83	<=-27	PASS
			1000~40000	39598.3	-39.45	<=-27	PASS
		5580	30~1000	863.51	-53.08	<=-27	PASS
			1000~40000	39025	-39.02	<=-27	PASS
		5720	30~1000	860.92	-53.41	<=-27	PASS
			1000~40000	39871.3	-37.97	<=-27	PASS
		5745	30~1000	693.57	-53.46	<=-27	PASS
			1000~40000	39925.9	-39.01	<=-27	PASS
		5785	30~1000	959.63	-53.36	<=-27	PASS
			1000~40000	39963.6	-39.12	<=-27	PASS
		5825	30~1000	861.18	-53.04	<=-27	PASS
			1000~40000	39983.1	-38.6	<=-27	PASS
11N20SISO	Ant1	5180	30~1000	974.93	-52.5	<=-27	PASS
			1000~40000	39972.7	-38.8	<=-27	PASS
		5200	30~1000	958.92	-53.28	<=-27	PASS
			1000~40000	39924.6	-38.93	<=-27	PASS
		5240	30~1000	960.86	-53.59	<=-27	PASS
			1000~40000	39957.1	-38.42	<=-27	PASS
		5260	30~1000	949.35	-53.42	<=-27	PASS
			1000~40000	39474.8	-39.16	<=-27	PASS
		5280	30~1000	998.66	-53.85	<=-27	PASS
			1000~40000	39918.1	-39.47	<=-27	PASS
		5320	30~1000	753.42	-54.28	<=-27	PASS
			1000~40000	39994.8	-39.73	<=-27	PASS
		5500	30~1000	958.53	-54.62	<=-27	PASS
			1000~40000	39990.9	-38.91	<=-27	PASS
		5580	30~1000	552.86	-53.16	<=-27	PASS
			1000~40000	39632.1	-37.18	<=-27	PASS

		5720	30~1000	512.7	-53.67	<=-27	PASS
			1000~40000	39951.9	-39.22	<=-27	PASS
		5745	30~1000	88.21	-53.96	<=-27	PASS
			1000~40000	39935	-38.79	<=-27	PASS
		5785	30~1000	709.93	-53.59	<=-27	PASS
			1000~40000	39993.5	-39.67	<=-27	PASS
5825	30~1000	523.44	-53.89	<=-27	PASS		
	1000~40000	39983.1	-37.94	<=-27	PASS		
11N40SISO	Ant1	5190	30~1000	637.93	-53.33	<=-27	PASS
			1000~40000	39074.4	-39.65	<=-27	PASS
		5230	30~1000	865.64	-53.86	<=-27	PASS
			1000~40000	39646.4	-39.22	<=-27	PASS
		5270	30~1000	860.18	-53.4	<=-27	PASS
			1000~40000	39650.3	-39.63	<=-27	PASS
		5310	30~1000	889.7	-53.57	<=-27	PASS
			1000~40000	39751.7	-38.96	<=-27	PASS
		5510	30~1000	580.83	-54.42	<=-27	PASS
			1000~40000	39984.4	-39.88	<=-27	PASS
		5550	30~1000	981.23	-53.64	<=-27	PASS
			1000~40000	39613.9	-38.5	<=-27	PASS
		5710	30~1000	867.75	-53.37	<=-27	PASS
			1000~40000	39966.2	-39.21	<=-27	PASS
		5755	30~1000	508.7	-53.11	<=-27	PASS
			1000~40000	39091.3	-38.82	<=-27	PASS
5795	30~1000	967.3	-53.87	<=-27	PASS		
	1000~40000	39964.9	-39.56	<=-27	PASS		
11AC20SISO	Ant1	5180	30~1000	963.16	-51.39	<=-27	PASS
			1000~40000	39502.1	-38.99	<=-27	PASS
		5200	30~1000	892.9	-51.79	<=-27	PASS
			1000~40000	39985.7	-38.84	<=-27	PASS
		5240	30~1000	723.61	-54.17	<=-27	PASS
			1000~40000	39997.4	-37.94	<=-27	PASS
		5260	30~1000	586.23	-53.47	<=-27	PASS
			1000~40000	39468.3	-39.02	<=-27	PASS
		5280	30~1000	201.7	-54.37	<=-27	PASS
			1000~40000	39966.2	-38.8	<=-27	PASS
		5320	30~1000	710.64	-53.35	<=-27	PASS
			1000~40000	39675	-39.79	<=-27	PASS
5500	30~1000	812	-54.16	<=-27	PASS		
	1000~40000	39522.9	-38.63	<=-27	PASS		
5580	30~1000	859.92	-52.93	<=-27	PASS		
	1000~40000	39728.3	-39.35	<=-27	PASS		
5720	30~1000	936.52	-52.98	<=-27	PASS		


		5745	1000~40000	39525.5	-38.92	<=-27	PASS		
			30~1000	836.32	-53.79	<=-27	PASS		
		5785	1000~40000	39551.5	-39.21	<=-27	PASS		
			30~1000	863.8	-53.44	<=-27	PASS		
		5825	1000~40000	39547.6	-38.95	<=-27	PASS		
			30~1000	960.05	-53.03	<=-27	PASS		
11AC40SISO	Ant1	5190	1000~40000	39818	-39.14	<=-27	PASS		
			30~1000	705.47	-53.07	<=-27	PASS		
		5230	1000~40000	39528.1	-38.66	<=-27	PASS		
			30~1000	520.56	-54	<=-27	PASS		
		5270	1000~40000	39998.7	-38.27	<=-27	PASS		
			30~1000	934.58	-53.99	<=-27	PASS		
		5310	1000~40000	39910.3	-39.12	<=-27	PASS		
			30~1000	517.13	-53.23	<=-27	PASS		
		5510	1000~40000	39710.1	-39.31	<=-27	PASS		
			30~1000	968.3	-53.12	<=-27	PASS		
		5550	1000~40000	39955.8	-38.76	<=-27	PASS		
			30~1000	902.15	-53.63	<=-27	PASS		
		5710	1000~40000	39681.5	-38.23	<=-27	PASS		
			30~1000	509.86	-53.15	<=-27	PASS		
		5755	1000~40000	39767.3	-39.55	<=-27	PASS		
			30~1000	864.25	-53.54	<=-27	PASS		
		5795	1000~40000	39949.3	-39.33	<=-27	PASS		
			30~1000	868.17	-54.03	<=-27	PASS		
		11AC80SISO	Ant1	5210	1000~40000	39989.6	-39.01	<=-27	PASS
					30~1000	988.99	-53.25	<=-27	PASS
				5290	1000~40000	39976.6	-39.25	<=-27	PASS
					30~1000	865.39	-53.26	<=-27	PASS
				5530	1000~40000	39756.9	-39.73	<=-27	PASS
					30~1000	900.72	-53.74	<=-27	PASS
5690	1000~40000			39989.6	-38.82	<=-27	PASS		
	30~1000			894.74	-52.66	<=-27	PASS		
5775	1000~40000			39499.5	-39.69	<=-27	PASS		
	30~1000			860.92	-52.98	<=-27	PASS		
					1000~40000	39673.7	-39.32	<=-27	PASS

Test Graphs

11A_Ant1_5180_30~1000

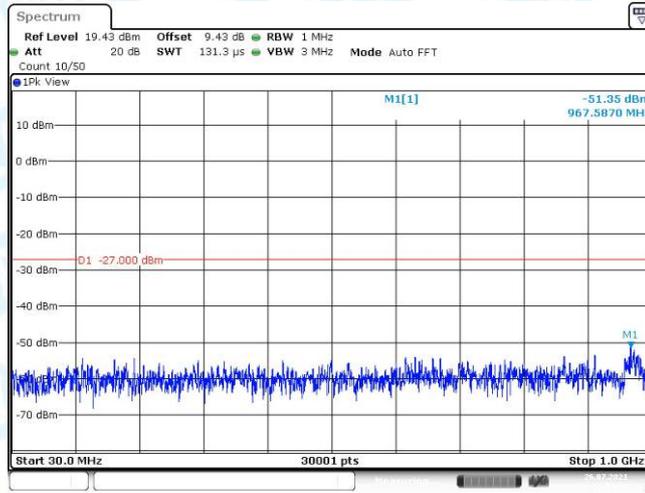

11A_Ant1_5180_1000~40000

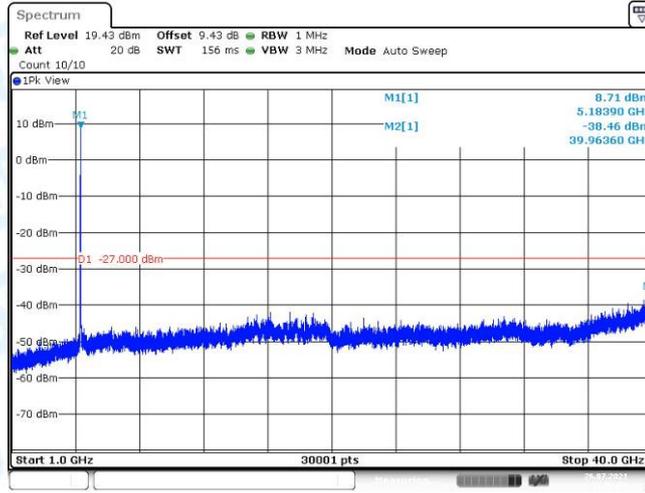

11A_Ant1_5200_30~1000

