



RADIO TEST REPORT

Report No.: STS2111209W08

Issued for

Shenzhen Grand Time Technology Co.,Ltd
Unit 1201, 12th floor, Konka R&D Building, Science and
Technology South 12th Road, Nanshan District, Shenzhen,
China

Product Name:	4G LTE POC Radio
Brand Name:	Grandtime
Model Name:	F39
Series Model:	N/A
FCC ID:	2AM6P-F39
Test Standard:	FCC Part 22H and 24E

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.



**TEST RESULT CERTIFICATION**

Applicant's Name: Shenzhen Grand Time Technology Co.,Ltd
Address.....: Unit 1201, 12th floor, Konka R&D Building, Science and Technology South 12th Road, Nanshan District, Shenzhen, China
Manufacturer's Name: Shenzhen Grand Time Technology Co.,Ltd
Address.....: Unit 1201, 12th floor, Konka R&D Building, Science and Technology South 12th Road, Nanshan District, Shenzhen, China

Product Description

Product Name: 4G LTE POC Radio
Brand Name: Grandtime
Model Name.....: F39
Series Model: N/A
Test Standards: FCC Part 22H and 24E
Test Procedure: KDB 971168 D01 v03r01,ANSI C63.26(2015)

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date of receipt of test item: 12 Dec. 2021
Date (s) of performance of tests : 12 Dec. 2021 ~ 05 July 2022
Date of Issue: 05 July 2022
Test Result: Pass

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
1 INTRODUCTION	6
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 PRODUCT INFORMATION	7
3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
4 MEASUREMENT INSTRUMENTS	9
5 TEST ITEMS	10
5.1 CONDUCTED OUTPUT POWER&TRANSMITTER RADIATED POWER	10
5.2 PEAK TO AVERAGE RATIO	15
5.4 FREQUENCY STABILITY	16
5.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	21
5.6 BAND EDGE	22
5.7 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	23
APPENDIX-PHOTOS OF TEST SETUP	37

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	05 July 2022	STS2111209W08	ALL	Initial Issue





SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26(2015)

FCC Rules	Test Description	Test Limit	Test Result	Reference
2.1046	Conducted Output Power	Reporting Only	PASS	
22.913d 24.232d	Peak-to-Average Ratio	< 13 dB	PASS	
2.1046 22.913 24.232	Effective Radiated Power/Equivalent Isotropic Radiated Power	< 7 Watts max. ERP(Part 22) < 2 Watts max. EIRP(Part 24)	PASS	
2.1049 22.917 24.238	Occupied Bandwidth	Reporting Only	PASS	
2.1055 22.355 24.235	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)	PASS	
2.1051 22.917 24.238	Spurious Emission at Antenna Terminals	< 43+10log10(P[Watts])	PASS	
2.1053 22.917 24.238	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	
2.1051 22.917 24.238	Band Edge	< 43+10log10(P[Watts])	PASS	



1 INTRODUCTION

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.87\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.895\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.09\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.92\text{dB}$
6	All emissions, radiated >6G	$\pm 5.49\text{dB}$
7	Conducted Emission (9KHz-30MHz)	$\pm 2.73\text{dB}$



2 PRODUCT INFORMATION

Product Name	4G LTE POC Radio
Trade Name	Grandtime
Model Name	F39
Series Model	N/A
Model Difference	N/A
Tx Frequency:	GSM/GPRS/EDGE: 850: 824 MHz ~ 849MHz 1900: 1850 MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz
Rx Frequency:	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz
Max RF Output Power:	GSM850:32.45dBm, PCS1900:31.59dBm GPRS850(1-Slot):32.22dBm, GPRS1900(1-Slot):31.48dBm GPRS850(2-Slot):31.74dBm, GPRS1900(2-Slot):31.05dBm GPRS850(3-Slot):31.28dBm, GPRS1900(3-Slot):30.61dBm GPRS850(4-Slot):30.81dBm, GPRS1900(4-Slot):30.16dBm EDGE 850(1-Slot):32.41dBm, EDGE 1900(1-Slot):31.42dBm EDGE 850(2-Slot):31.70dBm, EDGE 1900(2-Slot):30.70dBm EDGE 850(3-Slot):30.97dBm, EDGE 1900(3-Slot):29.98dBm EDGE 850(4-Slot):30.20dBm, EDGE 1900(4-Slot):29.24dBm WCDMA Band V:22.05dBm, WCDMA Band II:22.73dBm
Type of Emission:	GSM(850): 253KGXW; PCS(1900): 252KGXW GPRS(850): 244KGXW; GPRS(1900): 248KGXW EDGE(850): 252KG7W; EDGE(1900): 255KG7W WCDMA850: 4M20F9W WCDMA1900: 4M19F9W
Modulation Characteristics:	GMSK for GSM/GPRS; GMSK and 8PSK for EDGE WCDMA: QPSK; HSDPA:QPSK/16QAM; HSUPA:BPSK
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested.
Antenna:	PIFA
Antenna gain:	0.8dBi
Battery parameter:	Rated Voltage: 3.8V Charge Limit Voltage:4.35V Capacity: 5000mA
Adapter:	Input: AC 100-240 50/60Hz 0.35A Output: DC 5.0V 2000mA



GPRS/EDGE Class:	Multi-Class12
Extreme Vol. Limits:	DC 3.6V~ DC 4.35V(Normal: DC 3.8V)
Extreme Temp. Tolerance:	-10℃ to +50℃
Hardware version number:	F39-V1.1
Software version number:	DQSD_F39_V01
** Note: The High Voltage 4.35V and Low Voltage 3.6V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage, the antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.	

3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

	TEST MODES	
	RADIATED TCS	CONDUCTED TCS
BAND		
GSM 850	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
GSM 1900	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
WCDMA BAND V	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND II	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK



4 MEASUREMENT INSTRUMENTS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2021.09.30	2022.09.29
Signal Analyzer	R&S	FSV 40-N	101823	2021.09.30	2022.09.29
Signal Generator	Agilent	83752A	3610A02740	2021.09.30	2022.09.29
Wireless Communications Test Set	R&S	CMW 500	131428	2022.03.01	2023.02.28
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2021.10.11	2023.10.10
Bilog Antenna	TESEQ	CBL6111D	45873	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1343	2020.10.12	2022.10.11
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2021.10.08	2022.10.07
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2021.09.30	2022.09.29
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2021.09.28	2022.09.27
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Temperature & Humidity	HH660	Mieo	N/A	2021.10.09	2022.10.08
Test SW	BALUN	BL410-E/18.905			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Universal Radio communication tester	R&S	CMU200	111058	2021.09.29	2022.09.28
Wireless Communications Test Set	R&S	CMW 500	131428	2022.03.01	2023.02.28
Signal Analyzer	Agilent	N9020A	MY52440124	2022.03.01	2023.02.28
Temperature & Humidity test chamber	Safety test	AG80L	171200018	2022.03.01	2023.02.28
Programmable power supply	Agilent	E3642A	MY40002025	2021.10.08	2022.10.07
Temperature & Humidity	SW-108	SuWei	N/A	2022.03.02	2023.03.01
Test SW	FARAD	LZ-RF /LzRf-3A3			

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.

5 TEST ITEMS

5.1 CONDUCTED OUTPUT POWER&TRANSMITTER RADIATED POWER

TEST OVERVIEW

CONDUCTED OUTPUT POWER:

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

TRANSMITTER RADIATED POWER (EIRP/ERP)

Determining ERP and/or EIRP from conducted RF output power measurements according to ANSI C63.26 2015 Section 5.2.5.5.

In many cases, RF output power limits are specified in terms of the ERP or the EIRP. Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are defined as the product of the power supplied to the antenna and its gain (relative to a dipole antenna in the case of ERP, and relative to an isotropic antenna in the case of EIRP); however, when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts). The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

(1) $ERP \text{ or } EIRP = P_{Meas} + GT$

$$ERP = EIRP - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

GT gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

For devices utilizing multiple antennas, see 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

The following equations demonstrate the mathematical relationship between ERP and EIRP:


a) $ERP = EIRP - 2.15$, where ERP and EIRP are expressed in consistent units.

b) $EIRP = ERP + 2.15$, where ERP and EIRP are expressed in consistent units.

TEST PROCEDURES

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

TEST SETUP



TEST RESULT

GSM 850							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit (W)	ERP Limit (dBm)	Conclusion
GSM (GMSK,1-Slot)	824.2	32.45	0.80	31.10	7.00	38.45	PASS
	836.6	32.42	0.80	31.07	7.00	38.45	PASS
	848.8	31.66	0.80	30.31	7.00	38.45	PASS
GPRS (GMSK,1-Slot)	824.2	32.22	0.80	30.87	7.00	38.45	PASS
	836.6	31.45	0.80	30.10	7.00	38.45	PASS
	848.8	31.52	0.80	30.17	7.00	38.45	PASS
GPRS (GMSK,2-Slot)	824.2	31.74	0.80	30.39	7.00	38.45	PASS
	836.6	30.95	0.80	29.60	7.00	38.45	PASS
	848.8	31.07	0.80	29.72	7.00	38.45	PASS
GPRS (GMSK,3-Slot)	824.2	31.28	0.80	29.93	7.00	38.45	PASS
	836.6	30.51	0.80	29.16	7.00	38.45	PASS
	848.8	30.60	0.80	29.25	7.00	38.45	PASS
GPRS (GMSK,4-Slot)	824.2	30.81	0.80	29.46	7.00	38.45	PASS
	836.6	30.10	0.80	28.75	7.00	38.45	PASS
	848.8	30.14	0.80	28.79	7.00	38.45	PASS
EGPRS (8PSK,1-Slot)	824.2	31.32	0.80	29.97	7.00	38.45	PASS
	836.6	32.41	0.80	31.06	7.00	38.45	PASS
	848.8	31.34	0.80	29.99	7.00	38.45	PASS
EGPRS (8PSK,2-Slot)	824.2	30.58	0.80	29.23	7.00	38.45	PASS
	836.6	31.70	0.80	30.35	7.00	38.45	PASS
	848.8	30.62	0.80	29.27	7.00	38.45	PASS
EGPRS (8PSK,3-Slot)	824.2	29.86	0.80	28.51	7.00	38.45	PASS
	836.6	30.97	0.80	29.62	7.00	38.45	PASS
	848.8	29.86	0.80	28.51	7.00	38.45	PASS
EGPRS (8PSK,4-Slot)	824.2	29.14	0.80	27.79	7.00	38.45	PASS
	836.6	30.20	0.80	28.85	7.00	38.45	PASS
	848.8	29.09	0.80	27.74	7.00	38.45	PASS



PCS 1900							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit (W)	EIRP Limit (dBm)	Conclusion
GSM (GMSK,1-Slot)	1850.2	31.13	0.80	31.93	2.00	33.01	PASS
	1880.0	31.16	0.80	31.96	2.00	33.01	PASS
	1909.8	31.59	0.80	32.39	2.00	33.01	PASS
GPRS (GMSK,1-Slot)	1850.2	31.11	0.80	31.91	2.00	33.01	PASS
	1880.0	31.13	0.80	31.93	2.00	33.01	PASS
	1909.8	31.48	0.80	32.28	2.00	33.01	PASS
GPRS (GMSK,2-Slot)	1850.2	30.67	0.80	31.47	2.00	33.01	PASS
	1880.0	30.72	0.80	31.52	2.00	33.01	PASS
	1909.8	31.05	0.80	31.85	2.00	33.01	PASS
GPRS (GMSK,3-Slot)	1850.2	30.21	0.80	31.01	2.00	33.01	PASS
	1880.0	30.24	0.80	31.04	2.00	33.01	PASS
	1909.8	30.61	0.80	31.41	2.00	33.01	PASS
GPRS (GMSK,4-Slot)	1850.2	29.76	0.80	30.56	2.00	33.01	PASS
	1880.0	29.83	0.80	30.63	2.00	33.01	PASS
	1909.8	30.16	0.80	30.96	2.00	33.01	PASS
EGPRS (8PSK,1-Slot)	1850.2	31.09	0.80	31.89	2.00	33.01	PASS
	1880.0	31.10	0.80	31.90	2.00	33.01	PASS
	1909.8	31.42	0.80	32.22	2.00	33.01	PASS
EGPRS (8PSK,2-Slot)	1850.2	30.37	0.80	31.17	2.00	33.01	PASS
	1880.0	30.38	0.80	31.18	2.00	33.01	PASS
	1909.8	30.70	0.80	31.50	2.00	33.01	PASS
EGPRS (8PSK,3-Slot)	1850.2	29.58	0.80	30.38	2.00	33.01	PASS
	1880.0	29.59	0.80	30.39	2.00	33.01	PASS
	1909.8	29.98	0.80	30.78	2.00	33.01	PASS
EGPRS (8PSK,4-Slot)	1850.2	28.88	0.80	29.68	2.00	33.01	PASS
	1880.0	28.82	0.80	29.62	2.00	33.01	PASS
	1909.8	29.24	0.80	30.04	2.00	33.01	PASS



Radiated Power (EIRP) for WCDMA Band 2							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit (dBm)	Conclusion
WCDMA	1852.40	22.73	0.80	23.53	2.00	33.01	PASS
	1880.00	22.64	0.80	23.44	2.00	33.01	PASS
	1907.40	21.57	0.80	22.37	2.00	33.01	PASS
HSDPA Subtest 1	1852.40	22.13	0.80	22.93	2.00	33.01	PASS
	1880.00	22.15	0.80	22.95	2.00	33.01	PASS
	1907.40	22.10	0.80	22.90	2.00	33.01	PASS
HSDPA Subtest 2	1852.40	21.63	0.80	22.43	2.00	33.01	PASS
	1880.00	21.66	0.80	22.46	2.00	33.01	PASS
	1907.40	21.61	0.80	22.41	2.00	33.01	PASS
HSDPA Subtest 3	1852.40	21.33	0.80	22.13	2.00	33.01	PASS
	1880.00	21.22	0.80	22.02	2.00	33.01	PASS
	1907.40	21.23	0.80	22.03	2.00	33.01	PASS
HSDPA Subtest 4	1852.40	20.91	0.80	21.71	2.00	33.01	PASS
	1880.00	20.89	0.80	21.69	2.00	33.01	PASS
	1907.40	20.77	0.80	21.57	2.00	33.01	PASS
HSUPA Subtest 1	1852.40	22.00	0.80	22.80	2.00	33.01	PASS
	1880.00	22.30	0.80	23.10	2.00	33.01	PASS
	1907.40	22.50	0.80	23.30	2.00	33.01	PASS
HSUPA Subtest 2	1852.40	21.13	0.80	21.93	2.00	33.01	PASS
	1880.00	21.36	0.80	22.16	2.00	33.01	PASS
	1907.40	21.54	0.80	22.34	2.00	33.01	PASS
HSUPA Subtest 3	1852.40	20.96	0.80	21.76	2.00	33.01	PASS
	1880.00	20.91	0.80	21.71	2.00	33.01	PASS
	1907.40	21.09	0.80	21.89	2.00	33.01	PASS
HSUPA Subtest 4	1852.40	20.62	0.80	21.42	2.00	33.01	PASS
	1880.00	20.58	0.80	21.38	2.00	33.01	PASS
	1907.40	20.77	0.80	21.57	2.00	33.01	PASS
HSUPA Subtest 5	1852.40	19.14	0.80	19.94	2.00	33.01	PASS
	1880.00	19.10	0.80	19.90	2.00	33.01	PASS
	1907.40	19.28	0.80	20.08	2.00	33.01	PASS



Radiated Power (ERP) for WCDMA Band 5							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit (dBm)	Conclusion
WCDMA	826.40	22.05	0.80	20.70	7.00	38.45	PASS
	836.60	21.14	0.80	19.79	7.00	38.45	PASS
	846.40	21.36	0.80	20.01	7.00	38.45	PASS
HSDPA Subtest 1	826.40	21.58	0.80	20.23	7.00	38.45	PASS
	836.60	21.68	0.80	20.33	7.00	38.45	PASS
	846.40	21.91	0.80	20.56	7.00	38.45	PASS
HSDPA Subtest 2	826.40	21.12	0.80	19.77	7.00	38.45	PASS
	836.60	21.23	0.80	19.88	7.00	38.45	PASS
	846.40	21.49	0.80	20.14	7.00	38.45	PASS
HSDPA Subtest 3	826.40	20.77	0.80	19.42	7.00	38.45	PASS
	836.60	20.79	0.80	19.44	7.00	38.45	PASS
	846.40	21.00	0.80	19.65	7.00	38.45	PASS
HSDPA Subtest 4	826.40	20.46	0.80	19.11	7.00	38.45	PASS
	836.60	20.49	0.80	19.14	7.00	38.45	PASS
	846.40	20.66	0.80	19.31	7.00	38.45	PASS
HSUPA Subtest 1	826.40	21.54	0.80	20.19	7.00	38.45	PASS
	836.60	21.35	0.80	20.00	7.00	38.45	PASS
	846.40	21.17	0.80	19.82	7.00	38.45	PASS
HSUPA Subtest 2	826.40	20.69	0.80	19.34	7.00	38.45	PASS
	836.60	20.43	0.80	19.08	7.00	38.45	PASS
	846.40	20.26	0.80	18.91	7.00	38.45	PASS
HSUPA Subtest 3	826.40	20.50	0.80	19.15	7.00	38.45	PASS
	836.60	20.02	0.80	18.67	7.00	38.45	PASS
	846.40	19.87	0.80	18.52	7.00	38.45	PASS
HSUPA Subtest 4	826.40	20.12	0.80	18.77	7.00	38.45	PASS
	836.60	19.63	0.80	18.28	7.00	38.45	PASS
	846.40	19.52	0.80	18.17	7.00	38.45	PASS
HSUPA Subtest 5	826.40	18.66	0.80	17.31	7.00	38.45	PASS
	836.60	18.19	0.80	16.84	7.00	38.45	PASS
	846.40	18.10	0.80	16.75	7.00	38.45	PASS

5.2 PEAK TO AVERAGE RATIO


TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

TEST PROCEDURES

1. The testing follows FCC KDB 971168 v03r01 section.
2. The eut was connected to the peak and av system simulator& spectrum analyzer.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis,

TEST SETUP

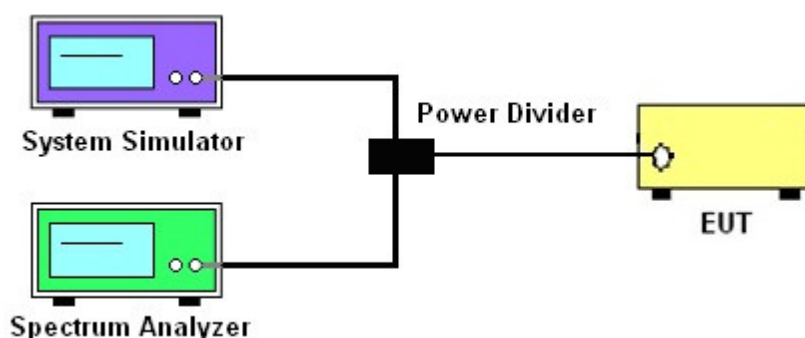

TEST RESULT

Note: The test data please reference to attachment “STS2111209W08_Appendix GSM” and “STS2111209W08_Appendix WCDMA”.

5.4 FREQUENCY STABILITY

TEST OVERVIEW

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015.

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE


Temperature Variation

1. The testing follows FCC KDB 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^\circ \text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

TEST SETUP

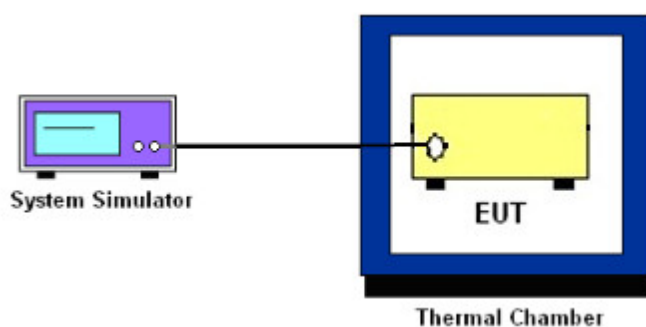

TEST RESULT

GSM 850 /836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	20.04	0.024	2.5ppm	PASS
40		34.84	0.042		
30		17.88	0.021		
20		27.88	0.033		
10		26.96	0.032		
0		24.73	0.030		
-10		20.04	0.024		
-20		12.01	0.014		
-30		23.16	0.028		
20	Maximum Voltage	34.01	0.041		
20	BEP	22.51	0.027		

GPRS 850 /836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	14.13	0.017	2.5ppm	PASS
40		29.86	0.036		
30		20.18	0.024		
20		24.00	0.029		
10		31.93	0.038		
0		12.87	0.015		
-10		26.40	0.032		
-20		16.67	0.020		
-30		33.87	0.040		
20	Maximum Voltage	28.06	0.034		
20	BEP	15.58	0.019		

EGPRS 850 /836.6MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	23.59	0.028	2.5ppm	PASS
40		27.71	0.033		
30		36.30	0.043		
20		20.65	0.025		
10		19.84	0.024		
0		21.95	0.026		
-10		25.00	0.030		
-20		14.71	0.018		
-30		18.69	0.022		
20	Maximum Voltage	30.58	0.037		
20	BEP	14.62	0.017		



GSM 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	32.36	0.017	Within Authorized Band	PASS
40		33.20	0.018		
30		33.57	0.018		
20		19.05	0.010		
10		16.73	0.009		
0		34.83	0.019		
-10		21.91	0.012		
-20		14.37	0.008		
-30		13.40	0.007		
20	Maximum Voltage	16.51	0.009		
20	BEP	15.95	0.008		

GPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.35	0.019	Within Authorized Band	PASS
40		22.36	0.012		
30		32.71	0.017		
20		30.68	0.016		
10		23.00	0.012		
0		33.70	0.018		
-10		14.91	0.008		
-20		30.21	0.016		
-30		35.36	0.019		
20	Maximum Voltage	29.70	0.016		
20	BEP	25.78	0.014		

EGPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	20.65	0.011	Within Authorized Band	PASS
40		28.81	0.015		
30		30.94	0.016		
20		34.89	0.019		
10		29.44	0.016		
0		14.60	0.008		
-10		14.94	0.008		
-20		19.34	0.010		
-30		21.90	0.012		
20	Maximum Voltage	15.60	0.008		
20	BEP	24.98	0.013		



UMTS Band 2 /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	22.69	0.012	Within Authorized Band	PASS
40		11.86	0.006		
30		33.87	0.018		
20		31.79	0.017		
10		14.62	0.008		
0		34.90	0.019		
-10		26.98	0.014		
-20		29.31	0.016		
-30		30.41	0.016		
20	Maximum Voltage	23.49	0.012		
20	BEP	12.96	0.007		

HSDPA Band 2 /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	14.43	0.008	Within Authorized Band	PASS
40		25.10	0.013		
30		13.71	0.007		
20		30.82	0.016		
10		23.09	0.012		
0		28.97	0.015		
-10		20.97	0.011		
-20		19.57	0.010		
-30		26.30	0.014		
20	Maximum Voltage	24.30	0.013		
20	BEP	36.25	0.019		

HSUPA Band 2 /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	15.37	0.008	Within Authorized Band	PASS
40		33.25	0.018		
30		13.36	0.007		
20		35.90	0.019		
10		32.04	0.017		
0		35.89	0.019		
-10		19.25	0.010		
-20		23.50	0.013		
-30		31.54	0.017		
20	Maximum Voltage	29.73	0.016		
20	BEP	23.36	0.012		



UMTS Band 5 / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	32.96	0.039	2.5ppm	PASS
40		27.51	0.033		
30		36.46	0.044		
20		22.67	0.027		
10		18.77	0.022		
0		31.96	0.038		
-10		31.68	0.038		
-20		23.57	0.028		
-30		28.78	0.034		
20	Maximum Voltage	33.96	0.041		
20	BEP	24.33	0.029		

HSDPA Band 5 / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)		(ppm)		
50	Normal Voltage	21.86	0.026	2.5ppm	PASS
40		35.29	0.042		
30		23.09	0.028		
20		19.23	0.023		
10		17.97	0.021		
0		26.84	0.032		
-10		35.09	0.042		
-20		27.58	0.033		
-30		19.00	0.023		
20	Maximum Voltage	31.61	0.038		
20	BEP	29.30	0.035		

HSUPA Band 5 / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	34.96	0.042	2.5ppm	PASS
40		17.65	0.021		
30		14.74	0.018		
20		33.01	0.039		
10		23.07	0.028		
0		31.72	0.038		
-10		25.96	0.031		
-20		36.31	0.043		
-30		33.15	0.040		
20	Maximum Voltage	29.88	0.036		
20	BEP	14.56	0.017		

5.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

TEST OVERVIEW

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.7.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

TEST SETUP

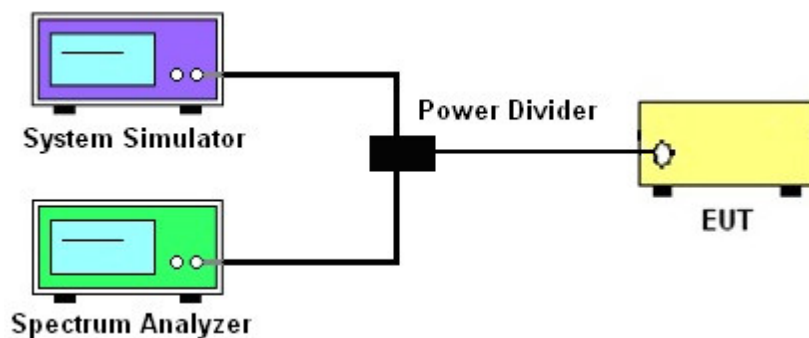

TEST RESULT

Note: The test data please reference to attachment “STS2111209W08_Appendix GSM” and “STS2111209W08_Appendix WCDMA”.

5.6 BAND EDGE

TEST OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0 and ANSI C63.26-2015-Section 5.7
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

TEST SETUP

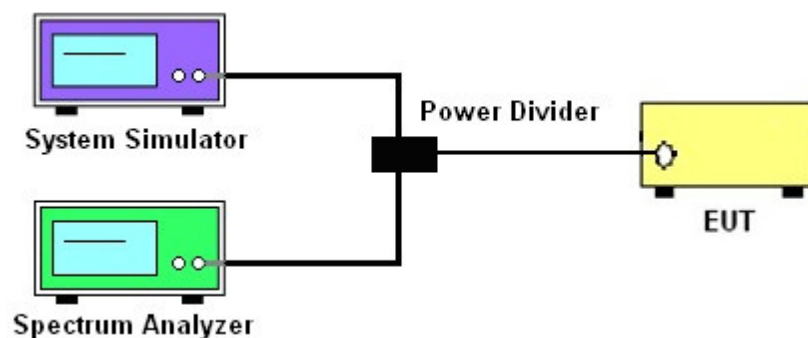

TEST RESULT

Note: The test data please reference to attachment “STS2111209W08_Appendix GSM” and “STS2111209W08_Appendix WCDMA”.



5.7 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

TEST OVERVIEW

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

TEST PROCEDURE


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.
 $P_{Mea} = S.G \text{ Level} + \text{Ant-Cable loss}$; $\text{Margin} = P_{Mea} - \text{Limit}$.

TEST SETUP

For radiated test from 30MHz to 1GHz

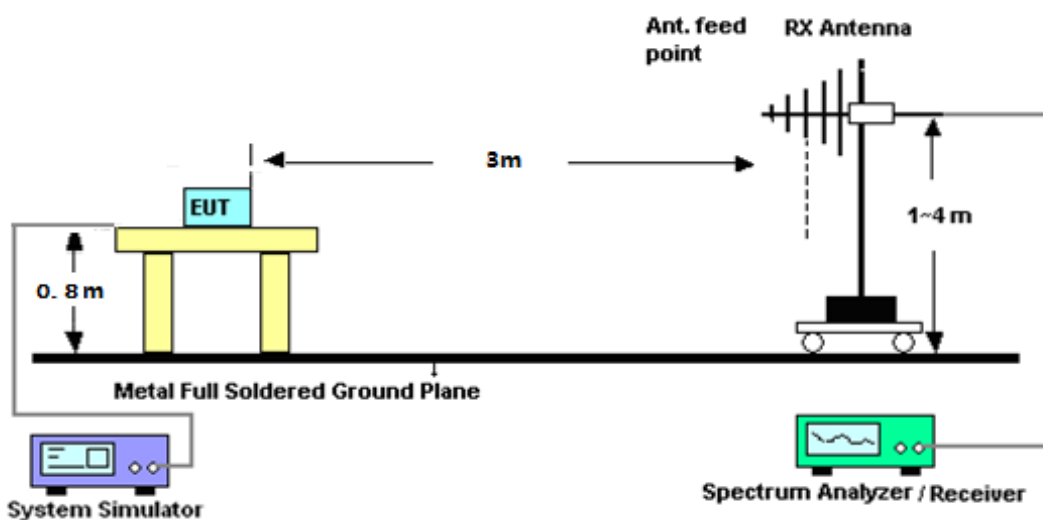

For radiated test from above 1GHz

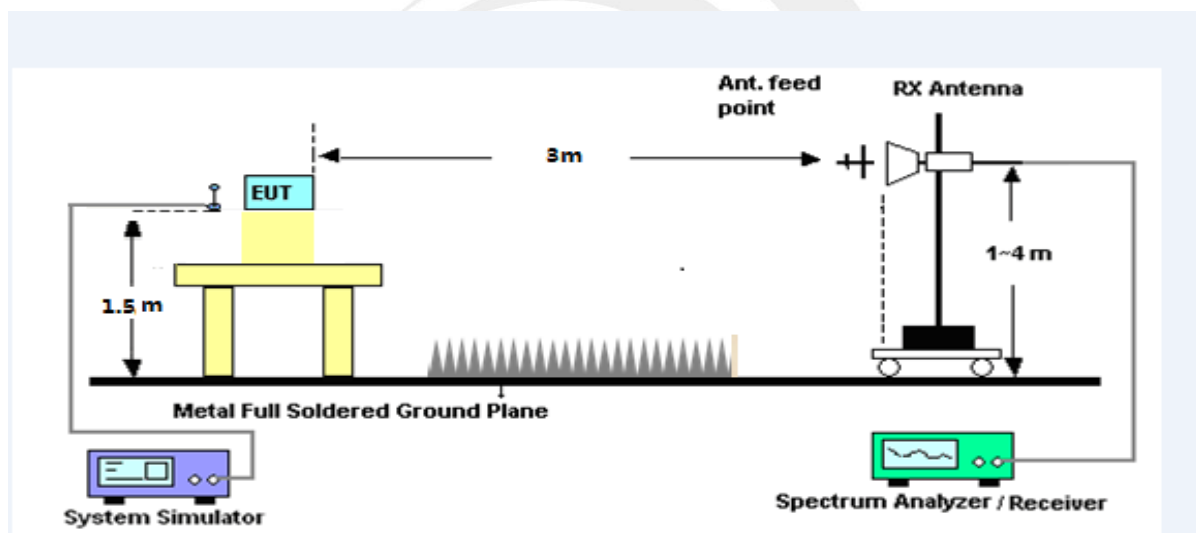



TEST RESULT

Note: (1) Spurious emissions which are attenuated by more than 20dB below the permissible value for frequency below 1000MHz.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.

GSM 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.17	-41.24	9.40	4.75	-36.59	-13.00	-23.59	H
2472.41	-40.39	10.60	8.39	-38.18	-13.00	-25.18	H
3296.88	-31.56	12.00	11.79	-31.35	-13.00	-18.35	H
1648.17	-44.11	9.40	4.75	-39.46	-13.00	-26.46	V
2472.37	-44.37	10.60	8.39	-42.16	-13.00	-29.16	V
3296.72	-43.32	12.00	11.79	-43.11	-13.00	-30.11	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.06	-40.84	9.50	4.76	-36.10	-13.00	-23.10	H
2509.58	-39.23	10.70	8.40	-36.93	-13.00	-23.93	H
3346.36	-31.93	12.20	11.80	-31.53	-13.00	-18.53	H
1672.86	-43.50	9.40	4.75	-38.85	-13.00	-25.85	V
2509.81	-45.00	10.60	8.39	-42.79	-13.00	-29.79	V
3345.99	-43.31	12.20	11.82	-42.93	-13.00	-29.93	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.52	-40.13	9.60	4.77	-35.30	-13.00	-22.30	H
2546.15	-40.34	10.80	8.50	-38.04	-13.00	-25.04	H
3394.90	-32.12	12.50	11.90	-31.52	-13.00	-18.52	H
1697.59	-43.67	9.60	4.77	-38.84	-13.00	-25.84	V
2546.12	-44.81	10.80	8.50	-42.51	-13.00	-29.51	V
3394.93	-43.36	12.50	11.90	-42.76	-13.00	-29.76	V



GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.18	-41.35	9.40	4.75	-36.70	-13.00	-23.70	H
2472.45	-39.86	10.60	8.39	-37.65	-13.00	-24.65	H
3296.60	-31.24	12.00	11.79	-31.03	-13.00	-18.03	H
1648.47	-44.61	9.40	4.75	-39.96	-13.00	-26.96	V
2472.69	-45.42	10.60	8.39	-43.21	-13.00	-30.21	V
3296.55	-43.90	12.00	11.79	-43.69	-13.00	-30.69	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.03	-40.74	9.50	4.76	-36.00	-13.00	-23.00	H
2509.52	-39.62	10.70	8.40	-37.32	-13.00	-24.32	H
3346.33	-31.19	12.20	11.80	-30.79	-13.00	-17.79	H
1673.10	-43.34	9.40	4.75	-38.69	-13.00	-25.69	V
2509.81	-44.50	10.60	8.39	-42.29	-13.00	-29.29	V
3346.22	-42.97	12.20	11.82	-42.59	-13.00	-29.59	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.62	-40.53	9.60	4.77	-35.70	-13.00	-22.70	H
2546.30	-40.03	10.80	8.50	-37.73	-13.00	-24.73	H
3395.09	-31.44	12.50	11.90	-30.84	-13.00	-17.84	H
1697.49	-44.14	9.60	4.77	-39.31	-13.00	-26.31	V
2546.43	-44.51	10.80	8.50	-42.21	-13.00	-29.21	V
3395.20	-43.13	12.50	11.90	-42.53	-13.00	-29.53	V



EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.38	-41.30	9.40	4.75	-36.65	-13.00	-23.65	H
2472.41	-39.53	10.60	8.39	-37.32	-13.00	-24.32	H
3296.73	-31.58	12.00	11.79	-31.37	-13.00	-18.37	H
1648.22	-43.41	9.40	4.75	-38.76	-13.00	-25.76	V
2472.30	-44.85	10.60	8.39	-42.64	-13.00	-29.64	V
3296.50	-43.15	12.00	11.79	-42.94	-13.00	-29.94	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.01	-40.50	9.50	4.76	-35.76	-13.00	-22.76	H
2509.57	-39.20	10.70	8.40	-36.90	-13.00	-23.90	H
3346.11	-31.31	12.20	11.80	-30.91	-13.00	-17.91	H
1673.20	-43.51	9.40	4.75	-38.86	-13.00	-25.86	V
2509.42	-45.12	10.60	8.39	-42.91	-13.00	-29.91	V
3346.26	-43.41	12.20	11.82	-43.03	-13.00	-30.03	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.32	-40.63	9.60	4.77	-35.80	-13.00	-22.80	H
2546.12	-39.82	10.80	8.50	-37.52	-13.00	-24.52	H
3395.15	-32.19	12.50	11.90	-31.59	-13.00	-18.59	H
1697.56	-43.52	9.60	4.77	-38.69	-13.00	-25.69	V
2546.12	-44.11	10.80	8.50	-41.81	-13.00	-28.81	V
3395.03	-43.08	12.50	11.90	-42.48	-13.00	-29.48	V



DCS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.32	-33.45	12.60	12.93	-33.78	-13.00	-20.78	H
5550.55	-34.93	13.10	17.11	-38.94	-13.00	-25.94	H
7400.95	-33.08	11.50	22.20	-43.78	-13.00	-30.78	H
3700.27	-34.78	12.60	12.93	-35.11	-13.00	-22.11	V
5550.38	-35.05	13.10	17.11	-39.06	-13.00	-26.06	V
7400.93	-32.33	11.50	22.20	-43.03	-13.00	-30.03	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.78	-33.57	12.60	12.93	-33.90	-13.00	-20.90	H
5640.02	-34.77	13.10	17.11	-38.78	-13.00	-25.78	H
7520.09	-33.17	11.50	22.20	-43.87	-13.00	-30.87	H
3760.22	-35.85	12.60	12.93	-36.18	-13.00	-23.18	V
5640.18	-34.24	13.10	17.11	-38.25	-13.00	-25.25	V
7519.96	-31.89	11.50	22.20	-42.59	-13.00	-29.59	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3819.60	-33.50	12.60	12.93	-33.83	-13.00	-20.83	H
5729.24	-34.18	13.10	17.11	-38.19	-13.00	-25.19	H
7639.07	-33.62	11.50	22.20	-44.32	-13.00	-31.32	H
3819.78	-35.87	12.60	12.93	-36.20	-13.00	-23.20	V
5729.28	-34.67	13.10	17.11	-38.68	-13.00	-25.68	V
7639.36	-31.88	11.50	22.20	-42.58	-13.00	-29.58	V



GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.07	-33.45	12.60	12.93	-33.78	-13.00	-20.78	H
5550.50	-34.46	13.10	17.11	-38.47	-13.00	-25.47	H
7400.55	-32.74	11.50	22.20	-43.44	-13.00	-30.44	H
3700.33	-35.99	12.60	12.93	-36.32	-13.00	-23.32	V
5550.68	-35.02	13.10	17.11	-39.03	-13.00	-26.03	V
7400.61	-32.31	11.50	22.20	-43.01	-13.00	-30.01	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.14	-34.01	12.60	12.93	-34.34	-13.00	-21.34	H
5639.81	-34.43	13.10	17.11	-38.44	-13.00	-25.44	H
7519.80	-32.74	11.50	22.20	-43.44	-13.00	-30.44	H
3759.96	-35.77	12.60	12.93	-36.10	-13.00	-23.10	V
5639.98	-33.85	13.10	17.11	-37.86	-13.00	-24.86	V
7520.30	-33.04	11.50	22.20	-43.74	-13.00	-30.74	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3819.67	-34.21	12.60	12.93	-34.54	-13.00	-21.54	H
5729.39	-34.39	13.10	17.11	-38.40	-13.00	-25.40	H
7639.18	-32.48	11.50	22.20	-43.18	-13.00	-30.18	H
3819.48	-35.96	12.60	12.93	-36.29	-13.00	-23.29	V
5729.26	-35.07	13.10	17.11	-39.08	-13.00	-26.08	V
7639.05	-31.86	11.50	22.20	-42.56	-13.00	-29.56	V



EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.28	-34.63	12.60	12.93	-34.96	-13.00	-21.96	H
5550.22	-35.47	13.10	17.11	-39.48	-13.00	-26.48	H
7400.84	-32.91	11.50	22.20	-43.61	-13.00	-30.61	H
3700.20	-34.60	12.60	12.93	-34.93	-13.00	-21.93	V
5550.43	-35.02	13.10	17.11	-39.03	-13.00	-26.03	V
7400.68	-32.94	11.50	22.20	-43.64	-13.00	-30.64	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.99	-34.04	12.60	12.93	-34.37	-13.00	-21.37	H
5639.82	-34.17	13.10	17.11	-38.18	-13.00	-25.18	H
7519.82	-33.11	11.50	22.20	-43.81	-13.00	-30.81	H
3760.20	-35.54	12.60	12.93	-35.87	-13.00	-22.87	V
5639.91	-33.92	13.10	17.11	-37.93	-13.00	-24.93	V
7520.04	-31.77	11.50	22.20	-42.47	-13.00	-29.47	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3819.46	-34.50	12.60	12.93	-34.83	-13.00	-21.83	H
5729.16	-34.49	13.10	17.11	-38.50	-13.00	-25.50	H
7639.13	-32.96	11.50	22.20	-43.66	-13.00	-30.66	H
3819.76	-34.78	12.60	12.93	-35.11	-13.00	-22.11	V
5729.44	-34.13	13.10	17.11	-38.14	-13.00	-25.14	V
7639.22	-32.51	11.50	22.20	-43.21	-13.00	-30.21	V



WCDMA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.31	-34.28	12.60	12.93	-34.61	-13.00	-21.61	H
5557.54	-35.23	13.10	17.11	-39.24	-13.00	-26.24	H
7409.68	-33.51	11.50	22.20	-44.21	-13.00	-31.21	H
3704.48	-35.04	12.60	12.93	-35.37	-13.00	-22.37	V
5557.44	-34.99	13.10	17.11	-39.00	-13.00	-26.00	V
7409.49	-32.95	11.50	22.20	-43.65	-13.00	-30.65	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.85	-34.28	12.60	12.93	-34.61	-13.00	-21.61	H
5640.13	-34.37	13.10	17.11	-38.38	-13.00	-25.38	H
7520.14	-32.16	11.50	22.20	-42.86	-13.00	-29.86	H
3760.14	-34.64	12.60	12.93	-34.97	-13.00	-21.97	V
5640.20	-34.61	13.10	17.11	-38.62	-13.00	-25.62	V
7519.94	-31.93	11.50	22.20	-42.63	-13.00	-29.63	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.46	-33.80	12.60	12.93	-34.13	-13.00	-21.13	H
5722.20	-34.44	13.10	17.11	-38.45	-13.00	-25.45	H
7629.93	-32.19	11.50	22.20	-42.89	-13.00	-29.89	H
3815.49	-35.55	12.60	12.93	-35.88	-13.00	-22.88	V
5722.20	-34.35	13.10	17.11	-38.36	-13.00	-25.36	V
7629.87	-33.10	11.50	22.20	-43.80	-13.00	-30.80	V



HSUPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.30	-34.14	12.60	12.93	-34.47	-13.00	-21.47	H
5557.28	-34.98	13.10	17.11	-38.99	-13.00	-25.99	H
7409.50	-32.69	11.50	22.20	-43.39	-13.00	-30.39	H
3704.12	-35.33	12.60	12.93	-35.66	-13.00	-22.66	V
5557.48	-35.15	13.10	17.11	-39.16	-13.00	-26.16	V
7409.67	-33.05	11.50	22.20	-43.75	-13.00	-30.75	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.90	-34.26	12.60	12.93	-34.59	-13.00	-21.59	H
5640.09	-34.94	13.10	17.11	-38.95	-13.00	-25.95	H
7520.12	-32.98	11.50	22.20	-43.68	-13.00	-30.68	H
3760.34	-35.10	12.60	12.93	-35.43	-13.00	-22.43	V
5639.92	-34.06	13.10	17.11	-38.07	-13.00	-25.07	V
7519.85	-33.00	11.50	22.20	-43.70	-13.00	-30.70	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.66	-34.43	12.60	12.93	-34.76	-13.00	-21.76	H
5722.40	-34.02	13.10	17.11	-38.03	-13.00	-25.03	H
7629.85	-32.73	11.50	22.20	-43.43	-13.00	-30.43	H
3815.35	-35.00	12.60	12.93	-35.33	-13.00	-22.33	V
5722.20	-34.19	13.10	17.11	-38.20	-13.00	-25.20	V
7630.25	-32.16	11.50	22.20	-42.86	-13.00	-29.86	V



HSDPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.45	-34.26	12.60	12.93	-34.59	-13.00	-21.59	H
5557.24	-34.98	13.10	17.11	-38.99	-13.00	-25.99	H
7409.52	-32.81	11.50	22.20	-43.51	-13.00	-30.51	H
3704.00	-35.06	12.60	12.93	-35.39	-13.00	-22.39	V
5557.67	-34.54	13.10	17.11	-38.55	-13.00	-25.55	V
7409.83	-32.53	11.50	22.20	-43.23	-13.00	-30.23	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.08	-34.46	12.60	12.93	-34.79	-13.00	-21.79	H
5640.29	-34.21	13.10	17.11	-38.22	-13.00	-25.22	H
7520.17	-33.55	11.50	22.20	-44.25	-13.00	-31.25	H
3760.34	-35.41	12.60	12.93	-35.74	-13.00	-22.74	V
5640.10	-34.74	13.10	17.11	-38.75	-13.00	-25.75	V
7520.08	-31.94	11.50	22.20	-42.64	-13.00	-29.64	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.35	-34.79	12.60	12.93	-35.12	-13.00	-22.12	H
5722.30	-35.43	13.10	17.11	-39.44	-13.00	-26.44	H
7629.93	-32.70	11.50	22.20	-43.40	-13.00	-30.40	H
3815.55	-35.17	12.60	12.93	-35.50	-13.00	-22.50	V
5722.39	-34.99	13.10	17.11	-39.00	-13.00	-26.00	V
7630.07	-33.10	11.50	22.20	-43.80	-13.00	-30.80	V



WCDMA Band 5: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.40	-40.92	9.40	4.75	-36.27	-13.00	-23.27	H
2479.60	-40.26	10.60	8.39	-38.05	-13.00	-25.05	H
3305.81	-30.86	12.00	11.79	-30.65	-13.00	-17.65	H
1652.37	-43.23	9.40	4.75	-38.58	-13.00	-25.58	V
2479.64	-44.63	10.60	8.39	-42.42	-13.00	-29.42	V
3305.87	-43.15	12.00	11.79	-42.94	-13.00	-29.94	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1672.85	-41.18	9.40	4.75	-36.53	-13.00	-23.53	H
2509.59	-39.31	10.60	8.39	-37.10	-13.00	-24.10	H
3346.25	-31.06	12.00	11.79	-30.85	-13.00	-17.85	H
1672.79	-43.40	9.40	4.75	-38.75	-13.00	-25.75	V
2509.62	-45.09	10.60	8.39	-42.88	-13.00	-29.88	V
3345.98	-43.83	12.00	11.79	-43.62	-13.00	-30.62	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.66	-41.62	9.40	4.75	-36.97	-13.00	-23.97	H
2539.42	-39.64	10.60	8.39	-37.43	-13.00	-24.43	H
3386.23	-31.32	12.00	11.79	-31.11	-13.00	-18.11	H
1693.24	-43.51	9.40	4.75	-38.86	-13.00	-25.86	V
2539.31	-44.43	10.60	8.39	-42.22	-13.00	-29.22	V
3386.33	-42.89	12.00	11.79	-42.68	-13.00	-29.68	V



HSUPA Band 5: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.18	-40.55	9.40	4.75	-35.90	-13.00	-22.90	H
2479.42	-39.34	10.60	8.39	-37.13	-13.00	-24.13	H
3305.85	-31.40	12.00	11.79	-31.19	-13.00	-18.19	H
1652.08	-43.44	9.40	4.75	-38.79	-13.00	-25.79	V
2479.70	-44.13	10.60	8.39	-41.92	-13.00	-28.92	V
3305.44	-42.95	12.00	11.79	-42.74	-13.00	-29.74	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.08	-40.28	9.40	4.75	-35.63	-13.00	-22.63	H
2509.91	-39.96	10.60	8.39	-37.75	-13.00	-24.75	H
3346.14	-30.87	12.00	11.79	-30.66	-13.00	-17.66	H
1672.98	-43.71	9.40	4.75	-39.06	-13.00	-26.06	V
2509.48	-44.14	10.60	8.39	-41.93	-13.00	-28.93	V
3346.41	-43.51	12.00	11.79	-43.30	-13.00	-30.30	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.40	-40.78	9.40	4.75	-36.13	-13.00	-23.13	H
2539.32	-40.48	10.60	8.39	-38.27	-13.00	-25.27	H
3386.31	-31.36	12.00	11.79	-31.15	-13.00	-18.15	H
1693.25	-44.62	9.40	4.75	-39.97	-13.00	-26.97	V
2539.21	-44.23	10.60	8.39	-42.02	-13.00	-29.02	V
3386.11	-43.97	12.00	11.79	-43.76	-13.00	-30.76	V



HSDPA Band 5: (30-9000)MHz							
The worst testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.42	-40.87	9.40	4.75	-36.22	-13.00	-23.22	H
2479.27	-40.33	10.60	8.39	-38.12	-13.00	-25.12	H
3305.45	-31.12	12.00	11.79	-30.91	-13.00	-17.91	H
1652.09	-44.27	9.40	4.75	-39.62	-13.00	-26.62	V
2479.57	-44.00	10.60	8.39	-41.79	-13.00	-28.79	V
3305.73	-42.92	12.00	11.79	-42.71	-13.00	-29.71	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.28	-41.09	9.40	4.75	-36.44	-13.00	-23.44	H
2509.44	-39.23	10.60	8.39	-37.02	-13.00	-24.02	H
3346.35	-31.22	12.00	11.79	-31.01	-13.00	-18.01	H
1673.04	-43.91	9.40	4.75	-39.26	-13.00	-26.26	V
2509.87	-45.31	10.60	8.39	-43.10	-13.00	-30.10	V
3346.06	-43.53	12.00	11.79	-43.32	-13.00	-30.32	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.24	-40.95	9.40	4.75	-36.30	-13.00	-23.30	H
2539.42	-40.07	10.60	8.39	-37.86	-13.00	-24.86	H
3385.88	-31.58	12.00	11.79	-31.37	-13.00	-18.37	H
1693.67	-43.56	9.40	4.75	-38.91	-13.00	-25.91	V
2539.54	-45.24	10.60	8.39	-43.03	-13.00	-30.03	V
3386.19	-43.78	12.00	11.79	-43.57	-13.00	-30.57	V



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****

