



TEST REPORT

No.I19Z61642-WMD05

for

Wiko SAS

Smart Phone

Model Name: U307AS

FCC ID: 2AM86U307AS

with

Hardware Version: V1.0

Software Version: U307ASV01.06.10

Issued Date: 2019-10-23

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I19Z61642-WMD05 | Rev.0 | 1st edition | 2019-10-23 |

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

| | |
|---|-----------|
| 1. TEST LABORATORY | 4 |
| 1.1. INTRODUCTION & ACCREDITATION..... | 4 |
| 1.2. TESTING LOCATION | 4 |
| 1.3. TESTING ENVIRONMENT..... | 5 |
| 1.4. PROJECT DATA | 5 |
| 1.5. SIGNATURE..... | 5 |
| 2. CLIENT INFORMATION..... | 6 |
| 2.1. APPLICANT INFORMATION..... | 6 |
| 2.2. MANUFACTURER INFORMATION..... | 6 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 7 |
| 3.1. ABOUT EUT | 7 |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 7 |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST | 7 |
| 4. REFERENCE DOCUMENTS | 8 |
| 4.1. REFERENCE DOCUMENTS FOR TESTING..... | 8 |
| 5. LABORATORY ENVIRONMENT | 9 |
| 6. SUMMARY OF TEST RESULTS | 10 |
| 7. TEST EQUIPMENTS UTILIZED | 11 |
| ANNEX A: MEASUREMENT RESULTS..... | 12 |
| A.1 OUTPUT POWER | 12 |
| A.2 FREQUENCY STABILITY | 14 |
| A.3 OCCUPIED BANDWIDTH | 16 |
| A.4 EMISSION BANDWIDTH..... | 18 |
| A.5 CONDUCTED SPURIOUS EMISSION | 20 |
| ANNEX B: ACCREDITATION CERTIFICATE..... | 27 |

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-80%

1.4. Project data

Testing Start Date: 2019-09-05
Testing End Date: 2019-10-23

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhang Yufeng
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Wiko SAS
Address /Post: 1, rue Capitaine Dessemond 13007 - Marseille - France.
Contact Person: Filippo Cesare FERRARA
Contact Email: fferrara@wikomobile.com
Telephone: 0033610144948

2.2. Manufacturer Information

Company Name: Shenzhen Tinno Mobile Technology Corp.
Address /Post: 4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District,Shenzhen, P.R.China
Contact Person: xiaoping.li
Contact Email: xiaoping.li@tinno.com
Telephone: 0755-86095550

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|-------------------------|-------------------------------------|
| Description | Smart Phone |
| Model | U307AS |
| FCC ID | 2AM86U307AS |
| Frequency | CDMA2ND800MHz (BC10) |
| Antenna | Embedded |
| Extreme vol. Limits | 3.5VDC to 4.4VDC (nominal: 3.85VDC) |
| Extreme temp. Tolerance | -10°C to +55°C |

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

| EUT ID* | IMEI | HW Version | SW Version | Date of receipt |
|----------------|-----------------|-------------------|-------------------|------------------------|
| UT01a | 864337040005036 | V1.0 | U307ASV01.06.10 | 2019-08-30 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

| AE ID* | Description |
|---------------|--------------------|
| AE1 | Battery |

AE1

| | |
|--------------|--|
| Model | LT25H426271W |
| Manufacturer | Ningbo Veken Battery Co., Ltd. No.2, Area 0212, West Zone, Free Trade Zone, Ningbo, Zhejiang Province, China |
| Capacitance | 2500mAh |

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|----------------|--|-----------------|
| FCC Part 90 | PRIVATE LAND MOBILE RADIO SERVICES | 10-1-18 |
| FCC Part 2 | FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS | 10-1-18 |
| ANSI/TIA-603-E | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards | Edition 2016 |
| KDB971168 D01 | Measurement Guidance for Certification of Licensed Digital Transmitters | v03r01 |

5. LABORATORY ENVIRONMENT

Shielding chamber did not exceed following limits along the RF testing:

| | |
|-------------------|----------------------------|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. =20 %, Max. = 80 % |

6. SUMMARY OF TEST RESULTS

| Items | List | Clause in FCC rules | Verdict |
|-------|-----------------------------|---------------------|---------|
| 1 | Output Power | 90.635 | Pass |
| 2 | Frequency Stability | 2.1055/90.213 | Pass |
| 3 | Occupied Bandwidth | 2.1049 | Pass |
| 4 | Emission Bandwidth | 90.1215 | Pass |
| 5 | Conducted Spurious Emission | 90.691 | Pass |

7. Test Equipments Utilized

| NO. | NAME | TYPE | SERIES NUMBER | PRODUCER | CALIBRATION INTERVAL | CAL DUE DATE |
|-----|----------------------------------|--------------|----------------|----------|----------------------|--------------|
| 1 | Spectrum Analyzer | FSV30 | 101576 | R&S | 1 Year | 2020-05-03 |
| 2 | Wireless Communications Test Set | 8960(E5515C) | MY483609 50 | Agilent | 2 Years | 2020-08-29 |
| 3 | Climatic chamber | SH-641 | 92009050 | ESPEC | 2 Years | 2019-12-21 |

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Agilent Wireless Communications Test Set (8960(E5515C)) to ensure max power transmission and proper modulation.

This result is peak output power conducted measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSV30 (average).

These measurements were done at 2 frequencies of CDMA BC10 (bottom and top of operational frequency range) for 1x RTT and 1xEVDO.

The measurement method is from KDB 971168 D01 5.2.1:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time = auto-couple.
- f) Detector = RMS (power averaging).
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

A.1.3 Measurement results

CDMA BC10

Measurement result

| Channel | Frequency(MHz) | Channel power(dBm) | | |
|---------|----------------|--------------------|--------|-------|
| | | 1xRTT | 1xEVDO | |
| | | | Rev0 | RevA |
| 476 | 817.9 | 23.98 | 24.01 | 24.07 |
| 684 | 823.1 | 24.01 | 23.98 | 24.06 |

A.2 FREQUENCY STABILITY

A.2.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of Agilent 8960(E5515C) Wireless Communications Test Set.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on mid channel of CDMA BC10, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the 8960(E5515C) and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C decrements from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.2.2 Measurement Limit

A.2.2.1 For Hand carried battery powered equipment

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.2.2.2 For equipment powered by primary supply voltage

For Part 90.213, the frequency stability of the transmitter shall be maintained within $\pm 2.5\text{ppm}$ of the center frequency. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.2.3 Measurement results

CDMA BC 10

Frequency Error vs Voltage

| Voltage(V) | Frequency error(Hz) | Frequency error(ppm) |
|------------|---------------------|----------------------|
| 3.5 | 3.31 | 0.0040 |
| 3.85 | 3.75 | 0.0046 |
| 4.4 | 2.90 | 0.0035 |

Frequency Error vs Temperature

| temperature(°C) | Frequency error(Hz) | Frequency error(ppm) |
|-----------------|---------------------|----------------------|
| -10 | 2.64 | 0.0032 |
| 0 | 3.62 | 0.0044 |
| 10 | 4.34 | 0.0053 |
| 20 | 3.26 | 0.0040 |
| 30 | 3.53 | 0.0043 |
| 40 | 2.94 | 0.0036 |
| 50 | 4.05 | 0.0049 |

A.3 OCCUPIED BANDWIDTH

A.3.1 Occupied Bandwidth Results

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. The table below lists the measured 99% BW.

Spectrum analyzer plots are included on the following pages.

Test Condition

| RBW | VBW | Span | Sweeptime | Detector | Trace Mode |
|-------|--------|------|-----------|----------|------------|
| 20KHz | 100KHz | 5MHz | 40ms | Peak | Max Hold |


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 99% bandwidth.

CDMA BC10 (99% BW)


| Channel | Occupied Bandwidth (99% BW)(MHz) |
|---------|----------------------------------|
| 476 | 1.267 |
| 684 | 1.273 |

CDMA BC10

Channel 476-Occupied Bandwidth (99% BW)

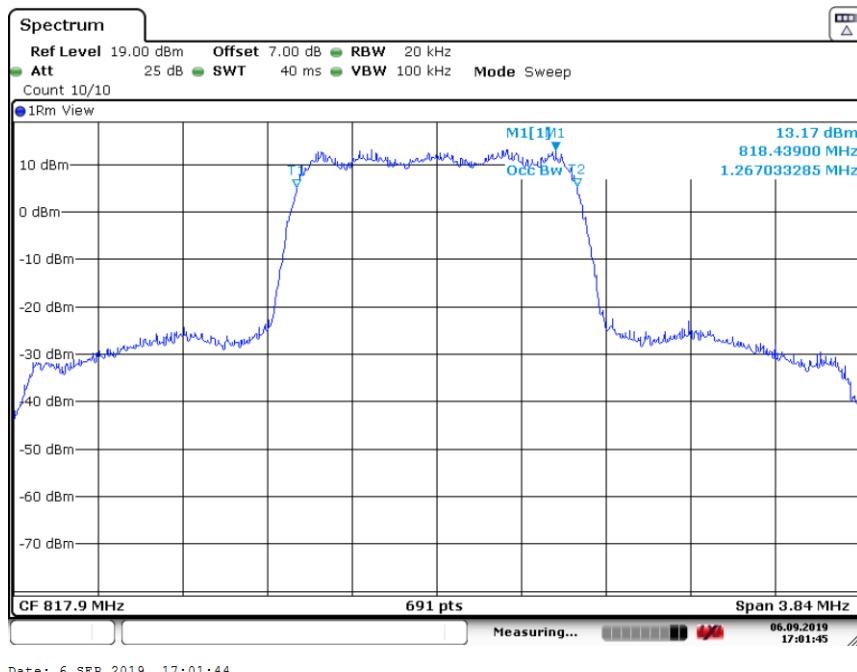

Channel 684-Occupied Bandwidth (99% BW)

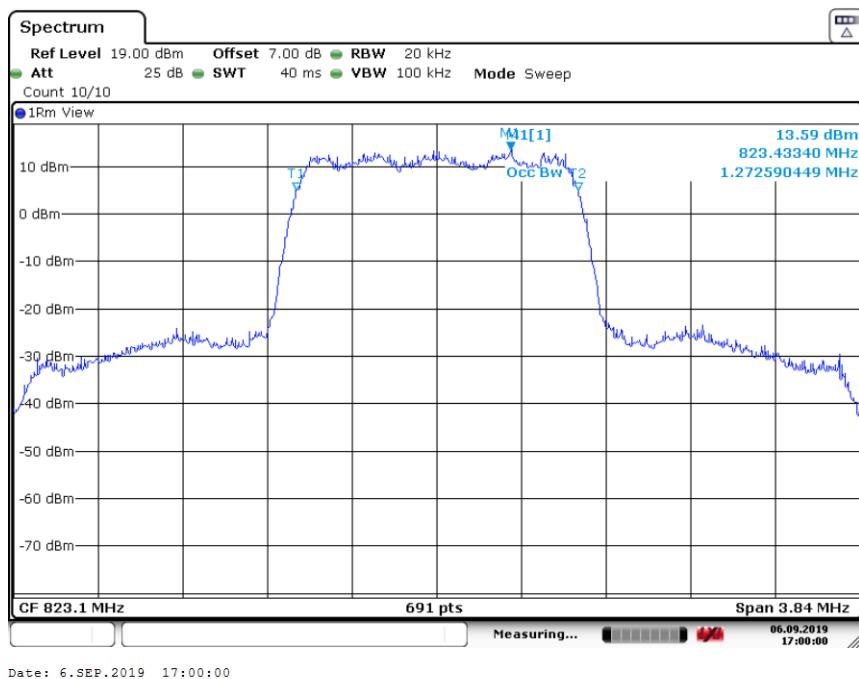

A.4 EMISSION BANDWIDTH

A.4.1 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

Test Condition

| RBW | VBW | Span | Sweeptime | Detector | Trace Mode |
|-------|--------|---------|-----------|----------|------------|
| 20KHz | 100KHz | 3.84MHz | 40ms | Peak | Max Hold |


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 26dBc bandwidth.

CDMA BC10 (-26dBc BW)


| Channel | Emission Bandwidth (-26dBc BW) (MHz) |
|---------|---------------------------------------|
| 476 | 1.428 |
| 684 | 1.434 |

CDMA BC10

Channel 476- Emission Bandwidth (-26dBc BW)

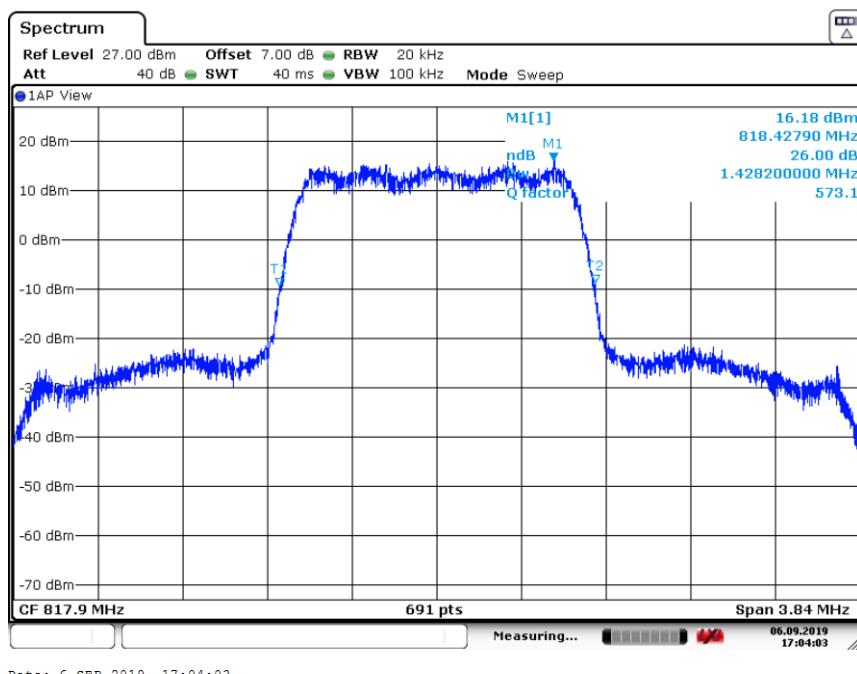

Channel 684- Emission Bandwidth (-26dBc BW)

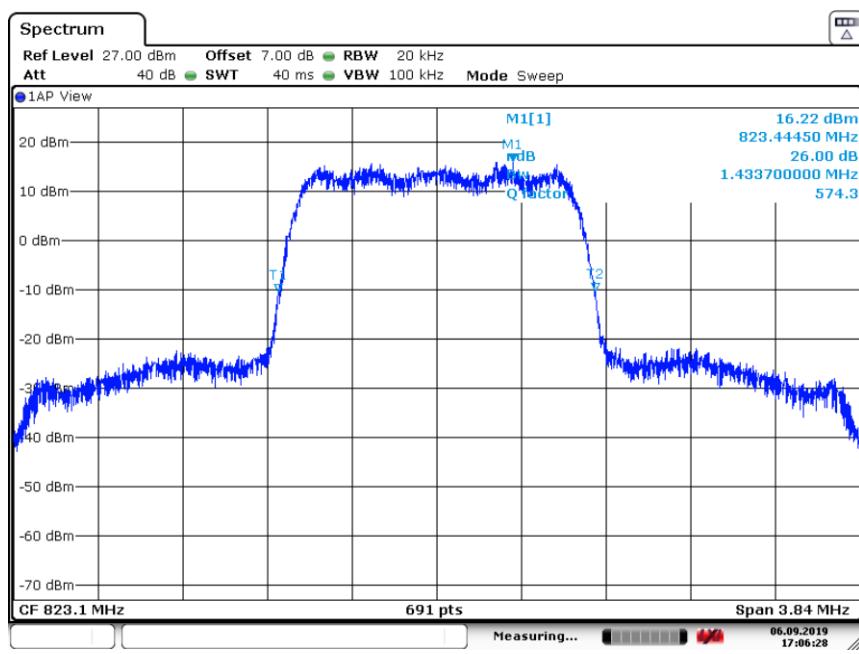

Date: 6.SEP.2019 17:06:28

A.5 CONDUCTED SPURIOUS EMISSION

A.5.1 Measurement Method

The spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For CDMA BC10, data taken from 30 MHz to 10GHz.

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116\log_{10}(f/6.1)$ decibels or $50 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

CDMA BC10 Transmitter

| Channel | Frequency (MHz) |
|---------|-----------------|
| 476 | 817.9 |
| 684 | 823.1 |


A.5.2 Measurement result

CDMA BC10

A. 5.2.1 Channel 476: 30MHz –1GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

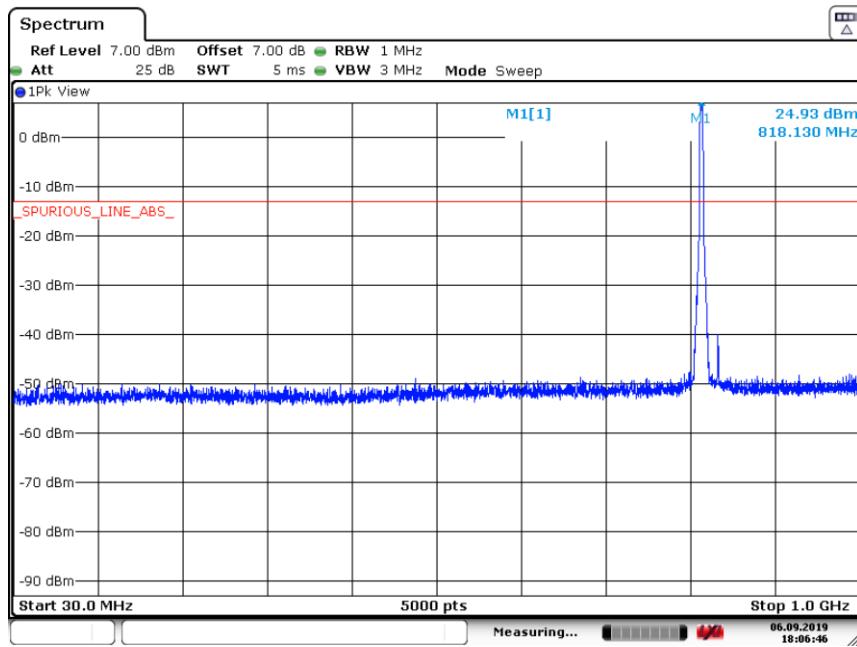

Date: 6.SEP.2019 18:06:45

A.5.2.2 Channel 476: 1GHz –2.5GHz


Spurious emission limit –13dBm.

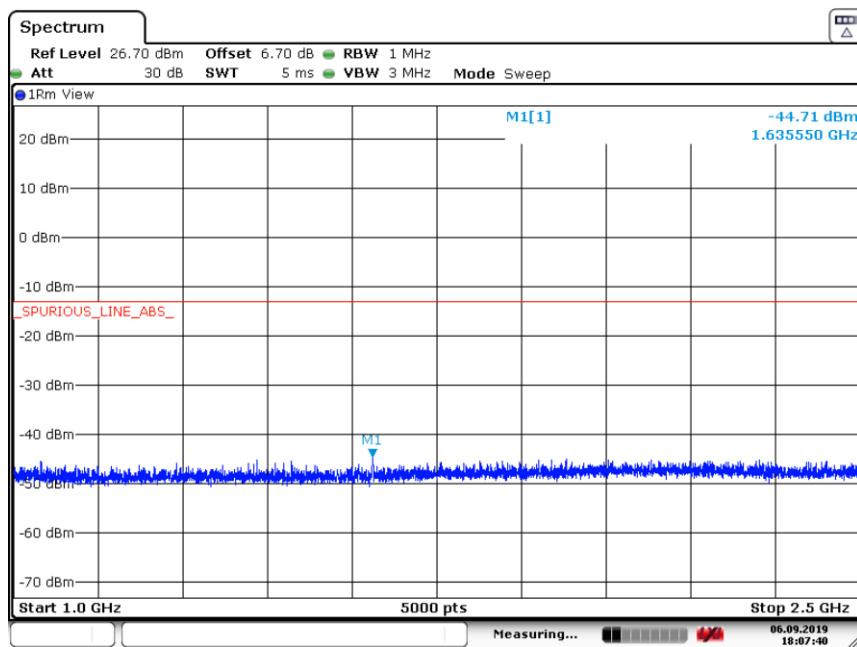

Date: 6.SEP.2019 18:07:40

A.5.2.3 Channel 476: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

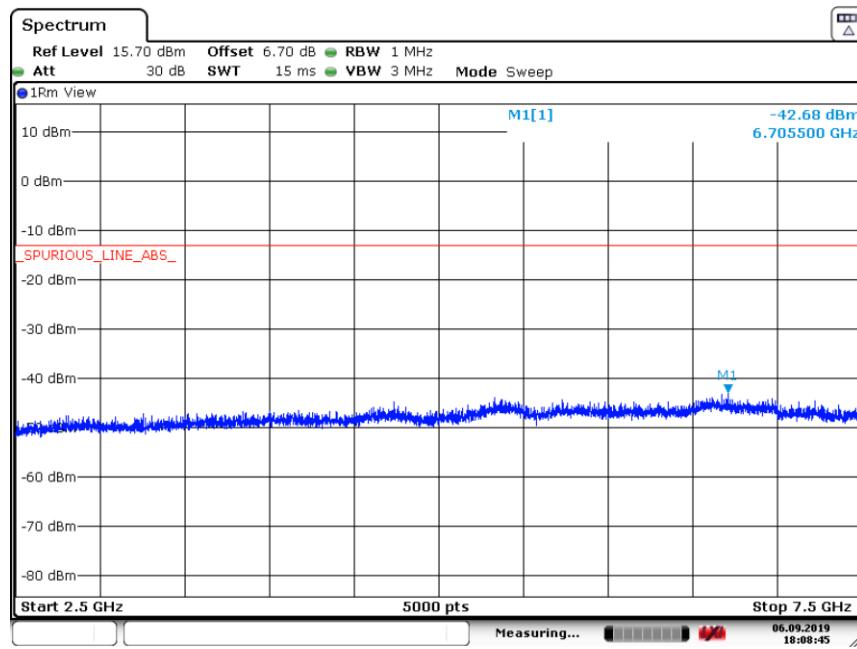

Date: 6.SEP.2019 18:08:45

A.5.2.4 Channel 476: 7.5GHz –10GHz


Spurious emission limit –13dBm.

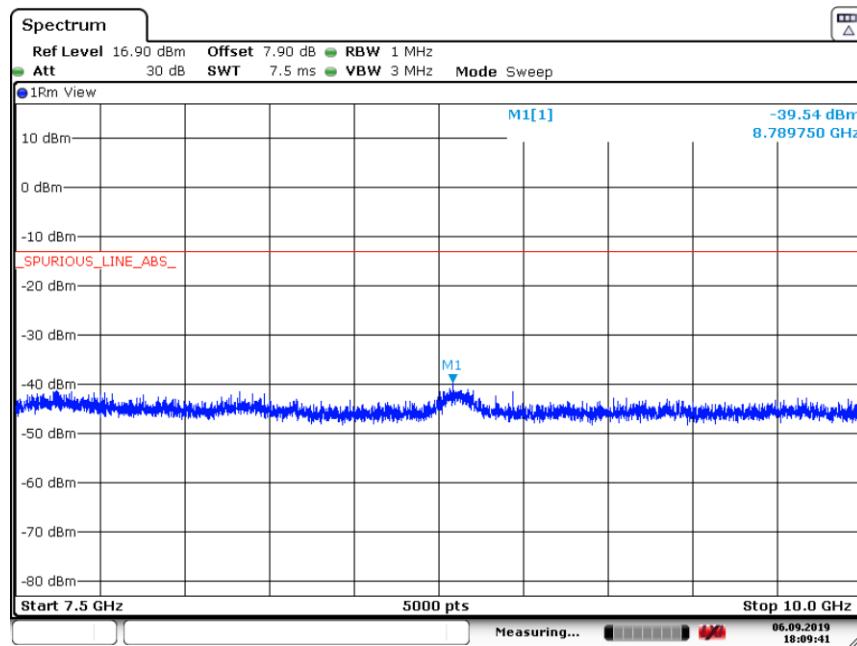

Date: 6.SEP.2019 18:09:41

A.5.2.5 Channel 476: Band Edge


Spurious emission limit –20dBm.

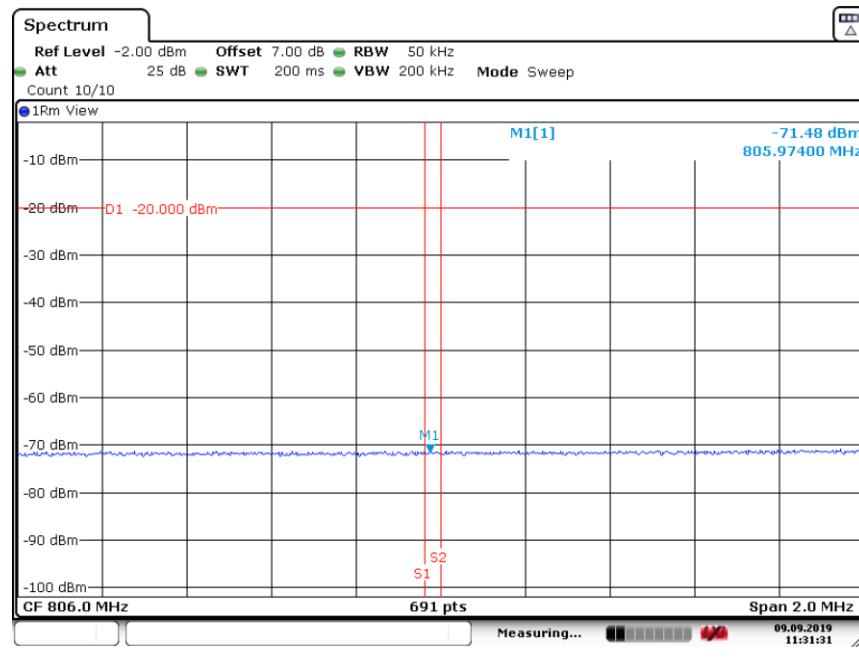

Date: 9.SEP.2019 11:31:30

A.5.2.6 Channel 476: Outer Extended Band Edge

Spurious emission limit –13dBm.

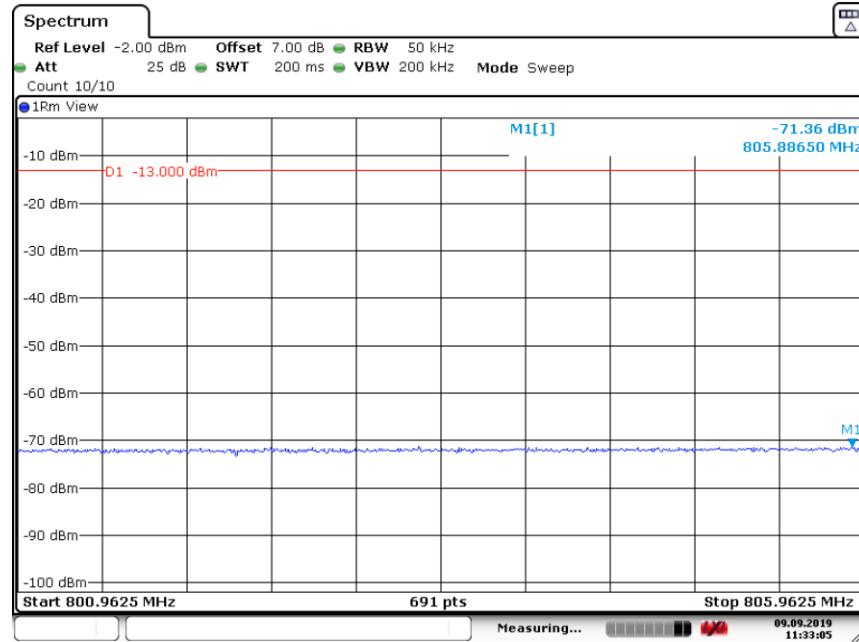


Date: 9.SEP.2019 11:33:05

A. 5.2.7 Channel 684: 30MHz –1GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

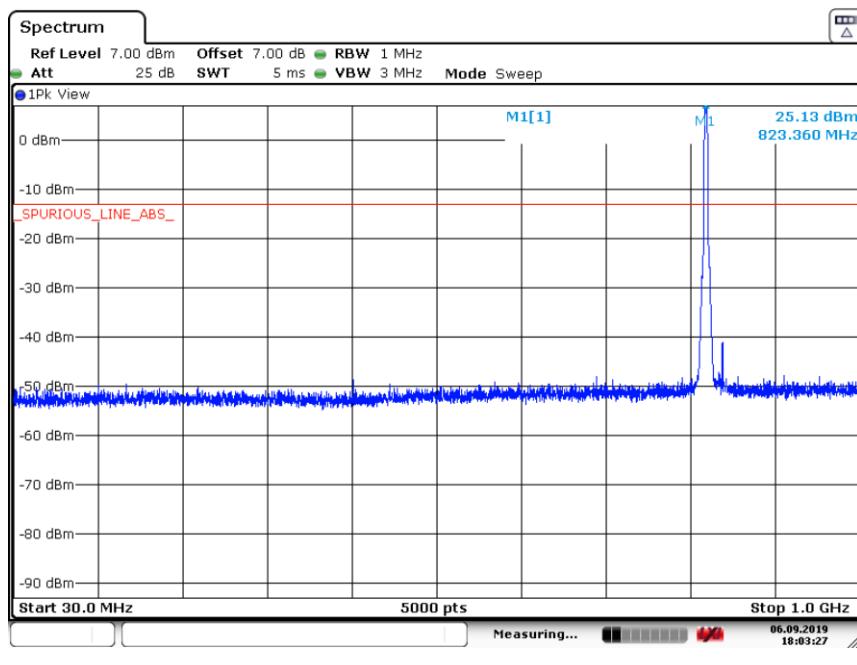


A.5.2.8 Channel 684: 1GHz –2.5GHz

Spurious emission limit –13dBm.

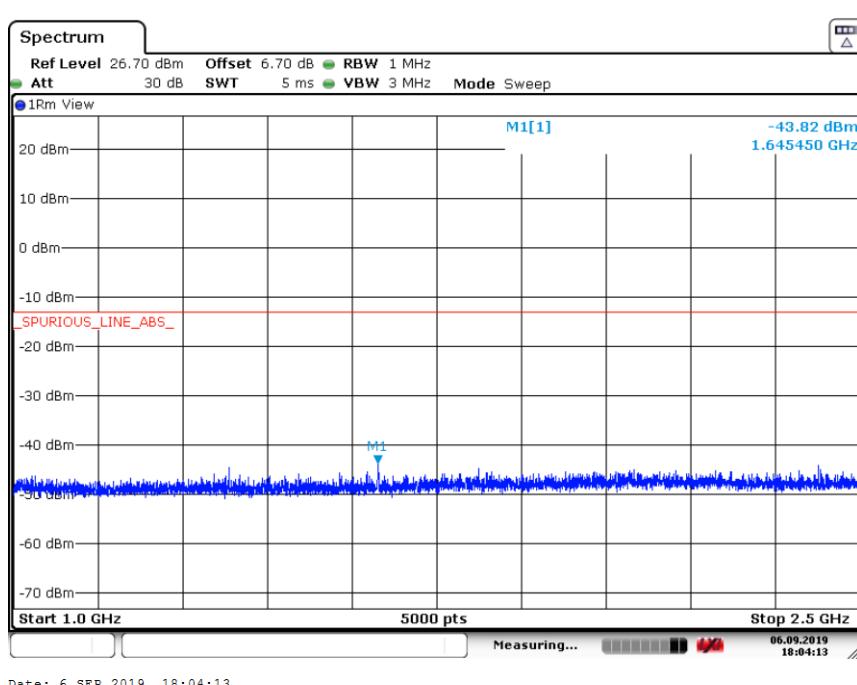

A.5.2.9 Channel 684: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

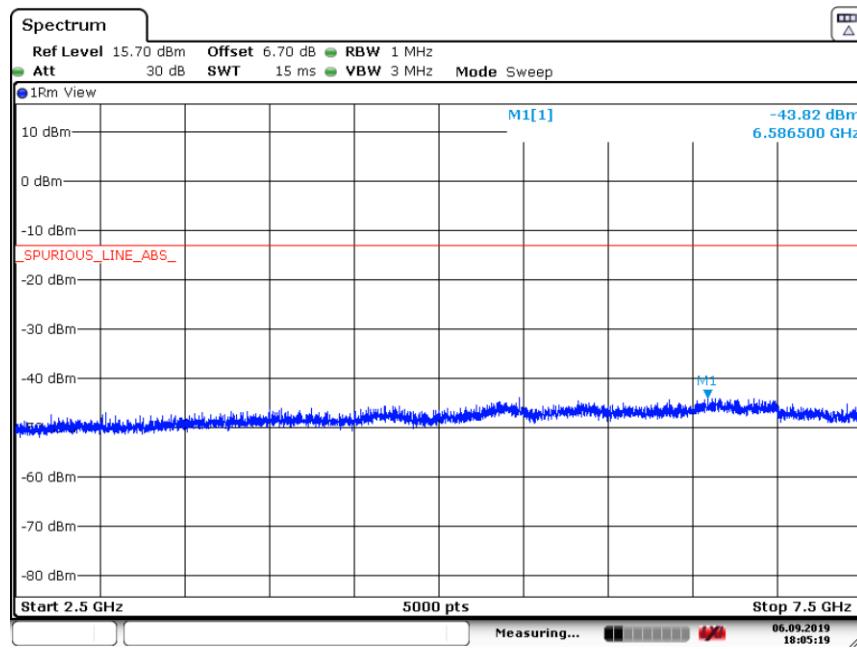

Date: 6.SEP.2019 18:05:19

A.5.2.10 Channel 684: 7.5GHz –10GHz


Spurious emission limit –13dBm.

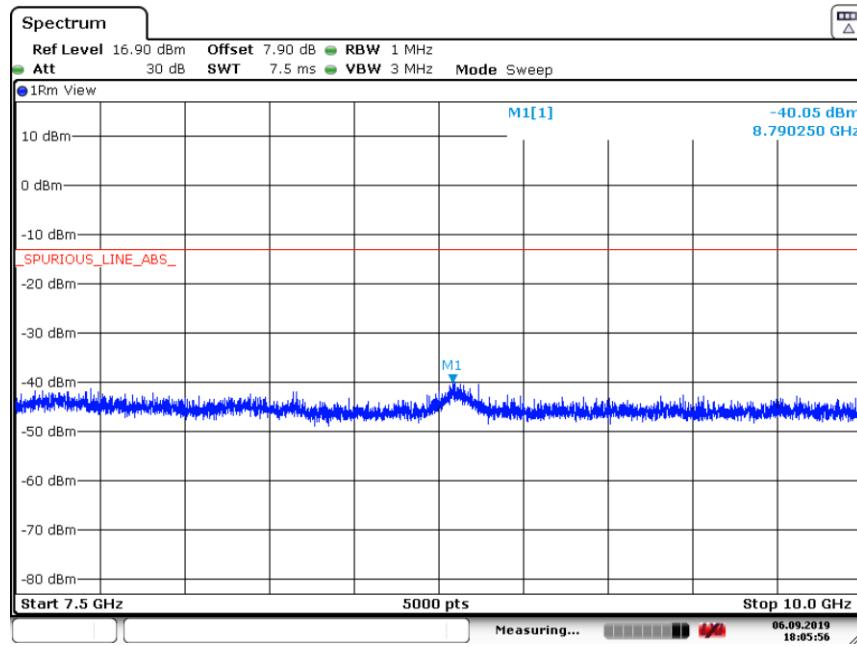

Date: 6.SEP.2019 18:05:56

A.5.2.11 Channel 684: Band Edge


Spurious emission limit –20dBm.

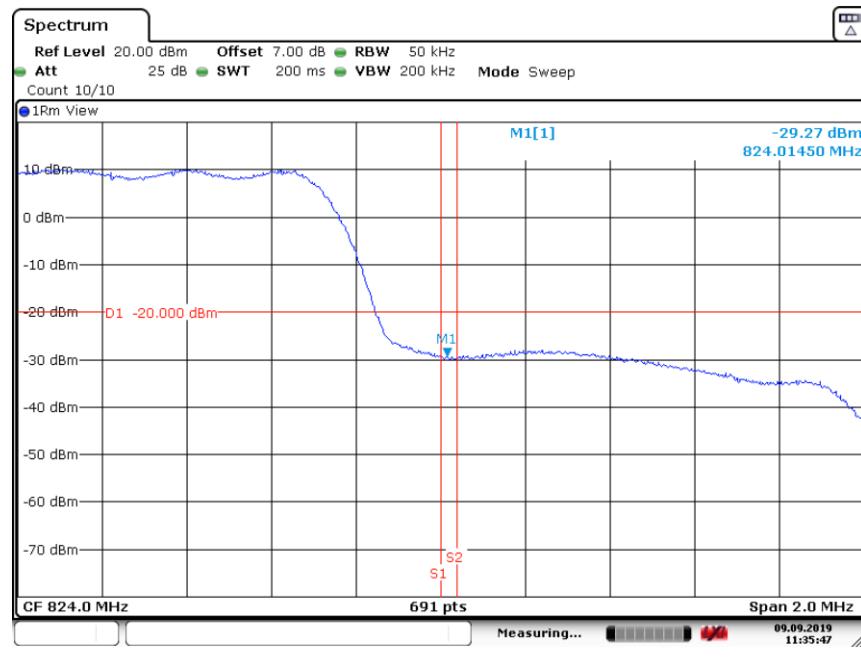

Date: 9.SEP.2019 11:35:47

A.5.2.12 Channel 684: Outer Extended Band Edge

Spurious emission limit –13dBm.

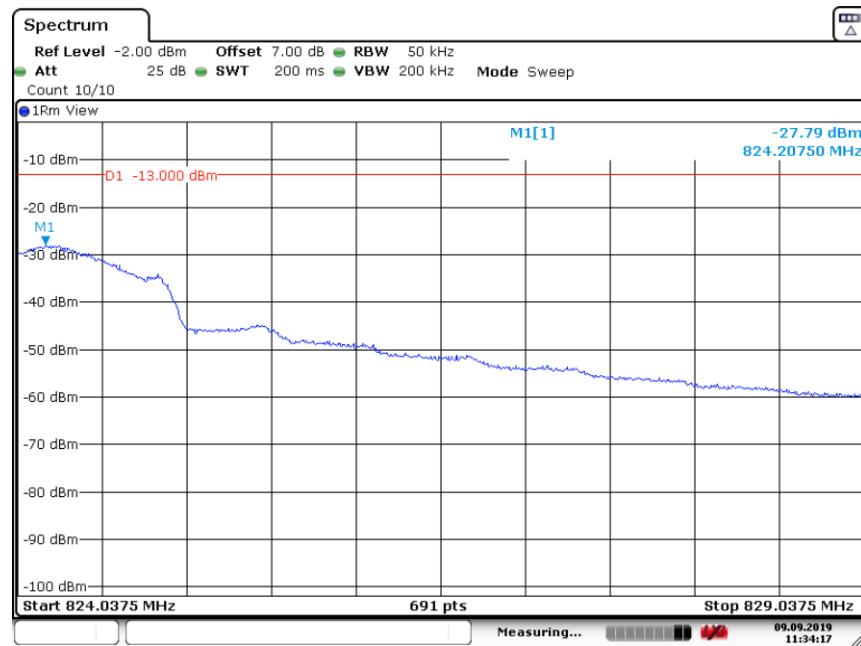

Date: 9.SEP.2019 11:34:17

ANNEX B: Accreditation Certificate

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT

Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*


Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2019-09-26 through 2020-09-30

Effective Dates

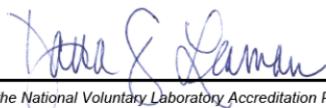


For the National Voluntary Laboratory Accreditation Program

*****END OF REPORT*****