



FCC Test Report

Report No: FCS202007028W01

Issued for

Applicant:	ShenZhen Alacrity Barcode Technology Co.,Ltd
Address:	2nd Floor, Building 1, Zhengshang Industrial Park,Rd.Longguan, Longhua District Shenzhen China
Product Name:	BODY TEMPERATURE SCANNER
Brand Name:	symcode
Model Name:	R60
Series Model:	OH3502, OH4502, OH4503, X5, X6,X7, MJ-2877,R50
FCC ID:	2AM8X-R60
<p>Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.fcs-lab.com</p>	

TEST RESULT CERTIFICATION

Applicant's Name: ShenZhen Alacrity Barcode Technology Co.,Ltd

Address: 2nd Floor, Building 1, Zhengshang Industrial Park,Rd.Longguan, Longhua District Shenzhen China

Manufacture's Name: ShenZhen Alacrity Barcode Technology Co.,Ltd

Address: 2nd Floor, Building 1, Zhengshang Industrial Park,Rd.Longguan, Longhua District Shenzhen China

Product Description

Product Name: BODY TEMPERATURE SCANNER

Model Name: R60

Series Model: OH3502, OH4502, OH4503, X5, X6,X7, MJ-2877,R50

Test Standards: FCC Rules and Regulations Part 15 Subpart C, Section 249

Test Procedure: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: 22 July. 2020 ~ 05 August. 2020

Date of Issue: 05 August. 2020

Test Result: Pass

Tested by : 
(Chris Chen)

Reviewed by : 
(Jack Chen)

Approved by : 
(Andy yue)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.4 EQUIPMENTS LIST	11
3 CONDUCTED EMISSION MEASUREMENT	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST RESULTS	13
4. RADIATED EMISSION MEASUREMENT	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 TEST SETUP	18
4.4 TEST RESULTS	19
5. BAND EDGE TEST	25
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 TEST SETUP	26
5.4 TEST RESULTS	27
6. 20 DB BANDWIDTH TEST	31
6.1 LIMIT	31
6.2 TEST PROCEDURE	31
6.3 TEST SETUP	31
6.4 TEST RESULTS	32
7. ANTENNA REQUIREMENT	34
7.1 STANDARD REQUIREMENT	34
7.2 EUT ANTENNA	34

Revision History

Rev.	Issue Date	Effect Page	Contents
00	05 August. 2020	All	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.249 Meas Guidance v05r02

FCC Part 15.247,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.205(a), 15.209(a), 15.249(a), 15.249(c)	Radiated Spurious Emission	PASS	--
15.209	Field strength of fundamental	PASS	--
15.249(d)	Band Edge Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number:	514908
Designation number:	CN0127
A2LA accreditation number:	5545.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated(<1G) 30MHz-1000MHz	± 5.2 dB
6	All emissions, radiated (1GHz -18GHz)	± 3.66 dB
7	All emissions, radiated (18GHz -40GHz)	± 4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	BODY TEMPERATURE SCANNER
Trade Name	N/A
Model Name	R60
Series Model	OH3502, OH4502, OH4503, X5, X6,X7, MJ-2877,R50
Model Difference	The electrical circuit design, layout, components used and internal wiring for above models are identical, only different in model name and appearance.
Channel List	Please refer to the Note 2.
Frequency	Frequency:2402-2480MHz Modulation: GFSK Channel number: 40CH
Power Supply	DC 5V by Adapter
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel List

Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2402	11	2422	21	2442	31	2462
02	2404	12	2424	22	2444	32	2464
03	2406	13	2426	23	2446	33	2466
04	2408	14	2428	24	2448	34	2468
05	2410	15	2430	25	2450	35	2470
06	2412	16	2432	26	2452	36	2472
07	2414	17	2434	27	2454	37	2474
08	2416	18	2436	28	2456	38	2476
09	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	KXX	PCB antenna	N/A	1.00dBi	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: FCC tool


The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

Tested mode, channel , information		
Mode	Channel	Frequency (MHz)
GFSK	CH 01	2402
	CH 20	2440
	CH 40	2480

Note:

(1) During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply voltage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

configuration of EUT system



Remark: The adapter is for testing only in report

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	Couupper	HU0324	00003245	this adapter is for testing only in report

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2019.05.31	2020.05.30
Signal Analyzer	R&S	FSV40-N	FCS-E012	2019.06.05	2020.06.04
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2019.10.11	2020.10.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2019.10.26	2020.10.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2019.05.31	2020.05.30
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2019.05.31	2020.05.30
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2019.05.31	2020.05.30
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2019.10.03	2020.10.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2019.10.08	2020.10.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2019.05.31	2020.05.30

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2019.05.31	2020.05.30
LISN	R&S	ENV216	FCS-E007	2019.05.15	2020.05.14
LISN	ETS	3810/2NM	FCS-E009	2019.10.15	2020.10.14
Temperature & Humidity	HTC-1	victor	FCS-E008	2019.05.31	2020.05.30

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2019.10.02	2020.10.01
Spectrum Analyzer	Agilent	E4447A	MY50180039	2019.11.08	2020.11.07
Spectrum Analyzer	R&S	FSV-40	101499	2019.10.10	2020.10.09

3 CONDUCTED EMISSION MEASUREMENT

3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

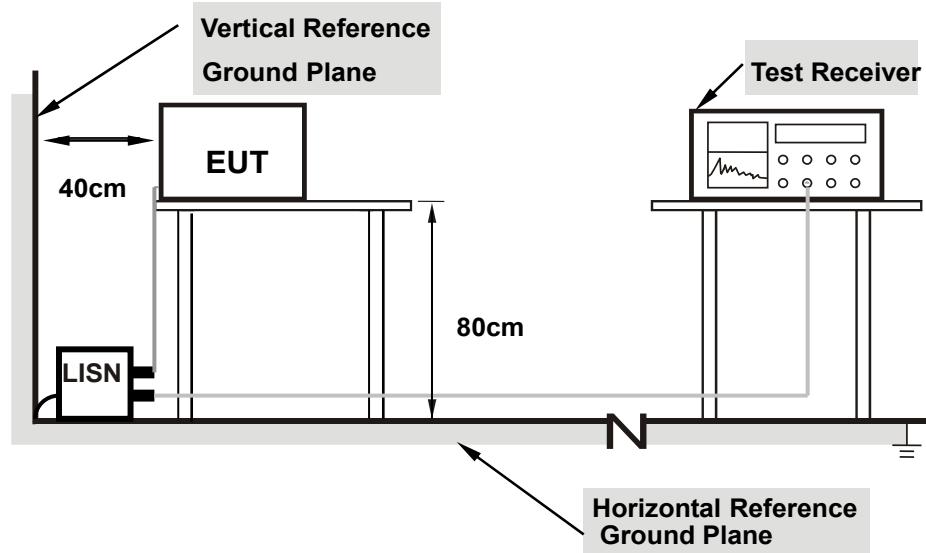


Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	AC 120V,60HZ
Result:	Pass		

L-Line

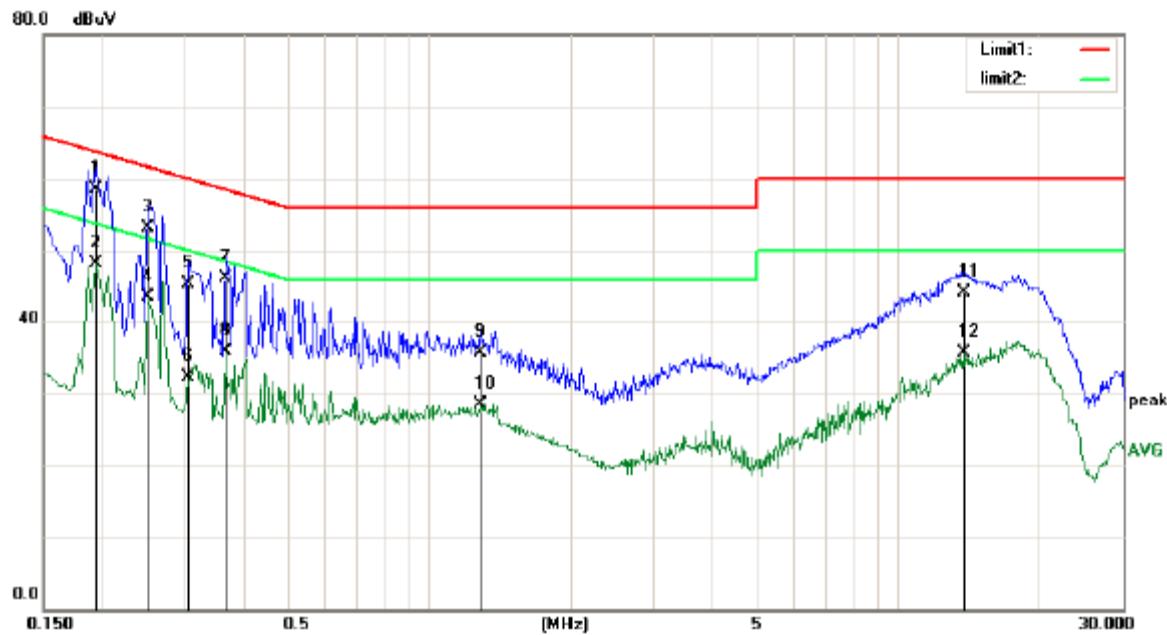


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2140	29.35	11.03	40.38	63.04	-22.66	QP
2	0.2140	13.07	11.03	24.10	53.04	-28.94	AVG
3	0.5820	26.14	10.16	36.30	56.00	-19.70	QP
4	0.5820	16.74	10.16	26.90	46.00	-19.10	AVG
5	1.0620	16.35	10.10	26.45	56.00	-29.55	QP
6	1.0620	14.07	10.10	24.17	46.00	-21.83	AVG
7	2.3220	16.97	10.12	27.09	56.00	-28.91	QP
8	2.3220	9.81	10.12	19.93	46.00	-26.07	AVG
9	6.5579	14.31	10.12	24.43	60.00	-35.57	QP
10	6.5579	5.83	10.12	15.95	50.00	-34.05	AVG
11	14.0979	16.82	10.16	26.98	60.00	-33.02	QP
12	14.0979	6.04	10.16	16.20	50.00	-33.80	AVG

Note: Level=reading+factor

Margin=Level-limit

N-line

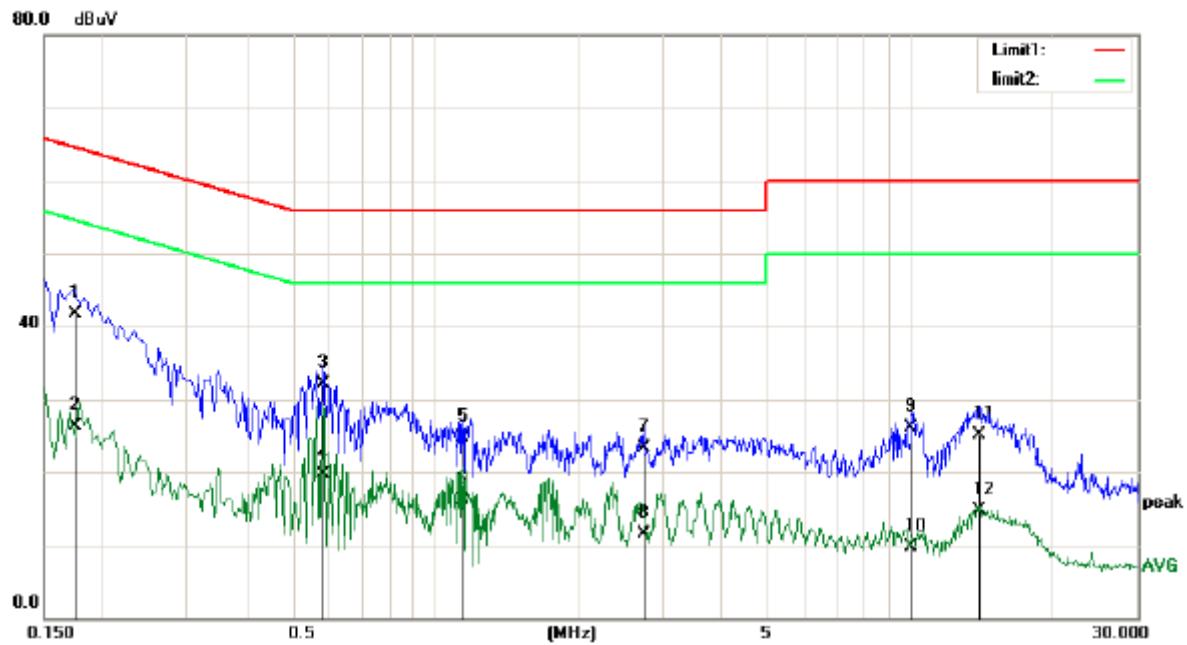

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1740	30.34	11.30	41.64	64.76	-23.12	QP
2	0.1740	15.02	11.30	26.32	54.76	-28.44	AVG
3	0.5820	21.87	10.16	32.03	56.00	-23.97	QP
4	0.5820	9.49	10.16	19.65	46.00	-26.35	AVG
5	1.1420	14.52	10.10	24.62	56.00	-31.38	QP
6	1.1420	6.10	10.10	16.20	46.00	-29.80	AVG
7	2.7380	13.14	10.13	23.27	56.00	-32.73	QP
8	2.7380	1.37	10.13	11.50	46.00	-34.50	AVG
9	10.0219	15.96	10.14	26.10	60.00	-33.90	QP
10	10.0219	-0.44	10.14	9.70	50.00	-40.30	AVG
11	13.9179	14.87	10.16	25.03	60.00	-34.97	QP
12	13.9179	4.51	10.16	14.67	50.00	-35.33	AVG

Note: Level=reading+factor

Margin=Level-limit

4. RADIATED EMISSION MEASUREMENT

4.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
2400-2483.5	114	94

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	PK=2MHz / 2MHz, AV=1 MHz /10 Hz


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

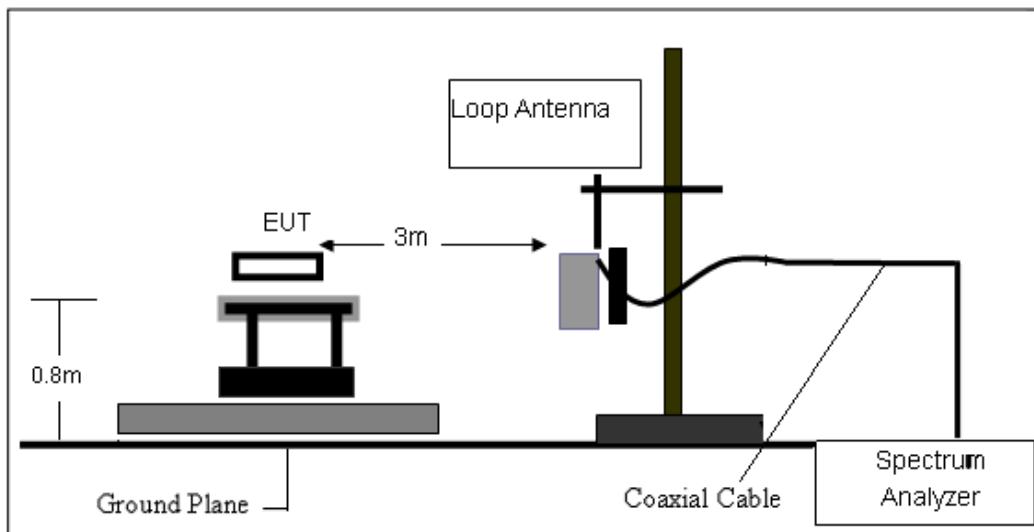

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

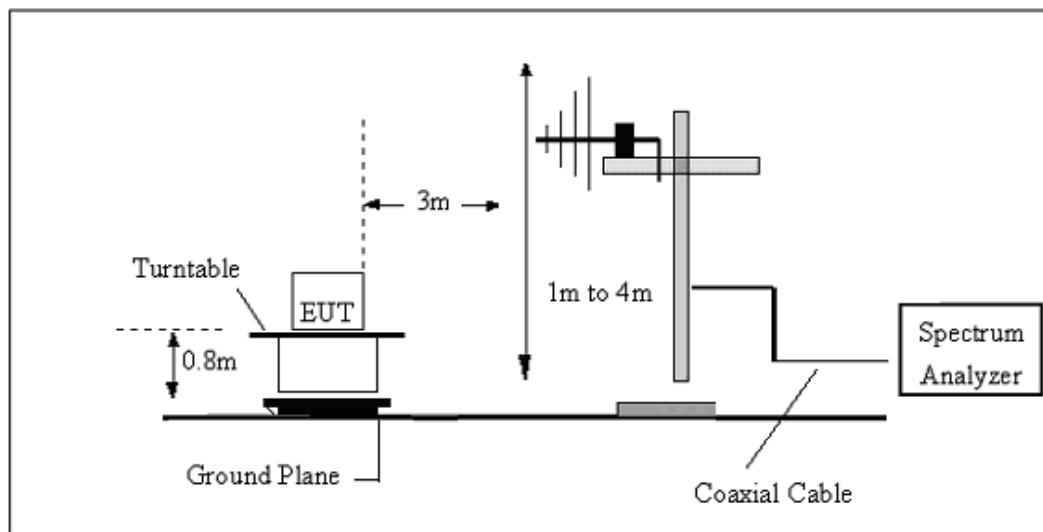

(C) Radiated Emission Test-Up Frequency Above 1GHz

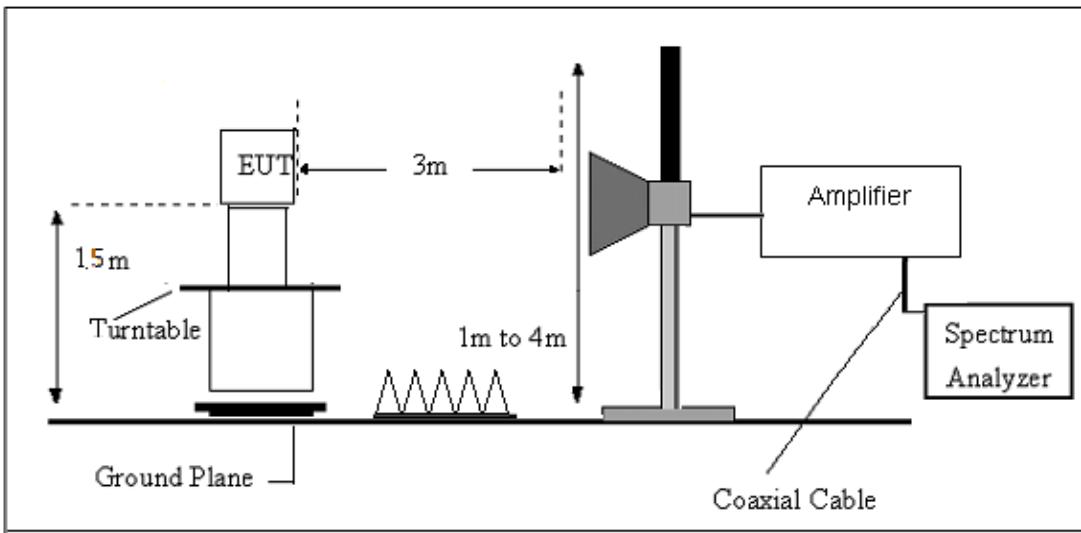

4.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	GFSK Mode	Test Voltage:	DC 5V

For field strength of the fundamental signal

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	89.71	27.58	5.39	30.18	92.50	114.00	-21.50	Vertical
2402.00	87.53	27.58	5.39	30.18	90.32	114.00	-23.68	Horizontal
2440.00	88.24	27.55	5.43	30.06	91.16	114.00	-22.84	Vertical
2440.00	86.58	27.55	5.43	30.06	89.50	114.00	-24.50	Horizontal
2480.00	90.70	27.52	5.47	29.93	93.76	114.00	-20.24	Vertical
2480.00	87.85	27.52	5.47	29.93	90.91	114.00	-23.09	Horizontal

Average value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	77.48	27.58	5.39	30.18	80.27	94.00	-13.73	Vertical
2402.00	75.57	27.58	5.39	30.18	78.36	94.00	-15.64	Horizontal
2440.00	75.95	27.55	5.43	30.06	78.87	94.00	-15.13	Vertical
2440.00	73.22	27.55	5.43	30.06	76.14	94.00	-17.86	Horizontal
2480.00	78.26	27.52	5.47	29.93	81.32	94.00	-12.68	Vertical
2480.00	75.73	27.52	5.47	29.93	78.79	94.00	-15.21	Horizontal

For spurious emission

(9KHz-30MHz)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance/test distance)(dB);

Limit line = specific limits (dBuv) + distance extrapolation factor.

(30MHz-1000MHz)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	CH 20		

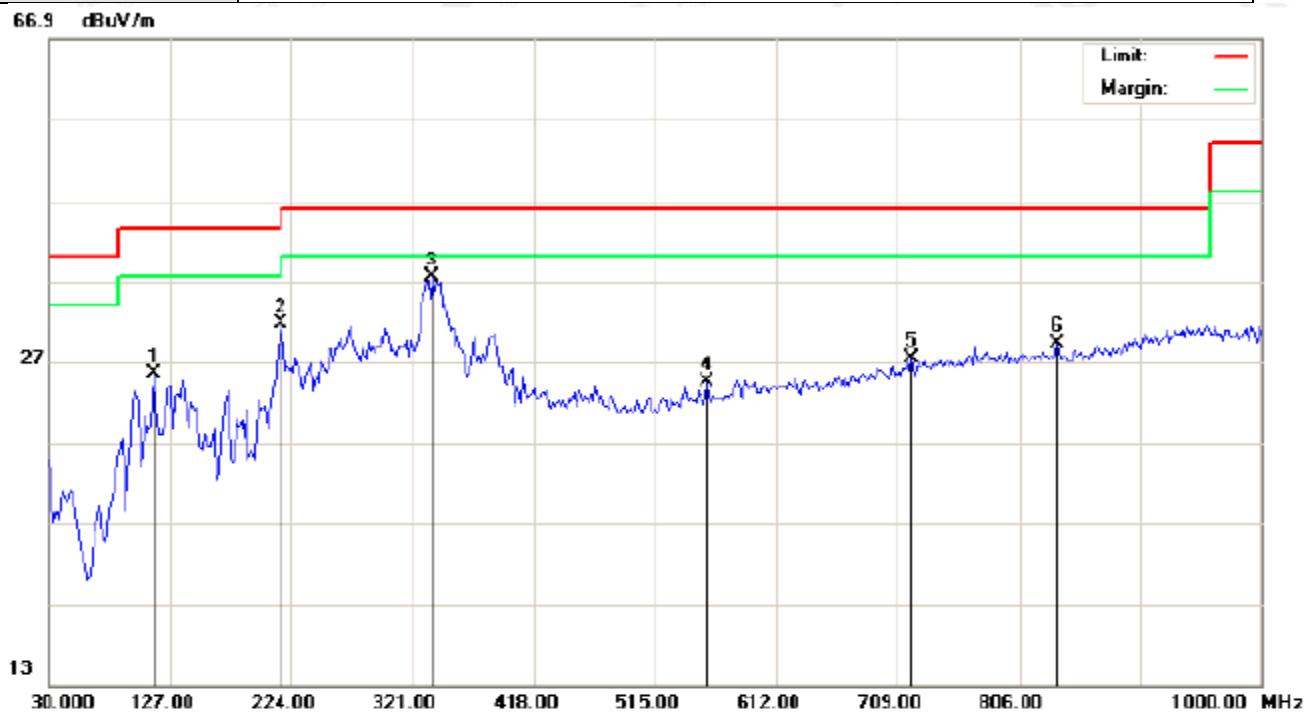


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		114.0667	18.22	7.23	25.45	43.50	-18.05	peak			
2		215.9167	21.25	10.38	31.63	43.50	-11.87	peak			
3	*	337.1667	19.57	17.89	37.46	46.00	-8.54	peak			
4		557.0333	1.70	22.66	24.36	46.00	-21.64	peak			
5		720.3167	1.56	25.79	27.35	46.00	-18.65	peak			
6		836.7167	1.89	27.31	29.20	46.00	-16.80	peak			

Remarks:

1. Final Level = Receiver Read level + Factor
2. CH 01, CH20, CH40 were testd, and only the data of worst case was exhibited.

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	CH 20		

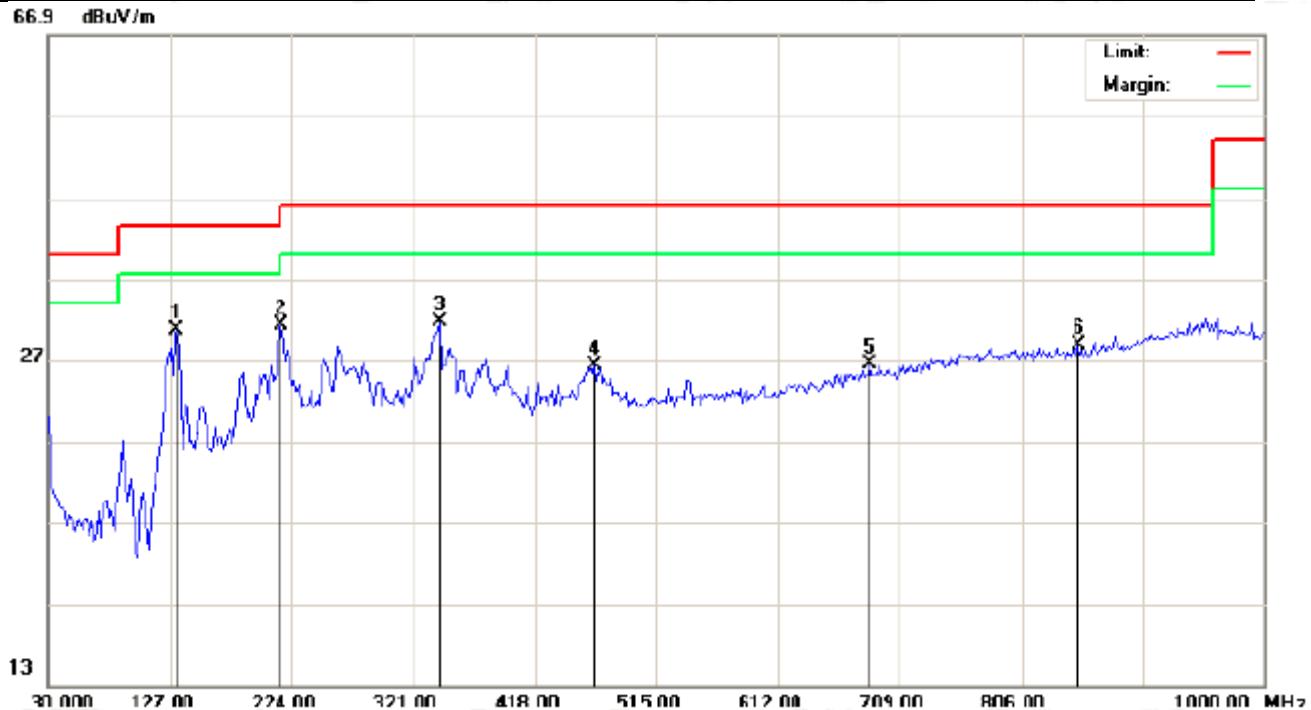

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		131.8500	18.74	11.80	30.54	43.50	-12.96	peak			
2	*	215.9167	20.56	10.56	31.12	43.50	-12.38	peak			
3		342.0167	13.32	18.21	31.53	46.00	-14.47	peak			
4		464.8833	5.43	20.75	26.18	46.00	-19.82	peak			
5		684.7500	1.66	24.78	26.44	46.00	-19.56	peak			
6		851.2667	1.42	27.34	28.76	46.00	-17.24	peak			

Remarks:

1. Final Level = Receiver Read level + Factor
2. CH 01, CH20, CH40 were testd, and only the data of worst case was exhibited.

(1GHZ~25GHZ) RESTRICTED BAND AND SPURIOUS EMISSION REQUIREMENTS

LOW CH

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	35.97	31.78	8.60	32.09	44.26	74.00	-29.74	Vertical
7206.00	30.94	36.15	11.65	32.00	46.74	74.00	-27.26	Vertical
9608.00	30.68	37.95	14.14	31.62	51.15	74.00	-22.85	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	39.98	31.78	8.60	32.09	48.27	74.00	-25.73	Horizontal
7206.00	32.58	36.15	11.65	32.00	48.38	74.00	-25.62	Horizontal
9608.00	29.97	37.95	14.14	31.62	50.44	74.00	-23.56	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	25.03	31.78	8.60	32.09	33.32	54.00	-20.68	Vertical
7206.00	19.78	36.15	11.65	32.00	35.58	54.00	-18.42	Vertical
9608.00	18.94	37.95	14.14	31.62	39.41	54.00	-14.59	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	29.11	31.78	8.60	32.09	37.40	54.00	-16.60	Horizontal
7206.00	21.86	36.15	11.65	32.00	37.66	54.00	-16.34	Horizontal
9608.00	18.56	37.95	14.14	31.62	39.03	54.00	-14.97	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

MIDDLE CH

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	35.88	31.85	8.67	32.12	44.28	74.00	-29.72	Vertical
7320.00	30.89	36.37	11.72	31.89	47.09	74.00	-26.91	Vertical
9760.00	30.63	38.35	14.25	31.62	51.61	74.00	-22.39	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	39.88	31.85	8.67	32.12	48.28	74.00	-25.72	Horizontal
7320.00	32.52	36.37	11.72	31.89	48.72	74.00	-25.28	Horizontal
9760.00	29.92	38.35	14.25	31.62	50.90	74.00	-23.10	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	24.97	31.85	8.67	32.12	33.37	54.00	-20.63	Vertical
7320.00	19.74	36.37	11.72	31.89	35.94	54.00	-18.06	Vertical
9760.00	18.90	38.35	14.25	31.62	39.88	54.00	-14.12	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	29.04	31.85	8.67	32.12	37.44	54.00	-16.56	Horizontal
7320.00	21.82	36.37	11.72	31.89	38.02	54.00	-15.98	Horizontal
9760.00	18.52	38.35	14.25	31.62	39.50	54.00	-14.50	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

HIGH CH

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	35.76	31.93	8.73	32.16	44.26	74.00	-29.74	Vertical
7440.00	30.81	36.59	11.79	31.78	47.41	74.00	-26.59	Vertical
9920.00	30.56	38.81	14.38	31.88	51.87	74.00	-22.13	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.73	31.93	8.73	32.16	48.23	74.00	-25.77	Horizontal
7440.00	32.43	36.59	11.79	31.78	49.03	74.00	-24.97	Horizontal
9920.00	29.83	38.81	14.38	31.88	51.14	74.00	-22.86	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.91	31.93	8.73	32.16	33.41	54.00	-20.59	Vertical
7440.00	19.69	36.59	11.79	31.78	36.29	54.00	-17.71	Vertical
9920.00	18.86	38.81	14.38	31.88	40.17	54.00	-13.83	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.97	31.93	8.73	32.16	37.47	54.00	-16.53	Horizontal
7440.00	21.77	36.59	11.79	31.78	38.37	54.00	-15.63	Horizontal
9920.00	18.47	38.81	14.38	31.88	39.78	54.00	-14.22	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. **, means this data is the too weak instrument of signal is unable to test.

5. BAND EDGE TEST

5.1 LIMIT

According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


5.2 TEST PROCEDURE

- a. The EUT is placed on a turntable, which is 1.5m above ground plane.
- b. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
Use the following spectrum analyzer settings:
 - c. Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max holdFollow the guidelines in ANSI C63.4-1992 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
- d. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with
- e. the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{duty cycle}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

Submit this data.

5.3 TEST SETUP


Radiated Emission Test-Up Frequency Above 1GHz

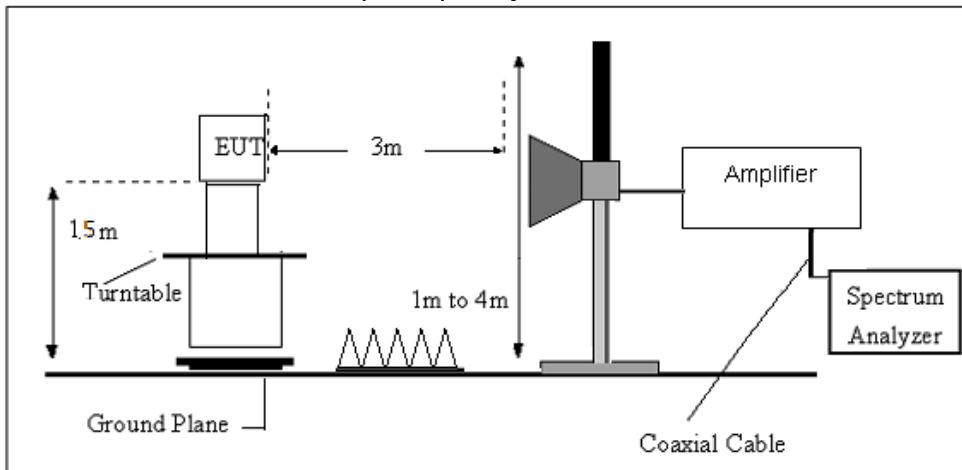

5.4 TEST RESULTS

Low CH

Polarization: Horizontal

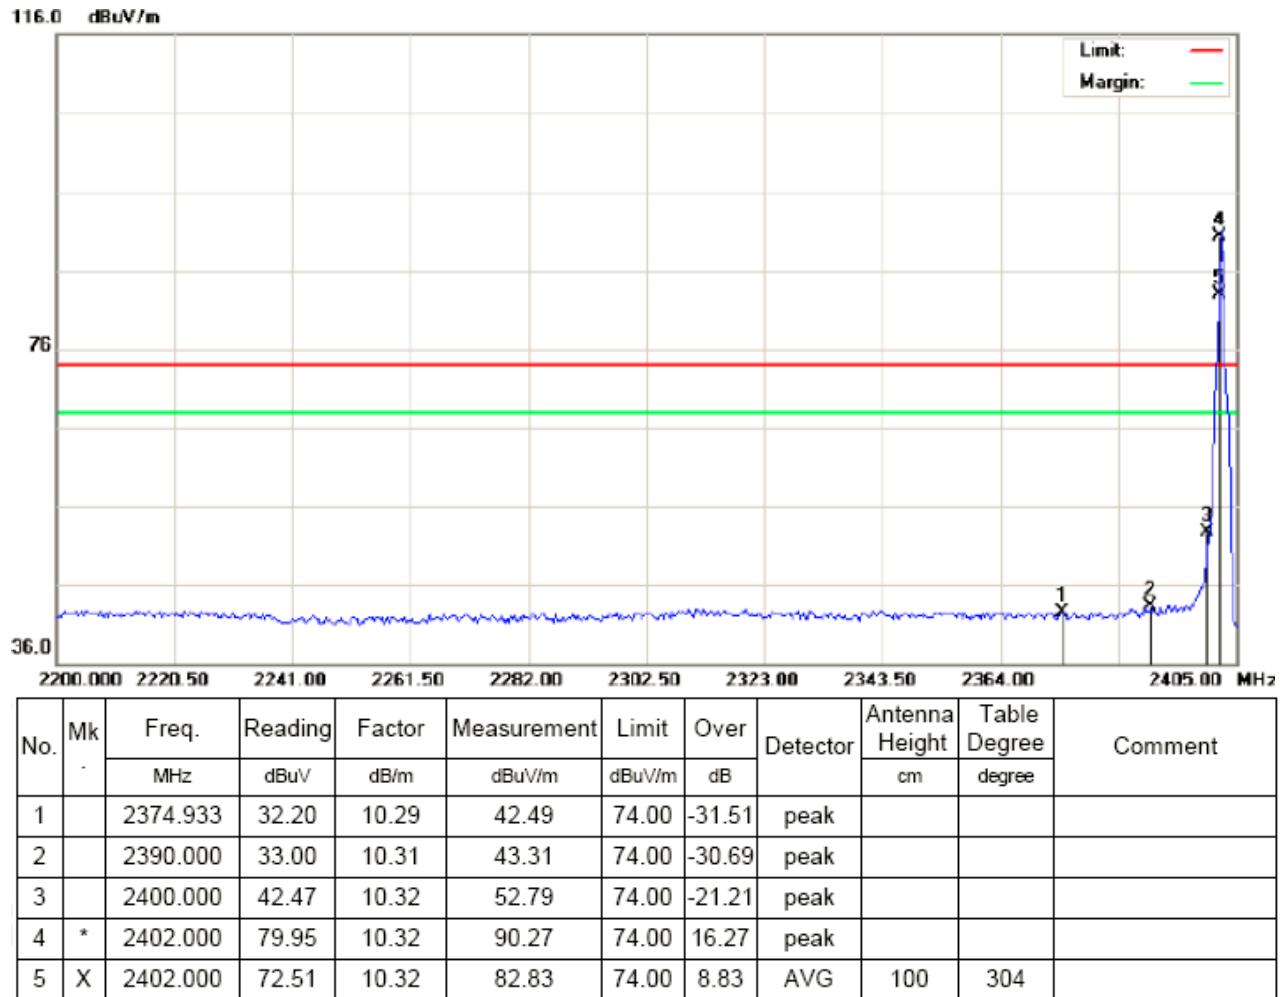

Remarks:

1. Final Level = Receiver Read level + Factor

Polarization: Vertical

116.0 dBuV/m



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2376.983	33.99	10.29	44.28	74.00	-29.72	peak			
2		2390.000	32.21	10.31	42.52	74.00	-31.48	peak			
3		2400.000	36.06	10.32	46.38	74.00	-27.62	peak			
4	*	2402.000	79.59	10.32	89.91	74.00	15.91	peak			
5	X	2402.000	71.84	10.32	82.16	74.00	8.16	AVG	100	134	


Remarks:

1. Final Level = Receiver Read level + Factor

High CH

Ploarization: Horizontal

116.0 dBuV/m

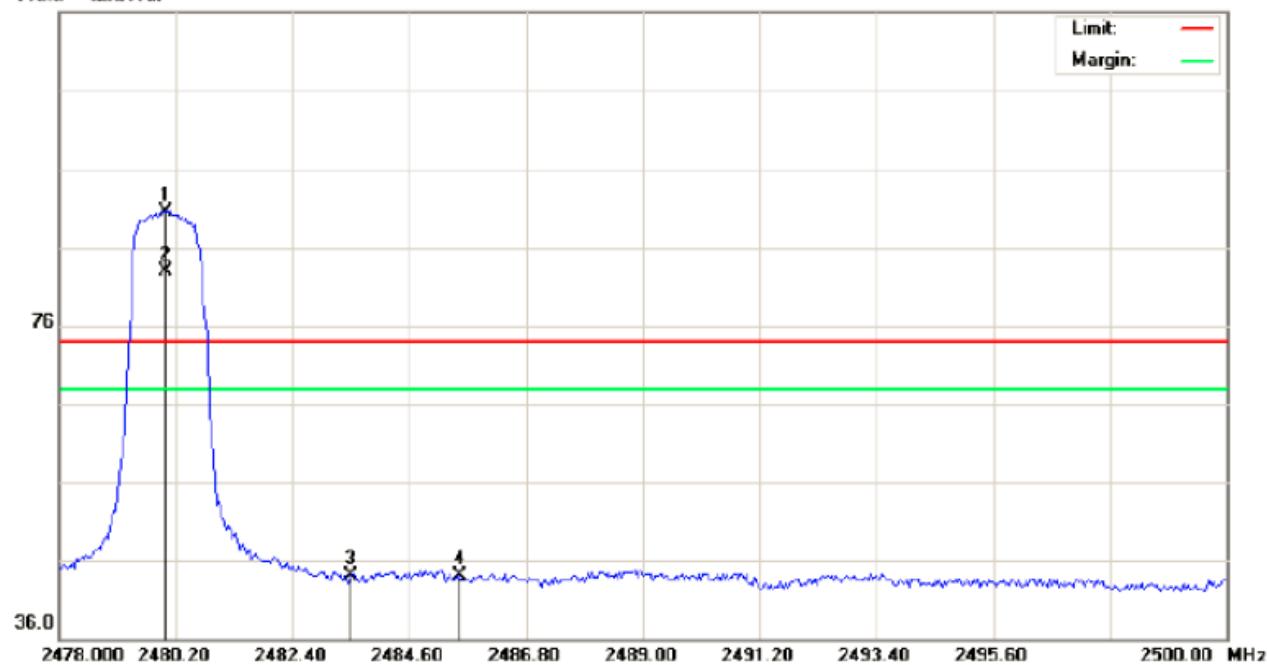

No.	Mlk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	80.17	10.41	90.58	74.00	16.58	peak			
2	X	2480.000	72.43	10.41	82.84	74.00	8.84	AVG	100	303	
3		2483.500	33.69	10.41	44.10	74.00	-29.90	peak			
4		2485.553	33.76	10.41	44.17	74.00	-29.83	peak			

Remarks:

1. Final Level =Receiver Read level + Factor

Ploarization: Vertical

116.0 dBuV/m



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comme
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	79.96	10.41	90.37	74.00	16.37	peak			
2	X	2480.000	72.08	10.41	82.49	74.00	8.49	AVG	100	127	
3		2483.500	33.76	10.41	44.17	74.00	-29.83	peak			
4		2485.370	34.89	10.41	45.30	74.00	-28.70	peak			

Remarks:

1. Final Level =Receiver Read level + Factor

6. 20 DB BANDWIDTH TEST

6.1 LIMIT


According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

6.2 TEST PROCEDURE

Check the calibration of the measuring instrument using either an internal calibrator or a

- a. known signal from an external generator
- b. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


6.3 TEST SETUP


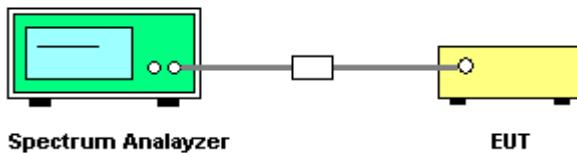


6.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 5V

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.222	PASS
2440 MHz	1.223	PASS
2480 MHz	1.217	PASS

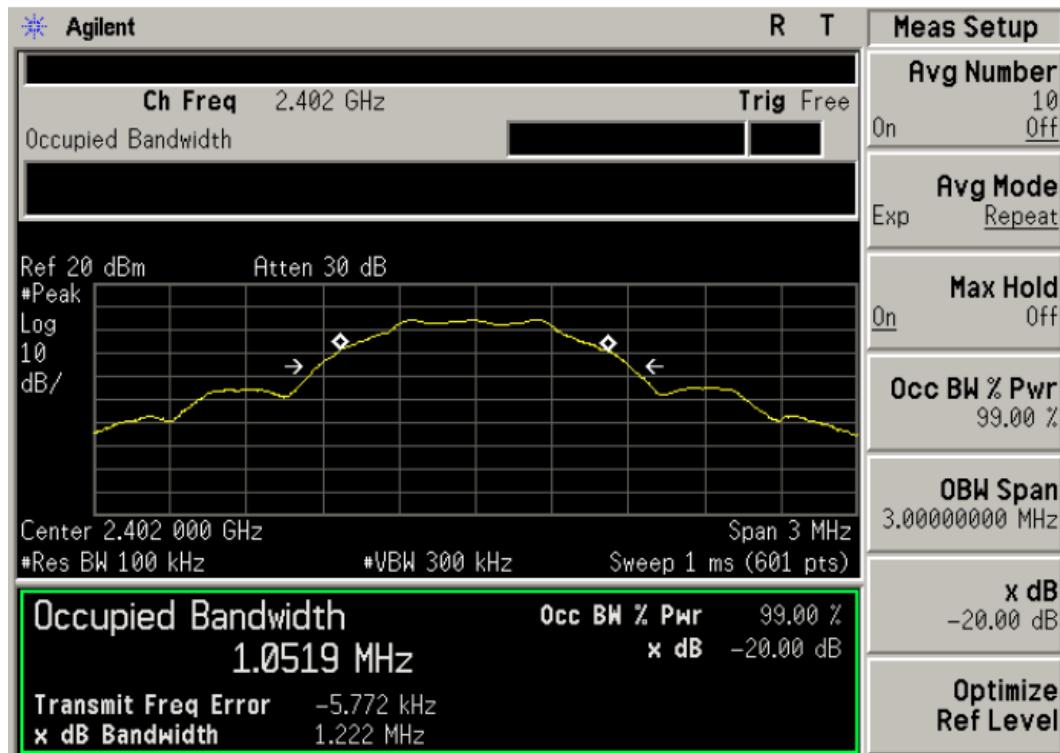

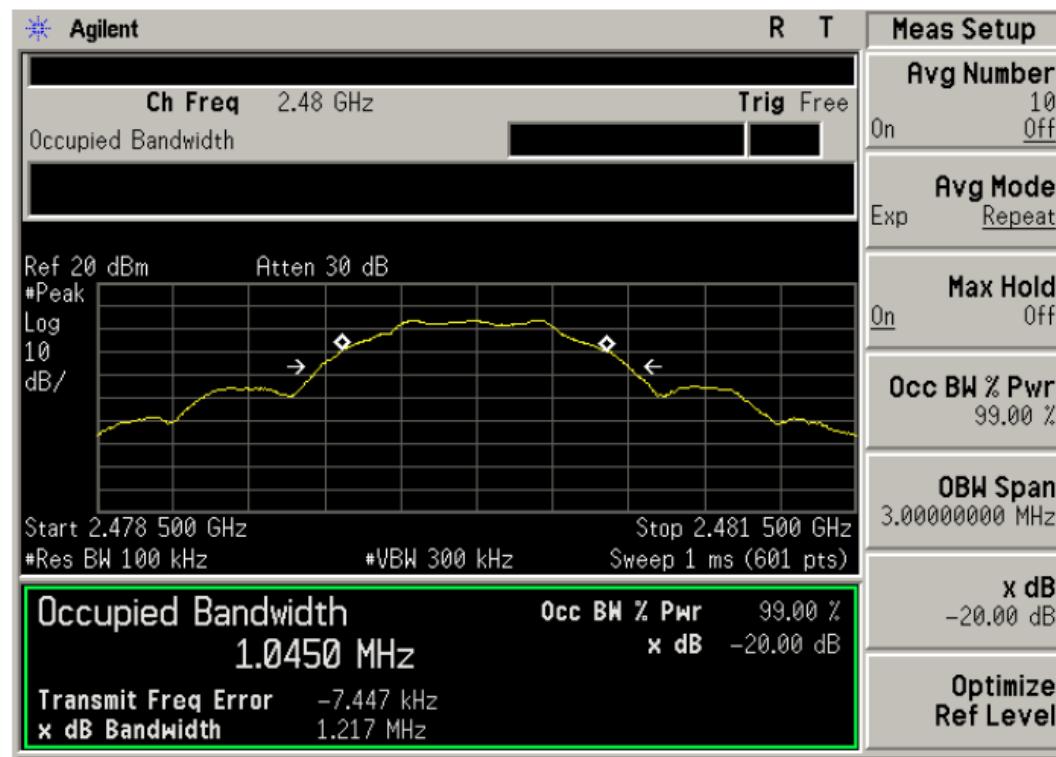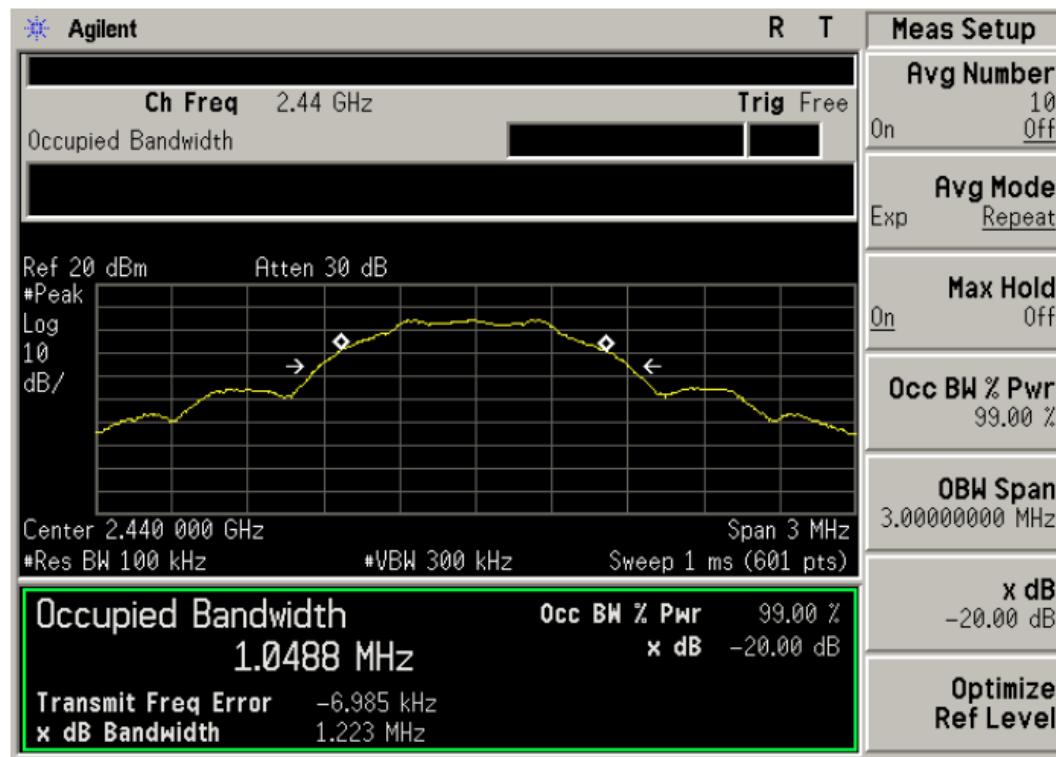

7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.

*****END OF THE REPORT*****