

TEST REPORT

Report No.: SHATBL2412023W02

Applicant : Tersus GNSS Inc.

Product Name : GNSS Receiver

Brand Name : N/A

Model Name : LUKA

FCC ID : 2AMDJ-LUKA


Test Standard : 47 CFR 15.247

Date of Test : 2025.01.03-2025.03.12


Report Prepared by :


(Emily)

Report Approved by :


(Guozheng Li)

Authorized Signatory :


(Terry Yang)



"Shanghai ATBL Technology Co., Ltd." hereby certifies that according to actual testing conditions. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards, or regulations, ATBL shall not assume any responsibility. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material. This report will be void without authorized signature or special seal for testing report. Do not copied without authorization.

TABLE OF CONTENTS

REVISION HISTORY	3
DECLARATION OF REPORT	4
SUMMARY OF TEST RESULT	5
1. GENERAL DESCRIPTION	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Factory	6
1.4. General Information of EUT	7
1.5. Equipment Specification	7
1.6. Modification of EUT	8
1.7. Laboratory Information	8
1.8. Applicable Standards	8
2. TEST CONFIGURATION OF EUT	9
2.1. Carrier Frequency Channel	9
2.2. Test Modes	9
2.3. Block Diagram of Test System	10
2.4. Description of Support Units	10
2.5. Test Software and Power Level	10
2.6. EUT Operating Conditions	10
2.7. Equipment List	11
2.8. Measurement Uncertainty	12
3. TEST RESULT	13
3.1. Maximum Peak Conducted Output Power	13
3.2. Duty Cycle	15
3.3. 6dB Bandwidth and 99% Bandwidth	16
3.4. Power Spectral Density	18
3.5. Conducted Band Edge	19
3.6. Conducted Spurious Emission	20
3.7. Radiated Spurious Emission and Restricted Band	21
3.8. AC Power-Line Conducted Emission	25
3.9. Antenna Requirement	26
4. TEST SETUP PHOTOGRAPHS	26
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	26
Appendix A _ Conducted Test Data	28
Appendix A1. Conducted Output Power	28
Appendix A2. Duty Cycle	30
Appendix A3. 6dB Bandwidth and 99% Bandwidth	32
Appendix A4. Power Spectral Density	34
Appendix A5. Conducted Spurious Emission	35
Appendix B _ Radiated Test Data and AC Power-Line Conducted Emission	39
Appendix B1. Radiated Spurious Emission	39
Appendix B2. Test Result of Restricted Band	55
Appendix B3. AC Power-Line Conducted Emission Test Data	71

REVISION HISTORY

Rev.	Issue Date	Revisions	Revised by
00	2025.03.12	Initial Release	Guozheng Li

DECLARATION OF REPORT

1. The device has been tested by ATBL, and the test results show that the equipment under test (EUT) is in compliance with the requirements of 47 CFR 15.247. And it is applicable only to the tested sample identified in the report.
2. This report shall not be reproduced except in full, without the written approval of ATBL, this document only be altered or revised by ATBL, personal only, and shall be noted in the revision of the document.
3. The general information of EUT in this report is provided by the customer or manufacture, ATBL is only responsible for the test data but not for the information provided by the customer or manufacture.
4. The results in this report is only apply to the sample as tested under conditions. The customer or manufacturer is responsible for ensuring that the additional production units of this model have the same electrical and mechanical components.
5. In this report, '☐' indicates that EUT does not support content after '☐', and '☑' indicates that it supports content after '☑'
6. Both the conducted and radiated tests are conducted using modules with a supply voltage of 12V

SUMMARY OF TEST RESULT

Report Section	Standard Section	Test Item	Judgment	Remark
3.1	47 CFR 15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	--
3.2	--	Duty Cycle	Report only	--
3.3	47 CFR 15.247(a)(2)	6dB Bandwidth	PASS	--
	--	99% Bandwidth	Report only	--
3.4	47 CFR 15.247(e)	Power Spectral Density	PASS	--
3.5	47 CFR 15.247(d)	Conducted Band Edge	PASS	--
3.6	47 CFR 15.247(d)	Conducted Spurious Emission	PASS	--
3.7	47 CFR 15.247(d)/15.209(a)/15.205(a)	Radiated Spurious Emission and Restricted Band	PASS	--
3.8	47 CFR 15.207(a)	AC Power-Line Conducted Emission	PASS	--
3.9	47 CFR 15.203	Antenna Requirements	PASS	--

1. GENERAL DESCRIPTION

1.1. Applicant

Name : Tersus GNSS Inc.

Address : Rm 601, Bldg E2, No. 88, Jinjihu Ave, Suzhou, China

1.2. Manufacturer

Name : Tersus GNSS Inc.

Address : Rm 601, Bldg E2, No. 88, Jinjihu Ave, Suzhou, China

1.3. Factory

Name : Tersus GNSS Inc.

Address : Rm 601, Bldg E2, No. 88, Jinjihu Ave, Suzhou, China

1.4. General Information of EUT

General Information	
Equipment Name	GNSS Receiver
Brand Name	N/A
Model Name	LUKA
Series Model	N/A
Model Difference	N/A
Sample No:	202411200019003
Adapter	Model:QL015-0503100U1 Brand:/ Input:100-240V~50/60Hz 0.5A Output:5V DC 0.01-3.0A
Battery	Model:SNLB-958 Brand:/ Rated Voltage:7.4V DC Charge Limit Voltage:5V DC Capacity:7000mah
Hardware Version	V1.2
Software Version	2.0.90
Connecting I/O Port(s)	Refer to the remark below.

Remark:

The above information of EUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.5. Equipment Specification

Equipment Specification		
Frequency Range	2402 MHz - 2480 MHz	
Number of Channels	40	
Carrier Frequency of Each Channel	2402 + n*2 MHz; n = 0 ~ 39	
Maximum Output Power To Antenna	☑Bluetooth LE(1Mbps):	3.285 dBm (0.00213W)
	☑Bluetooth LE(2Mbps):	3.261 dBm (0.00212W)
Type of Modulation	Bluetooth LE:	GFSK
Antenna Type	Built-in	
Antenna Gain	1.25 dBi	

1.6. Modification of EUT

No modifications are made to the EUT during all test items.

1.7. Laboratory Information

Company Name	:	Shanghai ATBL Technology Co., Ltd.
Address	:	Building 8, No.160 Basheng Road, Waigaoqiao Free Trade Zone, Pudong New Area, Shanghai
Telephone	:	+86(0)21-51298625
FCC Test Firm registration Number	:	485917
A2LA Number	:	6184.01
CNAS Number	:	CNAS L14531
CAB Identifier	:	CN0116

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

47 CFR Part 15 Subpart C §15.247

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2. TEST CONFIGURATION OF EUT

2.1. Carrier Frequency Channel

Frequency Band	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
2400 - 2483.5 MHz	00	2402	14	2430	28	2458
	01	2404	15	2432	29	2460
	02	2406	16	2434	30	2462
	03	2408	17	2436	31	2464
	04	2410	18	2438	32	2466
	05	2412	19	2440	33	2468
	06	2414	20	2442	34	2470
	07	2416	21	2444	35	2472
	08	2418	22	2446	36	2474
	09	2420	23	2448	37	2476
	10	2422	24	2450	38	2478
	11	2424	25	2452	39	2480
	12	2426	26	2454	--	--
	13	2428	27	2456	--	--

Remark:

Low Channel: **CH 00_2402 MHz**; Middle Channel: **CH 19_2440 MHz**; High Channel: **CH 39_2480 MHz**.


2.2. Test Modes

The table below is showing all test modes to demonstrate in compliance with the standard.

Summary Table of Test Modes		
Test Item	Data Rate / Modulation	
	☒ Bluetooth LE(1Mbps)	☒ Bluetooth LE(2Mbps)
For Conducted and Radiated Test	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz
	Mode 2: CH19_2440 MHz	Mode 5: CH19_2440 MHz
	Mode 3: CH39_2480 MHz	Mode 6: CH39_2480 MHz
For AC Power-line Conducted Emission	Mode 7: Keep Bluetooth link under the maximum output power	

2.3. Block Diagram of Test System

2.3.1. For AC Power-Line Conducted Emission

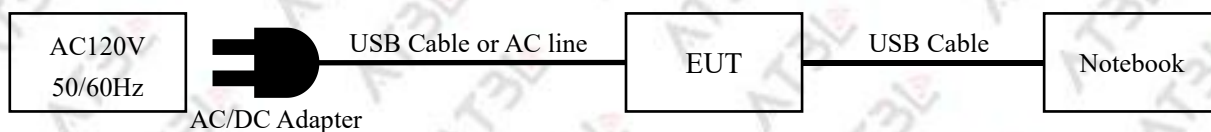

2.3.2. For Radiated Spurious Emission



2.3.3. For Conducted Test



2.4. Description of Support Units

NO.	Unit	Brand	Description
1	Notebook	Lenovo	Model:Air 14
2	USB Line	ZL	Model:24AWG

2.5. Test Software and Power Level

During the test, the channel and power control software provided by the customer is used to control the operation channel and output power level.

NO.	Frequency Fixing Software	Version	Power Level Control	Channel Association	Physical Layer
1	EspRFTesTool	v3.6	7 dBm	- Low:0 (2402MHz) - Mid:19 (2440MHz) - High:39 (2480MHz)	LE-1Mbps& LE-2Mbps

2.6. EUT Operating Conditions

For AC power-line conducted emission, the EUT was connected under the large package sizes transmission.

For radiated spurious emission and conducted test, the engineering test program was provided and make the EUT to continuous transmit/receive.

2.7. Equipment List

2.7.1. For Conducted Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	equipment number	Calibrated until	Calibrated due until	Cal. Interval
Power sensor	DARE	RPR3006W	16I00054SN016	SHATBL-W008	2024.07.18	2025.07.17	1 year
Adjustable Attenuator	Agilent	8494B	MY42144015	SHATBL-W009	2024.07.18	2025.07.17	1 year
Adjustable Attenuator	Agilent	8496B	MY42143776	SHATBL-W010	2024.07.18	2025.07.17	1 year
Environmental Test Chamber	KSON	THS-B6C-150	9159K	SHATBL-W019	2024.03.18	2025.03.17	1 year
Signal analyzer	Keysight	N9020A	MY50510136	SHATBL-W003	2024.07.18	2025.07.17	1 year
Vector signal generator	Agilent	N5182A	MY48180764	SHATBL-W043	2024.07.18	2025.07.17	1 year
Analog signal generator	Keysight	N5182B	MY57300196	SHATBL-W005	2024.07.18	2025.07.17	1 year
Wideband radio communication tester	R&S	CMW500	101331	SHATBL-W007	2024.07.18	2025.07.17	1 year
Switch Box	Cesheng	smu 1003	WCS20221215	SHATBL-W047	N/A	N/A	N/A
Thermometer	DeLi	N/A	N/A	SHATBL-W011	2024.07.22	2025.07.21	1 year
Test Software	Cesheng	WCS-WC N	N/A	SHATBL-W021	N/A	N/A	N/A

2.7.2. For Radiated Spurious Emission

Kind of Equipment	Manufacturer	Type No.	Serial No.	equipment number	Calibrated until	Calibrated due until	Cal. Interval
Signal analyzer	Agilent	N9020A	MY50200811	SHATBL-E017	2024.03.28	2025.03.27	1 year
Amplifier	JPT	JPA0118-55-303A	1910001800055000	SHATBL-E006	2024.03.28	2025.03.27	1 year
Amplifier	JPT	JPA-10M1G32	21010100035001	SHATBL-E005	2024.03.28	2025.03.27	1 year
Antenna/Turn table Controller	Brilliant	N/A	N/A	SHATBL-E007	N/A	N/A	N/A
Loop Antenna(9kHz-30 MHz)	Daze	ZN30900C	20077	SHATBL-E042	2024.05.17	2025.05.16	1 year
Bilog Antenna	SCHWARZBECK	VULB 9168	01174	SHATBL-E008	2024.05.17	2025.05.16	1 year
Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120D	02334	SHATBL-E009	2024.05.17	2025.05.16	1 year
Horn Antenna	COM-POWER	AH-1840	10100008	SHATBL-E043	2024.07.28	2025.07.27	1 year
Thermometer	DeLi	N/A	N/A	SHATBL-E015	2024.07.18	2025.07.17	1 year
Test Software	FALA	EMC-RI(Ver.4A2)	N/A	N/A	N/A	N/A	N/A
Wideband radio communication tester	R&S	CMW500	101331	SHATBL-W044	2024.07.18	2025.07.17	1 year

2.7.3. For AC Power-Line Conducted Emission

Kind of Equipment	Manufacturer	Type No.	Serial No.	equipment number	Calibrated until	Calibrated due until	Cal. Interval
EMI Test Receiver	R&S	ESPI	100679	SHATBL-E012	2024.03.28	2025.03.27	1 year
LISN	R&S	ENV216	101300	SHATBL-E013	2024.03.28	2025.03.27	1 year
CE Cable	Chuangce xing	2M	EMI0014	SHATBL-E014	2024.03.28	2025.03.27	1 year
Temperature & Humidity	Deli	Deli	EMI0015	SHATBL-E015	2024.07.22	2025.07.21	1 year
Testing Software	FALA	EZ-EMC(Ver.EMC-C ON 3A1.1)	EMI0044	SHATBL-E044	N/A	N/A	N/A

2.8. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item		Uncertainty
1	Conducted Output Power		1.27dB
2	Power spectral density		1.28dB
3	Conducted Frequency Stability		10.14Hz
4	Conducted spurious emissions		1.73dB
5	RF Cable Loss		1.22dB
6	Radiated Spurious Emission 9KHz-30MHz		2.35dB
7	Radiated Spurious Emission 30MHz-1GHz		2.59dB
8	Radiated Spurious Emission 1GHz-18GHz		2.62dB
9	Radiated Spurious Emission 18GHz - 40GHz		2.80dB
10	Occupied bandwidth		23.20Hz
11	Conducted Emissions	9kHz ~ 150kHz	3.4dB
		150kHz ~ 30MHz	3.73dB

3. TEST RESULT

3.1. Maximum Peak Conducted Output Power

3.1.1. Limit

47 CFR 15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

47 CFR 15.247(b)(4): If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

47 CFR 15.247(c)(1)(i): Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2. Test Procedure

ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM: Method AVGPM is a measurement using an RF average power meter, as follows:


1. As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:

- ① The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- ② At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- ③ The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

2. If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in ANSI C63.10-2013 clause 11.6.

3. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.

4. Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

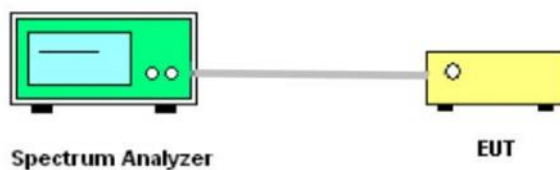**3.1.4. Test Result of Maximum Peak Conducted Output Power**

Please refer to the Appendix A1.

3.2. Duty Cycle

3.2.1. Limit

There is no limit requirement for Duty Cycle.


3.2.2. Test Procedure

ANSI C63.10-2013 clause 11.6: Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

1. A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
2. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- ① Set the center frequency of the instrument to the center frequency of the transmission.
- ② Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- ③ Set $VBW \geq RBW$. Set detector = peak or average.
- ④ The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.2.3. Test Setup

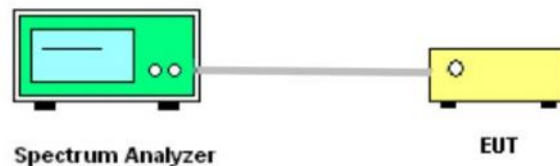

3.2.4. Test Result of Duty Cycle

Please refer to the Appendix A2.

3.3. 6dB Bandwidth and 99% Bandwidth

3.3.1. Limit

47 CFR 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

There is no limit requirement for 99% Bandwidth.

3.3.2. Test Procedure

1. The testing of 6dB Bandwidth follows ANSI C63.10-2013 clause 11.8.1: The steps for the first option are as follows:

- ① Set RBW = 100 kHz.
- ② Set the VBW $\geq [3 \times \text{RBW}]$.
- ③ Detector = peak.
- ④ Trace mode = max hold.
- ⑤ Sweep = auto couple.
- ⑥ Allow the trace to stabilize.
- ⑦ Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2. The testing of 99% Bandwidth follows ANSI C63.10-2013 clause 6.9.3: The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:


- ① The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- ② The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- ③ Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in ANSI C63.10-2013 clause 4.1.5.2.
- ④ Step a) through step c) might require iteration to adjust within the specified range.
- ⑤ Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- ⑥ Use the 99% power bandwidth function of the instrument (if available) and report the

measured bandwidth.

⑦ If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

⑧ The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.3.3. Test Setup

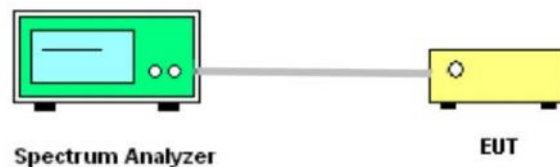

3.3.4. Test Result of 6dB Bandwidth and 99% Bandwidth

Please refer to the Appendix A3.

3.4. Power Spectral Density

3.4.1. Limit


47 CFR 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.4.2. Test Procedure

ANSI C63.10-2013 clause 11.10.2: The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to 3 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.

3.4.3. Test Setup

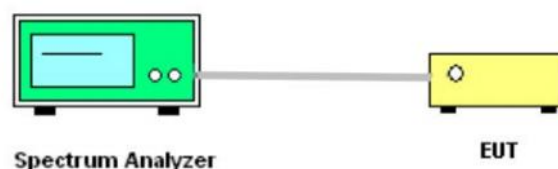

3.4.4. Test Result of Power Spectral Density

Please refer to the Appendix A4.

3.5. Conducted Band Edge


3.5.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

3.5.2. Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Conducted Band Edge measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the 100 kHz bandwidth within the band that contains the highest level of the desired power when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.5.3. Test Setup

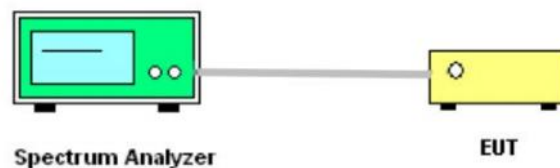

3.5.4. Test Result of Conducted Band Edge

Please refer to the Appendix A5.

3.6. Conducted Spurious Emission


3.6.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

3.6.2. Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.6.3. Test Setup

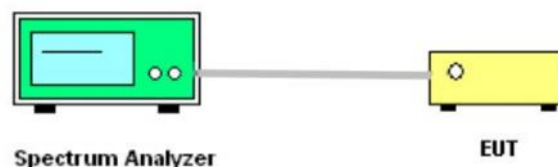

3.6.4. Test Result of Conducted Spurious Emission

Please refer to the Appendix A5.

3.7. Radiated Spurious Emission and Restricted Band

3.7.1. Limit

47 CFR 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

47 CFR 15.205(a): Only spurious emissions are permitted in any of the frequency bands listed below:

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090-0.110	12.29-12.293	149.9-150.05	1660-1710	8.025-8.5
0.495-0.505	12.51975-12.52025	156.52475-156.52525	1718.8-1722.2	9.0-9.2
2.1735-2.1905	12.57675-12.57725	156.7-156.9	2200-2300	9.3-9.5
4.125-4.128	13.36-13.41	162.0125-167.17	2310-2390	10.6-12.7
4.17725-4.17775	16.42-16.423	167.72-173.2	2483.5-2500	13.25-13.4
4.20725-4.20775	16.69475-16.69525	240-285	2690-2900	14.47-14.5
6.215-6.218	16.80425-16.80475	322-335.4	3260-3267	15.35-16.2
6.26775-6.26825	25.5-25.67	399.9-410	3332-3339	17.7-21.4
6.31175-6.31225	37.5-38.25	608-614	3345.8-3358	22.01-23.12
8.291-8.294	73-74.6	960-1240	3600-4400	23.6-24.0
8.362-8.366	74.8-75.2	1300-1427	4500-5150	31.2-31.8
8.37625-8.38675	108-121.94	1435-1626.5	5350-5460	36.43-36.5
8.41425-8.41475	123-138	1645.5-1646.5	7250-7750	Above 38.6

47 CFR 15.209(a): The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

3.7.2. Test Procedure


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.1 meter for frequency below 1GHz and 0.1 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Pre-amp Factor = Level.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - ① Span shall wide enough to fully capture the emission being measured;
 - ② When frequency < 1 GHz:
 - Set RBW=100 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - ③ When frequency $\geq$ 1 GHz:
 - Set RBW = 1 MHz; VBW = 3 MHz for peak measurement;
 - Set RBW = 1 MHz; VBW = 10 Hz, when duty cycle is no less than 98 percent or VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.7.3. Test Setup


3.7.3.1. For radiated emissions below 30MHz

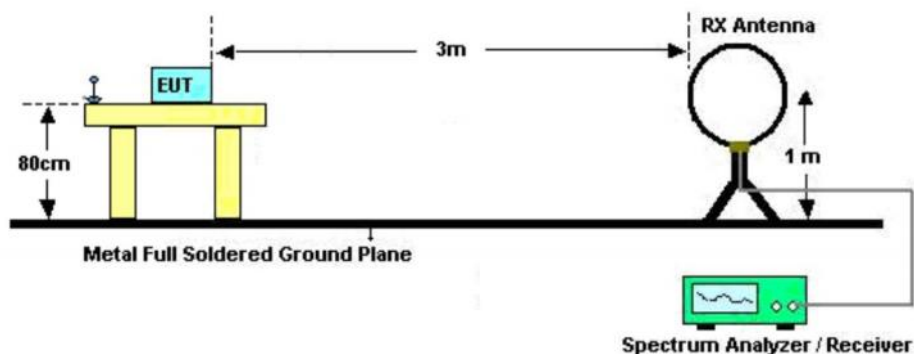

3.7.3.2. For radiated emissions from 30MHz to 1GHz

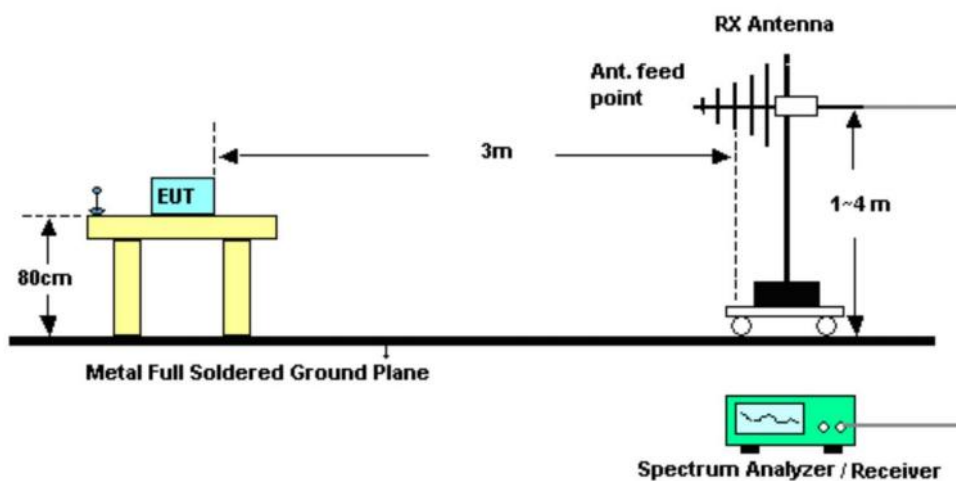

3.7.3.3. For radiated emissions above 1GHz

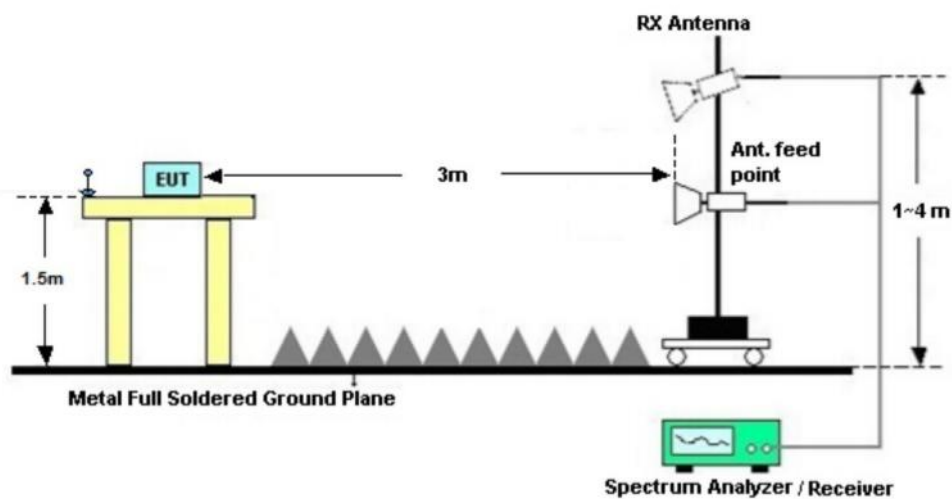

3.7.4. Test Result of Radiated Spurious Emission

Please refer to the Appendix B.

3.7.5. Test Result of Restricted Band

Please refer to the Appendix B.

3.8. AC Power-Line Conducted Emission

3.8.1. Limit

47 CFR 15.207(a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table:


Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.8.2. Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 10 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.8.3. Test Setup

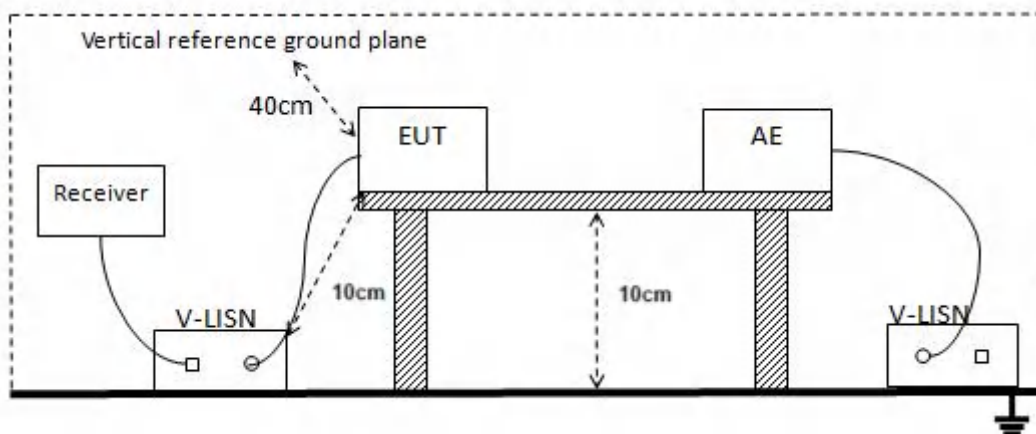

3.8.4. Test Result of AC Power-Line Conducted Emission

Please refer to the Appendix B.

3.9. Antenna Requirement

3.9.1. Standard Requirement

According to 47 CFR 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

3.9.2. EUT Antenna

The antenna used for the EUT is Built-in antenna, which meets the antenna requirements.

4. TEST SETUP PHOTOGRAPHS

Please refer to the Appendix C.

5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

External Photos Please refer to the Appendix D.

Internal Photos Please refer to the Appendix E.

*****END OF THE REPORT*****


Appendix A _ Conducted Test Data

Appendix A1. Conducted Output Power


Test Result

Mode	Channel	Peak Output Power (dBm)	Peak Output Power (mW)	Max. Avg. Power (dBm)	Limit (dBm)	Result
BLE 1M	0	2.996	1.99	2.752	≤30	PASS
	19	3.186	2.08	3.086	≤30	PASS
	39	3.285	2.13	3.175	≤30	PASS
BLE 2M	0	3.008	2	2.512	≤30	PASS
	19	3.226	2.1	3.237	≤30	PASS
	39	3.261	2.12	3.249	≤30	PASS


Note: $EIRP = P_{out} + G_{ant}$, where P_{out} is the conducted output power (i.e., the Peak Output Power in the table), and G_{ant} is the antenna gain equal to 1.25 dBi.

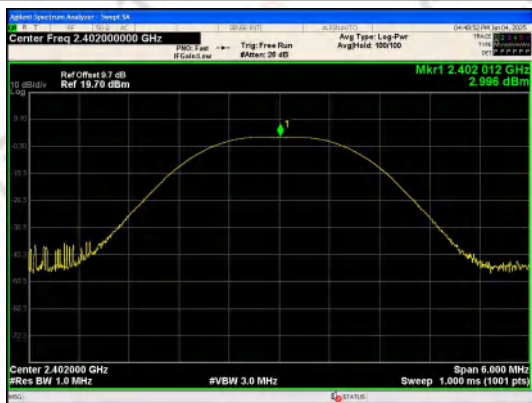


Peak Output Power
BLE 1M_Channel 0

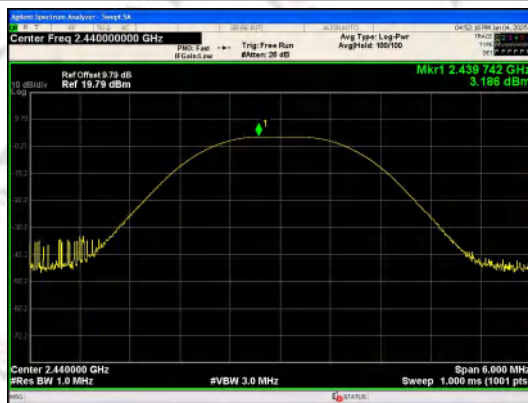


Peak Output Power
BLE 1M_Channel 19

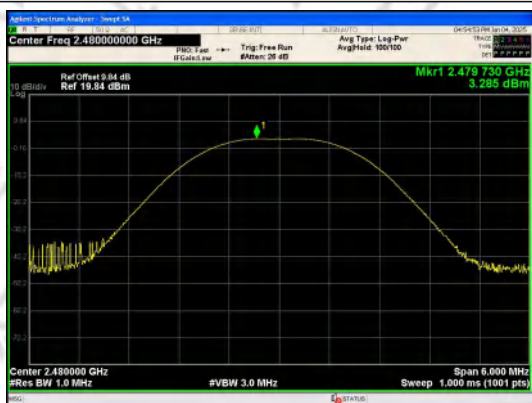


Peak Output Power
BLE 1M_Channel 39

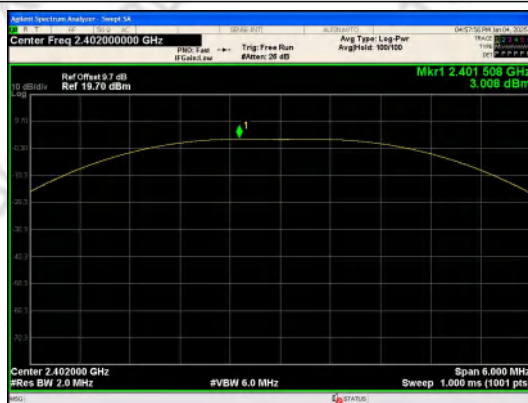

Peak Output Power
BLE 2M_Channel 0

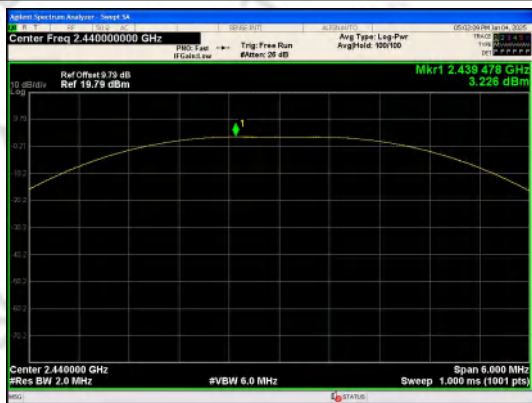

Peak Output Power
BLE 2M_Channel 19

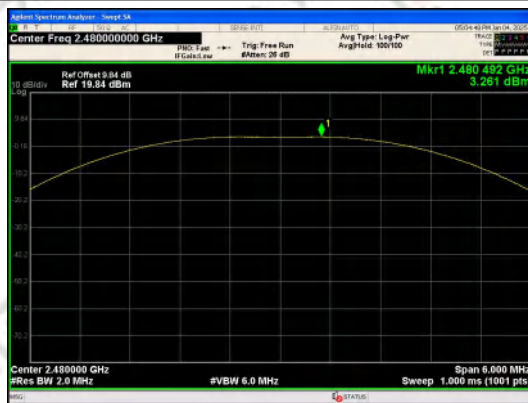

Peak Output Power
BLE 2M_Channel 39


Appendix A2. Duty Cycle

Test Result

Mode	Channel	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle (linear)	Duty Cycle Factor (dB)	1/T
BLE 1M	0	0.391	0.625	62.65	0.6265	2.0308	2.5575
	19	0.392	0.625	62.67	0.6267	2.0294	2.5510
	39	0.391	0.625	62.65	0.6265	2.0308	2.5575
BLE 2M	0	0.208	0.625	33.30	0.3330	4.7756	4.8077
	19	0.208	0.625	33.30	0.3330	4.7756	4.8077
	39	0.208	0.625	33.30	0.3330	4.7756	4.8077

Test Graphs



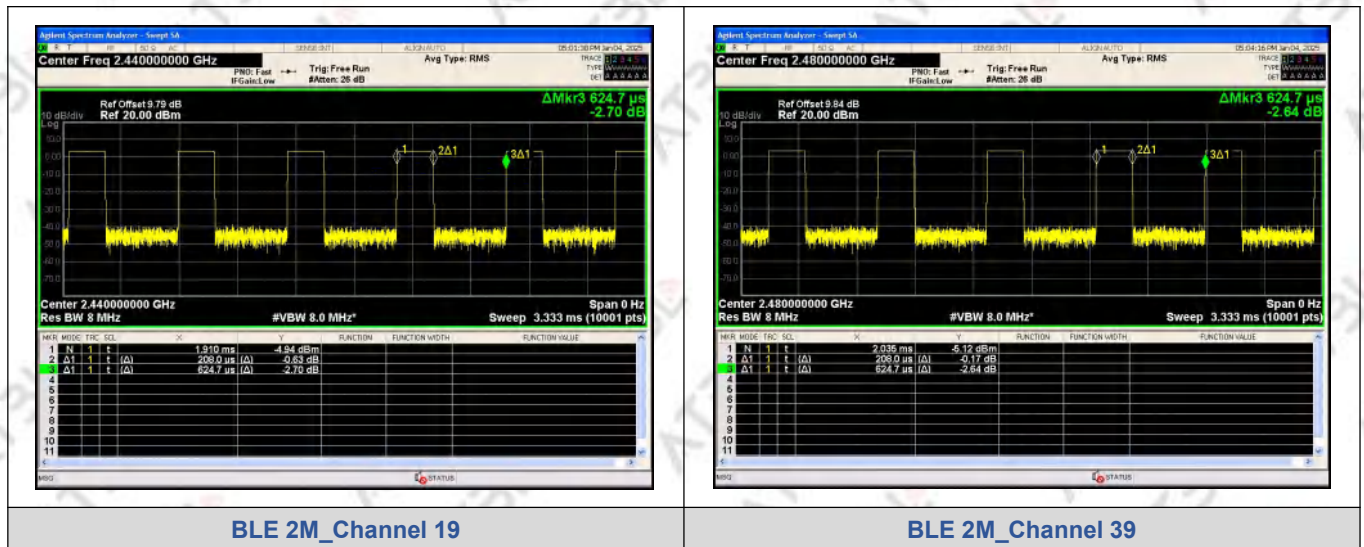

Appendix A3. 6dB Bandwidth and 99% Bandwidth

99% Bandwidth

Test Result

Mode	Channel	Center Frequency (MHz)	99% BW (MHz)
BLE 1M	0	2402	1.0271
BLE 1M	19	2440	1.0264
BLE 1M	39	2480	1.0289
BLE 2M	0	2402	2.0437
BLE 2M	19	2440	2.0421
BLE 2M	39	2480	2.0430


Test Graphs




BLE 1M_Channel 0



BLE 2M_Channel 0

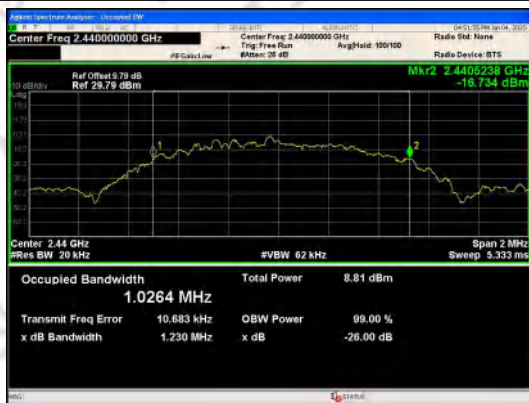

BLE 1M_Channel 19

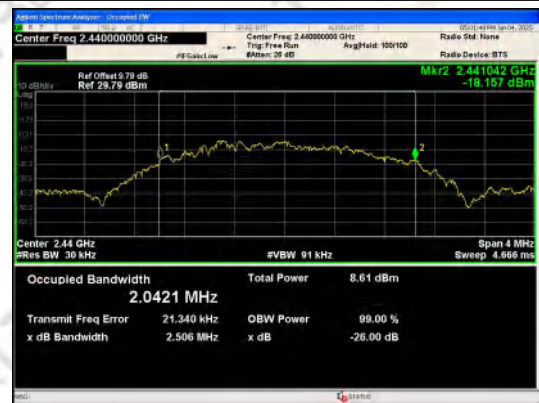

BLE 2M_Channel 19



BLE 1M_Channel 39




BLE 2M_Channel 39

6dB Bandwidth


Test Result

Mode	Channel	Center Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
BLE 1M	0	2402	0.7146	≥0.5	PASS
	19	2440	0.7066		PASS
	39	2480	0.7100		PASS
BLE 2M	0	2402	1.162		PASS
	19	2440	1.161		PASS
	39	2480	1.158		PASS


Test Graphs

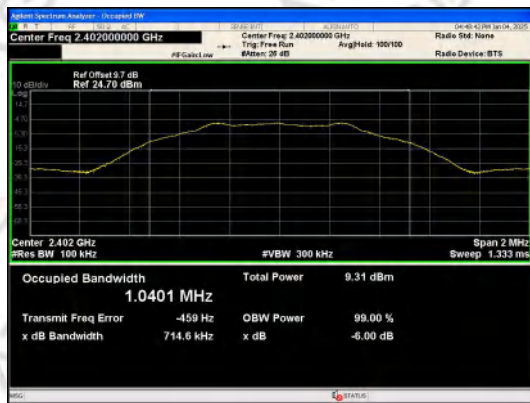


BLE 1M_Channel 0

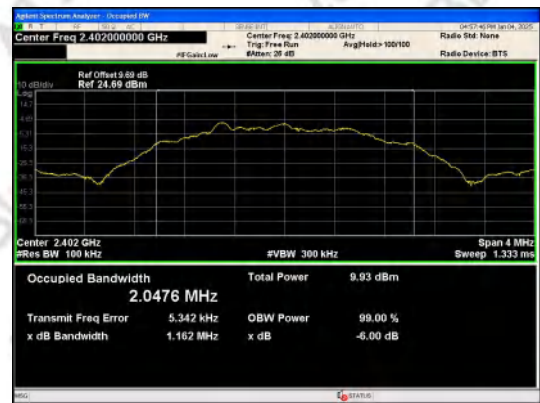


BLE 2M_Channel 0

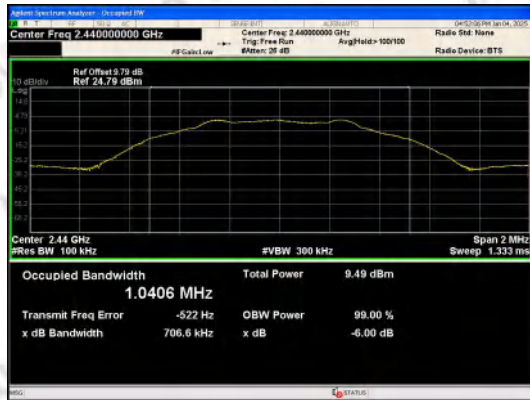


BLE 1M_Channel 19

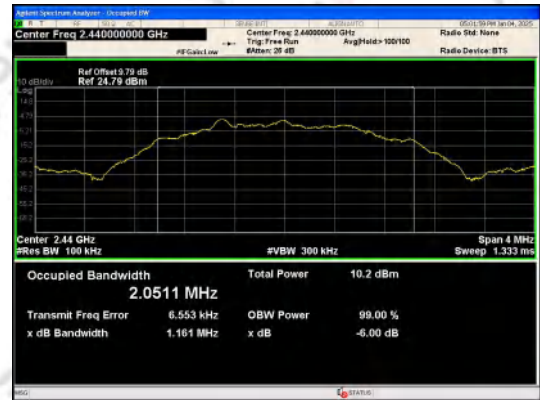

BLE 2M_Channel 19

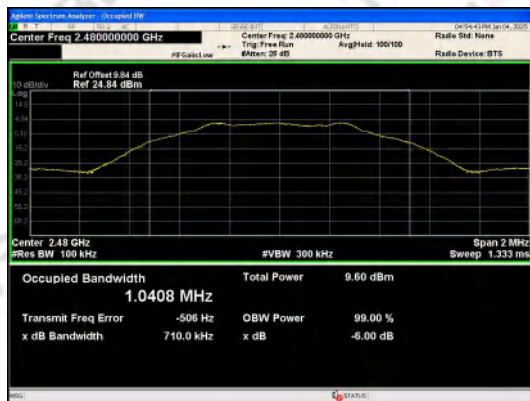

BLE 1M_Channel 39

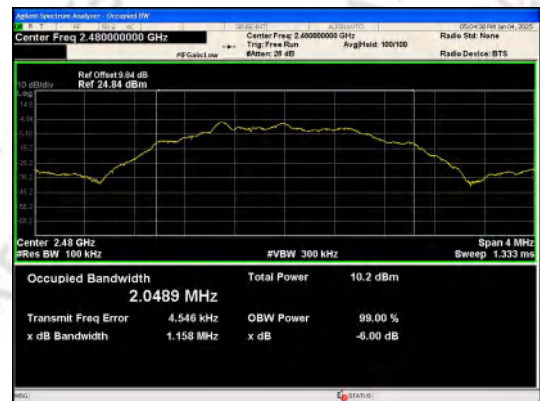


BLE 2M_Channel 39

Appendix A4. Power Spectral Density


Test Result

Mode	Channel	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
BLE 1M	0	-12.389	≤8	PASS
BLE 1M	19	-12.181	≤8	PASS
BLE 1M	39	-12.187	≤8	PASS
BLE 2M	0	-15.667	≤8	PASS
BLE 2M	19	-15.474	≤8	PASS
BLE 2M	39	-15.408	≤8	PASS


Test Graphs

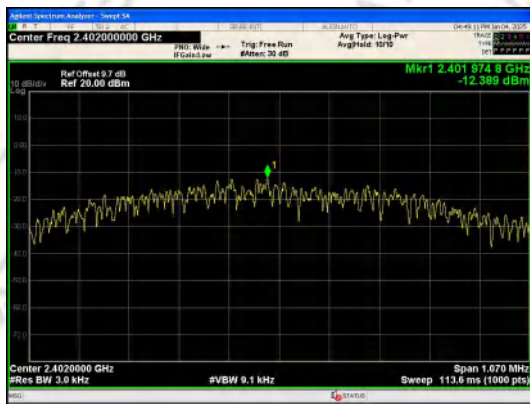


BLE 1M_Channel 0

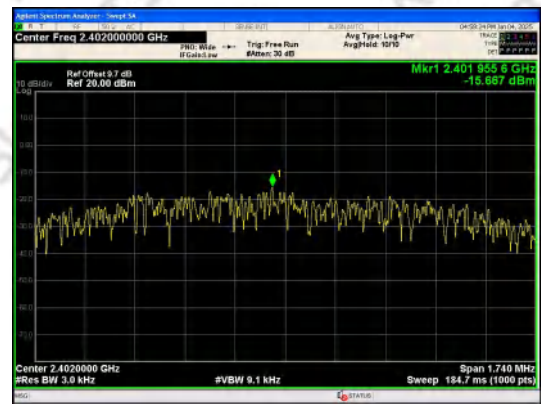


BLE 2M_Channel 0

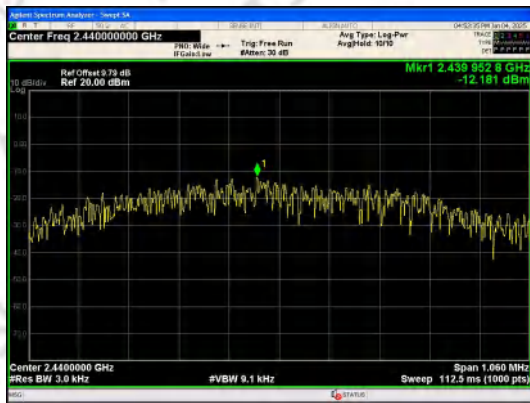


BLE 1M_Channel 19

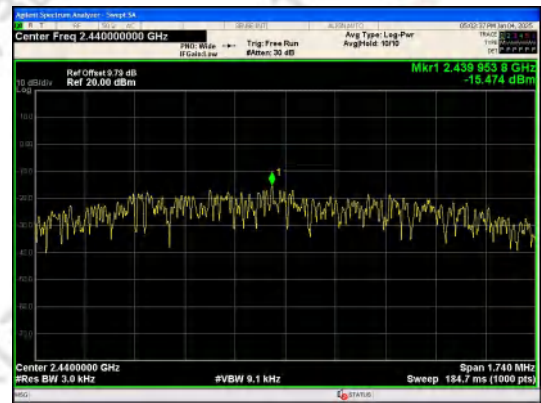

BLE 2M_Channel 19

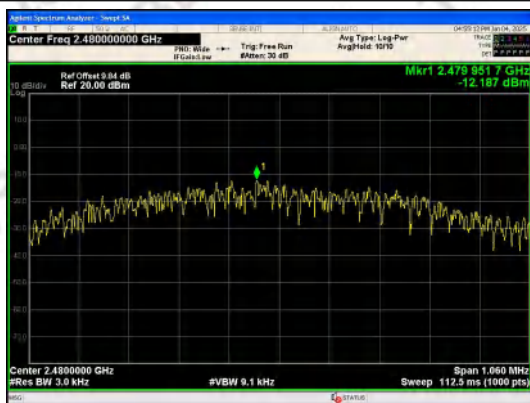

BLE 1M_Channel 39

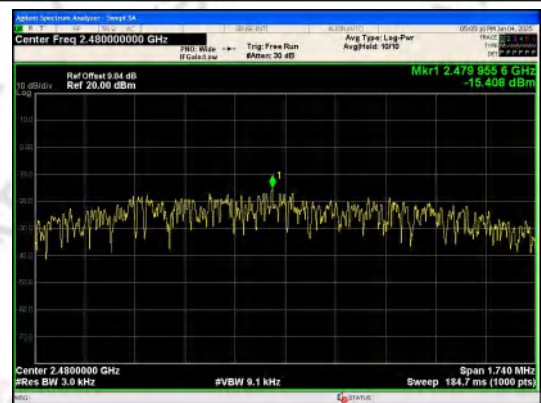

BLE 2M_Channel 39


Appendix A5. Conducted Spurious Emission

Test Result

Mode	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
BLE 1M	0	2334.70	-54.096	-17.85	-36.246	PASS
		2334.76	-47.717	-17.85	-29.867	PASS
		2400.00	-50.985	-17.85	-33.135	PASS
		4803.60	-60.619	-17.85	-42.769	PASS
		7204.50	-66.722	-17.85	-48.872	PASS
		9607.90	-66.707	-17.85	-48.857	PASS
	19	2510.77	-50.762	-17.61	-33.152	PASS
		4880.42	-59.678	-17.61	-42.068	PASS
		7321.24	-68.070	-17.61	-50.460	PASS
		9760.81	-69.696	-17.61	-52.086	PASS
	39	2326.62	-55.551	-17.57	-37.981	PASS
		2483.50	-53.526	-17.57	-35.956	PASS
		4960.33	-61.128	-17.57	-43.558	PASS
		7441.72	-67.511	-17.57	-49.941	PASS
		9918.74	-69.326	-17.57	-51.756	PASS
BLE 2M	0	2375.93	-50.814	-17.48	-33.334	PASS
		2400.00	-29.510	-17.48	-12.030	PASS
		4803.02	-61.727	-17.48	-44.247	PASS
		7204.51	-68.116	-17.48	-50.636	PASS
		9607.87	-66.829	-17.48	-49.349	PASS
	19	4881.05	-61.678	-17.26	-44.418	PASS
		7321.24	-68.539	-17.26	-51.279	PASS
		9760.81	-68.815	-17.26	-51.555	PASS
		24698.5	-55.163	-17.26	-37.903	PASS
	39	2483.50	-53.240	-17.22	-36.020	PASS
		2515.76	-45.815	-17.22	-28.595	PASS
		4959.08	-60.903	-17.22	-43.683	PASS
		7440.47	-68.674	-17.22	-51.454	PASS
		9918.12	-68.938	-17.22	-51.718	PASS

Note: Offset=cable loss=1.22dB


Test Graphs

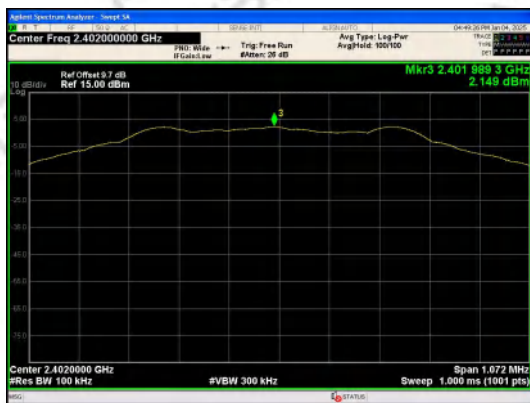


In-Band Reference Level
BLE 1M_Channel 0




In-Band Reference Level
BLE 2M_Channel 0

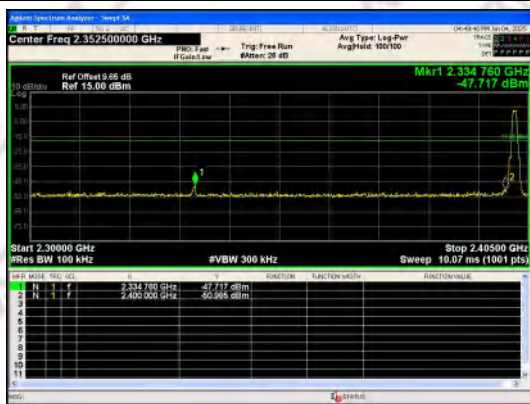


Out Of Band Emission
BLE 1M_Channel 0

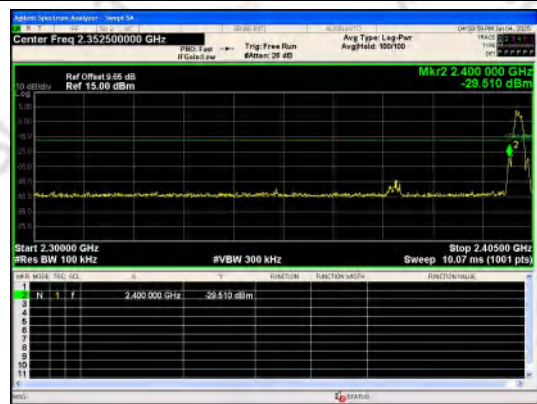

Out Of Band Emission
BLE 2M_Channel 0

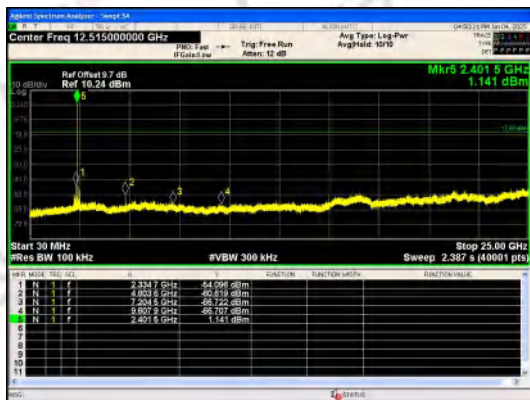

30.0 MHz - 25000.0 MHz
BLE 1M_Channel 0

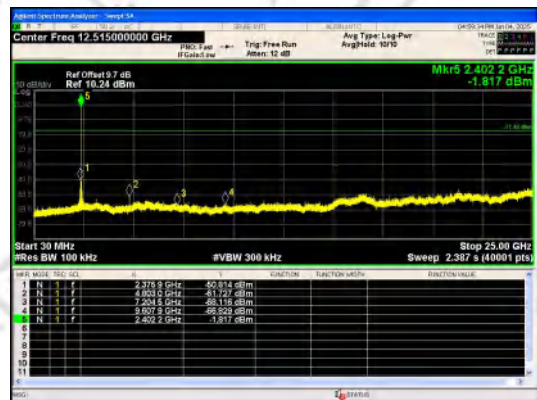


30.0 MHz - 25000.0 MHz
BLE 2M_Channel 0




In-Band Reference Level
BLE 1M_Channel 19




In-Band Reference Level
BLE 2M_Channel 19

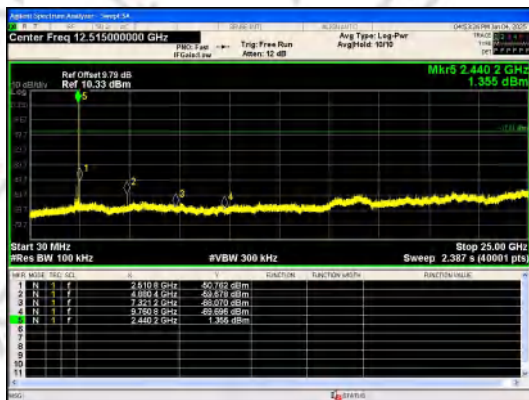

30.0 MHz - 25000.0 MHz
BLE 1M_Channel 19

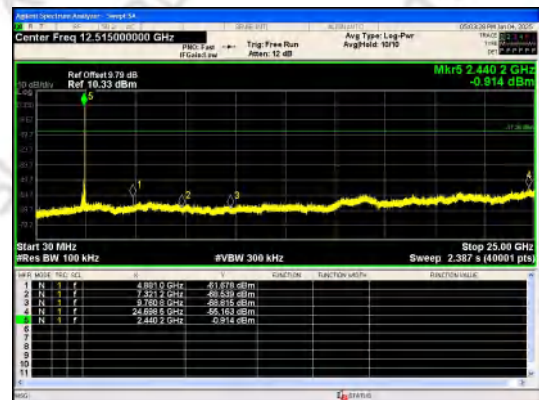


30.0 MHz - 25000.0 MHz
BLE 2M_Channel 19

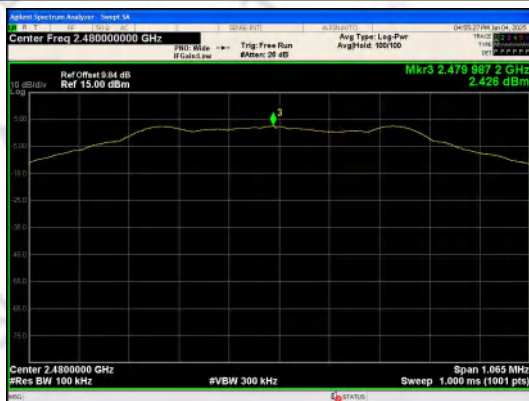


In-Band Reference Level
BLE 1M_Channel 39




In-Band Reference Level
BLE 2M_Channel 39

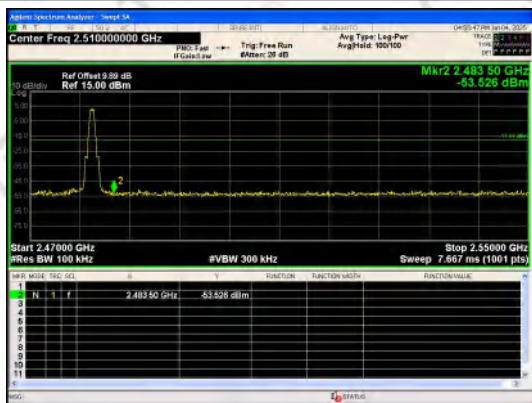


Out Of Band Emission
BLE 1M_Channel 39

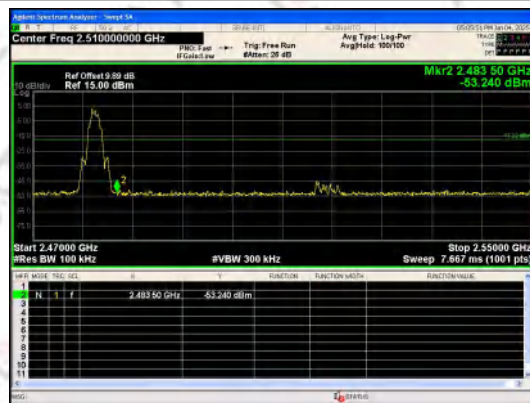

Out Of Band Emission
BLE 2M_Channel 39

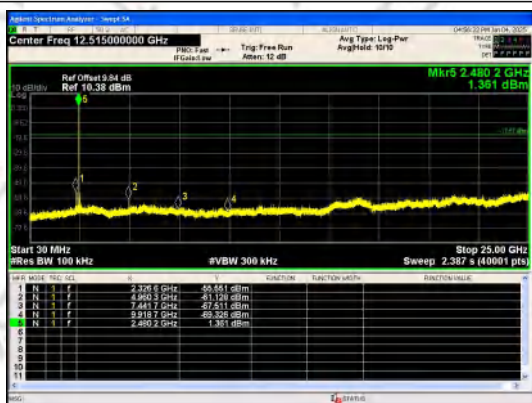

30.0 MHz - 25000.0 MHz
BLE 1M_Channel 39

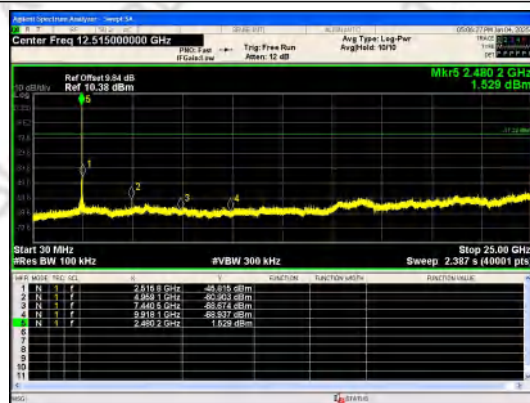

30.0 MHz - 25000.0 MHz
BLE 2M_Channel 39

*****END OF APPENDIX A*****

Appendix B _ Radiated Test Data and AC Power-Line Conducted Emission

Appendix B1.Radiated Spurious Emission


For 9 kHz ~ 30 MHz

Note:The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For 30 MHz ~ 1 GHz


Note:All modes have been tested, only worst case mode was recorded in the test report if no any others.

1M_2402MHz Horizontal

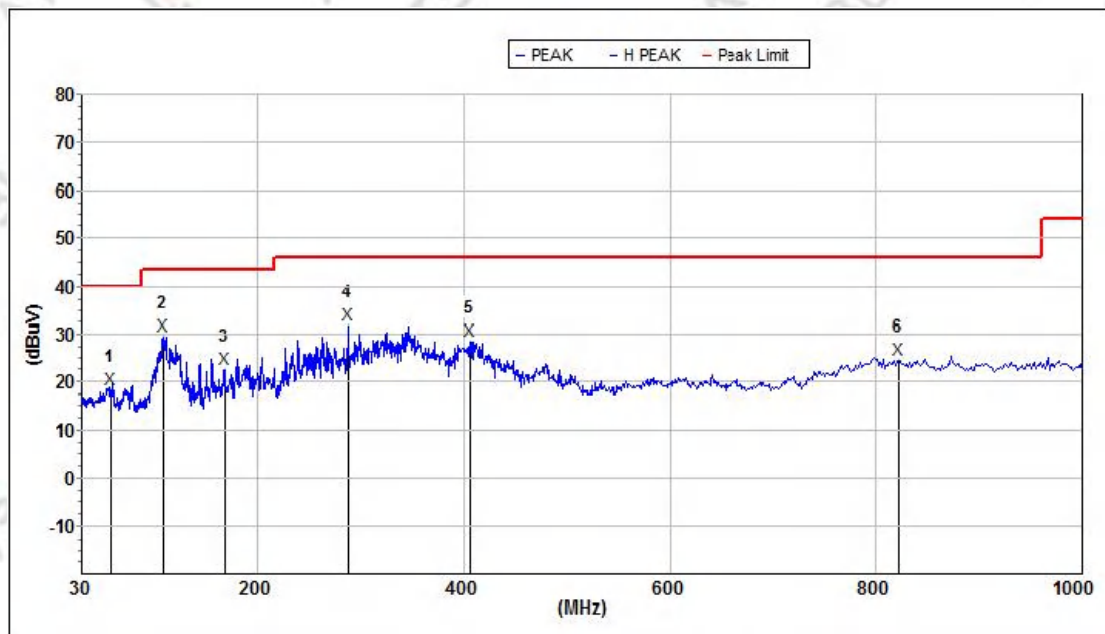


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	58.613	18.6	40.0	21.4	200	18.2	29.6	H
2	107.510	29.8	43.5	13.7	100	15.4	31.6	H
3	168.119	22.9	43.5	20.6	300	18.0	33.5	H
4	287.990	32.1	46.0	13.9	200	18.8	32.0	H
5	405.377	28.6	46.0	17.4	100	21.6	32.2	H
6	821.710	24.7	46.0	21.3	200	28.6	31.8	H

1M_2402MHz Vertical

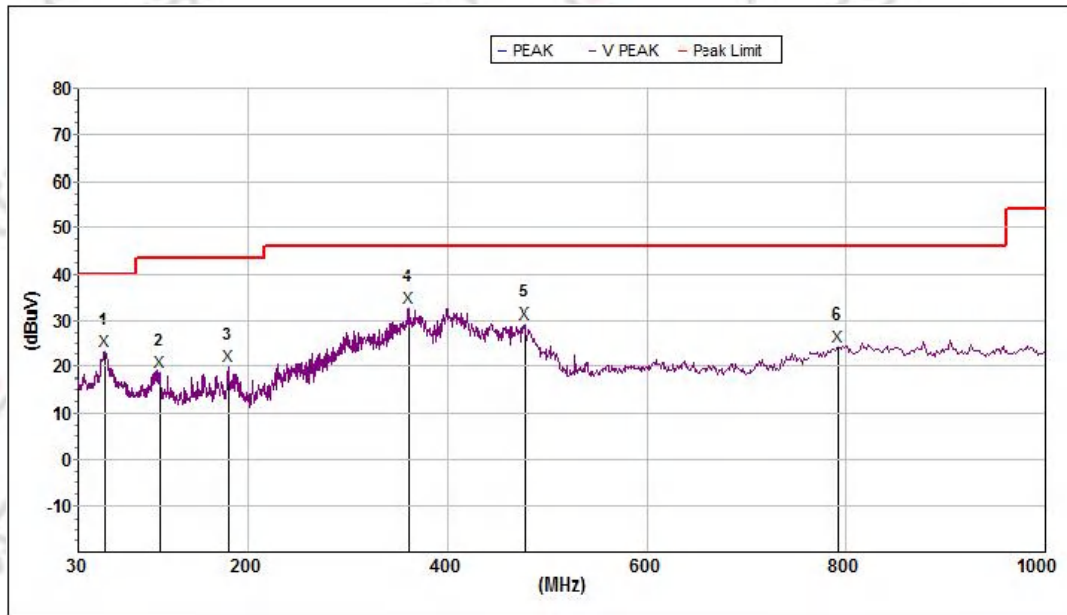


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	56.099	23.5	40.0	16.5	200	18.6	29.7	V
2	110.375	18.7	43.5	24.8	100	15.7	31.8	V
3	180.332	20.0	43.5	23.5	300	17.1	33.4	V
4	361.080	32.5	46.0	13.5	200	20.5	32.4	V
5	478.007	29.3	46.0	16.7	100	23.2	32.9	V
6	792.006	24.4	46.0	21.6	200	28.3	31.7	V

1M_2480MHz Horizontal

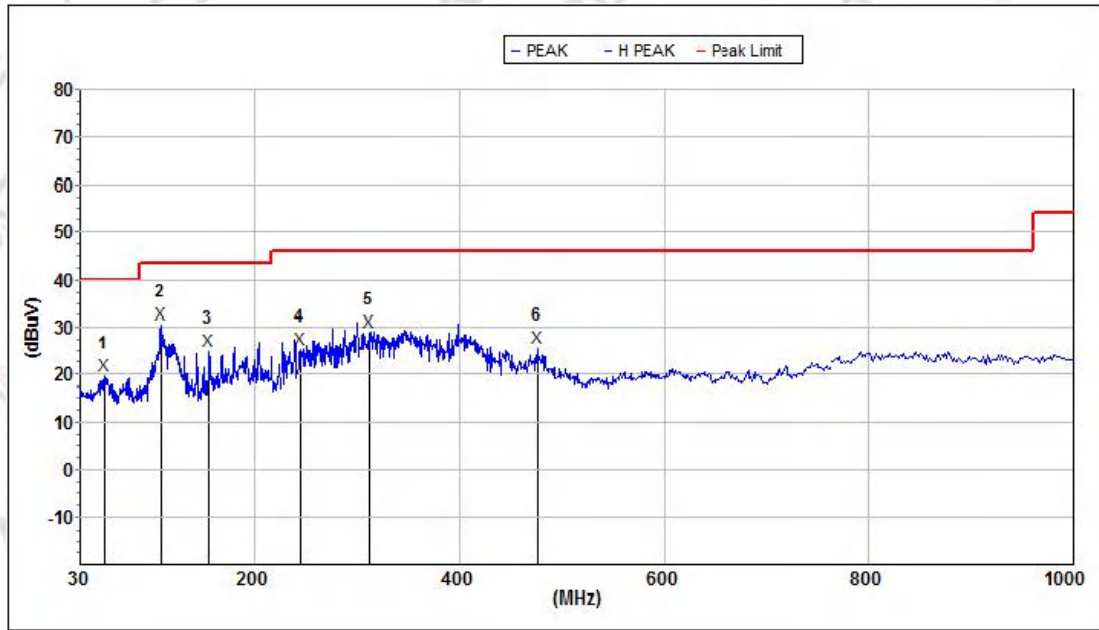


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	54.166	19.9	40.0	20.1	200	18.9	29.7	H
2	107.510	30.7	43.5	12.8	100	15.4	31.6	H
3	155.910	25.0	43.5	18.5	300	18.8	33.6	H
4	244.661	25.5	46.0	20.5	200	17.4	32.4	H
5	311.087	29.0	46.0	17.0	100	19.4	32.0	H
6	476.334	25.6	46.0	20.4	200	23.2	33.0	H

1M_2480MHz Vertical

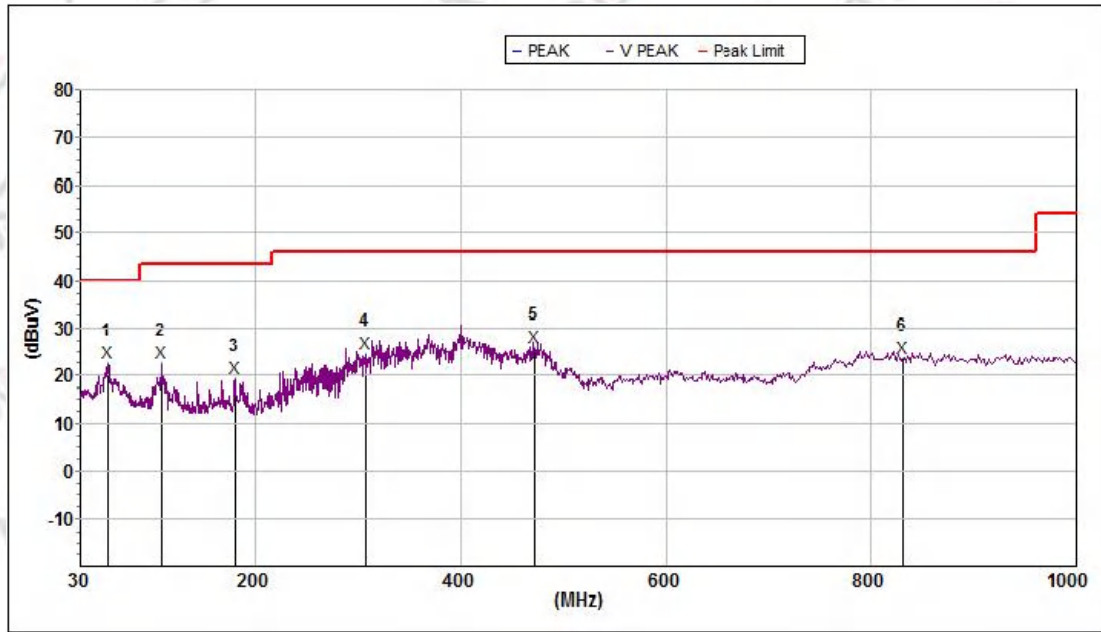


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	57.091	22.9	40.0	17.1	200	18.4	29.6	V
2	108.077	22.6	43.5	20.9	100	15.5	31.7	V
3	179.701	19.5	43.5	24.0	300	17.1	33.4	V
4	306.754	24.7	46.0	21.3	200	19.4	32.0	V
5	472.176	25.9	46.0	20.1	100	23.1	33.1	V
6	830.400	23.9	46.0	22.1	200	28.6	31.9	V

2M_2402MHz_Horizontal

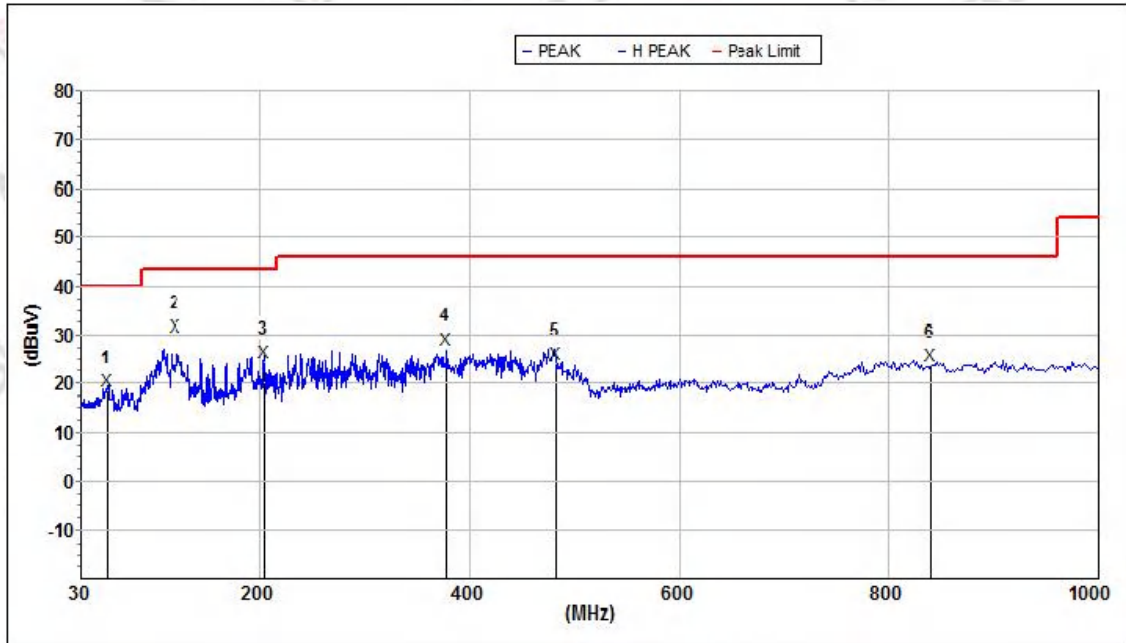


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	55.415	18.6	40.0	21.4	200	18.7	29.7	H
2	119.856	29.6	43.5	13.9	100	16.5	32.2	H
3	204.238	24.5	43.5	19.0	300	15.9	33.2	H
4	378.584	27.1	46.0	18.9	200	20.9	32.2	H
5	482.216	24.1	46.0	21.9	100	23.2	32.8	H
6	839.182	23.9	46.0	22.1	200	28.7	32.0	H

2M_2402MHzVertical

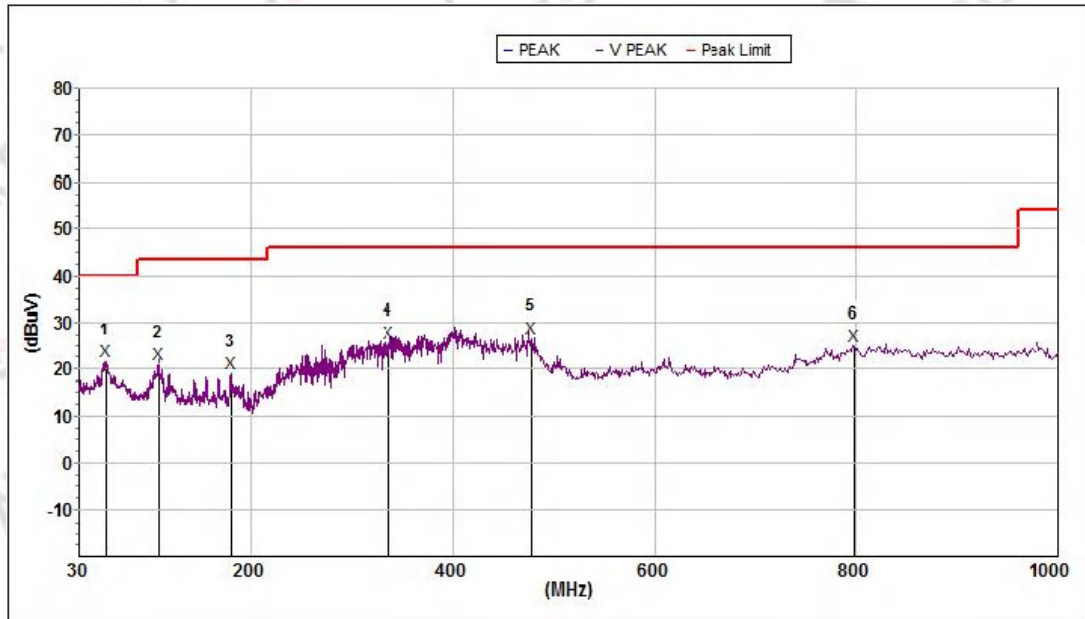


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	56.197	21.8	40.0	18.2	200	18.6	29.7	V
2	107.510	21.1	43.5	22.4	100	15.4	31.6	V
3	180.332	19.3	43.5	24.2	300	17.1	33.4	V
4	336.035	25.8	46.0	20.2	200	19.9	32.3	V
5	478.846	26.6	46.0	19.4	100	23.2	32.9	V
6	797.580	25.2	46.0	20.8	200	28.5	31.6	V

2M_2480MHz Horizontal

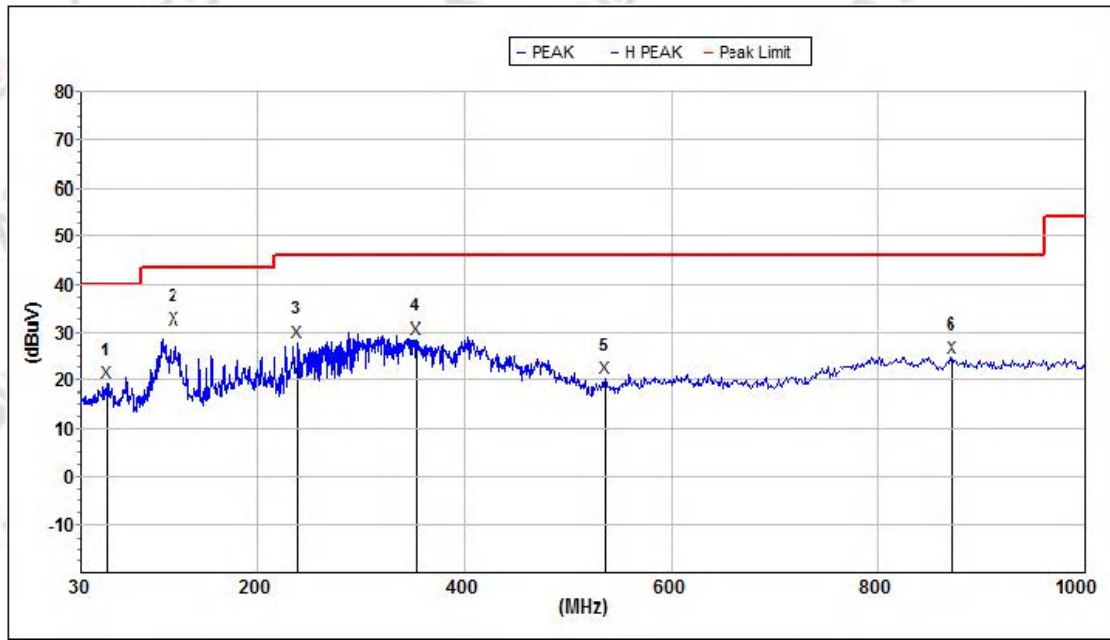

Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	55.609	19.5	40.0	20.5	200	18.7	29.7	H
2	120.066	30.5	43.5	13.0	100	16.6	32.2	H
3	239.987	27.9	46.0	18.1	300	17.2	32.5	H
4	354.805	28.6	46.0	17.4	200	20.3	32.5	H
5	535.707	20.5	46.0	25.5	100	24.3	32.2	H
6	872.183	24.9	46.0	21.1	200	28.8	32.4	H

2M_2480MHz Vertical

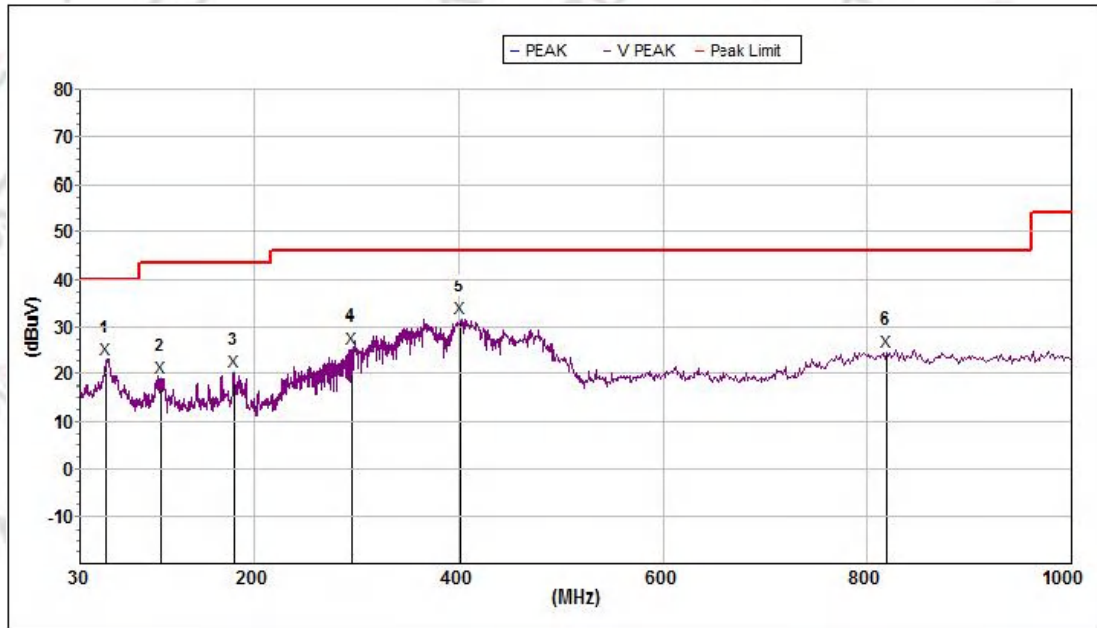


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	55.609	23.1	40.0	16.9	200	18.7	29.7	V
2	108.077	19.2	43.5	24.3	100	15.5	31.7	V
3	179.701	20.4	43.5	23.1	300	17.1	33.4	V
4	294.630	25.3	46.0	20.7	200	19.0	31.9	V
5	401.838	31.7	46.0	14.3	100	21.5	32.1	V
6	818.834	24.6	46.0	21.4	200	28.6	31.7	V

For above 1GHz

Note:


- 1.The all data rate modes had been test, but only worse test data was recorded in the test report.
- 2.In frequency ranges above 18GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.
- 3.We used the filter to test and the main frequency was filtered out.

1M_2402MHz Horizontal

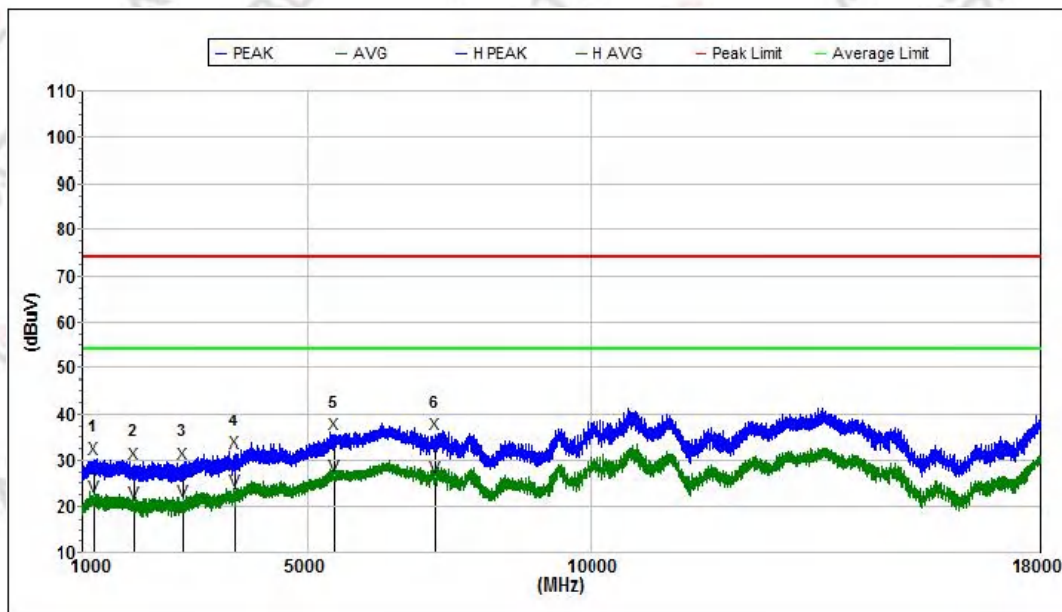


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1195.600	30.4	74.0	43.6	200	25.7	58.1	H
2	1913.200	29.5	74.0	44.5	100	25.9	58.7	H
3	2787.400	29.4	74.0	44.6	300	28.6	59.1	H
4	3711.400	31.7	74.0	42.3	200	30.1	58.1	H
5	5474.500	35.5	74.0	38.5	100	32.9	58.3	H
6	7256.300	35.6	74.0	38.4	200	36.2	59.3	H
Avg								
1	1195.600	22.3	54.0	31.7	200	25.7	58.1	H
2	1913.200	20.7	54.0	33.3	100	25.9	58.7	H
3	2787.400	21.1	54.0	32.9	300	28.6	59.1	H
4	3711.400	23.5	54.0	30.5	200	30.1	58.1	H
5	5474.500	26.9	54.0	27.1	100	32.9	58.3	H
6	7256.300	26.3	54.0	27.7	200	36.2	59.3	H

1M_2402MHz Vertical

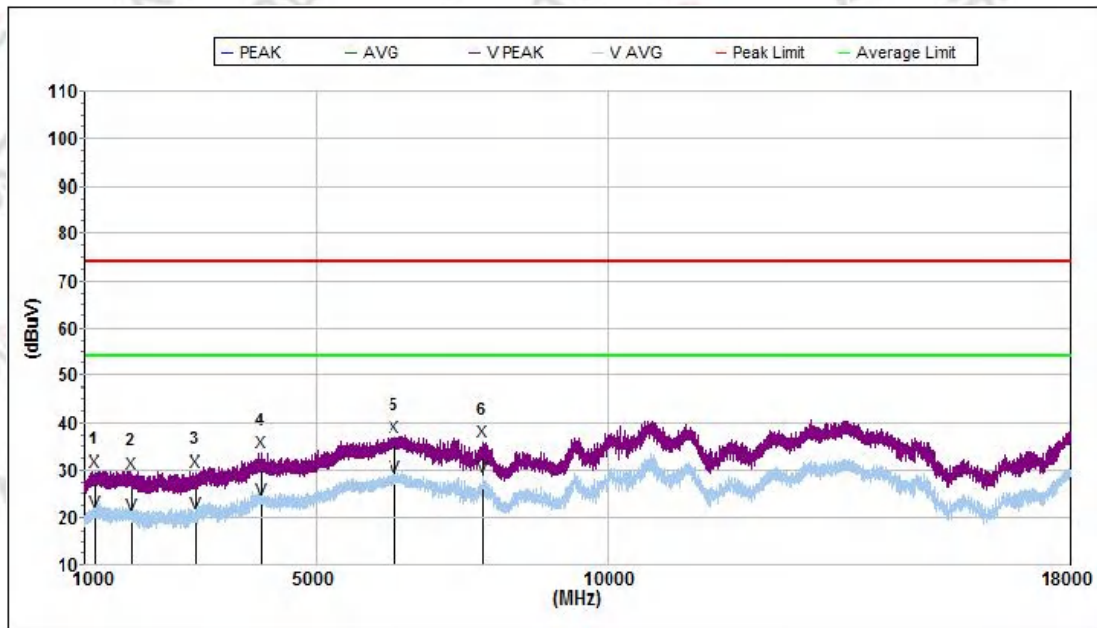


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1181.500	29.7	74.0	44.3	200	25.6	58.2	V
2	1812.100	29.4	74.0	44.6	100	25.2	58.1	V
3	2921.500	29.6	74.0	44.4	300	29.1	58.9	V
4	4036.600	33.8	74.0	40.2	200	30.9	58.1	V
5	6356.800	37.1	74.0	36.9	100	34.9	58.9	V
6	7860.200	36.0	74.0	38.0	200	36.8	59.8	V
Avg								
1	1181.500	21.1	54.0	32.9	200	25.6	58.2	V
2	1812.100	20.6	54.0	33.4	100	25.2	58.1	V
3	2921.500	20.8	54.0	33.2	300	29.1	58.9	V
4	4036.600	23.9	54.0	30.1	200	30.9	58.1	V
5	6356.800	28.8	54.0	25.2	100	34.9	58.9	V
6	7860.200	28.7	54.0	25.3	200	36.8	59.8	V

1M_2480MHz Horizontal

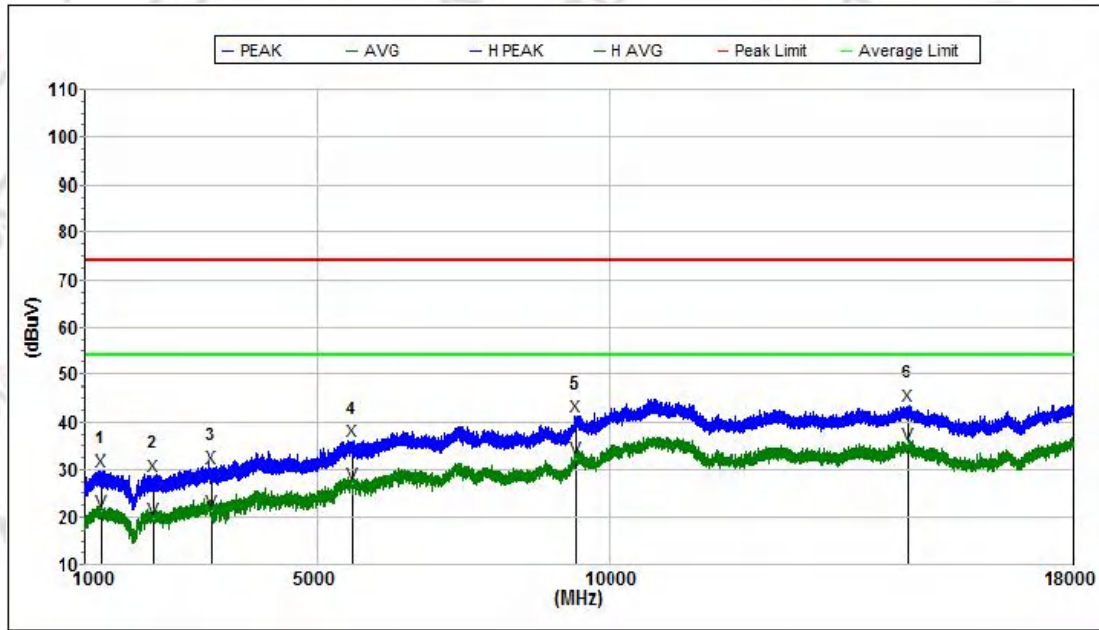


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1285.600	29.7	74.0	44.3	200	25.6	58.3	H
2	2163.700	28.9	74.0	45.1	100	26.9	59.4	H
3	3188.200	30.4	74.0	43.6	300	29.4	58.5	H
4	5596.900	36.1	74.0	37.9	200	33.1	58.5	H
5	9444.750	41.2	74.0	32.8	100	38.1	60.8	H
6	15136.700	43.6	74.0	30.4	200	39.0	58.5	H
Avg								
1	1285.600	21.2	54.0	32.8	200	25.6	58.3	H
2	2163.700	19.7	54.0	34.3	100	26.9	59.4	H
3	3188.200	21.1	54.0	32.9	300	29.4	58.5	H
4	5596.900	27.2	54.0	26.8	200	33.1	58.5	H
5	9444.750	32.4	54.0	21.6	100	38.1	60.8	H
6	15136.700	35.3	54.0	18.7	200	39.0	58.5	H

1M_2480MHz Vertical

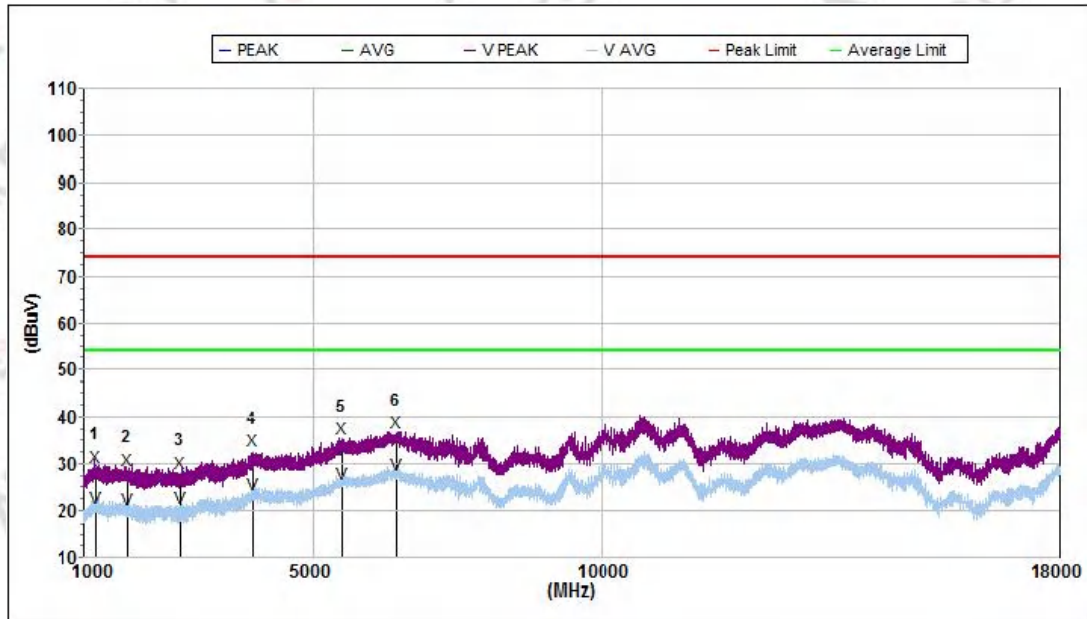


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1210.000	29.5	74.0	44.5	200	25.7	58.1	V
2	1744.000	28.6	74.0	45.4	100	25.1	58.1	V
3	2683.600	28.1	74.0	45.9	300	28.3	59.3	V
4	3942.400	32.8	74.0	41.2	200	30.7	58.0	V
5	5480.800	35.2	74.0	38.8	100	32.9	58.3	V
6	6438.100	36.7	74.0	37.3	200	35.1	58.7	V
Avg								
1	1210.000	20.6	54.0	33.4	200	25.7	58.1	V
2	1744.000	20.2	54.0	33.8	100	25.1	58.1	V
3	2683.600	20.6	54.0	33.4	300	28.3	59.3	V
4	3942.400	23.5	54.0	30.5	200	30.7	58.0	V
5	5480.800	25.9	54.0	28.1	100	32.9	58.3	V
6	6438.100	27.9	54.0	26.1	200	35.1	58.7	V

2M_2402MHz Horizontal

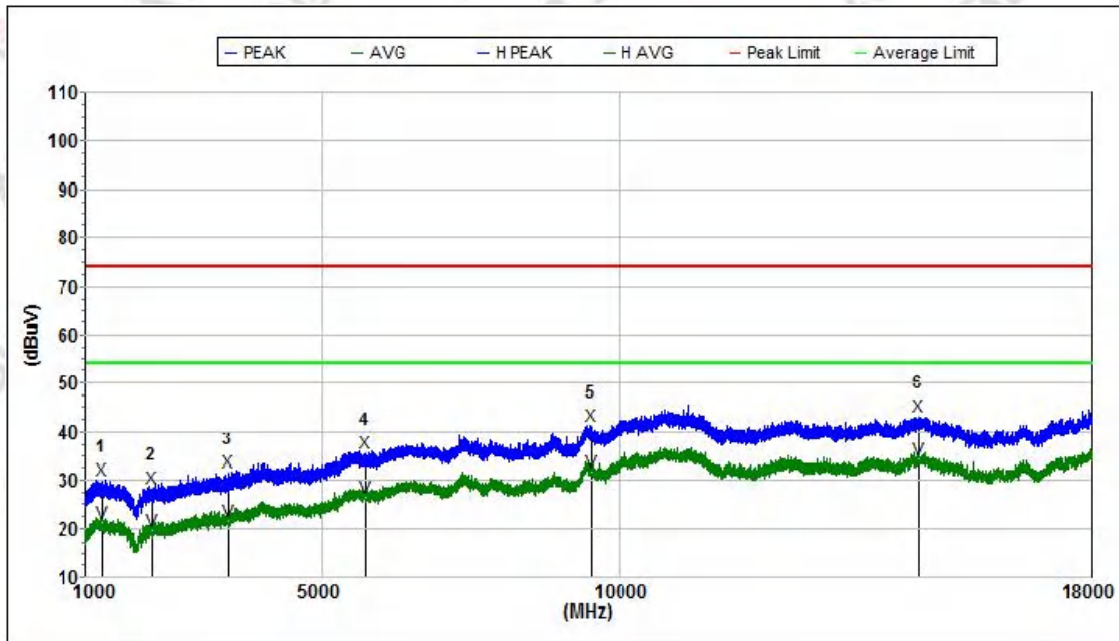


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1292.200	30.1	74.0	43.9	200	25.6	58.3	H
2	2107.900	28.4	74.0	45.6	100	26.7	59.3	H
3	3416.800	31.7	74.0	42.3	300	29.5	58.3	H
4	5720.800	35.8	74.0	38.2	200	33.4	58.8	H
5	9542.100	41.4	74.0	32.6	100	38.2	60.8	H
6	15062.450	43.1	74.0	30.9	200	39.1	58.3	H
Avg								
1	1292.200	21.1	54.0	32.9	200	25.6	58.3	H
2	2107.900	19.6	54.0	34.4	100	26.7	59.3	H
3	3416.800	21.6	54.0	32.4	300	29.5	58.3	H
4	5720.800	26.5	54.0	27.5	200	33.4	58.8	H
5	9542.100	31.8	54.0	22.2	100	38.2	60.8	H
6	15062.450	34.3	54.0	19.7	200	39.1	58.3	H

2M_2402MHz Vertical

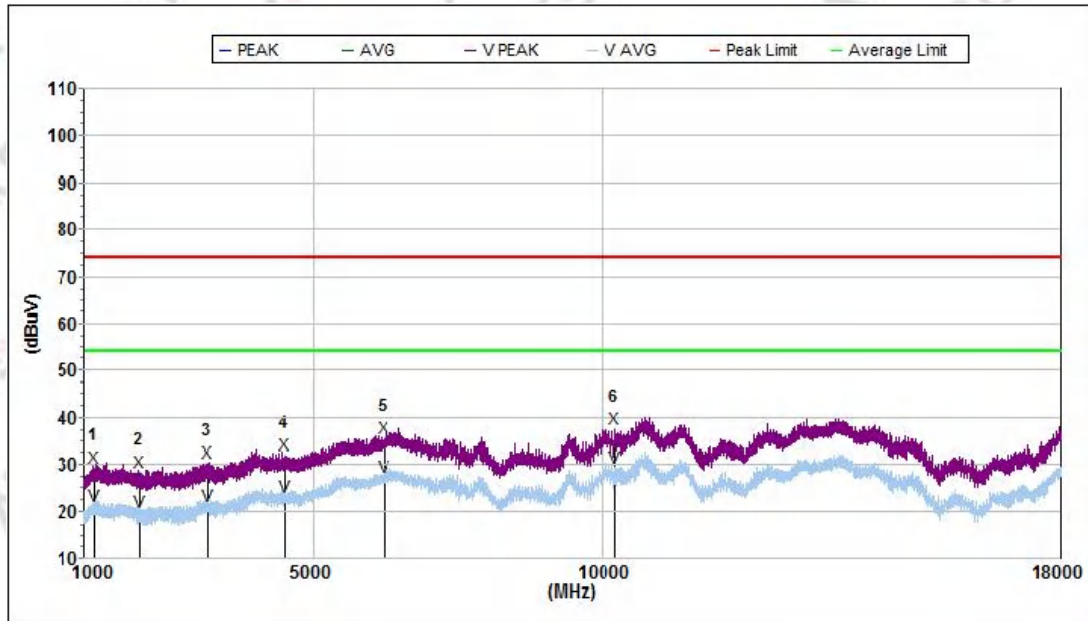


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1171.600	29.4	74.0	44.6	200	25.6	58.3	V
2	1957.000	28.3	74.0	45.7	100	26.2	58.9	V
3	3162.100	30.3	74.0	43.7	300	29.4	58.5	V
4	4504.300	32.1	74.0	41.9	200	31.6	59.4	V
5	6217.300	35.7	74.0	38.3	100	34.6	59.2	V
6	10246.650	37.7	74.0	36.3	200	38.5	60.0	V
Avg								
1	1171.600	21.2	54.0	32.8	200	25.6	58.3	V
2	1957.000	20.0	54.0	34.0	100	26.2	58.9	V
3	3162.100	21.3	54.0	32.7	300	29.4	58.5	V
4	4504.300	23.1	54.0	30.9	200	31.6	59.4	V
5	6217.300	27.3	54.0	26.7	100	34.6	59.2	V
6	10246.650	29.4	54.0	24.6	200	38.5	60.0	V

2M_2480MHz Horizontal

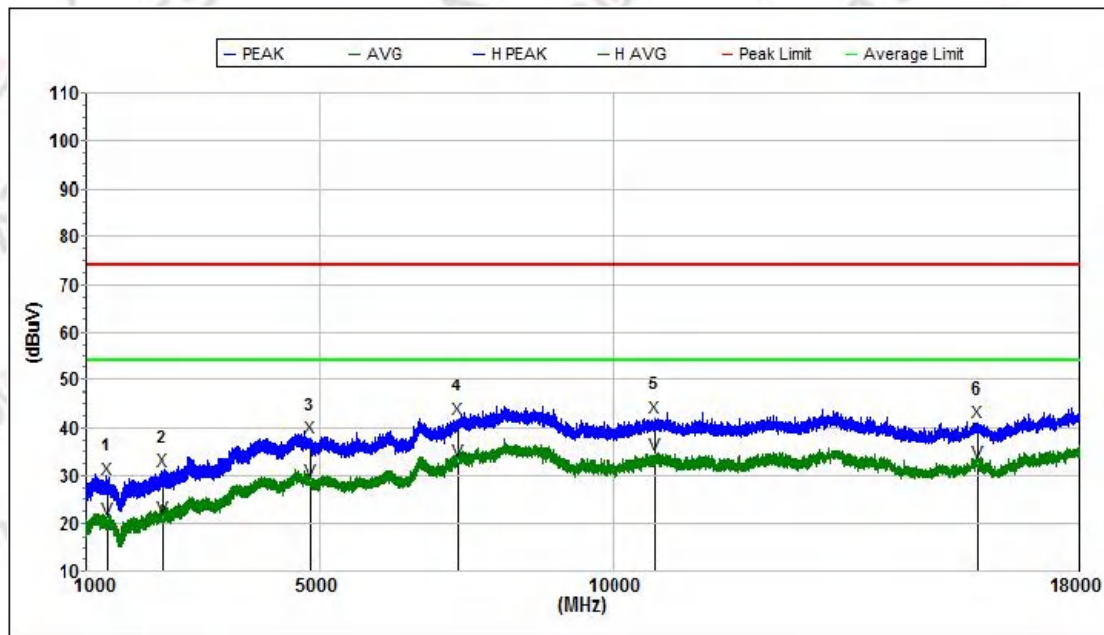

Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1374.593	29.4	74.0	44.6	200	25.5	58.4	H
2	2298.559	30.9	74.0	43.1	100	27.2	59.5	H
3	4837.202	38.0	74.0	36.0	300	32.6	59.7	H
4	7349.066	41.9	74.0	32.1	200	36.2	58.8	H
5	10739.565	42.4	74.0	31.6	100	38.6	58.8	H
6	16254.042	41.1	74.0	32.9	200	38.6	60.3	H
Avg								
1	1374.593	21.0	54.0	33.0	200	25.5	58.4	H
2	2298.559	21.3	54.0	32.7	100	27.2	59.5	H
3	4837.202	29.0	54.0	25.0	300	32.6	59.7	H
4	7349.066	33.1	54.0	20.9	200	36.2	58.8	H
5	10739.565	34.4	54.0	19.6	100	38.6	58.8	H
6	16254.042	32.8	54.0	21.2	200	38.6	60.3	H


2M_2480MHz Vertical

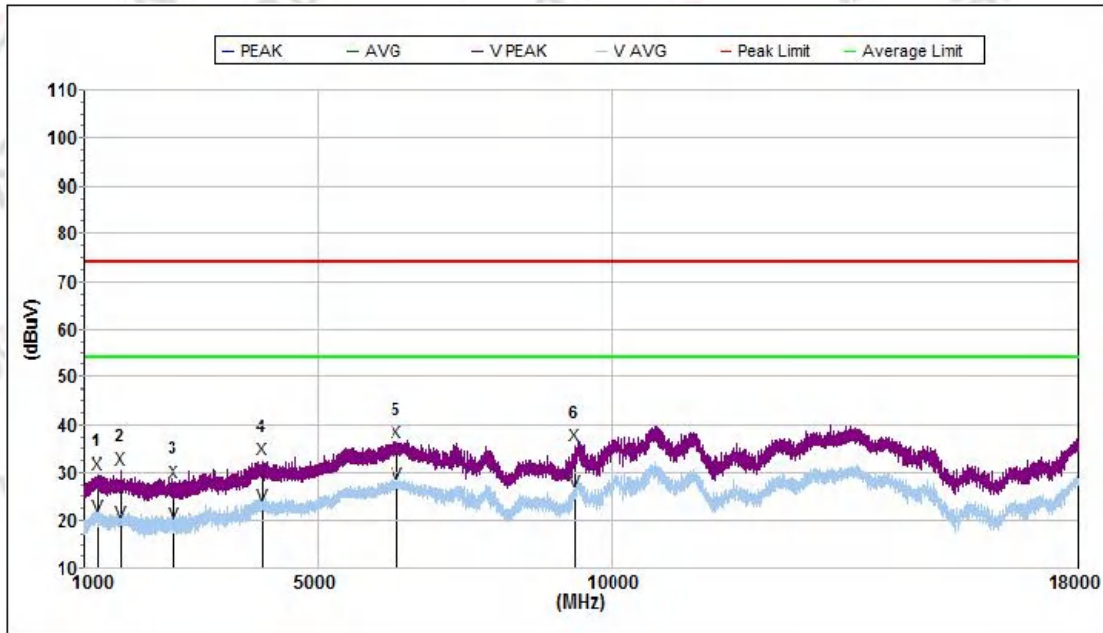

Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB)	Amp.G. (dB)	Pol.
Peak								
1	1229.500	29.7	74.0	44.3	200	25.7	58.2	V
2	1618.600	30.7	74.0	43.3	100	25.3	58.3	V
3	2540.800	28.1	74.0	45.9	300	27.8	59.6	V
4	4037.800	32.6	74.0	41.4	200	30.9	58.1	V
5	6343.300	36.4	74.0	37.6	100	34.9	58.9	V
6	9383.700	35.6	74.0	38.4	200	38.1	60.8	V
Avg								
1	1229.500	20.8	54.0	33.2	200	25.7	58.2	V
2	1618.600	19.4	54.0	34.6	100	25.3	58.3	V
3	2540.800	19.3	54.0	34.7	300	27.8	59.6	V
4	4037.800	23.1	54.0	30.9	200	30.9	58.1	V
5	6343.300	27.7	54.0	26.3	100	34.9	58.9	V
6	9383.700	26.0	54.0	28.0	200	38.1	60.8	V


Appendix B2.Test Result of Restricted Band

GFSK-Low 1M_2402MHz Horizontal

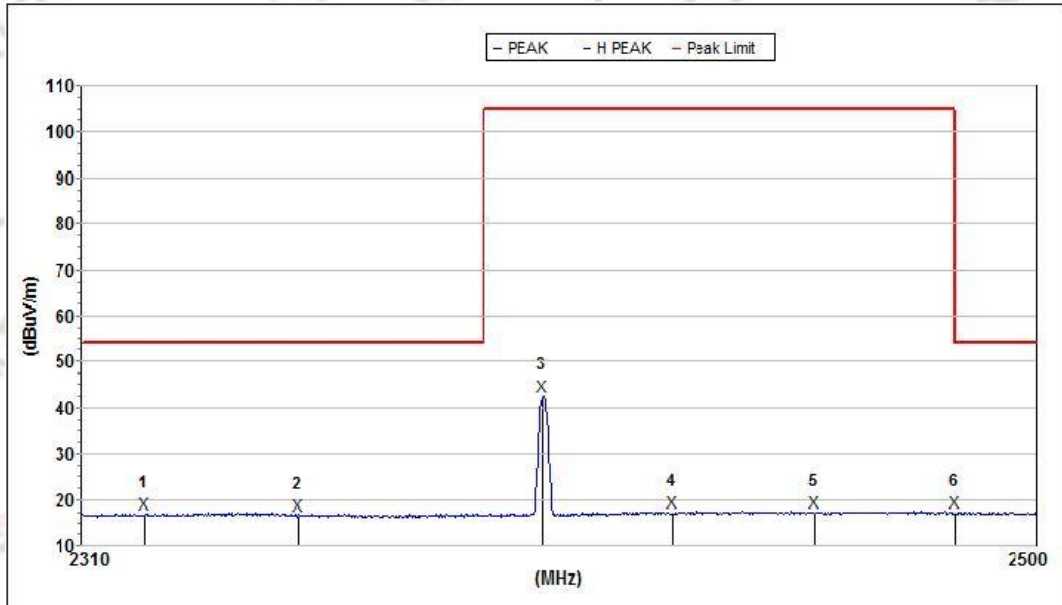


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2322.450	16.8	54.0	37.2	200	27.2	59.5	H
2	2353.310	16.7	54.0	37.3	100	27.3	59.6	H
3	2401.794	42.5	105.2	62.7	300	27.4	59.6	H
4	2427.560	17.3	105.2	87.9	200	27.4	59.6	H
5	2455.931	17.2	105.2	88.0	100	27.5	59.7	H
6	2483.849	17.3	54.0	36.7	200	27.6	59.7	H

1M_2402MHz Vertical

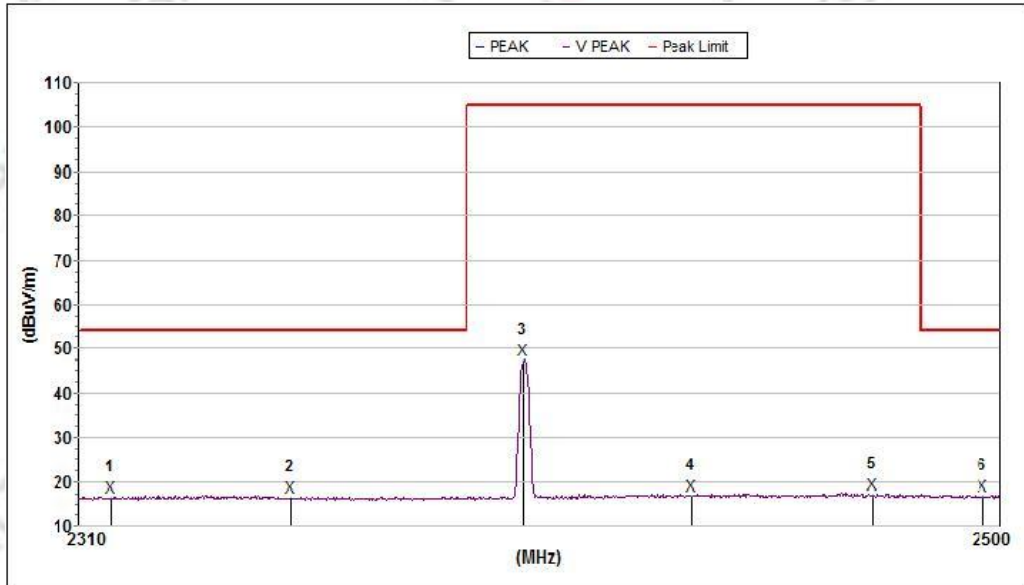


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2316.583	16.7	54.0	37.3	200	27.2	59.5	V
2	2353.682	16.5	54.0	37.5	100	27.3	59.6	V
3	2401.794	47.6	105.2	57.6	300	27.4	59.6	V
4	2436.403	17.0	105.2	88.2	200	27.5	59.6	V
5	2473.660	17.4	105.2	87.8	100	27.5	59.7	V
6	2496.446	16.8	54.0	37.2	200	27.6	59.7	V

GFSK-Low
1M_2402MHz Horizontal

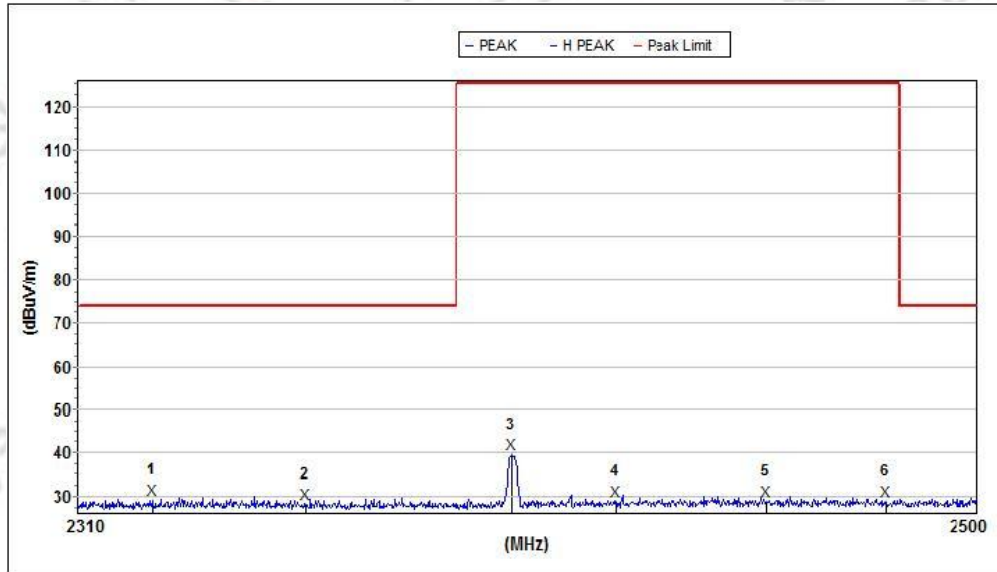


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2325.572	29.2	74.0	44.8	200	27.2	59.5	H
2	2358.151	28.3	74.0	45.7	100	27.3	59.6	H
3	2401.794	39.8	125.2	85.4	300	27.4	59.6	H
4	2423.725	29.0	125.2	96.2	200	27.5	59.6	H
5	2455.543	29.0	125.2	96.2	100	27.5	59.7	H
6	2480.905	29.0	125.2	96.2	200	27.6	59.7	H

1M_2402MHz Vertical

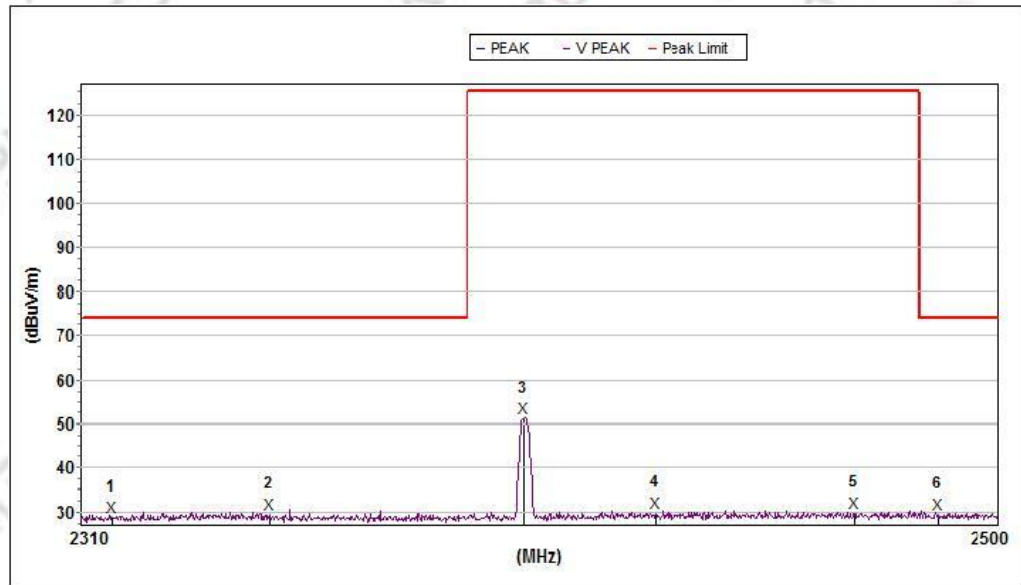


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2316.399	29.0	74.0	45.0	200	27.2	59.5	V
2	2349.035	29.7	74.0	44.3	100	27.3	59.5	V
3	2401.604	51.2	125.2	74.0	300	27.4	59.6	V
4	2428.904	30.0	125.2	95.2	200	27.5	59.6	V
5	2470.143	29.9	125.2	95.3	100	27.6	59.7	V
6	2487.582	29.5	74.0	44.5	200	27.6	59.7	V

GFSK-High
1M_2480MHz Horizontal

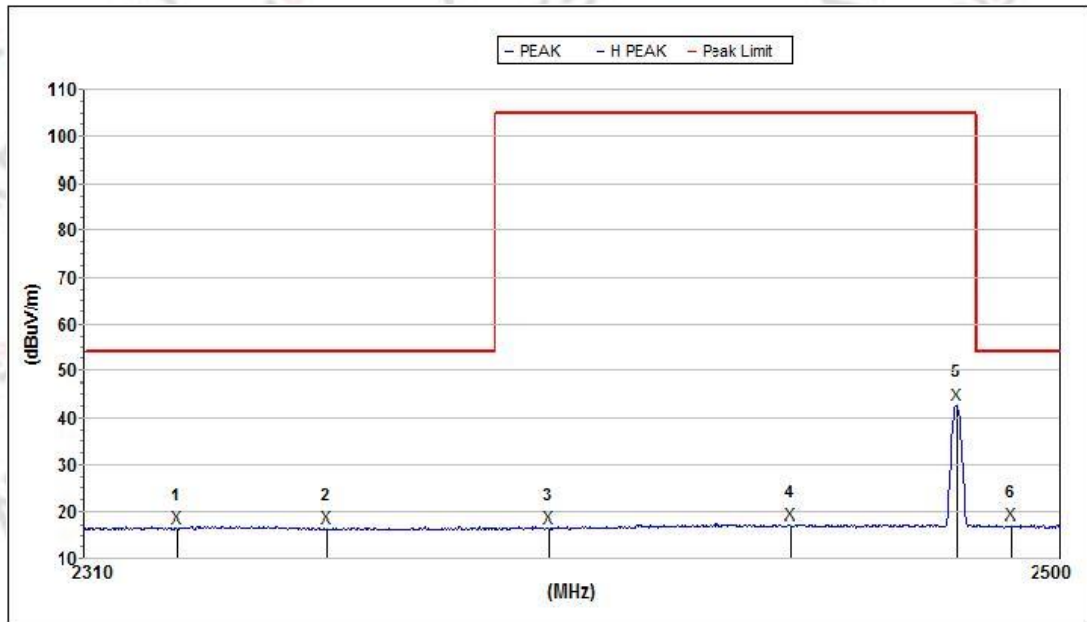


Mk.	Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2328.147	16.7	54.0	37.3	200	27.2	59.5	H
2	2357.219	16.6	54.0	37.4	100	27.3	59.6	H
3	2400.465	16.7	105.2	88.5	300	27.4	59.6	H
4	2447.598	17.2	105.2	88.0	200	27.5	59.6	H
5	2479.925	42.9	105.2	62.3	100	27.6	59.7	H
6	2490.336	17.3	54.0	36.7	200	27.6	59.7	H

1M_2480MHz Vertical

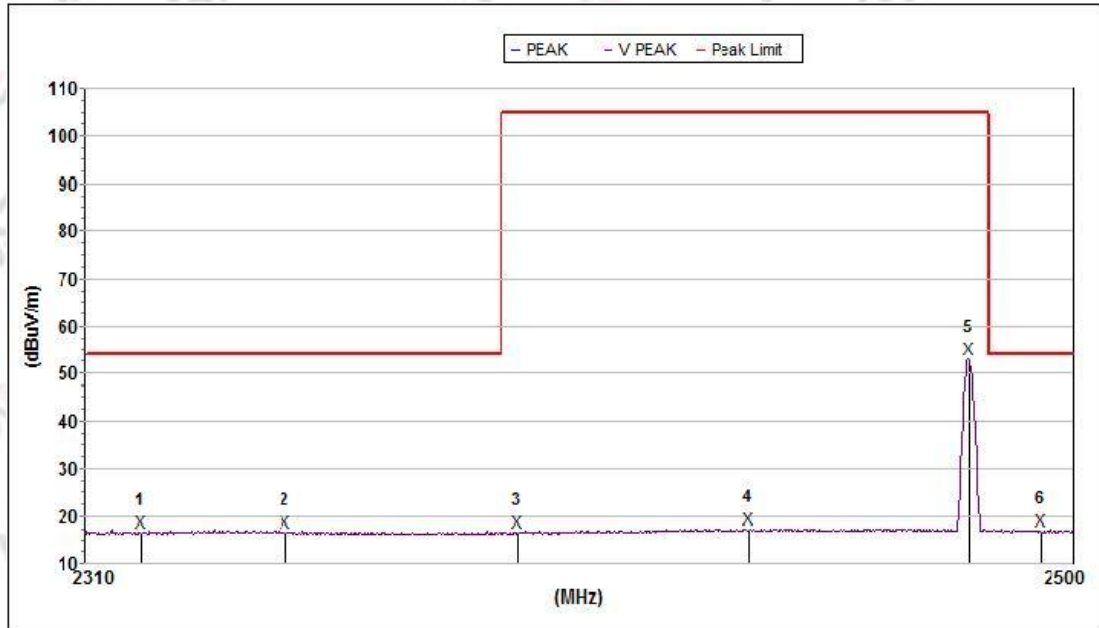


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2320.615	16.7	54.0	37.3	200	27.2	59.5	V
2	2348.478	16.7	54.0	37.3	100	27.3	59.5	V
3	2393.266	16.7	105.2	88.5	300	27.4	59.6	V
4	2437.558	17.2	105.2	88.0	200	27.5	59.6	V
5	2479.925	53.1	105.2	52.1	100	27.6	59.7	V
6	2493.685	17.0	54.0	37.0	200	27.6	59.7	V

GFSK-High
1M_2480MHz Horizontal

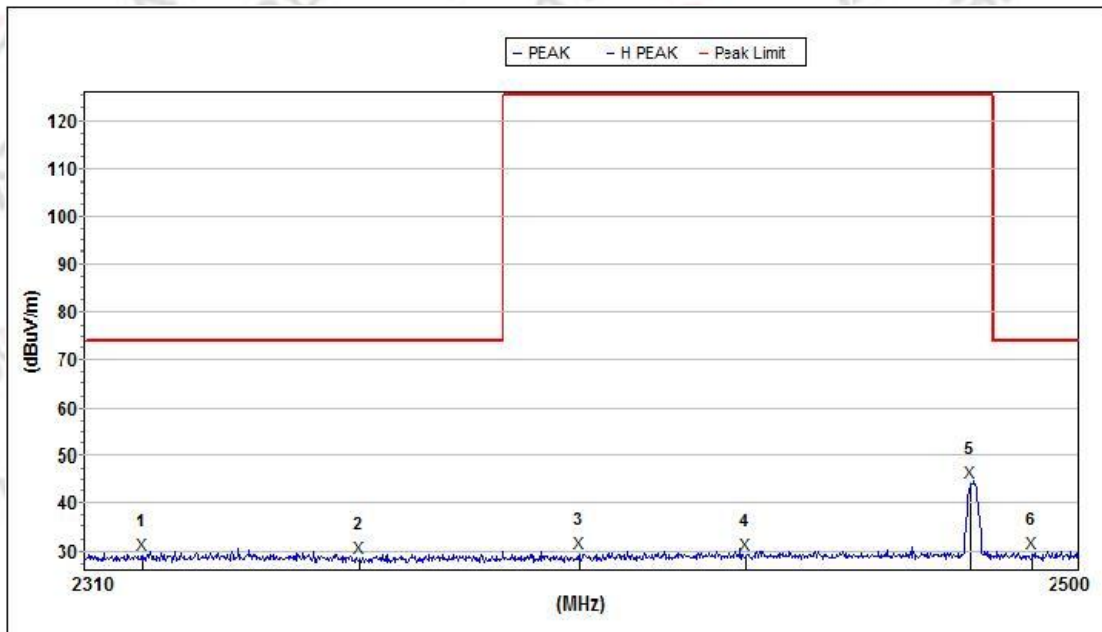


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2321.165	29.4	74.0	44.6	200	27.2	59.5	H
2	2362.629	28.6	74.0	45.4	100	27.3	59.6	H
3	2404.453	29.5	125.2	95.7	300	27.4	59.6	H
4	2436.595	29.3	125.2	95.9	200	27.5	59.6	H
5	2479.533	44.5	125.2	80.7	100	27.6	59.7	H
6	2491.123	29.5	74.0	44.5	200	27.6	59.7	H

1M_2480MHz Vertical

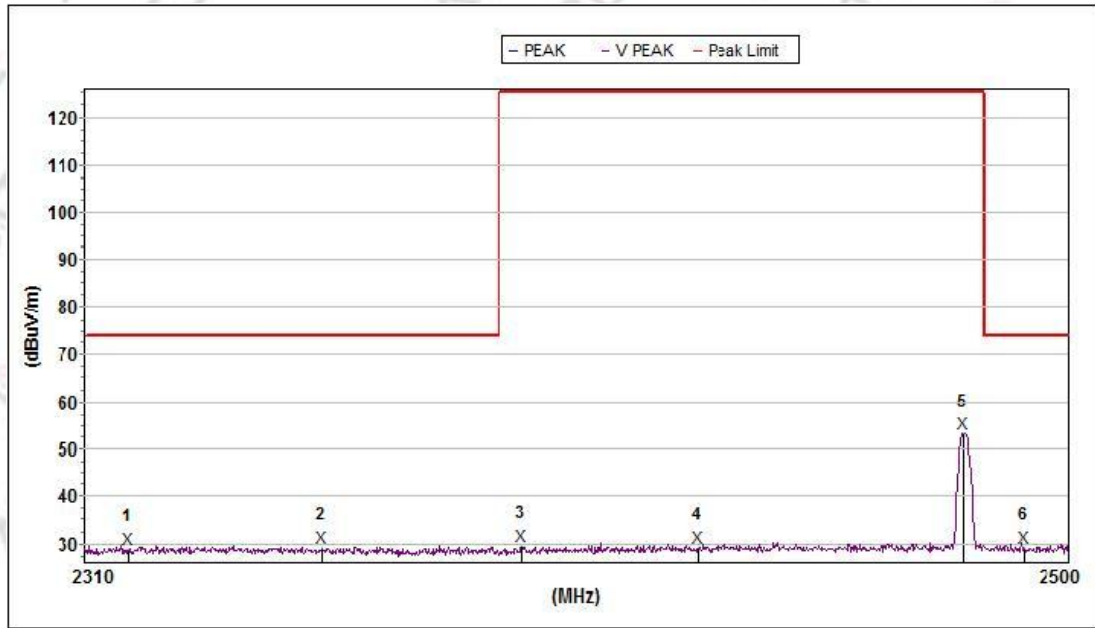


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2318.414	29.1	74.0	44.9	200	27.2	59.5	V
2	2355.915	29.4	74.0	44.6	100	27.3	59.6	V
3	2394.401	29.6	125.2	95.6	300	27.4	59.6	V
4	2428.328	29.2	125.2	96.0	200	27.5	59.6	V
5	2479.729	53.3	125.2	71.9	100	27.6	59.7	V
6	2491.320	29.3	74.0	44.7	200	27.6	59.7	V

GFSK-Low
2M_2402MHz Horizontal

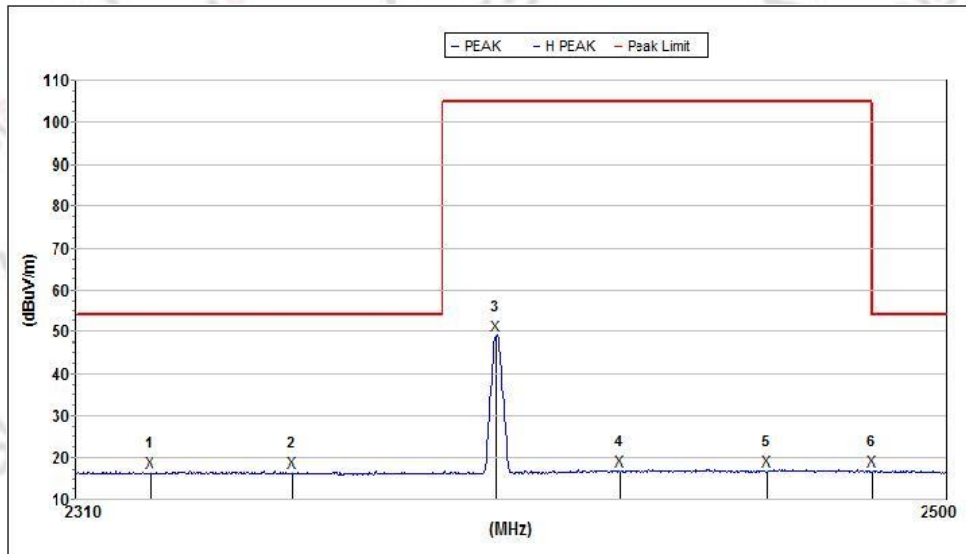


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2326.124	16.5	54.0	37.5	200	27.2	59.5	H
2	2357.405	16.5	54.0	37.5	100	27.3	59.6	H
3	2401.604	49.1	105.2	56.1	300	27.4	59.6	H
4	2428.712	17.0	105.2	88.2	200	27.5	59.6	H
5	2460.789	16.9	105.2	88.3	100	27.5	59.7	H
6	2483.849	16.8	54.0	37.2	200	27.6	59.7	H

2M_2402MHz Vertical

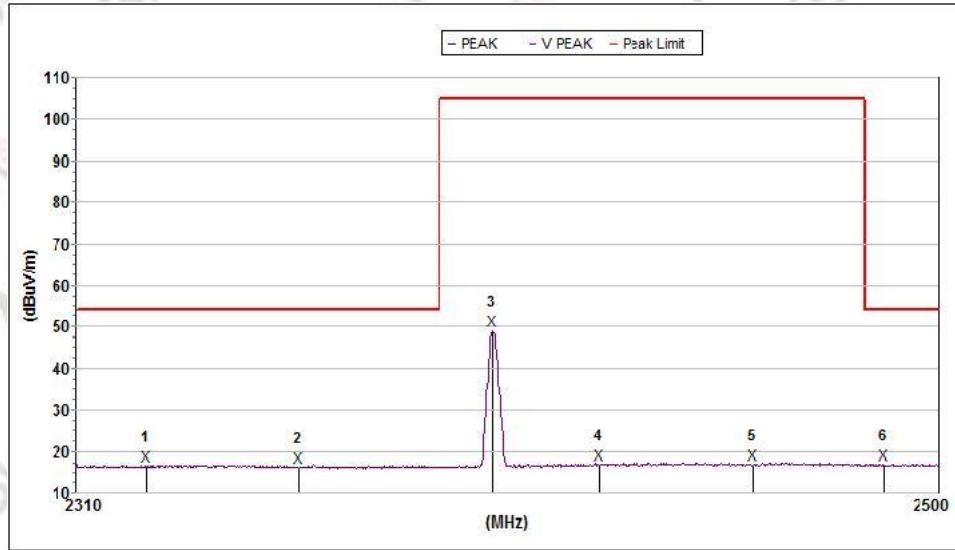


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2325.389	16.6	54.0	37.4	200	27.2	59.5	V
2	2358.897	16.4	54.0	37.6	100	27.3	59.6	V
3	2401.794	49.0	105.2	56.2	300	27.4	59.6	V
4	2425.259	17.0	105.2	88.2	200	27.5	59.6	V
5	2459.039	17.0	105.2	88.2	100	27.5	59.7	V
6	2487.778	16.8	54.0	37.2	200	27.6	59.7	V

GFSK-Low
2M_2402MHz Horizontal

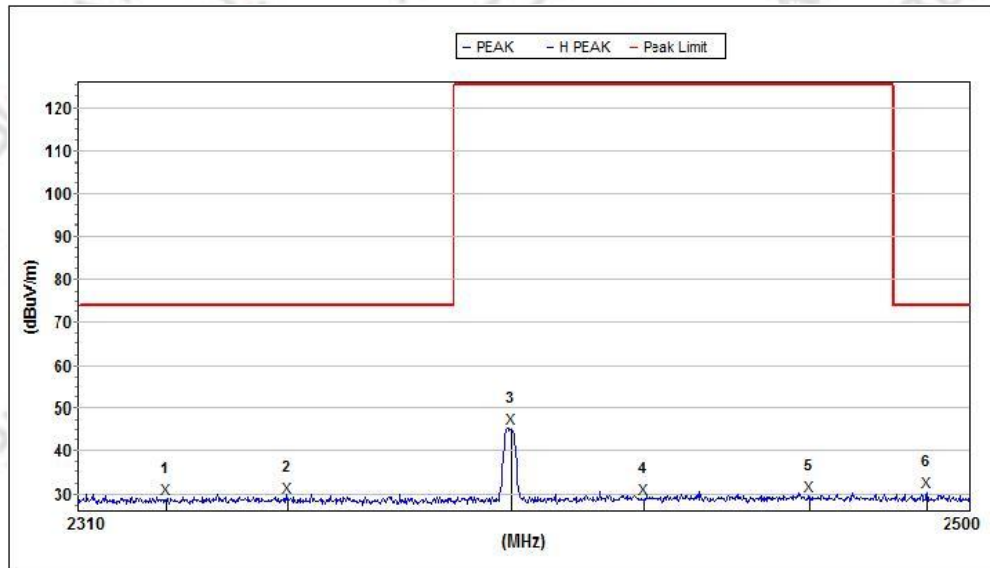


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2328.884	29.0	74.0	45.0	200	27.2	59.5	H
2	2354.798	29.3	74.0	44.7	100	27.3	59.6	H
3	2402.363	45.5	125.2	79.7	300	27.4	59.6	H
4	2430.440	28.9	125.2	96.3	200	27.5	59.6	H
5	2465.852	29.6	125.2	95.6	100	27.6	59.7	H
6	2490.730	30.5	74.0	43.5	200	27.6	59.7	H

2M_2402MHz Vertical

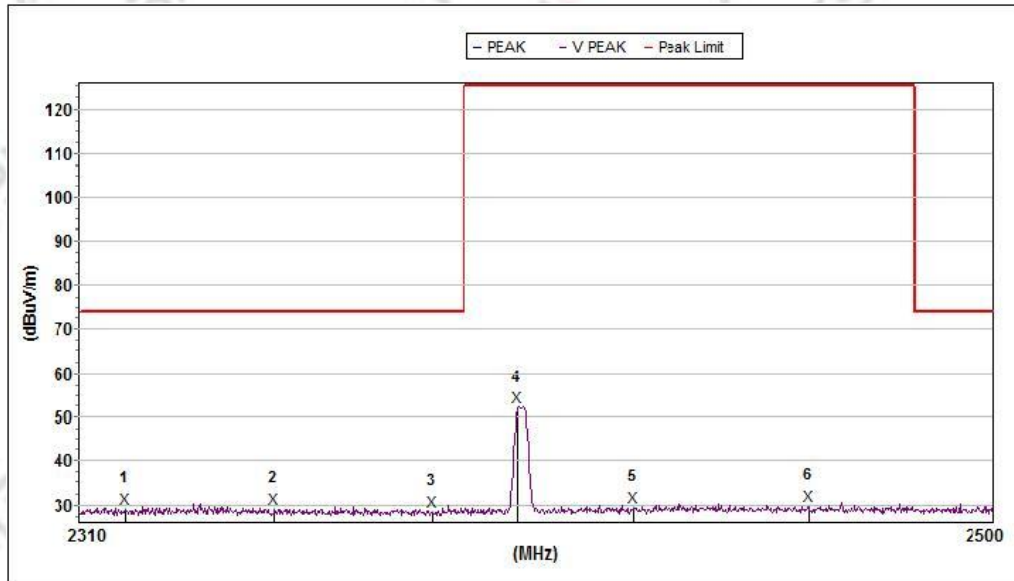


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2319.514	29.2	74.0	44.8	200	27.2	59.5	V
2	2350.707	29.3	74.0	44.7	100	27.3	59.6	V
3	2383.261	28.6	74.0	45.4	300	27.4	59.6	V
4	2401.224	52.2	125.2	73.0	200	27.4	59.6	V
5	2425.259	29.6	125.2	95.6	100	27.5	59.6	V
6	2461.567	29.8	125.2	95.4	200	27.6	59.7	V

GFSK-High
2M_2480MHz Horizontal

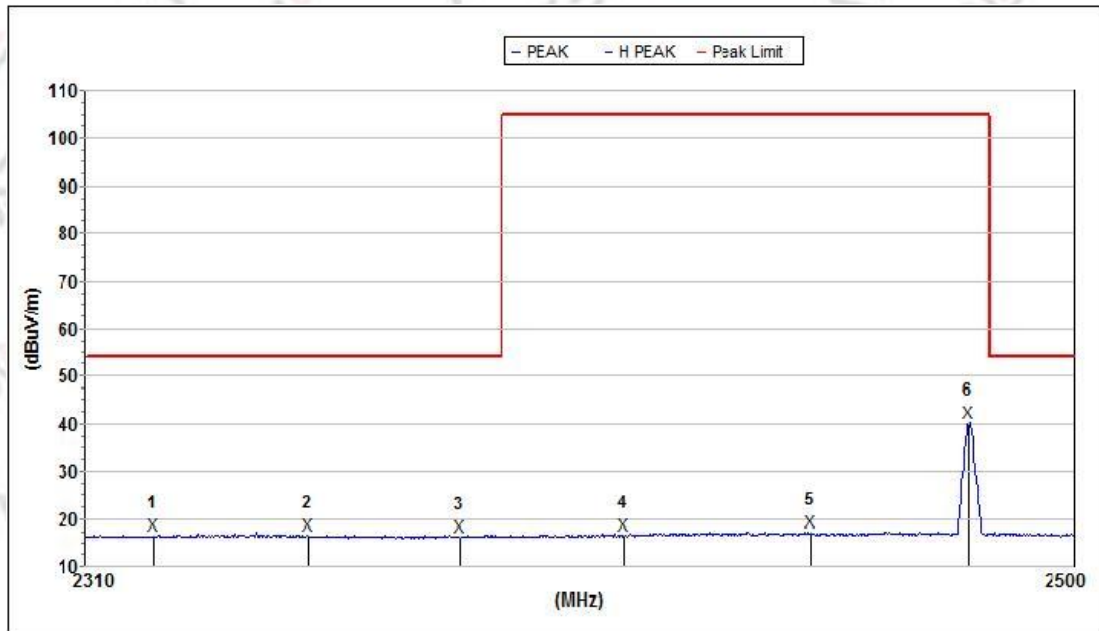


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2323.000	16.6	54.0	37.4	200	27.2	59.5	H
2	2352.938	16.5	54.0	37.5	100	27.3	59.6	H
3	2381.942	16.4	54.0	37.6	300	27.4	59.6	H
4	2413.593	16.7	105.2	88.5	200	27.4	59.6	H
5	2449.146	17.1	105.2	88.1	100	27.5	59.6	H
6	2479.729	40.4	105.2	64.8	200	27.6	59.7	H

2M_2480MHz Vertical

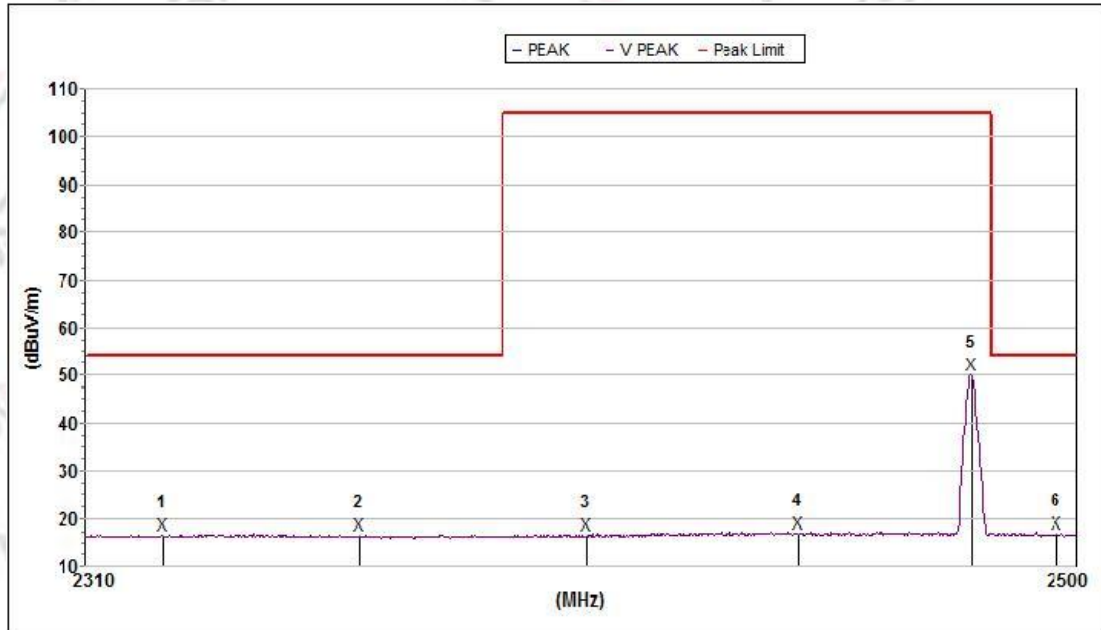


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Avg								
1	2324.653	16.6	54.0	37.4	200	27.2	59.5	V
2	2362.629	16.5	54.0	37.5	100	27.3	59.6	V
3	2405.974	16.7	105.2	88.5	300	27.4	59.6	V
4	2446.631	16.9	105.2	88.3	200	27.5	59.6	V
5	2479.925	50.1	105.2	55.1	100	27.6	59.7	V
6	2496.248	16.9	54.0	37.1	200	27.6	59.7	V

GFSK-High 2M_2480MHz Horizontal

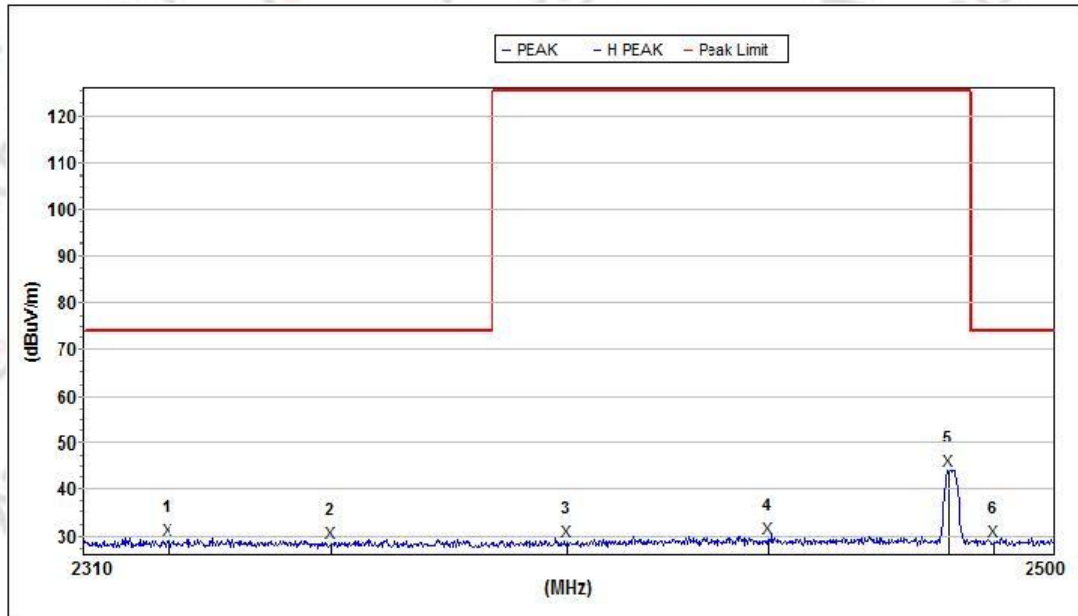

Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2326.492	29.4	74.0	44.6	200	27.2	59.5	H
2	2358.524	28.7	74.0	45.3	100	27.3	59.6	H
3	2404.453	29.1	125.2	96.1	300	27.4	59.6	H
4	2443.925	29.7	125.2	95.5	200	27.5	59.6	H
5	2479.533	44.2	125.2	81.0	100	27.6	59.7	H
6	2488.172	28.9	74.0	45.1	200	27.6	59.7	H

2M_2480MHz Vertical

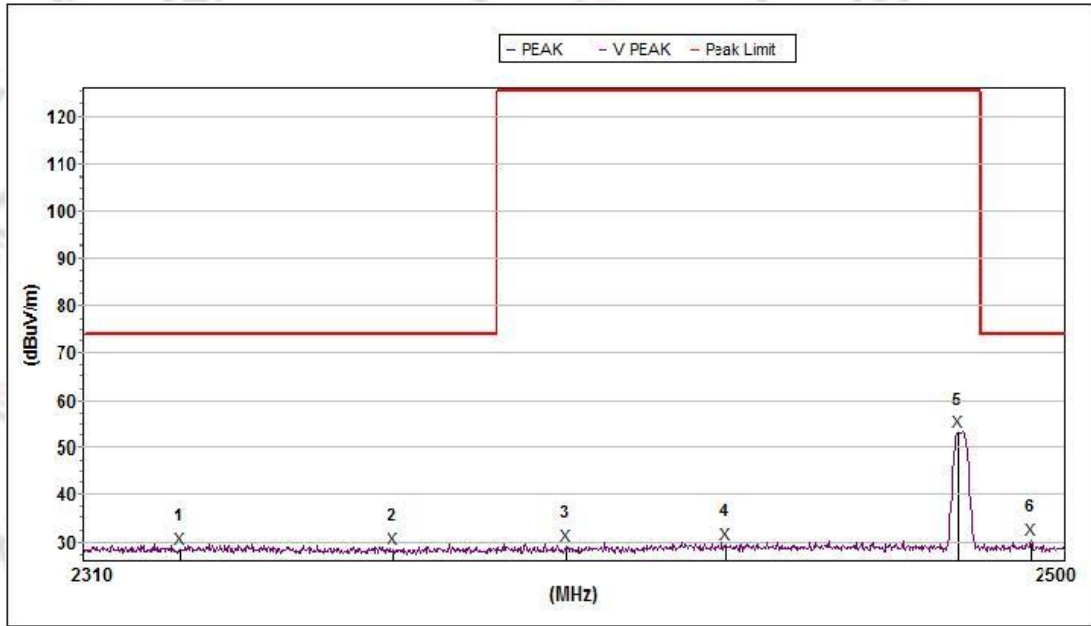


Mk.	Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Hi. (cm)	Ant.F/G. (dB/m)	Amp.G. (dB)	Pol.
Peak								
1	2328.884	28.5	74.0	45.5	200	27.2	59.5	V
2	2370.110	28.6	74.0	45.4	100	27.3	59.6	V
3	2403.313	29.2	125.2	96.0	300	27.4	59.6	V
4	2434.478	29.7	125.2	95.5	200	27.5	59.6	V
5	2479.337	53.3	125.2	71.9	100	27.6	59.7	V
6	2493.290	30.7	74.0	43.3	200	27.6	59.7	V

Appendix B3.AC Power-Line Conducted Emission Test Data

Remark:


1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit.
3. Factor=LISN factor+Cable loss+Limiter (10dB)

Temperature:	19.5℃	Relative Humidity:	38%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 7		

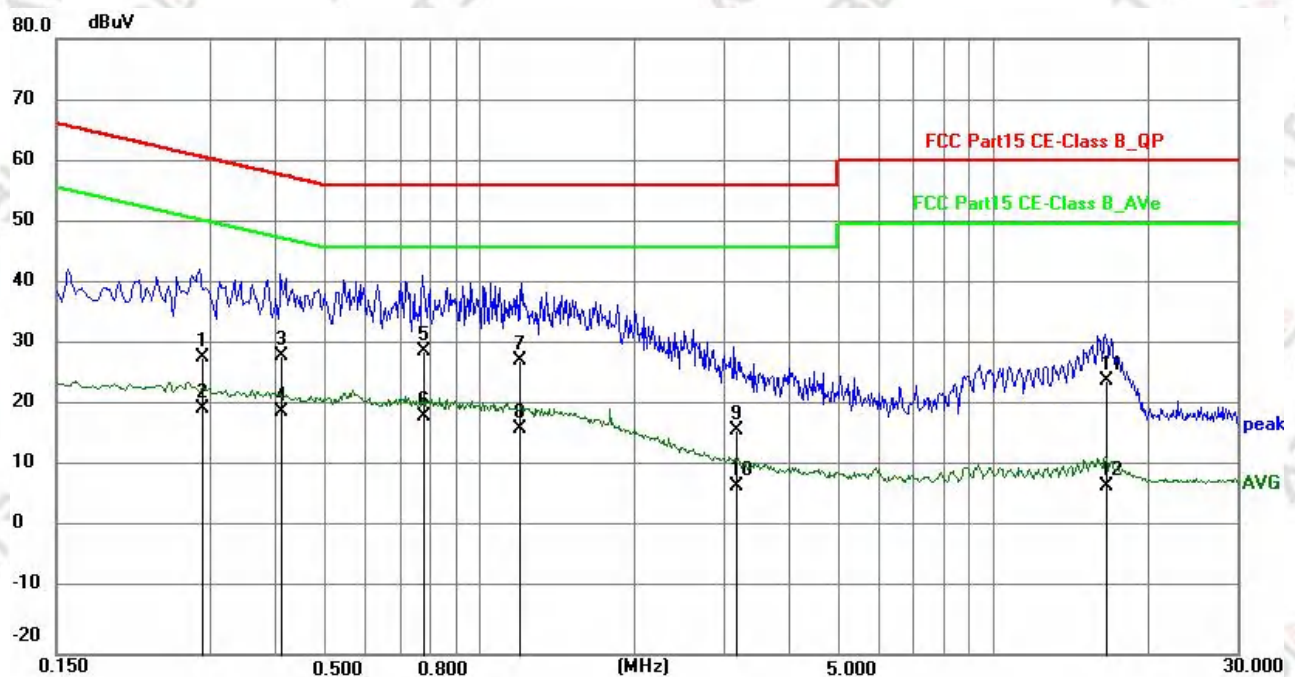

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2880	18.19	10.08	28.27	60.58	-32.31	QP
2	0.2880	9.72	10.08	19.80	50.58	-30.78	AVG
3	0.4120	18.53	10.06	28.59	57.61	-29.02	QP
4	0.4120	9.25	10.06	19.31	47.61	-28.30	AVG
5	0.7780	19.43	9.94	29.37	56.00	-26.63	QP
6	0.7780	8.74	9.94	18.68	46.00	-27.32	AVG
7	1.2030	17.84	9.95	27.79	56.00	-28.21	QP
8	1.2030	6.80	9.95	16.75	46.00	-29.25	AVG
9	3.1570	6.31	10.00	16.31	56.00	-39.69	QP
10	3.1570	-2.77	10.00	7.23	46.00	-38.77	AVG
11	16.6380	13.76	10.73	24.49	60.00	-35.51	QP
12	16.6380	-3.47	10.73	7.26	50.00	-42.74	AVG

Temperature:	19.5°C	Relative Humidity:	38%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 7		

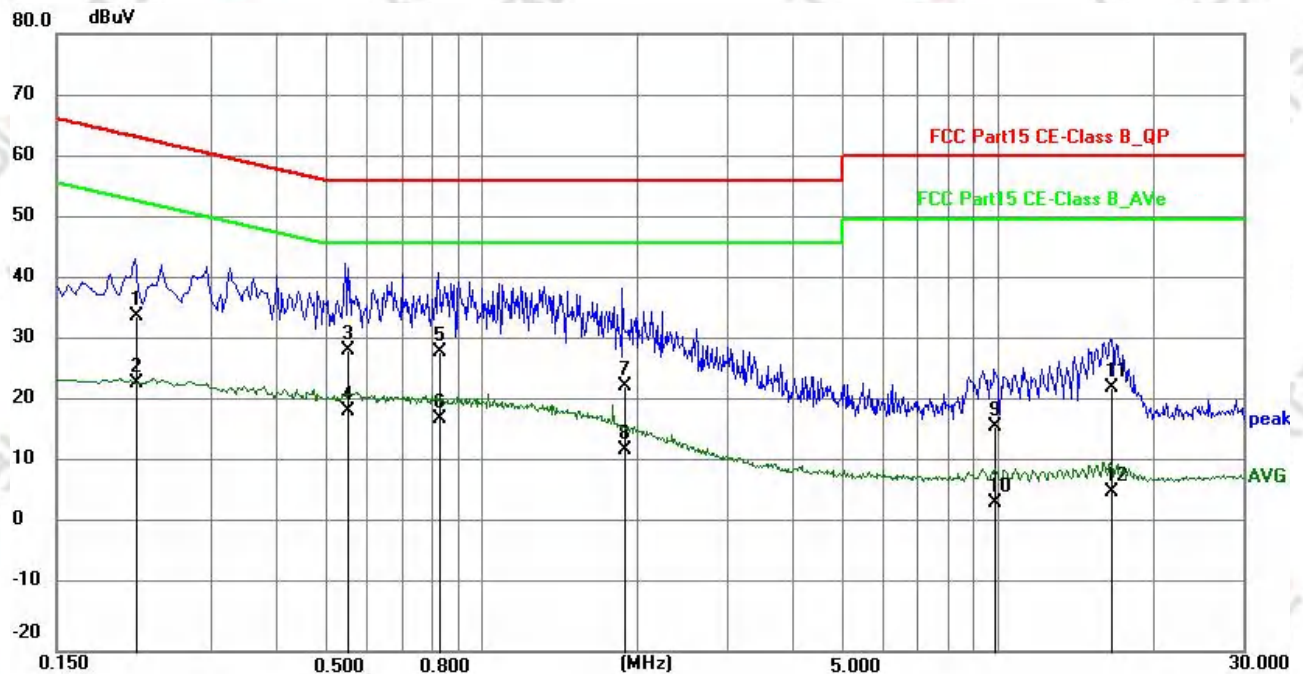

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2130	23.93	10.36	34.29	63.09	-28.80	QP
2	0.2130	13.08	10.36	23.44	53.09	-29.65	AVG
3	0.5500	18.51	10.18	28.69	56.00	-27.31	QP
4	0.5500	8.72	10.18	18.90	46.00	-27.10	AVG
5	0.8290	18.40	10.14	28.54	56.00	-27.46	QP
6	0.8290	7.54	10.14	17.68	46.00	-28.32	AVG
7	1.8890	12.85	10.20	23.05	56.00	-32.95	QP
8	1.8890	2.54	10.20	12.74	46.00	-33.26	AVG
9	9.9090	6.15	10.13	16.28	60.00	-43.72	QP
10	9.9090	-6.19	10.13	3.94	50.00	-46.06	AVG
11	16.6390	12.28	10.35	22.63	60.00	-37.37	QP
12	16.6390	-4.56	10.35	5.79	50.00	-44.21	AVG

*****END OF APPENDIX B*****

