



FCC Test Report

Part 15 subpart C

Client Information:

Applicant: WINE PLUM INC
Applicant add.: 11 SW 12th Ave Suite 104, Dania Beach, FL 33004, USA

Product Information:

Product Name: Wine Refrigerator and Dispenser

Model No.: PLUM01

Brand Name:



FCC ID: 2AME230-19P-8M-1B19

Standards: CFR 47 FCC PART 15 SUBPART C:2017 section 15.247

Prepared By:

UL-CCIC Company Limited

Add. : Electronic Building, Parage Electronic Industrial Park, No. 8 Nanyun Er Road,
Guangzhou Science Park, Guangzhou, 510663 China

Date of Receipt: Mar. 10, 2017

Date of Test: Mar. 10, 2017~Jun. 15, 2017

Date of Issue: Jun. 21, 2017

Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UL-CCIC Company Limited.

Reviewed by: Danny Huang

Approved by: Richard Si



1 Contents

	Page
COVER PAGE	
1 CONTENTS	2
2 TEST SUMMARY	4
2.1 COMPLIANCE WITH FCC PART 15 SUBPART C	4
2.2 TEST LOCATION	4
2.3 MEASUREMENT UNCERTAINTY	5
3 TEST FACILITY	6
3.1 DEVIATION FROM STANDARD	6
3.2 ABNORMALITIES FROM STANDARD CONDITIONS	6
4 GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF EUT	7
4.2 DESCRIPTION OF TEST CONDITIONS	9
4.3 TEST PERIPHERAL LIST	10
4.4 EUT PERIPHERAL LIST	10
5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
6 TEST RESULT	12
6.1 ANTENNA REQUIREMENT	12
6.1.1 Standard requirement	12
6.1.2 EUT Antenna	12
6.2 CONDUCTION EMISSIONS MEASUREMENT	13
6.2.1 Applied procedures / Limit	13
6.2.2 Test procedure	13
6.2.3 Test setup	13
6.2.4 Test results	14
6.3 RADIATED EMISSIONS MEASUREMENT	16
6.3.1 Applied procedures / Limit	16
6.3.2 Test setup	17
6.3.3 Test Result	20
6.3.4 TEST RESULTS (Restricted Bands Requirements)	25
6.4 BANDWIDTH TEST	26
6.4.1 Applied procedures / Limit	26
6.4.2 Test procedure	26
6.4.3 Deviation from standard	26
6.4.4 Test setup	26



6.4.5	Test results	27
6.5	PEAK POWER DENSITY	29
6.5.1	Applied procedures / Limit	29
6.5.2	Test procedure	29
6.5.3	Deviation from standard	29
6.5.4	Test results	30
6.6	MAXIMUM PEAK OUTPUT POWER	32
6.6.1	Applied procedures / Limit	32
6.6.2	Test procedure	32
6.6.3	Deviation from standard	32
6.6.4	Test setup	32
6.6.5	Test results	33
6.7	BAND EDGE	35
6.7.1	Applied procedures / Limit	35
6.7.2	Test procedure	35
6.7.3	Deviation from standard	35
6.7.4	Test setup	35
6.7.5	Test results	36
6.8	CONDUCTED SPURIOUS EMISSIONS	37
6.8.1	Applied procedures / Limit	37
6.8.2	Test procedure	37
6.8.3	Deviation from standard	37
6.8.4	Test setup	37
6.8.5	Test results	38
7	PHOTOGRAPHS	44
7.1	RADIATED EMISSION TEST SETUP	44
7.2	CONDUCTED EMISSIONS TEST SETUP	45
7.3	EUT CONSTRUCTIONAL DETAILS	46



2 Test Summary

2.1 Compliance with FCC Part 15 subpart C

Test	Test Requirement	Standard Paragraph	Result
Antenna Requirement	FCC Part 15 C:2017	Section 15.247(c)	PASS
Conduction Emissions	FCC Part 15 C:2017	Section 15.207(a)	PASS
Radiated Emissions	FCC Part 15 C:2017	Section 15.247(d)	PASS
Occupied Bandwidth	FCC Part 15 C:2017	Section 15.247(a)(2)	PASS
Peak power density	FCC Part 15 C:2017	Section 15.247(e)	PASS
Maximum Peak Output Power	FCC Part 15 C:2017	Section 15.247(b)(1)	PASS
Band edge	FCC Part 15 C:2017	Section 15.247(d)	PASS
Conducted Spurious Emissions	FCC Part 15 C:2017	Section 15.247(d)	PASS
Note:			
	(1) Reference to the KDB 558074 D01 DTS Guidance v04 and ANSI C63.10:2013.		
	(2) The product supports for Bluetooth basic rate / EDR and low energy connections Bluetooth 4.1 Dual-mode, this report is low energy connection test mode, for basic rate / EDR connection please refer to the report number 4787933990-F1-00-3.		

2.2 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited
No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China
Tel.: +86.769.82020499 Fax.: +86.769.82020495



2.3 Measurement Uncertainty

All measurements involve certain levels of uncertainties, the maximum value of the uncertainty as below:

No.	Item	Uncertainty
1	Conducted Emission Test	1.20dB
2	Radiated Emission Test	3.30dB
3	RF power,conducted	0.16dB
4	RF power density,conducted	0.24dB
5	Spurious emissions,conducted	0.21dB
6	All emissions,radiated(<1G)	4.68dB
7	All emissions,radiated(>1G)	4.89dB



3 Test Facility

The test facility is recognized, certified or accredited by the following organizations:

.CNAS- Registration No: L6177

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

.FCC- Registration No: 248337

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) Technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

.Industry Canada(IC)-Registration No: IC6819A-1

The 3m Semi-Anechoic Chamber and 3m/10m Open Area Test Site of Dongguan Yaxu (AiT) Technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 12, 2014.

3.1 Deviation from standard

None

3.2 Abnormalities from standard conditions

None



4 General Information

4.1 General Description of EUT

Manufacturer:	Sirtec (DongGuan) Plastics & Electronics Co., Ltd.
Manufacturer Address:	No.154, Shi Gu District, Tang Xia, Dong Guan, Guang Dong, China
EUT Name:	Wine Refrigerator and Dispenser
Model No.:	PLUM01
Brand Name:	
Derivative model No.:	N/A
Operation frequency:	2402 MHz to 2480 MHz
NUMBER OF CHANNEL:	40
Modulation Technology:	GFSK
Bluetooth version:	BT4.1 Dual-mode (BLE)
Antenna Type:	PCB mounted chip antenna
Antenna Gain:	maximum 1.5dBi
H/W No.:	EV
S/W No.:	EV
Power Supply Range:	100-240 VAC, Max. 2A, 50/60 Hz
Power Supply:	AC 120V/60Hz
Power Cord:	1.5 m x 3 wires unscreened AC cable
Output power (max) :	7.43dBm
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.




Description of Channel:			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

4.2 Description of Test conditions

(1) EUT was tested in normal configuration (Please See following Block diagram)

1. Block diagram of EUT configuration(TX Mode)

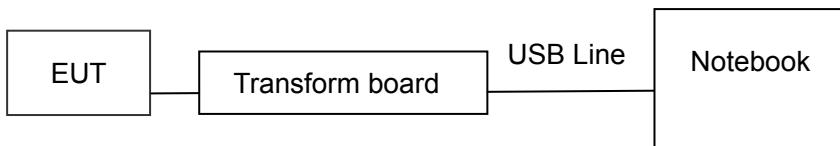

Note: 1. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

2. Set EUT as above block diagram, run the software BT, set the transmit serial port/power/channel/packet type/data type/hopping or not, send configuration, than EUT enter the TX mode. After finishing the test setting, the notebook and the transform board will be removed during measurements.

(2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

(3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

(4) Frequency range of radiated measurements:

According to the 15.33, the test range will be up to the tenth harmonic of the highest fundamental frequency.



4.3 Test Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	Laptop	ASUS	N/A	X401A	X16-96072	N/A	N/A
2	Adapter (laptop)	ASUS	N/A	EXA070 3YH	N/A	1.8m/unshielded /detachable	N/A
3	USB line	N/A	N/A	N/A	N/A	N/A	1.2m/unshielded /detachable
4	Transform board	N/A	N/A	N/A	N/A	N/A	N/A

4.4 EUT Peripheral List

No.	Equipment	Manufacturer	EMC Compliance	Model No.	Serial No.	Power cord	signal cable
1	AC line	N/A	N/A	N/A	N/A	N/A	1.5m/ detachable



5 Equipments List for All Test Items

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	SIGNAL ANALYZER	R&S	FSV40	101470	2016.06.29	2017.06.28
2	EMI Measuring Receiver	R&S	ESR	101660	2016.06.29	2017.06.28
3	Low Noise Pre Amplifier	Tsj	MLA-10K01-B01-27	1205323	2016.06.29	2017.06.28
4	Low Noise Pre Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2016.06.29	2017.06.28
5	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2016.06.29	2017.06.28
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2016.06.29	2017.06.28
7	SHF-EHF Horn	SCHWARZBECK	BBHA9170	BBHA9170367	2016.06.29	2017.06.28
8	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.06.29	2017.06.28
9	EMI Test Receiver	R&S	ESCI	100124	2016.06.29	2017.06.28
10	LISN	Kyoritsu	KNW-242	8-837-4	2016.06.29	2017.06.28
11	LISN	Kyoritsu	KNW-407	8-1789-3	2016.06.29	2017.06.28
12	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.29	2017.06.28
13	Loop Antenna	ETS	6512	00165355	2016.06.29	2017.06.28
14	Radiated Cable 1# (30MHz-1GHz)	FUJIKURA	5D-2W	01	2016.12.25	2017.12.24
15	Radiated Cable 2# (1GHz -25GHz)	FUJIKURA	10D2W	02	2016.12.25	2017.12.24
16	Conducted Cable 1#(9KHz-30MHz)	FUJIKURA	1D-2W	01	2016.12.25	2017.12.24
17	SMA Antenna connector	Dosin	Dosin-SMA	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



6 Test Result

6.1 Antenna Requirement

6.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

6.1.2 EUT Antenna

The antenna is PCB mounted chip antenna and no consideration of replacement. Antenna gain is maximum 1.5dBi from 2.4GHz to 2.5GHz.

6.2 Conduction Emissions Measurement

6.2.1 Applied procedures / Limit


Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

6.2.2 Test procedure


EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

6.2.3 Test setup

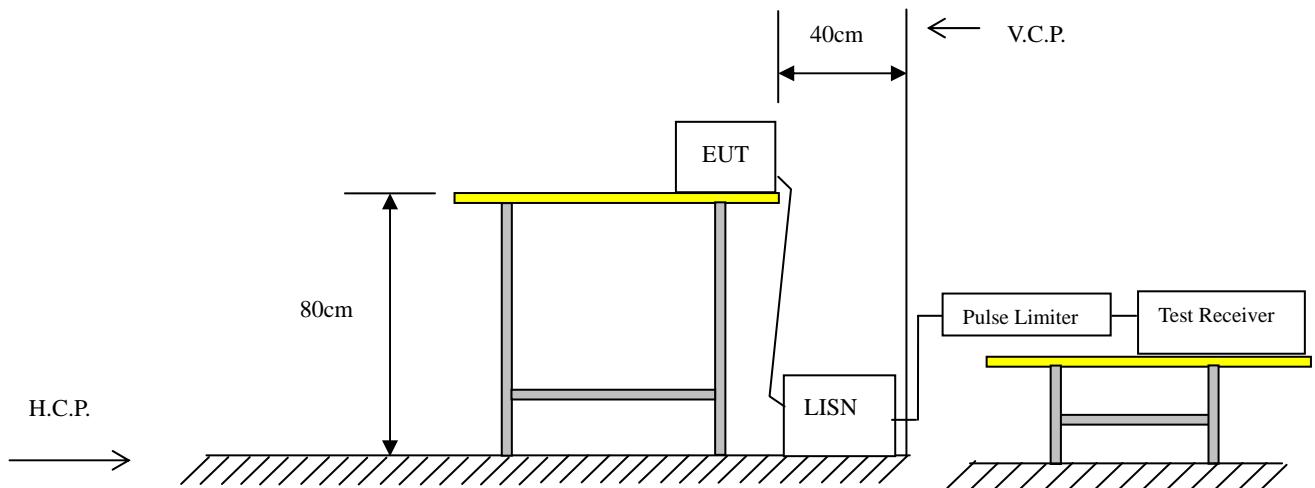

6.2.4 Test results

EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2017-06-09
Test Mode :	RF Link mode	Phase :	Line
Test Voltage :	AC 120V/60Hz		

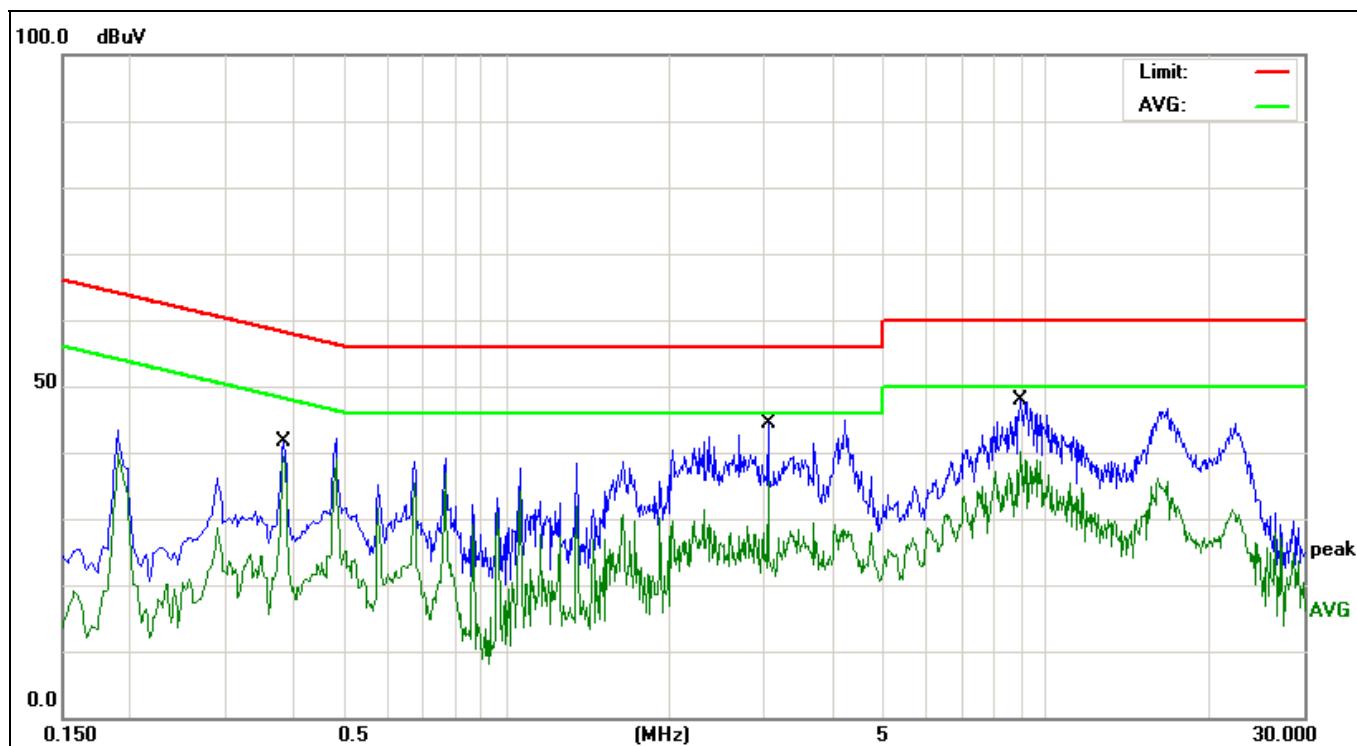


Remark: Factor = Insertion Loss + Cable Loss + Pulse limit.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dBuV	dB
1		0.3860	31.57	10.13	41.70	58.15	-16.45
2	*	0.3860	29.33	10.13	39.46	48.15	-8.69
3		3.0420	34.45	10.03	44.48	56.00	-11.52
4		3.0420	25.71	10.03	35.74	46.00	-10.26
5		8.9500	37.77	10.21	47.98	60.00	-12.02
6		8.9500	30.01	10.21	40.22	50.00	-9.78



EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2017-06-09
Test Mode :	RF Link mode	Phase :	Neutral
Test Voltage :	AC 120V/60Hz		

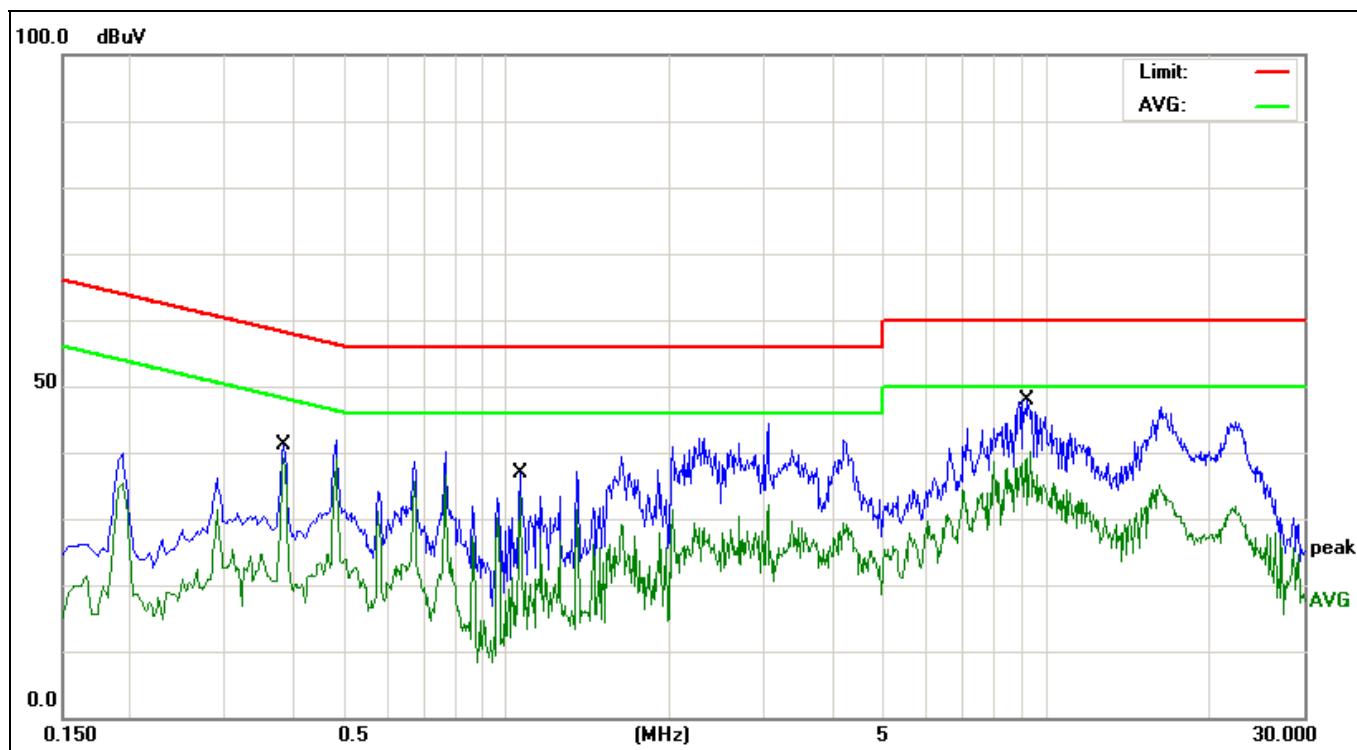

Remark: Factor = Insertion Loss + Cable Loss + Pulse limit.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1		0.3860	30.90	10.13	41.03	58.15	-17.12 QP
2	*	0.3860	29.11	10.13	39.24	48.15	-8.91 AVG
3		1.0580	26.98	9.94	36.92	56.00	-19.08 QP
4		1.0580	23.45	9.94	33.39	46.00	-12.61 AVG
5		9.2380	37.66	10.17	47.83	60.00	-12.17 QP
6		9.3340	29.94	10.16	40.10	50.00	-9.90 AVG



6.3 Radiated Emissions Measurement

6.3.1 Applied procedures / Limit


15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency of Emission (MHz)	Field Strength		Measurement Distance (meters)
	µV/m	dBµV/m	
0.009-0.49	2400/F(kHz)		300
0.49-1.705	24000/F(kHz)		30
1.705-30	30		30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3


6.3.2 Test setup

Test Configuration:


1) 9 kHz to 30 MHz emissions:

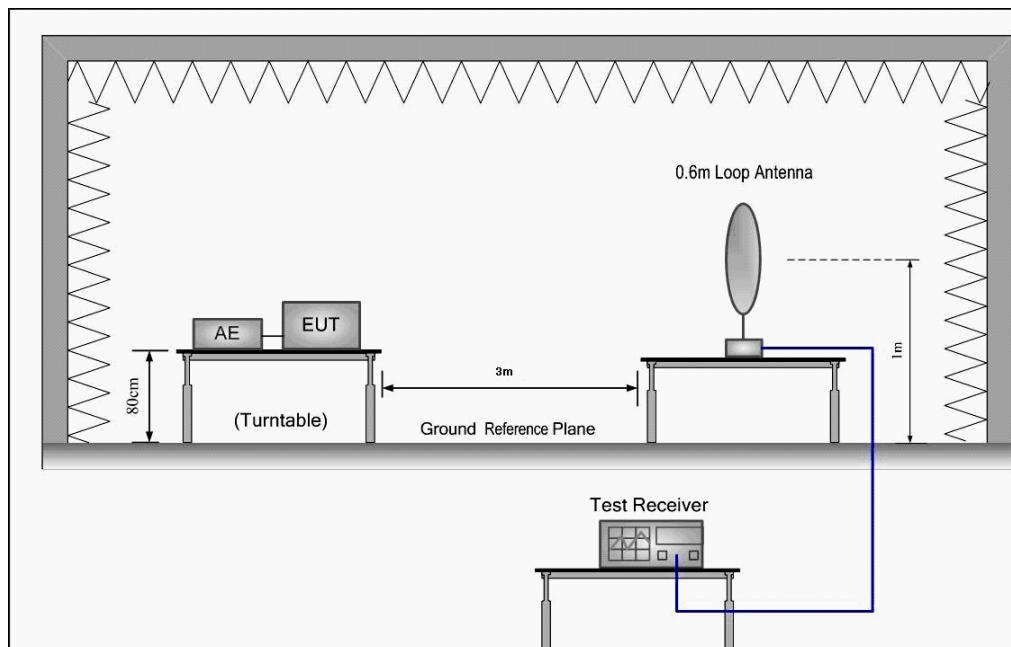

2) 30 MHz to 1 GHz emissions:

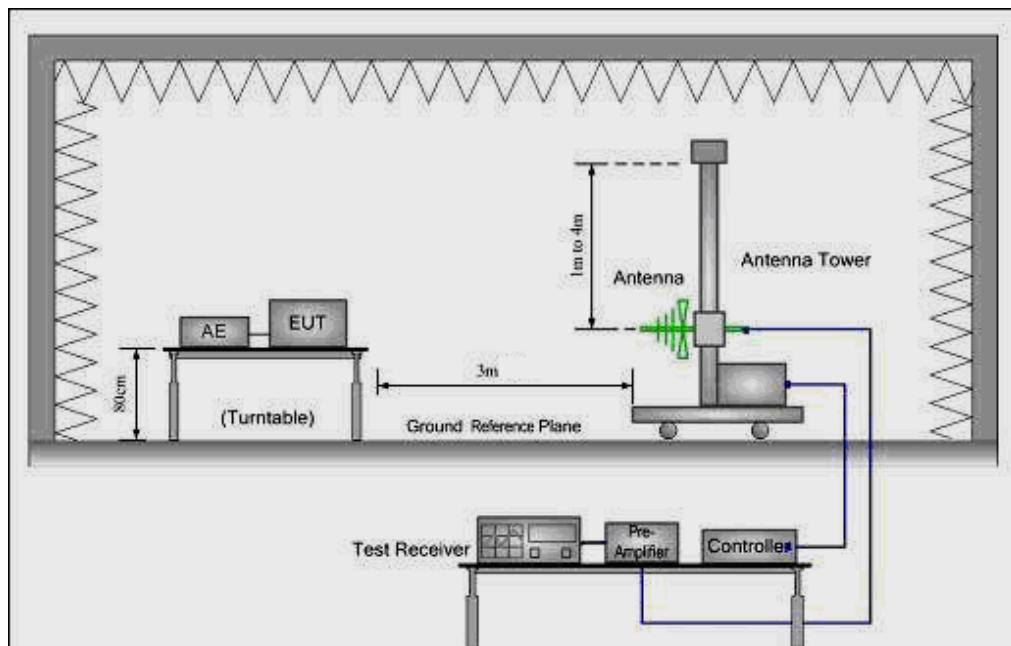

3) 1 GHz to 40 GHz emissions:

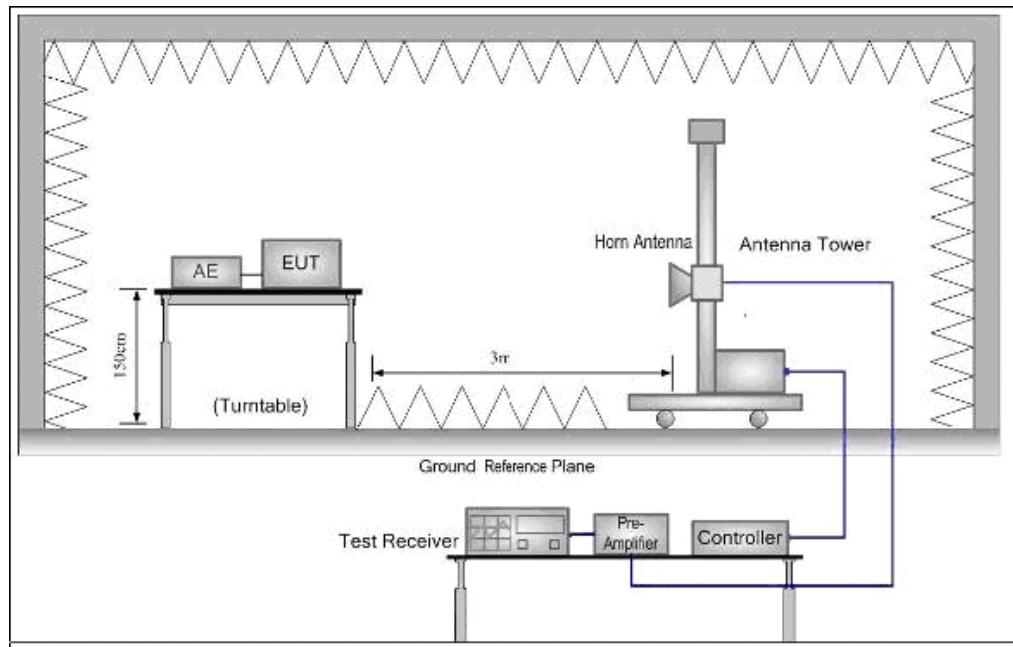

**Test procedure:**

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

From 30MHz to 1GHz, read the Quasi-Peak field strength of the emissions with receiver QP detector RBW=120KHz.

Above 1GHz, read the Peak field strength and Average field strength.

Read the Peak field strength through RBW=1MHz, VBW=3MHz in spectrum analyzer setting;

Read the Average field strength through RBW=1MHz, VBW=10Hz in spectrum analyzer setting;

For measurement at frequency above 1GHz

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

While maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the average field strength reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.



6.3.3 Test Result

Radiated Emissions Test Data Below 30MHz

EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	25 °C	Test Data :	2017-06-09
Pressure :	1005 hPa	Relative Humidity :	60%
Test Mode :	TX(1Mbps worst case)	Test Voltage :	AC 120V/60Hz
Measurement Distance	3 m	Frequency Range	9KHz to 30MHz
RBW/VBW	9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP		

No emission found between lowest internal used/generated frequencies to 30MHz.

**Radiated Emissions Test Data Below 1GHz**

EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	25 °C	Test Data :	2017-06-09
Pressure :	1010 hPa	Relative Humidity :	60%
Test Mode :	TX (1Mbps) CH00 (worst case)	Test Voltage :	AC 120V/60Hz
Measurement Distance	3 m	Frequency Range	30MHz to 1GHz
RBW/VBW	100KHz / 300KHz for spectrum, RBW=120KHz for receiver.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
50.0566	55.27	-18.72	36.55	40.00	-3.45	QUASIPEAK
99.8777	53.51	-14.08	39.43	43.50	-4.07	QUASIPEAK
103.4421	50.39	-13.69	36.70	43.50	-6.80	QUASIPEAK
250.3012	52.66	-13.57	39.09	46.00	-6.91	QUASIPEAK
501.1790	42.26	-5.61	36.65	46.00	-9.35	QUASIPEAK
614.2142	41.62	-1.94	39.68	46.00	-6.32	QUASIPEAK

(b) Antenna polarization: vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
50.0566	45.01	-14.22	30.79	40.00	-9.21	QUASIPEAK
100.2286	55.61	-15.99	39.62	43.50	-3.88	QUASIPEAK
250.3012	54.58	-13.57	41.01	46.00	-4.99	QUASIPEAK
501.1790	45.84	-5.61	40.23	46.00	-5.77	QUASIPEAK
656.5300	44.52	-1.50	43.02	46.00	-2.98	QUASIPEAK
701.7610	42.18	0.32	42.50	46.00	-3.50	QUASIPEAK

Note:

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

**Radiated Emissions Test Data Above 1GHz**

EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	25 °C	Test Data :	2017-06-09
Pressure :	1010 hPa	Relative Humidity :	60%
Test Mode :	TX(1Mbps)	Test Voltage :	AC 120V/60Hz
Measurement Distance	3 m	Frequency Range	1GHz to 25GHz
RBW/VBW	Spurious emission: 1MHz/1MHz for Peak, 1MHz/10Hz for Average. non-restricted band: 100KHz/300KHz for Peak.		

(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4804.000	55.86	5.06	60.92	74.00	-13.08	PEAK
4804.000	43.75	5.06	48.81	54.00	-5.19	AVERAGE
7206.000	42.82	7.03	49.85	74.00	-24.15	PEAK
7206.000	34.38	7.03	41.41	54.00	-12.59	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4804.000	51.50	5.06	56.56	74.00	-17.44	PEAK
4804.000	41.56	5.06	46.62	54.00	-7.38	AVERAGE
7206.000	40.53	7.03	47.56	74.00	-26.44	PEAK
7206.000	34.71	7.03	41.74	54.00	-12.26	AVERAGE

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Low Channel 00: 2402 MHz

Data rate: 1Mbps



(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4880.000	56.31	5.14	61.45	74.00	-12.55	PEAK
4880.000	41.53	5.14	46.67	54.00	-7.33	AVERAGE
7320.000	41.34	7.52	48.86	74.00	-25.14	PEAK
7320.000	32.99	7.52	40.51	54.00	-13.49	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4880.000	52.63	5.14	57.77	74.00	-16.23	PEAK
4880.000	42.86	5.14	48.00	54.00	-6.00	AVERAGE
7320.000	42.77	7.52	50.29	74.00	-23.71	PEAK
7320.000	32.73	7.52	40.25	54.00	-13.75	AVERAGE

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Low Channel 19: 2440 MHz

Data rate: 1Mbps



(a) Antenna polarization: Horizontal

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4960.000	53.64	5.22	58.86	74.00	-15.14	PEAK
4960.000	42.31	5.22	47.53	54.00	-6.47	AVERAGE
7440.000	42.87	8.06	50.93	74.00	-23.07	PEAK
7440.000	32.01	8.06	40.07	54.00	-13.93	AVERAGE

(b) Antenna polarization: Vertical

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector Type
4960.000	50.53	5.22	55.75	74.00	-18.25	PEAK
4960.000	42.13	5.22	47.35	54.00	-6.65	AVERAGE
7440.000	42.63	8.06	50.69	74.00	-23.31	PEAK
7440.000	31.67	8.06	39.73	54.00	-14.27	AVERAGE

Note:

8~25GHz at least have 20dB margin. No recording in the test report.

Measurement Level = Reading Level + Factor

Factor= Ant Factor + Cable Loss - Pre-amplifier

Low Channel 39: 2480 MHz

Data rate: 1Mbps



6.3.4 TEST RESULTS (Restricted Bands Requirements)

EUT :	Wine Refrigerator and Dispenser			Model Name :	PLUM01					
Temperature :	25 °C			Test Data :	2017-06-09					
Pressure :	1010 hPa			Relative Humidity :	60%					
Test Mode :	TX(1Mbps)			Test Voltage :	AC 120V/60Hz					
RBW/VBW :	1MHz/1MHz for Peak, 1MHz/10Hz for Average.									
Note :	<ol style="list-style-type: none">1. The transmitter was setup to transmit at the lowest channel. Then the field strength was measured at 2310-2390 MHz.2. The transmitter was setup to transmit at the highest channel. Then the field strength was measured at 2483.5-2500 MHz.3. The data of 2390MHz and 2483.5MHz was the worst.									

Test Mode	Ant.Pol. H/V	Freq. (MHz)	Reading		Ant/CF CF(dB)	Act		Limit	
			Peak (dBuv)	AV (dBuv)		Peak (dBuv/m)	AV (dBuv/m)	Peak (dBuv/m)	AV (dBuv/m)
TX Data rate 1Mbps	H	2390.000	47.61	36.86	-5.79	41.82	31.07	74.00	54.00
	V	2390.000	48.86	37.08	-5.79	43.07	31.29	74.00	54.00
	H	2483.500	49.37	38.88	-4.98	44.39	33.90	74.00	54.00
	V	2483.500	45.53	34.76	-4.98	40.55	29.78	74.00	54.00

6.4 BANDWIDTH TEST

6.4.1 Applied procedures / Limit

15.247(a) (2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4.2 Test procedure

- a. The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v04
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Spectrum Setting: RBW= 100KHz, VBW \geq 3 \times RBW, Sweep time = Auto, Detector Function = Peak, centering on a hopping channel Trace = Max Hold.
- d. Mark the peak frequency and -6 dB points bandwidth.

6.4.3 Deviation from standard

No deviation.

6.4.4 Test setup




6.4.5 Test results


EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX(1Mbps)		

Test Mode	Test Channel	Frequency (MHz)	6 dB Bandwidth (KHz)	Limit (kHz)
Data rate 1Mbps	CH00	2402	581.4	≥ 500
	CH19	2440	617.4	≥ 500
	CH39	2480	564.0	≥ 500


(1Mbps)
The Lowest Channel 00: 2402 MHz

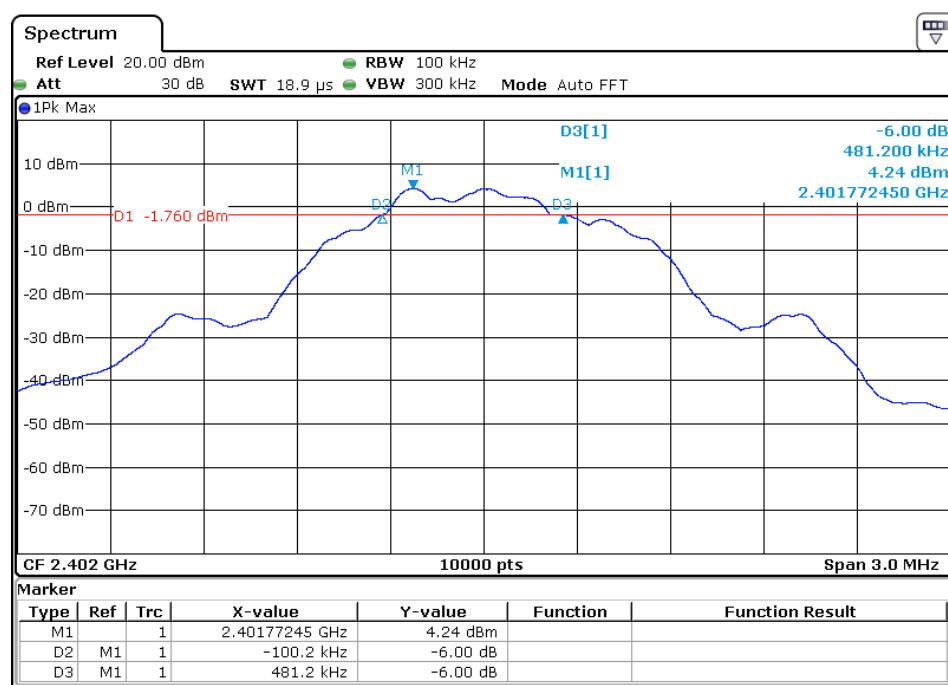

(1Mbps)
The Middle Channel 19: 2440 MHz

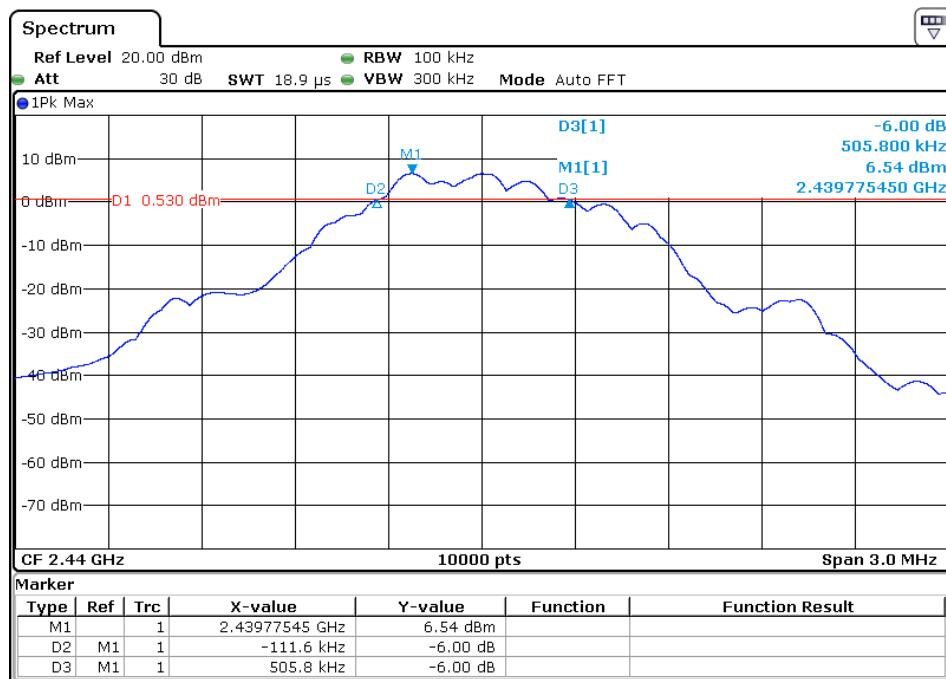

(1Mbps)
The High Channel 39: 2480MHz

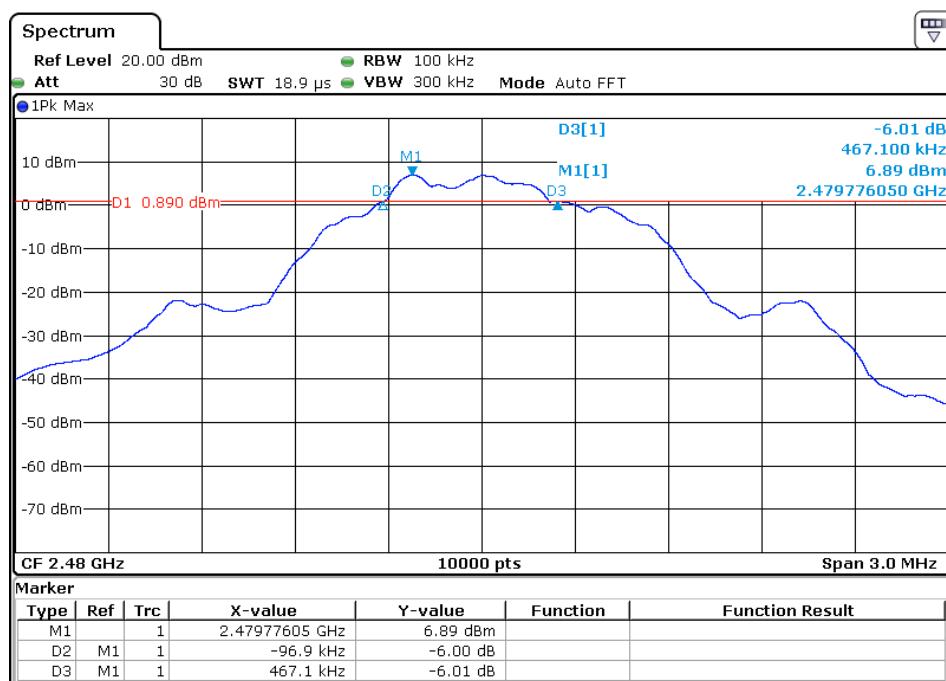



6.5 Peak Power Density

6.5.1 Applied procedures / Limit

15.247(a) (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

6.5.2 Test procedure

- a. The testing follows Measurement procedure 10.2 Method PKPSD of FCC KDB publication No. 558074 D01 DTS Meas. Guidance v04
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as center frequency to channel center frequency, span=1.5 times the bandwidth, detector = peak $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW} \geq 3 \times \text{RBW}$ kHz, Sweep time=Auto.
- d. Trace mode = max hold. Mark the peak.
- e. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.5.3 Deviation from standard

No deviation.




6.5.4 Test results

EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	24 °C	Relative Humidity :	53%
Pressure :	1010 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX(1Mbps)		


Test Mode	Channel frenqucy (MHz)	Power Density	Limit (dBm/3kHz)	Result
		PSD 3kHz (dBm/3kHz)		
TX (1Mbps)	2402	3.11	8	Pass
	2440	4.94	8	Pass
	2480	4.77	8	Pass

Note: The cable loss is 1.0dB


PSD 3kHz (1Mbps) The Lowest Channel 00: 2402MHz

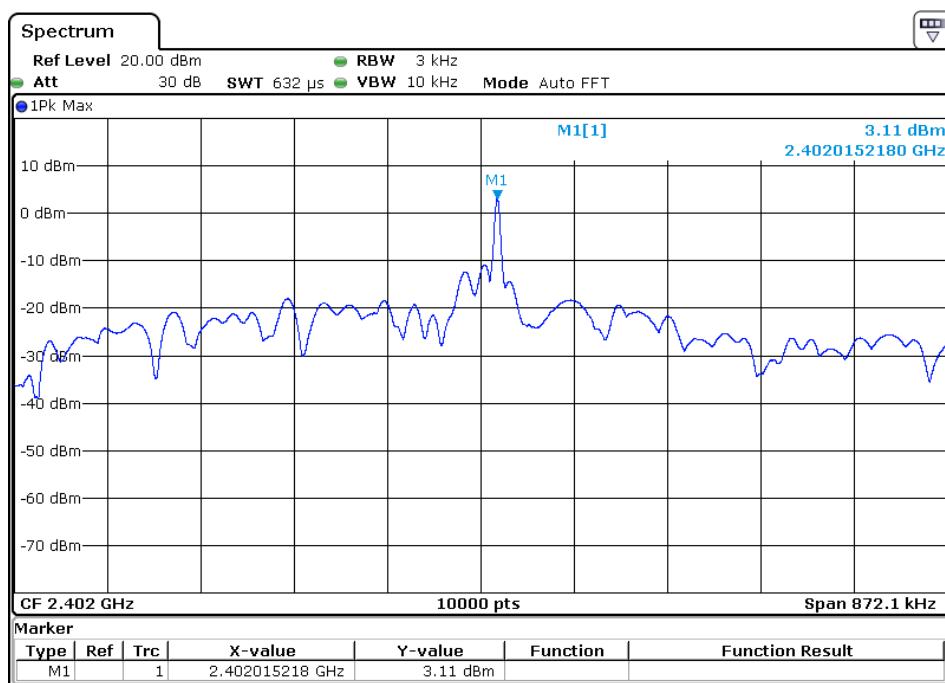

PSD 3kHz (1Mbps)
The Middle Channel 19: 2440MHz

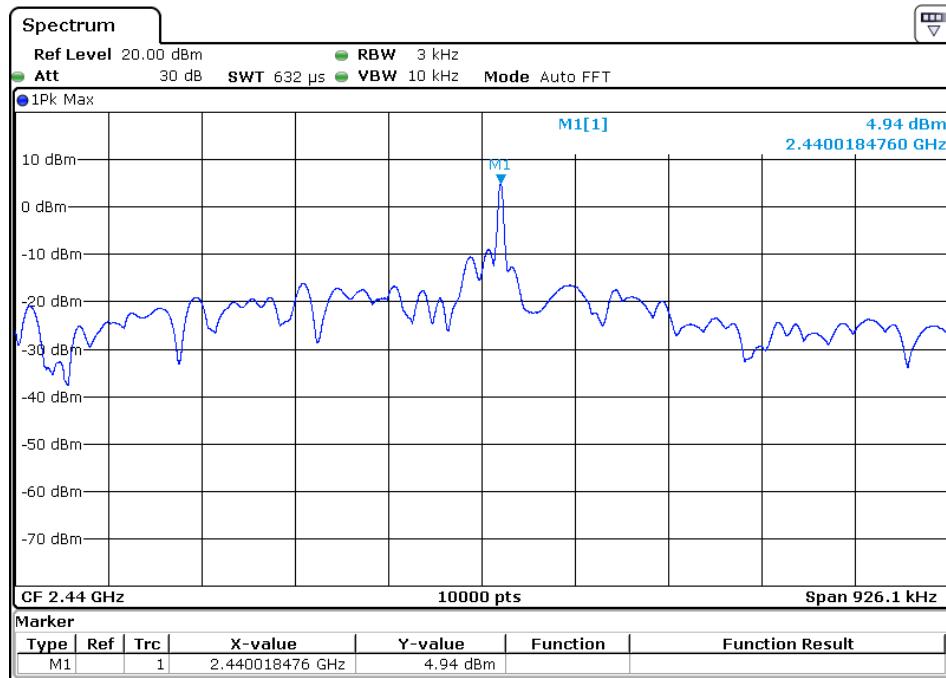

PSD 3kHz (1Mbps)
The High Channel 39: 2480MHz

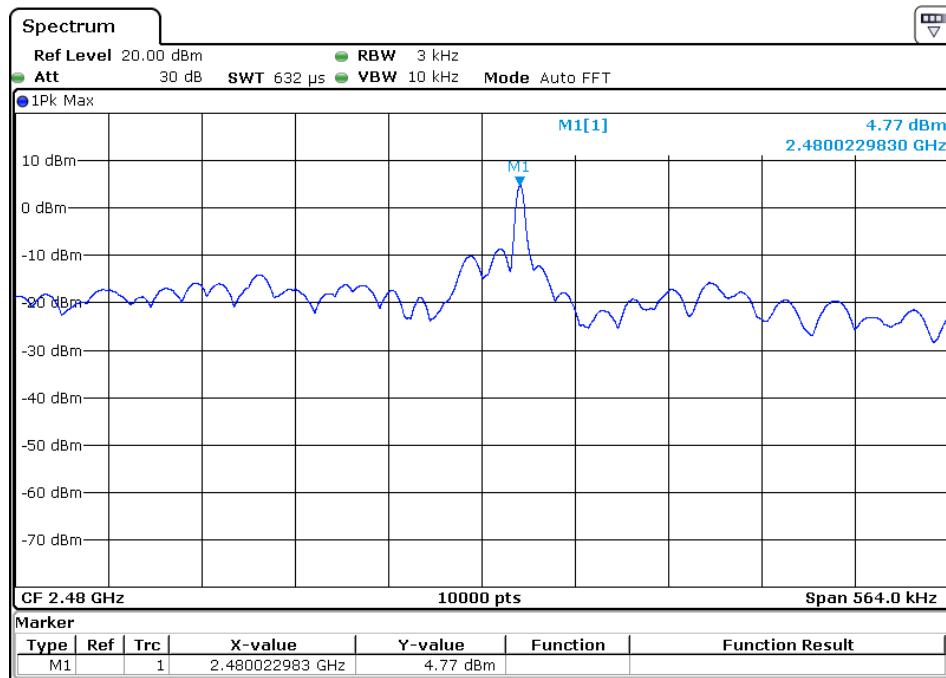

6.6 Maximum Peak Output Power

6.6.1 Applied procedures / Limit

15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

6.6.2 Test procedure

- a. The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v04
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Spectrum Setting: $RBW \geq \text{Bandwidth}$, $VBW \geq 3 \times RBW$, Sweep time = Auto, Span $\geq 3 \times RBW$,
- d. Detector = peak. Trace mode = max hold.
- e. Use peak marker function to determine the peak amplitude level.

6.6.3 Deviation from standard

No deviation.

6.6.4 Test setup






6.6.5 Test results

EUT :	Wine Refrigerator and Dispenser	Model Name :	PLUM01
Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (1Mbps)		
Note: N/A			


Test Mode	Frequency	Peak Output Power (dBm)	Limit (dBm)	Result
Data rate 1Mbps	2402 MHz	4.88	30	Pass
	2440 MHz	7.03	30	Pass
	2480 MHz	7.43	30	Pass

(1Mbps)
The Lowest Channel 00: 2402MHz

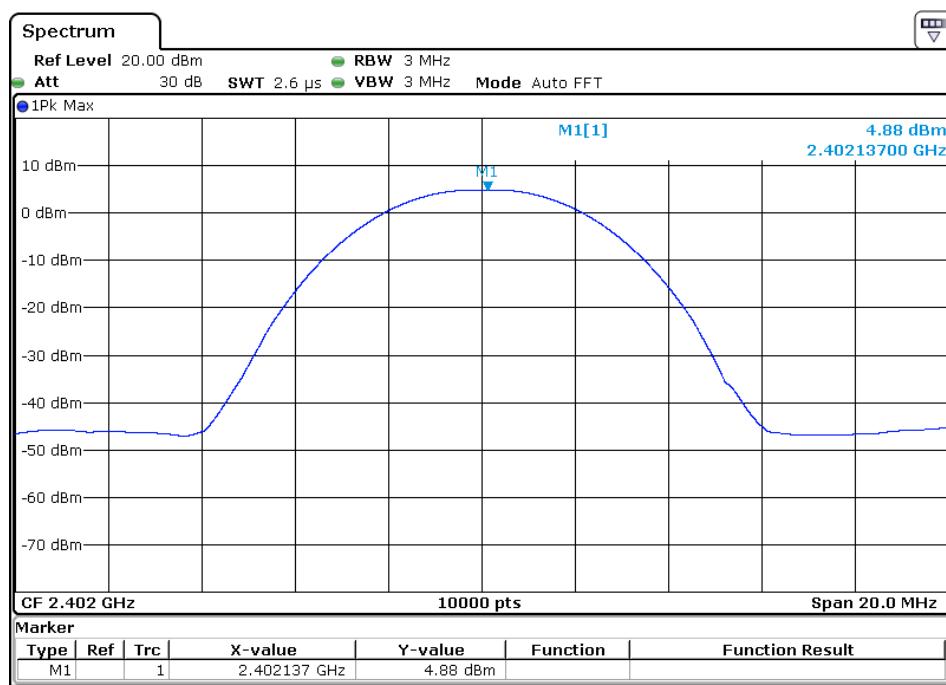


(1Mbps)

The Middle Channel 19: 2440MHz

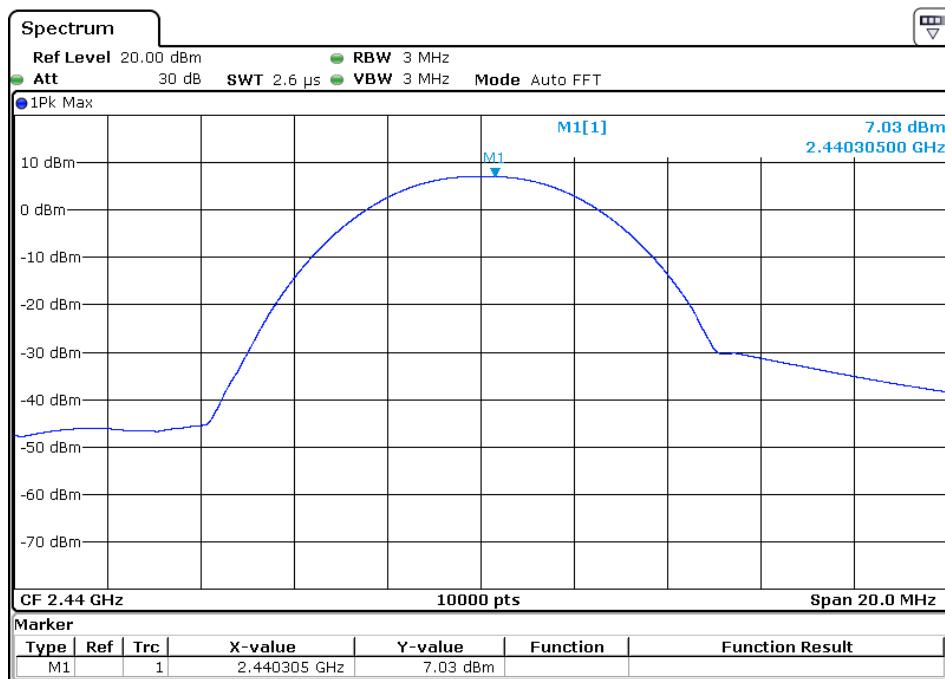

(1Mbps)

The High Channel 39: 2480MHz

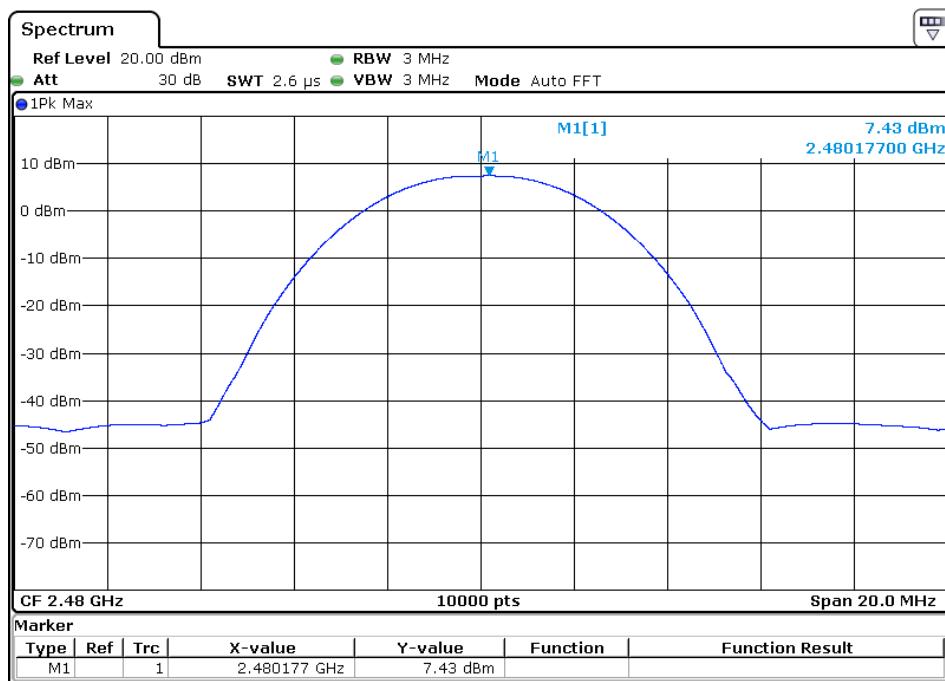

6.7 Band edge

6.7.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.7.2 Test procedure

- a. The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v04
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Spectrum Setting: RBW=100kHz, VBW \geq 300kHz, Sweep time=Auto, Detector Function=Peak.
- d. The band edges was measured and recorded Result:
The Lower Edges attenuated more than 20dB.
The Upper Edges attenuated more than 20dB.

6.7.3 Deviation from standard


No deviation.

6.7.4 Test setup




6.7.5 Test results

(1Mbps) The Lowest Channel 00: 2402MHz

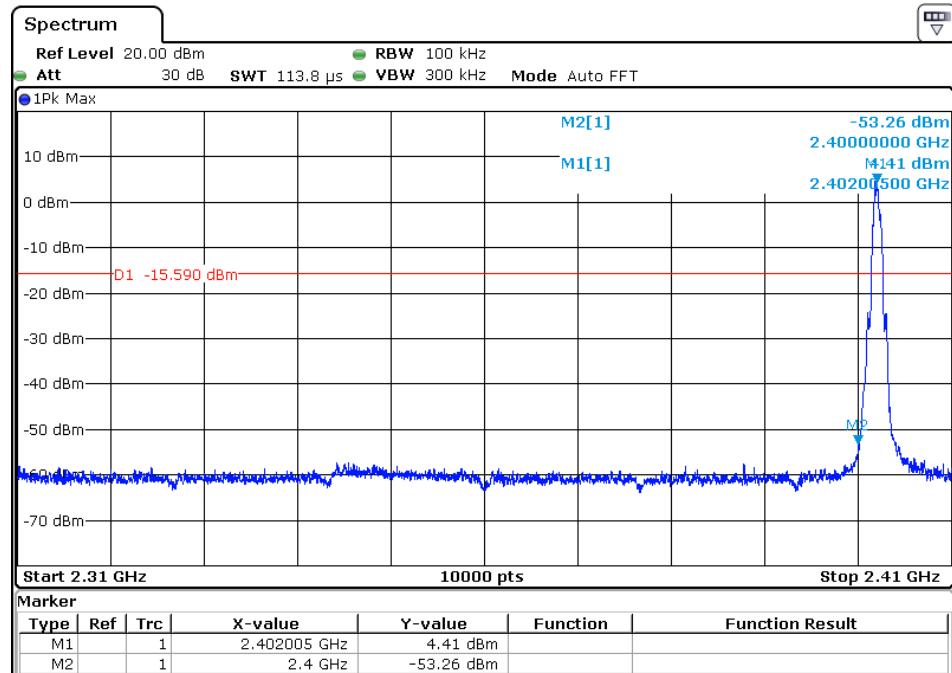

(1Mbps) The High Channel 39: 2480MHz

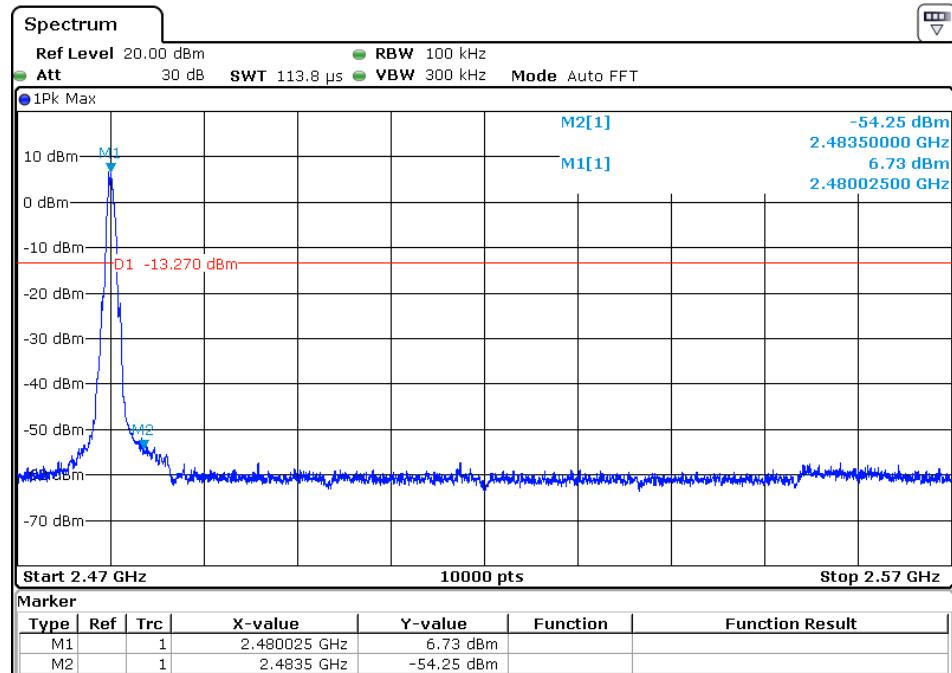

6.8 Conducted Spurious Emissions

6.8.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


6.8.2 Test procedure

- a. The testing follows FCC KDB publication No. 558074 D01 DTS Meas. Guidance v04
- b. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- c. Spectrum Setting: RBW=100kHz, VBW=300kHz, Sweep time=Auto, Detector Function=Peak, sweep points \geq investigated frequency range/RBW.

6.8.3 Deviation from standard



No deviation.



6.8.4 Test setup

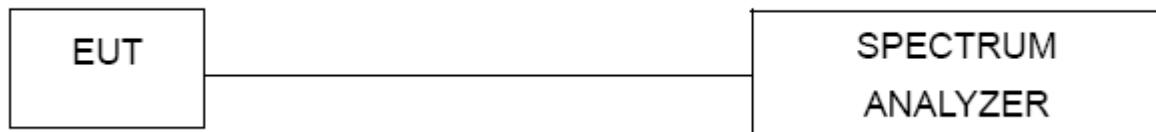



6.8.5 Test results



The Lowest Channel 00 (1Mbps): 2402MHz

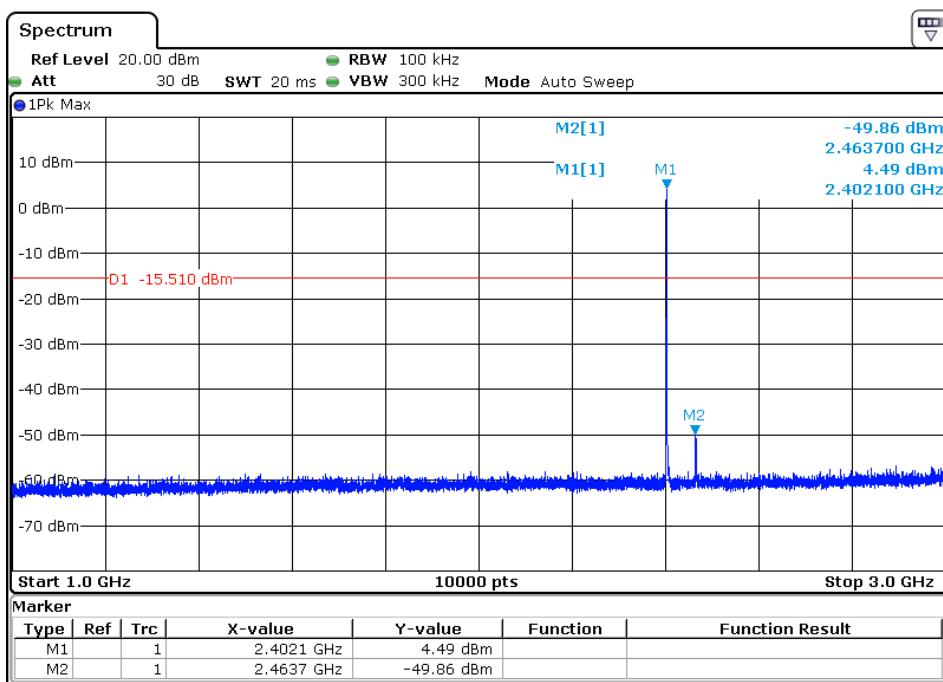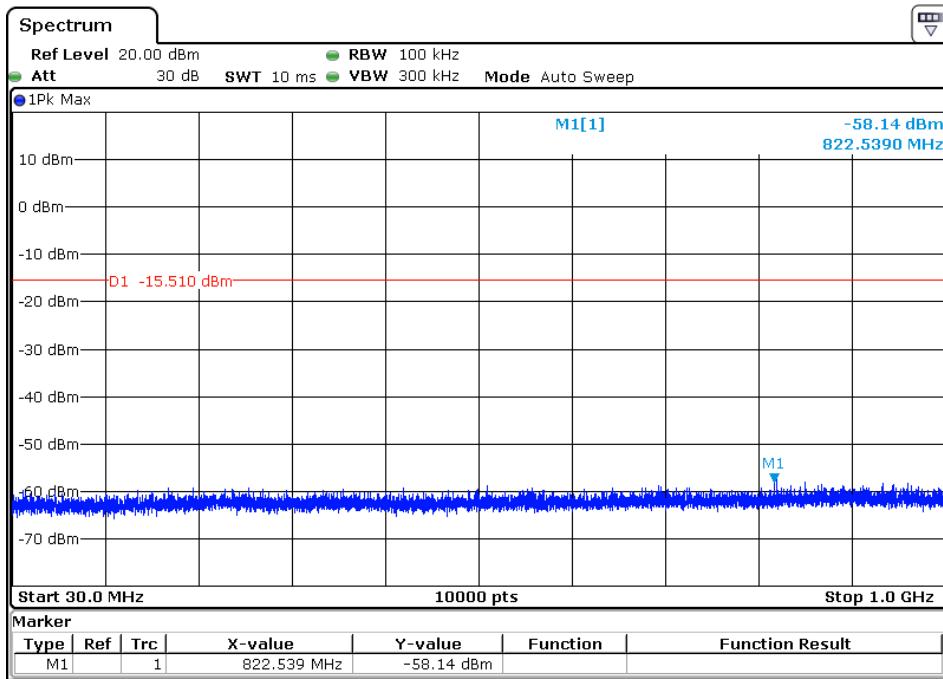

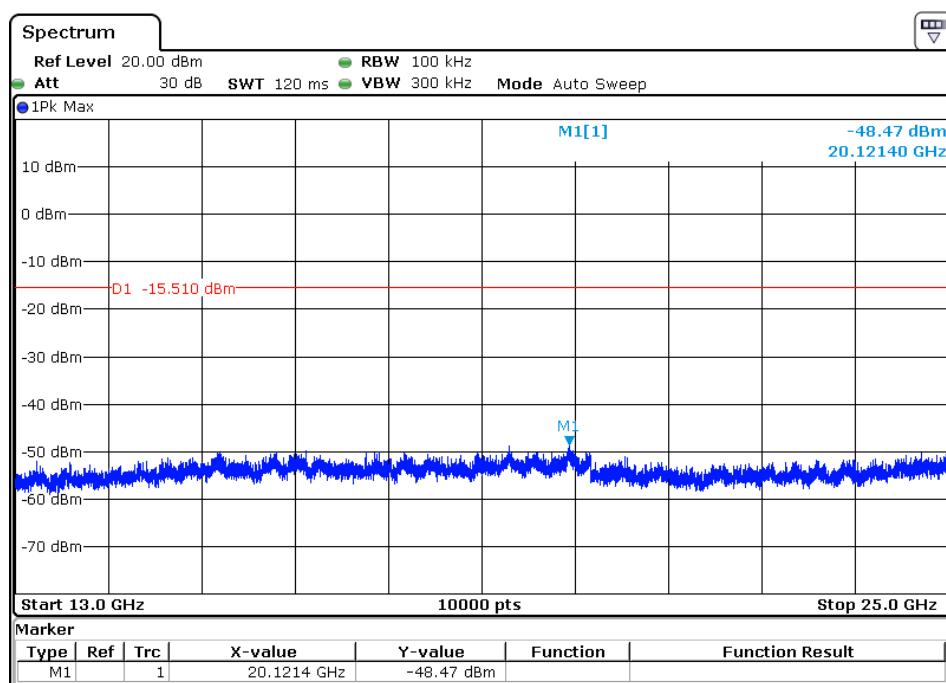
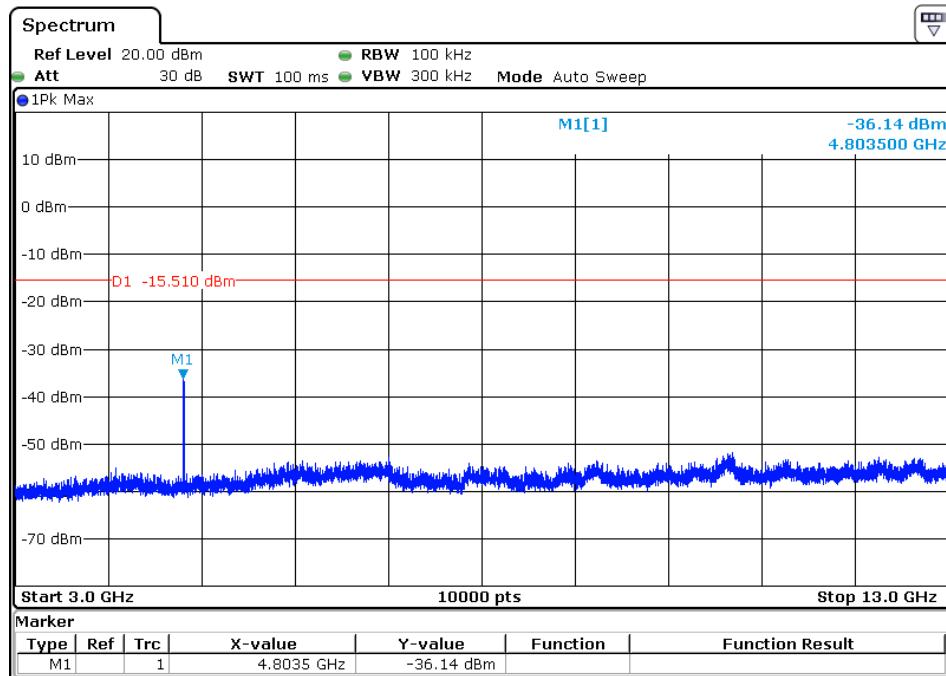




The Middle Channel 19(1Mbps): 2440MHz

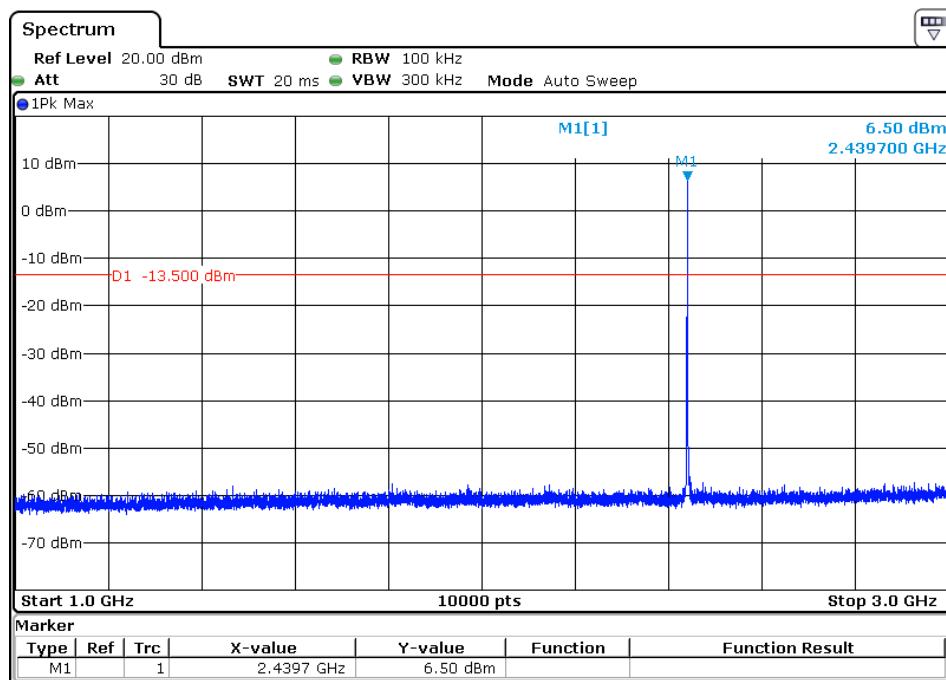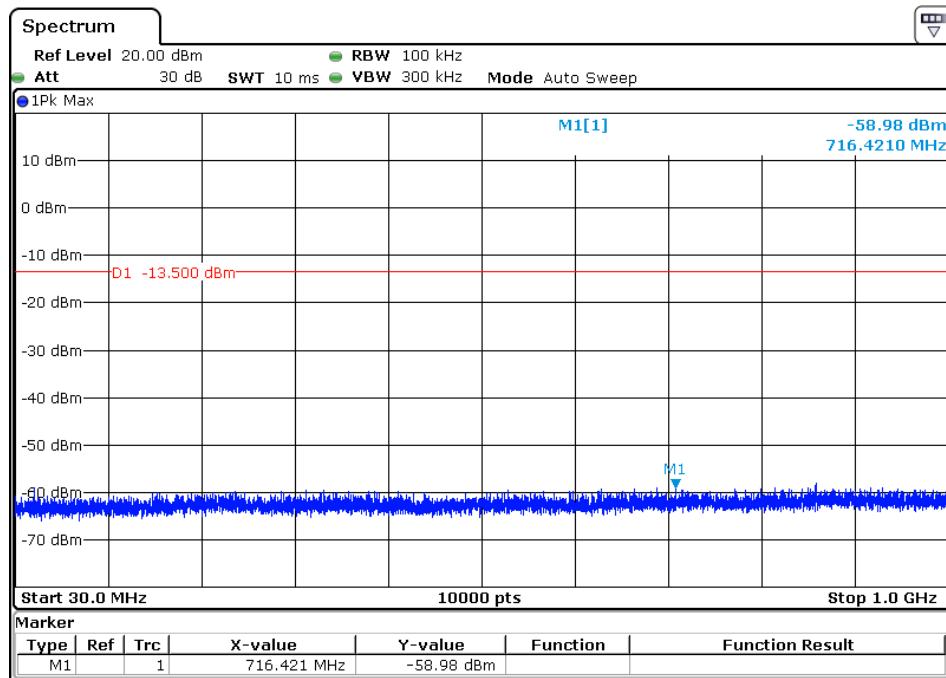

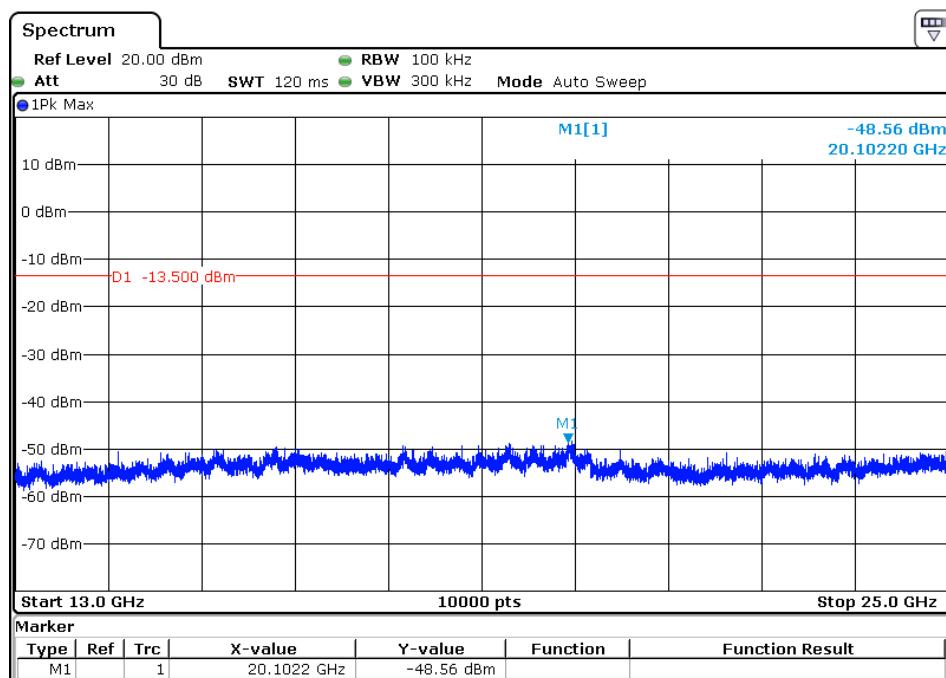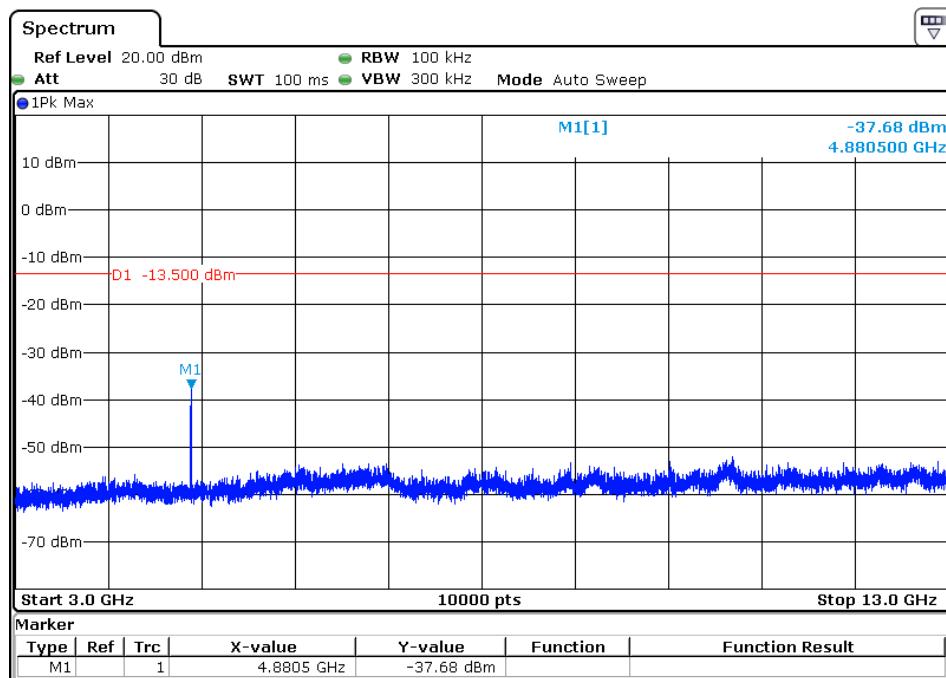

The High Channel 39(1Mbps): 2480MHz

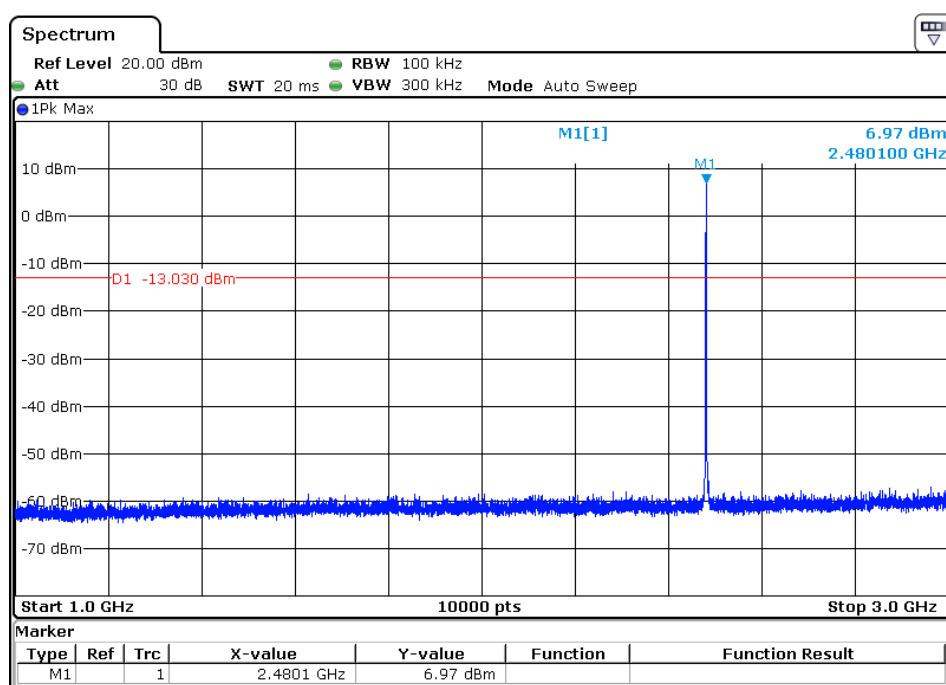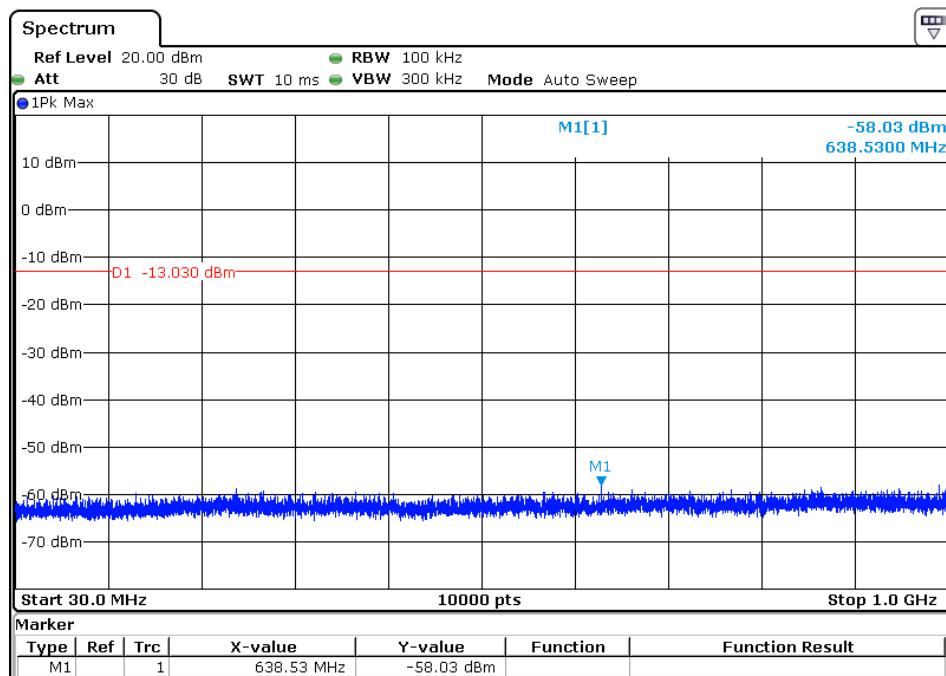

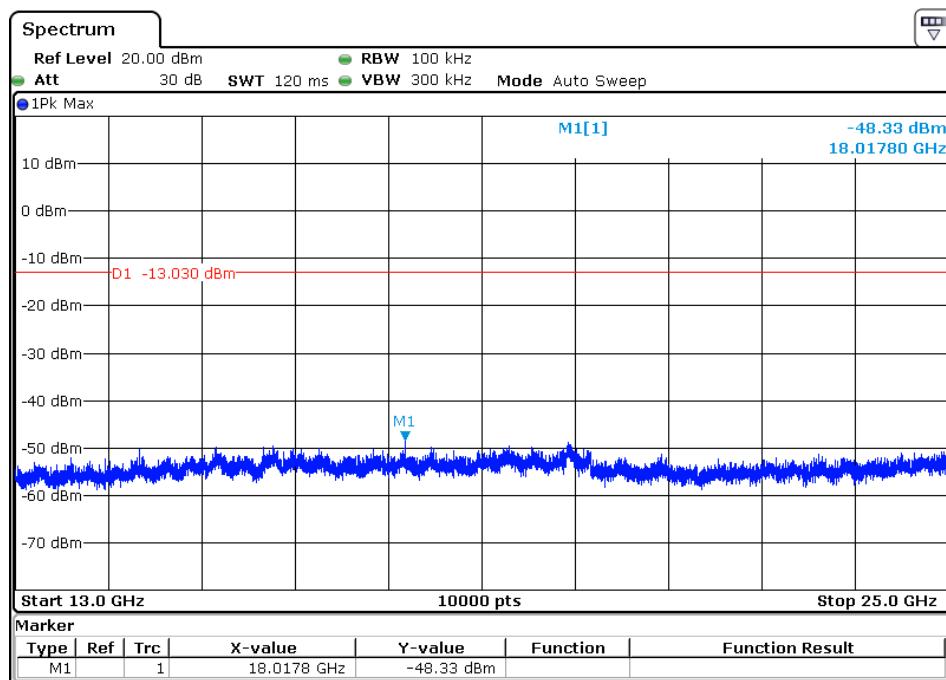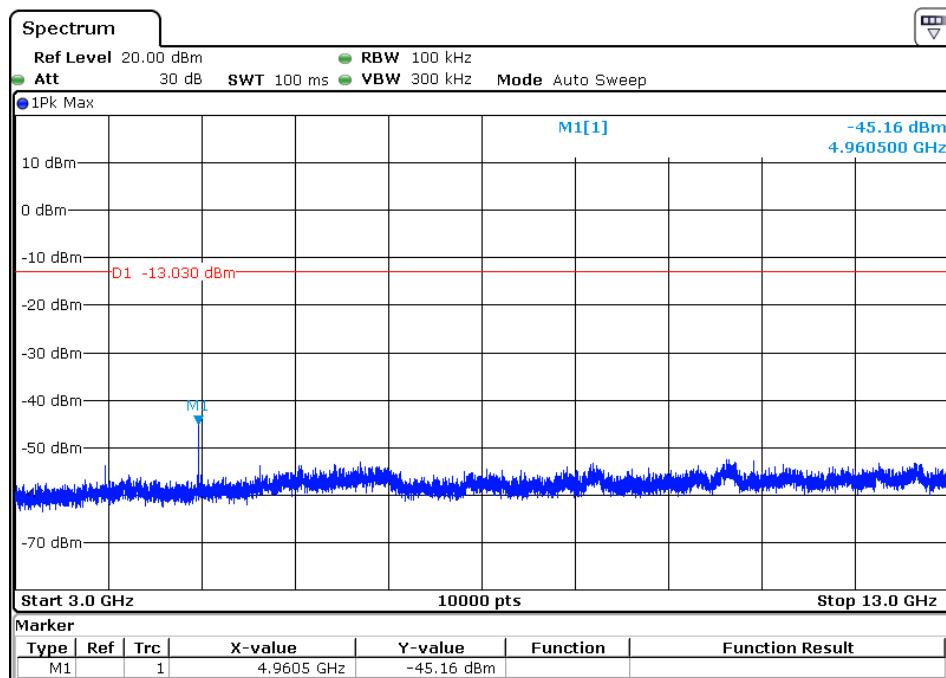

7 Photographs

7.1 Radiated Emission Test Setup

Below 1G



Above 1G



7.2 Conducted Emissions Test Setup





Report No.: 4787933990-F1-00-2

Issued Date: 2017-06-21

7.3 EUT Constructional Details

Please refer to report 4787933990-F1-00-1.

****End of report****