

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Motocaddy Ltd.

S5 Connect Distance Module
Model No.: MCFX-14-S5DM

FCC ID: 2AMH4-MCFX14S5DM

Prepared for : Motocaddy Ltd.
Address : Units 15 to 18, Stansted Distribution Centre, Start Hill
Great Hallingbury, Hertfordshire, CM22 7DG, United
Kingdom

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan
Rd. Science & Industry Park, Nan Shan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20171073
Date of Test : June 28-30, 2017
Date of Report : July 5, 2017

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Power Line Conducted Emission Measurement Results	13
6. 6DB BANDWIDTH MEASUREMENT	19
6.1. Block Diagram of Test Setup.....	19
6.2. The Requirement For Section 15.247(a)(2).....	19
6.3. EUT Configuration on Measurement	19
6.4. Operating Condition of EUT	19
6.5. Test Procedure	19
6.6. Test Result	20
7. MAXIMUM PEAK OUTPUT POWER	22
7.1. Block Diagram of Test Setup.....	22
7.2. The Requirement For Section 15.247(b)(3).....	22
7.3. EUT Configuration on Measurement	22
7.4. Operating Condition of EUT	22
7.5. Test Procedure	22
7.6. Test Result	23
8. POWER SPECTRAL DENSITY MEASUREMENT	25
8.1. Block Diagram of Test Setup.....	25
8.2. The Requirement For Section 15.247(e).....	25
8.3. EUT Configuration on Measurement	25
8.4. Operating Condition of EUT	25
8.5. Test Procedure	26
8.6. Test Result	27
9. BAND EDGE COMPLIANCE TEST	29
9.1. Block Diagram of Test Setup.....	29
9.2. The Requirement For Section 15.247(d)	29

9.3.	EUT Configuration on Measurement	29
9.4.	Operating Condition of EUT	30
9.5.	Test Procedure	30
9.6.	Test Result	30
10.	RADIATED SPURIOUS EMISSION TEST	37
10.1.	Block Diagram of Test Setup.....	37
10.2.	The Limit For Section 15.247(d)	38
10.3.	Restricted bands of operation	39
10.4.	Configuration of EUT on Measurement	39
10.5.	Operating Condition of EUT	39
10.6.	Test Procedure	40
10.7.	The Field Strength of Radiation Emission Measurement Results	40
11.	ANTENNA REQUIREMENT.....	53
11.1.	The Requirement	53
11.2.	Antenna Construction	53

Test Report Certification

Applicant : Motocaddy Ltd.
Manufacturer : Latitude Ltd.
EUT Description : S5 Connect Distance Module
(A) MODEL NO.: MCFX-14-S5DM
(B) TRADE NAME.: n.a.
(C) POWER SUPPLY: DC 5V

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

The EUT was tested according to DTS test procedure of KDB558074 D01 DTS Meas Guidance v03r03 June 2015 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : June 28-30, 2017

Date of Report : July 5, 2017

Prepared by :

Bob Wang

(Bob Wang, Engineer)

Approved & Authorized Signer :


(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	S5 Connect Distance Module
Model Number	:	MCFX-14-S5DM
Trade Mark	:	n.a.
Bluetooth version	:	Bluetooth V4.0 LE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	0dBi
Antenna type	:	Integral Antenna
Power Supply	:	DC 5V
Modulation mode	:	GFSK
Applicant	:	Motocaddy Ltd.
Address	:	Units 15 to 18, Stansted Distribution Centre, Start Hill Great Hallingbury, Hertfordshire, CM22 7DG, United Kingdom
Manufacturer	:	Latitude Ltd.
Address	:	7/F, Southeast Industrial Building, 611-619, Castle Peak Road, Tsuen Wan, N.T., Hong Kong
Date of sample received	:	June 26, 2017
Date of Test	:	June 28-30, 2017

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

Notebook PC : Manufacturer: LENOVO
M/N: 4290-RT8
S/N: R9-FW93G 11/08

1.4. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 7, 2017	Jan. 6, 2018
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 7, 2017	Jan. 6, 2018
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 7, 2017	Jan. 6, 2018
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 7, 2017	Jan. 6, 2018
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 13, 2017	Jan. 12, 2018
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 13, 2017	Jan. 12, 2018
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 13, 2017	Jan. 12, 2017
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 13, 2017	Jan. 12, 2018
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 7, 2017	Jan. 6, 2018
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 7, 2017	Jan. 6, 2018
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 7, 2017	Jan. 6, 2018
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 7, 2017	Jan. 6, 2018

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2.Configuration and peripherals

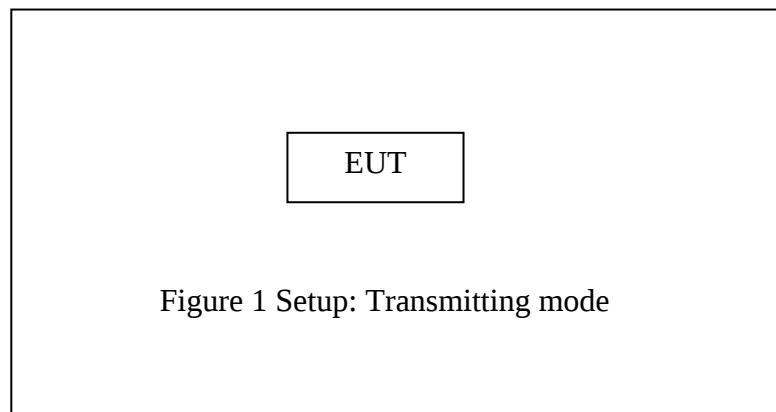


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. POWER LINE CONDUCTED MEASUREMENT

5.1. Block Diagram of Test Setup

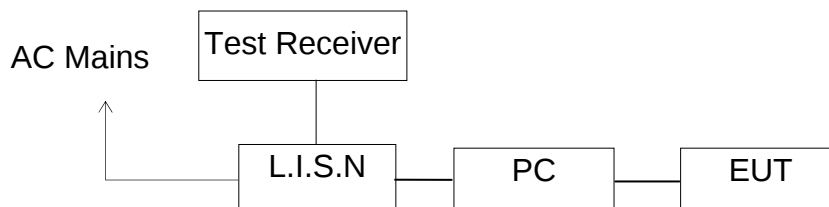

(EUT: S5 Connect Distance Module)

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0
NOTE1: The lower limit shall apply at the transition frequencies. NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

5.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2014 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : On AC 120V; 60Hz								
MEASUREMENT RESULT: "1073-1_fin"								
2017-7-3 8:56								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.168000	48.50	10.8	65	16.6	QP	L1	GND	
0.496000	37.40	11.0	56	18.7	QP	L1	GND	
1.906000	31.70	11.3	56	24.3	QP	L1	GND	
3.870000	30.50	11.4	56	25.5	QP	L1	GND	
5.205000	26.00	11.4	60	34.0	QP	L1	GND	
23.680000	27.80	11.7	60	32.2	QP	L1	GND	
MEASUREMENT RESULT: "1073-1_fin2"								
2017-7-3 8:56								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.168000	37.10	10.8	55	18.0	AV	L1	GND	
0.504000	33.10	11.0	46	12.9	AV	L1	GND	
1.962000	28.20	11.3	46	17.8	AV	L1	GND	
2.420000	26.70	11.3	46	19.3	AV	L1	GND	
5.180000	20.90	11.4	50	29.1	AV	L1	GND	
23.320000	17.60	11.7	50	32.4	AV	L1	GND	
MEASUREMENT RESULT: "1073-2_fin"								
2017-7-3 9:00								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.158000	50.80	10.8	66	14.8	QP	N	GND	
0.508000	37.80	11.0	56	18.2	QP	N	GND	
1.986000	30.60	11.3	56	25.4	QP	N	GND	
4.085000	31.20	11.4	56	24.8	QP	N	GND	
7.135000	20.20	11.5	60	39.8	QP	N	GND	
23.020000	29.20	11.7	60	30.8	QP	N	GND	
MEASUREMENT RESULT: "1073-2_fin2"								
2017-7-3 9:00								
Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE	
0.158000	34.70	10.8	56	20.9	AV	N	GND	
0.508000	31.80	11.0	46	14.2	AV	N	GND	
1.914000	22.90	11.3	46	23.1	AV	N	GND	
4.015000	22.60	11.4	46	23.4	AV	N	GND	
6.540000	14.10	11.5	50	35.9	AV	N	GND	
21.925000	19.10	11.7	50	30.9	AV	N	GND	

Test mode : On

AC 240V; 60Hz

MEASUREMENT RESULT: "FC-0418-04_fin"

2017-7-3 8:39AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	50.90	10.5	66	14.8	QP	L1	GND
0.505000	37.80	10.7	56	18.2	QP	L1	GND
1.835000	28.80	11.0	56	27.2	QP	L1	GND
2.670000	27.80	11.0	56	28.2	QP	L1	GND
5.310000	20.10	11.2	60	39.9	QP	L1	GND
26.080000	25.80	11.5	60	34.2	QP	L1	GND

MEASUREMENT RESULT: "FC-0418-04_fin2"

2017-7-3 8:39AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	35.80	10.5	56	19.9	AV	L1	GND
0.505000	34.70	10.7	46	11.3	AV	L1	GND
2.050000	27.80	11.0	46	18.2	AV	L1	GND
2.370000	22.50	11.0	46	23.5	AV	L1	GND
6.290000	15.80	11.2	50	34.2	AV	L1	GND
25.840000	20.70	11.5	50	29.3	AV	L1	GND

MEASUREMENT RESULT: "FC-0418-03_fin"

2017-7-3 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.175000	48.70	10.5	65	16.0	QP	N	GND
0.505000	38.10	10.7	56	17.9	QP	N	GND
1.825000	28.30	11.0	56	27.7	QP	N	GND
2.170000	30.40	11.0	56	25.6	QP	N	GND
5.140000	21.80	11.2	60	38.2	QP	N	GND
28.120000	26.50	11.5	60	33.5	QP	N	GND

MEASUREMENT RESULT: "FC-0418-03_fin2"

2017-7-3 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	36.70	10.5	56	19.0	AV	N	GND
0.505000	34.90	10.7	46	11.1	AV	N	GND
2.030000	28.50	11.0	46	17.5	AV	N	GND
2.150000	26.00	11.0	46	20.0	AV	N	GND
6.450000	17.30	11.2	50	32.7	AV	N	GND
23.995000	22.70	11.5	50	27.3	AV	N	GND

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: S5 Connect Distance Module M/N:MCFX-14-S5DM
 Manufacturer: Latitude Ltd.
 Operating Condition: On
 Test Site: 1#Shielding Room
 Operator: Frank
 Test Specification: L 120V/60Hz
 Comment: Report NO.: ATE20171073
 Start of Test: 2017-7-3 / 8:55:26

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

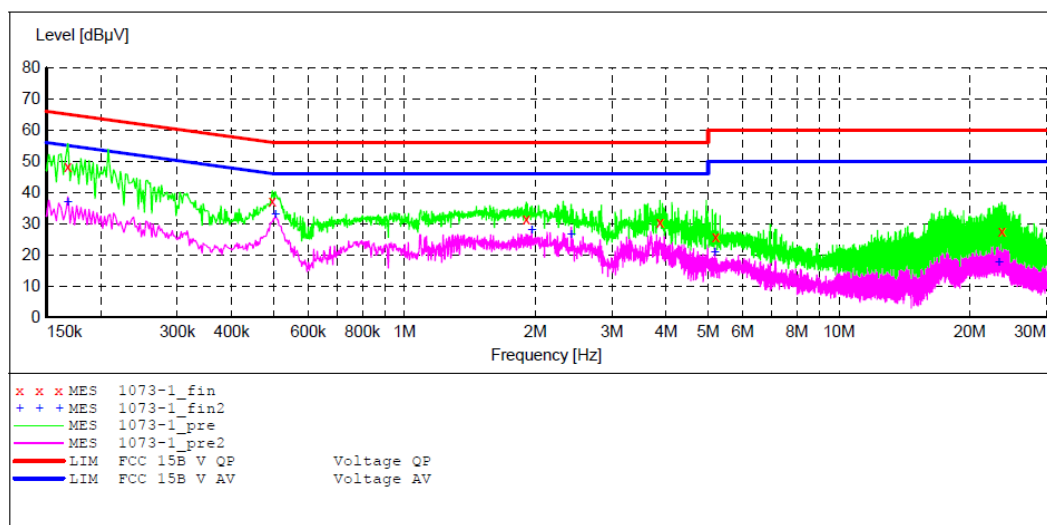

MEASUREMENT RESULT: "1073-1_fin"

2017-7-3 8:56

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	48.50	10.8	65	16.6	QP	L1	GND
0.496000	37.40	11.0	56	18.7	QP	L1	GND
1.906000	31.70	11.3	56	24.3	QP	L1	GND
3.870000	30.50	11.4	56	25.5	QP	L1	GND
5.205000	26.00	11.4	60	34.0	QP	L1	GND
23.680000	27.80	11.7	60	32.2	QP	L1	GND

MEASUREMENT RESULT: "1073-1_fin2"

2017-7-3 8:56

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	37.10	10.8	55	18.0	AV	L1	GND
0.504000	33.10	11.0	46	12.9	AV	L1	GND
1.962000	28.20	11.3	46	17.8	AV	L1	GND
2.420000	26.70	11.3	46	19.3	AV	L1	GND
5.180000	20.90	11.4	50	29.1	AV	L1	GND
23.320000	17.60	11.7	50	32.4	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B


EUT: S5 Connect Distance Module M/N:MCFX-14-S5DM
 Manufacturer: Latitude Ltd.
 Operating Condition: On
 Test Site: 1#Shielding Room
 Operator: Frank
 Test Specification: N 120V/60Hz
 Comment: Report NO.: ATE20171073
 Start of Test: 2017-7-3 / 8:59:30

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008

Average

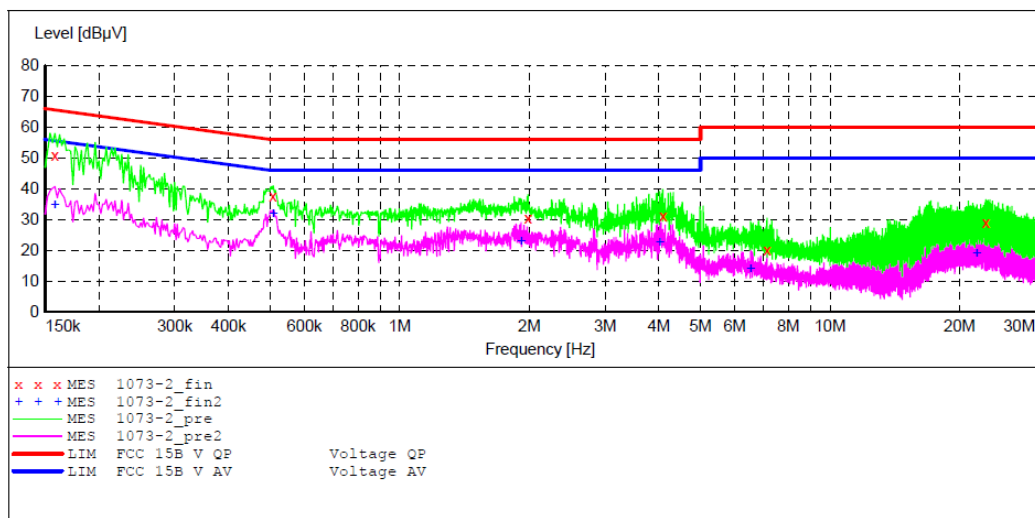

MEASUREMENT RESULT: "1073-2_fin"

2017-7-3 9:00

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	50.80	10.8	66	14.8	QP	N	GND
0.508000	37.80	11.0	56	18.2	QP	N	GND
1.986000	30.60	11.3	56	25.4	QP	N	GND
4.085000	31.20	11.4	56	24.8	QP	N	GND
7.135000	20.20	11.5	60	39.8	QP	N	GND
23.020000	29.20	11.7	60	30.8	QP	N	GND

MEASUREMENT RESULT: "1073-2_fin2"

2017-7-3 9:00

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.158000	34.70	10.8	56	20.9	AV	N	GND
0.508000	31.80	11.0	46	14.2	AV	N	GND
1.914000	22.90	11.3	46	23.1	AV	N	GND
4.015000	22.60	11.4	46	23.4	AV	N	GND
6.540000	14.10	11.5	50	35.9	AV	N	GND
21.925000	19.10	11.7	50	30.9	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: S5 Connect Distance Module M/N:MCFX-14-S5DM
 Manufacturer: Latitude Ltd.
 Operating Condition: On
 Test Site: 1#Shielding Room
 Operator: DING
 Test Specification: L 240V/60Hz
 Comment: Report NO.:ATE20171073
 Start of Test: 2017-7-3 / 8:36:34AM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

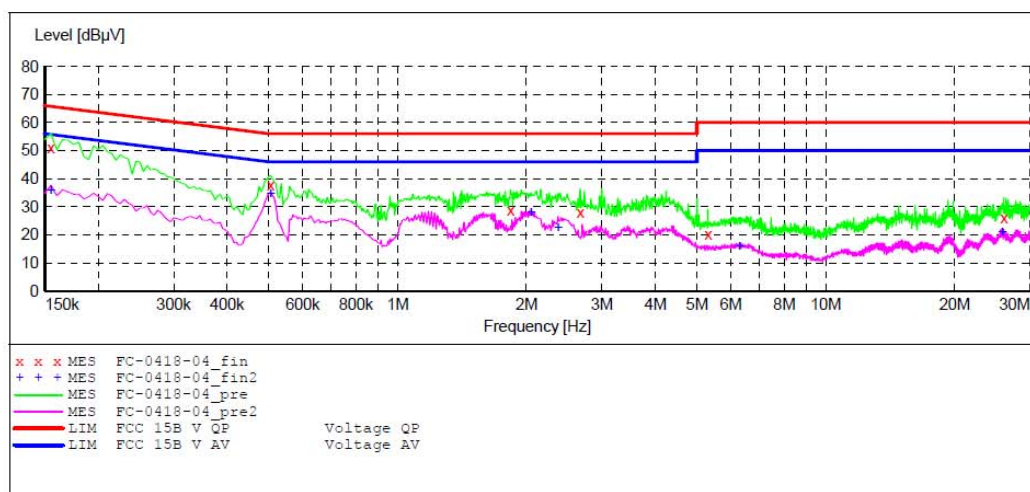

MEASUREMENT RESULT: "FC-0418-04_fin"

2017-7-3 8:39AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	50.90	10.5	66	14.8	QP	L1	GND
0.505000	37.80	10.7	56	18.2	QP	L1	GND
1.835000	28.80	11.0	56	27.2	QP	L1	GND
2.670000	27.80	11.0	56	28.2	QP	L1	GND
5.310000	20.10	11.2	60	39.9	QP	L1	GND
26.080000	25.80	11.5	60	34.2	QP	L1	GND

MEASUREMENT RESULT: "FC-0418-04_fin2"

2017-7-3 8:39AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	35.80	10.5	56	19.9	AV	L1	GND
0.505000	34.70	10.7	46	11.3	AV	L1	GND
2.050000	27.80	11.0	46	18.2	AV	L1	GND
2.370000	22.50	11.0	46	23.5	AV	L1	GND
6.290000	15.80	11.2	50	34.2	AV	L1	GND
25.840000	20.70	11.5	50	29.3	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: S5 Connect Distance Module M/N:MCFX-14-S5DM
 Manufacturer: Latitude Ltd.
 Operating Condition: On
 Test Site: 1#Shielding Room
 Operator: DING
 Test Specification: N 240V/60Hz
 Comment: Report NO.:ATE20171073
 Start of Test: 2017-7-3 / 5:42:14PM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

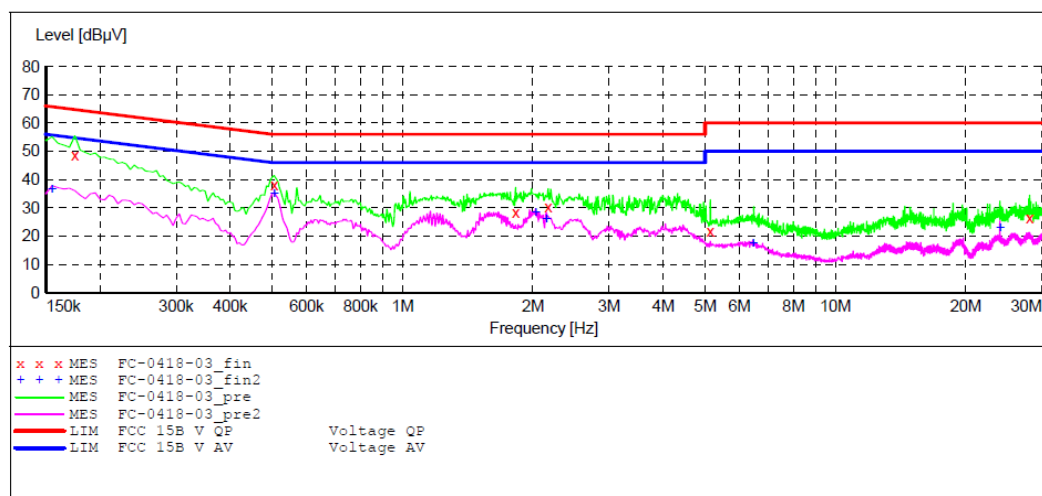

MEASUREMENT RESULT: "FC-0418-03_fin"

2017-7-3 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.175000	48.70	10.5	65	16.0	QP	N	GND
0.505000	38.10	10.7	56	17.9	QP	N	GND
1.825000	28.30	11.0	56	27.7	QP	N	GND
2.170000	30.40	11.0	56	25.6	QP	N	GND
5.140000	21.80	11.2	60	38.2	QP	N	GND
28.120000	26.50	11.5	60	33.5	QP	N	GND

MEASUREMENT RESULT: "FC-0418-03_fin2"

2017-7-3 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	36.70	10.5	56	19.0	AV	N	GND
0.505000	34.90	10.7	46	11.1	AV	N	GND
2.030000	28.50	11.0	46	17.5	AV	N	GND
2.150000	26.00	11.0	46	20.0	AV	N	GND
6.450000	17.30	11.2	50	32.7	AV	N	GND
23.995000	22.70	11.5	50	27.3	AV	N	GND

6. 6DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: S5 Connect Distance Module)

6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 5.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.


6.5. Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


20dB bandwidth

1. Set resolution bandwidth (RBW) = 1%-5% OBW.

channel 19

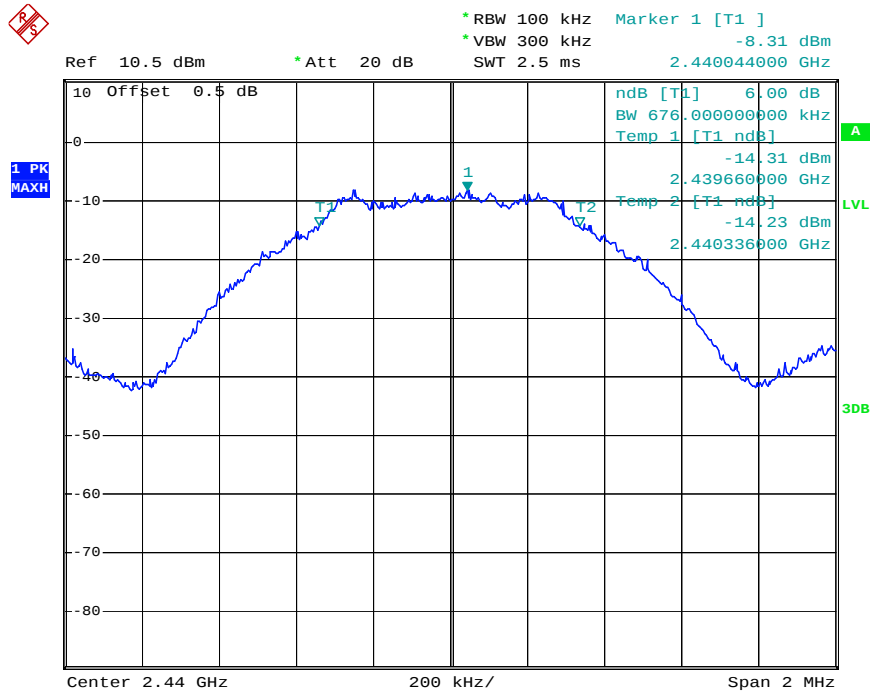

channel 39

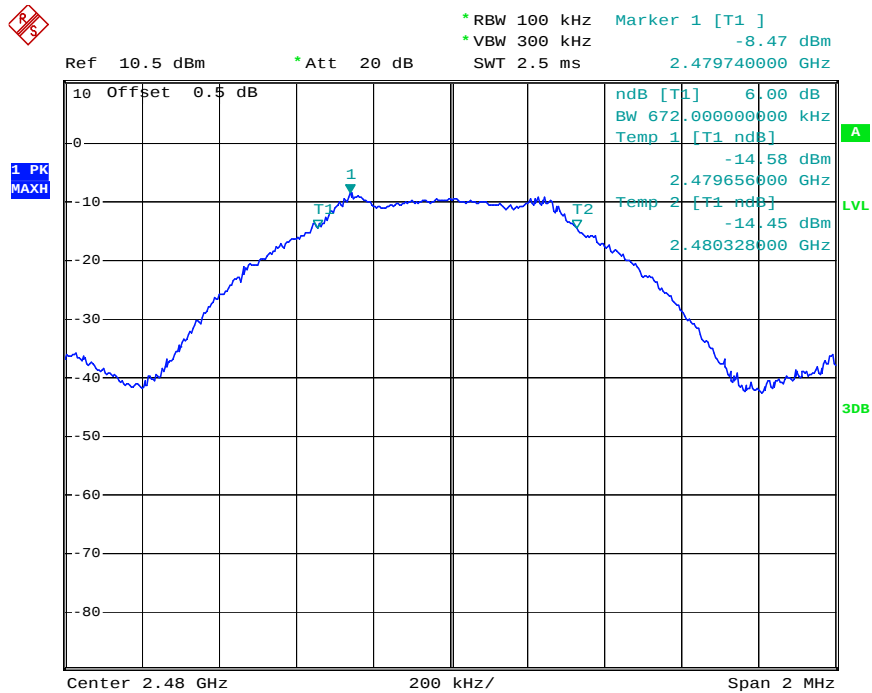

7. MAXIMUM PEAK OUTPUT POWER

7.1. Block Diagram of Test Setup



(EUT: S5 Connect Distance Module)

7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 6.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.


7.5.3. Measurement the maximum peak output power.

7.6.Test Result


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-7.59	30	PASS
19	2440	-7.58	30	PASS
39	2480	-7.63	30	PASS

The spectrum analyzer plots are attached as below.


channel 0

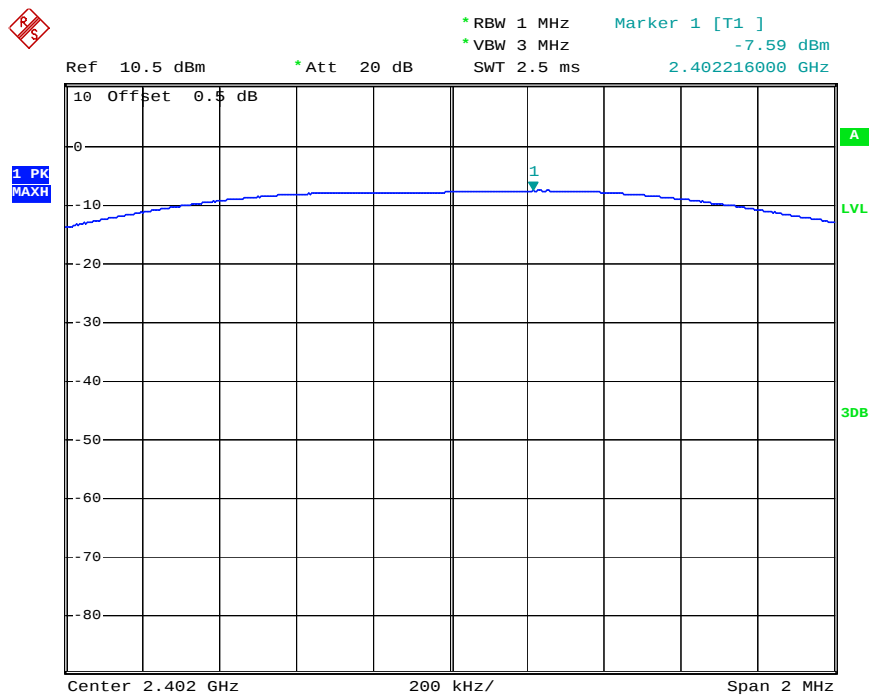

channel 19

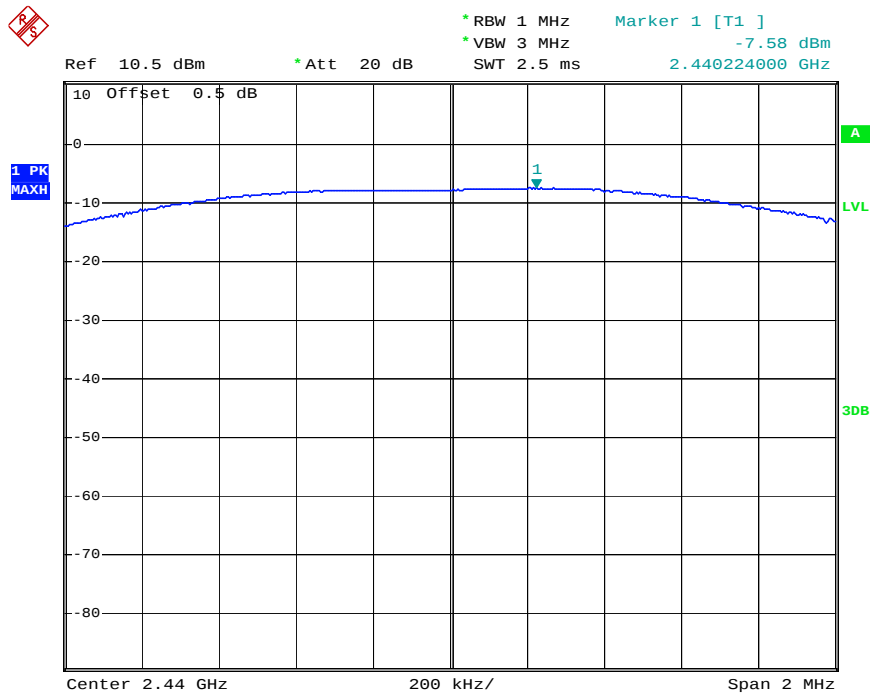

channel 39

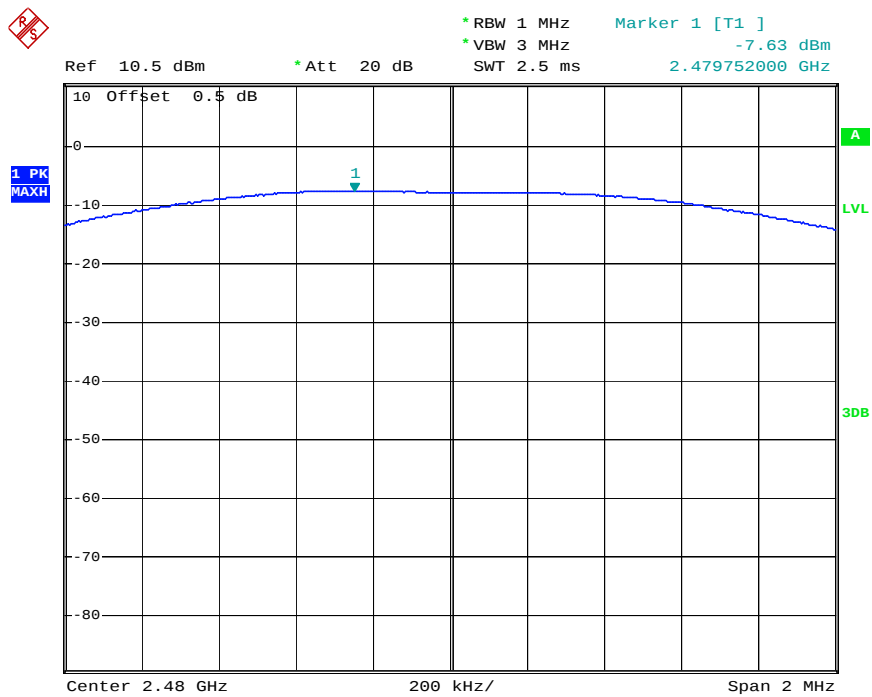

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup



(EUT: S5 Connect Distance Module)

8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 7.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Measurement Procedure PKPSD:

8.5.3. This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.5.4. Measurement the maximum power spectral density.

8.6.Test Result


CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-20.08	8	PASS
19	2440	-20.10	8	PASS
39	2480	-20.37	8	PASS

The spectrum analyzer plots are attached as below.


channel 0

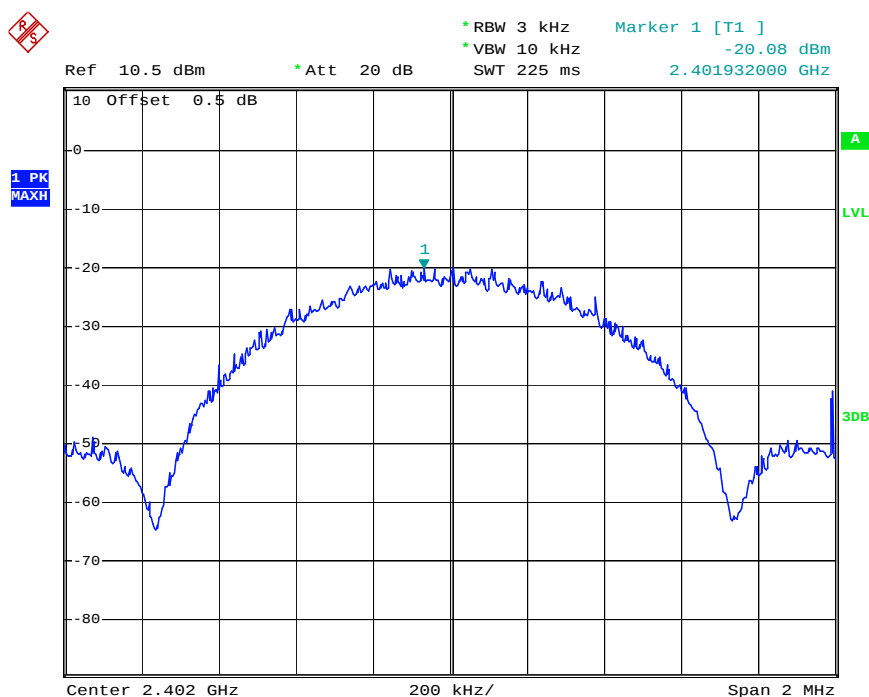

channel 19

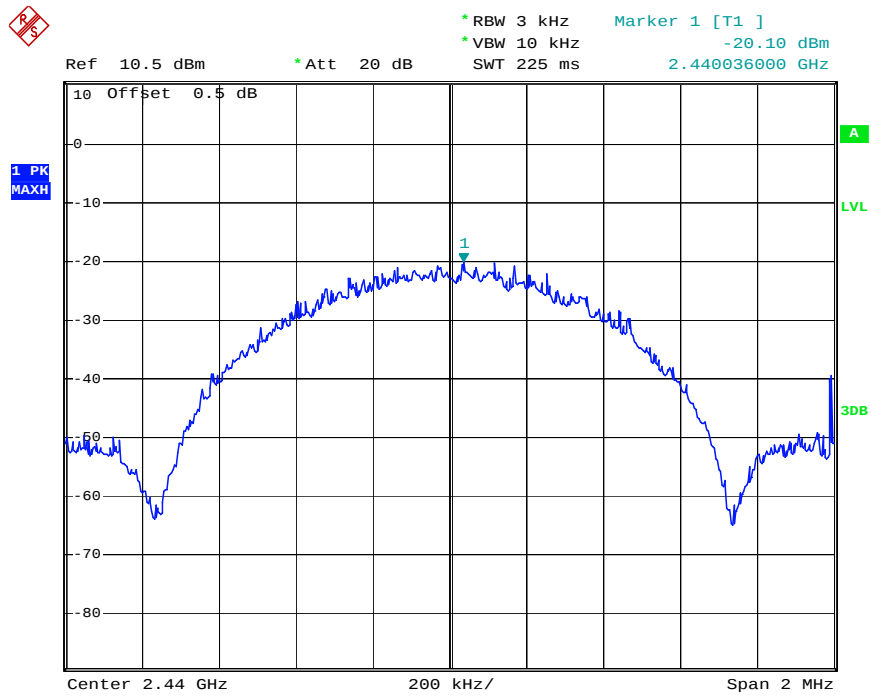

channel 39

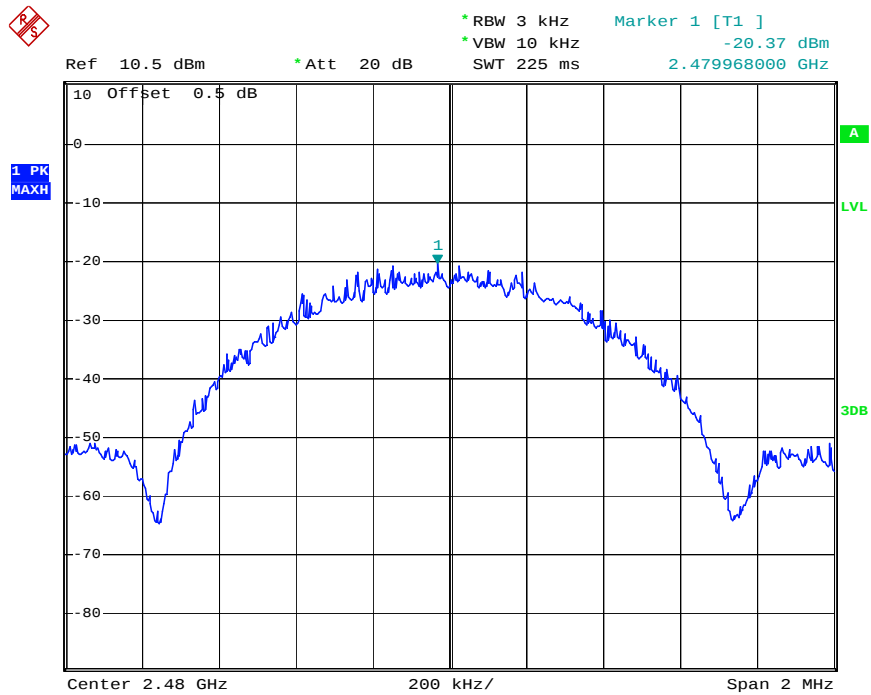

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup



(EUT: S5 Connect Distance Module)

9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.Operating Condition of EUT

9.4.1.Setup the EUT and simulator as shown as Section 8.1.

9.4.2.Turn on the power of all equipment.

9.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

9.5.Test Procedure

Conducted Band Edge:

9.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

9.5.3. Radiate Band Edge:

9.5.4.The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

9.5.5.The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.6.EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.7.Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.8.RBW=1MHz, VBW=1MHz


9.5.9.The band edges was measured and recorded.

9.6.Test Result


Pass

Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2.4GHz	22.21	20
39	2.4835GHz	36.03	20

channel 0

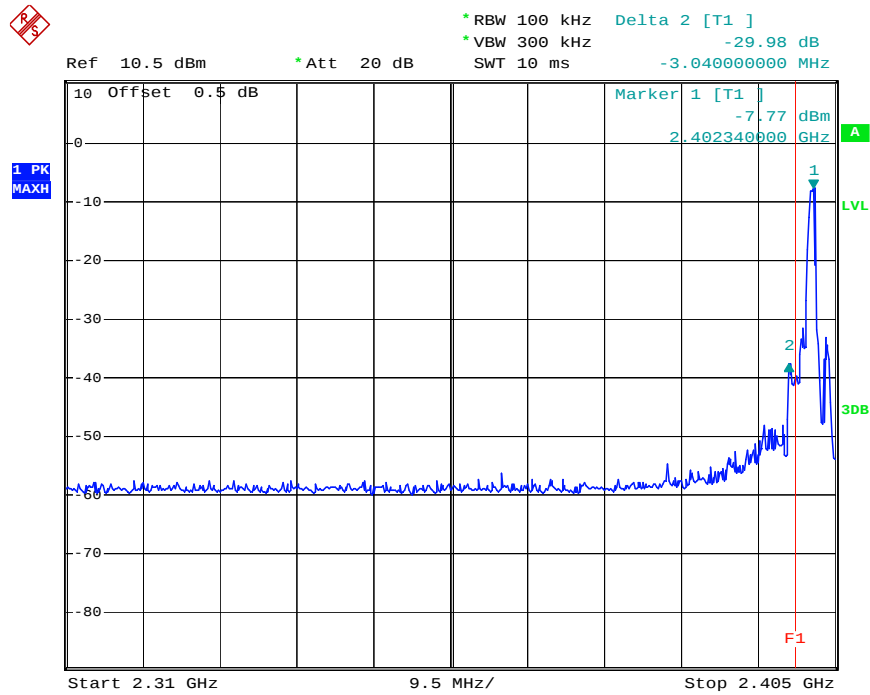

channel 39

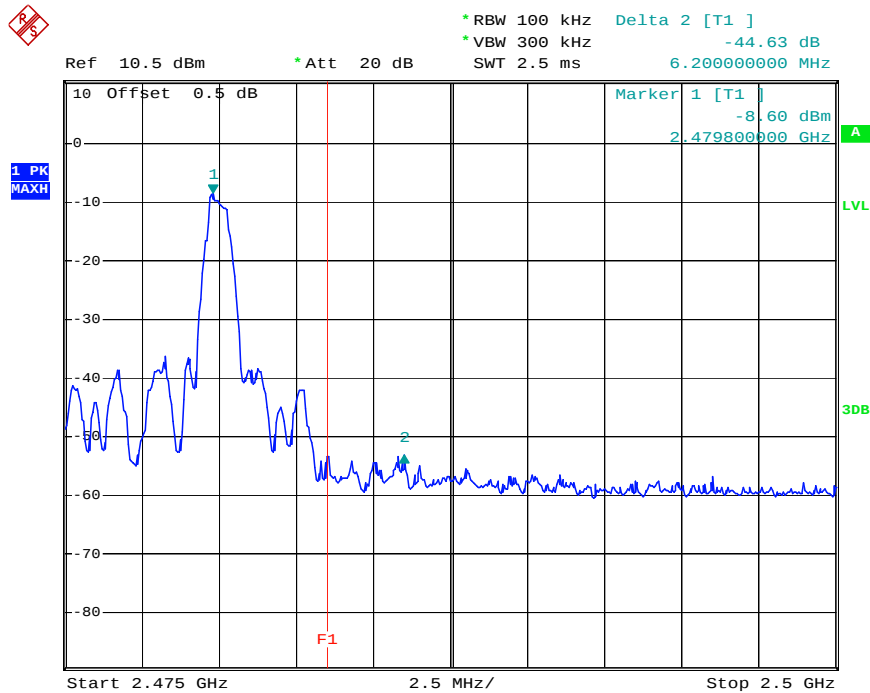

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

Let the EUT work in TX modes then measure it.

We select 2402MHz, 2480MHz TX frequency to transmit(GFSK mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case emissions are reported.

Job No.: frank2017 #472

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2402MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 14/51/06

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

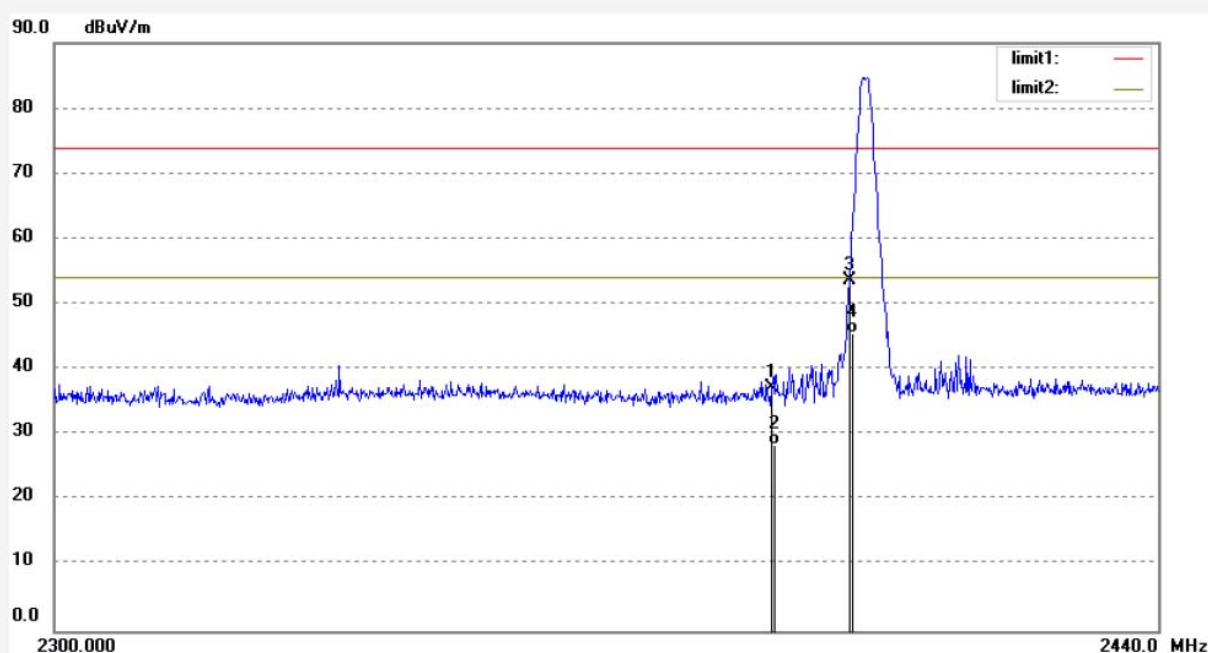

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	41.31	-3.96	37.35	74.00	-36.65	peak	100	254	
2	2390.000	32.35	-3.96	28.39	54.00	-25.61	AVG	100	136	
3	2400.000	57.61	-3.91	53.70	74.00	-20.30	peak	100	235	
4	2400.000	49.54	-3.91	45.63	54.00	-8.37	AVG	100	120	

Job No.: frank2017 #473

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2402MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 14/53/30

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

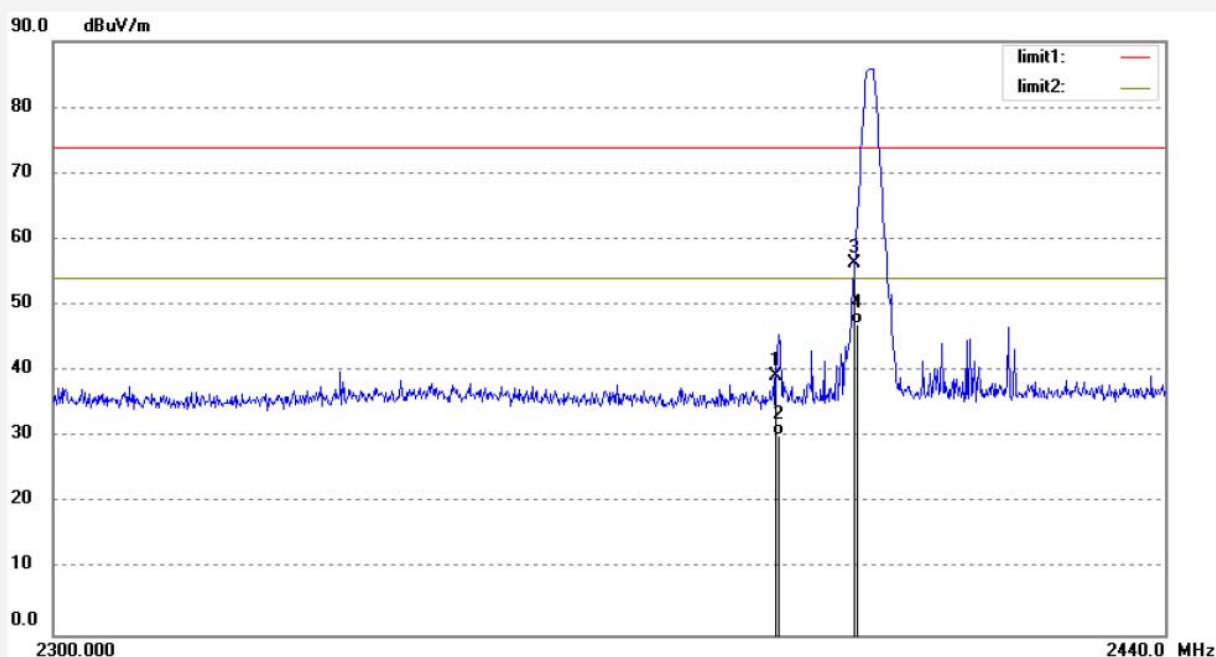

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.15	-3.96	39.19	74.00	-34.81	peak	100	244	
2	2390.000	34.26	-3.96	30.30	54.00	-23.70	AVG	100	153	
3	2400.000	60.26	-3.91	56.35	74.00	-17.65	peak	100	270	
4	2400.000	51.10	-3.91	47.19	54.00	-6.81	AVG	100	134	

Job No.: frank2017 #474

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2480MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 14/56/07

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

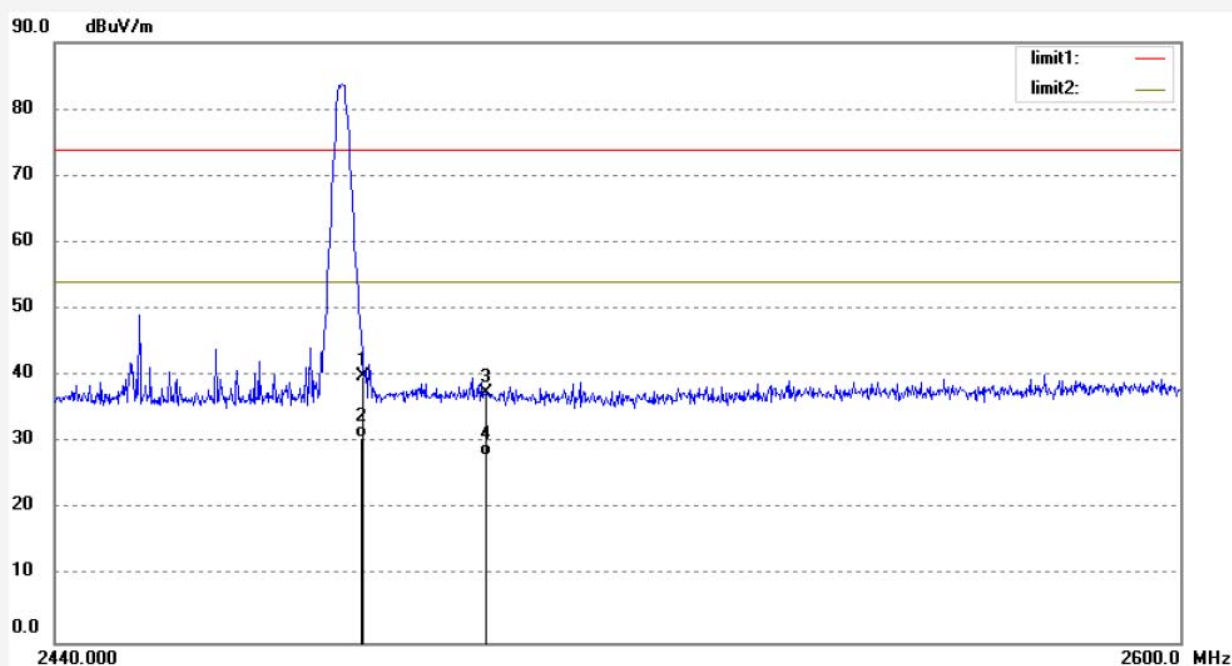

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.000	43.35	-3.50	39.85	74.00	-34.15	peak	100	157	
2	2483.000	34.12	-3.50	30.62	54.00	-23.38	AVG	100	120	
3	2500.000	40.91	-3.42	37.49	74.00	-36.51	peak	100	173	
4	2500.000	31.51	-3.42	28.09	54.00	-25.91	AVG	100	124	

Job No.: frank2017 #475

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2480MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 14/58/44

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

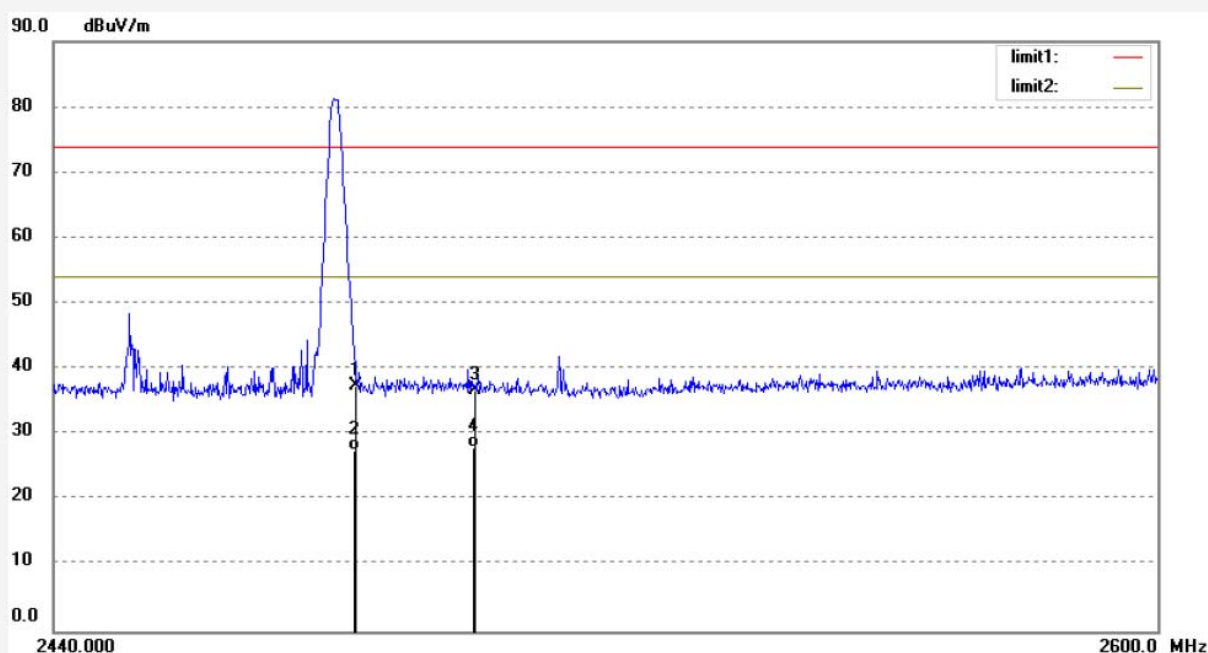


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.000	40.94	-3.50	37.44	74.00	-36.56	peak	100	186	
2	2483.000	31.02	-3.50	27.52	54.00	-26.48	AVG	100	114	
3	2500.000	40.13	-3.42	36.71	74.00	-37.29	peak	100	192	
4	2500.000	31.45	-3.42	28.03	54.00	-25.97	AVG	100	105	

10.RADIATED SPURIOUS EMISSION TEST

10.1.Block Diagram of Test Setup

10.1.1.Block diagram of connection between the EUT and peripherals

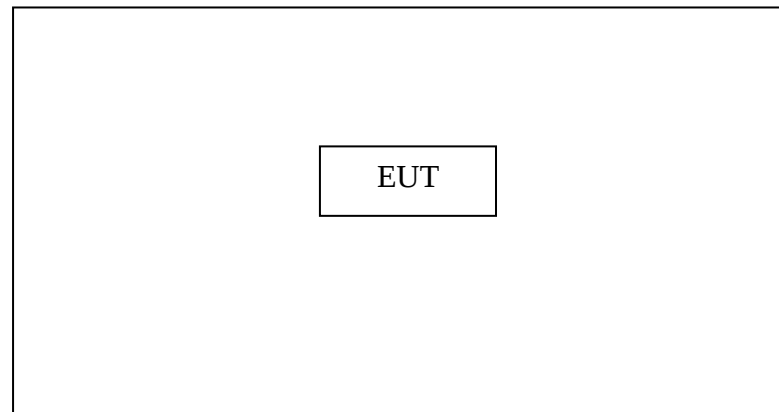


Setup: Transmitting mode

(EUT: S5 Connect Distance Module)


10.1.2.Semi-Anechoic Chamber Test Setup Diagram

Below 30MHz

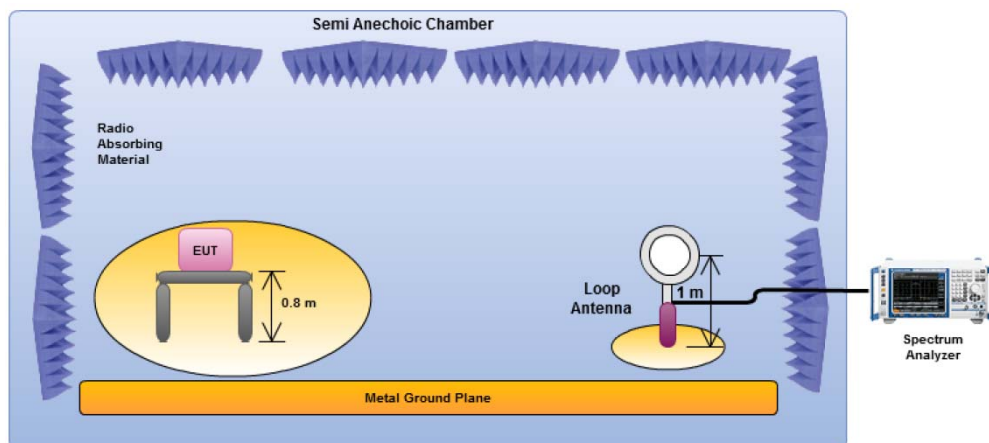


30MHz-1GHz

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

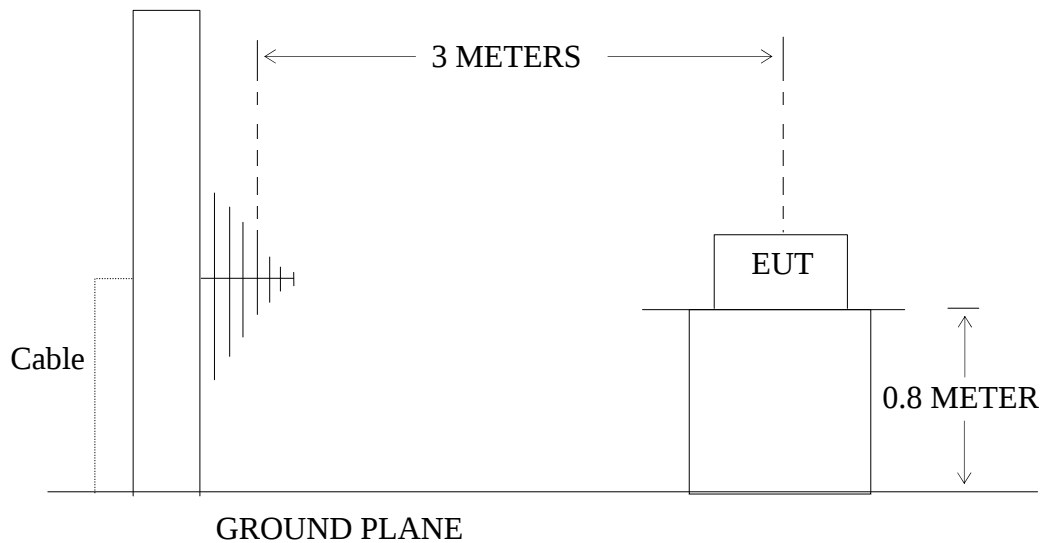

Above 1GHz

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

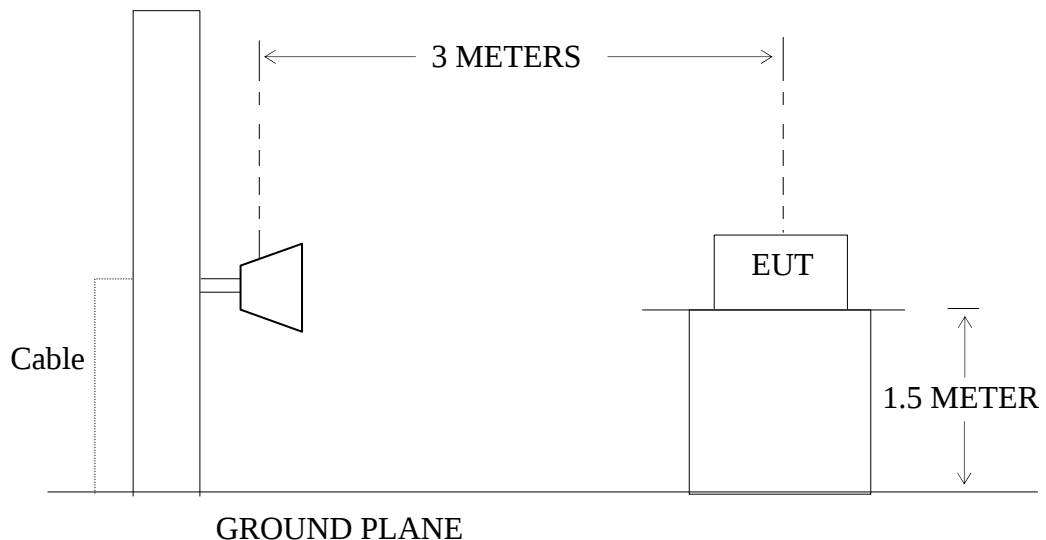

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated

emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5.Operating Condition of EUT

10.5.1.Setup the EUT and simulator as shown as Section 9.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

10.7. The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

Job No.: frank2017 #466

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2402MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 14/40/23

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

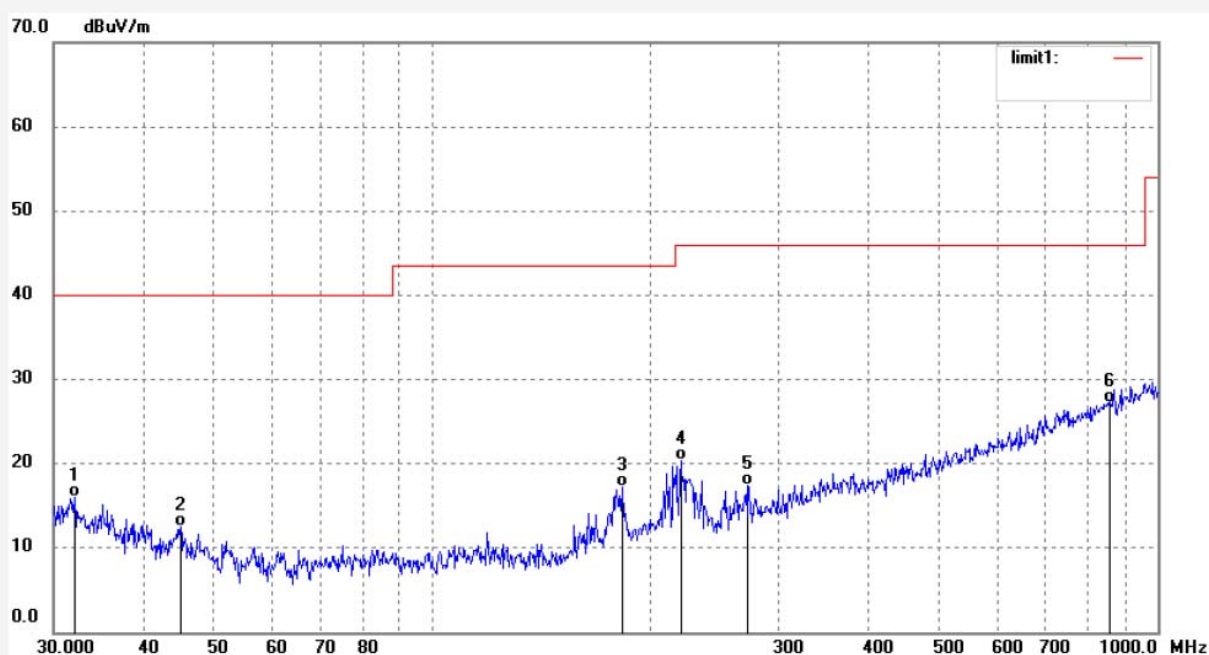

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.0711	31.28	-15.22	16.06	40.00	-23.94	QP	100	145	
2	44.9369	31.36	-18.91	12.45	40.00	-27.55	QP	100	246	
3	182.5784	37.26	-20.08	17.18	43.50	-26.32	QP	100	320	
4	219.9499	38.84	-18.40	20.44	46.00	-25.56	QP	100	110	
5	272.5246	34.45	-16.98	17.47	46.00	-28.53	QP	100	154	
6	853.7546	30.48	-3.18	27.30	46.00	-18.70	QP	100	211	

Job No.: frank2017 #467

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2402MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 14/41/28

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

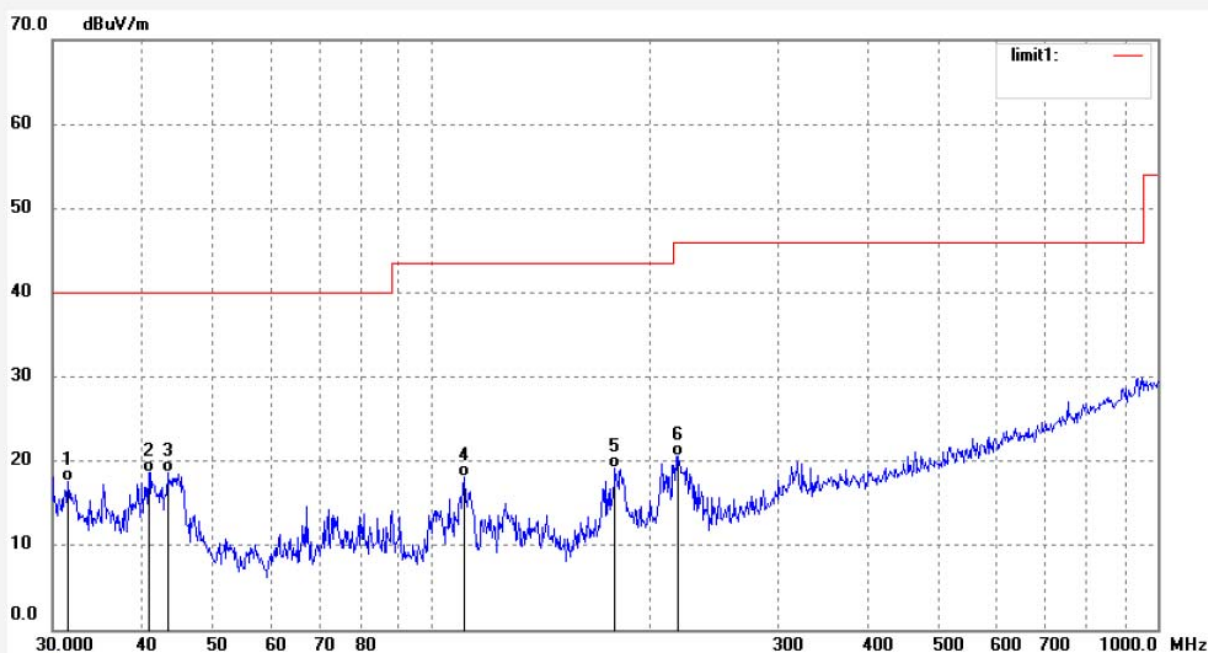

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.5125	32.71	-15.07	17.64	40.00	-22.36	QP	100	154	
2	40.7265	36.94	-18.22	18.72	40.00	-21.28	QP	100	113	
3	43.2332	37.26	-18.63	18.63	40.00	-21.37	QP	100	254	
4	110.8580	40.01	-21.83	18.18	43.50	-25.32	QP	100	306	
5	178.7697	39.69	-20.45	19.24	43.50	-24.26	QP	100	245	
6	218.4097	38.91	-18.40	20.51	46.00	-25.49	QP	100	257	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: frank2017 #468

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2440MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 14/41/38

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

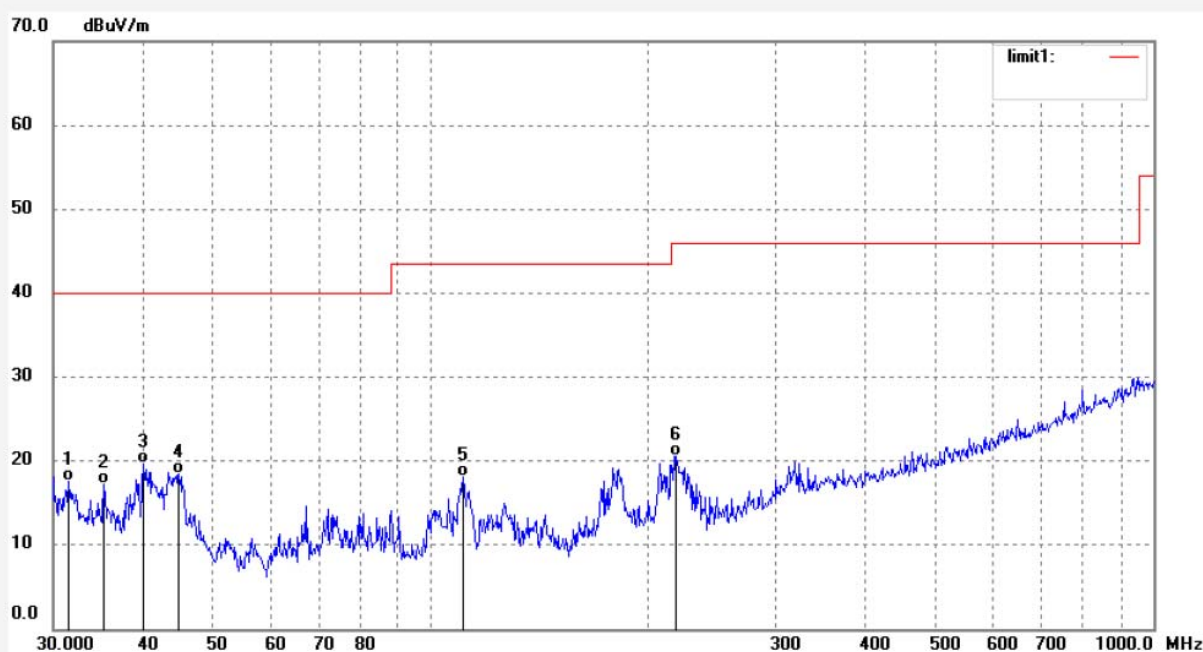

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.5125	32.71	-15.07	17.64	40.00	-22.36	QP	100	76	
2	35.2625	33.22	-16.05	17.17	40.00	-22.83	QP	100	103	
3	40.0172	37.85	-18.10	19.75	40.00	-20.25	QP	100	251	
4	44.7792	37.36	-18.88	18.48	40.00	-21.52	QP	100	241	
5	110.8580	40.01	-21.83	18.18	43.50	-25.32	QP	100	136	
6	218.4097	38.91	-18.40	20.51	46.00	-25.49	QP	100	26	

Job No.: frank2017 #469

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2440MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 14/42/11

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

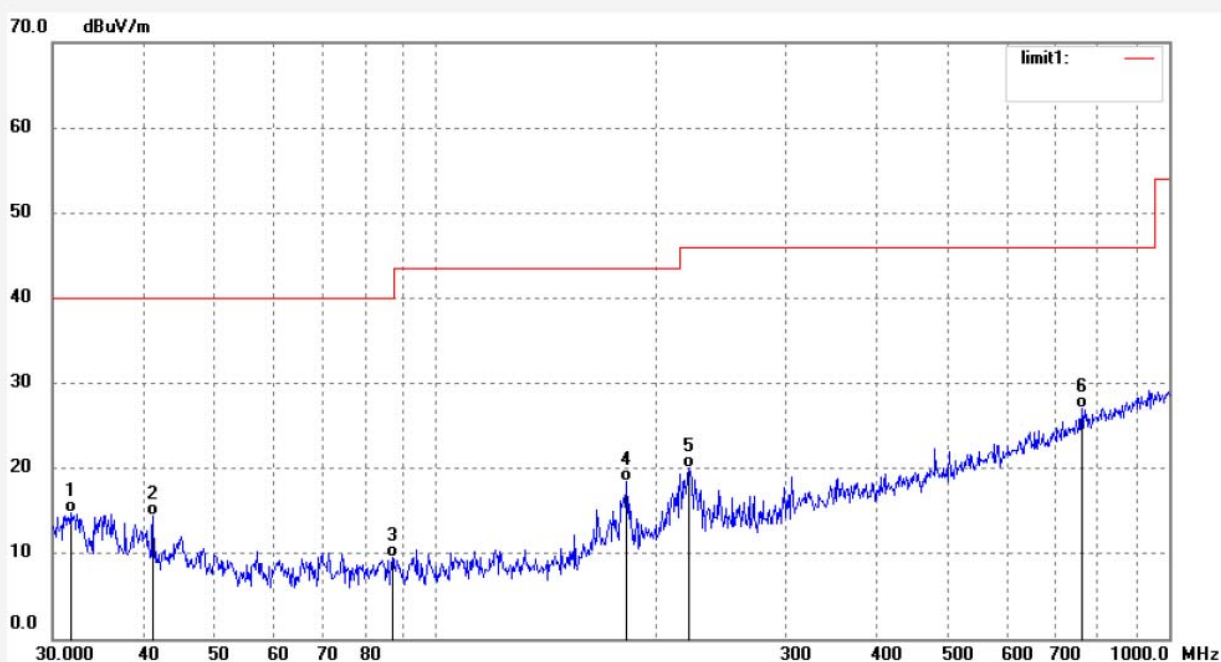

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.7347	29.93	-15.14	14.79	40.00	-25.21	QP	100	119	
2	41.1580	32.75	-18.30	14.45	40.00	-25.55	QP	100	210	
3	87.2980	31.51	-21.94	9.57	40.00	-30.43	QP	100	151	
4	181.9380	38.60	-20.14	18.46	43.50	-25.04	QP	100	310	
5	221.5010	38.39	-18.37	20.02	46.00	-25.98	QP	100	230	
6	760.2866	31.90	-4.91	26.99	46.00	-19.01	QP	100	115	

Job No.: frank2017 #470

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2480MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 14/42/20

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

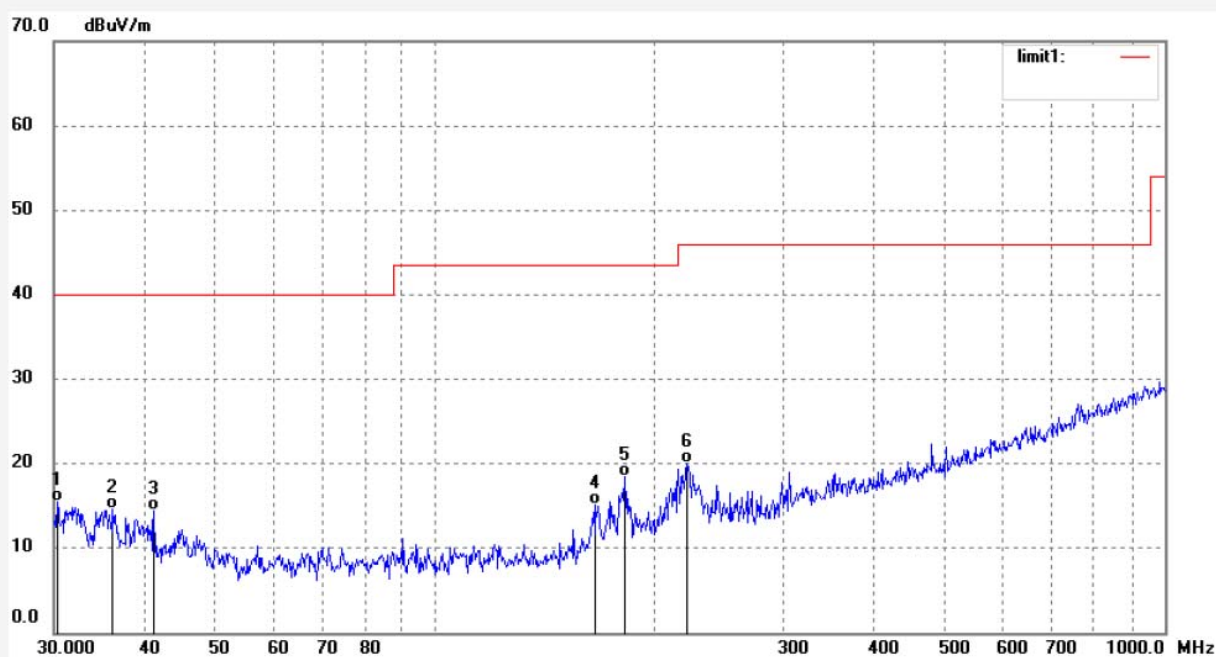

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.3179	30.19	-14.78	15.41	40.00	-24.59	QP	100	251	
2	36.1405	31.04	-16.45	14.59	40.00	-25.41	QP	100	135	
3	41.1580	32.75	-18.30	14.45	40.00	-25.55	QP	100	121	
4	166.0540	35.81	-20.72	15.09	43.50	-28.41	QP	100	102	
5	181.9380	38.60	-20.14	18.46	43.50	-25.04	QP	100	201	
6	221.5010	38.39	-18.37	20.02	46.00	-25.98	QP	100	322	

Job No.: frank2017 #471

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX2480MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 14/44/06

Engineer Signature: Frank

Distance: 3m

Note: Report NO.:ATE20171073

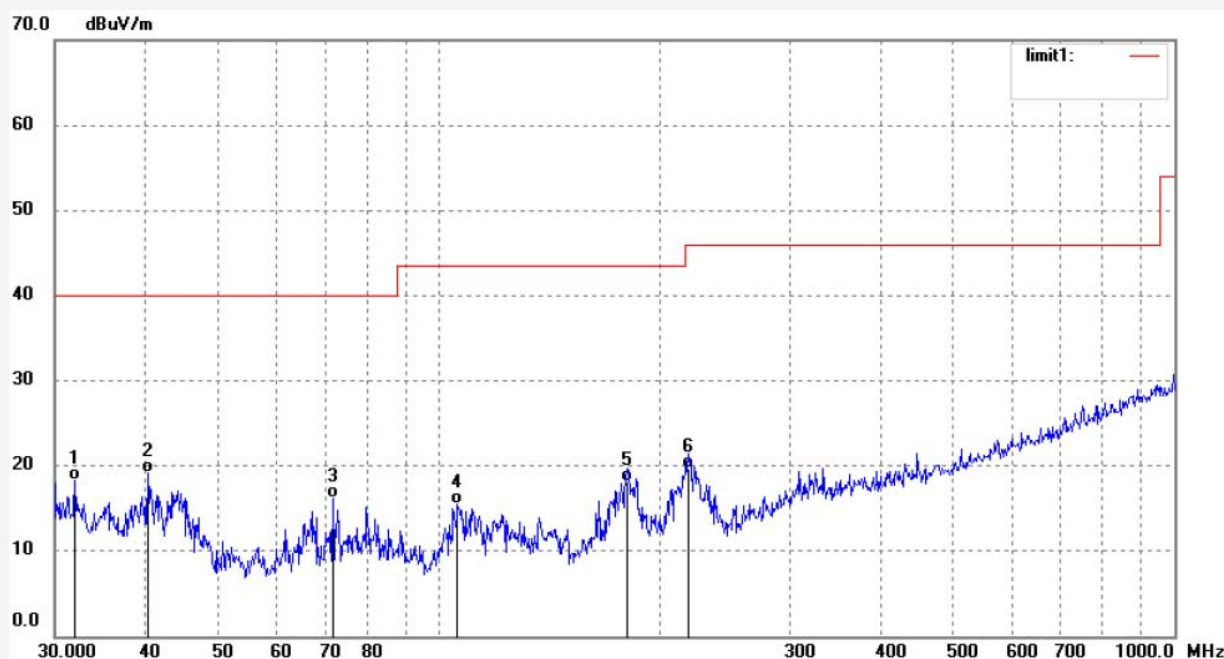

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.9586	33.55	-15.19	18.36	40.00	-21.64	QP	100	135	
2	40.1580	37.25	-18.13	19.12	40.00	-20.88	QP	100	210	
3	71.7053	38.33	-22.16	16.17	40.00	-23.83	QP	100	115	
4	105.9084	38.12	-22.56	15.56	43.50	-27.94	QP	100	302	
5	180.0302	38.45	-20.33	18.12	43.50	-25.38	QP	100	135	
6	218.4097	38.15	-18.40	19.75	46.00	-26.25	QP	100	222	

Job No.: DING1 #1355

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX 2402MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 8/51/06

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20171073

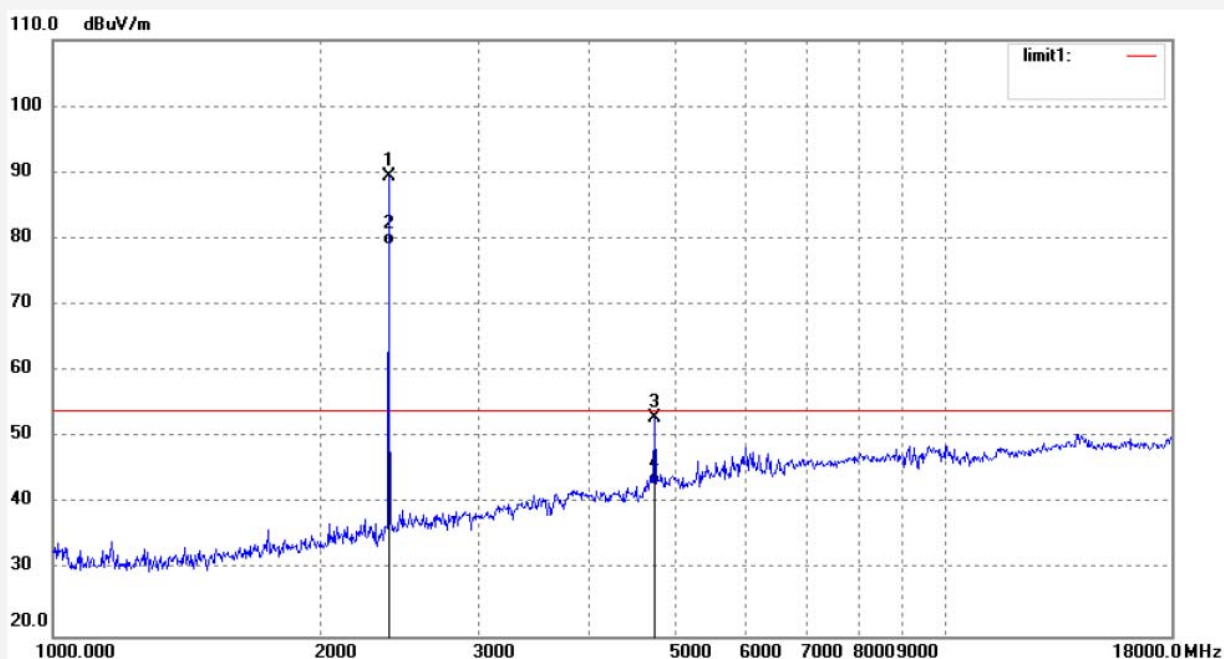

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	95.35	-5.98	89.37	114.00	-24.63	peak	100	310	
2	2402.000	85.12	-5.98	79.14	94.00	-14.86	AVG	100	256	
3	4804.000	49.91	3.15	53.06	74.00	-20.94	peak	100	274	
4	4804.000	39.64	3.15	42.79	54.00	-11.21	AVG	100	225	

Job No.: DING1 #1356

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX 2402MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 8/54/29

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20171073

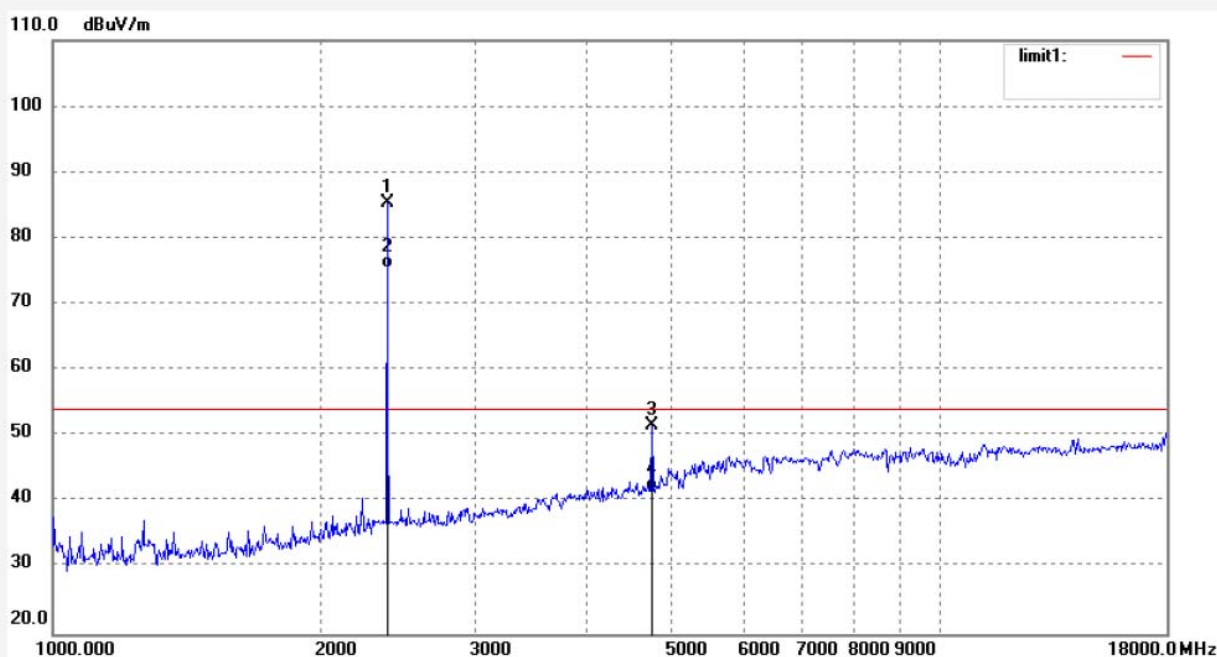

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	91.44	-5.98	85.46	114.00	-28.64	peak	100	221	
2	2402.000	81.53	-5.98	75.55	94.00	-18.45	AVG	100	179	
3	4804.000	48.42	3.15	51.57	74.00	-22.43	peak	100	120	
4	4804.000	38.49	3.15	41.64	54.00	-12.36	AVG	100	110	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING1 #1357

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX 2440MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 8/57/32

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20171073

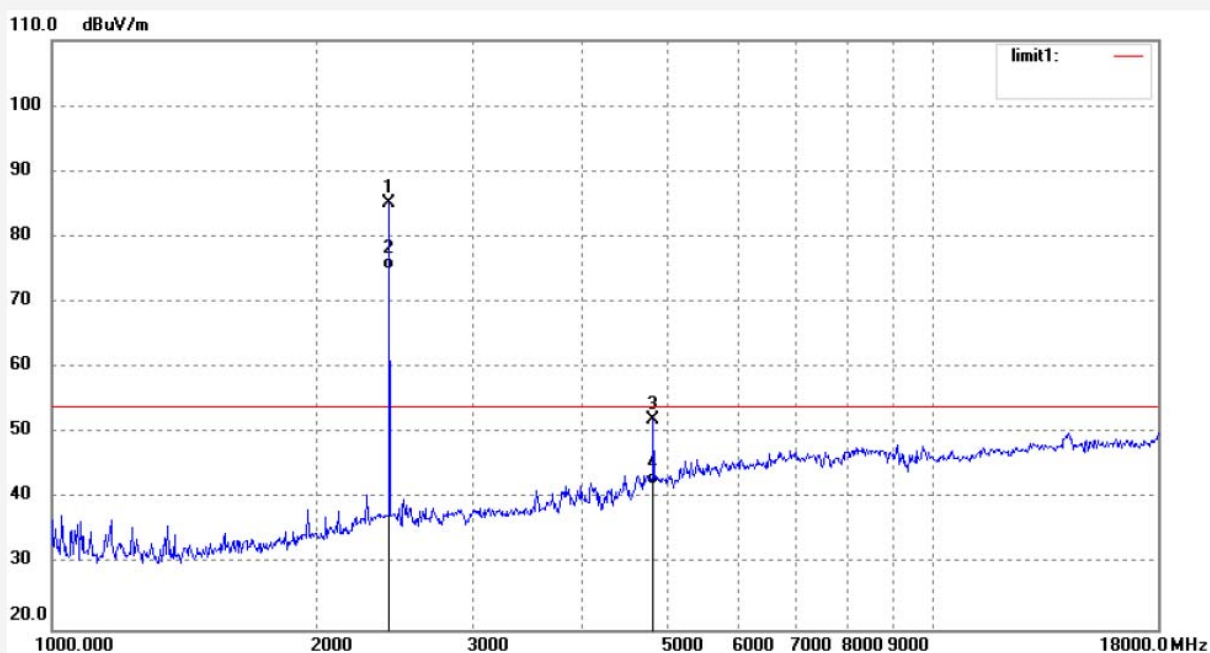

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	90.84	-5.72	85.12	114.00	-28.88	peak	100	279	
2	2440.000	80.62	-5.72	74.90	94.00	-19.10	AVG	100	243	
3	4880.000	48.46	3.67	52.13	74.00	-21.87	peak	100	251	
4	4880.000	38.54	3.67	42.21	54.00	-11.79	AVG	100	234	

Job No.: DING1 #1358

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX 2440MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 9/00/30

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20171073

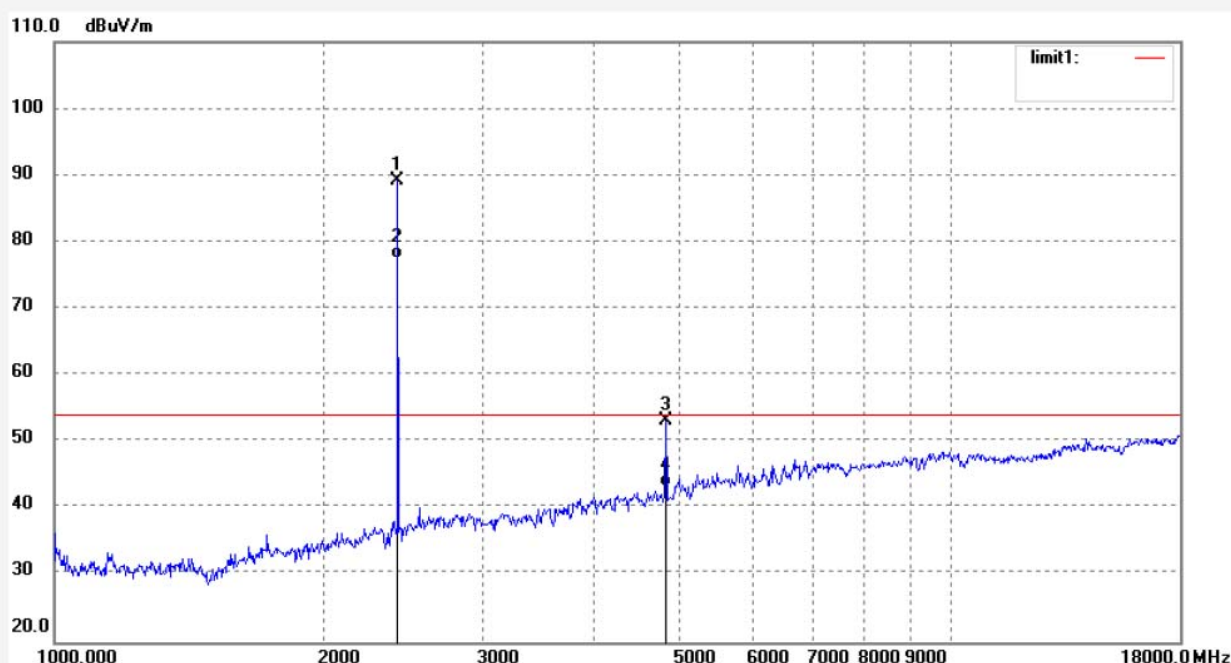

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	94.90	-5.72	89.18	114.00	-24.82	peak	100	330	
2	2440.000	83.26	-5.72	77.54	94.00	-16.46	AVG	100	278	
3	4880.000	49.63	3.53	53.16	74.00	-20.84	peak	100	324	
4	4880.000	39.74	3.53	43.27	54.00	-10.73	AVG	100	331	

Job No.: DING1 #1359

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX 2480MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Horizontal

Power Source: DC 5V


Date: 17/07/03/

Time: 9/03/40

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20171073

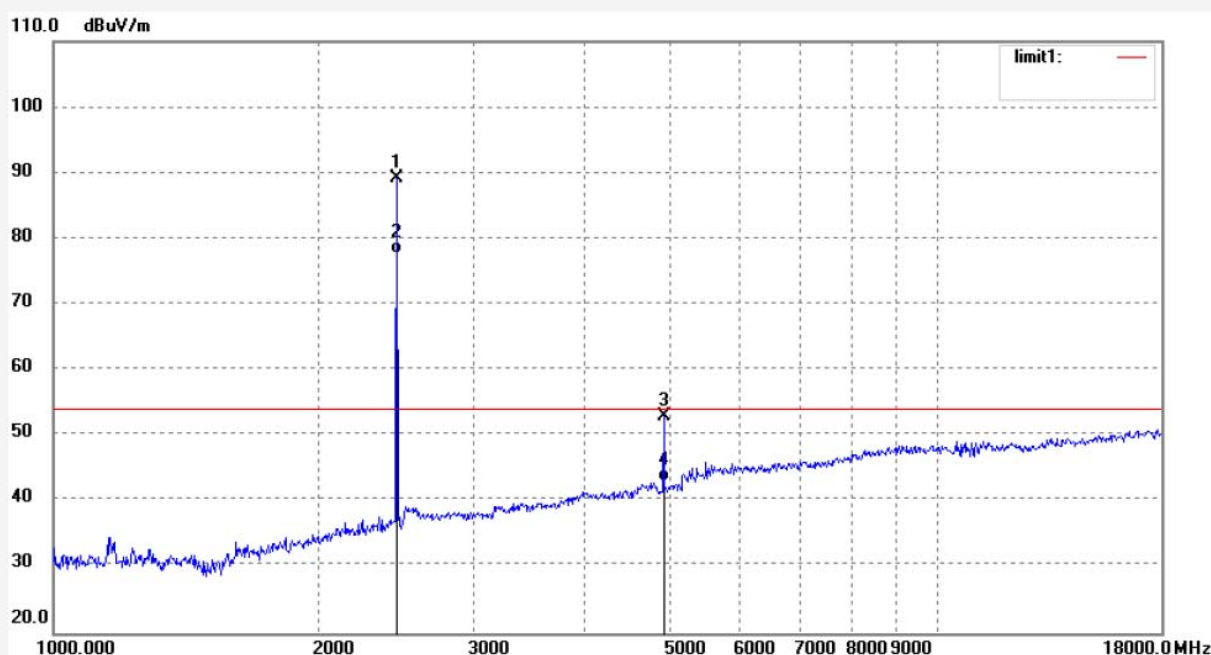

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	94.72	-5.55	89.17	114.00	-24.83	peak	100	145	
2	2480.000	83.21	-5.55	77.66	94.00	-16.34	AVG	100	120	
3	4960.000	48.52	4.54	53.06	74.00	-20.94	peak	100	227	
4	4960.000	38.49	4.54	43.03	54.00	-10.97	AVG	100	211	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DING1 #1360

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: S5 Connect Distance Module

Mode: TX 2480MHz

Model: MCFX-14-S5DM

Manufacturer: Latitude Ltd.

Polarization: Vertical

Power Source: DC 5V


Date: 17/07/03/

Time: 9/07/43

Engineer Signature: DING

Distance: 3m

Note: Report NO.:ATE20171073

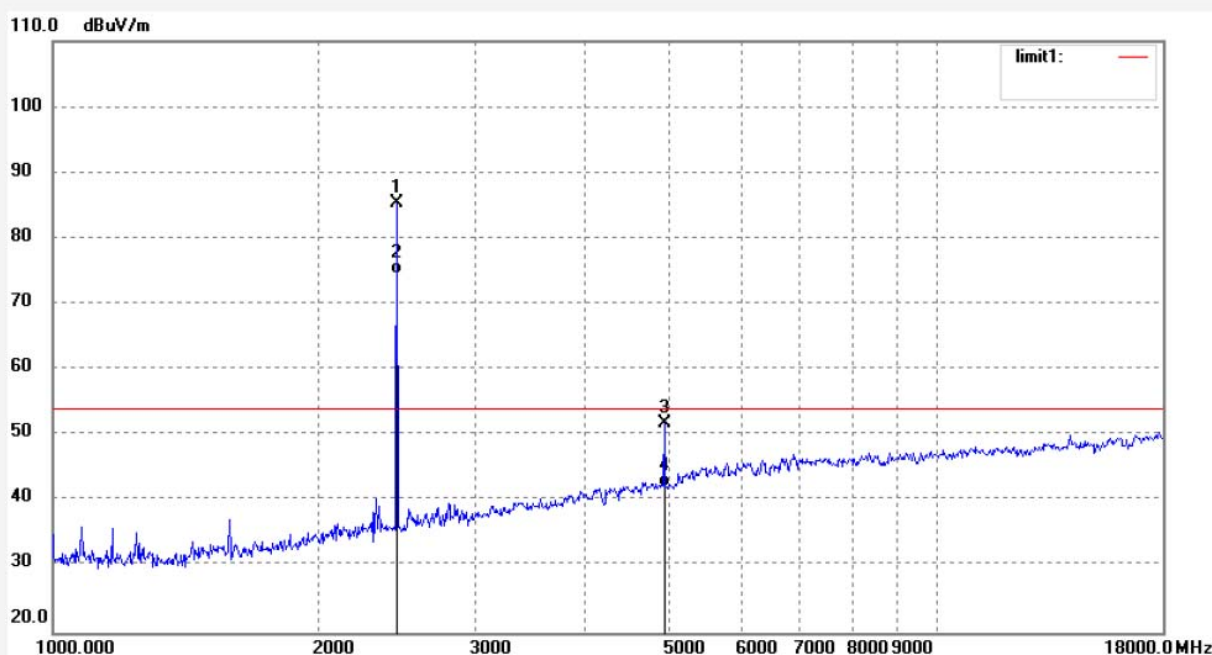

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	90.95	-5.55	85.40	114.00	-28.60	peak	100	355	
2	2480.000	80.16	-5.55	74.61	94.00	-19.39	AVG	100	247	
3	4960.000	47.32	4.54	51.86	74.00	-22.14	peak	100	113	
4	4960.000	37.56	4.54	42.10	54.00	-11.90	AVG	100	120	


11.ANTENNA REQUIREMENT

11.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 0 dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

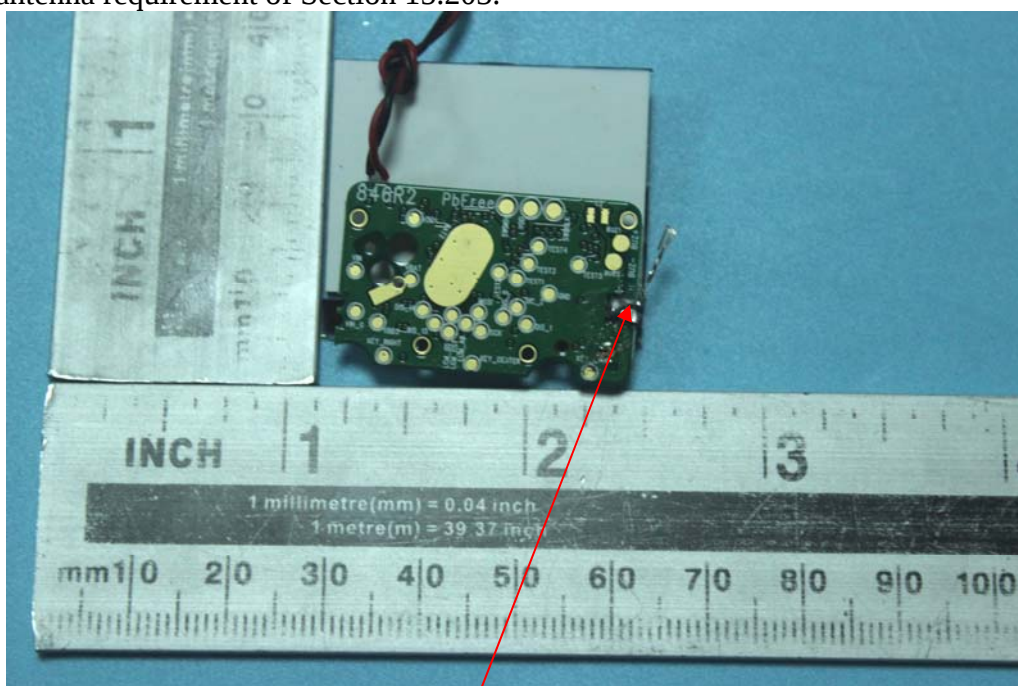

Antenna