

STS
TESTING
SOLUTIONS
LAB
B



FCC TEST REPORT

Report No:STS1804137W02

Issued for

Cine Gears Inc.

8105 Birch Bay Sq St, Unit 205, Blaine Washington United States 98230

Product Name:	Wireless HD/SDI video transmission system with TALLY and TALKBACK
Brand Name:	N/A
Model Name:	1000tt
Series Model:	N/A
FCC ID:	2AMHG-1000TT
Test Standard:	FCC Part 15.407 RSS-247 Issue 2, February 2017

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's name : Cine Gears Inc.
Address : 8105 Birch Bay Sq St, Unit 205, Blaine Washington United States 98230

Manufacture's Name : ShenZhen LanGi Technology Co. LTD.
Address : Room 201, Block A, No.1, QianWan Road, Qianhai Shenzhen-Hongkong Cooperative Zone, Shenzhen, China

Product description

Product Name : Wireless HD/SDI video transmission system with TALLY and TALKBACK
Brand Name : N/A
Model Name : 1000tt
Series Model : N/A

Test Standards : FCC Part15.407

RSS-247 Issue 2, February 2017

Test procedure : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC&IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date (s) of performance of tests : 14 Apr. 2018 ~30 May 2018

Date of Issue : 01 Jun. 2018

Test Result : **Pass**

Testing Engineer : 

(Chris chen)

Technical Manager : 

(Sean she)

Authorized Signatory : 

(Vita Li)



**Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	18
3.2.6 FIELD STRENGTH CALCULATION	21
4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE	29
4.1 APPLIED PROCEDURES / LIMIT	29
5. POWER SPECTRAL DENSITY TEST	35
5.1 APPLIED PROCEDURES / LIMIT	35
6. BANDWIDTH MEASUREMENT	39
6.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	39
6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	41
6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	45
7. MAXIMUM CONDUCTED OUTPUT POWER	47
7.1 APPLIED PROCEDURES / LIMIT	47
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	50
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	50
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	50
9. ANTENNA REQUIREMENT	51
9.1 STANDARD REQUIREMENT	51
9.2 EUT ANTENNA	51
APPENDIX - PHOTOS OF TEST SETUP	52

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	01 Jun. 2018	STS1804137W02	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v01r03

FCC Part 15.407 RSS-247 Issue 2, February 2017		
FCC standard	Test Item	Results
15.207 RSS-Gen Issue 5 April 2018	AC Conducted Emission	PASS
§ 15.407 (2) (26 dB) / § 15.407 (e) (6 dB)/ § 15.407 (a) (99%) RSS-Gen Issue 4 nov 2014	26dB/6dB &99% Bandwidth	PASS
15.407(a) (1).(2).(3).(4).(5) RSS-247 Issue 2, February 2017	Maximum Conducted Output Power	PASS
15.407(b)	Peak Excursion Ratio	PASS
15.407(b)& 15.209 RSS-247 Issue 2, February 2017	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(b)7 RSS-247 Issue 2, February 2017	Conducted Emission And (bandedge Emissions) Measurement	PASS
15.407(a) (1).(2).(3).(4).(5) RSS-247 Issue 2, February 2017	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204 RSS-Gen Issue 5 April 2018	Antenna Requirement	PASS

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2)all tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,

Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649; FCC Registration No.: 625569

IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.71\text{dB}$
4	Spurious emissions,conducted	$\pm 0.63\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 3.80\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 3.97\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	Wireless HD/SDI video transmission system with TALLY and TALKBACK	
Trade Name	N/A	
Model Name	1000tt	
Series Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Wireless HD/SDI video transmission system with TALLY and TALKBACK	
	Operation Frequency:	Bnad 1:5190MHz-5230MHz Band 4:5755MHz-5795MHz
	Modulation Type:	OFDM
	Antenna Designation:	See Note 3
	Max. Output Power(Conducted):	6.34dBm
	Duty Cycle:	>98%
More details of EUT technical specification, please refer to the User's Manual.		
Test Channel	Please refer to the Note 2.	
Power Rating	DC 14.8V	
Hardware version number	V1.2	
Software version number	2.65.11	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
38	5190	151	5755
46	5230	159	5795

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

40MHz			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	151	5755
46	5230	159	5795

2. KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain GA_{NT} dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

$$\text{Directional gain} = \text{GANT} + 10 \log(\text{NANT}) \text{ dBi}$$

(ii) If all transmit signals are completely uncorrelated with each other,

$$\text{Directional gain} = \text{GANT}$$

ANT A=3.5dBi

ANT B=3.5 dB

GANT + 10 log(NANT) dBi

Directional gain=3.5+10log2=6.51dBi

Ant	Brand	Model Name	Ant. Type	Connector	Gain (dBi)	NOTE
A	N/A	1000tt	External Antenna	RP-SMA	ANT. A: 3.5dBi ANT. B: 3.5dBi	WLAN Ant.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE HT40 CH38&CH46	NSS1 MCS0
Mode 2	TX IEEE HT40 CH151&CH159	NSS1 MCS0


Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
(3) We have be tested for all avaialble U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report

AC Conducted Emission


Test Case	
AC Conducted Emission	Mode 3: Keeping TX + WLAN Link

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conduction Test Set

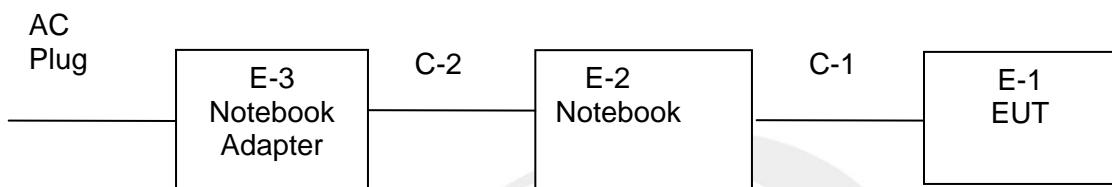



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-2	Notebook	DELL	VOSTRO.3800	N/A	N/A
E-3	Notebook Adapter	DELL	HA45NM140	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable (FTP)	NO	100cm	N/A
C-2	DC Cable	NO	110cm	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	102086	2017.10.15	2018.10.14
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2018.11.01
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2017.10.27	2018.10.26
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	N/A	2018.03.11	2019.03.10
Temperature & Humidity	HH660	Mieo	N/A	2017.10.15	2018.10.14
Temperature & Humidity	HH660	Mieo	N/A	2017.10.15	2018.10.14
Pre-mplifier (0.1M-3GHz)	EM	EM330	60538	2018.03.11	2019.03.10
PreAmplifier (1G-26.5GHz)	Agilent	8449B	60538	2017.10.15	2018.10.14
Passive Loop (9K--30MHz)	ZHNNAN	ZN3090C	16035	2018.03.11	2019.03.10
Low frequency cable	EM	R01	N/A	2018.03.11	2019.03.10
Low frequency cable	EM	R06	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R04	N/A	2018.03.11	2019.03.10
High frequency cable	SCHWARZBECK	R02	N/A	2018.03.11	2019.03.10
Semi-anechoic chamber	Changling	966	N/A	2017.10.15	2018.10.14
trun table	EM	SC100_1	60531	N/A	N/A
Antnna mast	EM	SC100	N/A	N/A	N/A
Max-full Antenna Corp	MF	MFA-440H	N/A	N/A	N/A
EMI Test Receiver	R&S	ESW	101535	2017.07.11	2018.07.10

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
conduction Cable	EM	C01	N/A	2018.03.11	2019.03.10
Temperature & Humidity	Mieo	HH660	N/A	2017.10.15	2018.10.14



RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2017.10.15	2018.10.14
Power Meter	R&S	NRP	100510	2017.10.15	2018.10.14
Spectrum Analyzer	Agilent	N9020A	MY51110105	2018.03.08	2019.03.07
Signal Analyzer	Agilent	N9020A	MY49100060	2017.10.15	2018.10.14





3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

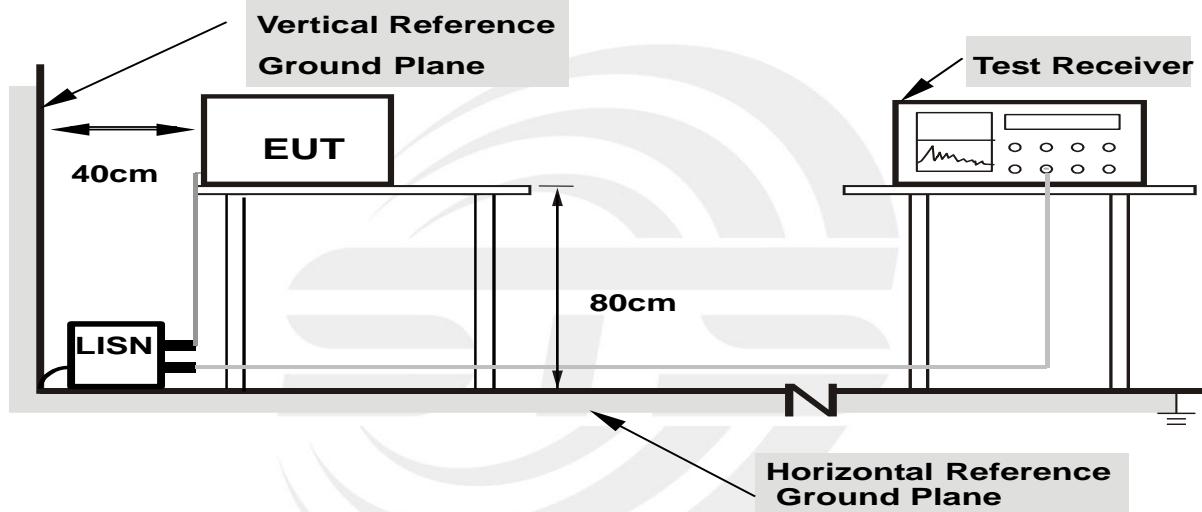

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS


Temperature:	24°C	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 3		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1700	46.40	9.79	56.19	64.96	-8.77	QP
0.1700	29.24	9.79	39.03	54.96	-15.93	AVG
0.5060	28.34	10.02	38.36	56.00	-17.64	QP
0.5060	13.04	10.02	23.06	46.00	-22.94	AVG
1.4860	24.53	9.79	34.32	56.00	-21.68	QP
1.4860	14.88	9.79	24.67	46.00	-21.33	AVG
3.0260	23.06	9.81	32.87	56.00	-23.13	QP
3.0260	13.08	9.81	22.89	46.00	-23.11	AVG
5.4900	24.31	9.85	34.16	60.00	-25.84	QP
5.4900	13.70	9.85	23.55	50.00	-26.45	AVG
15.0300	26.42	10.24	36.66	60.00	-23.34	QP
15.0300	15.20	10.24	25.44	50.00	-24.56	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)–Limit

100.0 dBuV

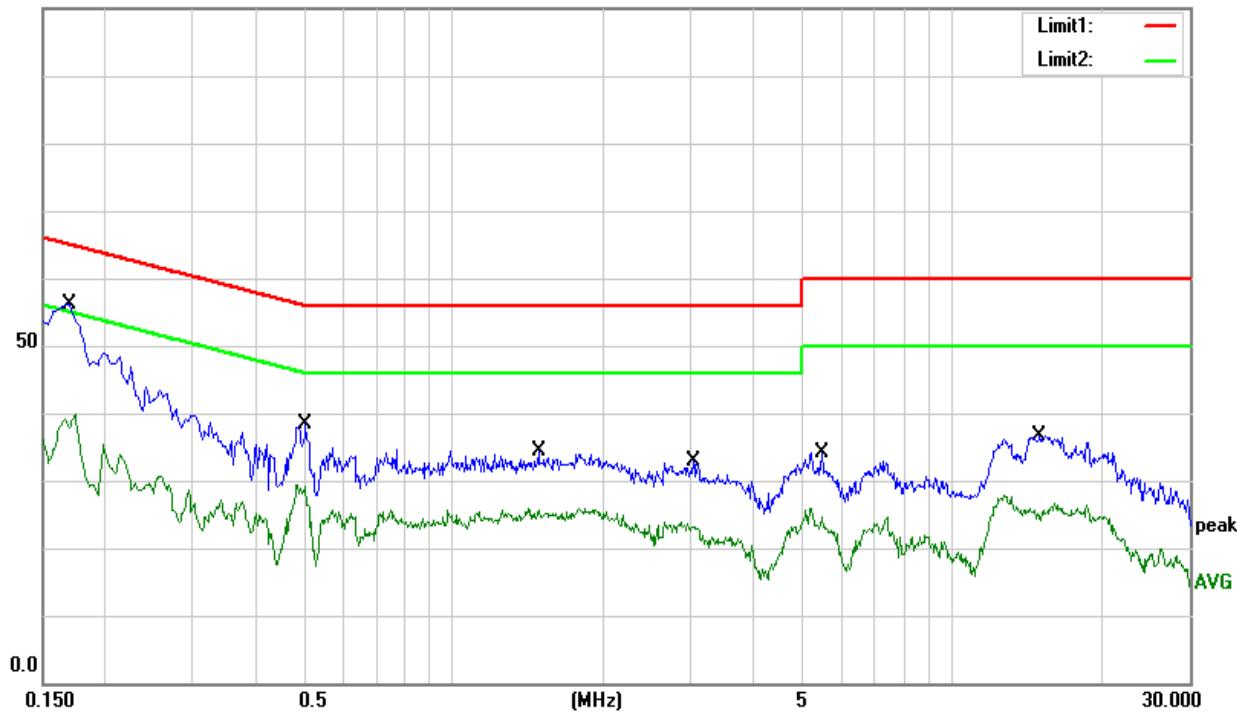


Temperature:	23.5 °C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode	Mode 3		

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
0.1500	47.87	9.79	57.66	66.00	-8.34	QP
0.1500	34.75	9.79	44.54	56.00	-11.46	AVG
0.5350	30.28	10.00	40.28	56.00	-15.72	QP
0.5350	22.83	10.00	32.83	46.00	-13.17	AVG
1.4620	31.52	9.79	41.31	56.00	-14.69	QP
1.4620	22.49	9.79	32.28	46.00	-13.72	AVG
3.5140	26.42	9.82	36.24	56.00	-19.76	QP
3.5140	16.39	9.82	26.21	46.00	-19.79	AVG
7.2180	23.92	9.90	33.82	60.00	-26.18	QP
7.2180	13.41	9.90	23.31	50.00	-26.69	AVG
14.5940	26.63	10.23	36.86	60.00	-23.14	QP
14.5940	13.45	10.23	23.68	50.00	-26.32	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor)-Limit

100.0 dBuV

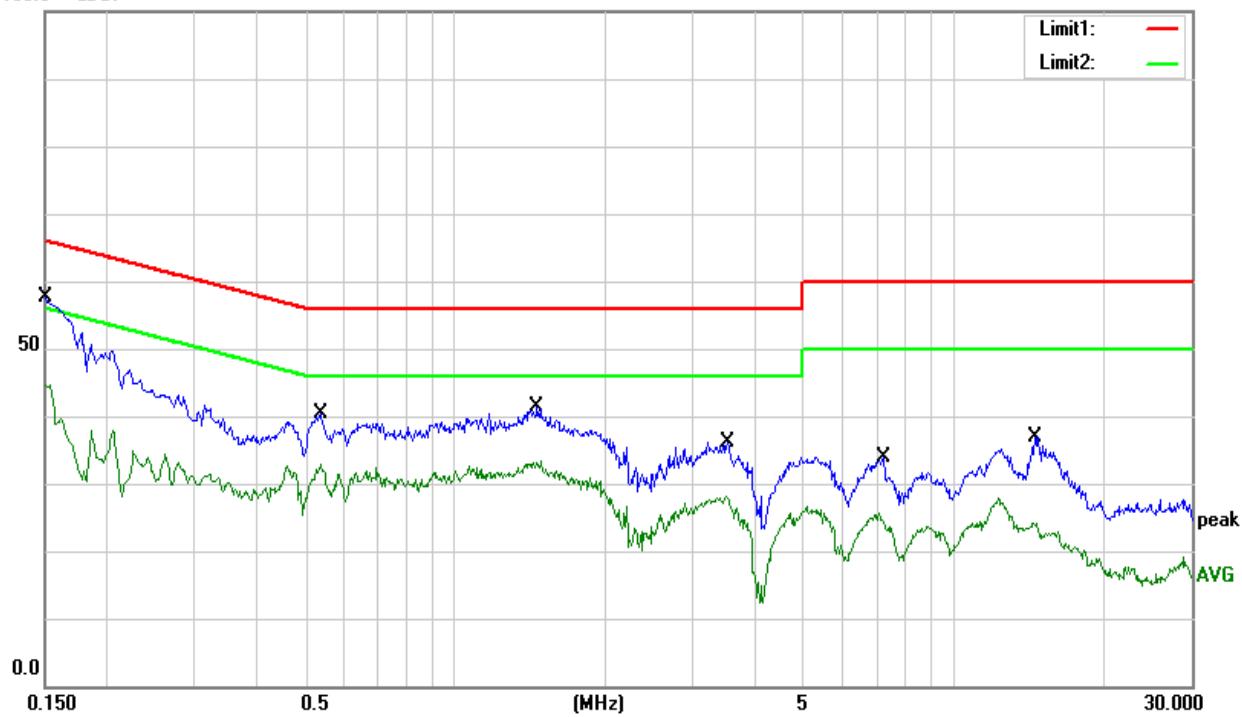



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band; limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz



Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the antenna are set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed test to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

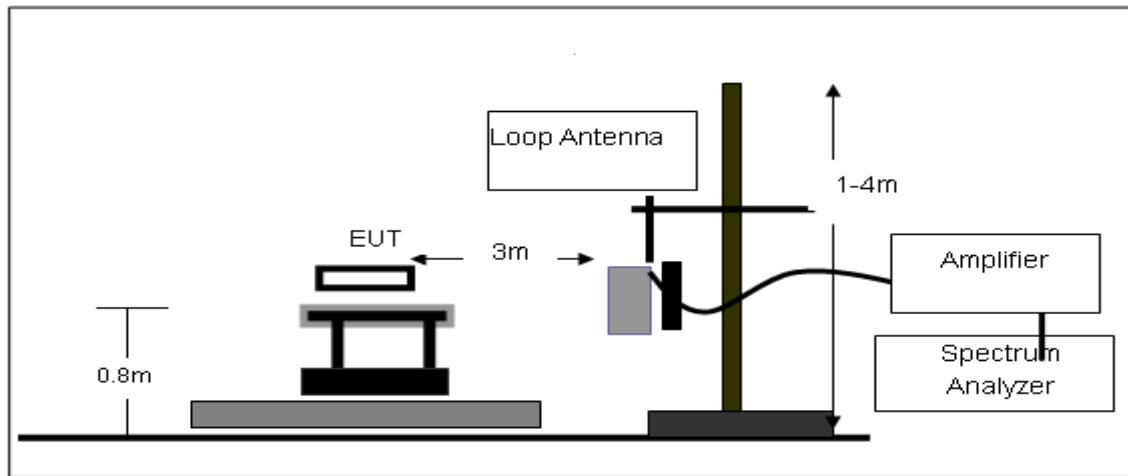

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

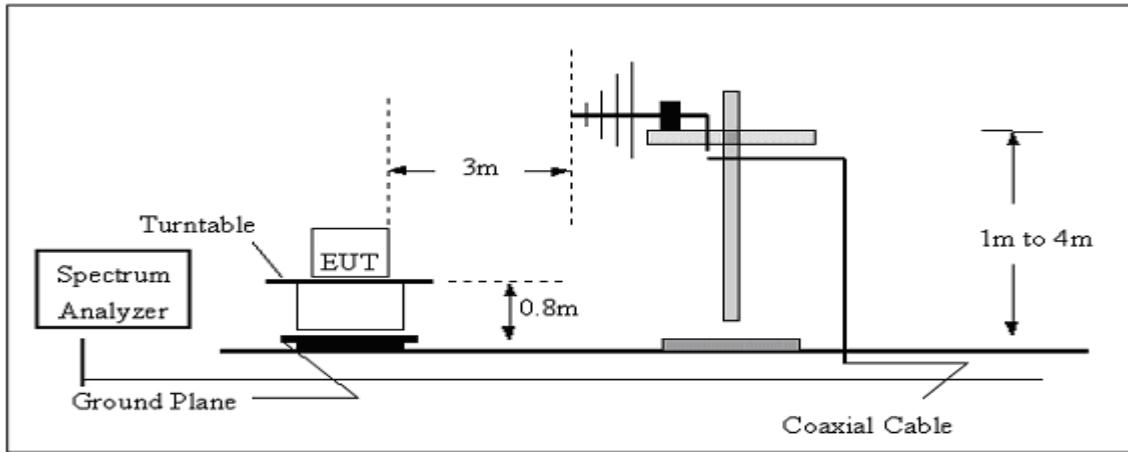

(C) Radiated Emission Test-Up Frequency Above 1GHz

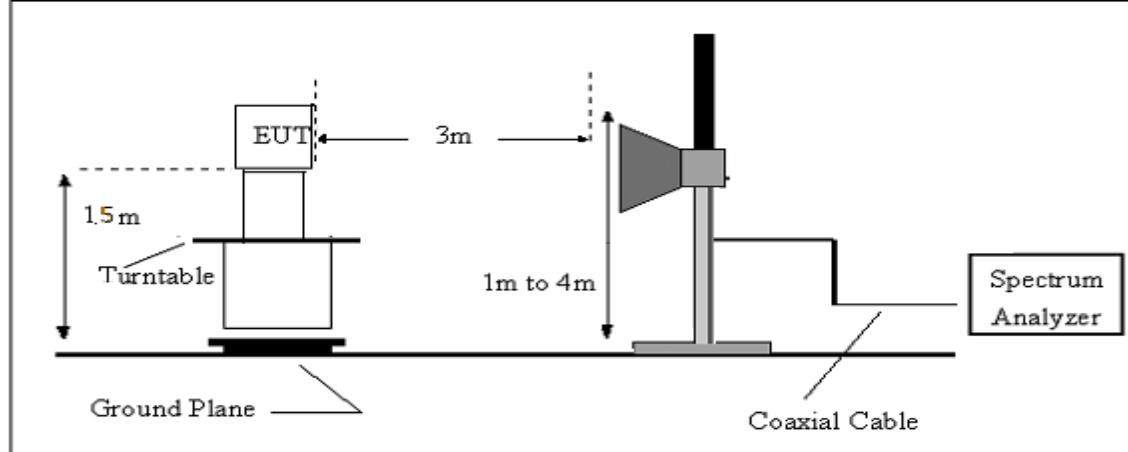

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$

3.2.7 TEST RESULTS (Between 9KHz – 30 MHz)

Temperature:	23.5 °C	Relative Humidity:	59%
Test Voltage :	DC 14.8V	Polarization :	--
Test Mode :	TX Mode		

Freq. (MHz)	Reading (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dB μ V) + distance extrapolation factor.

3.2.8 TEST RESULTS (Between 30MHz – 1GHz)

Temperature	24.8 °C	Relative Humidity	61%
Test Voltage	DC 14.8V	Polarization	Horizontal
Test Mode	Mode 1-2(Mode 1 worst mode)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
31.9542	30.32	-12.20	18.12	40.00	-21.88	QP
61.7781	44.82	-24.30	20.52	40.00	-19.48	QP
132.6850	41.69	-17.54	24.15	43.50	-19.35	QP
226.0994	43.99	-18.72	25.27	46.00	-20.73	QP
290.0172	44.08	-15.41	28.67	46.00	-17.33	QP
982.6200	30.23	-0.14	30.09	54.00	-23.91	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

80.0 dBuV




Temperature	24.8°C	Relative Humidity	61%
Test Voltage	DC 14.8V	Polarization	Vertical
Test Mode	Mode 1-2(Mode 1 worst mode)		

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
31.3992	35.87	-11.91	23.96	40.00	-16.04	QP
50.2324	43.89	-21.55	22.34	40.00	-17.66	QP
90.8554	41.95	-20.11	21.84	43.50	-21.66	QP
124.5690	40.81	-17.63	23.18	43.50	-20.32	QP
580.7024	27.74	-6.73	21.01	46.00	-24.99	QP
903.3093	28.44	-2.14	26.30	46.00	-19.70	QP

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit

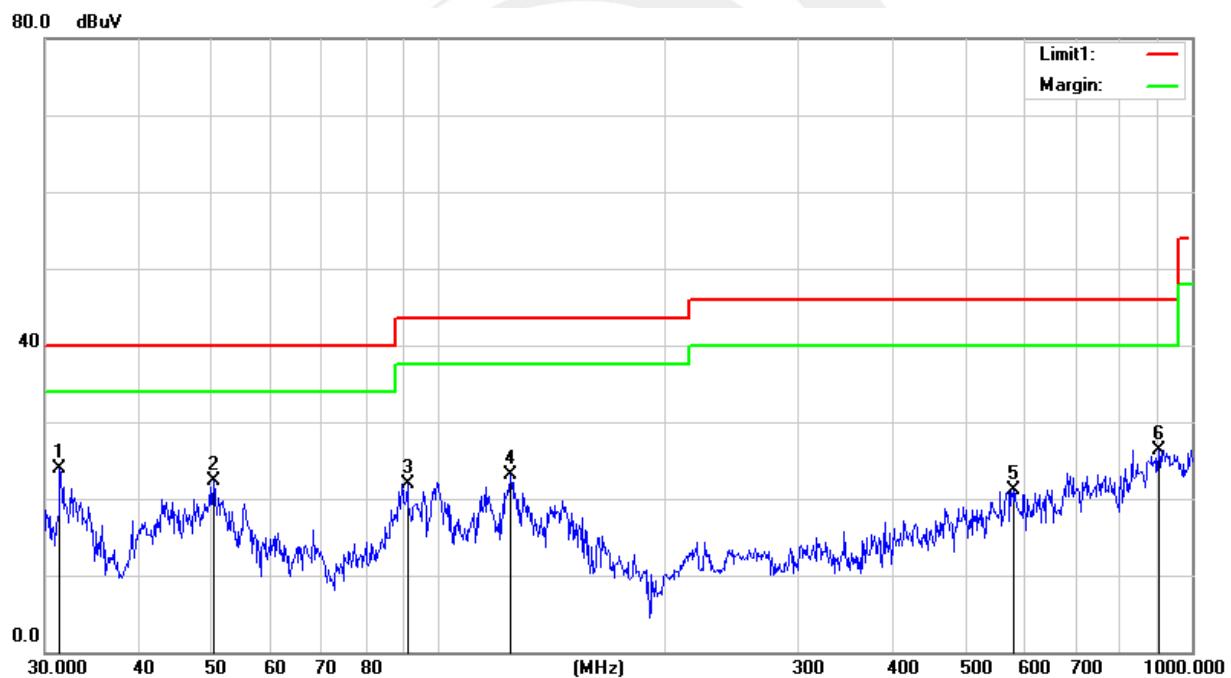

**3.2.9 TEST RESULTS (Above 1000 MHz)****Band I 5190-5230MHz**

Band I(5.19-5.23) GHz										
Frequency (MHz)	Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limit (dBuV/m)	Margin (dB)	Detector	Comment
	(dBuV)	(dB)	(dB)	(dB/m)	(dB)	(dB μ V/m)				
Low Channel (5190 MHz) Antenna A+B										
3258.31	44.18	44.70	6.70	28.20	-9.80	34.38	74.00	-39.62	PK	Vertical
3258.31	41.54	44.70	6.70	28.20	-9.80	31.74	54.00	-22.26	AV	Vertical
3256.17	43.81	44.70	6.70	28.20	-9.80	34.01	74.00	-39.99	PK	Horizontal
3256.17	42.14	44.70	6.70	28.20	-9.80	32.34	54.00	-21.66	AV	Horizontal
3995.70	39.65	44.20	7.90	29.70	-6.60	33.05	74.00	-40.95	PK	Vertical
3995.70	36.39	44.20	7.90	29.70	-6.60	29.79	54.00	-24.21	AV	Vertical
3991.31	39.77	44.20	7.90	29.70	-6.60	33.17	74.00	-40.83	PK	Horizontal
3991.31	36.94	44.20	7.90	29.70	-6.60	30.34	54.00	-23.66	AV	Horizontal
7229.27	37.48	43.50	11.40	35.50	3.40	40.88	74.00	-33.12	PK	Vertical
7229.27	34.20	43.50	11.40	35.50	3.40	37.60	54.00	-16.40	AV	Vertical
7226.14	37.04	43.50	11.40	35.50	3.40	40.44	74.00	-33.56	PK	Horizontal
7226.14	33.55	43.50	11.40	35.50	3.40	36.95	54.00	-17.05	AV	Horizontal
10380.00	38.84	44.50	13.80	38.80	8.10	46.94	74.00	-27.06	PK	Vertical
10380.00	35.64	44.50	13.80	38.80	8.10	43.74	54.00	-10.26	AV	Vertical
10380.00	37.94	44.50	13.80	38.80	8.10	46.04	74.00	-27.96	PK	Horizontal
10380.00	36.75	44.50	13.80	38.80	8.10	44.85	54.00	-9.15	AV	Horizontal
11025.68	33.79	43.60	14.30	39.50	10.20	43.99	74.00	-30.01	PK	Vertical
11025.68	30.78	43.60	14.30	39.50	10.20	40.98	54.00	-13.02	AV	Vertical
11026.08	33.23	43.60	14.30	39.50	10.20	43.43	74.00	-30.57	PK	Horizontal
11026.08	31.13	43.60	14.30	39.50	10.20	41.33	54.00	-12.67	AV	Horizontal
13292.03	32.78	42.60	15.90	38.90	12.20	44.98	74.00	-29.02	PK	Vertical
13292.03	28.95	42.60	15.90	38.90	12.20	41.15	54.00	-12.85	AV	Vertical
13291.33	32.99	42.60	15.90	38.90	12.20	45.19	74.00	-28.81	PK	Horizontal
13291.33	28.60	42.60	15.90	38.90	12.20	40.80	54.00	-13.20	AV	Horizontal



HighChannel (5230 MHz)Antenna A+B										
3250.09	44.45	44.70	6.70	28.20	-9.80	34.65	74.00	-39.35	PK	Vertical
3250.09	40.99	44.70	6.70	28.20	-9.80	31.19	54.00	-22.81	AV	Vertical
3253.23	44.64	44.70	6.70	28.20	-9.80	34.84	74.00	-39.16	PK	Horizontal
3253.23	40.99	44.70	6.70	28.20	-9.80	31.19	54.00	-22.81	AV	Horizontal
3988.39	40.14	44.20	7.90	29.70	-6.60	33.54	74.00	-40.46	PK	Vertical
3988.39	36.35	44.20	7.90	29.70	-6.60	29.75	54.00	-24.25	AV	Vertical
3985.08	39.16	44.20	7.90	29.70	-6.60	32.56	74.00	-41.44	PK	Horizontal
3985.08	36.70	44.20	7.90	29.70	-6.60	30.10	54.00	-23.90	AV	Horizontal
7217.21	37.63	43.50	11.40	35.50	3.40	41.03	74.00	-32.97	PK	Vertical
7217.21	33.85	43.50	11.40	35.50	3.40	37.25	54.00	-16.75	AV	Vertical
7236.02	37.11	43.50	11.40	35.50	3.40	40.51	74.00	-33.49	PK	Horizontal
7236.02	33.81	43.50	11.40	35.50	3.40	37.21	54.00	-16.79	AV	Horizontal
10460.00	39.64	44.50	13.80	38.80	8.10	47.74	74.00	-26.26	PK	Vertical
10460.00	36.51	44.50	13.80	38.80	8.10	44.61	54.00	-9.39	AV	Vertical
10460.00	39.14	44.50	13.80	38.80	8.10	47.24	74.00	-26.76	PK	Horizontal
10460.00	37.48	44.50	13.80	38.80	8.10	45.58	54.00	-8.42	AV	Horizontal
11030.16	33.59	43.60	14.30	39.50	10.20	43.79	74.00	-30.21	PK	Vertical
11030.16	30.00	43.60	14.30	39.50	10.20	40.20	54.00	-13.80	AV	Vertical
11031.60	32.96	43.60	14.30	39.50	10.20	43.16	74.00	-30.84	PK	Horizontal
11031.60	30.83	43.60	14.30	39.50	10.20	41.03	54.00	-12.97	AV	Horizontal
13296.79	32.25	42.60	15.90	38.90	12.20	44.45	74.00	-29.55	PK	Vertical
13296.79	29.54	42.60	15.90	38.90	12.20	41.74	54.00	-12.26	AV	Vertical
13282.67	32.21	42.60	15.90	38.90	12.20	44.41	74.00	-29.59	PK	Horizontal
13282.67	29.68	42.60	15.90	38.90	12.20	41.88	54.00	-12.12	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
3. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.



Band IV(5.755-5.795) GHz

Frequency (MHz)	Band IV(5.755-5.795) GHz										
	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dB μ V/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment	
Low Channel (5755 MHz) Antenna A+B											
3253.03	44.31	44.70	6.70	28.20	-9.80	34.51	74.00	-39.49	PK	Vertical	
3253.03	42.11	44.70	6.70	28.20	-9.80	32.31	54.00	-21.69	AV	Vertical	
3262.41	44.88	44.70	6.70	28.20	-9.80	35.08	74.00	-38.92	PK	Horizontal	
3262.41	42.05	44.70	6.70	28.20	-9.80	32.25	54.00	-21.75	AV	Horizontal	
3994.69	39.64	44.20	7.90	29.70	-6.60	33.04	74.00	-40.96	PK	Vertical	
3994.69	35.88	44.20	7.90	29.70	-6.60	29.28	54.00	-24.72	AV	Vertical	
3983.07	39.85	44.20	7.90	29.70	-6.60	33.25	74.00	-40.75	PK	Horizontal	
3983.07	36.97	44.20	7.90	29.70	-6.60	30.37	54.00	-23.63	AV	Horizontal	
7218.81	37.24	43.50	11.40	35.50	3.40	40.64	74.00	-33.36	PK	Vertical	
7218.81	34.62	43.50	11.40	35.50	3.40	38.02	54.00	-15.98	AV	Vertical	
7231.37	37.93	43.50	11.40	35.50	3.40	41.33	74.00	-32.67	PK	Horizontal	
7231.37	34.83	43.50	11.40	35.50	3.40	38.23	54.00	-15.77	AV	Horizontal	
10516.88	38.76	44.50	13.90	38.80	8.20	46.96	74.00	-27.04	PK	Vertical	
10516.88	35.89	44.50	13.90	38.80	8.20	44.09	54.00	-9.91	AV	Vertical	
10513.83	38.84	44.50	13.90	38.80	8.20	47.04	74.00	-26.96	PK	Horizontal	
10513.83	36.17	44.50	13.90	38.80	8.20	44.37	54.00	-9.63	AV	Horizontal	
11510.00	32.84	43.60	14.30	39.50	10.20	43.04	74.00	-30.96	PK	Vertical	
11510.00	31.04	43.60	14.30	39.50	10.20	41.24	54.00	-12.76	AV	Vertical	
11510.00	33.98	43.60	14.30	39.50	10.20	44.18	74.00	-29.82	PK	Horizontal	
11510.00	32.51	43.60	14.30	39.50	10.20	42.71	54.00	-11.29	AV	Horizontal	
13299.11	32.03	42.60	15.90	38.90	12.20	44.23	74.00	-29.77	PK	Vertical	
13299.11	29.04	42.60	15.90	38.90	12.20	41.24	54.00	-12.76	AV	Vertical	
13299.31	31.91	42.60	15.90	38.90	12.20	44.11	74.00	-29.89	PK	Horizontal	
13299.31	29.90	42.60	15.90	38.90	12.20	42.10	54.00	-11.90	AV	Horizontal	
15780.03	31.09	42.70	18.00	37.10	12.40	43.49	74.00	-30.51	PK	Vertical	
15780.03	27.59	42.70	18.00	37.10	12.40	39.99	54.00	-14.01	AV	Vertical	
15780.00	30.49	42.70	18.00	37.10	12.40	42.89	74.00	-31.11	PK	Horizontal	
15780.00	26.71	42.70	18.00	37.10	12.40	39.11	54.00	-14.89	AV	Horizontal	
17234.94	27.05	42.70	19.40	46.50	23.20	50.25	74.00	-23.75	PK	Vertical	
17234.94	25.80	42.70	19.40	46.50	23.20	49.00	54.00	-5.00	AV	Vertical	
17235.00	27.36	42.70	19.40	46.50	23.20	50.56	74.00	-23.44	PK	Horizontal	
17235.00	18.85	42.70	19.40	46.50	23.20	42.05	54.00	-11.95	AV	Horizontal	



Mid Channel (5795 MHz) Antenna A+B										
3260.57	45.03	44.70	6.70	28.20	-9.80	35.23	74.00	-38.77	PK	Vertical
3260.57	41.76	44.70	6.70	28.20	-9.80	31.96	54.00	-22.04	AV	Vertical
3254.53	44.37	44.70	6.70	28.20	-9.80	34.57	74.00	-39.43	PK	Horizontal
3254.53	41.16	44.70	6.70	28.20	-9.80	31.36	54.00	-22.64	AV	Horizontal
3987.56	38.85	44.20	7.90	29.70	-6.60	32.25	74.00	-41.75	PK	Vertical
3987.56	36.74	44.20	7.90	29.70	-6.60	30.14	54.00	-23.86	AV	Vertical
3996.39	38.76	44.20	7.90	29.70	-6.60	32.16	74.00	-41.84	PK	Horizontal
3996.39	36.27	44.20	7.90	29.70	-6.60	29.67	54.00	-24.33	AV	Horizontal
7216.64	37.92	43.50	11.40	35.50	3.40	41.32	74.00	-32.68	PK	Vertical
7216.64	34.09	43.50	11.40	35.50	3.40	37.49	54.00	-16.51	AV	Vertical
7230.65	37.44	43.50	11.40	35.50	3.40	40.84	74.00	-33.16	PK	Horizontal
7230.65	34.62	43.50	11.40	35.50	3.40	38.02	54.00	-15.98	AV	Horizontal
10623.05	39.11	44.50	13.80	38.80	8.10	47.21	74.00	-26.79	PK	Vertical
10623.05	37.02	44.50	13.80	38.80	8.10	45.12	54.00	-8.88	AV	Vertical
10640.33	38.74	44.50	13.80	38.80	8.10	46.84	74.00	-27.16	PK	Horizontal
10640.33	36.75	44.50	13.80	38.80	8.10	44.85	54.00	-9.15	AV	Horizontal
11590.00	32.84	43.60	14.30	39.50	10.20	43.04	74.00	-30.96	PK	Vertical
11590.00	31.74	43.60	14.30	39.50	10.20	41.94	54.00	-12.06	AV	Vertical
11590.00	34.42	43.60	14.30	39.50	10.20	44.62	74.00	-29.38	PK	Horizontal
11590.00	31.24	43.60	14.30	39.50	10.20	41.44	54.00	-12.56	AV	Horizontal
13283.24	32.36	42.70	18.00	37.10	12.40	44.76	74.00	-29.24	PK	Vertical
13283.24	29.09	42.70	18.00	37.10	12.40	41.49	54.00	-12.51	AV	Vertical
13281.63	31.57	42.70	18.00	37.10	12.40	43.97	74.00	-30.03	PK	Horizontal
13281.63	29.87	42.70	18.00	37.10	12.40	42.27	54.00	-11.73	AV	Horizontal
17474.92	31.09	41.80	19.20	42.80	20.20	51.29	74.00	-22.71	PK	Vertical
17474.92	27.59	41.80	19.20	42.80	20.20	47.79	54.00	-6.21	AV	Vertical
17475.08	29.92	41.80	19.20	42.80	20.20	50.12	74.00	-23.88	PK	Horizontal
17475.08	27.06	41.80	19.20	42.80	20.20	47.26	54.00	-6.74	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
3. Pre-scan both the SISO and MIMO mode, only the worst-case results were reported.



3.2.10 Band Edge

Band I (5.19-5.23)GHz

Band I&II(5.19-5.23)GHz										
Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dB μ V)	(dB)	(dB)	(dB/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	Type	
BW40MHz										
5150	38.69	44.20	8.98	31.60	-3.62	35.07	74	-38.93	Peak	Vertical
5150	31.11	44.20	8.98	31.60	-3.62	27.49	54	-26.51	AVG	Vertical
5150	39.69	44.20	8.98	31.60	-3.62	36.07	74	-37.93	Peak	Horizontal
5150	29.37	44.20	8.98	31.60	-3.62	25.75	54	-28.25	AVG	Horizontal
5350	43.49	44.20	9.35	31.60	-3.25	40.24	74	-33.76	Peak	Vertical
5350	27.89	44.20	9.35	31.60	-3.25	24.64	54	-29.36	AVG	Vertical
5350	38.20	44.20	9.35	31.60	-3.25	34.95	74	-39.05	Peak	Horizontal
5350	31.08	44.20	9.35	31.60	-3.25	27.83	54	-26.17	AVG	Horizontal

Band IV(5.755-5.795 GHz)

Band IV(5.755-5.795 GHz)										
Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dB μ V)	(dB)	(dB)	(dB/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	Type	
BW40MHz										
5725	39.90	44.20	10.00	32.00	-2.20	37.70	74	-36.30	Peak	Vertical
5725	30.44	44.20	10.00	32.00	-2.20	28.24	54	-25.76	AVG	Vertical
5725	38.08	44.20	10.00	32.00	-2.20	35.88	74	-38.12	Peak	Horizontal
5725	30.06	44.20	10.00	32.00	-2.20	27.86	54	-26.14	AVG	Horizontal
5850	43.95	44.20	10.20	32.00	-2.00	41.95	74	-32.05	Peak	Vertical
5850	27.57	44.20	10.20	32.00	-2.00	25.57	54	-28.43	AVG	Vertical
5850	39.65	44.20	10.20	32.00	-2.00	37.65	74	-36.35	Peak	Horizontal
5850	29.57	44.20	10.20	32.00	-2.00	27.57	54	-26.43	AVG	Horizontal



4. CONDUCTED SPURIOUS EMISSIONS AND BANDEDGE

4.1 APPLIED PROCEDURES / LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

4.1.1 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold


For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5700 to 5725 MHz Upper Band Edge: 5850 to 5870 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

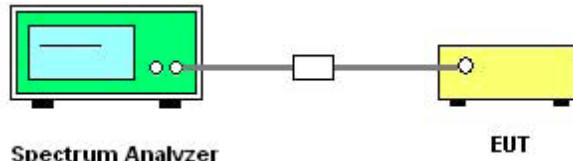

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1000 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

Note: 1. Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.


2. A corrected factor $10 \times \log_2$ has been added during test, where 2 is the number of outputs.

Band I (5.19-5.23GHz) Antenna B

TX Spurious Emissions/40MHz CH 38

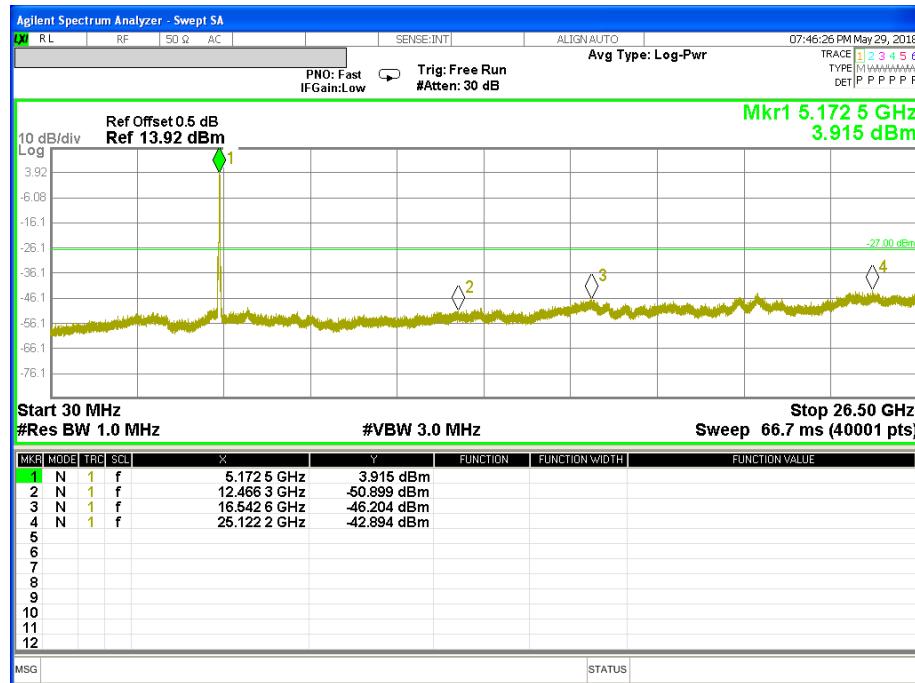


TX Spurious Emissions/40MHz CH 46

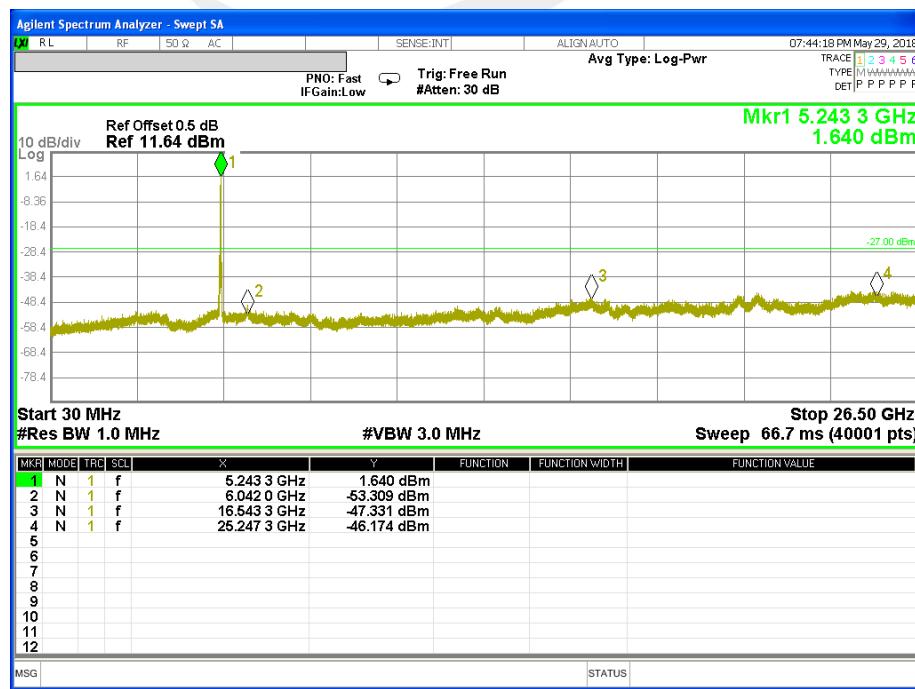




Band edge

TX Band edge/40MHz CH 38

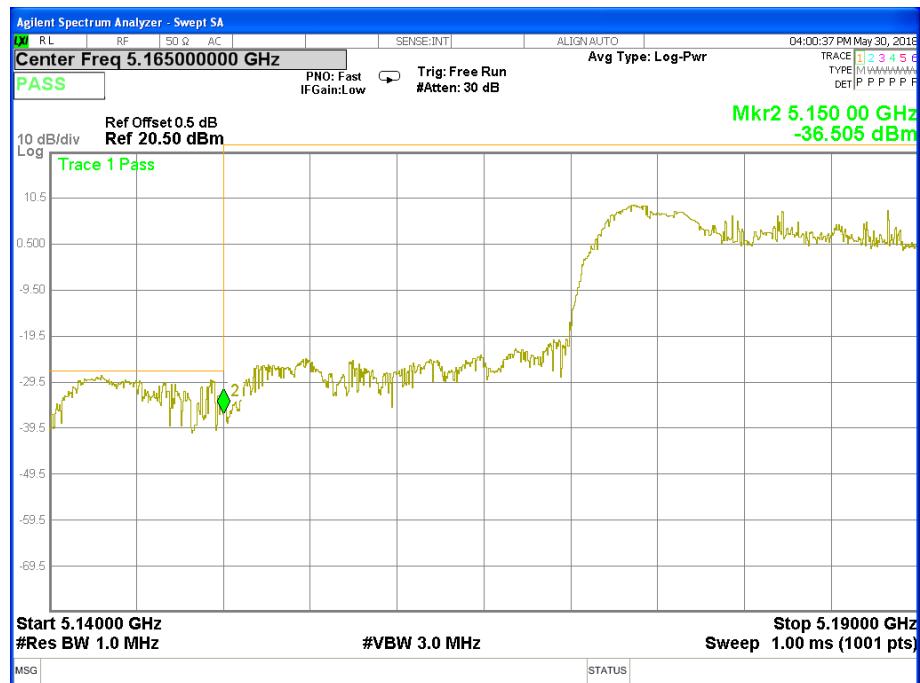


TX Band edge/40MHz CH 46

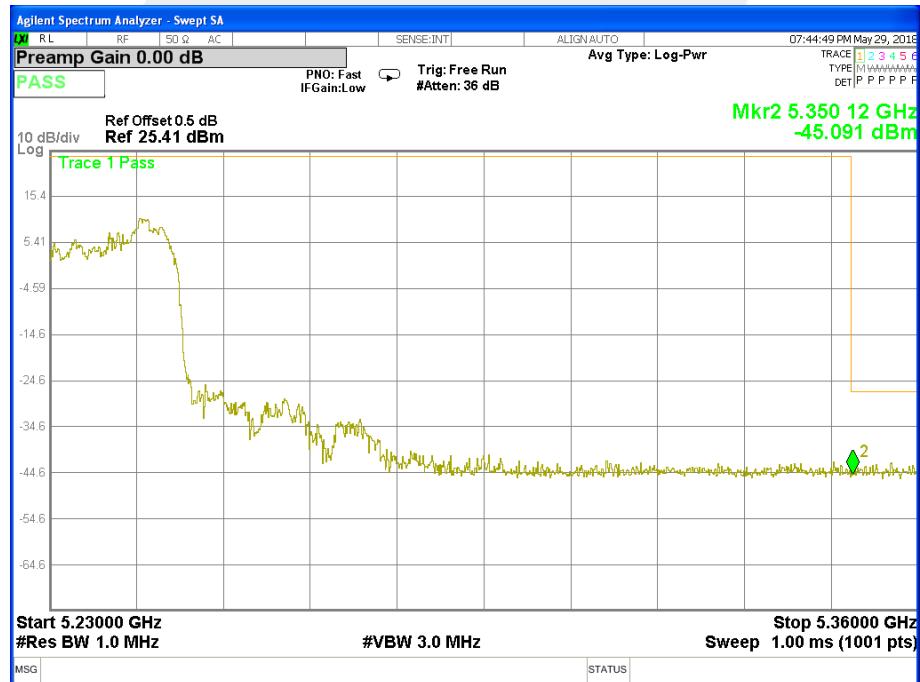




Band IV (5.755-5.795GHz) Antenna B

TX Spurious Emissions/40MHz CH 151

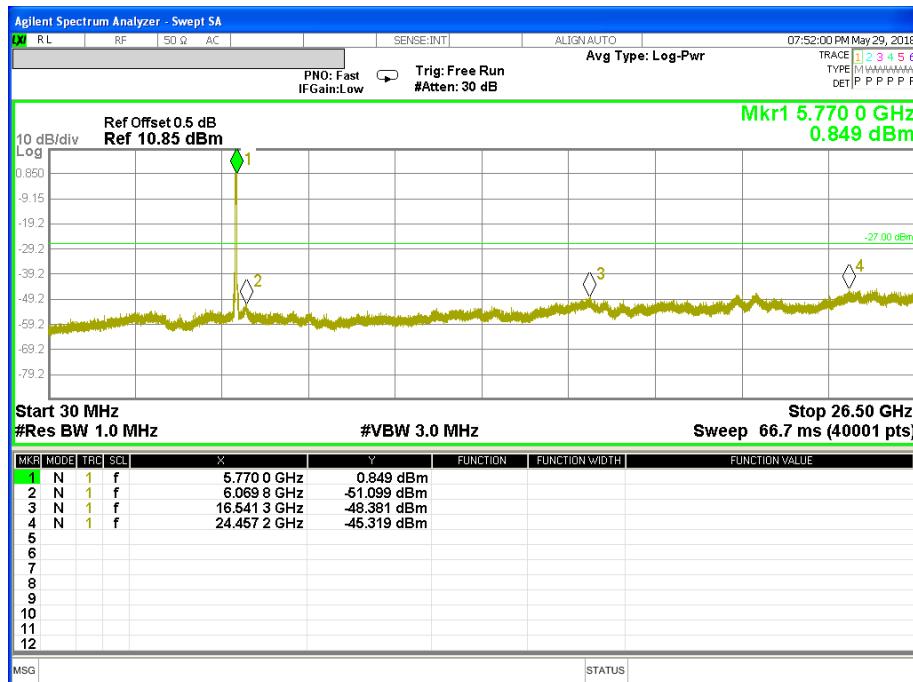

TX Spurious Emissions/40MHz CH 159

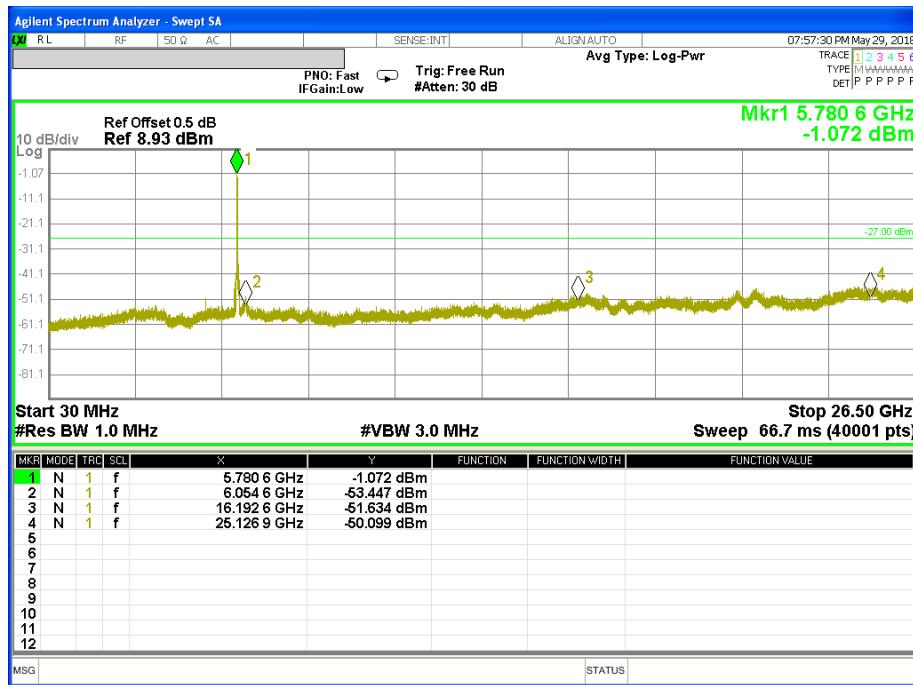



Band edge

TX Band edge/40MHz CH 151



TX Band edge/40MHz CH 159





5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.755-5.795 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.1 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB D02 General UNII Test Procedures New Rules v01r03.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW $\geq 1/T$, where T is defined in section II.B.I.a).
- b) Set VBW ≥ 3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.



5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

NOTE: Antenna B Power > Antenna A Power, Both antenna A and B have been test, only show the worst data of Antenna B

Band I (5.19-5.23GHz)

5190-5230MHz					
Frequency	Power Density A(dBm)	Power Density B(dBm)	Power Density Total(dBm)	Limit	Result
40MHz					
5190	-0.133	4.864	6.058	10.49	PASS
5230	-0.074	2.713	4.550	10.49	PASS


Band IV (5.755-5.795GHz)

5755-5795MHz					
Frequency	Power Density A(dBm)	Power Density B(dBm)	Power Density Total(dBm)	Limit	Result
40MHz					
5755	-1.031	-0.894	2.048	29.49	PASS
5795	-1.117	-0.928	1.989	29.49	PASS




Band I (5.19-5.23GHz) 40MHz Antenna B

PSD /40MHz Channel 38

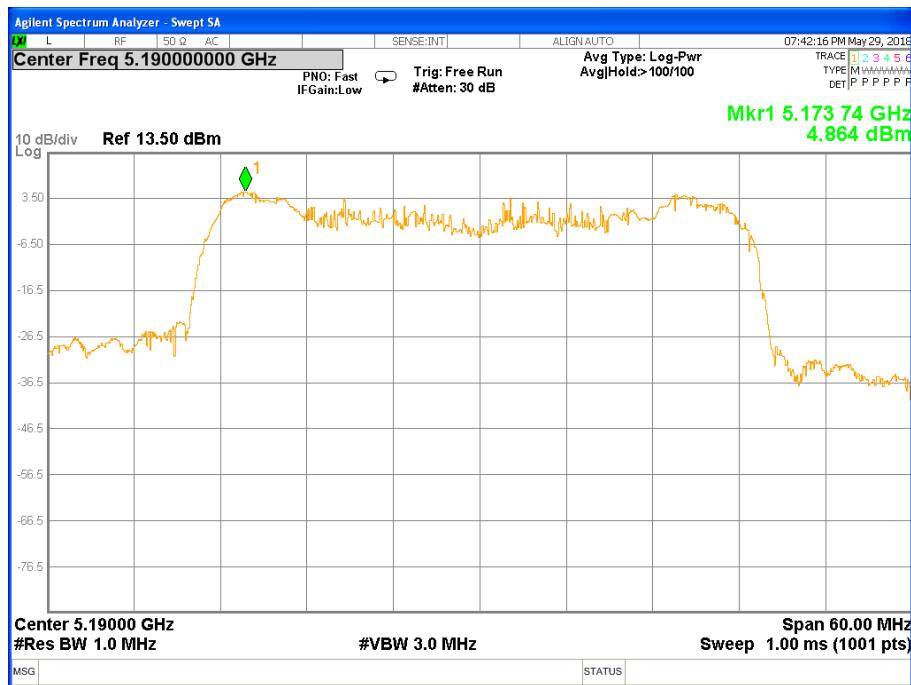

PSD /40MHz Channel 46

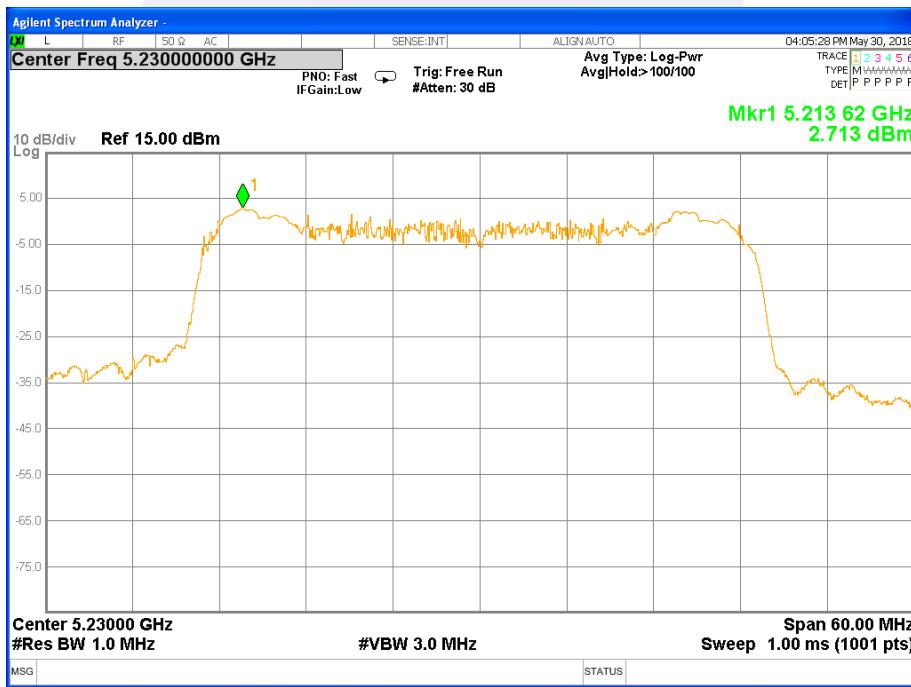



Band IV (5.755-5.795GHz) 40MHz Antenna B

PSD/40MHz Channel 151



PSD/40MHz Channel 159



6. BANDWIDTH MEASUREMENT

6.1 EMISSION BANDWIDTH (EBW) 26 BANDWIDTH PROCEDURES / LIMIT

See list of measuring instruments of this test report.


6.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > =RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

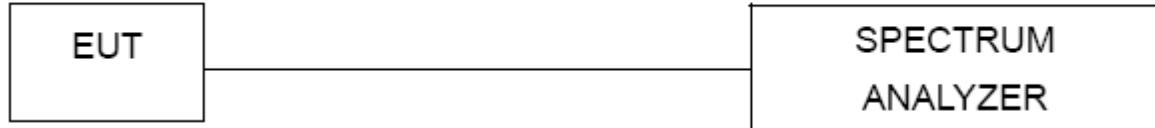

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.5 TEST RESULTS

Note: Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.

Band I (5.190-5.230GHz) 26dB Bandwidth

Frequency (MHz)	40MHz 26dB Bandwidth(MHz)		Pass/Fail
	ANTENNA -A	ANTENNA -B	
5190	38.54	38.68	Pass
5230	38.62	38.85	Pass

Note: N/A, 26 db bandwidth measurement limit only embodied in the report.

Band IV (5.755-5.795GHz) 26dB Bandwidth

Frequency (MHz)	40MHz 26dB Bandwidth(MHz)		Pass/Fail
	ANTENNA -A	ANTENNA -B	
5755	38.53	38.72	Pass
5795	38.59	38.81	Pass

Note: N/A, 26 db bandwidth measurement limit only embodied in the report.

Note: The test plot see next section.



6.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth:

6.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v01r03.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.

2. Set span = 1.5 times to 5.0 times the OBW.

3. Set RBW = 1 % to 5 % of the OBW

4. Set VBW $\geq 3 \cdot$ RBW

5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

6. Use the 99 % power bandwidth function of the instrument (if available).

7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.2.2 DEVIATION FROM STANDARD

No deviation.

6.2.3 TEST SETUP



6.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.2.5 TEST RESULTS

Note: Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.

Band I (5.190-5.230GHz) 99% Bandwidth



Frequency (MHz)	40MHz 99% Bandwidth(MHz)		Pass/Fail
	ANTENNA -A	ANTENNA -B	
5190	37.207	37.236	Pass
5230	37.284	37.303	Pass



Note: N/A, 99% bandwidth measurement limit only embodied in the report.

Band IV (5.755-5.795GHz) 99% Bandwidth

Frequency (MHz)	40MHz 99% Bandwidth(MHz)		Pass/Fail
	ANTENNA -A	ANTENNA -B	
5755	37.205	37.212	Pass
5795	37.153	37.186	Pass

Note: N/A, 99% bandwidth measurement limit only embodied in the report.

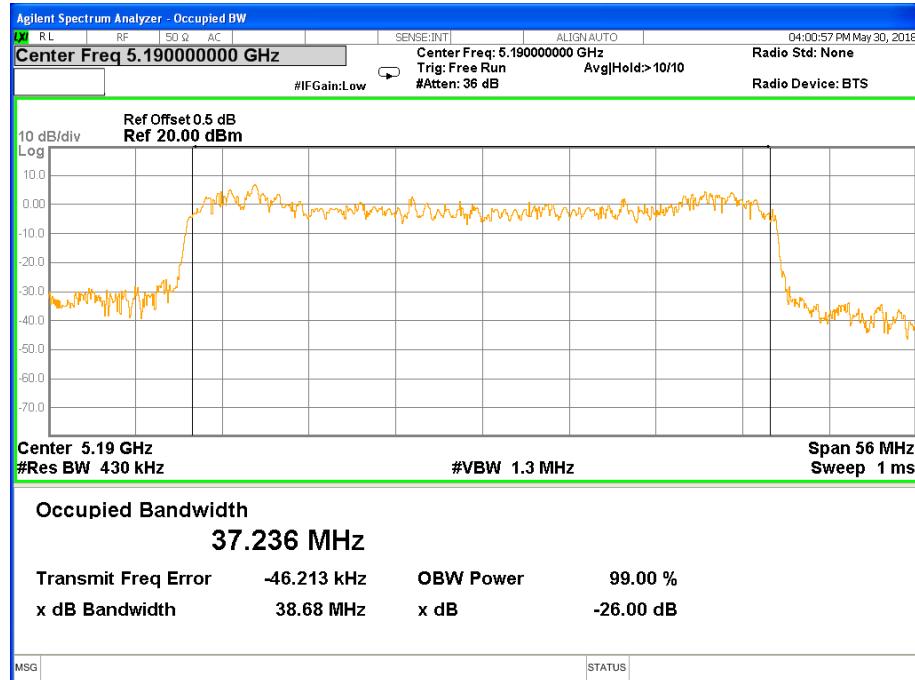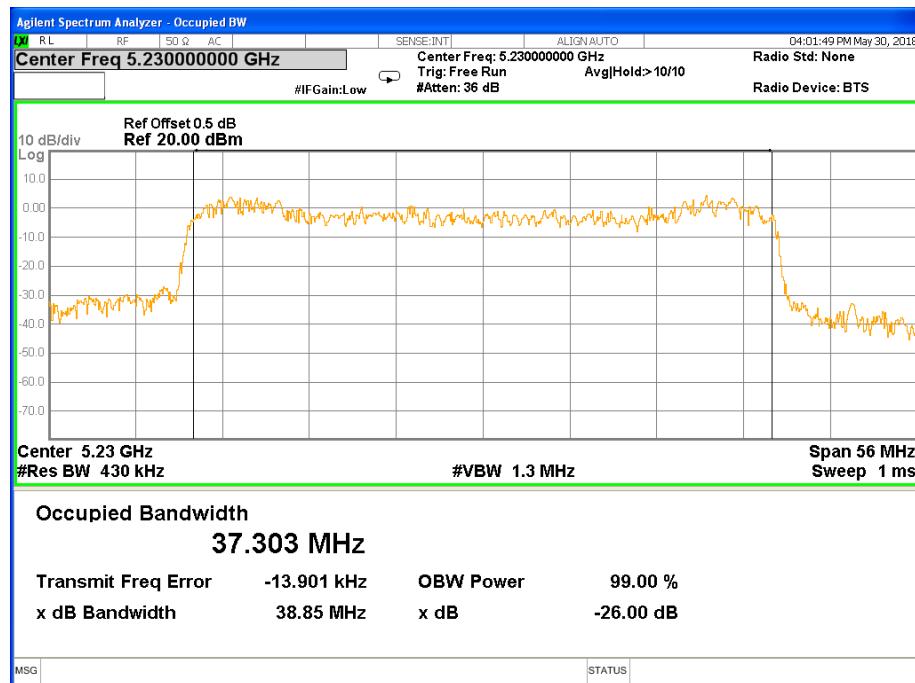**Band I (5.190-5.230GHz) 40MHz 26 dB &99% Bandwidth Antenna B****26 dB &99% Bandwidth/40MHz Channel 38****26 dB &99% Bandwidth/40MHz Channel 46**

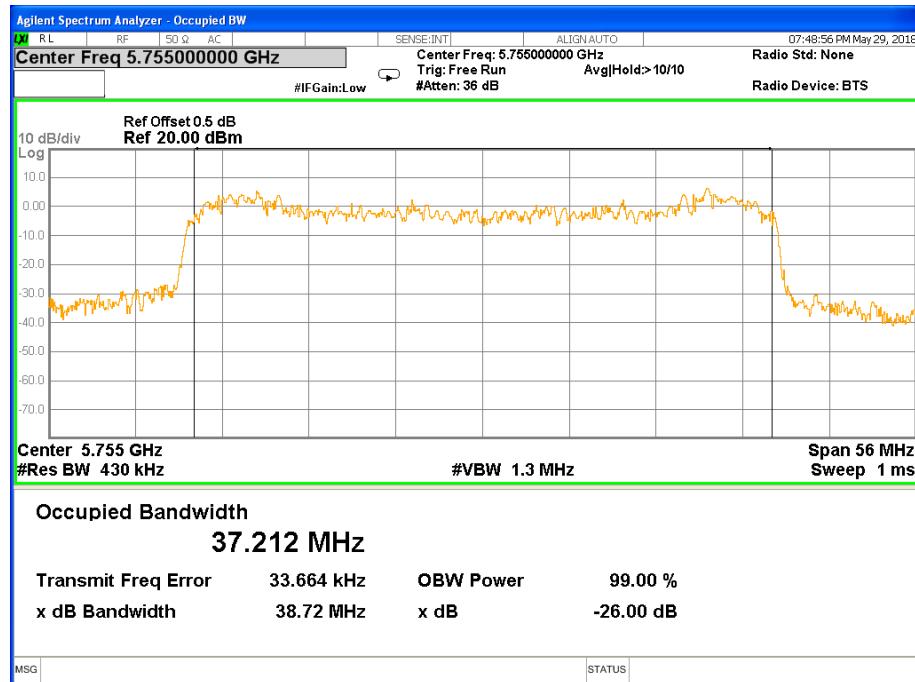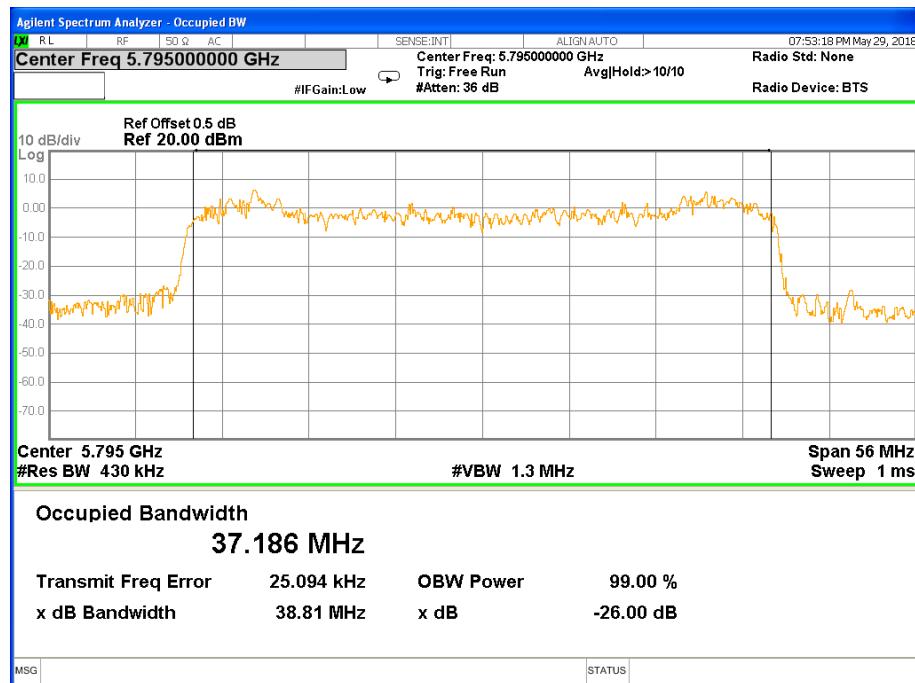**Band IV (5.755-5.795GHz) 40MHz 26 dB &99% Bandwidth Antenna B****26 dB &99% Bandwidth /40MHz Channel 151****26 dB &99% Bandwidth /40MHz Channel 159**



6.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

6.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v01r03.
- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.2 DEVIATION FROM STANDARD

No deviation.

6.3.3 TEST SETUP



6.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.3.5 TEST RESULTS


Note: Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.

Band IV (5.755-5.795GHz)6dB Bandwidth


Frequency (MHz)	40MHz 6dB Bandwidth(MHz)		Pass/Fail
	ANTENNA -A	ANTENNA -B	
5755	33.82	33.95	Pass
5795	35.37	35.50	Pass

Note: N/A, 6dB bandwidth measurement limit only embodied in the report.

Band IV (5.755-5.795GHz) 40MHz 6 dB Bandwidth Antenna B 6 dB Bandwidth /40MHz Channel 151

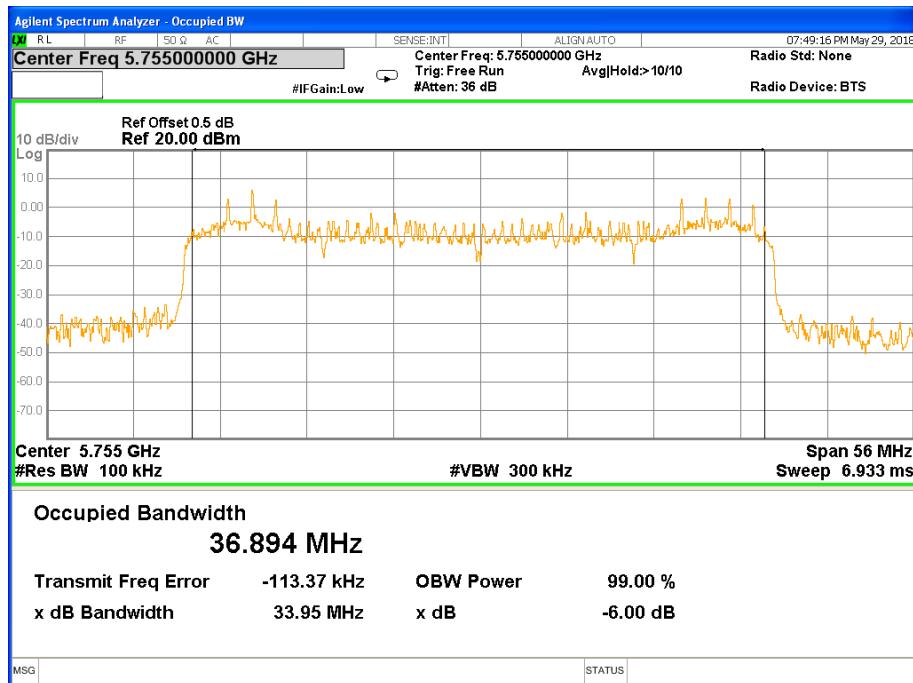

6 dB Bandwidth /40MHz Channel 159

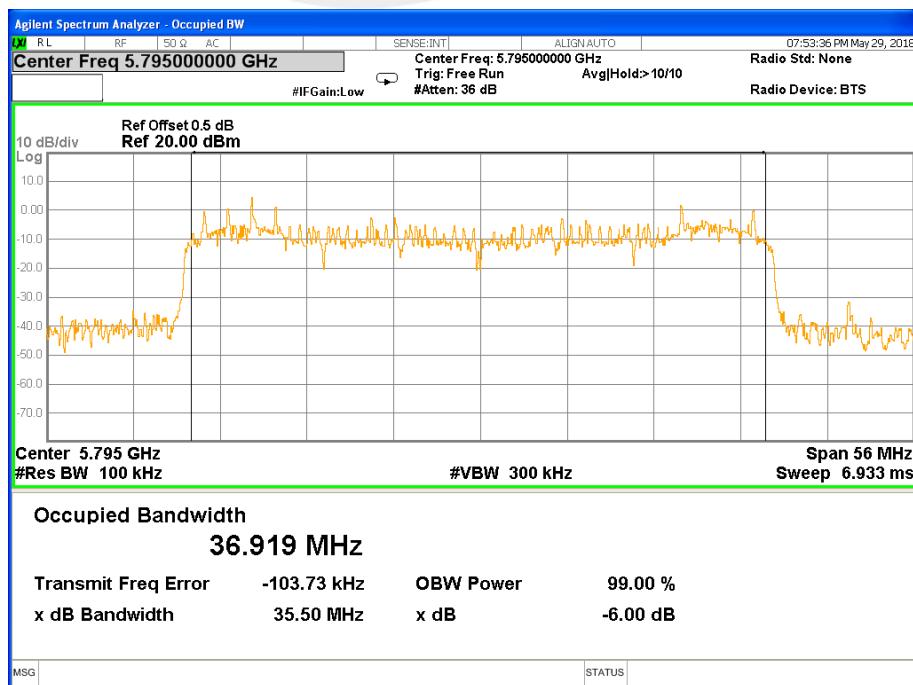



7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or $11 \text{ dBm} + 10 \log (26 \text{ dB emission bandwidth})$	5250-5350 5470-5725	
		1 watt	5725-5825	

1. For devices in the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
3. The maximum conducted output power shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information

RSS-247 Issue 2, February 2017


Section	Test Item	Limit	Frequency Range (MHz)	Result
6.2.1.1	Peak Output Power	200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz	5150-5250	PASS
6.2.2.1		The lesser of 250 mW or $11 \text{ dBm} + 10 \log (26 \text{ dB emission bandwidth})$	5250-5350	
6.2.3.1			5470-5725	
6.2.4.1		1 watt	5725-5825	

7.1.1 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

7.1.2 DEVIATION FROM STANDARD

No deviation.

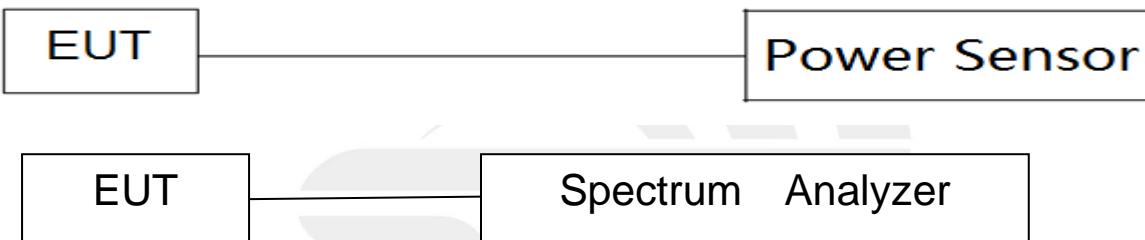7.1.3 TEST SETUP**7.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.



7.1.5 TEST RESULTS

NOTE: 1. Antenna B Power > Antenna A Power, Both antenna A and B have been test

Band I (5.19-5.23GHz)

Band I (5.19-5.23GHz)								
Test Channel	Frequency (MHz)	PK Power A(dBm)	PK Power B(dBm)	PK Power Total(dBm)	AV Power (dBm)	AV Power B(dBm)	AV Power Total(dBm)	LIMIT (dBm)
40MHz								
38	5190	0.18	5.13	6.34	0.36	4.98	6.27	23.47
46	5230	0.46	3.74	5.41	0.53	3.41	5.21	23.47

Note:

1. For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 0.25 W. The antenna gain is 6.51dBi, greater than 6dBi, the limit will reduced 0.51dBm, so the power limit is 23.47dBm.

NOTE: 1. Antenna B Power > Antenna A Power, Both antenna A and B have been test

Band IV (5.725-5.85GHz)

Band IV (5.725-5.85GHz)								
Test Channel	Frequency (MHz)	PK Power A(dBm)	PK Power B(dBm)	PK Power Total(dBm)	AV Power (dBm)	AV Power B(dBm)	AV Power Total(dBm)	LIMIT (dBm)
802.11ac(HT40)								
151	5755	1.92	1.96	4.95	-0.21	0.14	2.98	29.49
159	5795	0.65	0.87	3.77	-1.23	-1.39	1.70	29.49

Note:

1. For the band 5.745-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W. The antenna gain is 6.51dBi, greater than 6dBi, the limit will reduced 0.51dBm, so the power limit is 29.49dBm.



8. AUTOMATICALLY DISCONTINUE TRANSMISSION

8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission





9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 and RSS-Gen Issue 5 requirement: For intentional device, according to 15.203 and RSS-Gen Issue 5: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



9.2 EUT ANTENNA

The EUT antenna is external Antenna. It comply with the standard requirement.



APPENDIX - PHOTOS OF TEST SETUP

Radiated Measurement Photos

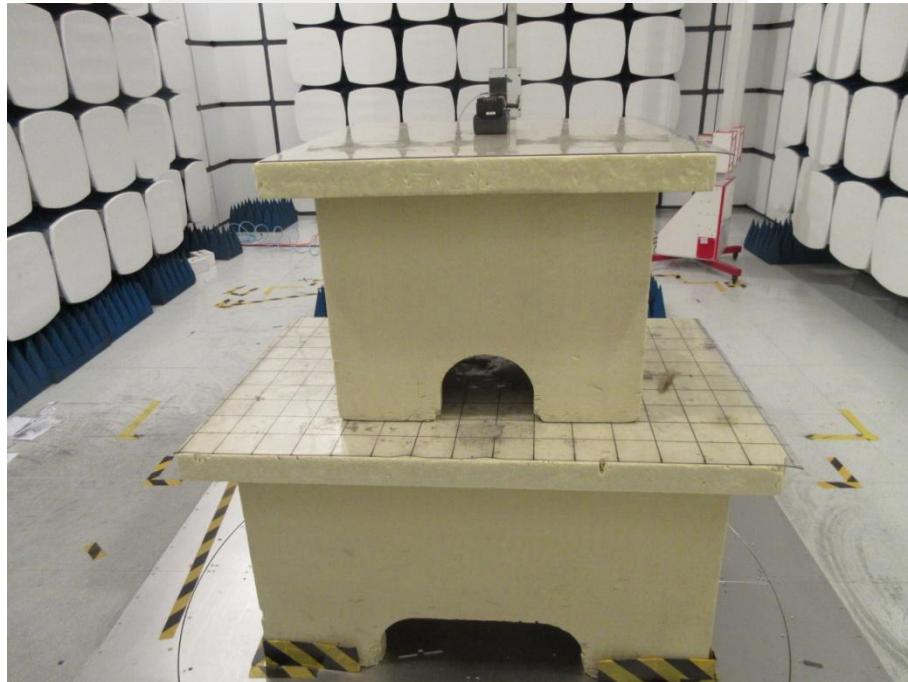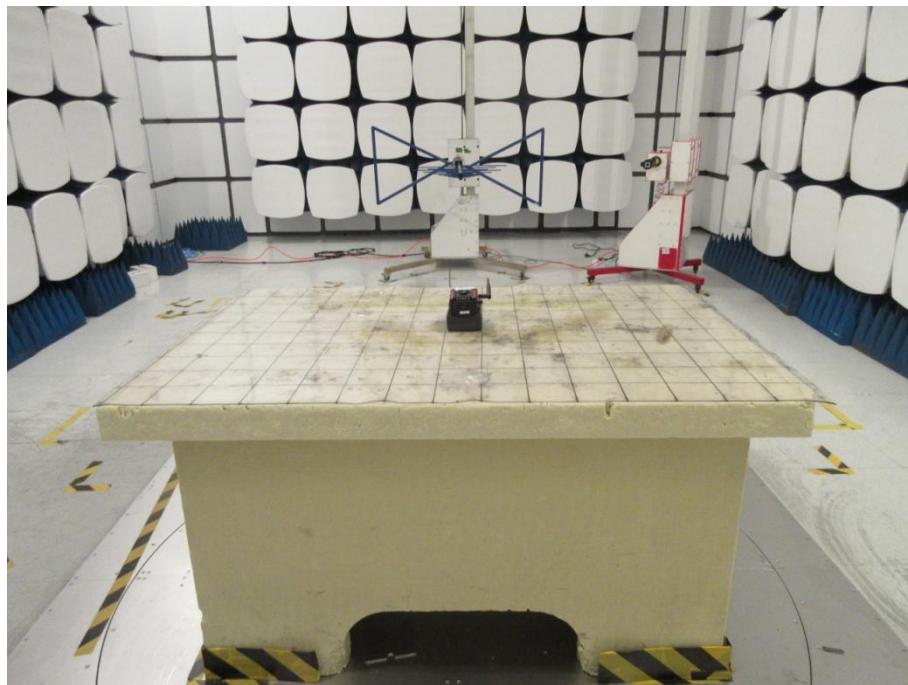

Conducted Measurement Photos



*** END OF THE REPORT ***