

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Swiss Tech 200W Power Station with wireless pad

Model No.: 33649

Trademark: N/A

FCC ID: 2AMI2-33649

Report No.: E01A22110241F00601

Issue Date: January 05, 2023

Prepared for

Hangzhou Great Star Industrial Co., Ltd.

**No.35 Jiuhuan Road, Jianggan District, Hangzhou, Zhejiang Province,
China**

Prepared by

Dong Guan Anci Electronic Technology Co., Ltd.

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake
Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr.,
China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Electronic Technology Co., Ltd.**

VERIFICATION OF COMPLIANCE

Applicant:	Hangzhou Great Star Industrial Co., Ltd. No.35 Jiuhuan Road, Jianggan District, Hangzhou, Zhejiang Province, China
Manufacturer:	Hangzhou Great Star Industrial Co., Ltd. No.35 Jiuhuan Road, Jianggan District, Hangzhou, Zhejiang Province, China
Factory:	Hangzhou Great Star Industrial Co., Ltd. No.35 Jiuhuan Road, Jianggan District, Hangzhou, Zhejiang Province, China
Product Description:	Swiss Tech 200W Power Station with wireless pad
Trade Mark:	N/A
Model Number:	33649

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.209(2022).

Date of Test : December 27, 2022 to January 05, 2023

Duke Liu

Prepared by : _____
Duke Liu/Editor

Tiger Xu

Reviewer &
Authorized Signer : _____
Tiger Xu/ Supervisor

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E01A22110241F00601

Table of Contents

1 GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT(S)	5
1.3 TEST METHODOLOGY	5
1.4 SPECIAL ACCESSORIES	5
1.5 EQUIPMENT MODIFICATIONS	5
1.6 TEST FACILITY	5
2 SYSTEM TEST CONFIGURATION.....	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 TEST PROCEDURE	6
2.4 CONFIGURATION OF TESTED SYSTEM.....	7
3 SUMMARY OF TEST RESULTS.....	7
4 TEST SYSTEM UNCERTAINTY.....	8
5 CONDUCTED EMISSIONS TEST	9
5.1 MEASUREMENT PROCEDURE	9
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	9
5.3 MEASUREMENT EQUIPMENT USED.....	9
5.4 CONDUCTED EMISSION LIMIT	9
5.5 MEASUREMENT RESULT	10
5.6 CONDUCTED MEASUREMENT PHOTO.....	13
6 RADIATED EMISSION TEST.....	14
6.1 MEASUREMENT PROCEDURE	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
6.3 MEASUREMENT EQUIPMENT USED.....	15
6.4 RADIATED EMISSION LIMIT	15
6.5 MEASUREMENT RESULT	17
6.6 RADIATED MEASUREMENT PHOTOS.....	23
7 20DB BANDWIDTH.....	24
7.1 20dB BANDWIDTH LIMIT	24
7.2 TEST INSTRUMENTS.....	24
7.3 TEST PROCEDURE	24
7.4 TEST SETUP.....	24
7.5 TEST RESULT	24
8 ANTENNA APPLICATION	26
8.1 ANTENNA REQUIREMENT	26
8.2 RESULT	26

1 General Information

1.1 Product Description

Characteristics	Description
Product Name	Swiss Tech 200W Power Station with wireless pad
Model number	33649
Operation Mode	Wireless Charging
Input Rating	DC 12V-26V, 3A
Power Supply	DC 15V from POWER SUPPLY
Operating Frequency	139.67KHz
Wireless Charging Power	5W
Modulation Technique	ASK
Antenna Type	Induction coil
Sample receipt date	December 27, 2022

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: 2AM12-33649 filing to comply with the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description	:	
Name of Firm	:	Dong Guan Anci Electronic Technology Co., Ltd.
Site Location	:	1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech Industrial Development Zone, Dongguan City, evelopment Zone, Dongguan City, Guangdong Pr., China.

2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

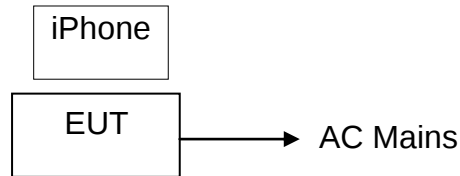


Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	Swiss Tech 200W Power Station with wireless pad	N/A	33649	2AMI2-33649	EUT
2.	iphone	Apple	A2176	N/A	Support Equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.

3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.209	Radiated Emission	Compliant
§2.1049	20dB Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

4 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%

5 Conducted Emissions Test

5.1 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.2 Test SET-UP (Block Diagram of Configuration)

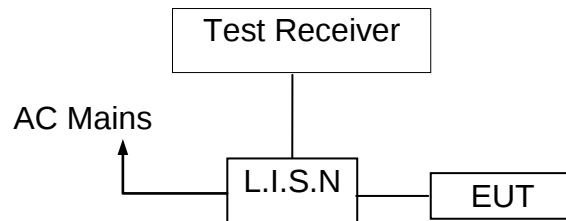

5.3 Measurement Equipment Used

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2023-05-12
10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2023-05-12
RF Cable	N/A	N/A	2#	2023-05-12
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2023-05-12
1# Shielded Room	chengyu	8m*4m*3.3m	N/A	2024-11-12
Test Software	Farad	EZ-EMC (Ver.ANCI-3A1)	N/A	N/A

5.4 Conducted Emission Limit

Conducted Emission

Frequency(MHz)

Quasi-peak

Average

0.15-0.5

66-56

56-46

0.5-5.0

56

46

5.0-30.0

60

50

Note: 1. The lower limit shall apply at the transition frequencies


2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.5 Measurement Result

Operation Mode:	TX	Test Date :	2022/12/27
Frequency Range:	0.15MHz~30MHz	Temperature :	28℃
Test Result:	PASS	Humidity :	65 %
Test By:	Best		


Pass

We pretested modes (Wireless Charging (5W), for EUT. The worst test data see follow the table.

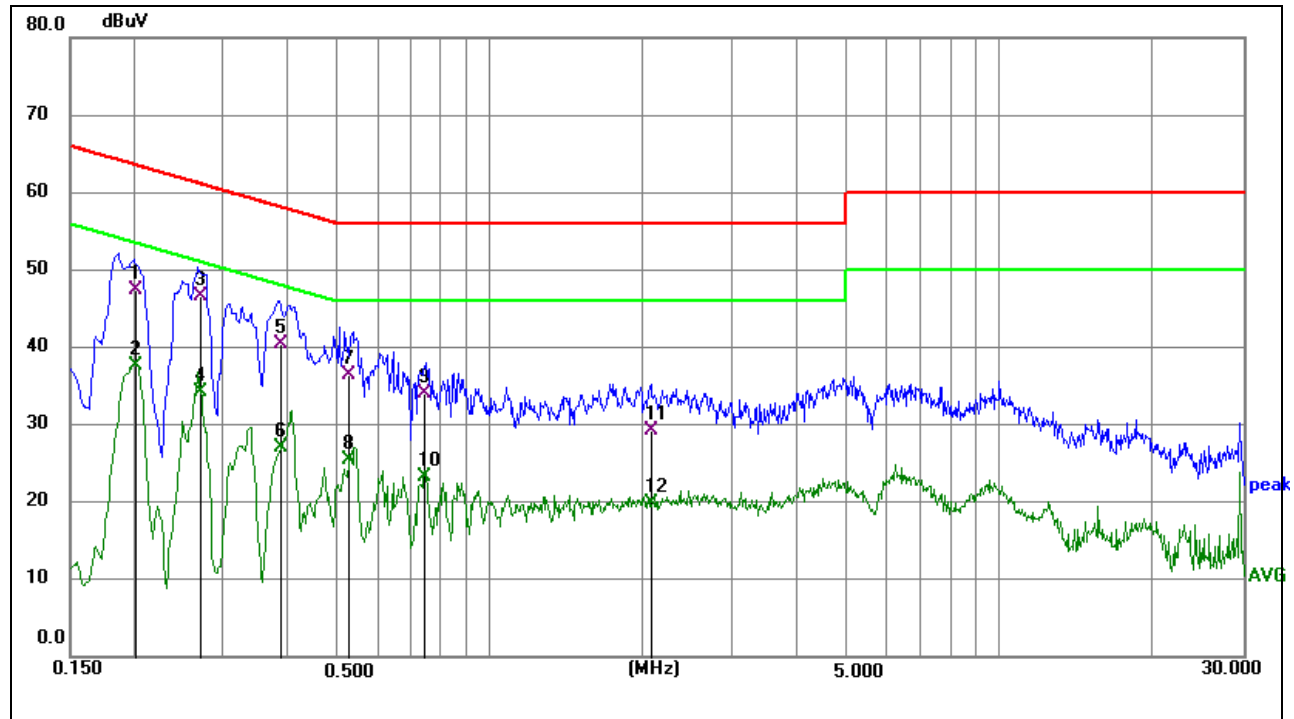Test mode: Wireless Charging 5W

Site:	843	Phase:	L1	Temperature(C):	26(C)
Limit:	FCC Part 18 C Conduction(QP)			Humidity(%):	60%
EUT:	Swiss Tech 200W Power Station with wireless pad	Test Time:		2022/12/27 15:29:51	
M/N.:	33649	Power Rating:	AC 120V/60Hz		
Mode:	Wireless Charging 5W	Test Engineer:	Jack		
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.2023	37.80	9.68	47.48	63.52	-16.04	QP	
2	0.2023	27.85	9.68	37.53	53.52	-15.99	AVG	
3	0.2712	36.98	9.53	46.51	61.08	-14.57	QP	
4	0.2712	24.74	9.53	34.27	51.08	-16.81	AVG	
5	0.3910	30.57	9.78	40.35	58.04	-17.69	QP	
6	0.3910	17.21	9.78	26.99	48.04	-21.05	AVG	
7	0.5301	26.56	9.87	36.43	56.00	-19.57	QP	
8	0.5301	15.53	9.87	25.40	46.00	-20.60	AVG	
9	0.7474	24.25	9.67	33.92	56.00	-22.08	QP	
10	0.7474	13.63	9.67	23.30	46.00	-22.70	AVG	
11	2.0684	19.26	9.99	29.25	56.00	-26.75	QP	
12	2.0684	9.81	9.99	19.80	46.00	-26.20	AVG	

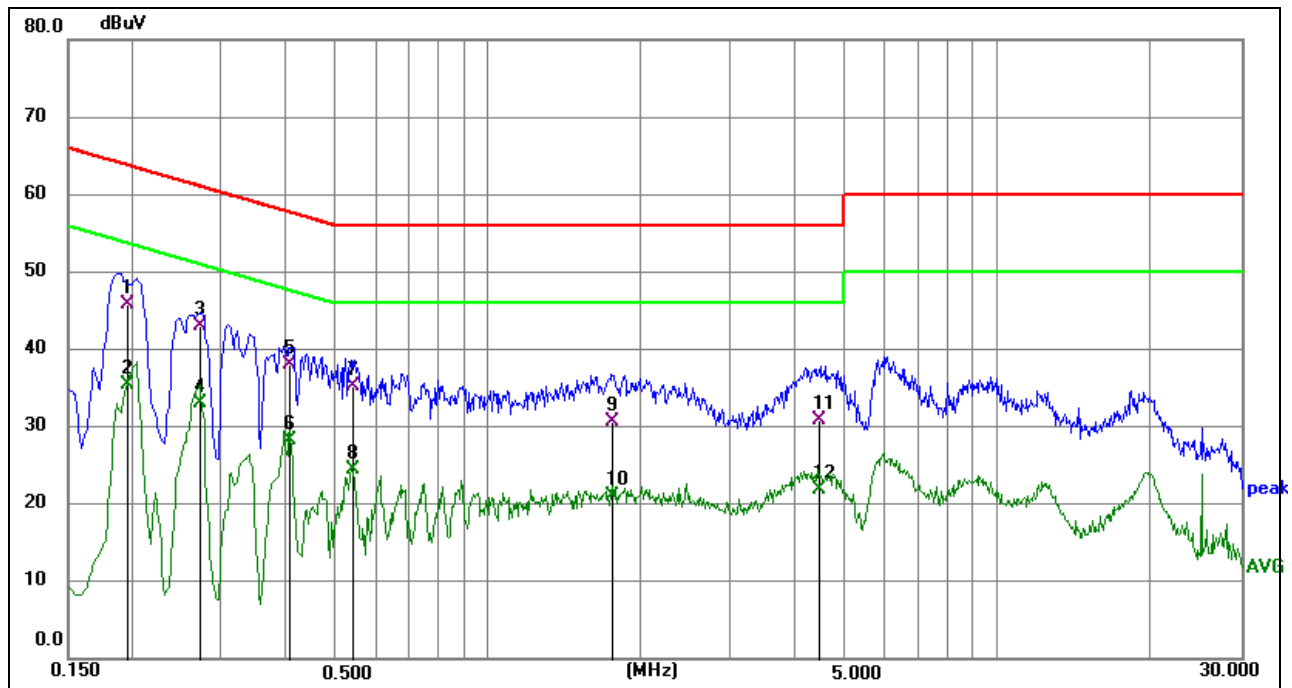

Site:	843	Phase:	N	Temperature(C):	26(C)
Limit:	FCC Part 18 C Conduction(QP)			Humidity(%):	60%
EUT:	Swiss Tech 200W Power Station with wireless pad	Test Time:	2022/12/27 15:34:01		
M/N.:	33649	Power Rating:	AC 120V/60Hz		
Mode:	Wireless Charging 5W	Test Engineer:	Jack		
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1972	36.15	9.59	45.74	63.73	-17.99	QP	
2	0.1972	25.73	9.59	35.32	53.73	-18.41	AVG	
3	0.2720	33.31	9.74	43.05	61.06	-18.01	QP	
4	0.2720	23.20	9.74	32.94	51.06	-18.12	AVG	
5	0.4074	28.19	9.87	38.06	57.70	-19.64	QP	
6	0.4074	18.27	9.87	28.14	47.70	-19.56	AVG	
7	0.5438	25.58	9.73	35.31	56.00	-20.69	QP	
8	0.5438	14.69	9.73	24.42	46.00	-21.58	AVG	
9	1.7602	20.66	10.02	30.68	56.00	-25.32	QP	
10	1.7602	10.94	10.02	20.96	46.00	-25.04	AVG	
11	4.4889	20.77	9.99	30.76	56.00	-25.24	QP	
12	4.4889	11.82	9.99	21.81	46.00	-24.19	AVG	

5.6 Conducted Measurement Photo




6 Radiated Emission Test

6.1 Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

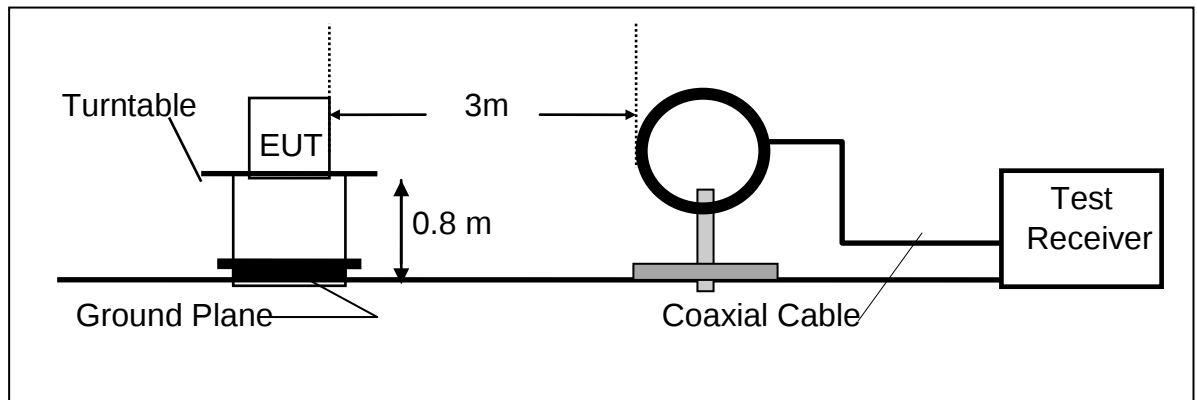

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

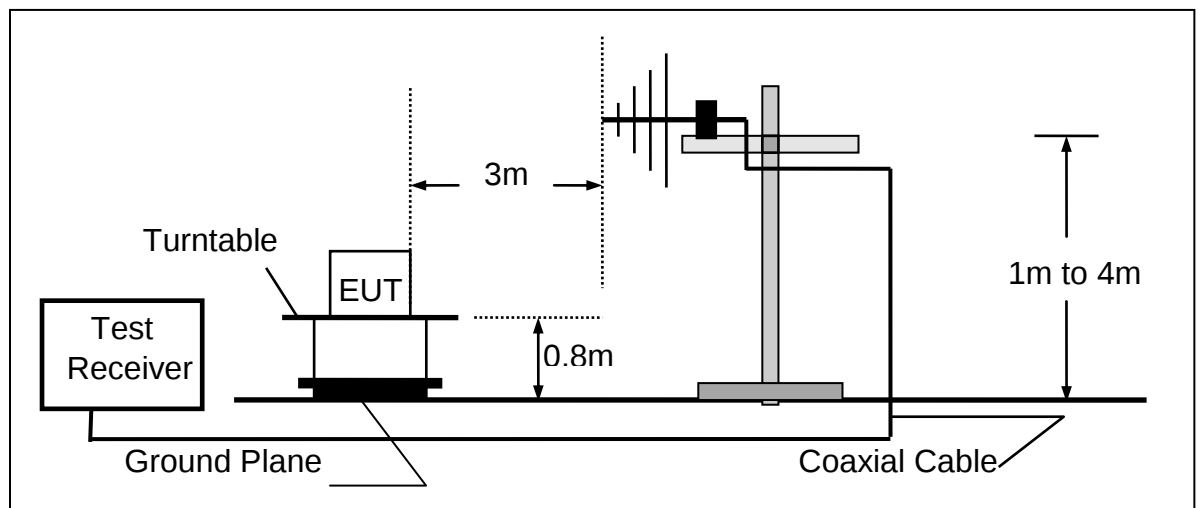

6.3 Measurement Equipment Used

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2022/11/12
2.	Pre-Amplifier	HP	8447D	2727A06172	2023-05-12
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2023-05-12
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2022/11/12
5.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-2m	N/A	2022/11/12
6.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-0.3m	N/A	2022/11/12
7.	RF Cable	N/A	N/A	6#	2023-05-12
8.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2023-05-12
9.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

6.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	$2400 / F(\text{KHz})$	300m	$10000 * 2400/F(\text{KHz})$	$20\log 2400/F(\text{KHz}) + 80$
0.490 – 1.705	$24000 / F(\text{KHz})$	30m	$100 * 24000/F(\text{KHz})$	$20\log 24000/F(\text{KHz}) + 40$
1.705 – 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 – 88.0	100	3m	100	$20\log 100$
88.0 – 216.0	150	3m	150	$20\log 150$
216.0 – 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$


15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

6.5 Measurement Result


We pretested modes(Wireless Charging(5W)) for EUT. The worst mode (Wireless Charging (5W))test data see follow the table.

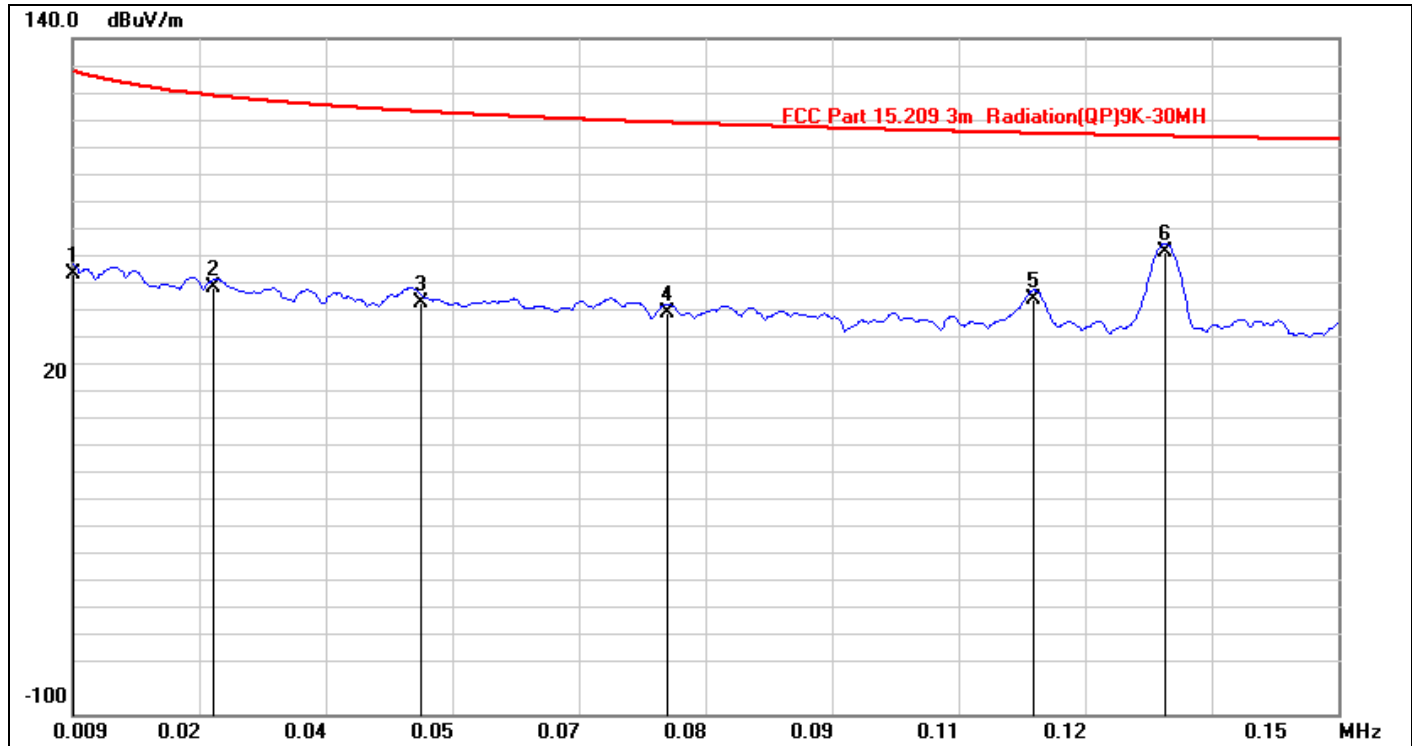

Site:	LAB	Antenna::Vertical	Temperature(C):23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)		Humidity(%):56.7%
EUT:	Swiss Tech 200W Power Station with wireless pad	Test Time:	2022/12/27
M/N.:	33649	Power Rating:	AC 120V/60Hz
Mode:	Wireless Charging 5W	Test Engineer:	sunshine
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.0088	37.17	19.23	56.40	128.51	-72.11	QP	100	236	
2	0.0247	37.67	13.73	51.40	127.37	-75.97	QP	100	254	
3	0.0478	34.56	11.64	46.20	125.70	-79.50	QP	100	120	
4	0.0752	31.56	10.94	42.50	123.72	-81.22	QP	100	103	
5	0.1160	36.69	10.71	47.40	120.78	-73.38	QP	100	271	
6 *	0.1307	53.62	10.68	64.30	119.72	-55.42	QP	100	152	

*:Maximum data x:Over limit !:over margin

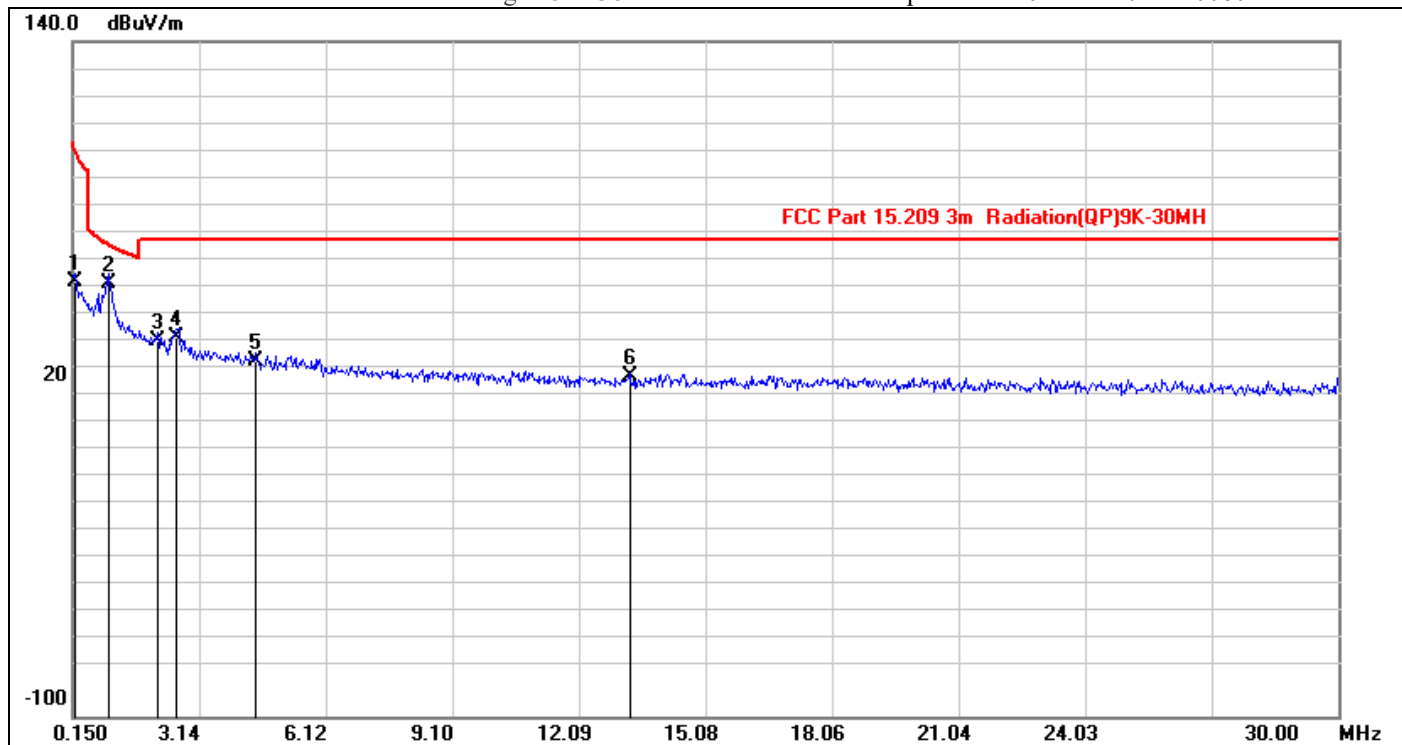


Site:	LAB	Antenna:: Vertical	Temperature(C): 23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)		Humidity(%): 56.7%
EUT:	Swiss Tech 200W Power Station with wireless pad	Test Time:	2022/12/27
M/N.:	33649	Power Rating:	AC 120V/60Hz
Mode:	Wireless Charging 5W	Test Engineer:	sunshine
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.2096	43.81	10.59	54.40	114.03	-59.63	QP	100	236	
2 *	0.9858	43.66	10.54	54.20	69.39	-15.19	QP	100	254	
3	2.1500	22.91	10.59	33.50	69.50	-36.00	QP	100	120	
4	2.5977	23.89	10.61	34.50	69.50	-35.00	QP	100	103	
5	4.4782	15.60	10.70	26.30	69.50	-43.20	QP	100	271	
6	13.2840	10.00	10.70	20.70	69.50	-48.80	QP	100	152	

Note:


- (1) All Readings are Peak Value.
- (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) EUT lying on the table position is the worst case result in the report.

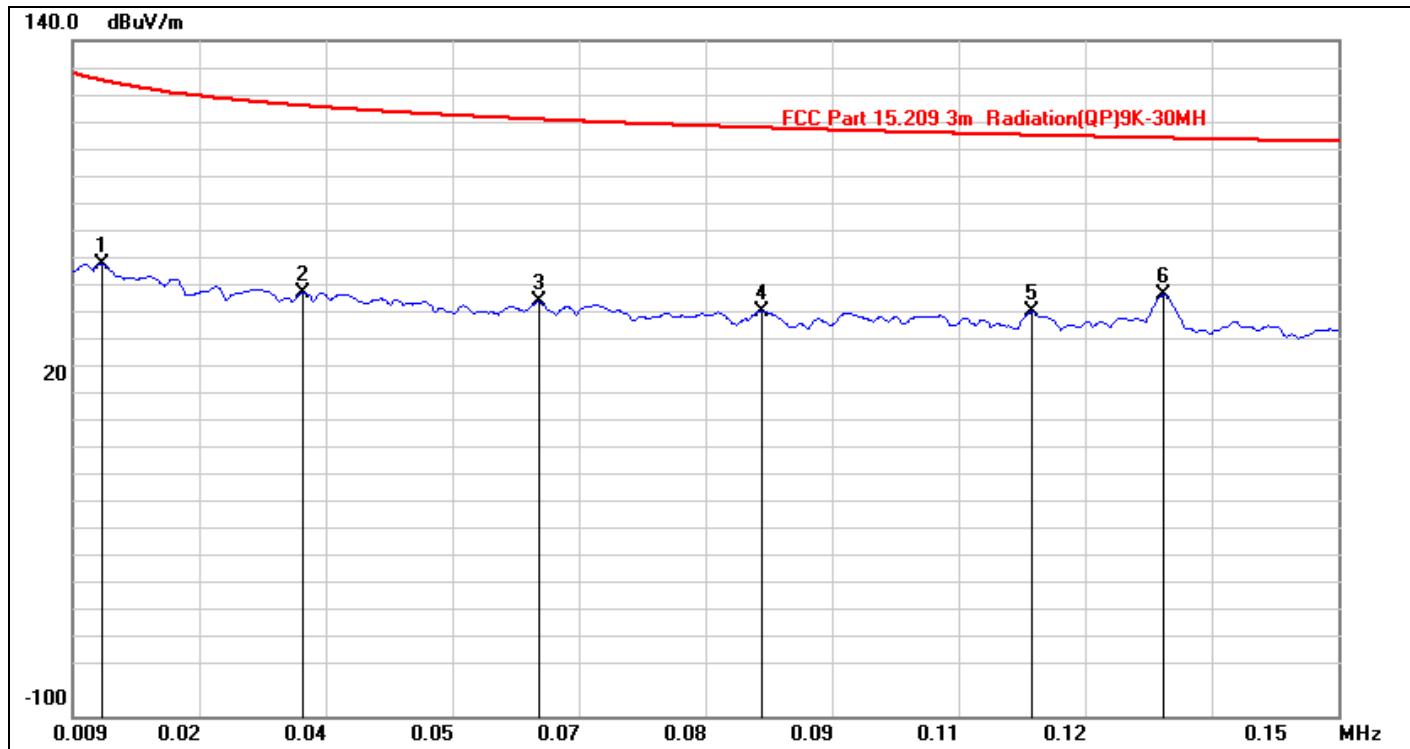

Site:	LAB	Antenna::	Horizontal	Temperature(C):	23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)			Humidity(%):	56.7%
EUT:	Swiss Tech 200W Power Station with wireless pad	Test Time:			2022/12/27
M/N.:	33649	Power Rating:		AC 120V/60Hz	
Mode:	Wireless Charging 5W	Test Engineer:		sunshine	
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1 *	0.0122	43.01	17.58	60.59	128.27	-67.68	QP	100	236	
2	0.0347	37.70	12.82	50.52	126.65	-76.13	QP	100	254	
3	0.0609	35.91	11.22	47.13	124.76	-77.63	QP	100	120	
4	0.0858	32.89	10.85	43.74	122.96	-79.22	QP	100	103	
5	0.1159	32.80	10.71	43.51	120.79	-77.28	QP	100	271	
6	0.1305	38.81	10.68	49.49	119.73	-70.24	QP	100	152	

*:Maximum data x:Over limit !:over margin

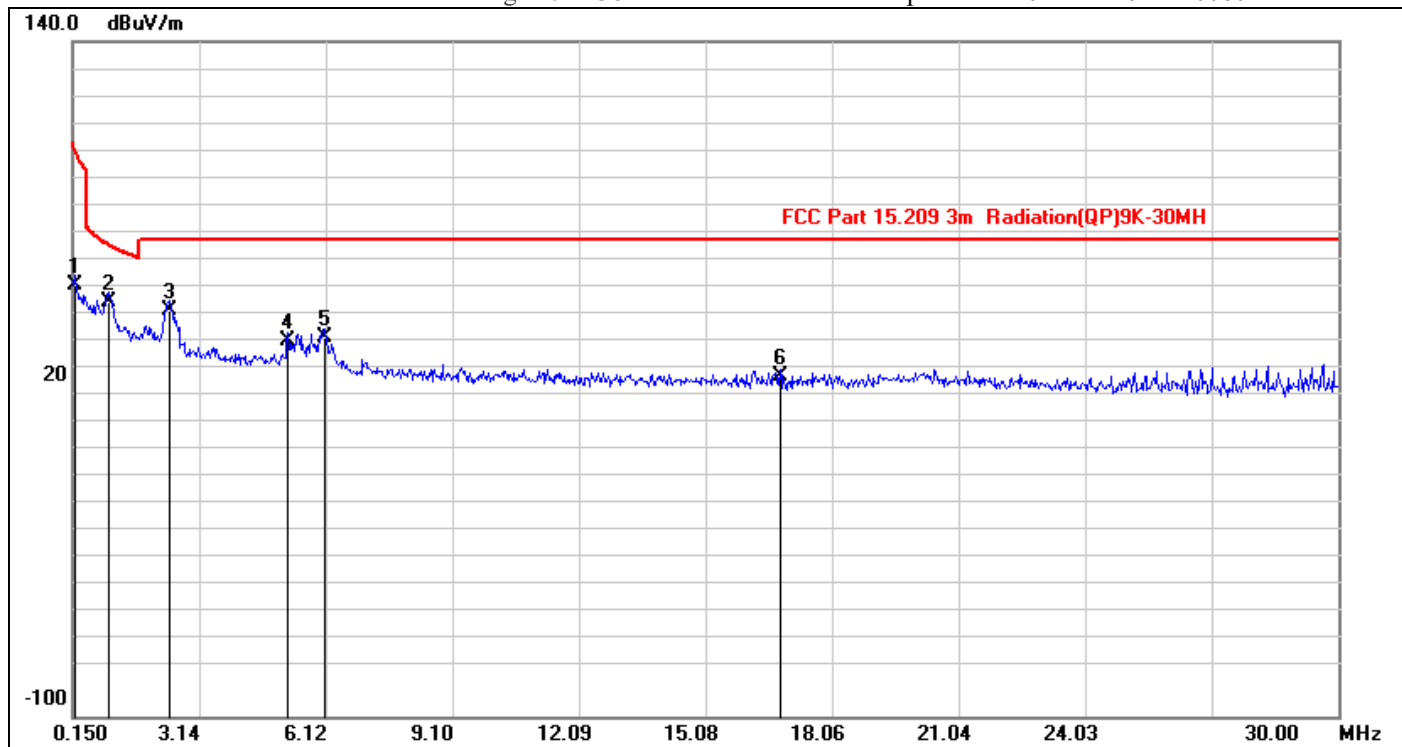

Site:	LAB	Antenna::	Horizontal	Temperature(C):	23.4(C)
Limit:	FCC Part 15C 3m Radiation(QP)			Humidity(%):	56.7%
EUT:	Swiss Tech 200W Power Station with wireless pad	Test Time:	2022/12/27		
M/N.:	33649	Power Rating:	AC 120V/60Hz		
Mode:	Wireless Charging 5W	Test Engineer:	sunshine		
Note:					


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	0.2096	42.51	10.59	53.10	114.03	-60.93	QP	100	236	
2 *	0.9858	36.86	10.54	47.40	69.39	-21.99	QP	100	254	
3	2.4186	33.60	10.60	44.20	69.50	-25.30	QP	100	120	
4	5.2244	23.07	10.73	33.80	69.50	-35.70	QP	100	103	
5	6.0901	23.75	10.75	34.50	69.50	-35.00	QP	100	271	
6	16.8362	10.33	10.47	20.80	69.50	-48.70	QP	100	152	

Note:

- (1) All Readings are Peak Value.
- (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.
- (4) EUT lying on the table position is the worst case result in the report.

We pretested modes (Wireless Charging(5W)) for EUT. The worst test data see follow the table.


Test mode: Wireless Charging 5W

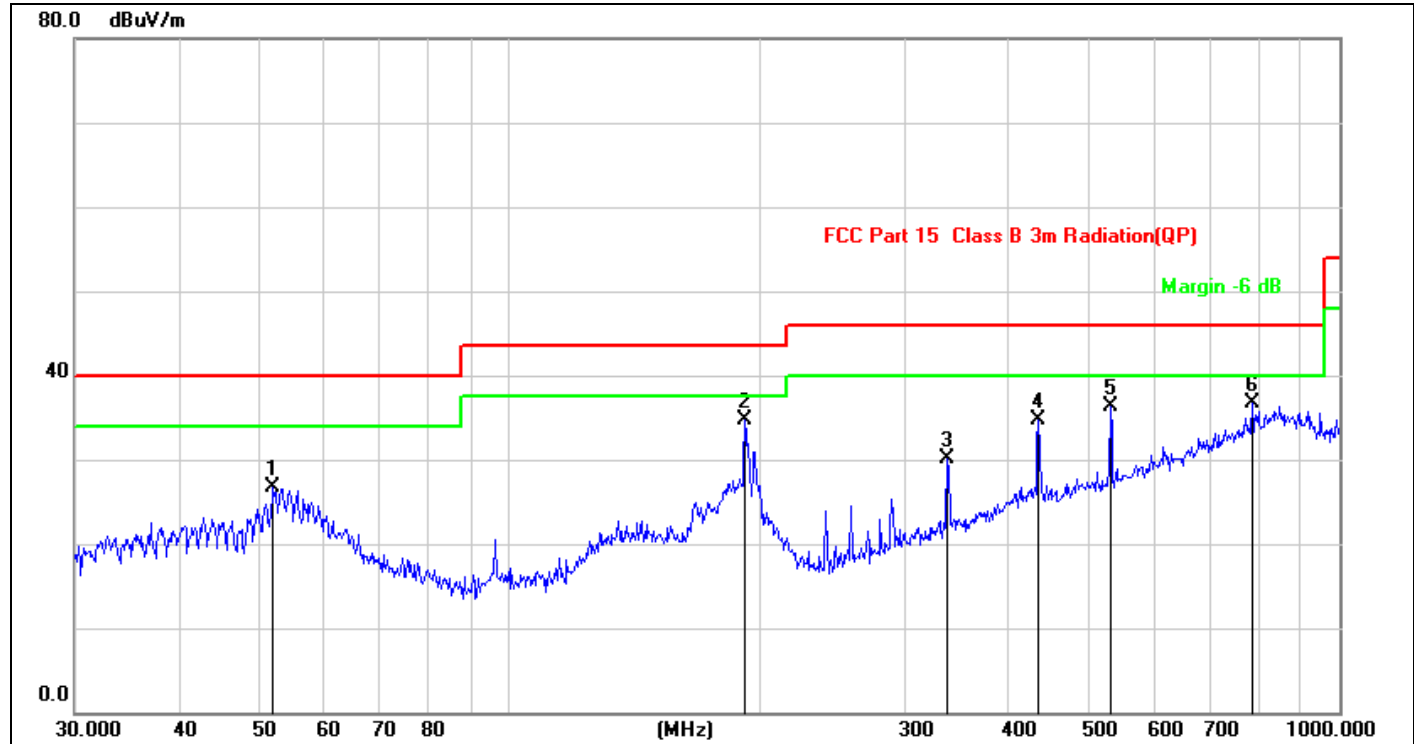

Site:	LAB	Antenna::Vertical	Temperature(C):23.4(C)
Limit:	FCC Part 15 Class B 3m Radiation(QP)	Test Time:	Humidity(%):56.7%
EUT:	Swiss Tech 200W Power Station with wireless pad		2022/12/30 9:01:05
M/N.:	33649	Power Rating:	2022/12/30 8:59:40
Mode:	Wireless Charging 5W	Test Engineer:	sunshine
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	52.0251	35.96	-9.27	26.69	40.00	-13.31	QP	100	45	
2 *	192.4186	45.95	-11.17	34.78	43.50	-8.72	QP	100	45	
3	337.2155	35.86	-5.67	30.19	46.00	-15.81	QP	100	27	
4	434.0651	36.67	-1.89	34.78	46.00	-11.22	QP	100	27	
5	530.1014	37.07	-0.76	36.31	46.00	-9.69	QP	100	96	
6	785.0935	31.20	5.48	36.68	46.00	-9.32	QP	100	96	


*:Maximum data x:Over limit !:over margin

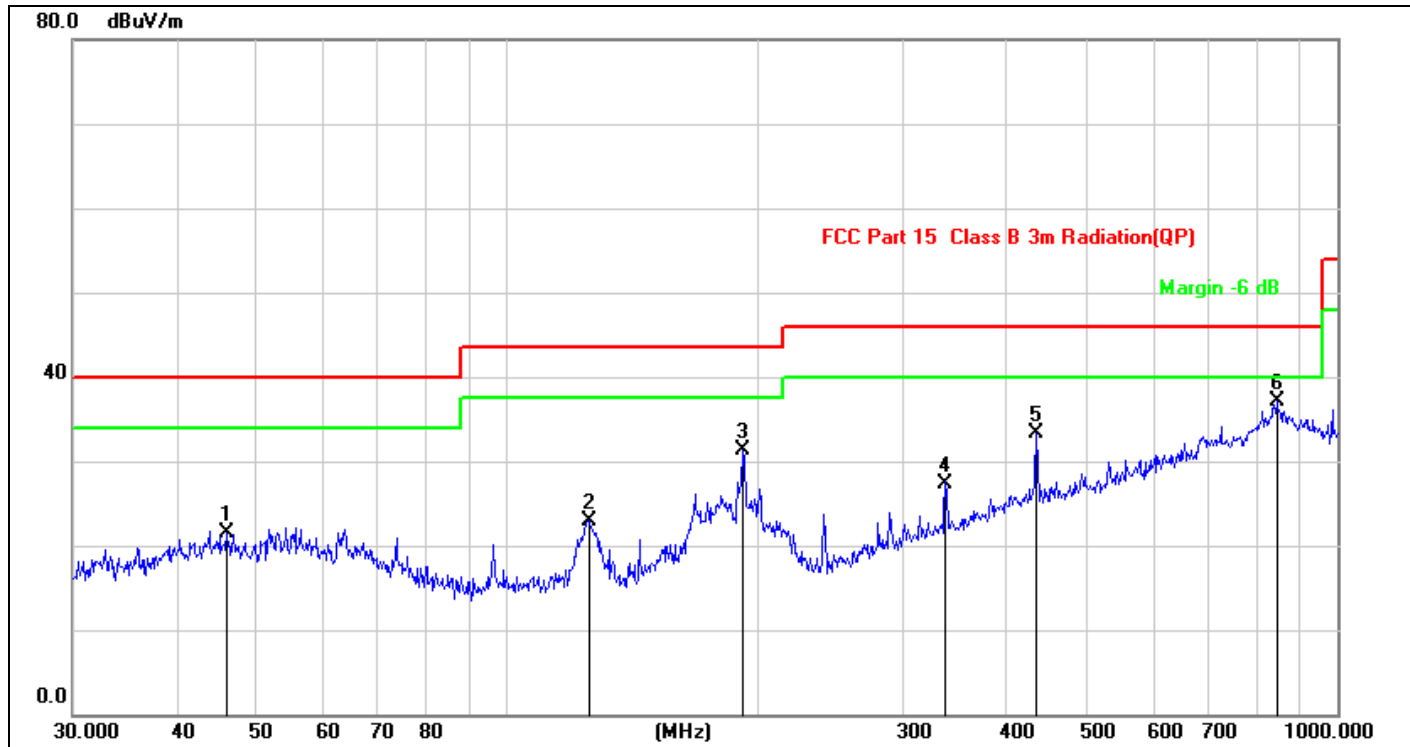

Site: LAB
Limit: FCC Part 15 Class B 3m Radiation(QP)
Antenna::Horizontal
Temperature(C):23.4(C)
Humidity(%):56.7%
EUT: Swiss Tech 200W Power Station with wireless pad
Test Time: 2022/12/30 9:02:21
M/N.: 33649
Power Rating: AC 120V/60Hz
Mode: Wireless Charging 5W
Test Engineer: sunshine
Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	46.0164	31.56	-10.11	21.45	40.00	-18.55	QP	100	45	
2	125.4457	34.63	-11.77	22.86	43.50	-20.64	QP	100	45	
3	192.4186	42.47	-11.17	31.30	43.50	-12.20	QP	100	27	
4	337.2155	33.07	-5.67	27.40	46.00	-18.60	QP	100	27	
5	434.0651	35.28	-1.89	33.39	46.00	-12.61	QP	100	96	
6 *	845.0878	29.63	7.41	37.04	46.00	-8.96	QP	100	96	

6.6 Radiated Measurement Photos

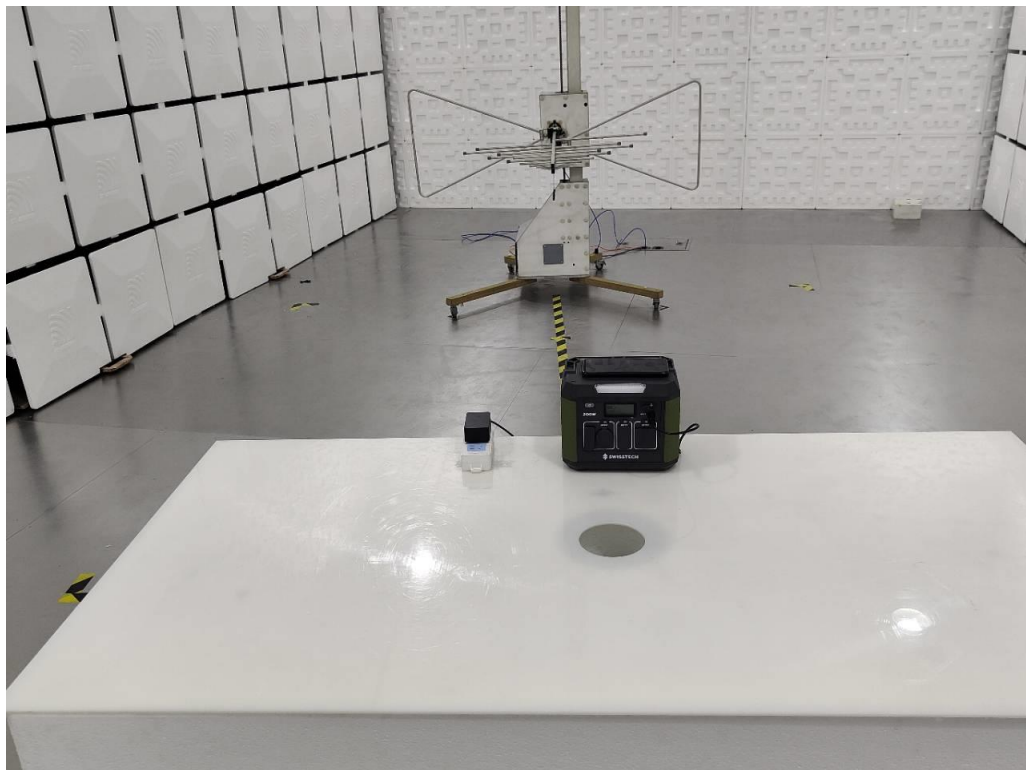

7 20db Bandwidth

7.1 20dB Bandwidth Limit

None: for reporting purposed only.


7.2 Test Instruments

Refer a test equipment and calibration data table in this test report.

7.3 Test Procedure

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


7.4 Test Setup



7.5 Test Result

Frequency (KHz)	20dB Bandwidth (KHz)	Results
139.67	2.098	PASS

20 dB Bandwidth Test plot

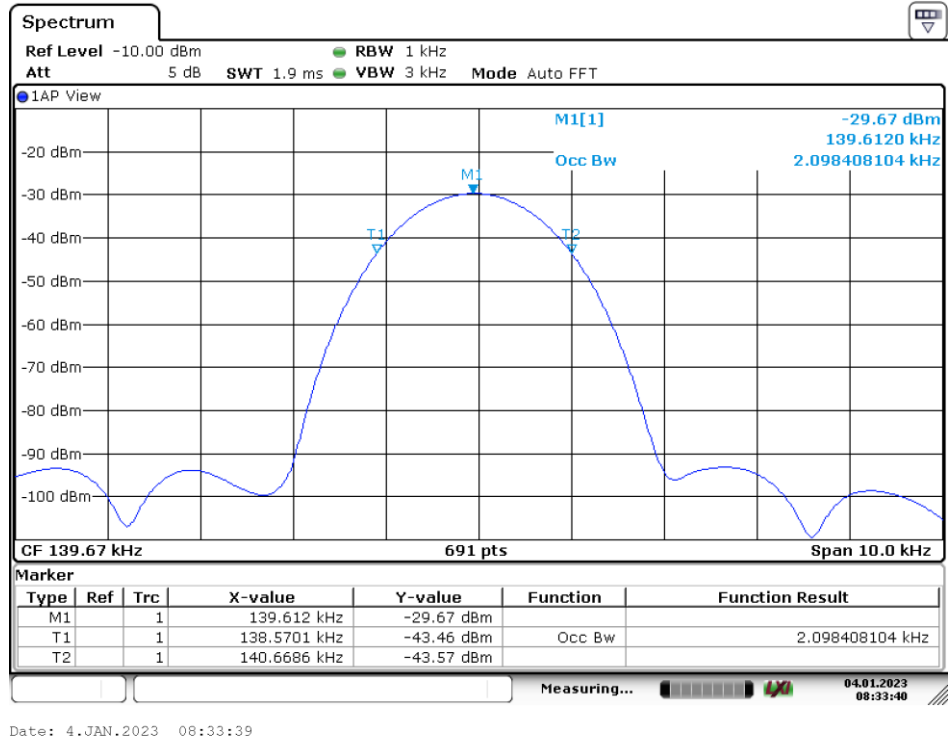

8 Antenna Application

8.1 Antenna requirement



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 Result


The EUT's antenna, permanent attached antenna, used an Induction coil and integrated on PCB, The antenna's gain meets the requirement.



APPENDIX (Photos of EUT)





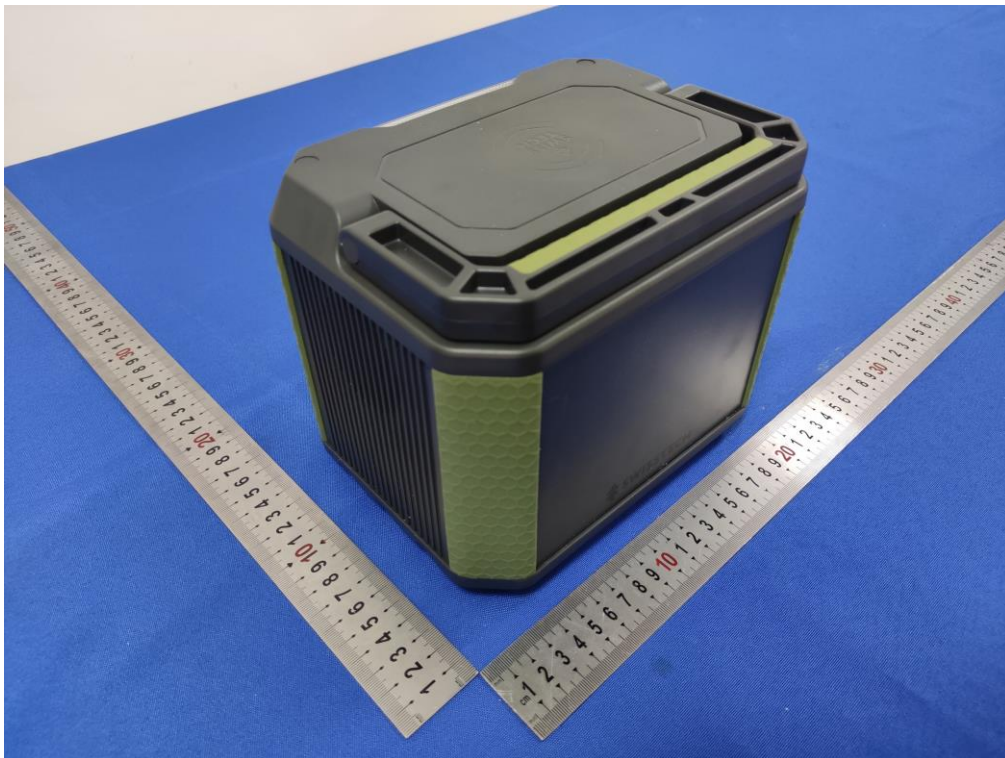
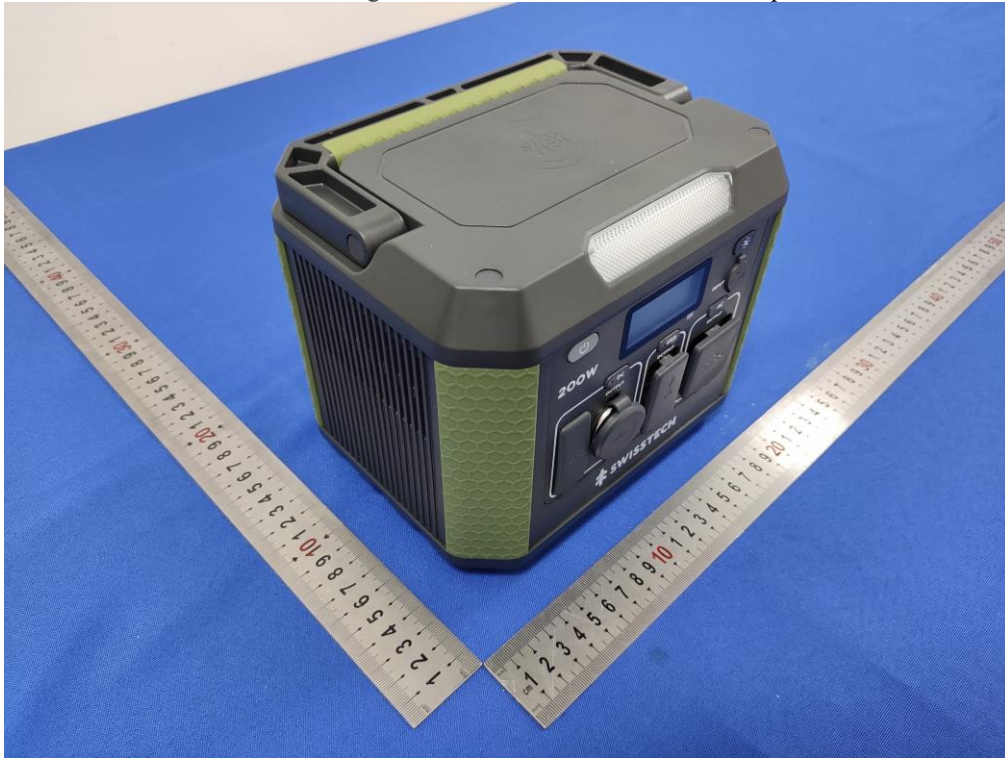







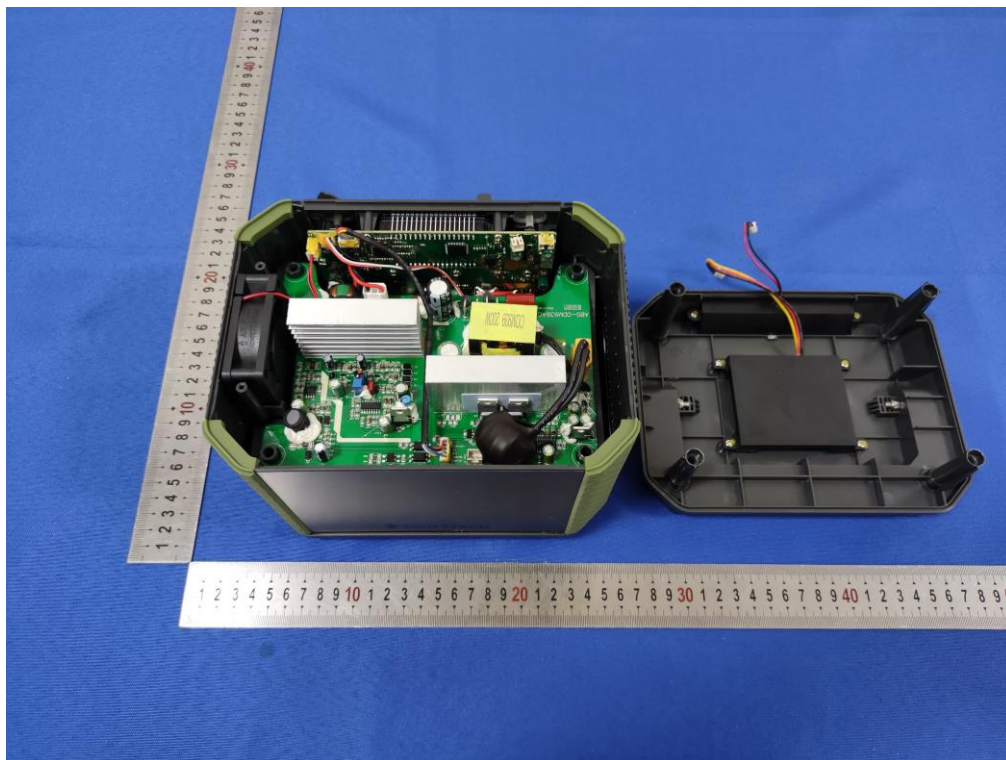


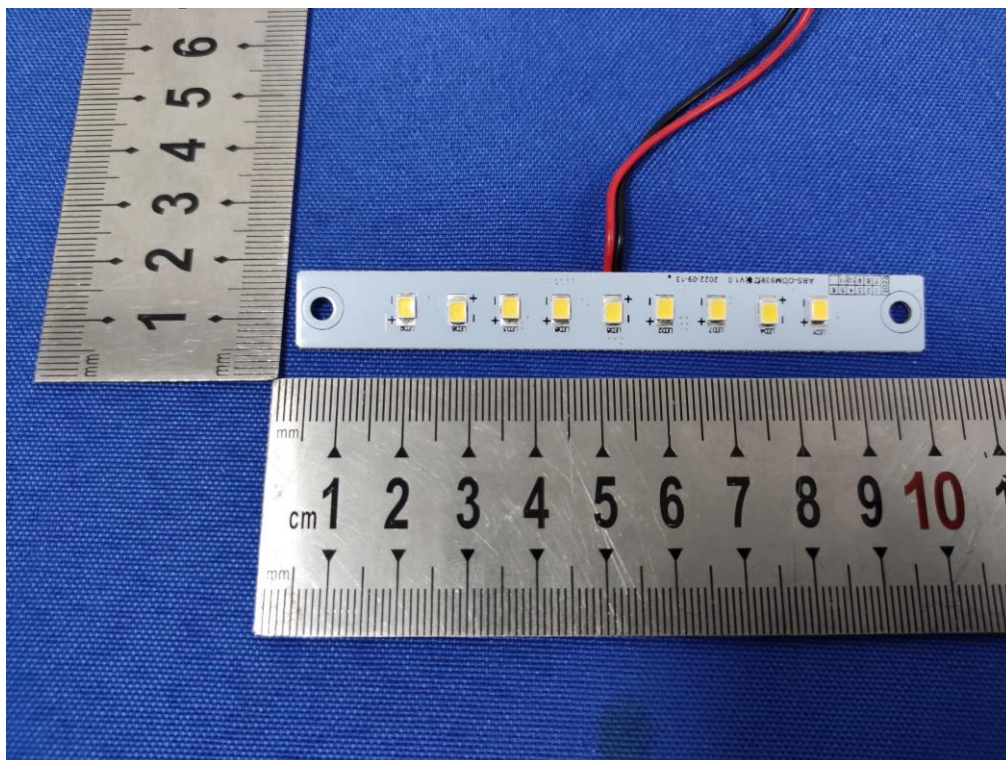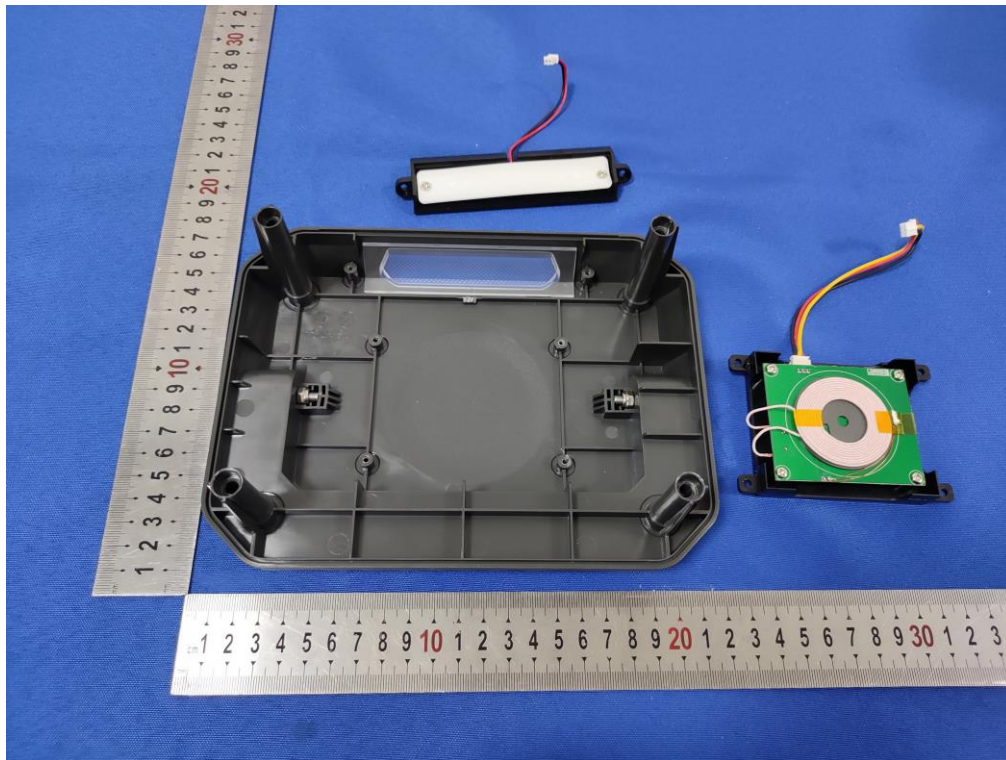


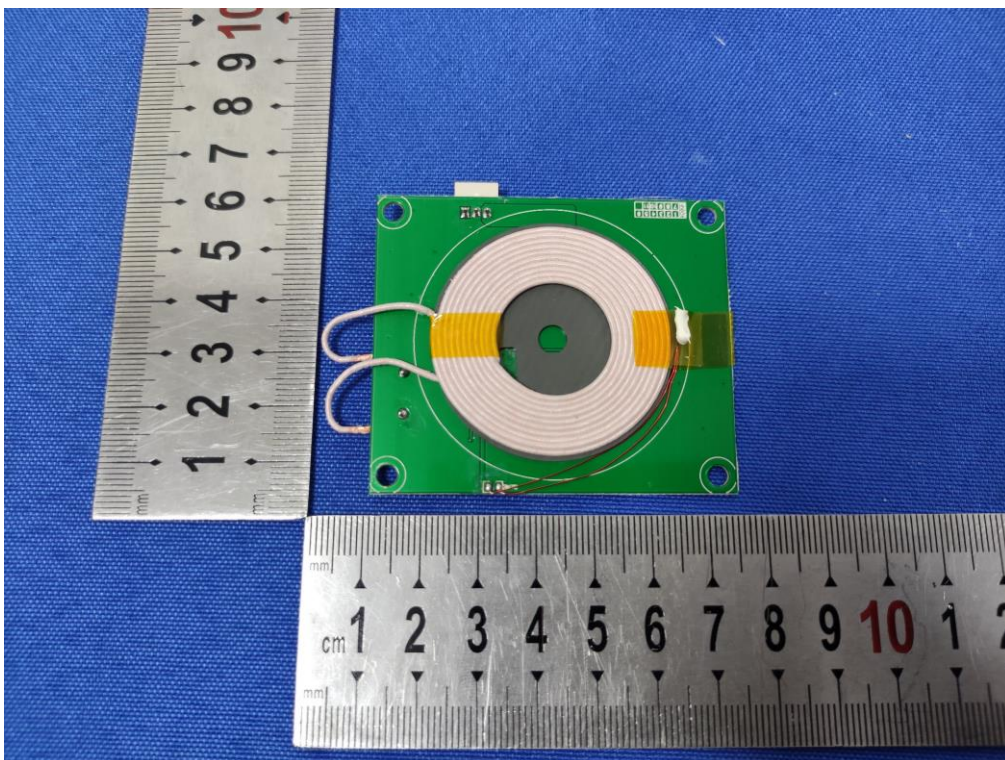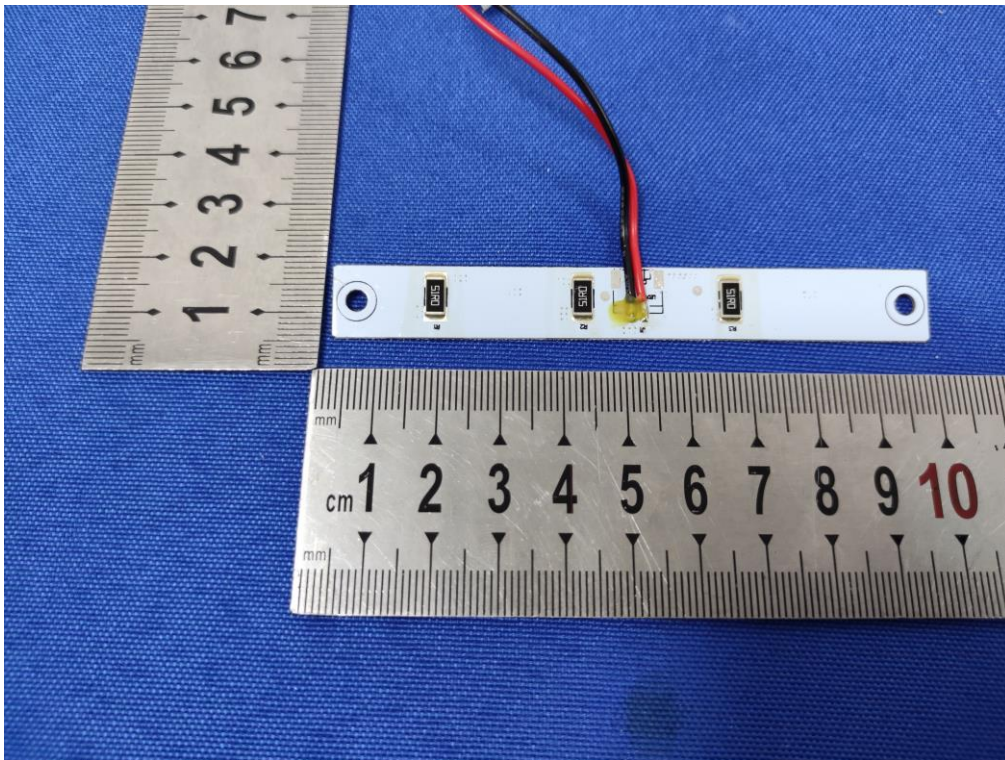


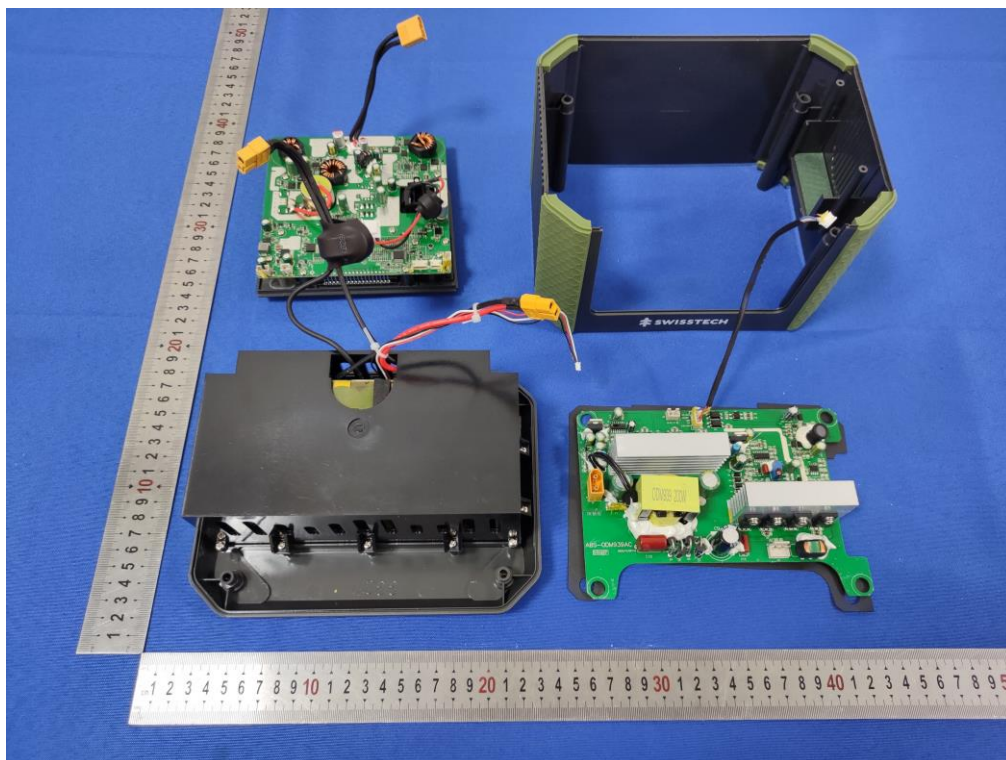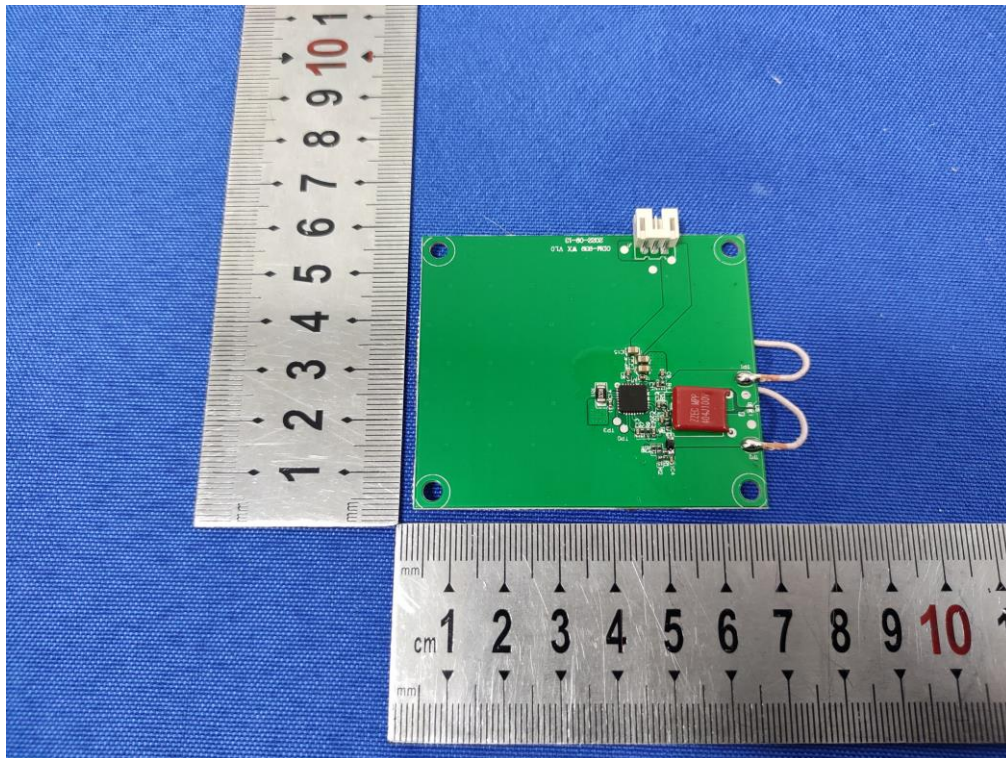

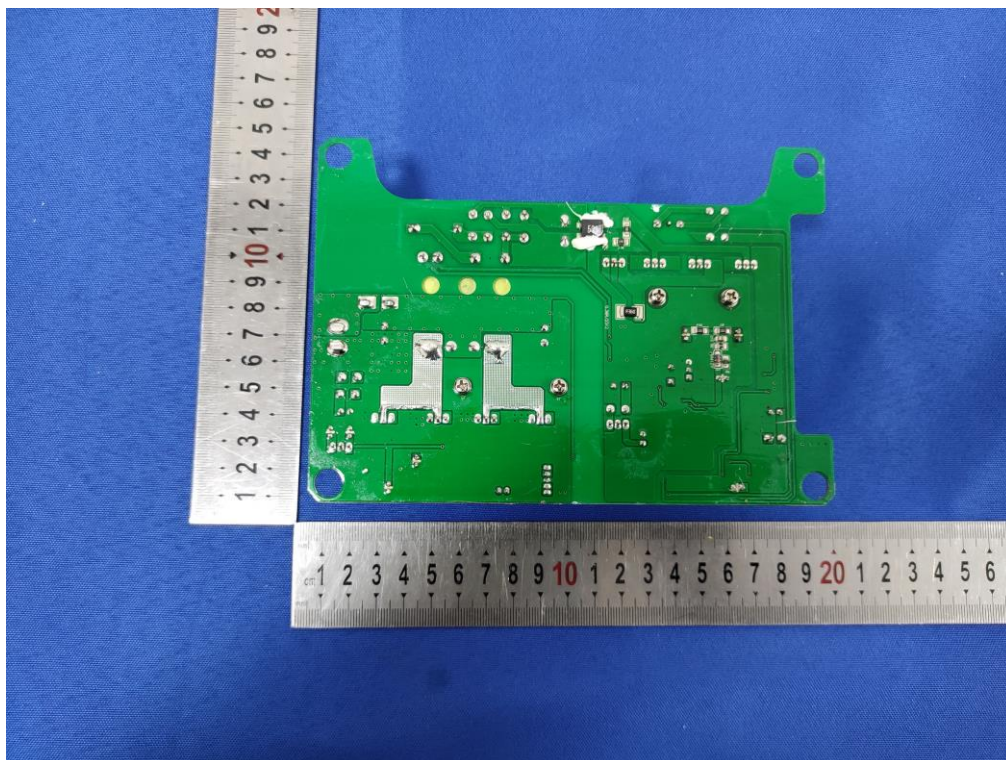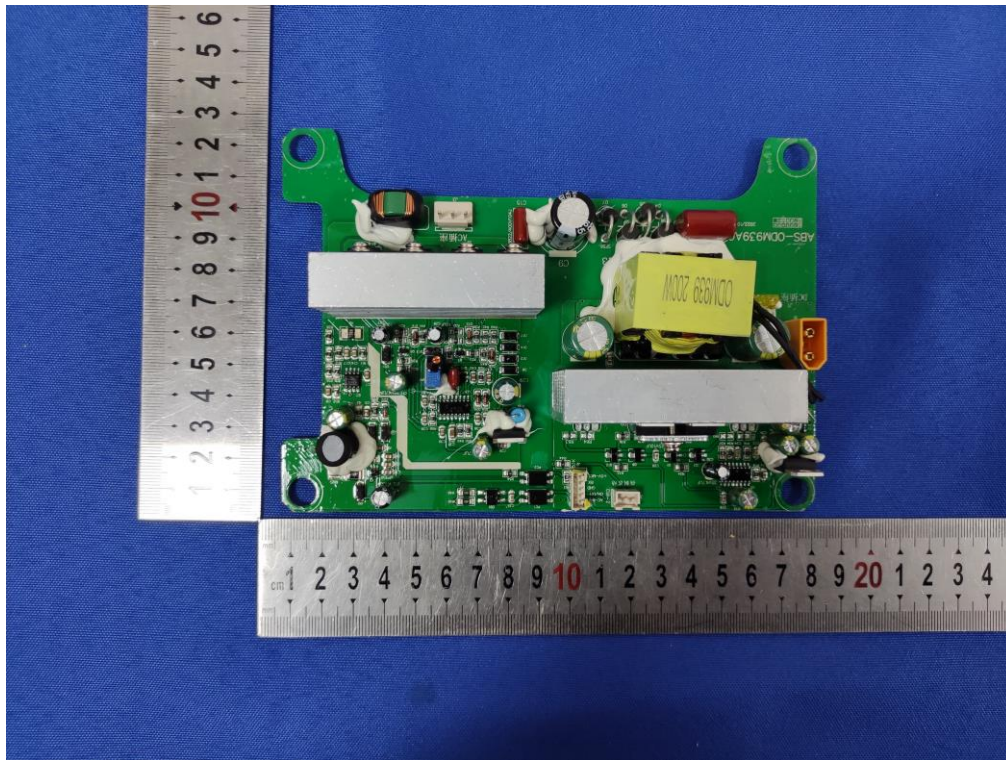

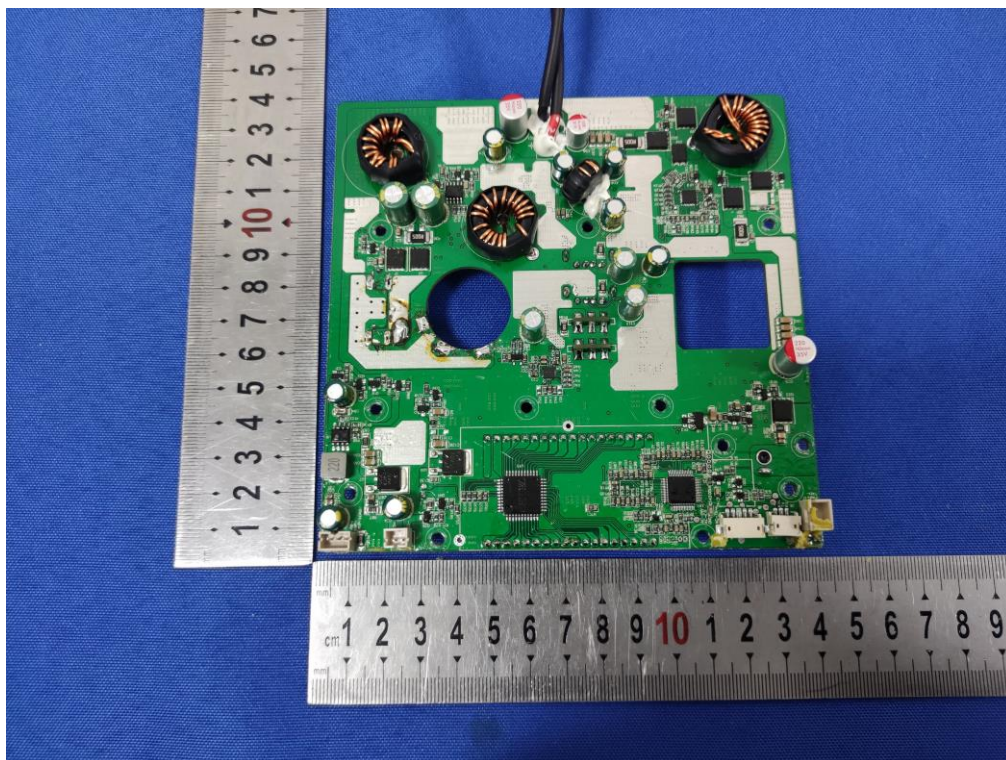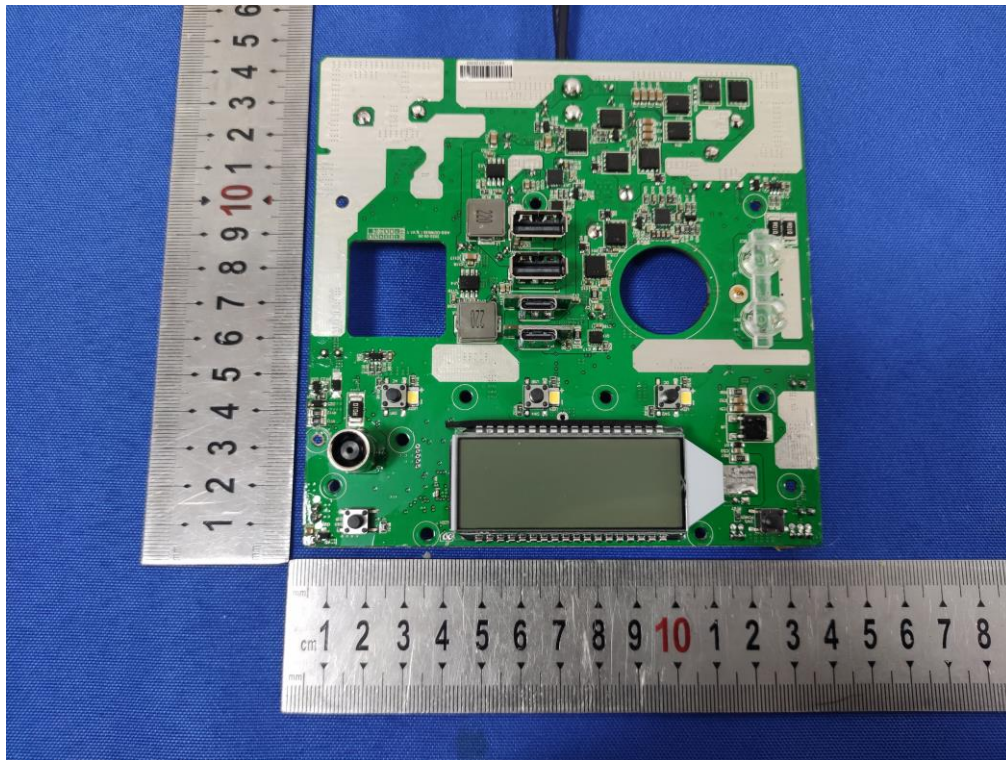

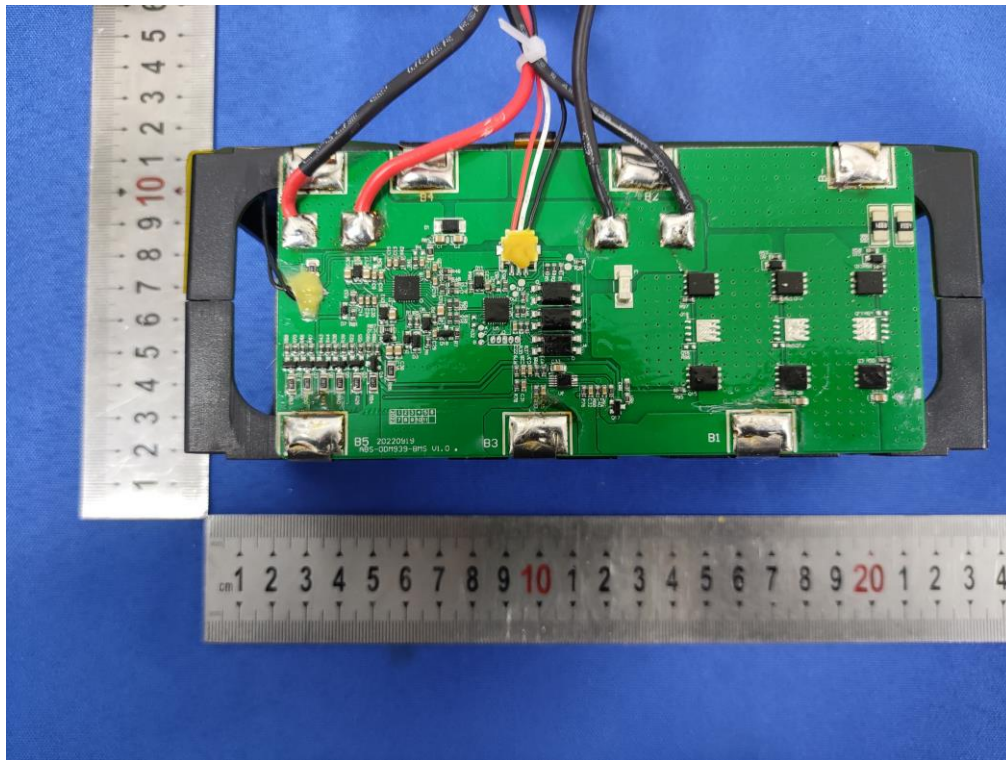

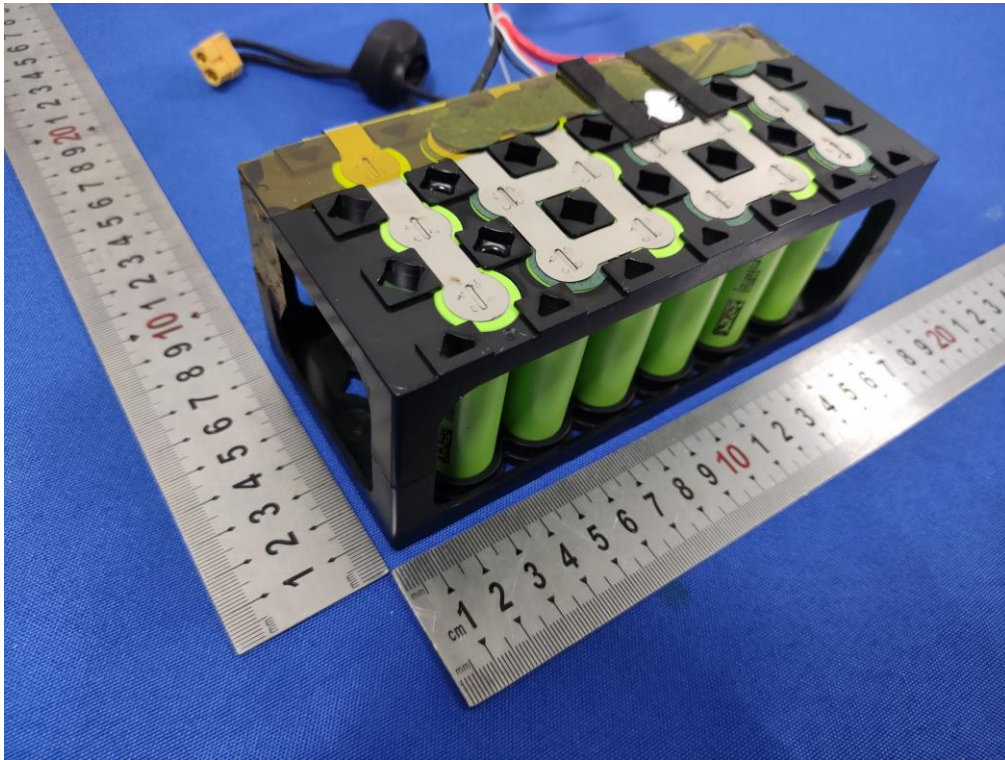

-----The end-----