



CFR 47 FCC PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Wireless Remote Control Switch

MODEL NUMBER: H-994R1

FCC ID: 2AMK8H-994R1

REPORT NUMBER: 4789699557.1-1

ISSUE DATE: November 17, 2020

Prepared for

**DongGuan Honwell Electronic Industrial Co., Ltd.
4 Xiaolong Road, Yuanshanbei Changping Town, Dongguan
City, Guangdong, China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	11/11/2020	Initial Issue	
V1	11/17/2020	Updated OBW test plot	Jacky Jiang

Summary of Test Results			
Clau ce	Test Items	FCC Rules	Test Results
1	Transmitter Timeout	CFR 47 FCC §15.231 (a) (1)	Pass
2	20 dB Bandwidth and 99 % Occupied Bandwidth	CFR 47 FCC §15.231 (c)	Pass
3	Radiated Emission	CFR 47 FCC §15.231 (b) CFR 47 FCC §15.205 and §15.209	Pass
4	Antenna Requirement	CFR 47 FCC §15.203	Pass

Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

Note 2: The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C when <Accuracy Method> decision rule is applied.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>MAXIMUM FIELD STRENGTH</i>	8
5.3. <i>TEST CHANNEL CONFIGURATION</i>	8
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
5.5. <i>TEST ENVIRONMENT</i>	9
5.6. <i>DESCRIPTION OF TEST SETUP</i>	10
5.7. <i>MEASURING INSTRUMENT AND SOFTWARE USED</i>	11
6. ANTENNA PORT TEST RESULTS	12
6.1. <i>ON TIME AND DUTY CYCLE</i>	12
6.2. <i>TRANSMITTER TIMEOUT</i>	15
6.3. <i>20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i>	17
6.4. <i>RADIATED TEST RESULTS</i>	20
6.4.1. <i>FIELD STRENGTH OF INTENTIONAL EMISSIONS</i>	27
6.4.2. <i>SPURIOUS EMISSIONS BELOW 1 GHz AND ABOVE 30 MHz</i>	29
6.4.3. <i>SPURIOUS EMISSIONS ABOVE 1 GHz</i>	31
6.4.4. <i>SPURIOUS EMISSIONS BELOW 30 MHz</i>	33
7. ANTENNA REQUIREMENTS	36

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: DongGuan Honwell Electronic Industrial Co., Ltd.
Address: 4 Xiaolong Road, Yuanshanbei Changping Town, Dongguan City, Guangdong, China

Manufacturer Information

Company Name: DongGuan Honwell Electronic Industrial Co., Ltd.
Address: 4 Xiaolong Road, Yuanshanbei Changping Town, Dongguan City, Guangdong, China

EUT Information

EUT Name: Wireless Remote Control Switch
Model: H-994R1
Serial Model: /
Brand: /
Sample Received Date: October 28, 2020
Sample Status: Normal
Sample ID: 3420652
Date of Tested: October 28, 2020 ~ November 06, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:



Jacky Jiang
Engineer Project Associate

Checked By:



Shawn Wen
Laboratory Leader

Approved By:



Stephen Guo
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiation Emission test (include Fundamental emission) (9 kHz-30 MHz)	2.2 dB
Radiation Emission test (include Fundamental emission) (30 MHz-1 GHz)	4.00 dB
Radiation Emission test (1 GHz to 26GHz) (include Fundamental emission)	5.78 dB (1 GHz-18 GHz) 5.23 dB (18 GHz-26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Wireless Remote Control Switch		
EUT Description	The device is a Wireless Remote Control Switch.		
Model	H-994R1		
Product Description	Operation Frequency	433.92 MHz	
	Modulation Type	ASK	
Ratings	/		
Power Supply	Power Adapter	Input	/
		Output	/
	Battery	DC 3.0 V	

5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Max AVG field strength (dB μ V/m)
433.91920	72.77

5.3. TEST CHANNEL CONFIGURATION

Test Mode	Frequency
ASK	433.92 MHz

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
433.92	PCB antenna	0

Note: The value of the antenna gain was declared by customer.

5.5. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65 %	
Atmospheric Pressure:	1025 Pa	
Temperature	TN	23 ~ 28 °C
Voltage:	VL	N/A
	VN	DC 3.0V
	VH	N/A

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
/	/	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

1. A fully charged battery was used for all tests.
2. The test sample can be into a transmission mode through the power on.

SETUP DIAGRAM FOR TEST

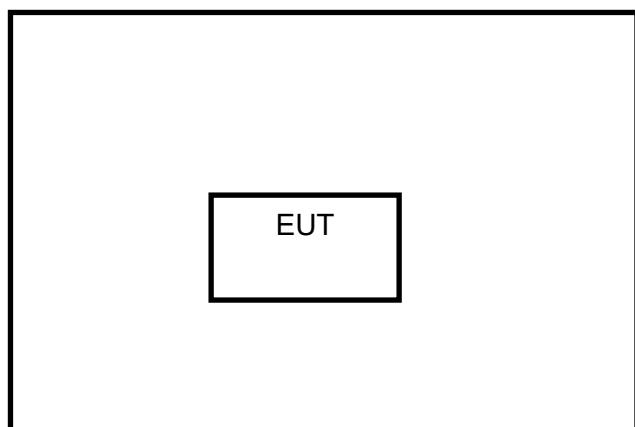

5.7. MEASURING INSTRUMENT AND SOFTWARE USED

Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Dec.5, 2019	Dec.5, 2020

Software				
Used	Description	Manufacturer	Name	Version
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1

Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.06,2020

6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

FCC Reference:	CFR 47 §15.35(c)
Test Method Used:	ANSI C63.10 Section 7.5

TEST SETUP

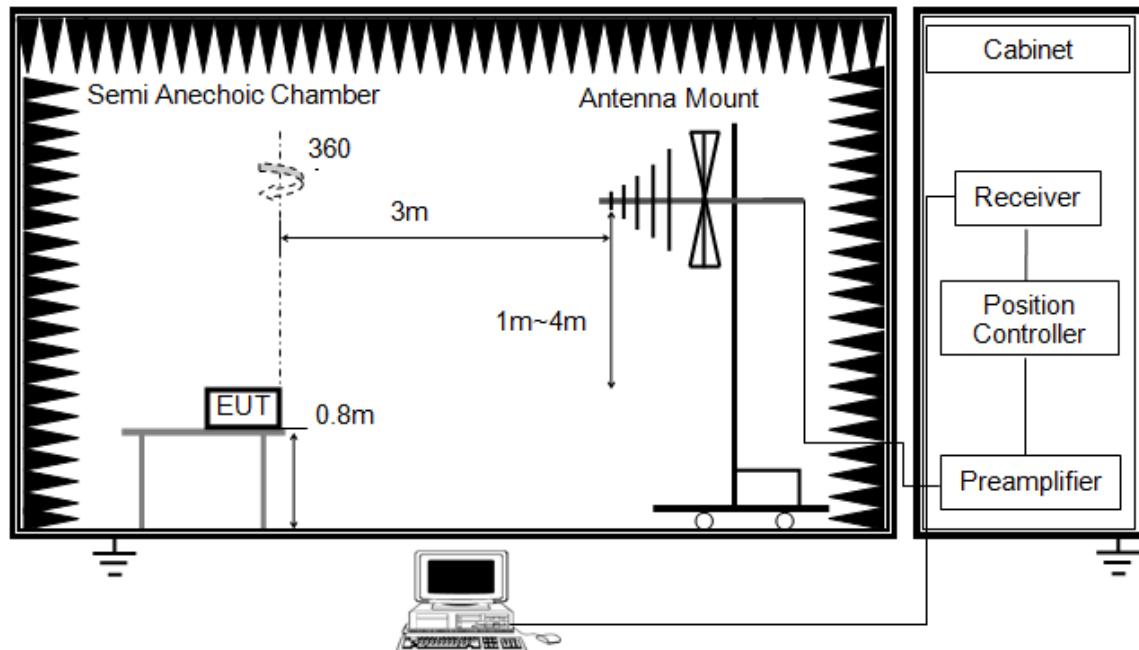

- Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is at least a 100 ms.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.

TEST ENVIRONMENT

Temperature	22.5 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.0 V

RESULTS


	On Time (ms)	Times	Total Ton times (ms)
Ton-1	8.16	2	37.74
Ton-2	0.51	42	

Total Ton times (ms)	Period (ms)	Duty Cycle (Linear)	Duty Cycle Correction Factor
37.74	100	0.3774	-8.46


Note: Duty Cycle Correction Factor=20log(x).

Where: x is Duty Cycle

Ton - 1

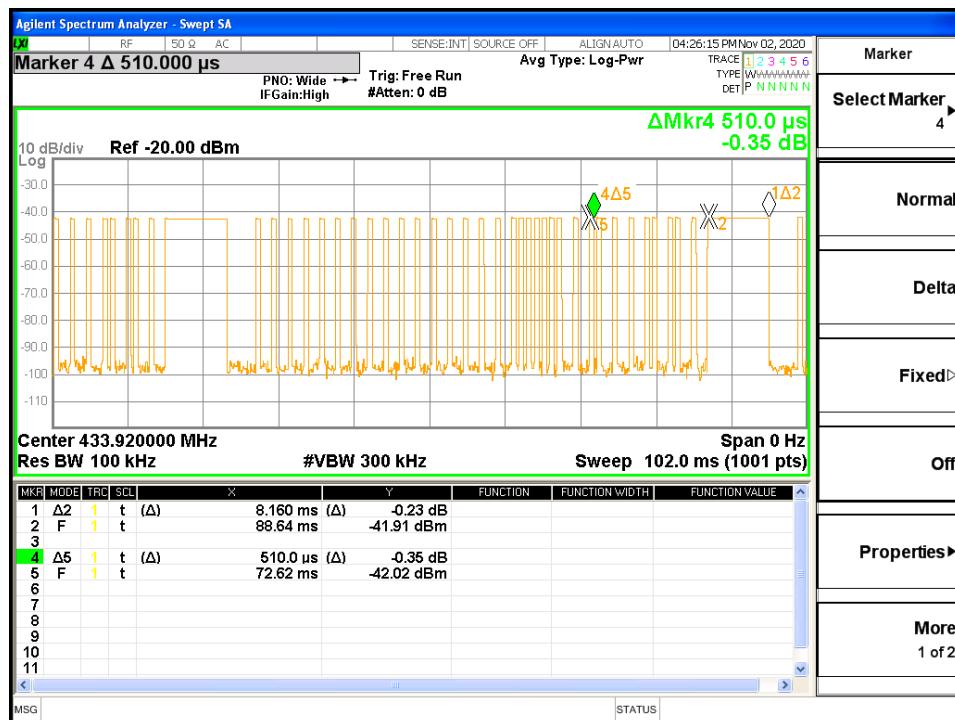

Period

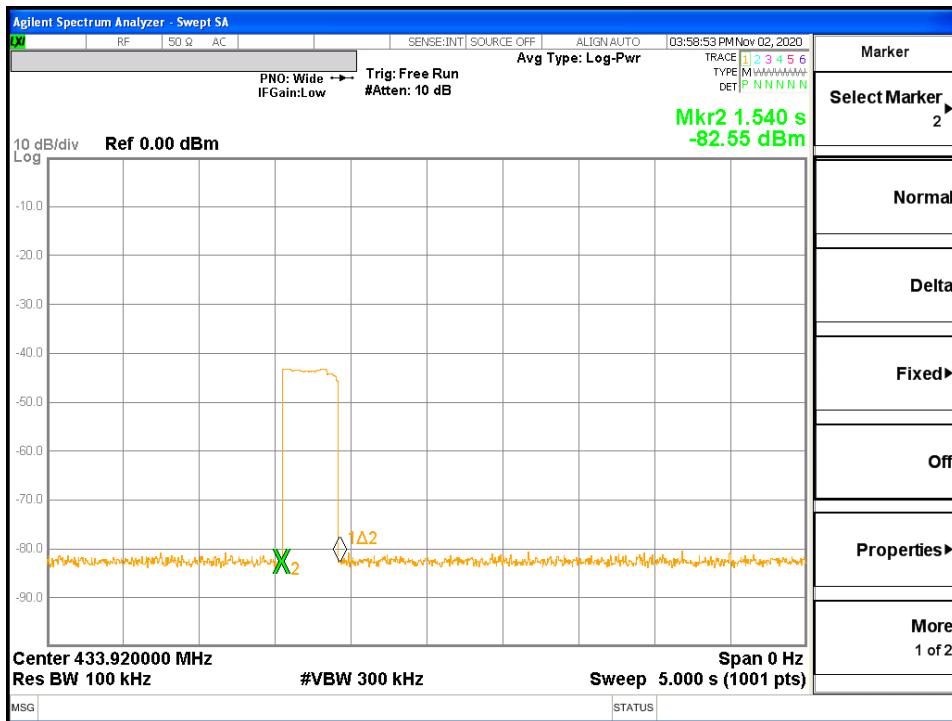

Note: Because the transmit period of the EUT already exceed 100 ms, so 100 ms was used for calculated.

Note: All test mode had been tested, only the worst data record in the report.

6.2. TRANSMITTER TIMEOUT

LIMITS


CFR 47 §15.231(a):

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

TEST PROCEDURE

FCC Reference:	CFR 47 FCC §15.231(a)
Test Method Used:	The EUT transmitter was activated and monitored using a spectrum analyzer for a period of 10 seconds.

TEST SETUP

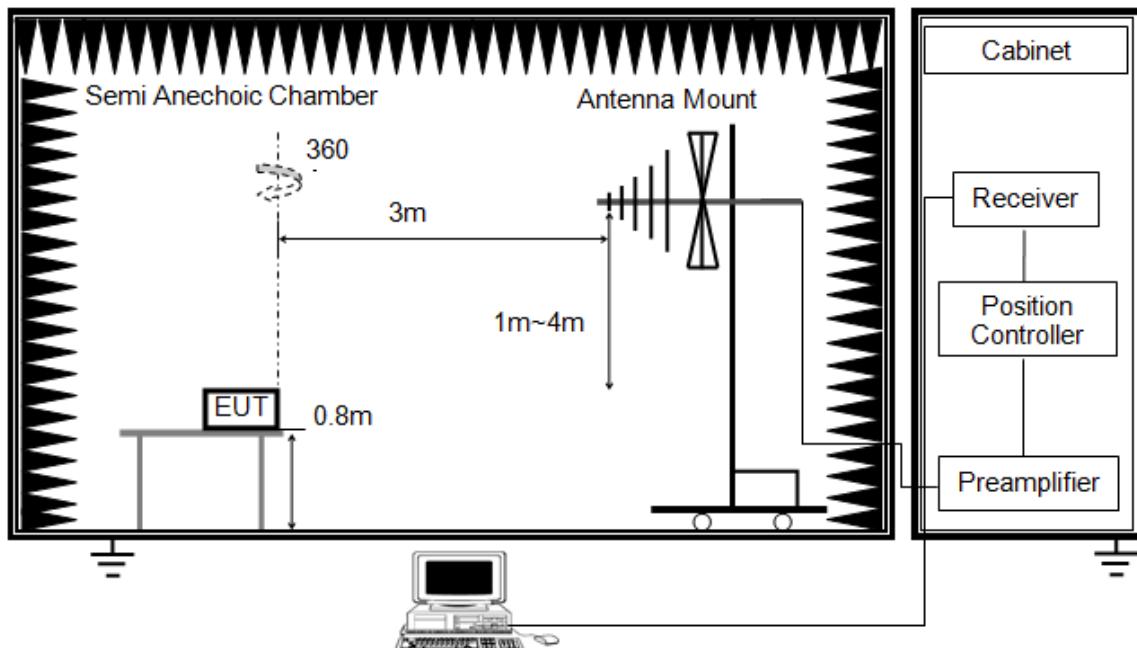

For CFR 47 Part 15.231(a):


- a. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.
- b. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- c. Set Sweep Time to 10 s.
- d. Set the center frequency on any frequency to be measured and set the frequency span to zero span.
- e. Measure the maximum time duration of one single pulse.

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	66%
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.0V

RESULTS

Manually transmitting mode			
Activation Time (seconds)	Limit (seconds)	Margin (seconds)	Result
0.35	5.000	4.65	PASS

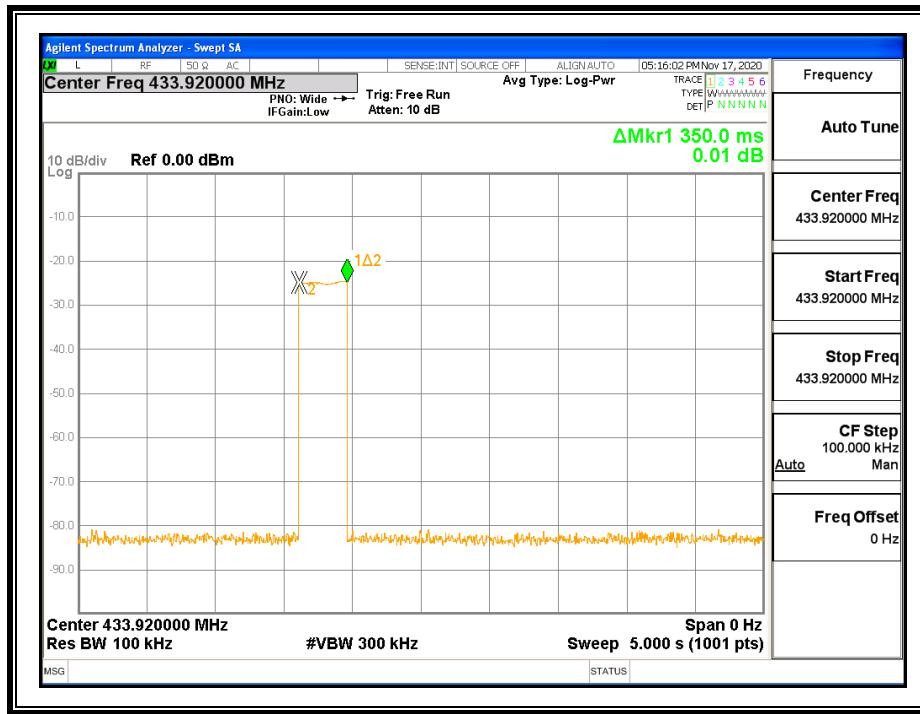

Note: All the modes had been tested, only the worst data record in the report.

6.3. 20 dB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC §15.231 (c)


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

So, the limit calculated as: $0.0025 * 433.92 \text{ MHz} = 1.0848 \text{ MHz}$

TEST PROCEDURE

FCC Reference:	CFR 47 Part 15.231(c)
Test Method Used:	ANSI C63.10 Section 6.9.2

TEST SETUP

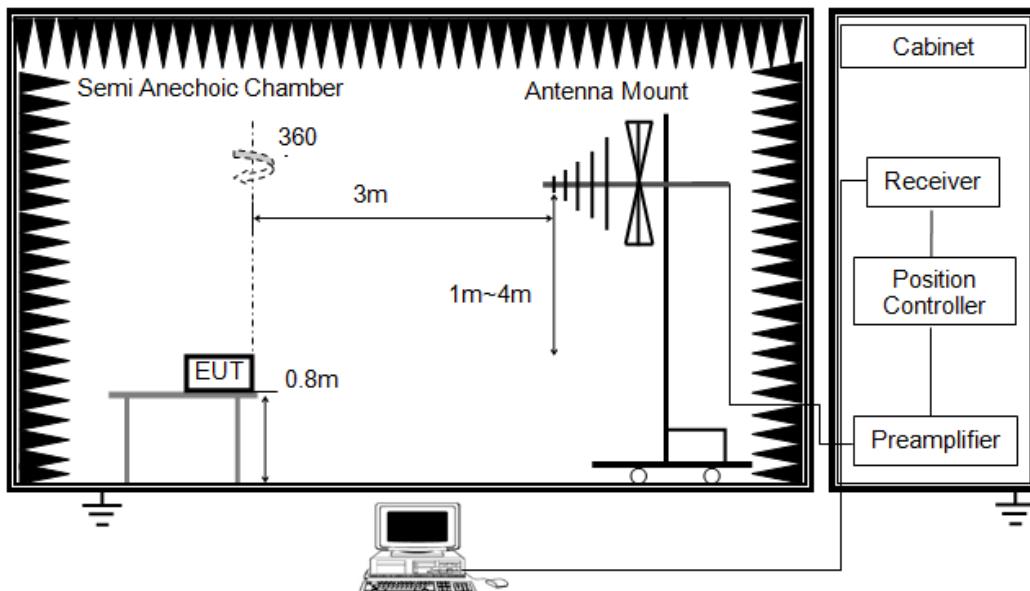


1. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower
4. Set the spectrum analyzer in the following setting as:
RBW is set to 1% to 5% of the OBW and VBW is set 3 * RBW.

TEST ENVIRONMENT

Temperature	22.5 °C	Relative Humidity	66 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.0 V

RESULTS

20 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
0.008270	0.017708	1.0848	Pass

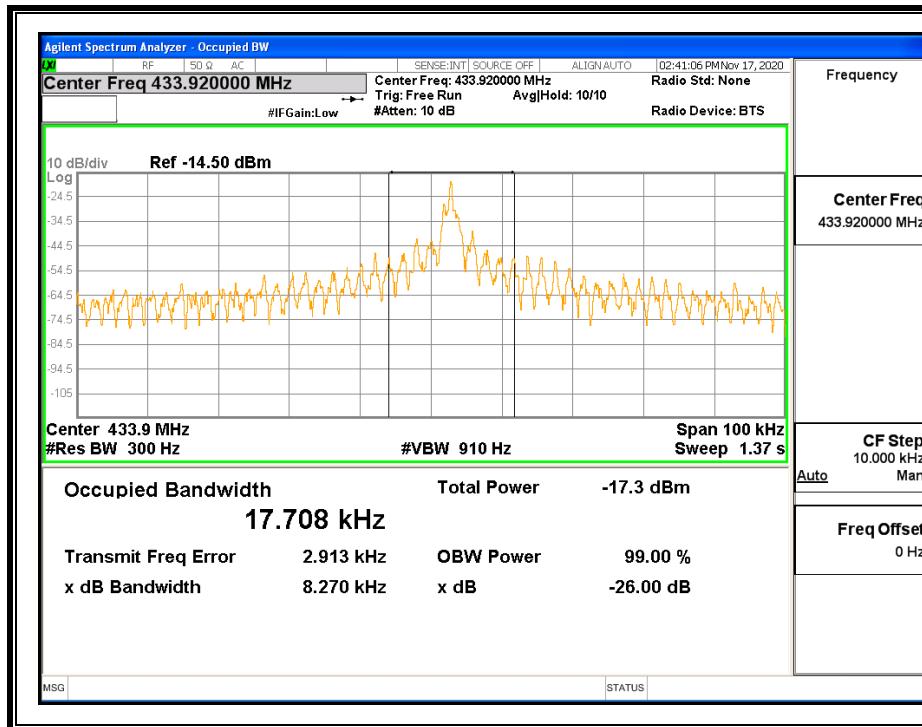

Note: All test mode had been tested, only the worst data record in the report.

6.4. RADIATED TEST RESULTS

LIMITS

CFR 47 FCC §15.231 (b)(e)

CFR 47 FCC §15.205 and §15.209

1. In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

Note:

1. To obtain the average limit at the test frequency the values given in the table of FCC part 15.231(b) have to be linear interpolated and then converted to dB μ V/m. The limit at 260 MHz is 3750 μ V/m and at 470 MHz it is 12500 μ V/m. Limit at 433.92 MHz is calculated as shown in ANSI C63.10 Section 7.6.2:

$$\text{Limit } [\mu\text{V/m}] = \text{Limlower} + \Delta F \left[(\text{Limupper} - \text{Limlower}) / (\text{fupper} - \text{flower}) \right]$$

where $\Delta F = fc - flower = 433.92 - 260 = 173.92$

$$\begin{aligned} \text{Limit} &= 3750 + 173.92 * [(12500 - 3750) / (470 - 260)] \\ &= 3750 + 173.92 * [8750 / 210] \\ &= 10996.7 \mu\text{V/m} \end{aligned}$$

$$\begin{aligned} \text{dB}\mu\text{V/m} &= 20 * \log (\mu\text{V/m}) \\ &= 20 * \log (10996.7) \end{aligned}$$

$$\text{Average Limit at } 433.92 \text{ MHz} = 80.8 \text{ dB}\mu\text{V/m}$$

2. If the average limit is specified for the EUT, the peak limit is 20 dB above the average limit as specified in FCC 15.35 (b)

2. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

3. Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: (1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

Note: (2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

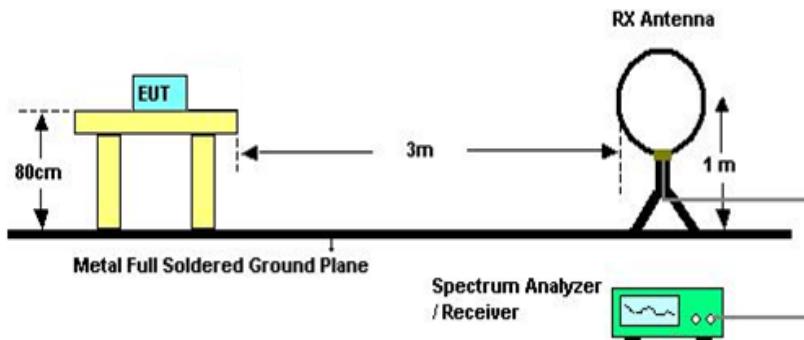


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
6. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
7. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
8. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open field site. Therefore, the sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1GHz

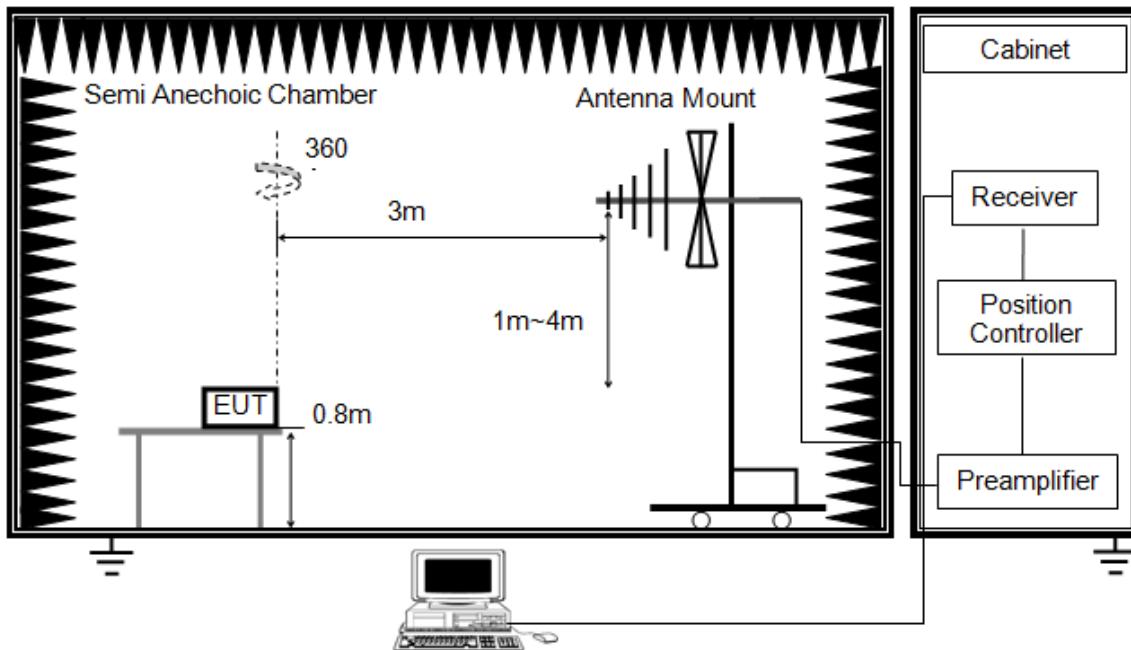


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

Above 1G

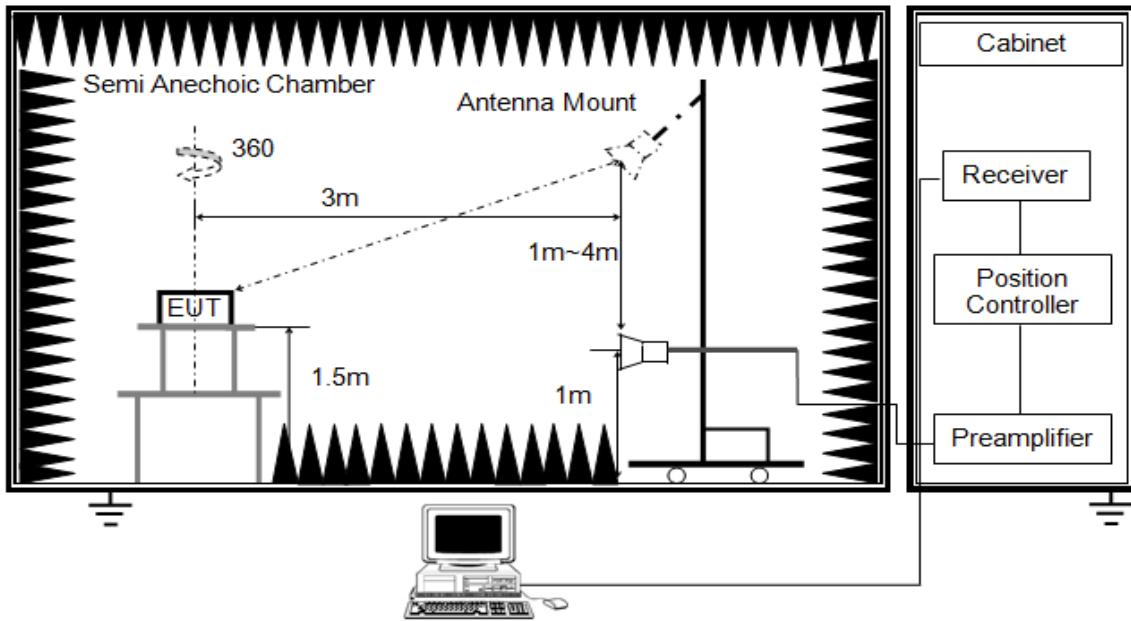


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter or band reject filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements. Where necessary, average emission are determined by applying the Duty Cycle Correction Factor to the peak measurements. For the Duty Cycle and Correction Factor please refer to clause 6.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

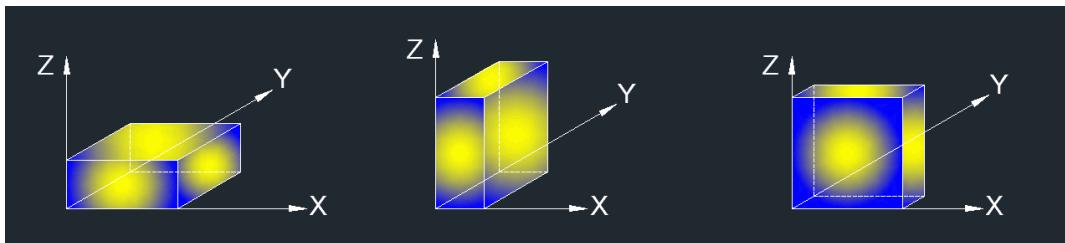

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


TEST ENVIRONMENT

Temperature	22.3 °C	Relative Humidity	63 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 3.0 V

RESULTS


6.4.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

FIELD STRENGTH OF INTENTIONAL EMISSIONS (HORIZONTAL)

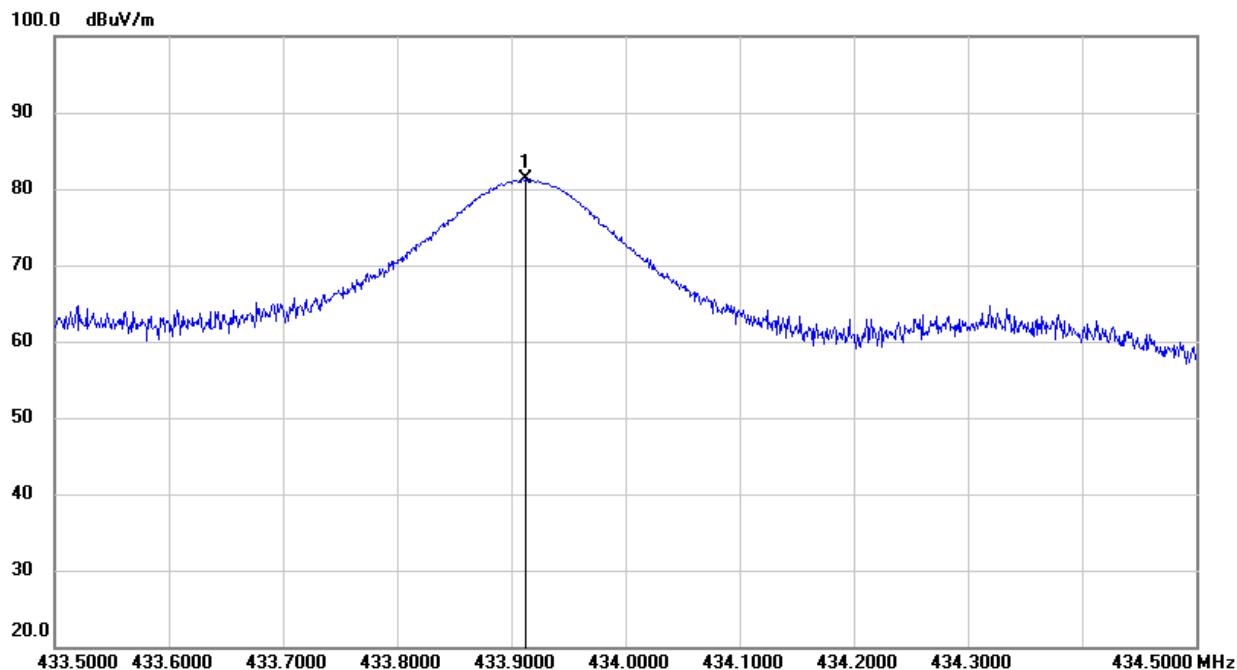

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Peak Result (dBuV/m)	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
433.9120	93.32	-12.09	81.23	/	100.8	-19.57	peak
433.9120	93.32	-12.09	/	72.77	80.8	-8.03	Average

Note: 1. Result Level = Read Level + Correct Factor.
2. Peak: Peak detector.
3. Average Result = Peak Result + Duty Correction Factor.

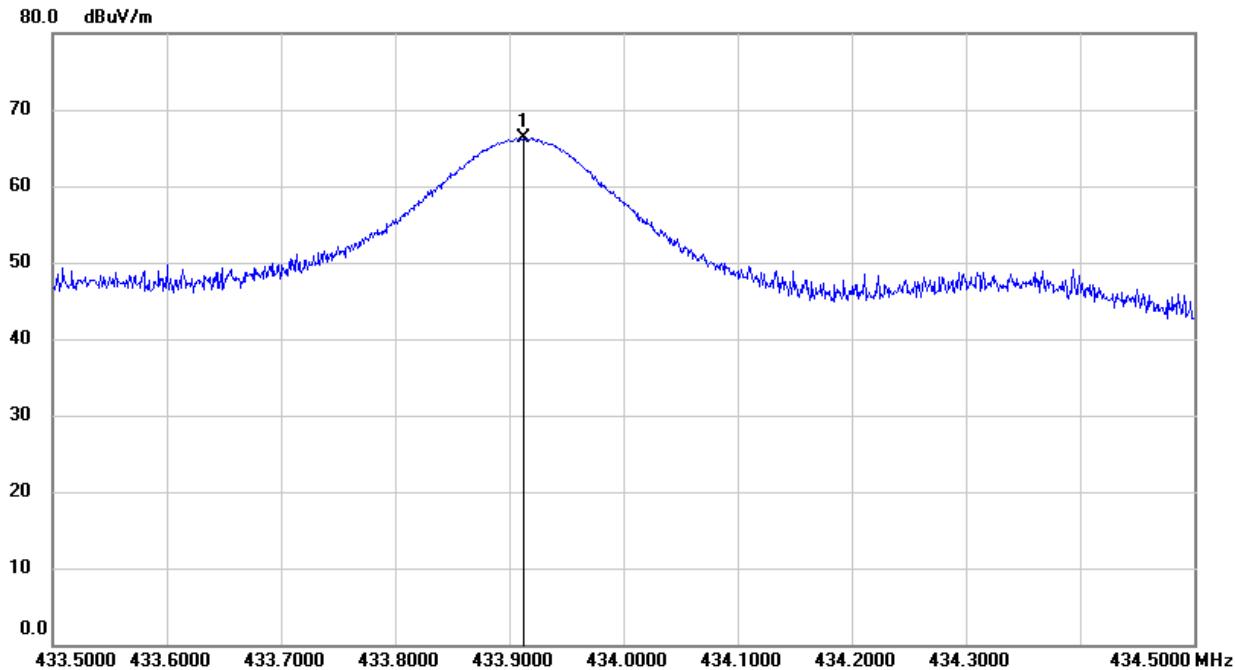
FIELD STRENGTH OF INTENTIONAL EMISSIONS (VERTICAL)

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Peak Result (dBuV/m)	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
433.9130	78.40	-12.09	66.31	/	100.8	-34.49	peak
433.9130	78.40	-12.09	/	57.85	80.8	-15.02	Average

Note: 1. Result Level = Read Level + Correct Factor.
2. Peak: Peak detector.
3. Average Result = Peak Result + Duty Correction Factor.


6.4.2. SPURIOUS EMISSIONS BELOW 1 GHz AND ABOVE 30 MHz

HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

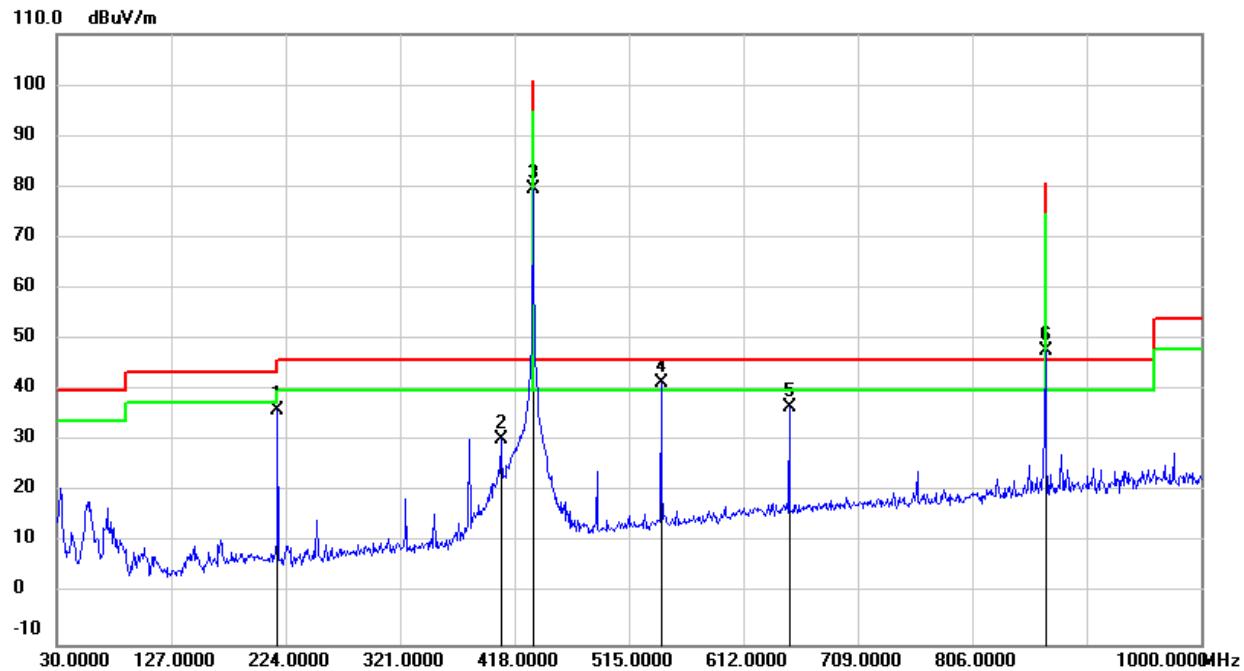

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Peak Result (dBuV/m)	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	217.2100	53.43	-17.44	35.99	/	46.00	-10.01	QP
2	406.3599	43.11	-12.62	30.49	/	46.00	-15.51	QP
3(fundamental frequency)	433.5200	91.57	-12.09	79.48	/	100.80	-21.32	peak
	433.5200	91.57	-12.09	/	71.02	80.80	-9.78	Average
4	542.1599	51.60	-10.01	41.59	/	46.00	-4.41	QP
5	650.8000	44.73	-8.01	36.72	/	46.00	-9.28	QP
6(2th harmonic)	868.0800	52.43	-4.67	47.76	/	80.80	-33.04	peak
	868.0800	52.43	-4.67	/	39.30	60.80	-21.50	Average

Note: 1. Result Level = Read Level + Correct Factor.
 2. Peak: Peak detector.
 3. Mark 3 is the fundamental frequency, Mark 6 is 2th harmonic.
 4. Average Result = Peak Result + Duty Correction Factor.

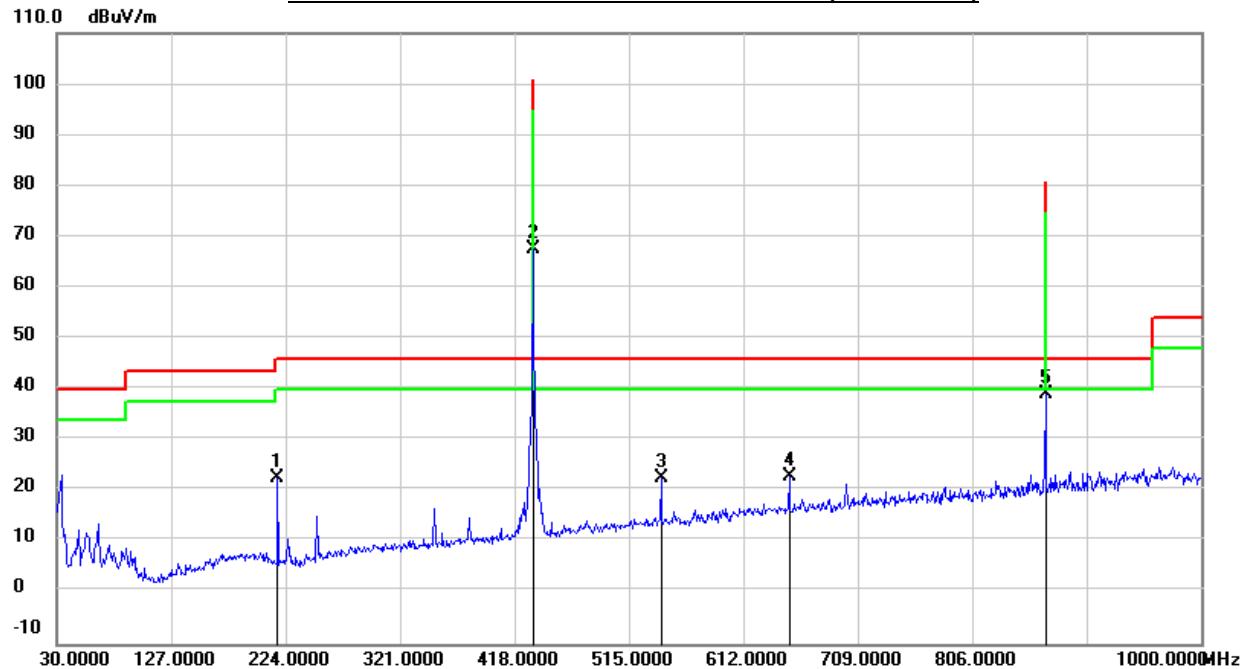HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Peak Result (dBuV/m)	Average Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	217.2100	40.12	-17.44	22.68	/	46.00	-23.32	QP
2(fundamental frequency)	433.5200	79.53	-12.09	67.44	/	100.80	-33.36	peak
	433.5200	79.53	-12.09	/	59.98	80.80	-21.82	Average
3	542.1599	32.43	-10.02	22.41	/	46.00	-23.59	QP
4	650.8000	30.95	-8.01	22.94	/	46.00	-23.06	QP
5(2th harmonic)	868.0800	43.75	-4.67	39.08	/	80.80	-41.72	peak
	868.0800	43.75	-4.67	/	30.62	60.80	-30.18	Average

Note: 1. Result Level = Read Level + Correct Factor.
 2. Peak: Peak detector.
 3. Mark 2 is the fundamental frequency, Mark 5 is 2th harmonic.
 4. Average Result = Peak Result + Duty Correction Factor.

Note: All test mode had been tested, only the worst data recorded in the report.

6.4.3. SPURIOUS EMISSIONS ABOVE 1 GHz


HARMONICS AND SPURIOUS EMISSIONS (HORIZONTAL)

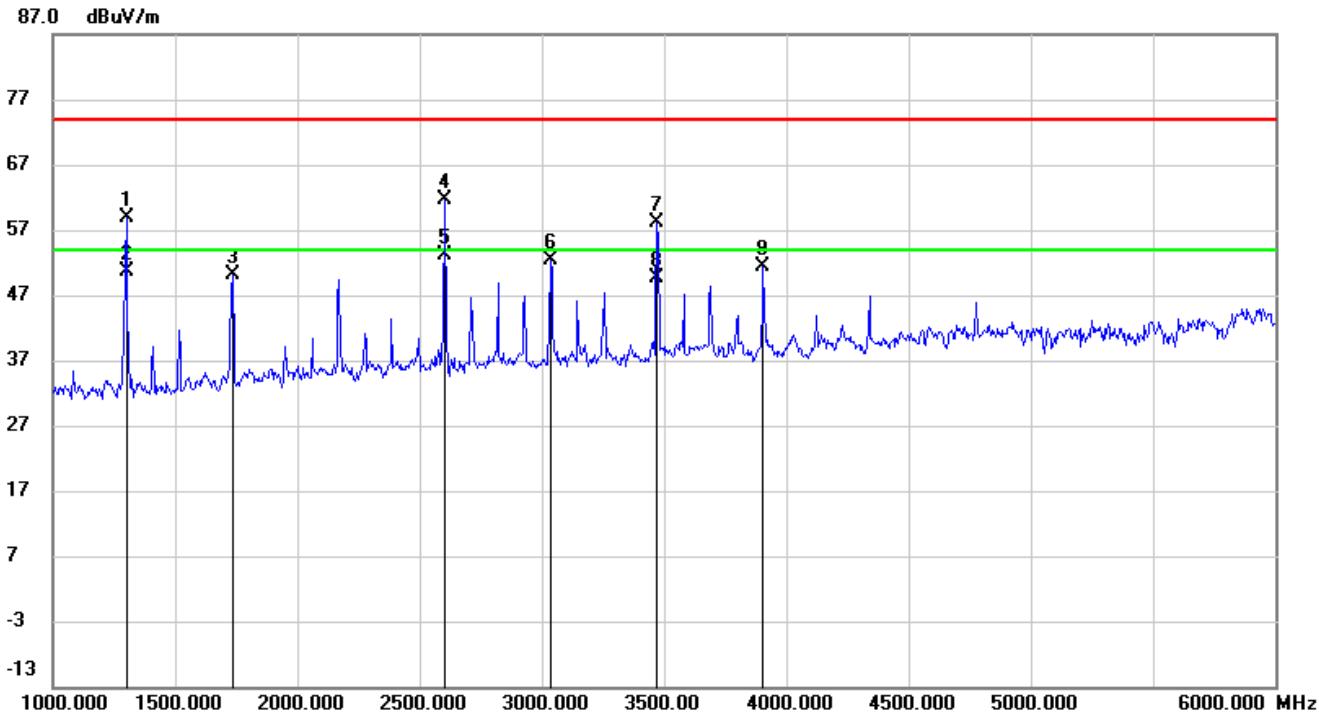

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1(3rd harmonic)	1300.000	71.33	-12.34	58.99	80.80	-21.81	peak
2(3rd harmonic)	1300.000	62.89	-12.34	50.53	60.80	-10.27	AVG
3(4th harmonic)	1735.000	60.75	-10.56	50.19	80.80	-30.61	peak
4(6th harmonic)	2600.000	69.25	-7.70	61.55	80.80	-18.25	peak
5(6th harmonic)	2600.000	60.81	-7.70	53.09	60.80	-7.71	AVG
6(7th harmonic)	3035.000	57.34	-5.06	52.28	80.80	-28.52	peak
7(8th harmonic)	3470.000	62.26	-4.24	58.02	80.80	-22.78	peak
8(8th harmonic)	3470.000	53.82	-4.24	49.56	60.80	-11.24	AVG
9(9th harmonic)	3905.000	54.40	-3.01	51.39	80.80	-29.41	peak

Note:

1. Result Level = Read Level + Correct Factor.
2. Peak: Peak detector.
3. Average Result = Peak Result + Duty Correction Factor.
4. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
5. No burst found in Restricted bands.

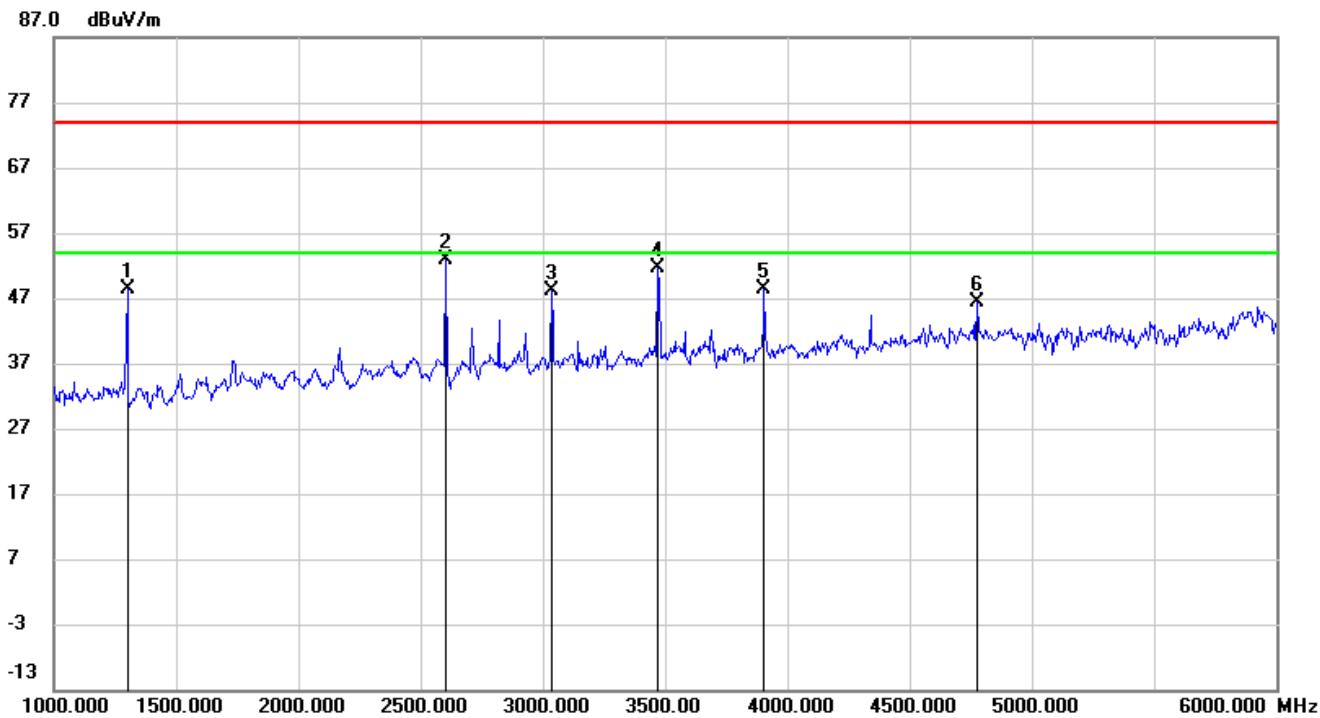HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1(3 rd harmonic)	1300.000	60.62	-12.34	48.28	80.80	-32.52	peak
2(6 th harmonic)	2605.000	60.56	-7.67	52.89	80.80	-27.91	peak
3(7 th harmonic)	3035.000	53.08	-5.06	48.02	80.80	-32.78	peak
4(8 th harmonic)	3470.000	55.75	-4.24	51.51	80.80	-29.29	peak
5(9 th harmonic)	3905.000	51.46	-3.01	48.45	80.80	-32.35	peak
6	4775.000	45.76	0.57	46.33	74.00	-27.67	peak


Note: 1. Result Level = Read Level + Correct Factor.
2. Peak: Peak detector.
3. Average Result = Peak Result + Duty Correction Factor.
4. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
5. No burst found in Restricted bands.

Note: All test mode had been tested, only the worst data record in the report.

6.4.4. SPURIOUS EMISSIONS BELOW 30 MHz

SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

0.09 kHz~ 150 kHz

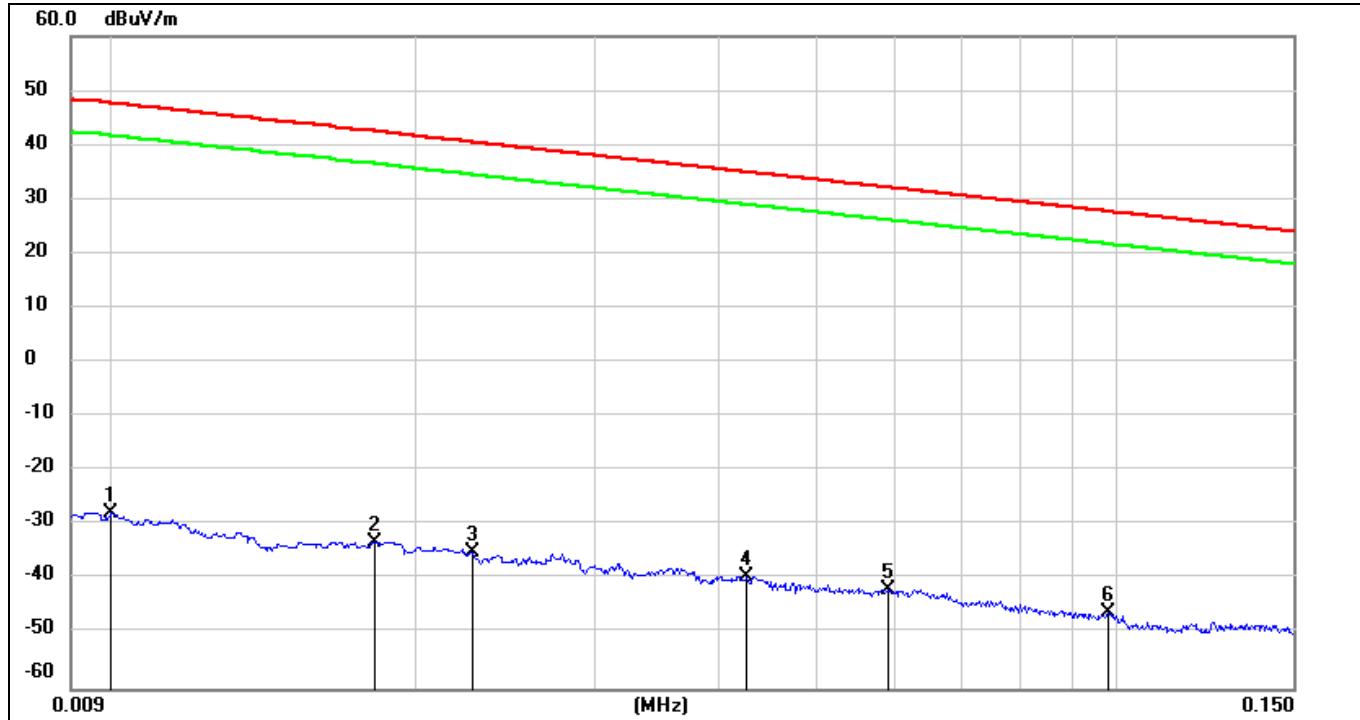


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	73.72	-101.40	-27.68	47.60	-75.28	peak
2	0.0181	68.35	-101.36	-33.01	42.45	-75.46	peak
3	0.0227	66.30	-101.36	-35.06	40.48	-75.54	peak
4	0.0427	62.14	-101.45	-39.31	34.99	-74.30	peak
5	0.0589	59.81	-101.52	-41.71	32.20	-73.91	peak
6	0.0981	55.77	-101.78	-46.01	27.77	-73.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

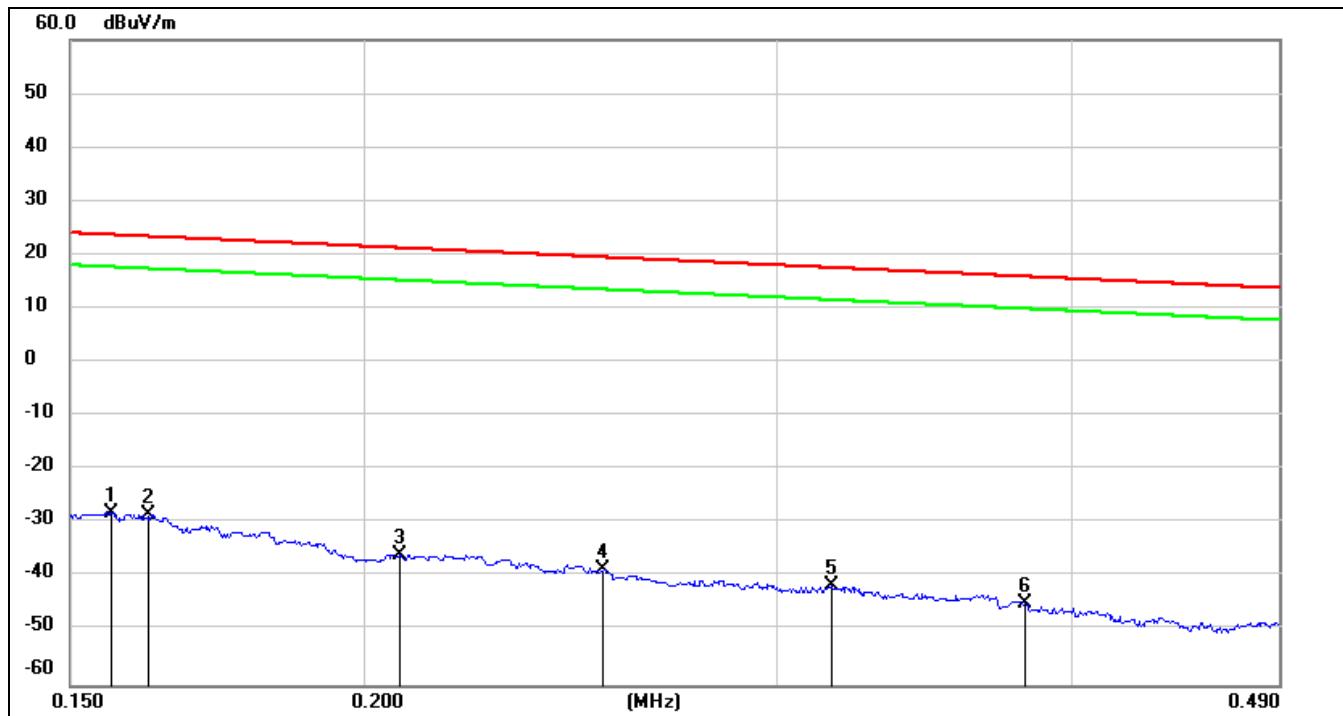
150 kHz ~ 490 kHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1562	73.62	-101.65	-28.03	23.73	-51.76	peak
2	0.1621	73.42	-101.65	-28.23	23.41	-51.64	peak
3	0.2071	65.89	-101.73	-35.84	21.28	-57.12	peak
4	0.2530	63.14	-101.80	-38.66	19.54	-58.20	peak
5	0.3163	60.20	-101.87	-41.67	17.60	-59.27	peak
6	0.3820	57.02	-101.94	-44.92	15.96	-60.88	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

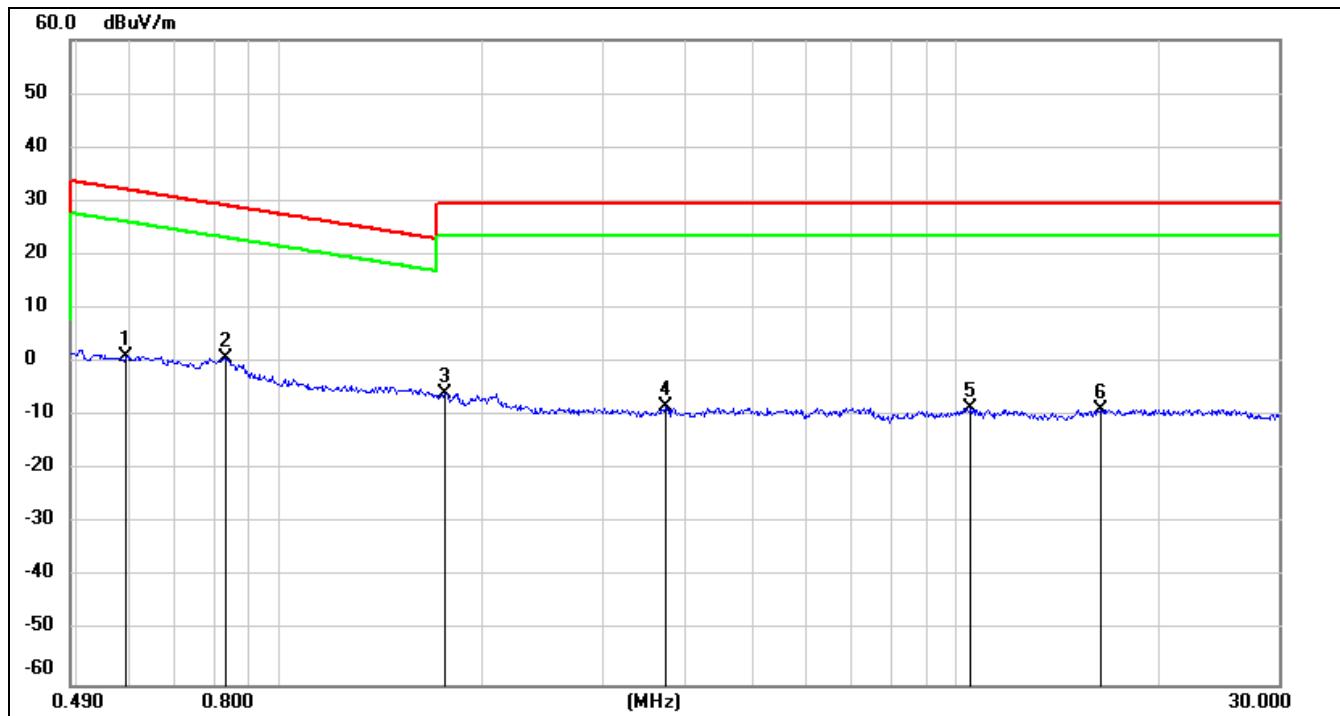490 kHz ~ 30 MHz

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5917	63.24	-62.08	1.16	32.16	-31.00	peak
2	0.8296	62.94	-62.17	0.77	29.23	-28.46	peak
3	1.7580	56.08	-61.93	-5.85	29.54	-35.39	peak
4	3.7100	53.20	-61.41	-8.21	29.54	-37.75	peak
5	10.5234	52.30	-60.82	-8.52	29.54	-38.06	peak
6	16.3959	52.17	-60.96	-8.79	29.54	-38.33	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

7. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT