

TEST REPORT

Reference No. : WTD17S0271945-1E
FCC ID..... : 2AMNG-TG100
Applicant : Toast, Incorporated
Address : 401 Park Drive, Suite 801, Boston, MA 02215.
Manufacturer : Finance Metadata Information Solution (Shen Zhen) Co.,Ltd.
Address : Longhom Hi-tech Estate, Gongyeyuan Road, Dalang Street, Longhua
New District, Shenzhen, China
Product : Tablet PC
Model(s)..... : TG100
Standards : FCC CFR47 Part 15 Section 15.247: 2016
Date of Receipt sample : 2017-02-27
Date of Test..... : 2017-07-29 to 2017-09-16
Date of Issue : 2017-09-19
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Tested by:

Jack Wen

Jack Wen / Test Engineer

Approved by:

 *Philo Zhong*

Philo Zhong / Manager

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	8
5.3 TEST EQUIPMENT CALIBRATION	8
6 TEST SUMMARY	9
7 CONDUCTED EMISSION	10
7.1 E.U.T. OPERATION	10
7.2 EUT SETUP.....	10
7.3 MEASUREMENT DESCRIPTION	10
7.4 CONDUCTED EMISSION TEST RESULT	11
8 RADIATED EMISSIONS.....	13
8.1 EUT OPERATION.....	13
8.2 TEST SETUP	14
8.3 SPECTRUM ANALYZER SETUP	15
8.4 TEST PROCEDURE	16
8.5 SUMMARY OF TEST RESULTS	17
9 CONDUCTED SPURIOUS EMISSIONS.....	20
9.1 TEST PROCEDURE	20
9.2 TEST RESULT	21
10 BAND EDGE MEASUREMENT	30
10.1 TEST PROCEDURE.....	30
10.2 TEST RESULT:	31
11 BANDWIDTH MEASUREMENT.....	37
11.1 TEST PROCEDURE:.....	37
11.2 TEST RESULT:	37
12 MAXIMUM PEAK OUTPUT POWER	42
12.1 TEST PROCEDURE:.....	42
12.2 TEST RESULT:	42
13 HOPPING CHANNEL SEPARATION	48
13.1 TEST PROCEDURE:.....	48
13.2 TEST RESULT:	48
14 NUMBER OF HOPPING FREQUENCY.....	54
14.1 TEST PROCEDURE:.....	54
14.2 TEST RESULT:	54

15	DWELL TIME	56
15.1	TEST PROCEDURE:.....	56
15.2	TEST RESULT:	56
16	ANTENNA REQUIREMENT	62
17	SAR EVALUATION	63
18	PHOTOGRAPHS -TEST SETUP PHOTOS	64
18.1	PHOTOGRAPH-CONDUCTED EMISSIONS TEST SETUP	64
18.2	PHOTOGRAPH-RADIATED EMISSIONS.....	64
19	PHOTOGRAPHS – CONSTRUCTIONAL DETAILS	67

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD17S0271945-1E	2017-02-27	2017-07-29 to 2017-09-16	2017-09-19	original	-	Valid

4 General Information

4.1 General Description of E.U.T

Product	: Tablet PC
Model(s)	: TG100
Operation Frequency	: 2402-2480MHz, 79(EDR) Channels in total
Bluetooth Version	: 4.0(With BLE)
RF out Power	: -1.52dBm
The Lowest Oscillator	: 19.2MHz
Antenna Gain	: -0.86dBi
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Antenna installation	: Integrated Antenna

4.2 Details of E.U.T.

Ratings	DC 3.7V, 4100mAh, power by battery (Adapter: Input:100-240V~50/60 Hz, 0.35A MAX Output:5.0V  2.0A)
Adapter	Model: HNEM050200UU

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Table 1 Tests Carried Out Under FCC part 15.247

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Table 2 Tests Carried Out Under FCC part 15.207 and 15.209

Test Item	Test Mode
Radiated Emissions	Transmitting
Conducted Emissions	Transmitting

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-09-14	2018-09-13
2	Amplifier	Agilent	8447D	2944A10178	2016-10-17	2017-10-16
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	2017-04-09	2018-04-08
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2017-09-12	2018-09-11
5	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-04-09	2018-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-09-14	2018-09-13
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2017-04-13	2018-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-09	2018-04-08
3	Amplifier	ANRITSU	MH648A	M43381	2017-04-13	2018-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-14	2018-09-13
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., L TD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

6 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	C
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	C
Conducted Spurious Emissions	15.247	C
Band edge	15.247(d) 15.205(a)	C
Bandwidth	15.247(a)(1)	C
Maximum Peak Output Power	15.247(b)(1)	C
Frequency Separation	15.247(a)(1)	C
Number of Hopping Frequency	15.247(a)(1)(iii)	C
Dwell time	15.247(a)(1)(iii)	C
SAR	1.1307(b)(1)	C
Antenna Requirement	15.203	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Qsi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

*Decreases with the logarithm of the frequency.

7.1 E.U.T. Operation

Operating Environment :

Temperature: 22.8 °C

Humidity: 52.6 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

Refer to Section 4.4.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

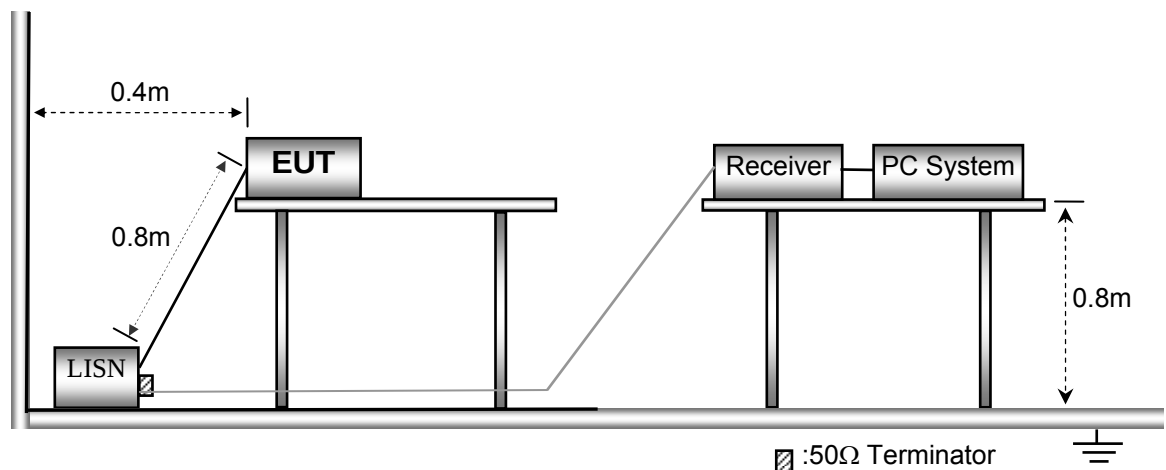


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.

Live line:

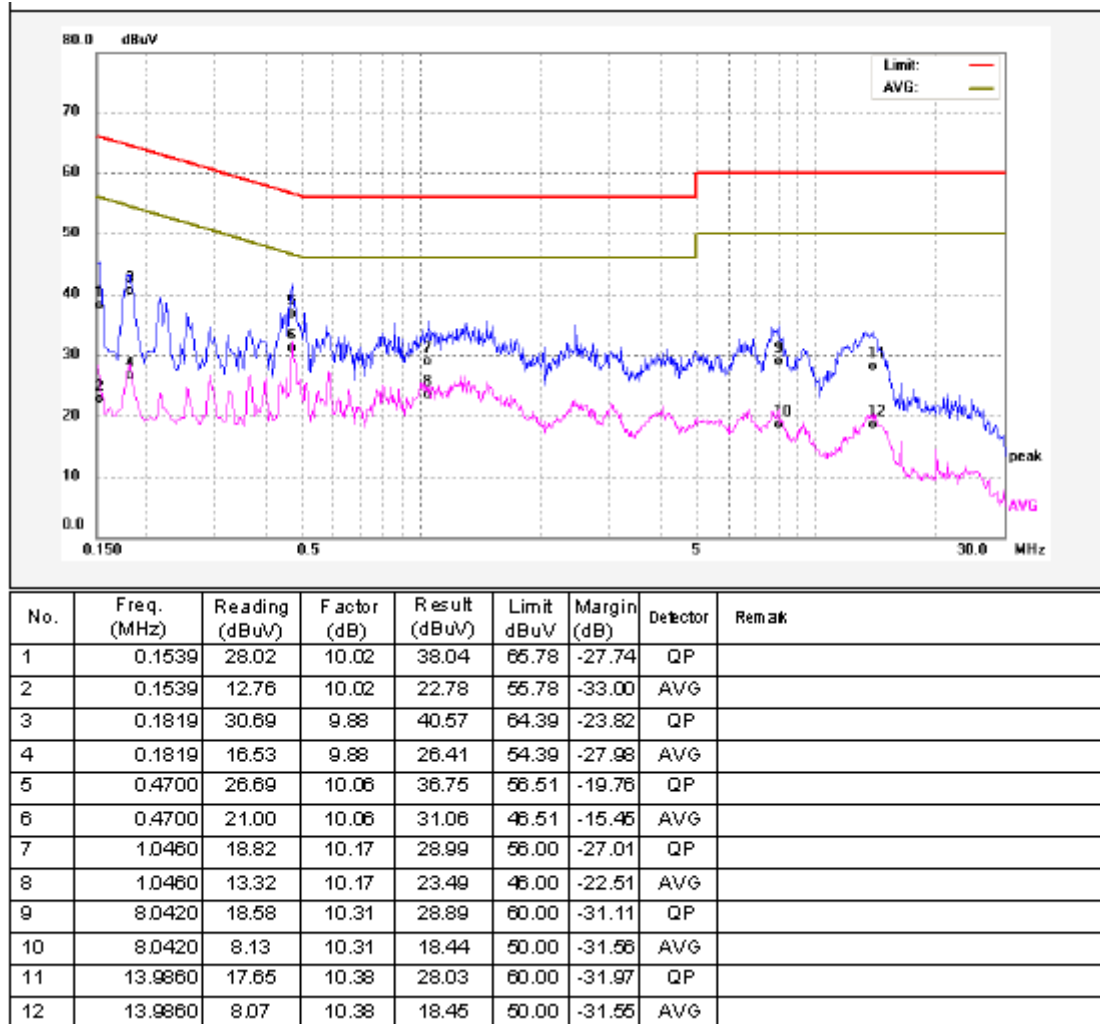

Neutral line:

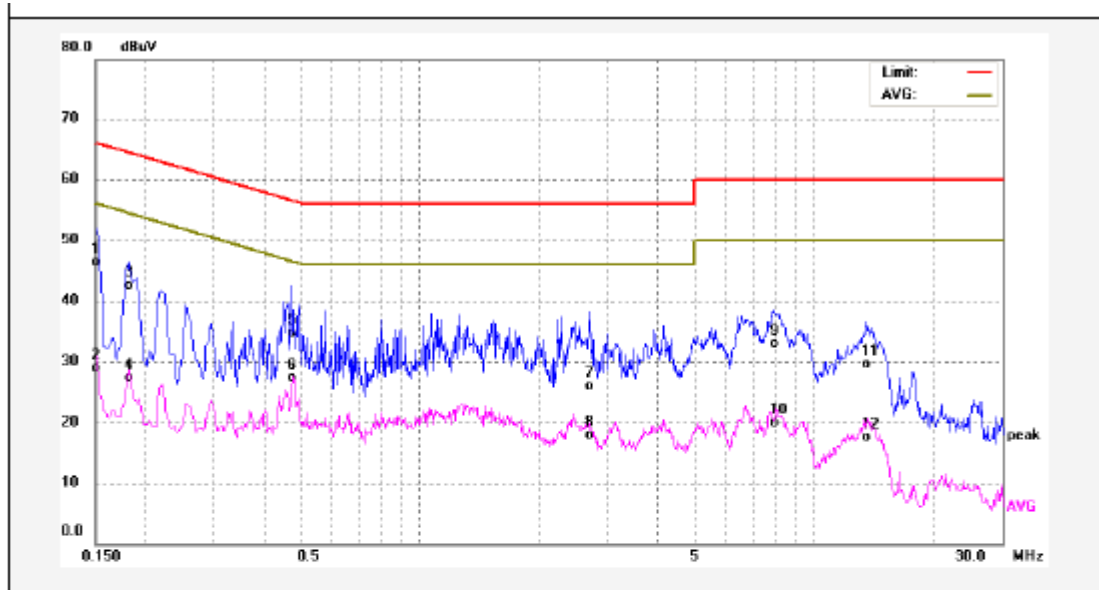

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1500	36.30	10.06	46.36	65.99	-19.63	QP	
2	0.1500	18.86	10.06	28.92	55.99	-27.07	AVG	
3	0.1819	32.59	9.88	42.47	64.39	-21.92	QP	
4	0.1819	17.51	9.88	27.39	54.39	-27.00	AVG	
5	0.4740	24.55	10.07	34.62	56.44	-21.82	QP	
6	0.4740	17.28	10.07	27.35	46.44	-19.09	AVG	
7	2.6860	15.59	10.23	25.82	56.00	-30.18	QP	
8	2.6860	7.68	10.23	17.91	46.00	-28.09	AVG	
9	7.8860	22.61	10.31	32.92	60.00	-27.08	QP	
10	7.8860	9.67	10.31	19.98	50.00	-30.02	AVG	
11	13.5780	19.16	10.38	29.54	60.00	-30.46	QP	
12	13.5780	7.06	10.38	17.44	50.00	-32.56	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

Refer to Section 4.4.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

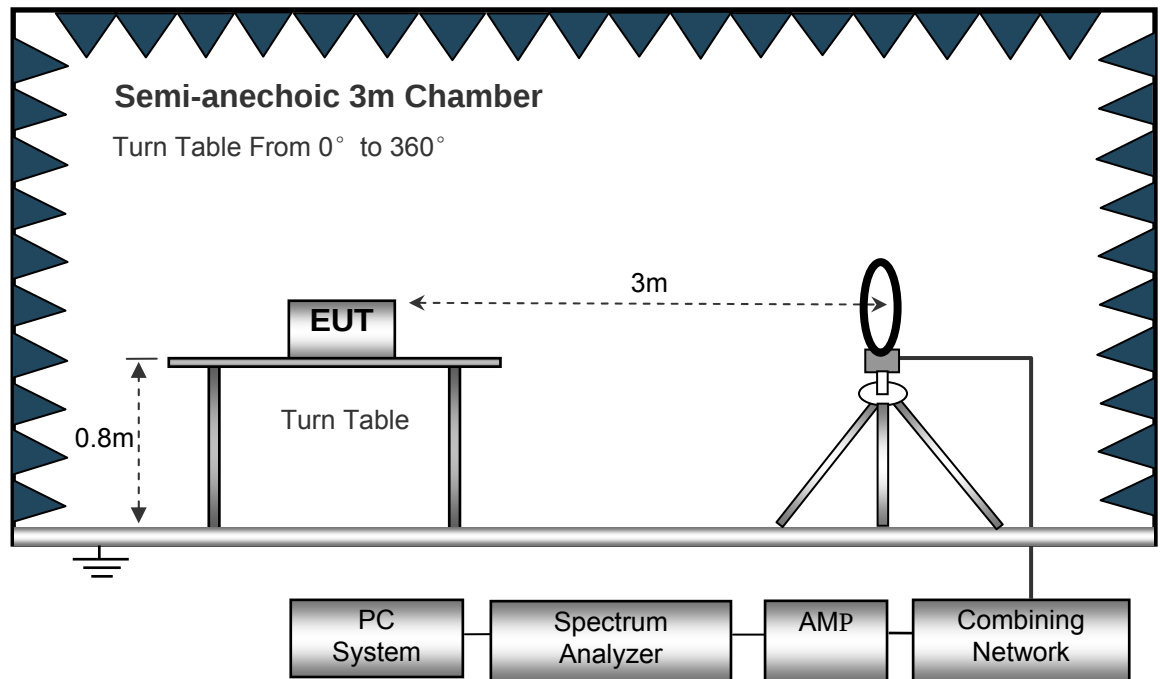

The test setup for emission measurement from 30 MHz to 1 GHz.

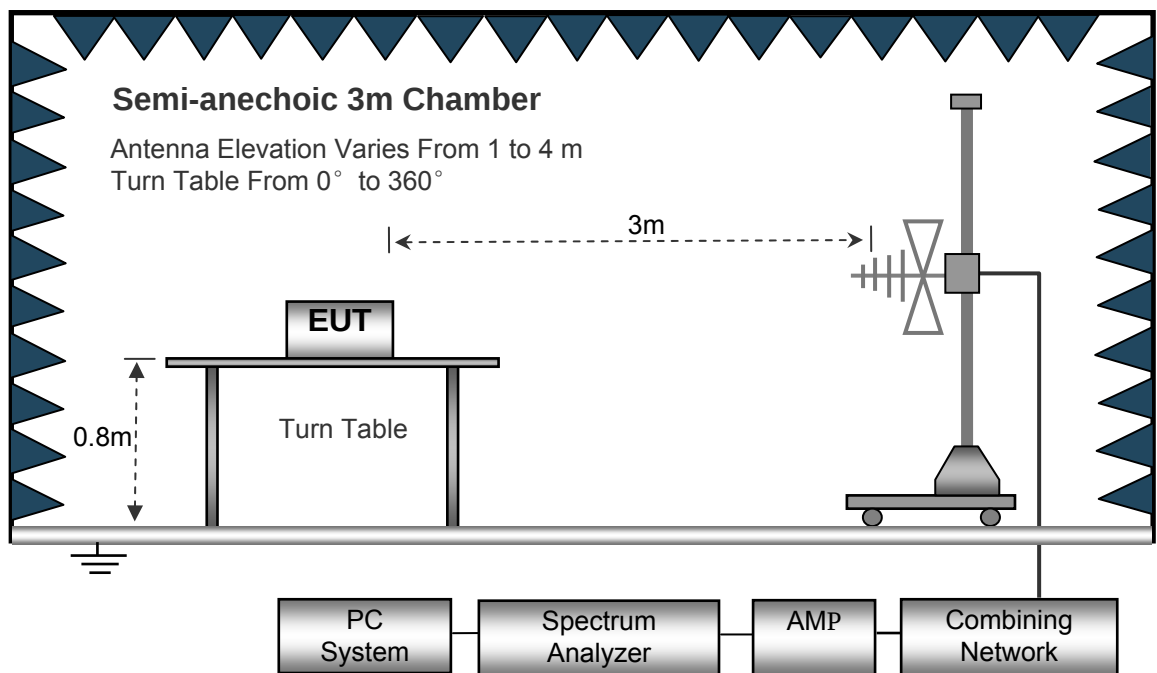

The test setup for emission measurement above 1 GHz.

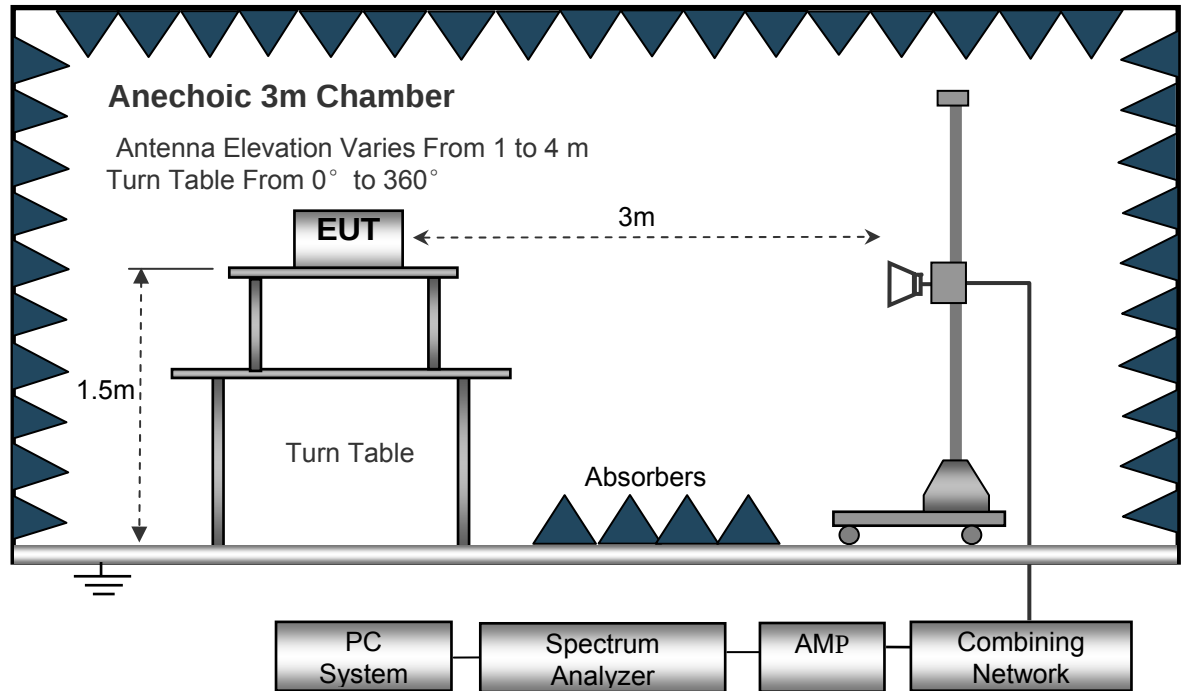

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Summary of Test Results

Test Frequency: 19.2MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
252.48	36.29	QP	133	1.4	H	-13.35	22.94	46.00	-23.06
252.36	41.26	QP	263	1.7	V	-13.35	27.91	46.00	-18.09
4804.00	44.23	PK	5	1.3	V	-1.06	43.17	74.00	-30.83
4804.00	43.26	Ave	5	1.3	V	-1.06	42.20	54.00	-11.80
7206.00	40.12	PK	106	1.9	H	1.33	41.45	74.00	-32.55
7206.00	35.20	Ave	106	1.9	H	1.33	36.53	54.00	-17.47
2329.24	45.14	PK	277	1.2	V	-13.19	31.95	74.00	-42.05
2329.24	39.24	Ave	277	1.2	V	-13.19	26.05	54.00	-27.95
2353.68	43.19	PK	239	1.4	H	-13.14	30.05	74.00	-43.95
2353.68	36.83	Ave	239	1.4	H	-13.14	23.69	54.00	-30.31
2491.49	42.85	PK	138	1.9	V	-13.08	29.77	74.00	-44.23
2491.49	38.61	Ave	138	1.9	V	-13.08	25.53	54.00	-28.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2441MHz									
253.29	36.52	QP	96	1.6	H	-13.35	23.17	46.00	-22.83
253.29	40.15	QP	121	1.8	V	-13.35	26.80	46.00	-19.20
4804.00	45.19	PK	200	1.4	V	-1.06	44.13	74.00	-29.87
4804.00	43.10	Ave	200	1.4	V	-1.06	42.04	54.00	-11.96
7206.00	40.17	PK	88	1.6	H	1.33	41.50	74.00	-32.50
7206.00	35.29	Ave	88	1.6	H	1.33	36.62	54.00	-17.38
2340.77	46.08	PK	124	1.2	V	-13.19	32.89	74.00	-41.11
2340.77	38.34	Ave	124	1.2	V	-13.19	25.15	54.00	-28.85
2388.26	43.41	PK	8	1.3	H	-13.14	30.27	74.00	-43.73
2388.26	37.41	Ave	8	1.3	H	-13.14	24.27	54.00	-29.73
2488.56	43.64	PK	135	1.8	V	-13.08	30.56	74.00	-43.44
2488.56	38.94	Ave	135	1.8	V	-13.08	25.86	54.00	-28.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel 2480MHz									
253.29	38.22	QP	23	1.2	H	-13.35	24.87	46.00	-21.13
253.29	42.56	QP	78	1.6	V	-13.35	29.21	46.00	-16.79
4960.00	43.89	PK	262	1.9	V	-0.24	43.65	74.00	-30.35
4960.00	40.39	Ave	262	1.9	V	-0.24	40.15	54.00	-13.85
7440.00	39.26	PK	34	1.3	H	2.84	42.10	74.00	-31.90
7440.00	36.23	Ave	34	1.3	H	2.84	39.07	54.00	-14.93
2336.43	46.68	PK	270	1.6	V	-13.19	33.49	74.00	-40.51
2336.43	39.64	Ave	270	1.6	V	-13.19	26.45	54.00	-27.55
2386.18	42.12	PK	308	1.0	H	-13.14	28.98	74.00	-45.02
2386.18	37.87	Ave	308	1.0	H	-13.14	24.73	54.00	-29.27
2491.51	43.18	PK	113	1.8	V	-13.08	30.10	74.00	-43.90
2491.51	38.12	Ave	113	1.8	V	-13.08	25.04	54.00	-28.96

9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 1MHz, VBW = 3MHz, Sweep = auto


Detector function = peak, Trace = max hold

9.2 Test Result


GFSK
Low Channel

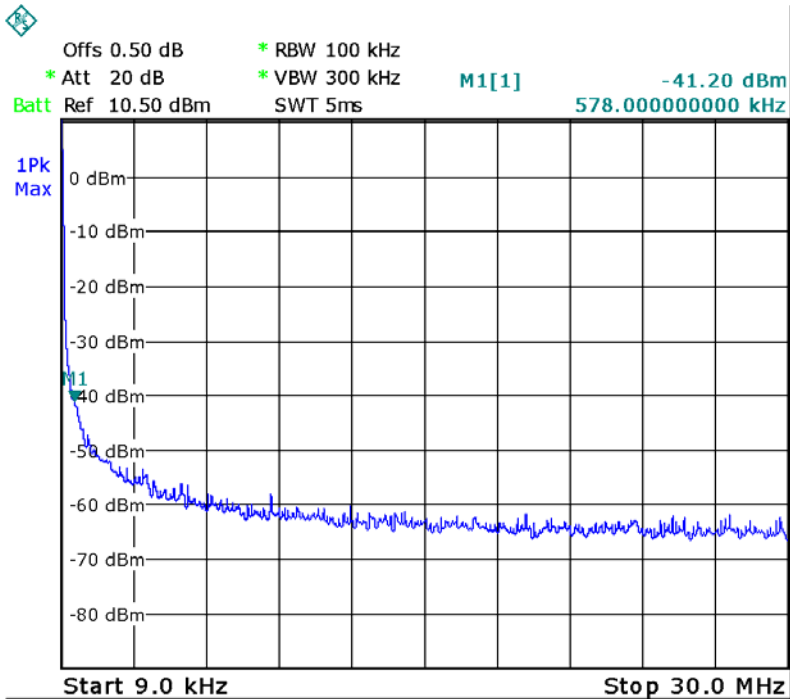

Middle Channel

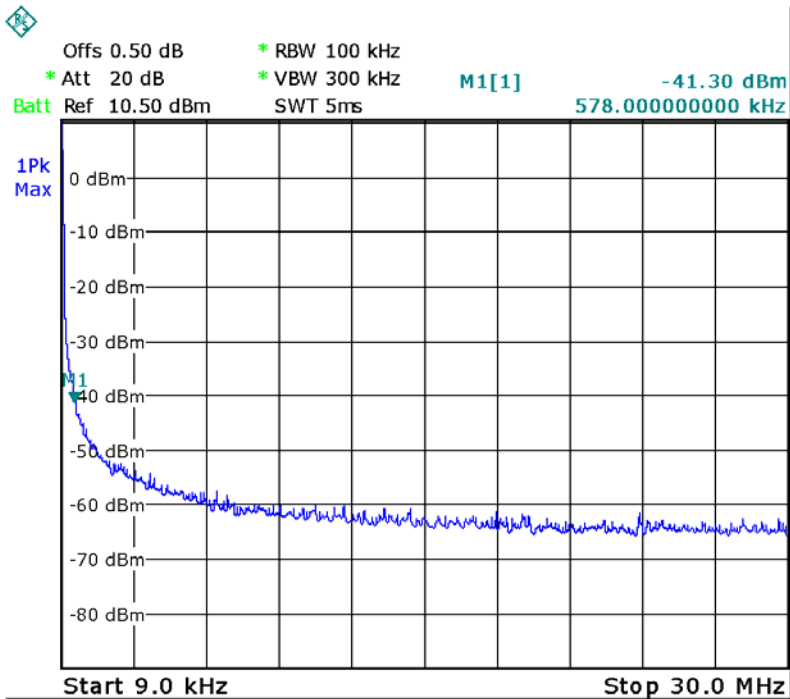

High Channel

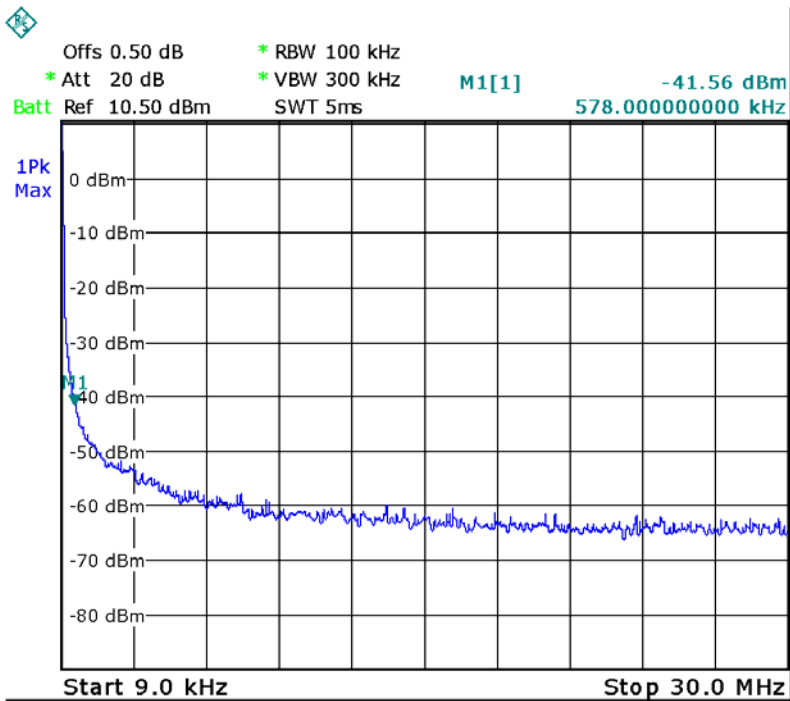


GFSK
Low Channel

Fundamental




Middle Channel

Fundamental

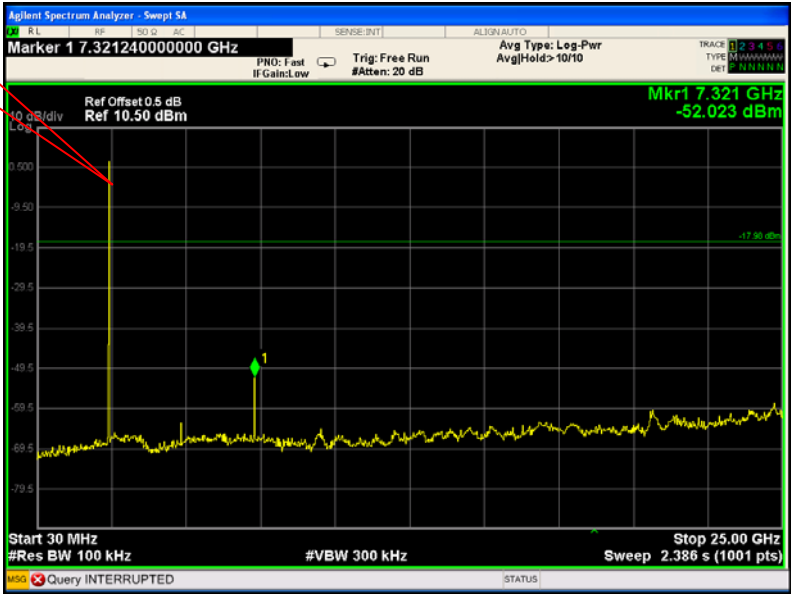


High Channel


Fundamental

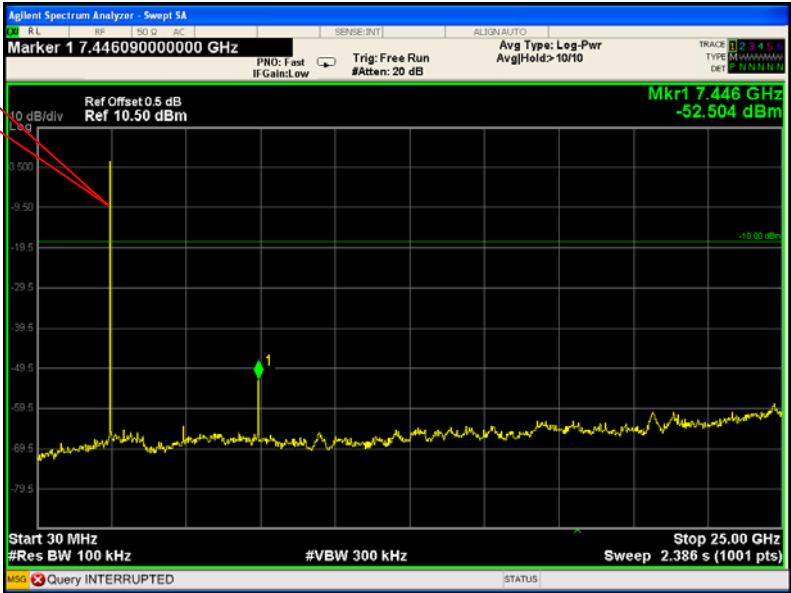


Pi/4DQPSK
Low Channel

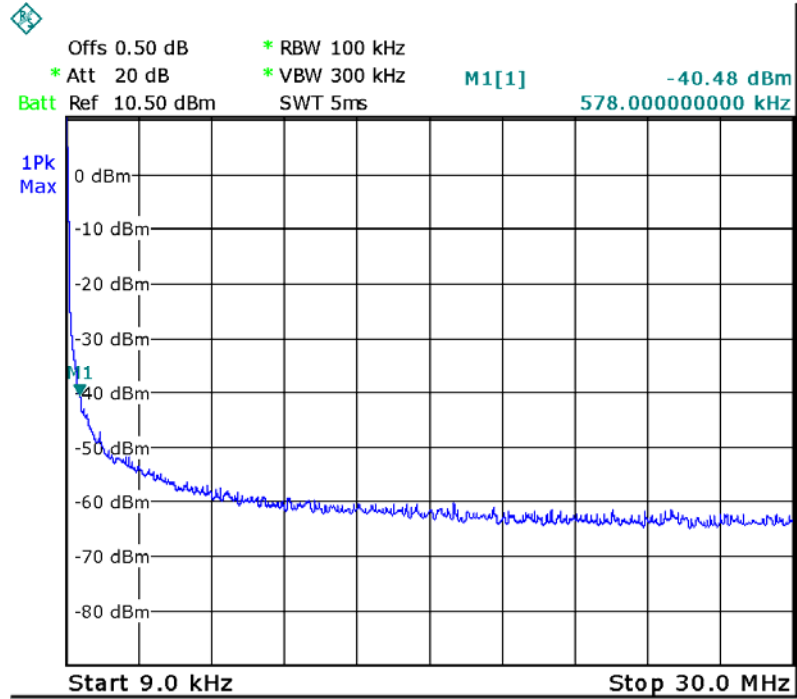

Middle Channel

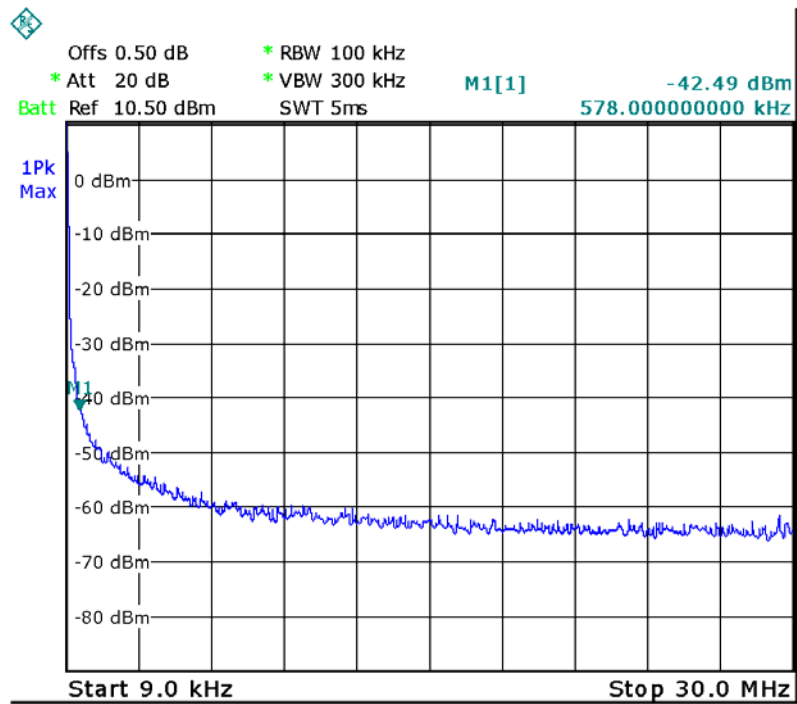


High Channel

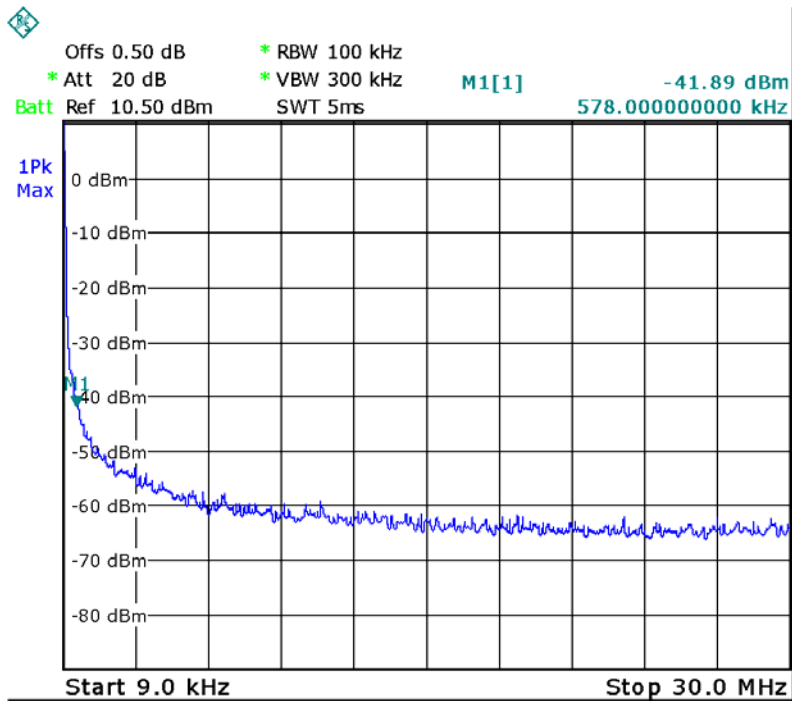

Pi/4DQPSK


Low Channel

Fundamental

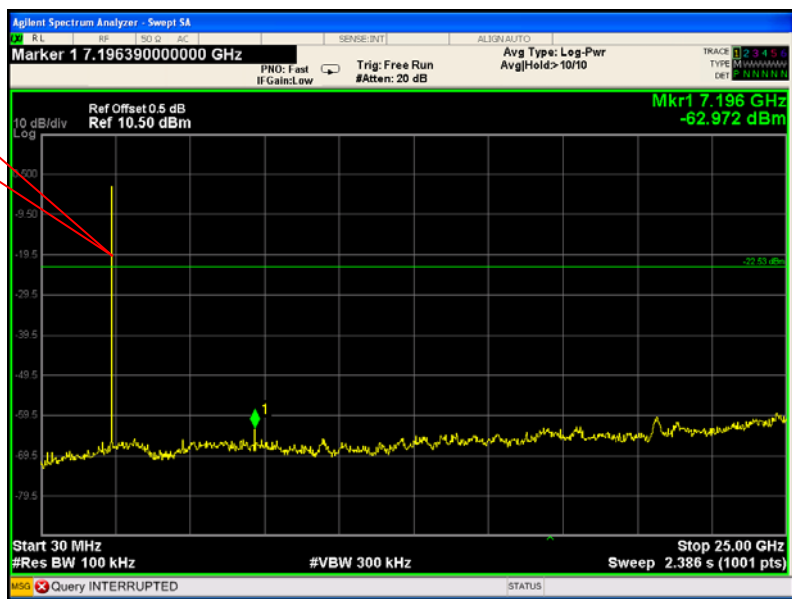


Middle Channel

Fundamental

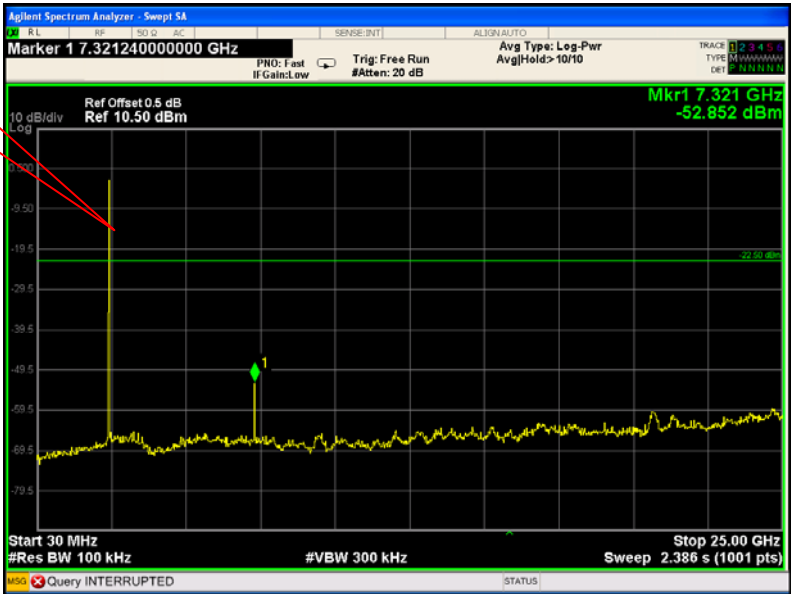

High Channel

Fundamental

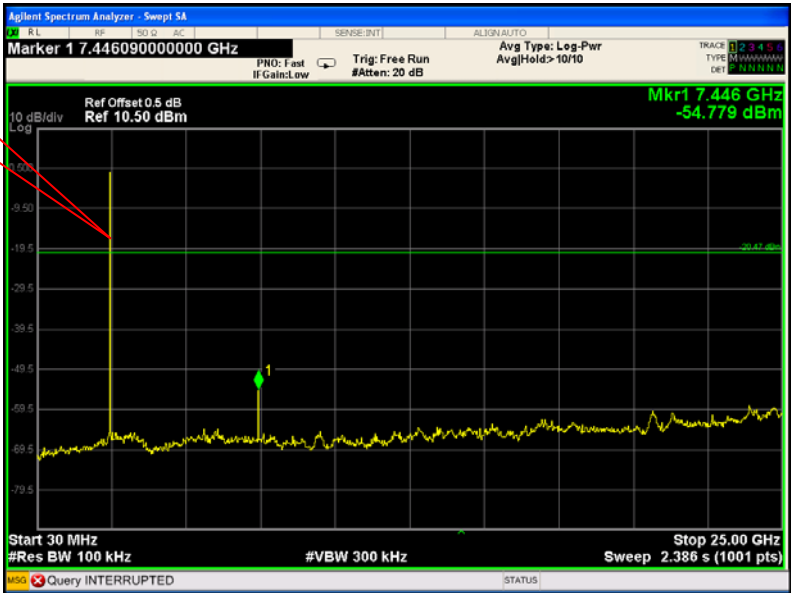

Offs 0.50 dB
 * Att 20 dB
 * RBW 100 kHz
 * VBW 300 kHz
 M1[1]
 -42.08 dBm
 Batt Ref 10.50 dBm
 SWT 5ms
 578.00000000 kHz

1Pk
 Max

0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm
 -80 dBm

Start 9.0 kHz Stop 30.0 MHz


Offs 0.50 dB
 * Att 20 dB
 * RBW 100 kHz
 * VBW 300 kHz
 Batt Ref 10.50 dBm
 SWT 5ms
 M1[1]
 -41.76 dBm
 578.00000000 kHz

1Pk
 Max

0 dBm
 -10 dBm
 -20 dBm
 -30 dBm
 -40 dBm
 -50 dBm
 -60 dBm
 -70 dBm
 -80 dBm

Start 9.0 kHz
 Stop 30.0 MHz


High Channel

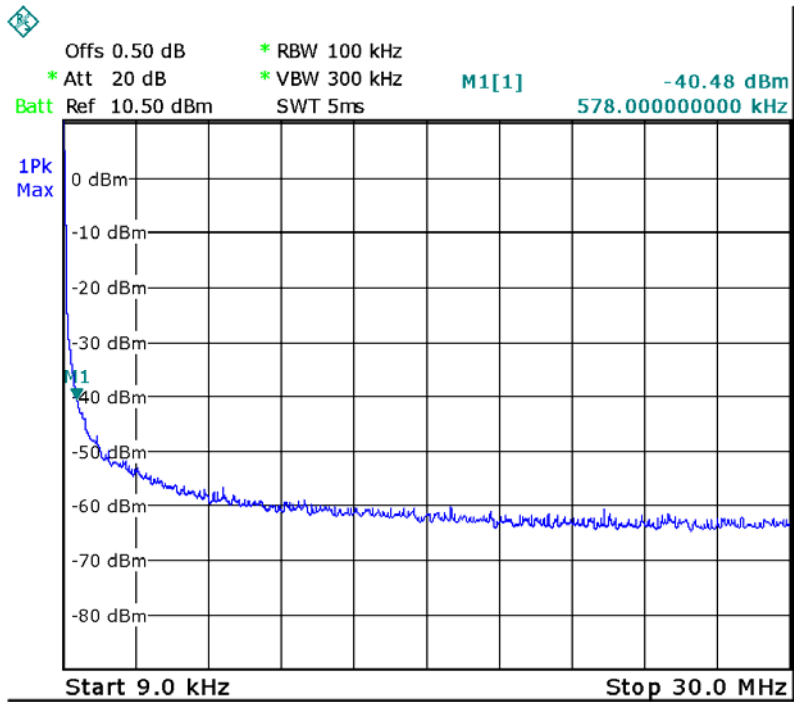


8DPSK

Low Channel


Fundamental

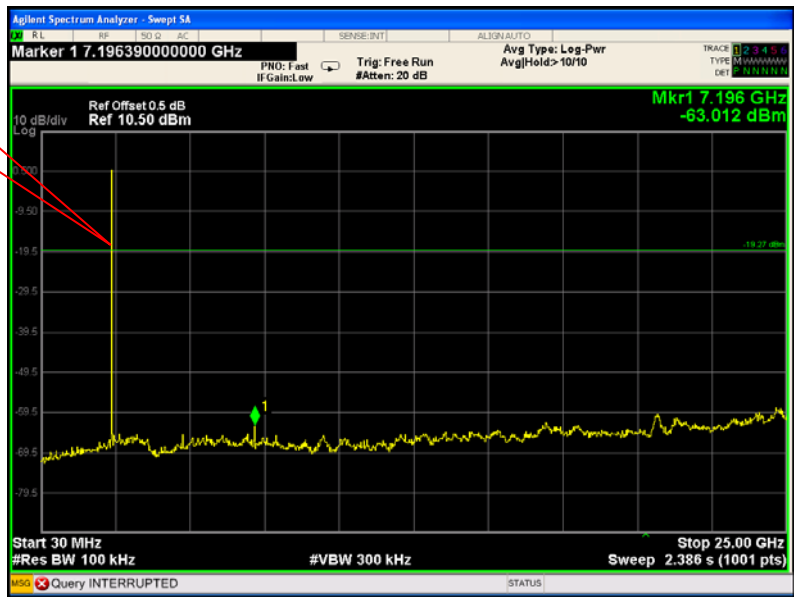

Middle Channel

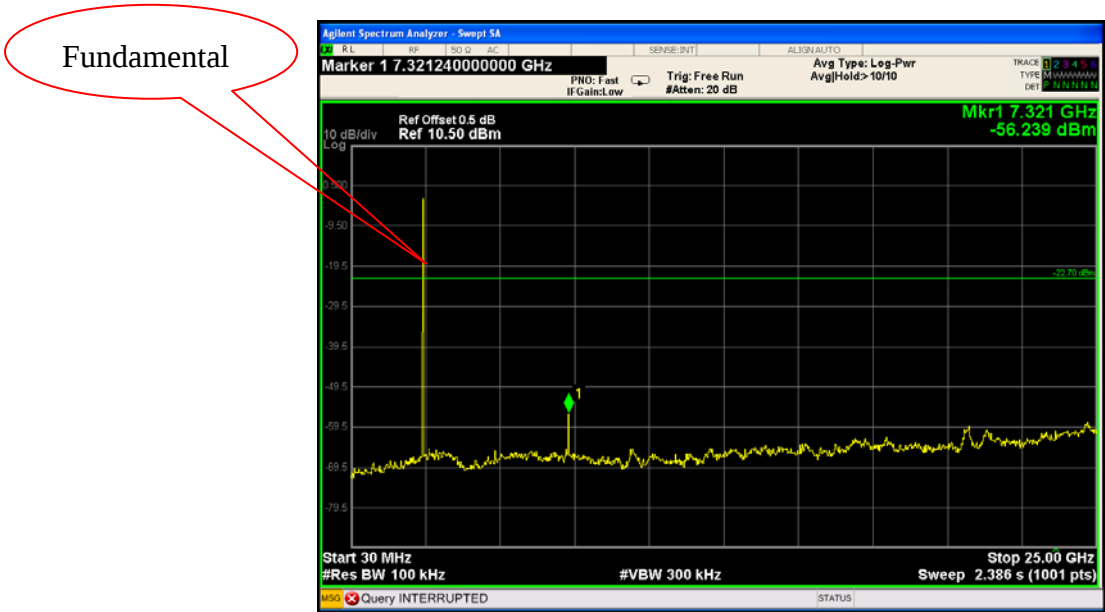

High Channel

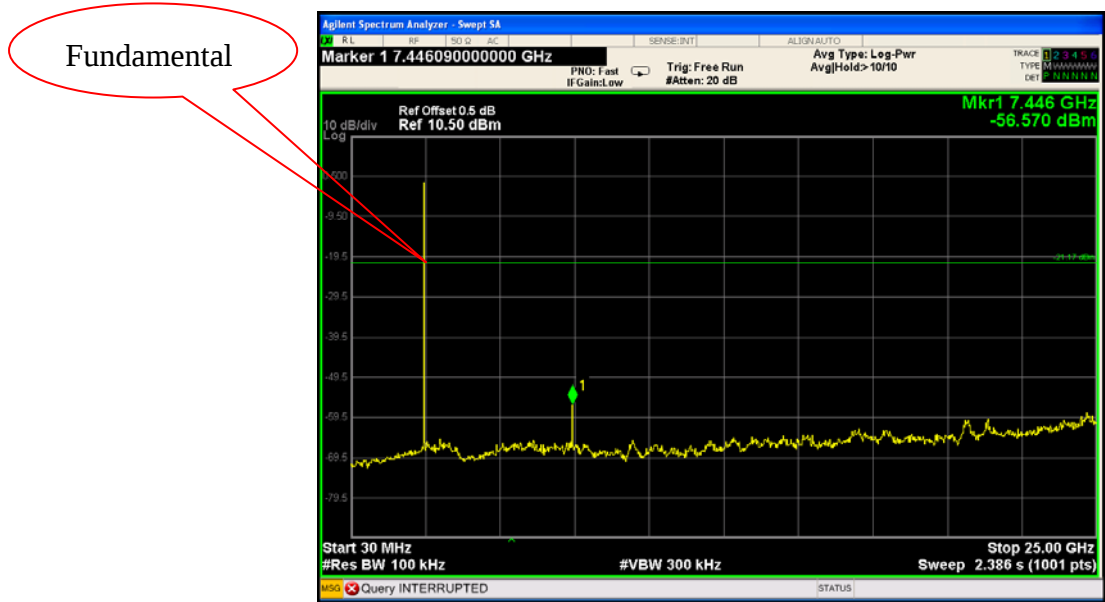

10 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



10.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold



10.2 Test Result:

Test plots

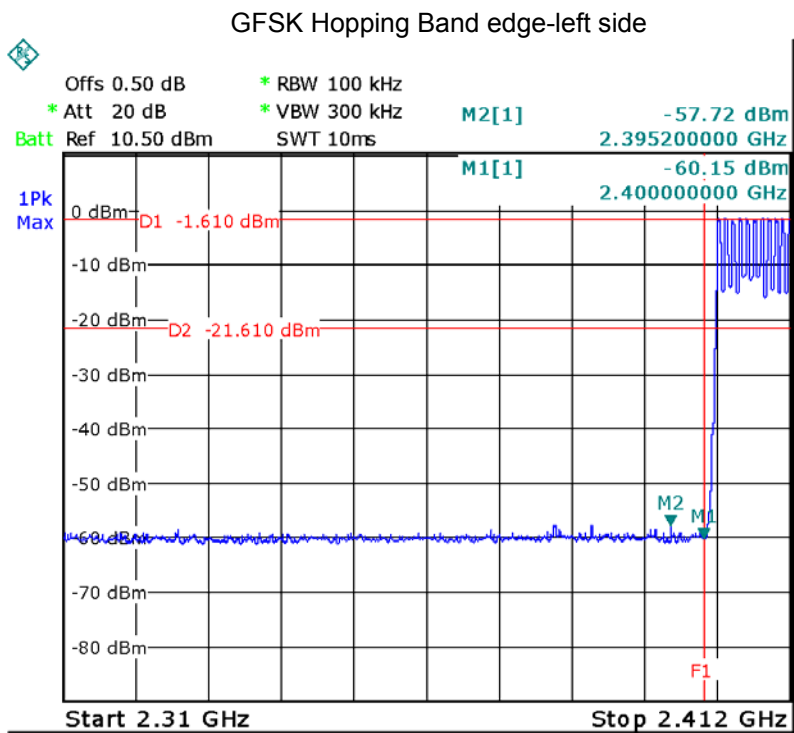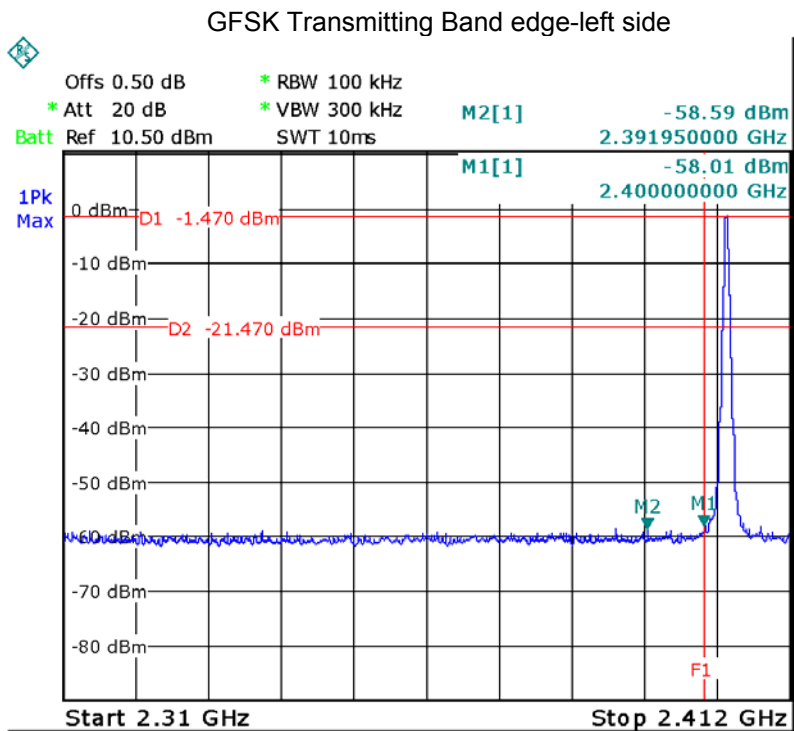


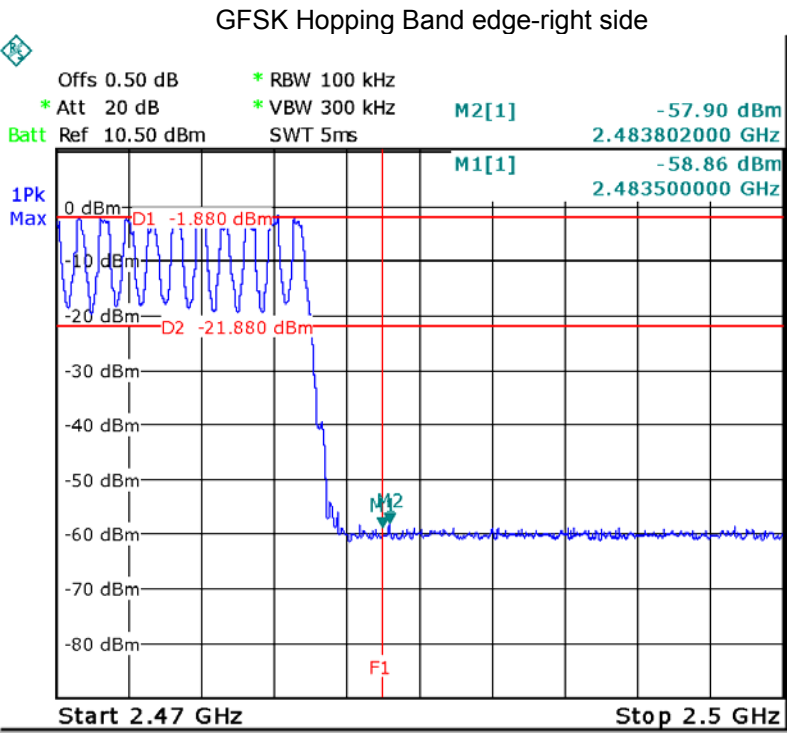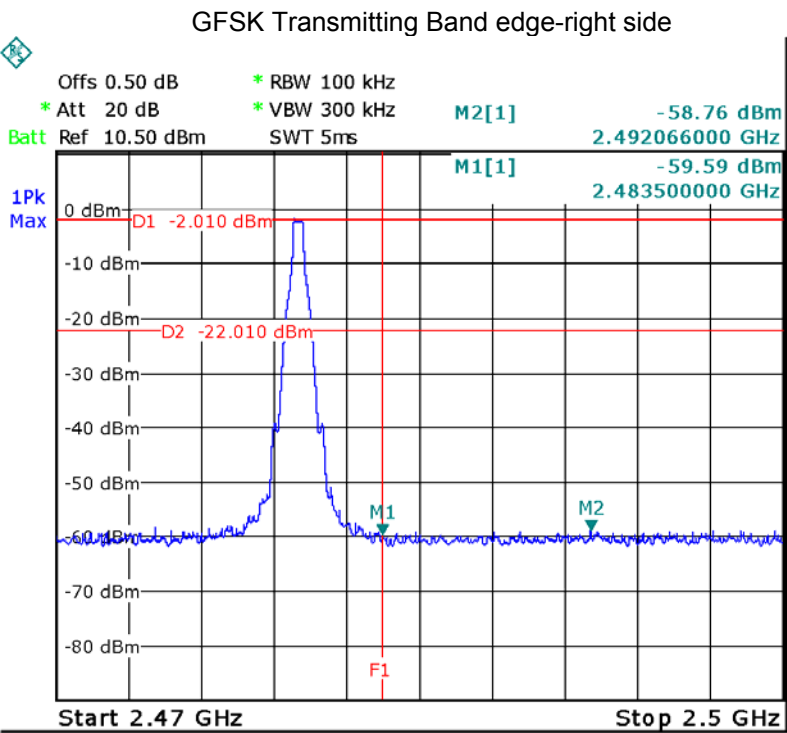

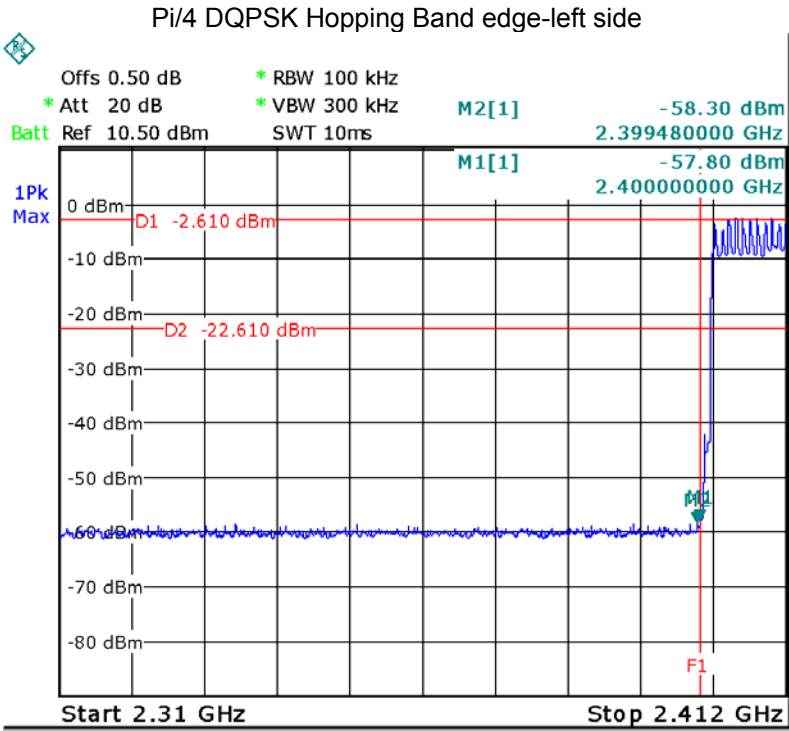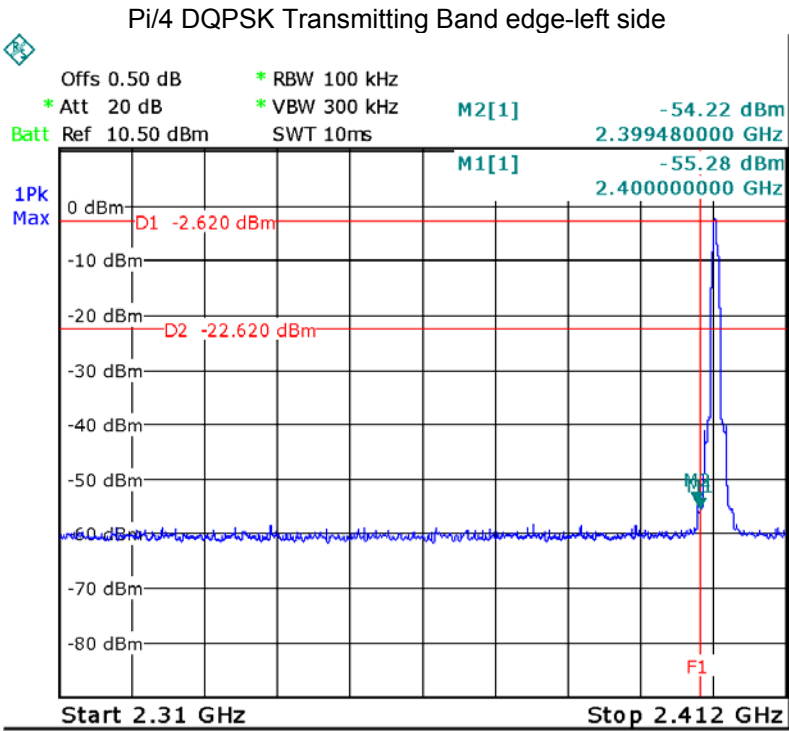


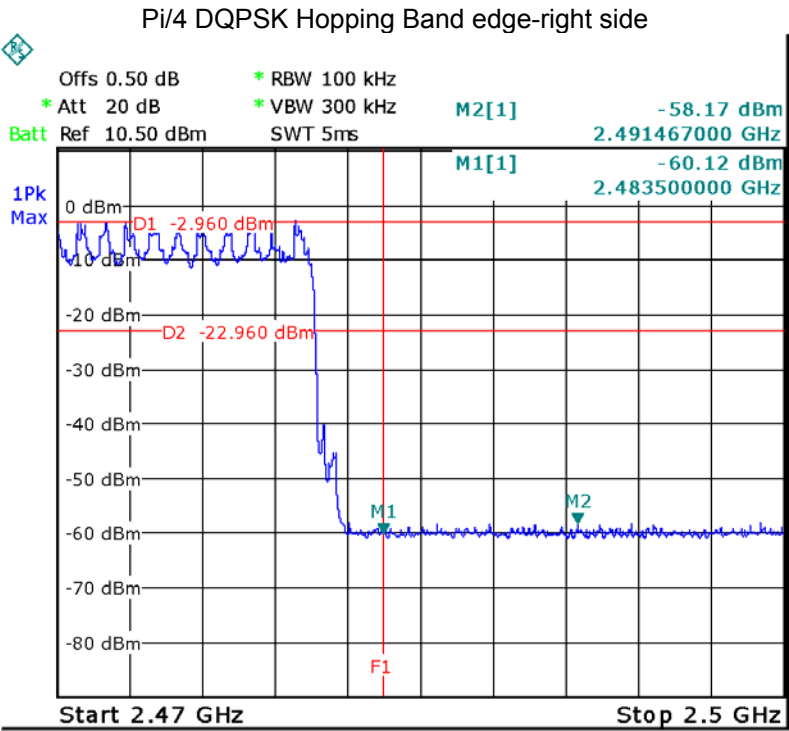
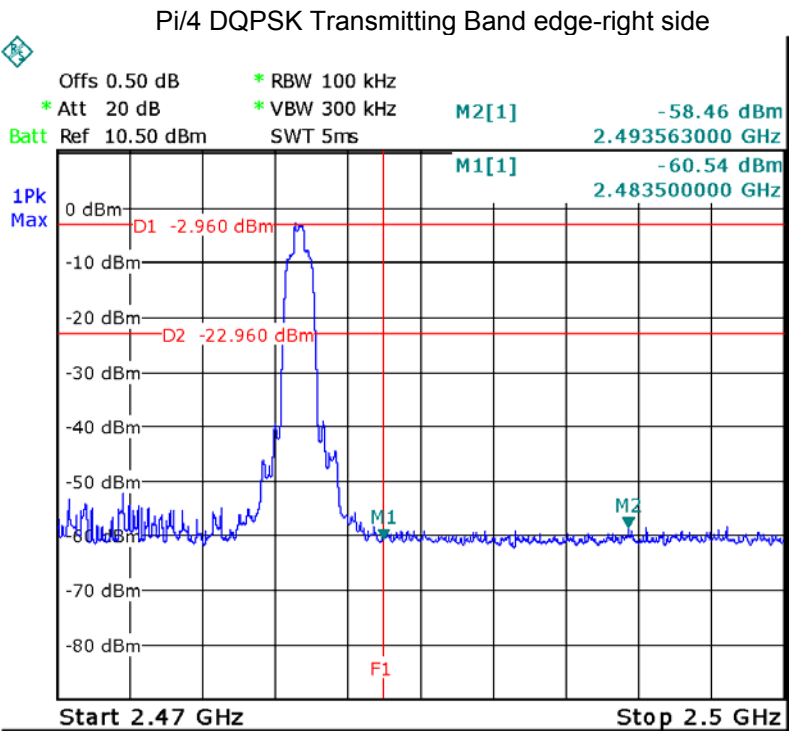


8DPSK Transmitting Band edge-left side

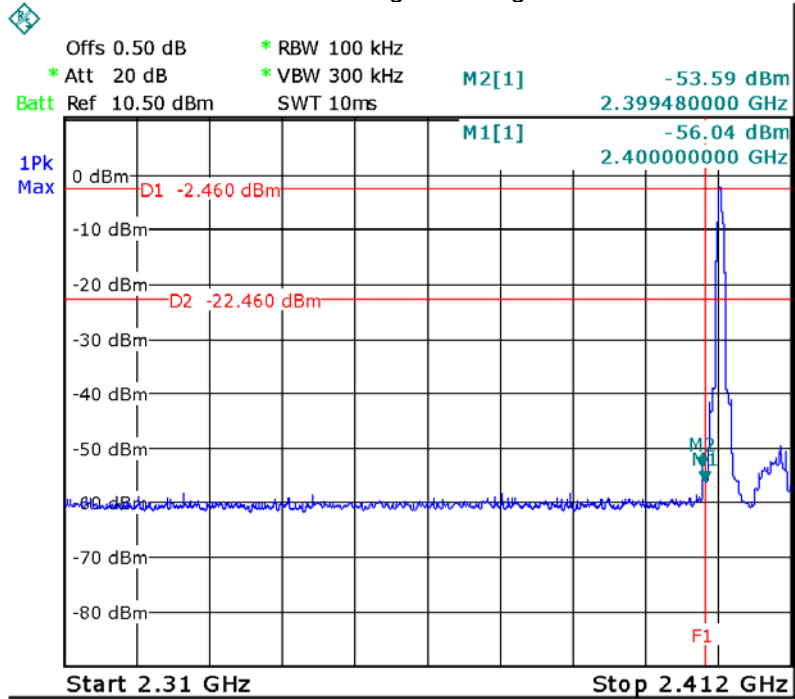

8DPSK Hopping Band edge-left side

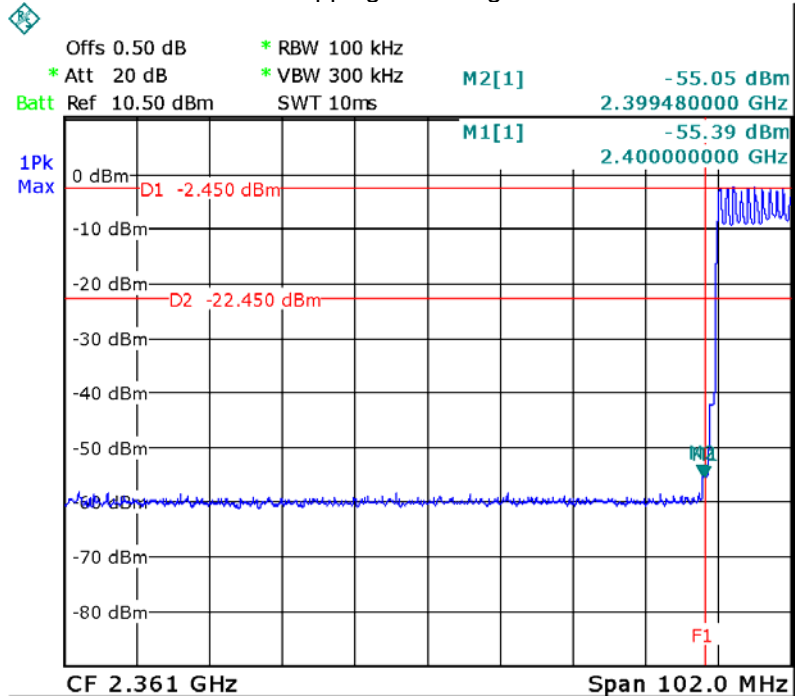

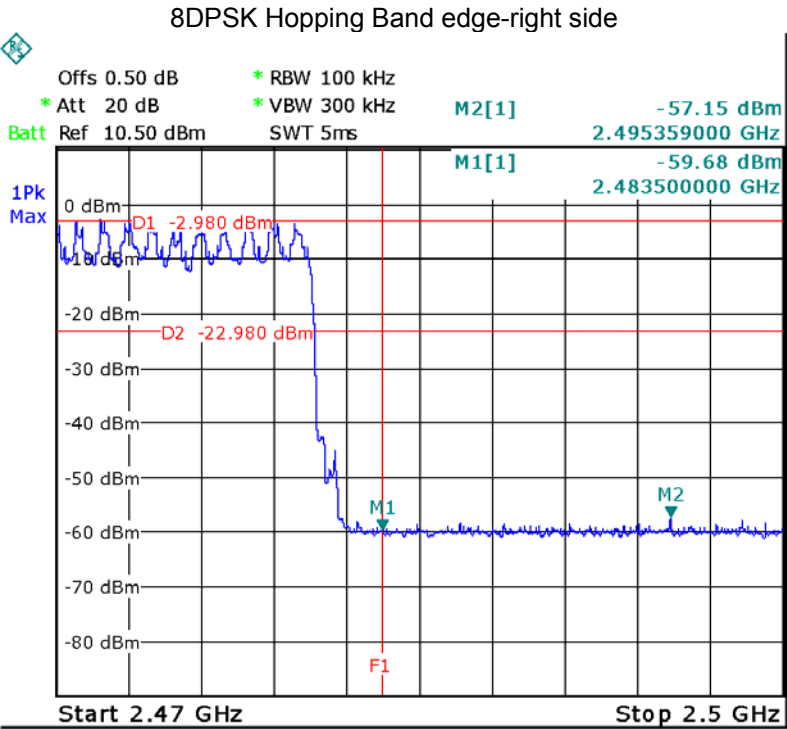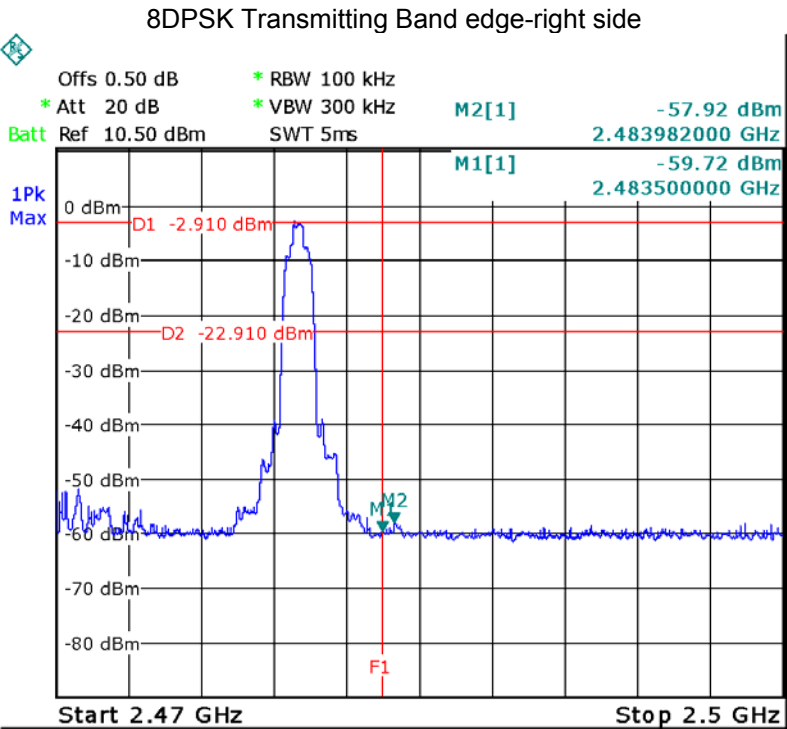

11 Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

C63.10: 2013

Test Mode:

Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz



11.2 Test Result:

Modulation	Test Channel	20 dB Bandwidth	99% Bandwidth
GFSK	Low	1.036MHz	0.892MHz
GFSK	Middle	1.036MHz	0.892MHz
GFSK	High	1.036MHz	0.904MHz
Pi/4 DQPSK	Low	1.299MHz	1.168MHz
Pi/4 DQPSK	Middle	1.311MHz	1.186MHz
Pi/4 DQPSK	High	1.305MHz	1.168MHz
8DPSK	Low	1.287MHz	1.180MHz
8DPSK	Middle	1.299MHz	1.204MHz
8DPSK	High	1.299MHz	1.186MHz

Test result plot as follows:


Modulation: GFSK Low Channel

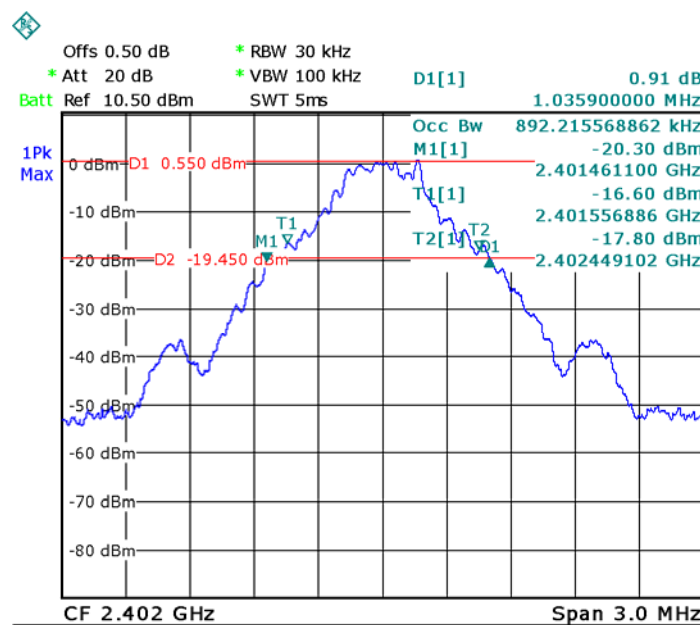

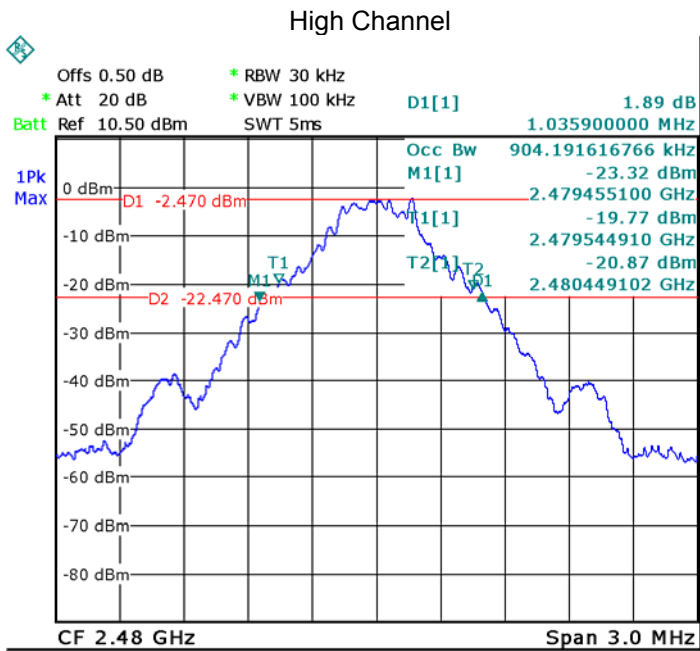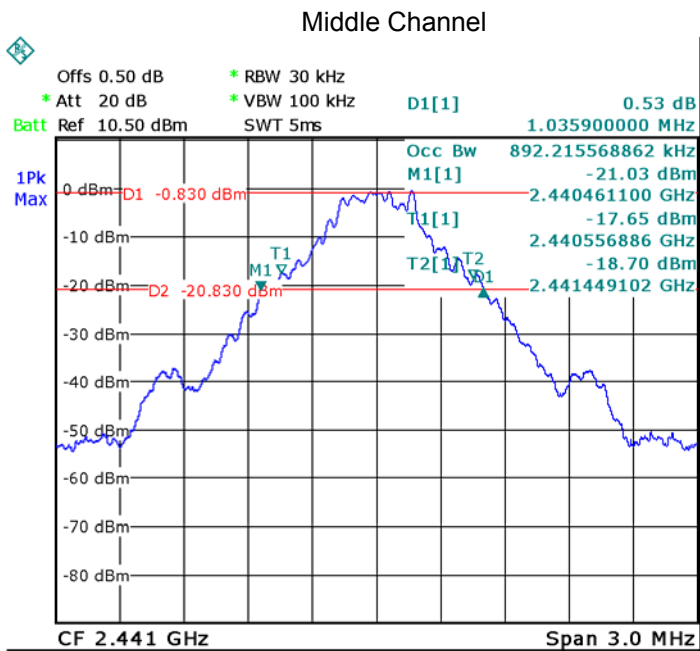




Modulation: Pi/4 DQPSK



Low Channel

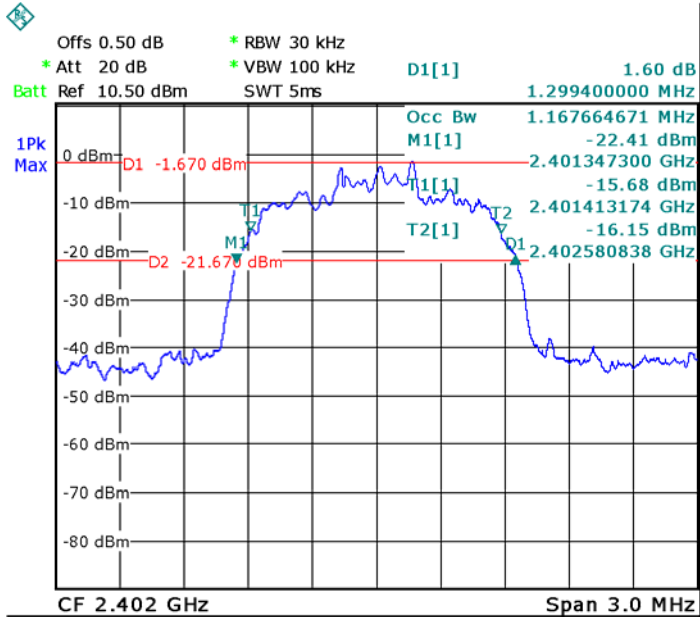

Middle Channel

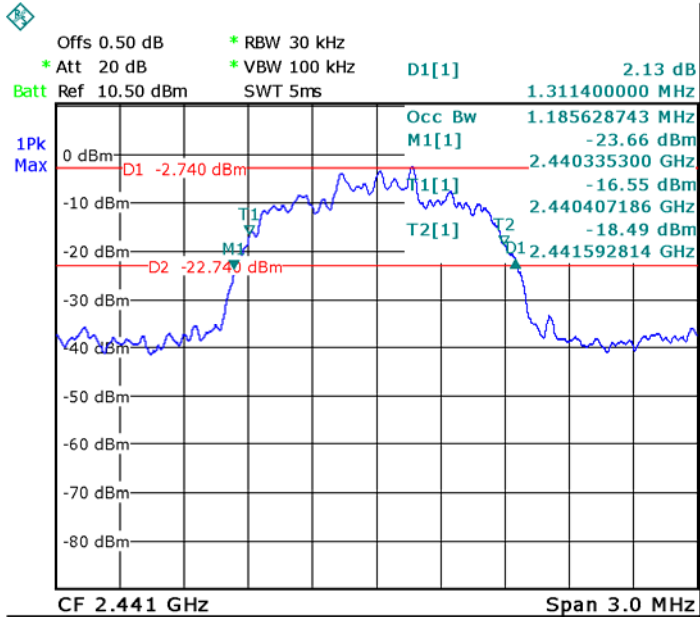

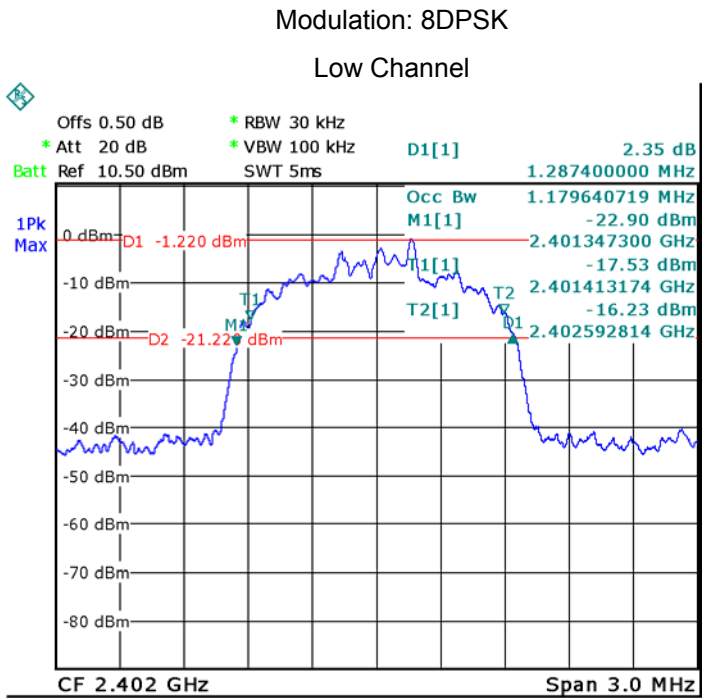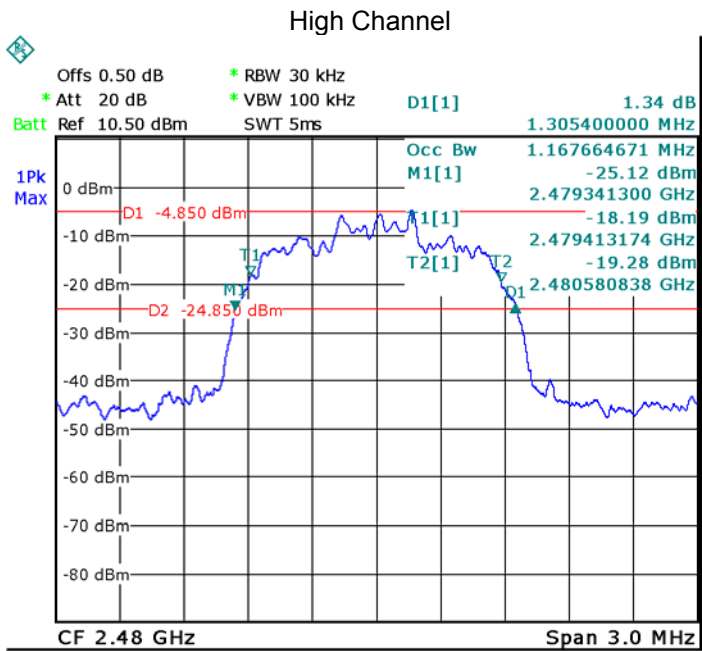

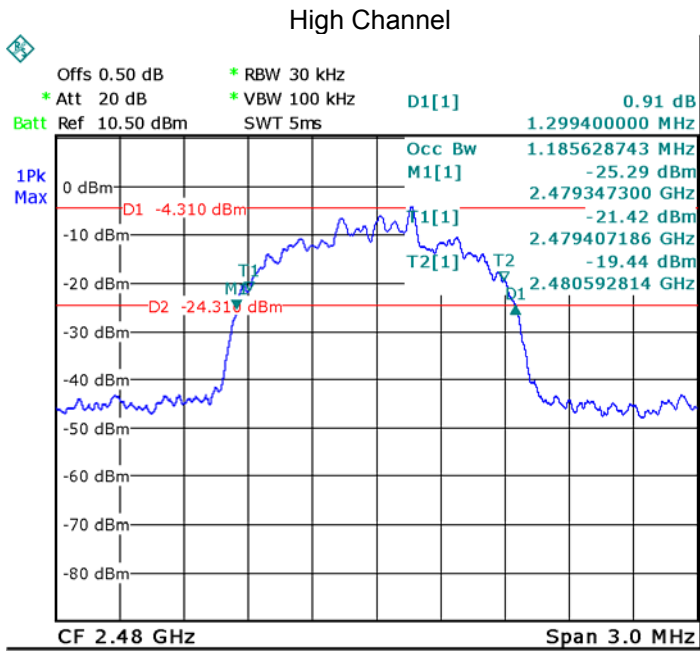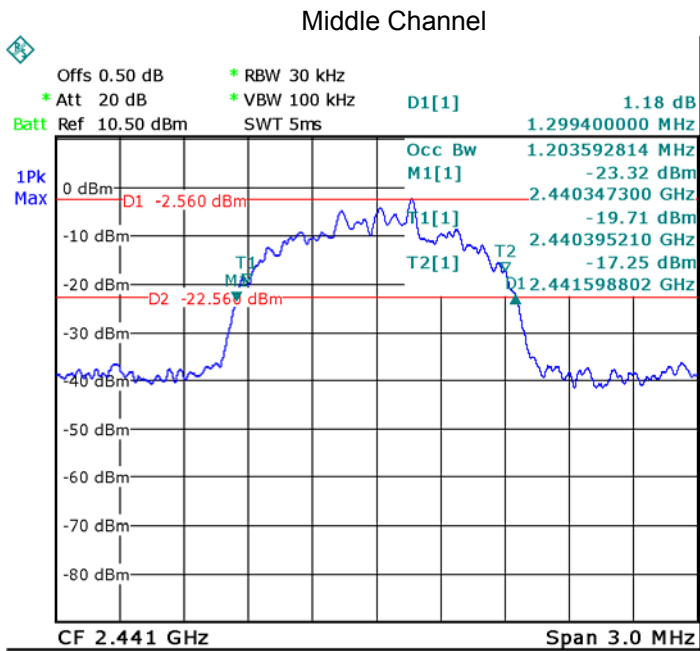

12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

12.2 Test Result:


Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	-1.52	-1.61	-1.61	20.97
4* π 4DQPSK	2Mbps	-1.60	-1.82	-1.94	20.97
8DPSK	3Mbps	-1.52	-1.60	-1.70	20.97


Test result plot as follows:

Modulation: GFSK
Low Channel

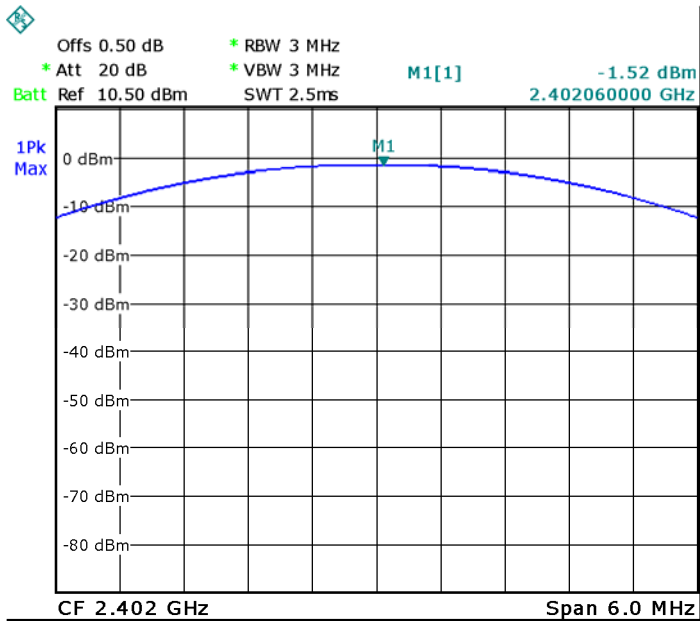


Middle Channel

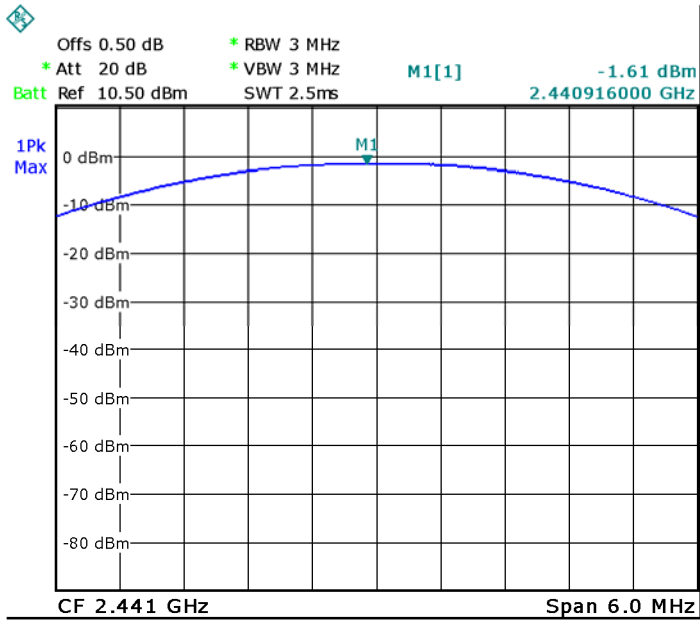

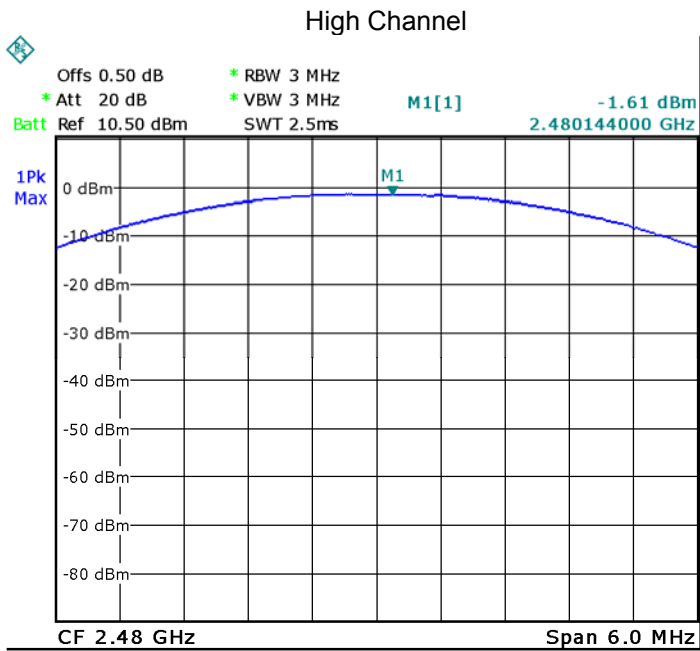


Modulation: Pi/4 DQPSK Low Channel


Low Channel

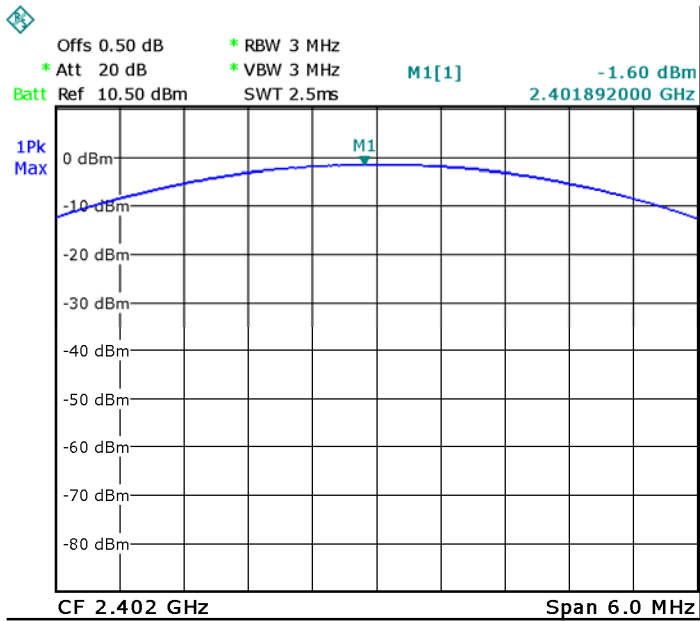


Middle Channel

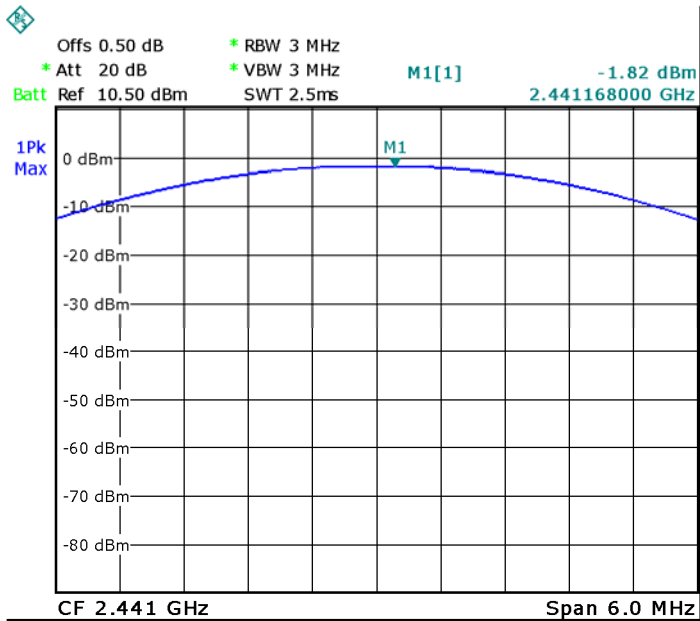


High Channel

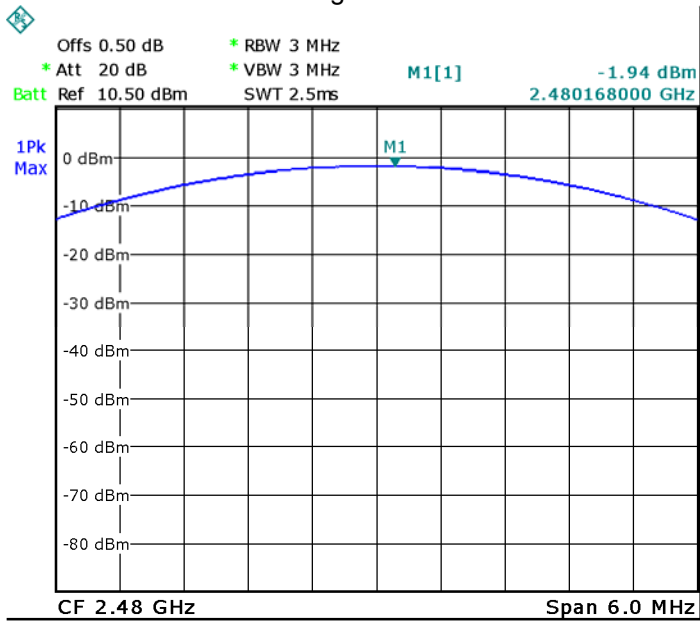


Modulation: 8DPSK Low Channel
Low Channel

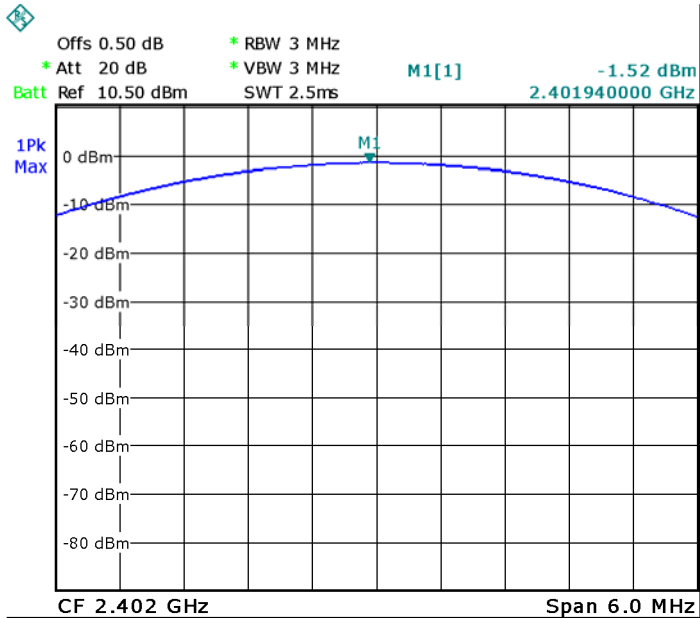

Middle Channel

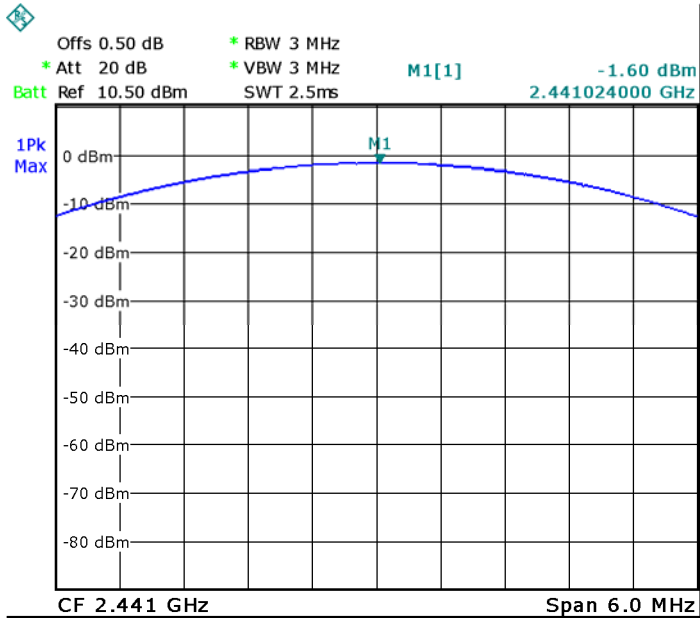

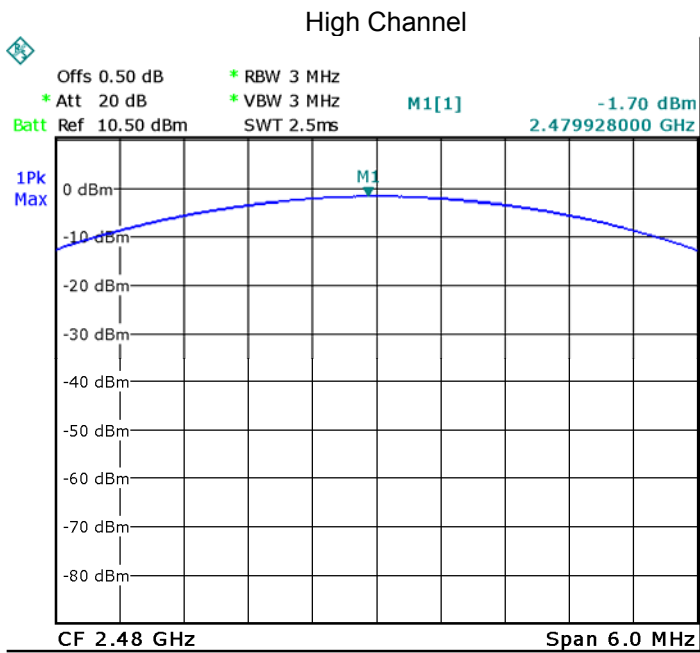

13 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


13.2 Test Result:

Test result plot as follows:


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1 MHz	PASS
GFSK	Middle	1 MHz	PASS
GFSK	High	1 MHz	PASS
Pi/4 DQPSK	Low	1 MHz	PASS
Pi/4 DQPSK	Middle	1 MHz	PASS
Pi/4 DQPSK	High	1 MHz	PASS
8DPSK	Low	1 MHz	PASS
8DPSK	Middle	1 MHz	PASS
8DPSK	High	1 MHz	PASS

Test plots


GFSK Low Channel

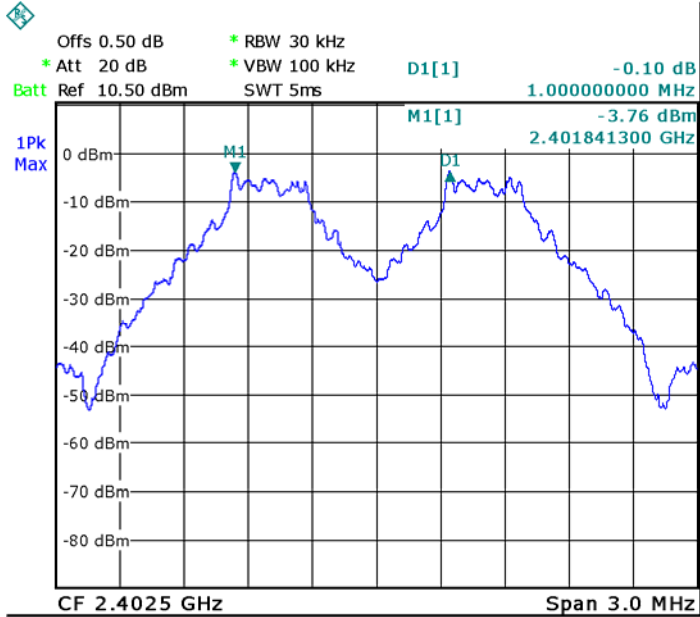


GFSK Middle Channel

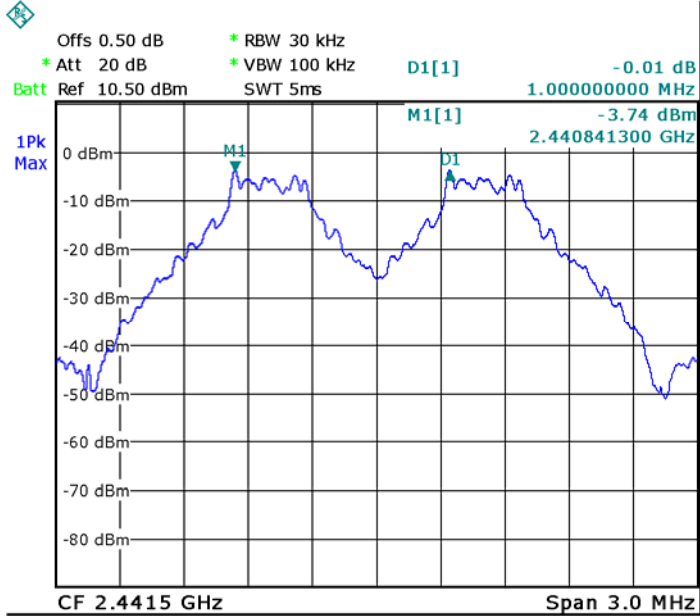


GFSK High Channel

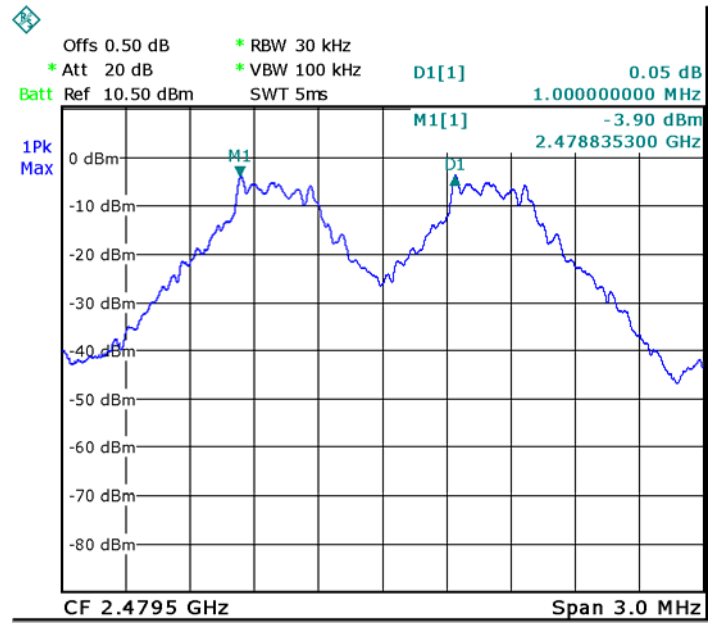


Pi/4 DQPSK Low Channel

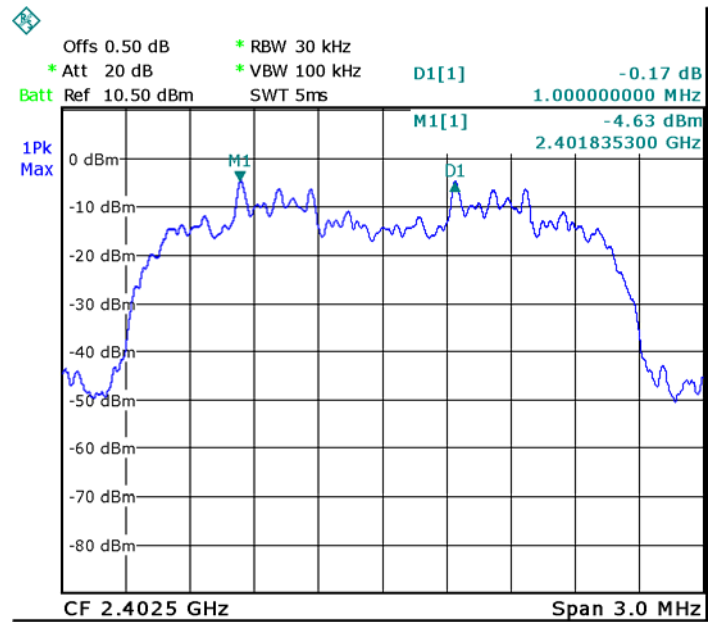


Pi/4 DQPSK Middle Channel

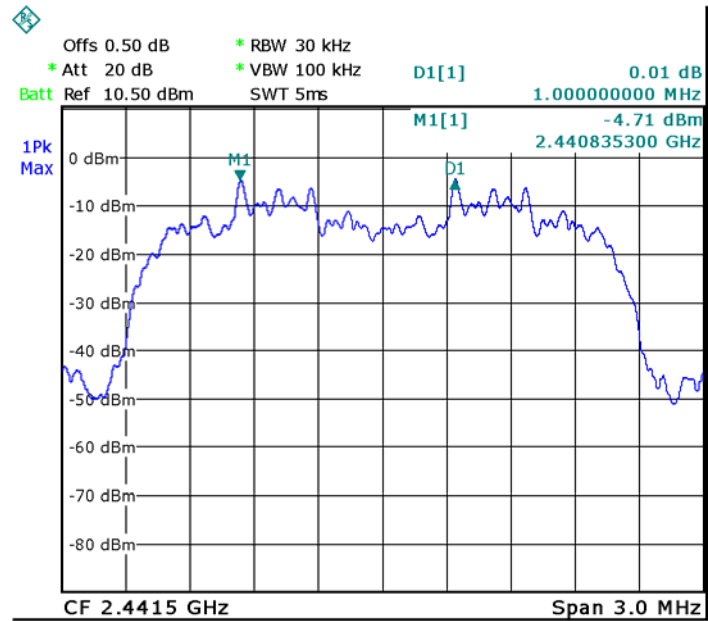


Pi/4 DQPSK High Channel

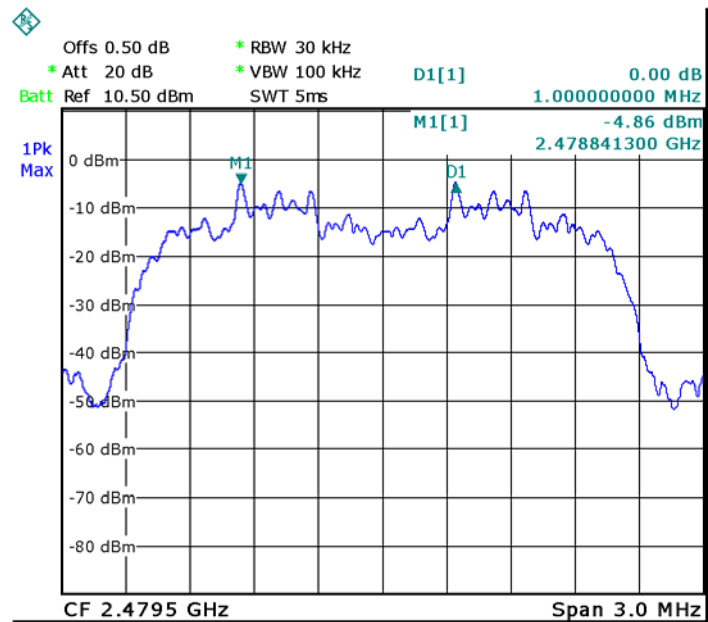


8DPSK Low Channel

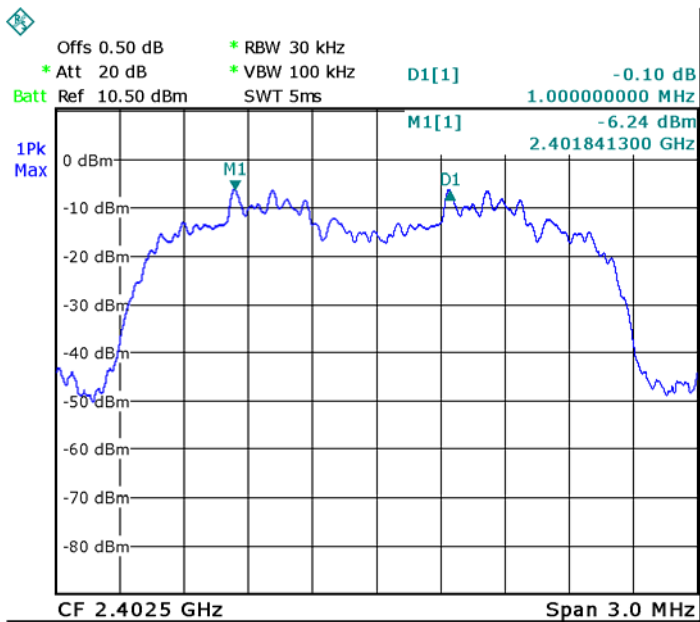

8DPSK Middle Channel

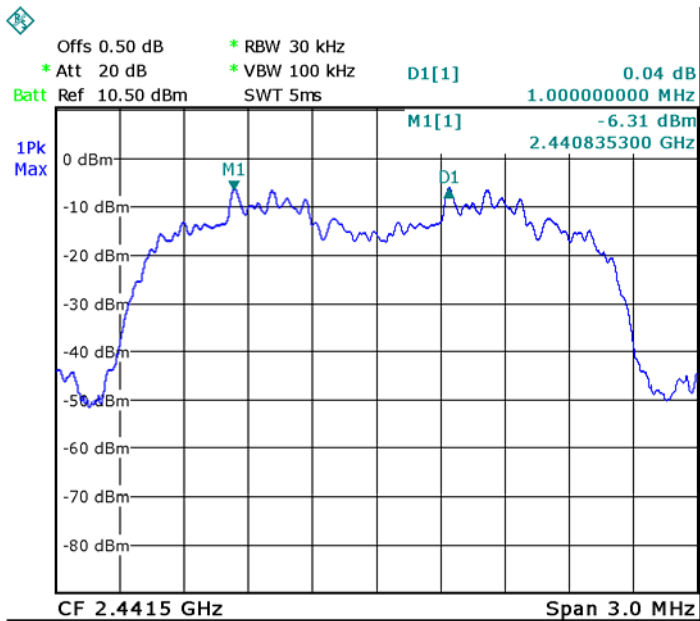

8DPSK High Channel

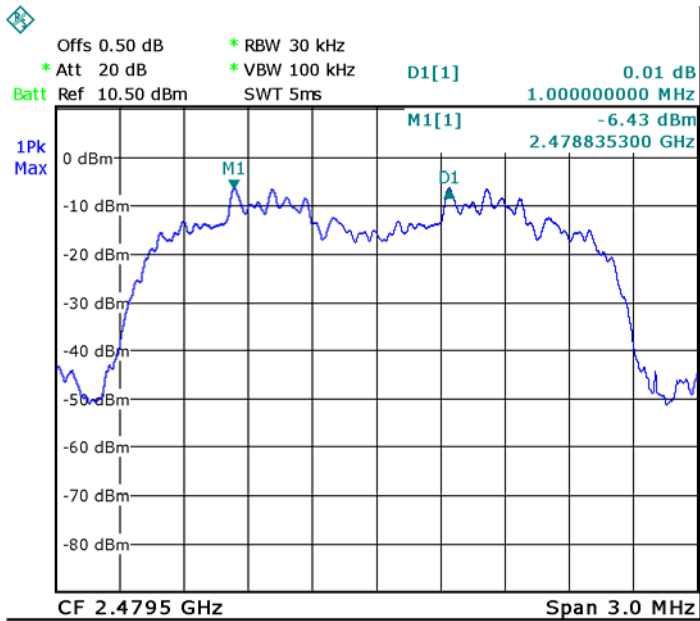

14 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

14.2 Test Result:


Total Channels are 79 Channels.

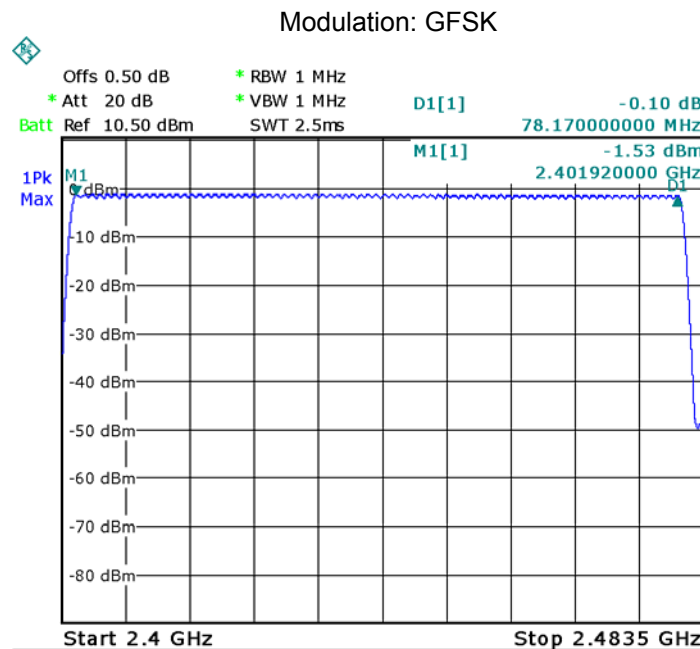

Modulation: GFSK Pi/4 DQPSK

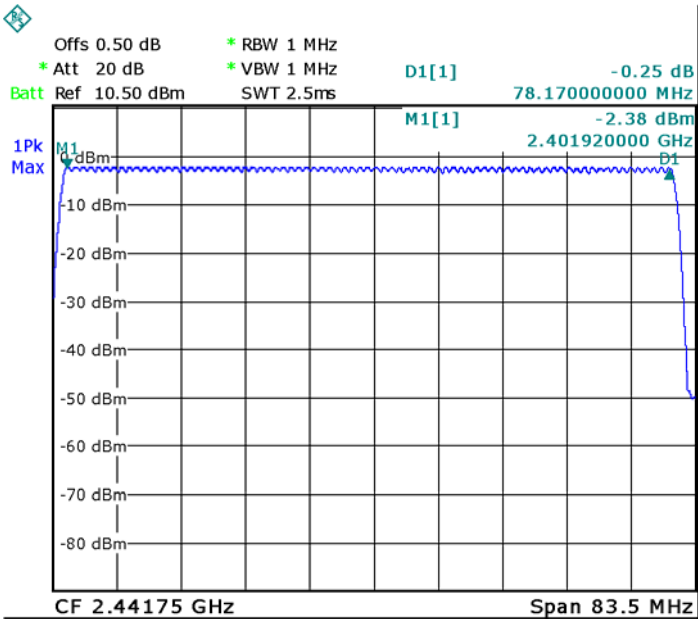

Modulation: 8DPSK

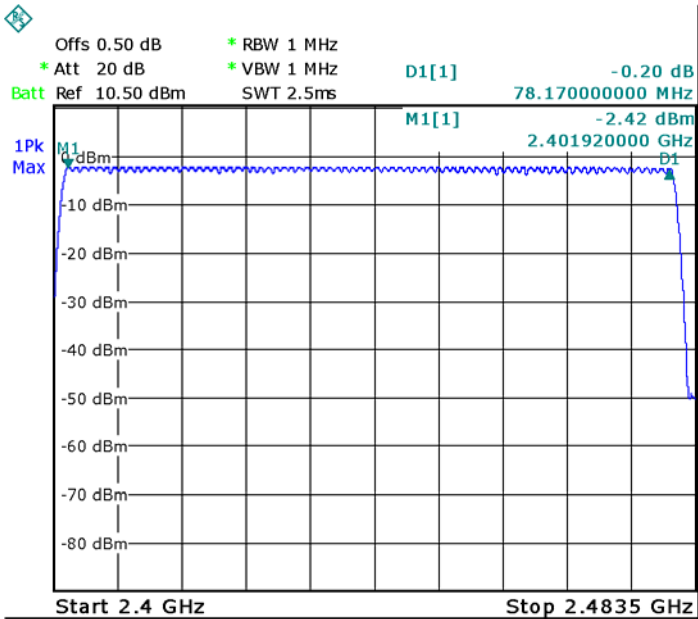

15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) \times 79 = 31.6 (s)$

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6 \times 31.6 \times (\text{MkrDelta})/1000$
DH3	$1600/79/4 \times 31.6 \times (\text{MkrDelta})/1000$
DH1	$1600/79/2 \times 31.6 \times (\text{MkrDelta})/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4
Pi/4DQPSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4
8DPSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4


Modulation: GFSK
Data Packet:
DH5.Low channel

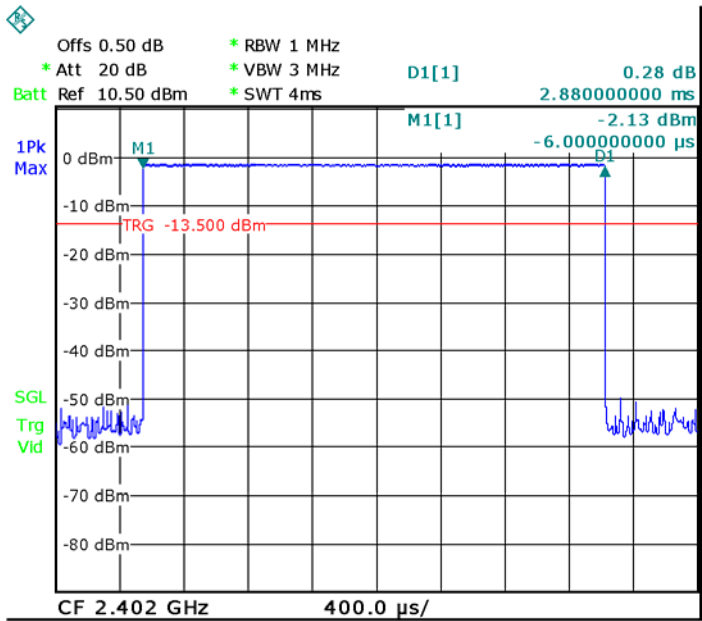

Data Packet:
DH5.Middle channel

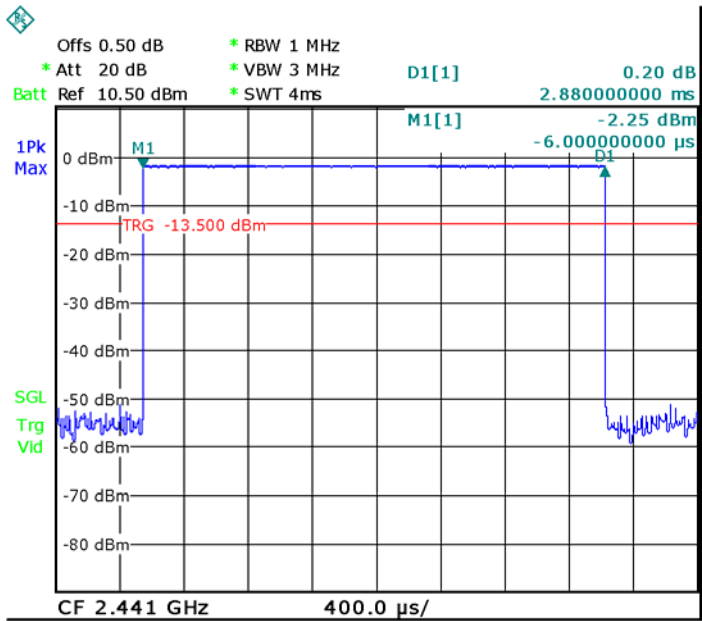


Data Packet:
DH5,High channel

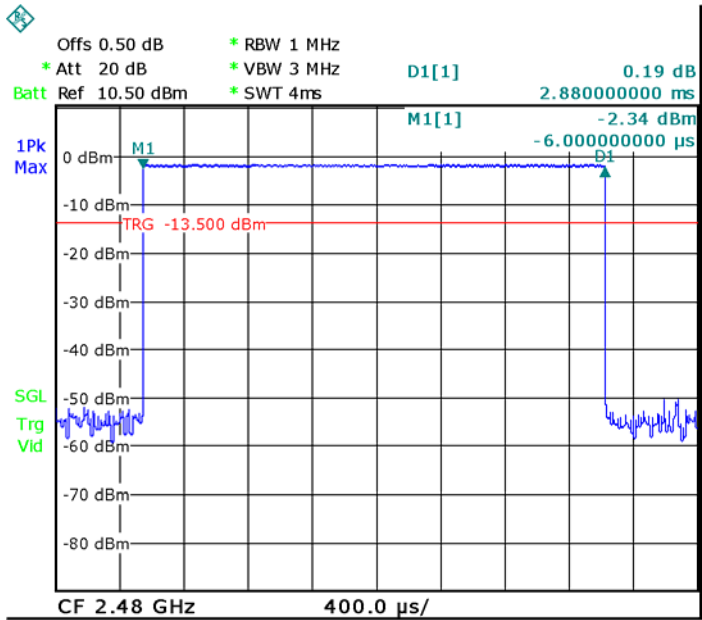

Modulation: Pi/4DQPSK


Data Packet:

2DH5 Low channel

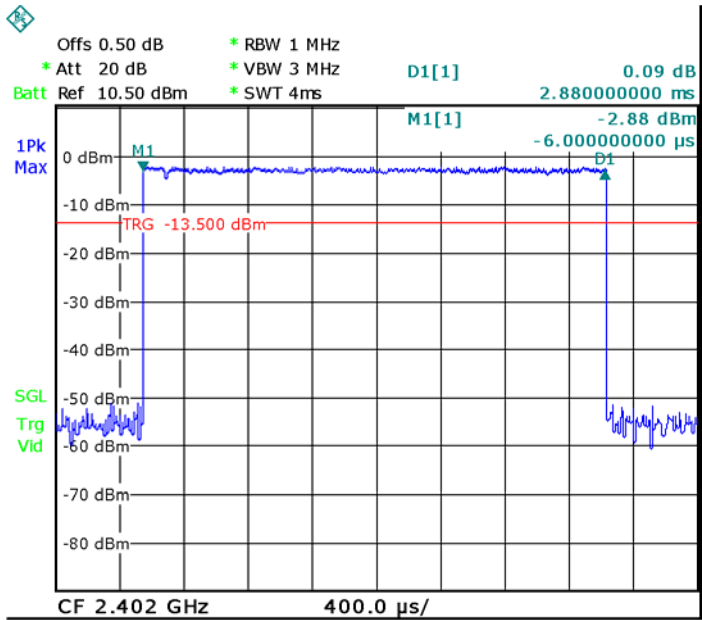


Data Packet:


2DH5.Middle channel

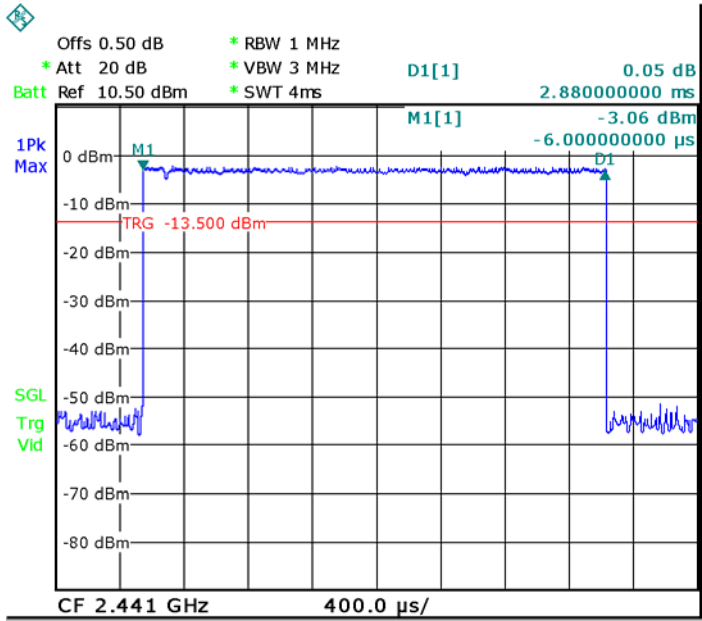


Data Packet:
2DH5,High channel

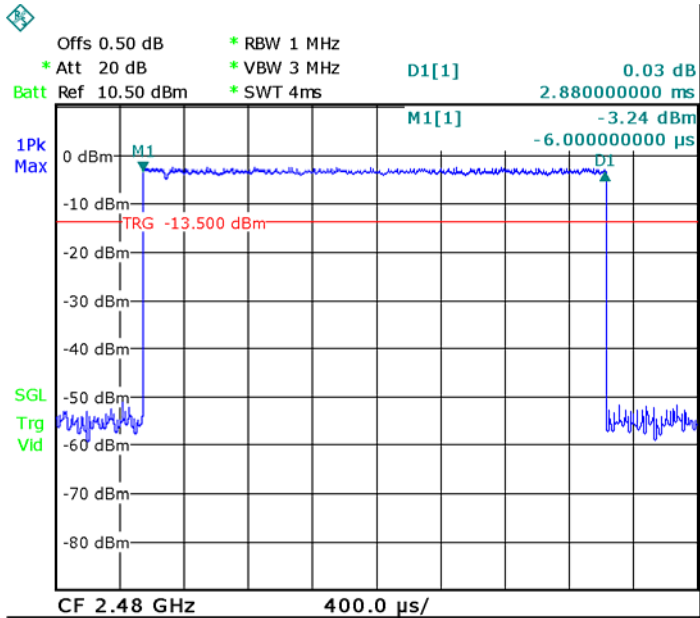


Modulation: 8DPSK
Data Packet:
3DH5.Low channel

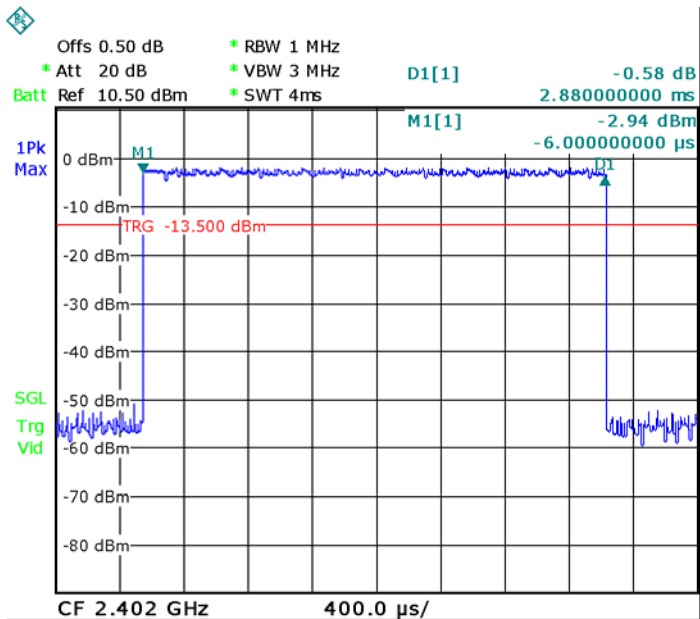

Data Packet:
3DH5.Middle channel

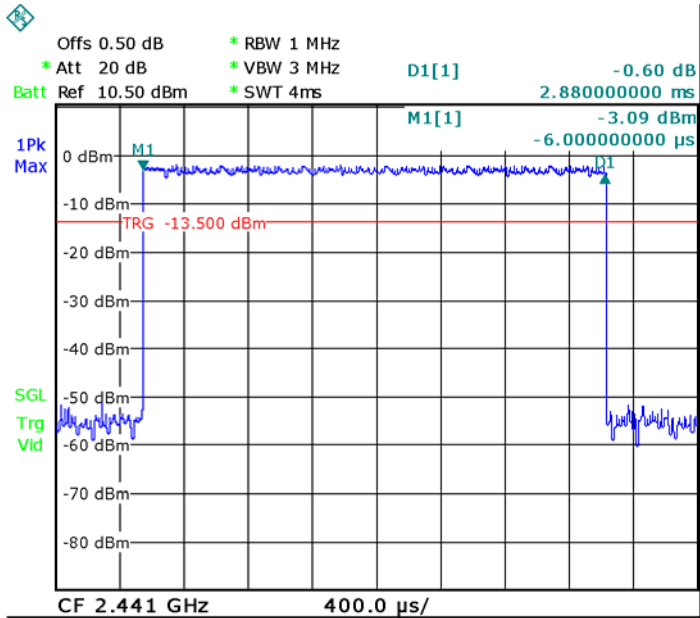

Data Packet:
3DH5.High channel

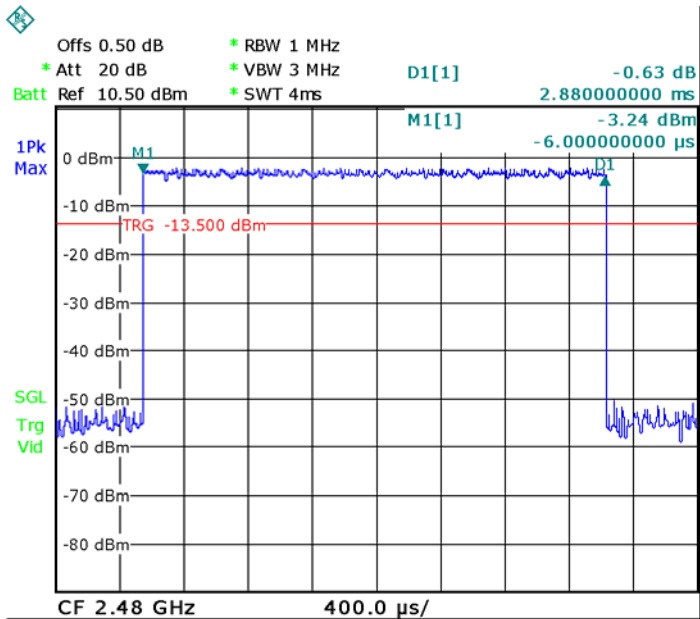


16 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT have Integrated Antenna, meets the requirements of FCC 15.203.

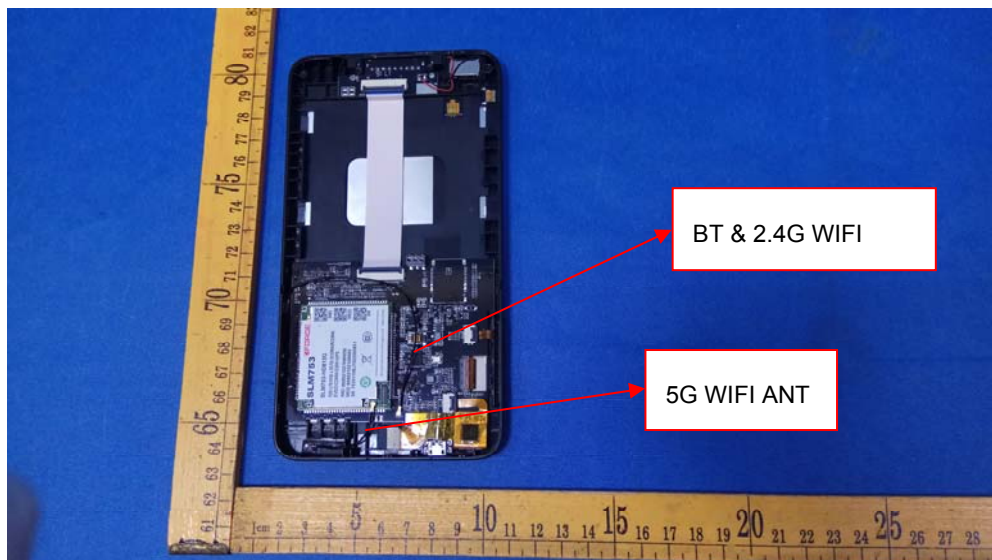

17 SAR Evaluation

Please refer to SAR report.


18 Photographs -Test Setup Photos

18.1 Photograph-Conducted Emissions Test Setup





18.2 Photograph-Radiated Emissions


Test Frequency Below 30MHz

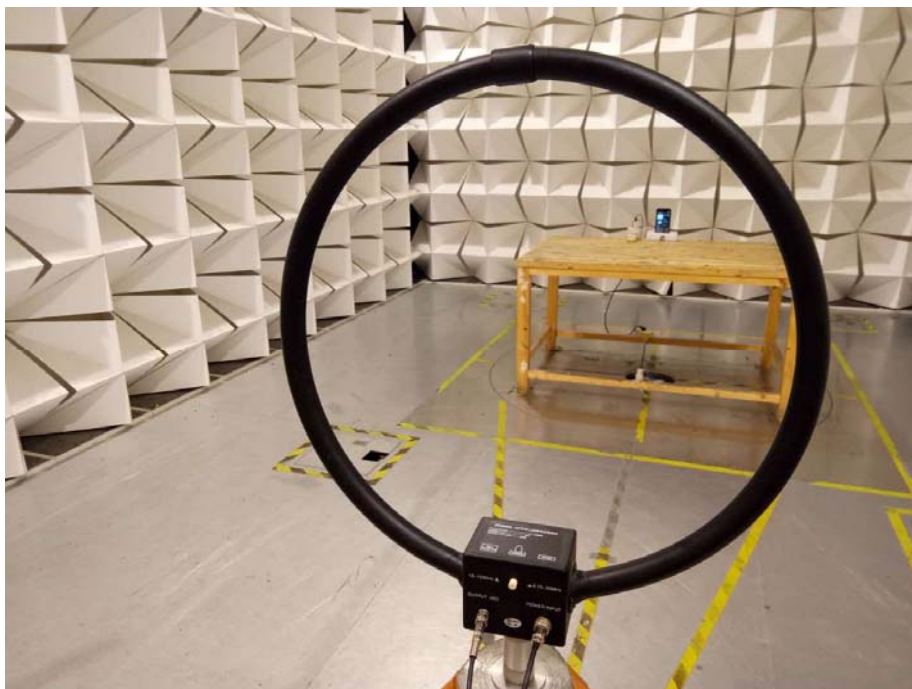

Test Frequency 30MHz to 1000MHz

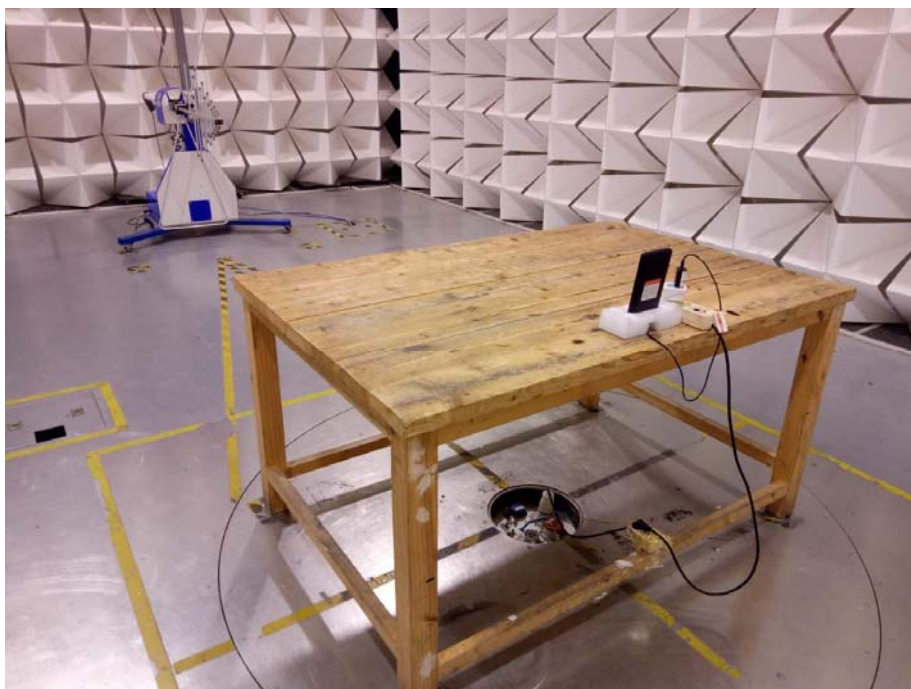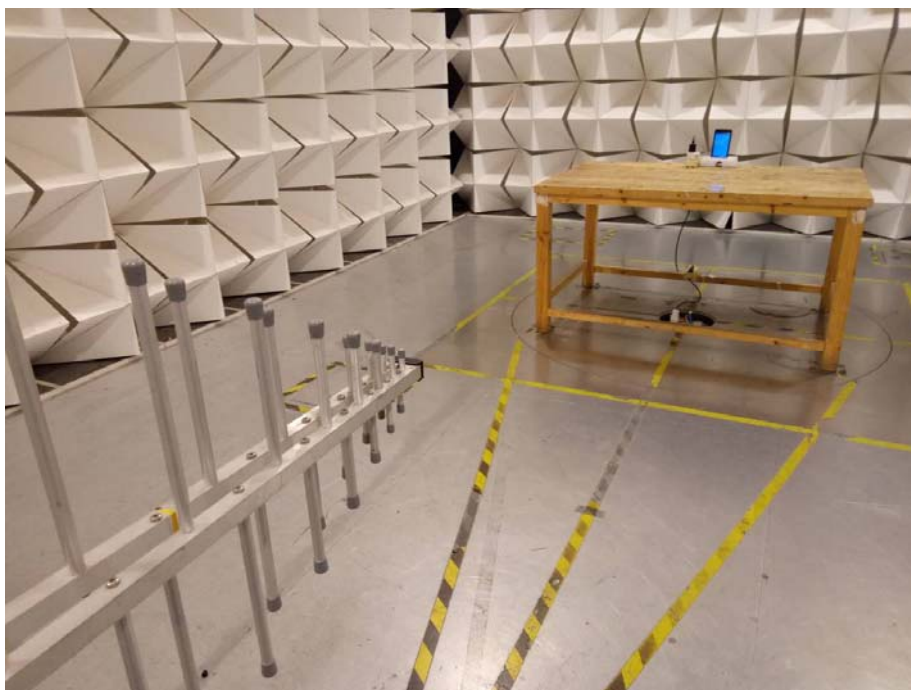

Test Frequency Above 1GHz

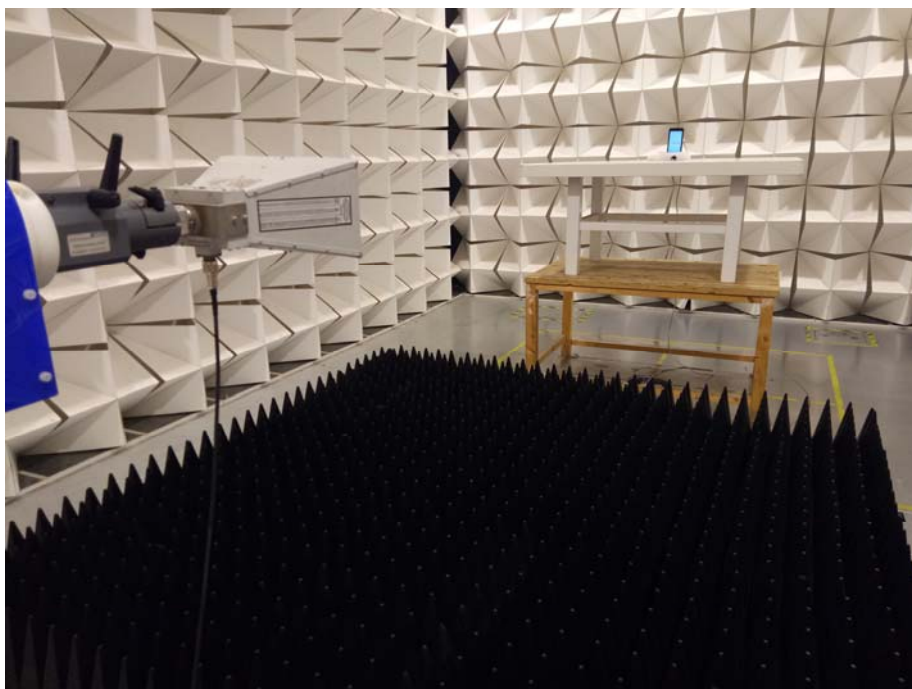

19 Photographs – Constructional Details

Refer to Annex WTD17S0271945E-Photo.

=====End of Report=====