


# COREINK

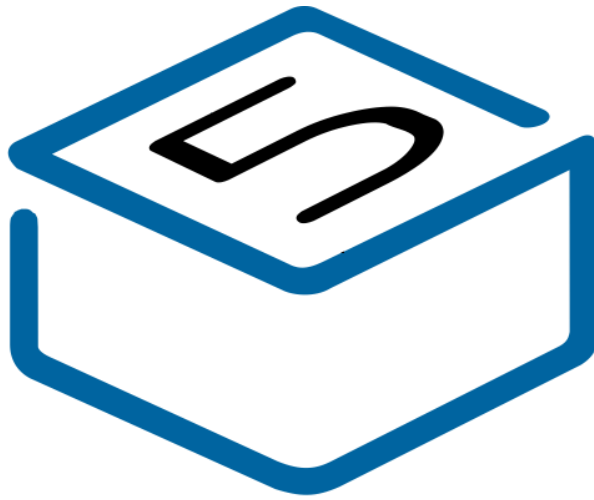

# M5STACK

2020

V0.01

# 1.OUTLINE

**COREINK** is ESP32 board which based on ESP32-PICO-D4 module, contained 1.54-inch eINK. The board is made of PC+ABC.



## 1.1 Hardware Composition

The hardware of **COREINK**: ESP32-PICO-D4 chip, eLNK, LED, Button, GROVE interface, TypeC-to-USB interface, RTC, Power Management chip battery.

**ESP32- PICO-D4** is a System-in-Package (SiP) module that is based on ESP32, providing complete Wi-Fi and Bluetooth functionalities. The module integrates a 4-MB SPI flash. ESP32-PICO-D4 integrates all peripheral components seamlessly, including a crystal oscillator, flash, filter capacitors and RF matching links in one single package.

### 1.54" E-Paper Display

The display is a TFT active matrix electrophoretic display , with interface and areference system design . The 1 . 54 " active area contains 200x200 pixels , and has 1-bit white / black full display capabilities . An integrated circuit contains gate buffer ,source buffer , interface , timing control logic , oscillator , DC-DC , SRAM , LUT , VCOM and border are supplied with each panel



## 2. PIN DESCRIPTION

### 2.1. USB INTERFACE

**COREINK** Configuration Type-C type USB interface, support USB2.0 standard communication protocol.



### 2.2. GROVE INTERFACE

4p disposed pitch of 2.0mm **COREINK** GROVE interfaces, internal wiring and GND, 5V, GPIO4, GPIO13 connected.



# 3.FUNCTIONAL DESCRIPTION

This chapter describes the ESP32-PICO-D4 various modules and functions.

## 3.1.CPU AND MEMORY

ESP32-PICO-D4 contains two low-power Xtensa<sup>®</sup> 32-bit LX6 MCU. On-chip memory comprising:

- 448-KB of ROM, and the program starts for the kernel function calls
- For a 520 KB instruction and data storage chip SRAM (including flash memory 8 KB RTC)
- RTC flash memory of 8 KB SRAM, when the RTC can be started in Deep-sleep mode, and for storing data accessed by the main CPU
- RTC slow memory, of 8 KB SRAM, can be accessed by the coprocessor in Deep-sleep mode
- Of 1 kbit of eFuse, which is a 256 bit system-specific (MAC address and a chip set); the remaining 768 bit reserved for user program, these Flash program include encryption and chip ID

## 3.2.STORAGE DESCRIPTION

### 3.2.1.External Flash and SRAM

ESP32 support multiple external QSPI flash and static random access memory (SRAM), having a hardware-based AES encryption to protect the user programs and data.

- ESP32 access external QSPI Flash and SRAM by caching. Up to 16 MB external Flash code space is mapped into the CPU, supports 8-bit, 16-bit and 32-bit access, and can execute code.
- Up to 8 MB external Flash and SRAM mapped to the CPU data space, support for 8-bit, 16-bit and 32-bit access. Flash supports only read operations, SRAM supports read and write operations.

ESP32-PICO-D4 4 MB of integrated SPI Flash, the code can be mapped into CPU space, support for 8-bit, 16-bit and 32-bit access, and can execute code. Pin GPIO6 ESP32 of, GPIO7, GPIO8, GPIO9, GPIO10 and GPIO11 for connecting module integrated SPI Flash, not recommended for other functions.



### 3.3. CRYSTAL

- ESP32-PICO-D4 integrates a 40 MHz crystal oscillator.

### 3.4. RTC MANAGEMENT AND LOW POWER CONSUMPTION

ESP32 uses advanced power management techniques may be switched between different power saving modes. (See Table 5).

- *Power saving mode*
  - Active Mode: RF chip is operating. Chip may receive and transmit a sounding signal.
  - Modem-sleep mode: CPU can run, the clock may be configured. Wi-Fi / Bluetooth baseband and RF
  - Light-sleep mode: CPU suspended. RTC and memory and peripherals ULP coprocessor operation. Any wake-up event (MAC, host, RTC timer or external interrupt) will wake up the chip.
  - Deep-sleep mode: only the RTC memory and peripherals in a working state. Wi-Fi and Bluetooth connectivity data stored in the RTC. ULP coprocessor can work.
  - Hibernation Mode: 8 MHz oscillator and a built-in coprocessor ULP are disabled. RTC memory to restore the power supply is cut off. Only one RTC clock timer located on the slow clock and some RTC GPIO at work. RTC RTC clock or timer can wake up from the GPIO Hibernation mode.
- *Deep-sleep mode*
  - related sleep mode: power save mode switching between Active, Modem-sleep, Light-sleep mode. CPU, Wi-Fi, Bluetooth, and radio preset time interval to be awakened, to ensure connection Wi-Fi / Bluetooth.
  - Ultra Low-power sensor monitoring methods: the main system is Deep-sleep mode, ULP coprocessor is periodically opened or closed to measure sensor data. The sensor measures data, ULP coprocessor decide whether to wake up the main system.

Functions in different power consumption modes: TABLE 5



| Power consumption mode | Active                | Modem-sleep | Light-sleep | Deep-sleep                              | Hibernation |
|------------------------|-----------------------|-------------|-------------|-----------------------------------------|-------------|
| Sleep mode             | Associated sleep mode |             |             | Ultra low-power<br>Sensor measures data | -           |
| CPU                    | open                  | open        | pause       | close                                   | close       |
| Wi-Fi/Bluetooth Radio  | open                  | open        | close       | close                                   | close       |
| RTC memory             | open                  | open        | open        | open                                    | close       |
| ULP coprocessor        | open                  | open        | open        | open/close                              | close       |

## 4. ELECTRICAL CHARACTERISTICS

### 4.1. LIMIT PARAMETERS

Table 8: Limiting values

| Symbol         | Parameter                    | Min  | Max   | Unit |
|----------------|------------------------------|------|-------|------|
| VDD33          | Power supply voltage         | -0.3 | 3.6   | V    |
| $I_{output}^1$ | Cumulative IO output current | -    | 1,100 | mA   |
| $T_{store}$    | Storage temperature          | -40  | 150   | °C   |

1. V<sub>IO</sub> to the power supply pad, Refer [ESP32 Technical Specification](#) Appendix

IO\_MUX, as SD\_CLK of Power supply for VDD\_SDIO.

Press and hold the side power button for two seconds to start the device. Press and hold for more than 6 seconds to turn off the device. Switch to the photo mode through the Home screen, and the avatar that can be obtained through the camera is displayed on the tft screen. The USB cable must be connected when working, and the lithium battery is used for short-term storage to prevent power failure.



#### FCC Statement

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

#### Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



## ESP32TimerCam/TimerCameraF/TimerCameraX Quick Start


With preloaded firmware, your ESP32TimerCam/TimerCameraF/TimerCameraX would run right after power on.

1. Power on the cable into ESP32TimerCam/TimerCameraF/TimerCameraX by USB cable. Baud rate 921600.

```
TimerCam
[0:32mI (850) sccb: pin_sda 25 pin_scl 23
[0m
[0:32mI (850) gpio: GPIO[0]| InputEn: 0| OutputEn: 1| OpenDrain: 0| Pullup: 0|
Pulldown: 0| Intr:0 [0m
[0:32mI (870) gpio: GPIO[15]| InputEn: 0| OutputEn: 1| OpenDrain: 0| Pullup: 0|
Pulldown: 0| Intr:0 [0m
[0:32mI (900) sccb: SCCB_Probe start[0m
[0:32mI (1764) camera: Detected OV3660 camera[0m
[0:32mI (1764) gpio: GPIO[19]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1|
Pulldown: 0| Intr:0 [0m
[0:32mI (1764) gpio: GPIO[36]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1|
Pulldown: 0| Intr:0 [0m
[0:32mI (1765) gpio: GPIO[18]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1|
Pulldown: 0| Intr:0 [0m
[0:32mI (1765) gpio: GPIO[39]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1|
Pulldown: 0| Intr:0 [0m
[0:32mI (1766) InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1| Pulldown: 0| Intr:0
[0m
[0:32mI (1767) gpio: GPIO[34]| InputEn: 1| OutputEn: 1| Pullup: 0| Intr:0 [0m
[0:32mI (1767) gpio: GPIO[3]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1|
Pulldown: 0| Intr:0 [0m
[0:32mI (1768) gpio: GPIO[32]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1|
Pulldown: 0| Intr:0 [0m
[0:32mI (1769) gpio: GPIO[34]| InputEn: 0| OpenDrain: 0| Pullup: 1| Pulldown: 0| Intr:0 [0m
[0:32mI (1770) gpio: GPIO[26]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Intr:0 [0m
[0:32mI (1770) gpio: GPIO[21]| InputEn: 1| OutputEn: 0| OpenDrain: 0| Pullup: 1|
Pulldown: 0| Intr:0 [0m
[0:32mI (1787) camera: Allocating 234 KB frame buffer in OnBoard RAM[0m
[0:32mI (1820) camera: Allocating 234 KB frame buffer in OnBoard RAM[0m
[0:32mI (1853) camera: Allocating 234 KB frame buffer in OnBoard RAM[0m
I (2114) wifi:wifi driver task: 3ffdc568, prio:23, stack:6656, core=0
[0:32mI (2114) system_api: Base MAC address is not set, read default base MAC
address from BLK0 of EFUSE[0m
[0:32mI (2114) system_api: Base MAC address is not set, read default base MAC
address from BLK0 of EFUSE[0m
I (2115) wifi:wifi f36b
I (2116) wifi:config NVS flash: disabled
I (2116) wifi:cnfig nano formatting: disabled
I (2116) wifi:Init dynamic tx bfi:Init data frame dynamic rx buffer num: 8
I (2117) wifi:Init management frame dynamic rx buffer num: 8
I (2117) wifi:Ini num: 32
I (2117) wifi:Init static tx buffer num: 24
I (2118) wifi:Init static rx buffer size: 1600
I (2119) wifi:Init st(2119) wifi:Init dynamic rx buffer num: 8
[0:32mI (2953) phy: phy_version: 4180, cb3948e, Sep 12 2019, 16:39:13, 0, 0[0m
I (2954) wifi:mode : softAP (8c:aa:b5:81:7e:bd)
I (2956) wifi:Total power save buffer number: 12
I (2956) wifi:Init max length of beacon: 752/752
I (2956) wifi:Init max length of beacon: 752/752
[0:32mI (2957) Network: wifi_init_softap finished. SSID:TiernrCam
password:12345678[0m
```




2. After waiting for a few seconds, Wi-Fi scan a AP named "TimerCam" with your computer(or mobile phone), and connect it.

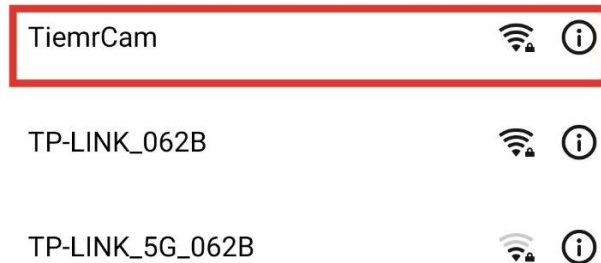

3. Open up the browser on the computer(or mobile phone), visit the URL `http://192.168.4.1:81`. At the moment, your can see the real-time transmission of video by ESP32TimerCam/TimerCameraF/TimerCameraX on the browser.



http://192.168.4.1:81/

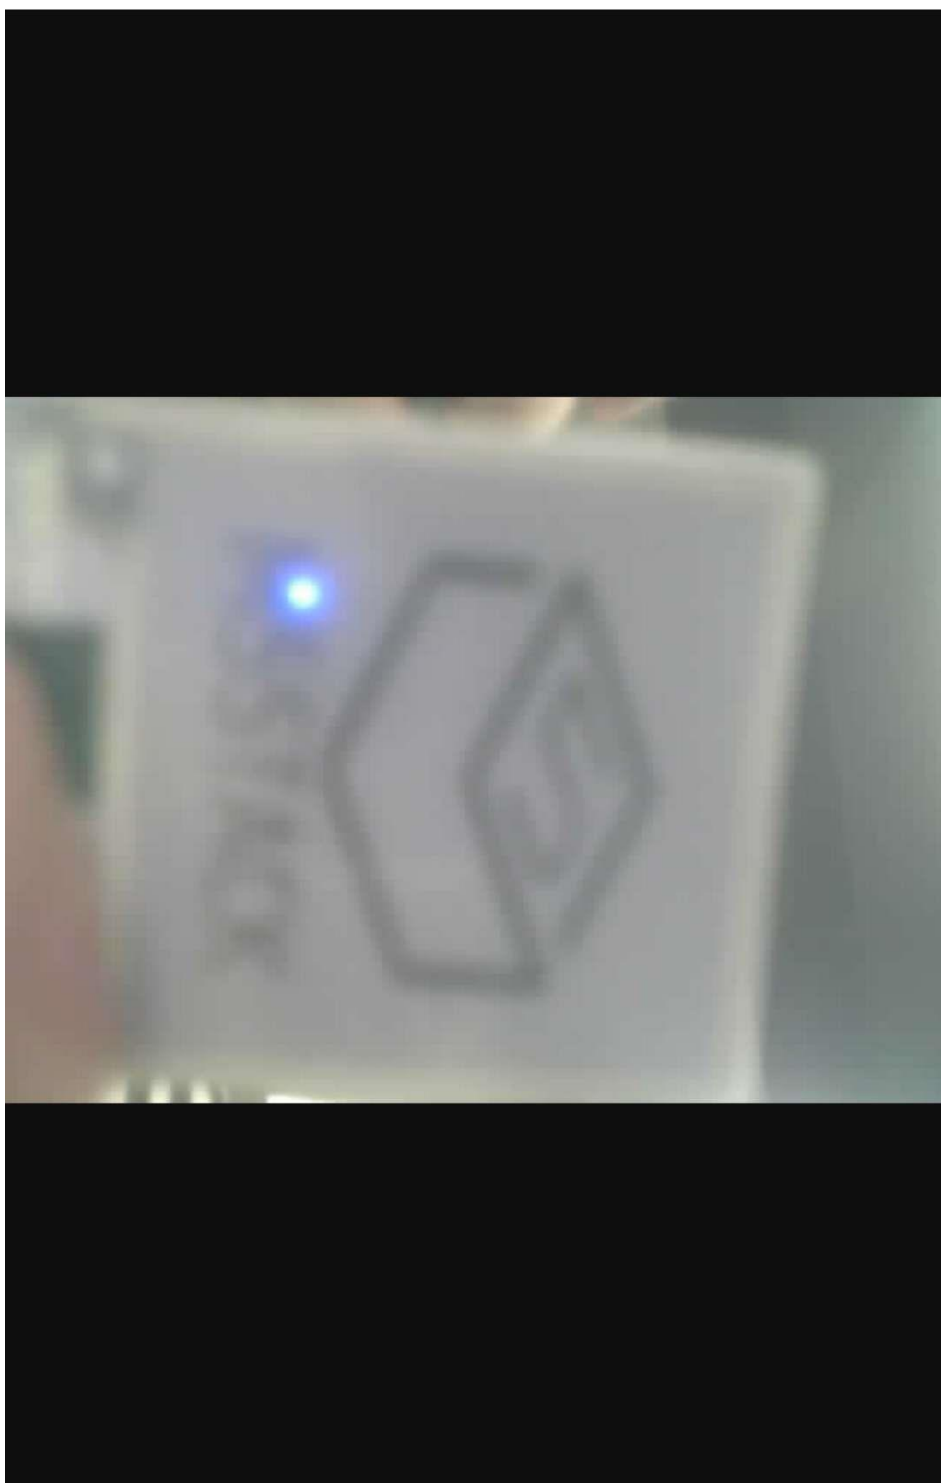

A Bluetooth name "m5stack" is found on the mobile phone\_ BLE”

