

TEST REPORT

Applicant: SHENZHEN FATSHARK ELECTRONIC CO., LTD

Address of Applicant: 2/F,Bldg8,Block1,Guangyayuan Industrial Zone, Guangyayuan Road, Wuhe Community,Bantian Longgang, shenzhen, China

Manufacturer: SHENZHEN FATSHARK ELECTRONIC CO., LTD

Address of Manufacturer: 2/F,Bldg8,Block1,Guangyayuan Industrial Zone, Guangyayuan Road,Wuhe Community,Bantian Longgang, shenzhen, China

Equipment Under Test (EUT)

Product Name: Shark Byte TX5S.1

Model No.: FSV2480

Trade Mark: FAT SHARK

FCC ID: 2AN5RFSV2480

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: November 11, 2020

Date of Test: November 12, 2020-December 23, 2020

Date of report issued: December 24, 2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular stamp for GTS Global United Technology Services Co., Ltd. is visible. The stamp contains the text "GTS", "GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD.", and "198019". Overlaid on the stamp is a handwritten signature in black ink, which appears to read "Robinson Lo".

Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	December 24, 2020	Original

Prepared By:




Project Engineer

Date:

December 24, 2020

Check By:



Reviewer

Date:

December 24, 2020

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 DEVIATION FROM STANDARDS	6
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.6 TEST FACILITY	6
5.7 TEST LOCATION	6
5.8 ADDITIONAL INSTRUCTIONS	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 CONDUCTED PEAK OUTPUT POWER	13
7.4 CHANNEL BANDWIDTH	14
7.5 POWER SPECTRAL DENSITY	16
7.6 BAND EDGE	18
7.6.1 Radiated Emission Method	18
7.7 SPURIOUS EMISSION	21
7.7.1 Radiated Emission Method	21
7.8 FREQUENCY STABILITY	26
8 TEST SETUP PHOTO	28
9 EUT CONSTRUCTIONAL DETAILS	28

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	Pass
Channel Bandwidth	15.407(e)	Pass
Power Spectral Density	15.407(a)(3)	Pass
Band Edge	15.407(b)(4)	Pass
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass
Frequency Stability	15.407(g)	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 3.8039\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 3.9679\text{dB}$	(1)
Radiated Emission	1GHz ~ 40GHz	$\pm 4.29\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.44\text{dB}$	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 General Description of EUT

Product Name:	Shark Byte TX5S.1
Model No.:	FSV2480
S/N:	N/A
Hardware Version:	N/A
Software Version:	N/A
Test sample(s) ID:	GTS202011000121-1
Sample(s) Status:	Engineer sample
Operation Frequency:	5770MHz, 5805MHz
Channel numbers:	2
Modulation technology:	OFDM
Antenna Type:	Integral Antenna
Antenna gain:	2.5dBi
Power supply:	DC 6-25.2V

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
SAIL	DC POWER SUPPLY	46B24L	7J3116161 2491

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
<i>The antennas are integral antenna, the best case gain of the antennas are 2.5dBi, reference to the appendix II for details</i>	

7.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	Pass						

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data


Pre-scan all test modes, found worst case at 5805MHz, and so only show the test result of 5805MHz

Line:

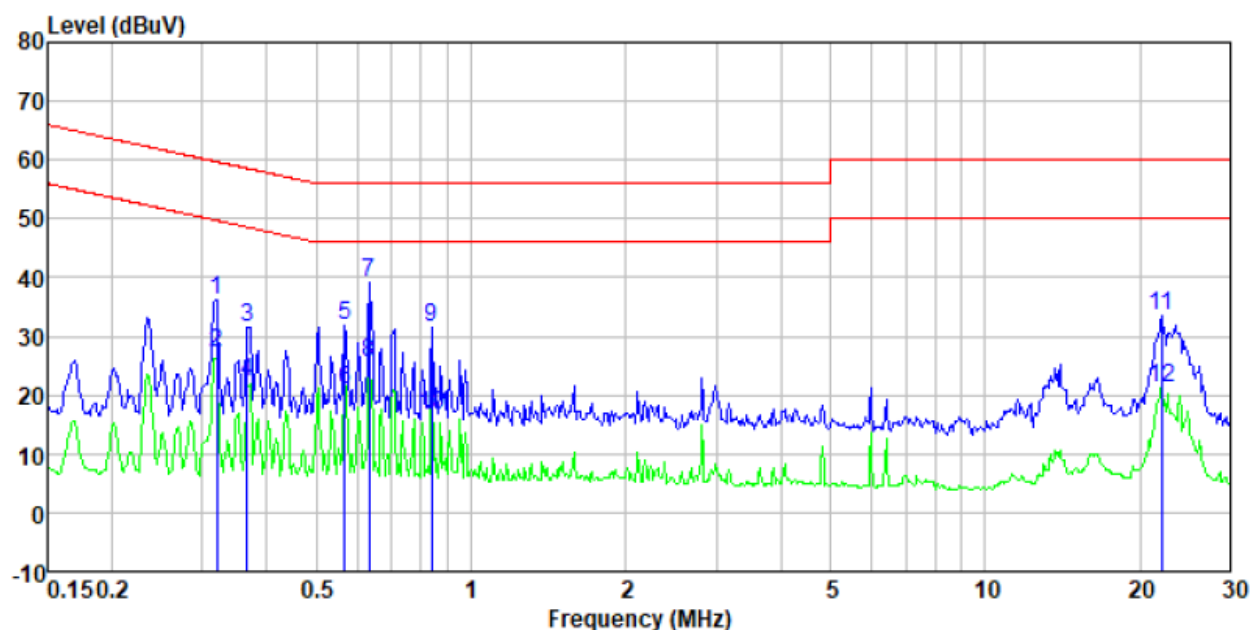

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.32	15.66	20.39	0.10	36.15	59.71	-23.56	QP
0.32	6.54	20.39	0.10	27.03	49.71	-22.68	Average
0.37	11.18	20.37	0.10	31.65	58.56	-26.91	QP
0.37	1.63	20.37	0.10	22.10	48.56	-26.46	Average
0.57	11.41	20.29	0.12	31.82	56.00	-24.18	QP
0.57	0.38	20.29	0.12	20.79	46.00	-25.21	Average
0.63	18.90	20.28	0.12	39.30	56.00	-16.70	QP
0.63	5.09	20.28	0.12	25.49	46.00	-20.51	Average
0.84	10.99	20.23	0.14	31.36	56.00	-24.64	QP
0.84	-3.96	20.23	0.14	16.41	46.00	-29.59	Average
22.06	13.05	20.32	0.23	33.60	60.00	-26.40	QP
22.06	0.67	20.32	0.23	21.22	50.00	-28.78	Average

Neutral:

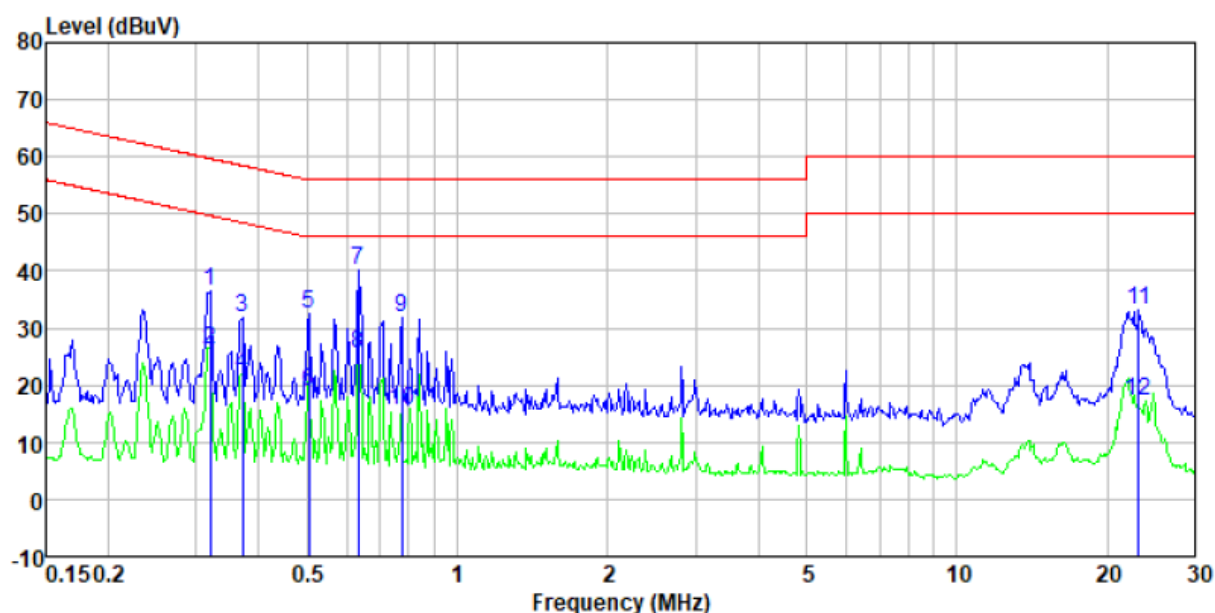


Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.32	15.96	20.39	0.10	36.45	59.71	-23.26	QP
0.32	5.73	20.39	0.10	26.22	49.71	-23.49	Average
0.37	11.29	20.36	0.10	31.75	58.47	-26.72	QP
0.37	1.37	20.36	0.10	21.83	48.47	-26.64	Average
0.50	12.12	20.31	0.11	32.54	56.00	-23.46	QP
0.50	-1.45	20.31	0.11	18.97	46.00	-27.03	Average
0.63	19.83	20.28	0.12	40.23	56.00	-15.77	QP
0.63	5.27	20.28	0.12	25.67	46.00	-20.33	Average
0.78	11.38	20.24	0.14	31.76	56.00	-24.24	QP
0.78	-4.80	20.24	0.14	15.58	46.00	-30.42	Average
23.14	12.50	20.34	0.23	33.07	60.00	-26.93	QP
23.14	-3.35	20.34	0.23	17.22	50.00	-32.78	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


7.3 Conducted Peak Output Power

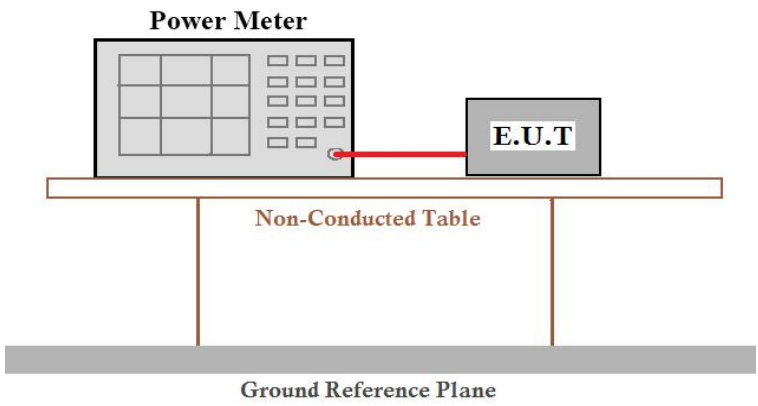Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Power Meter is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Power Meter and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
5770MHz	11.69	30.00	Pass
5805MHz	12.48		


7.4 Channel Bandwidth

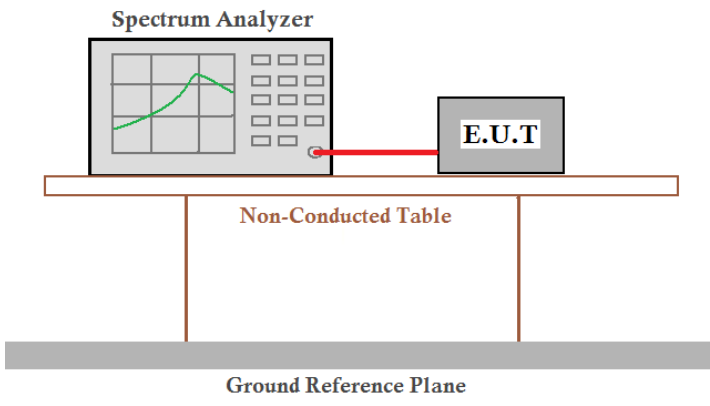Test Requirement:	FCC Part15 E Section 15.407(e)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	>500KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
5770MHz	23.514	>500	Pass
5805MHz	23.528		

Test plot as follows:

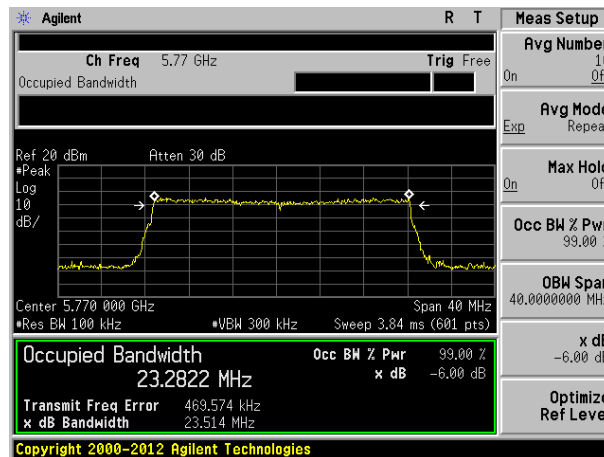


5770MHz

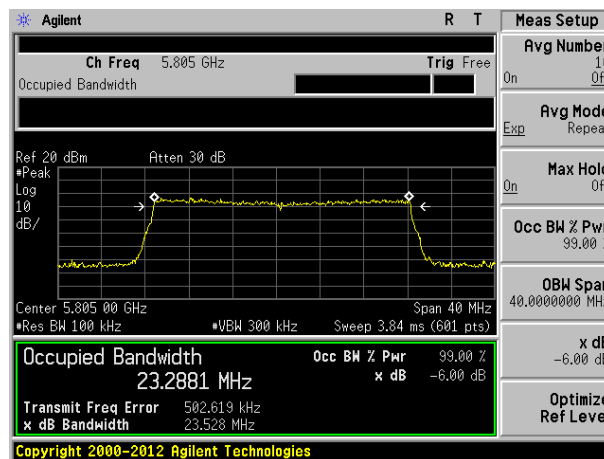

5805MHz


7.5 Power Spectral Density

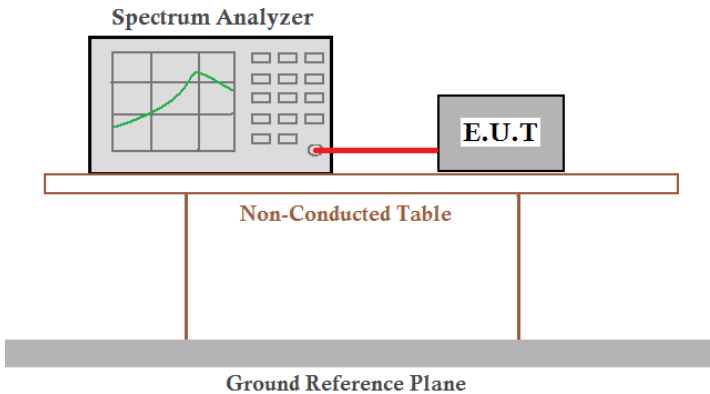Test Requirement:	FCC Part15 E Section 15.407(a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	30dBm/500kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Test channel	Power Spectral Density (dBm/500kHz)	Limit(dBm/500kHz)	Result
5770MHz	3.93	8.00	Pass
5805MHz	6.12		


Duty cycle: 100%

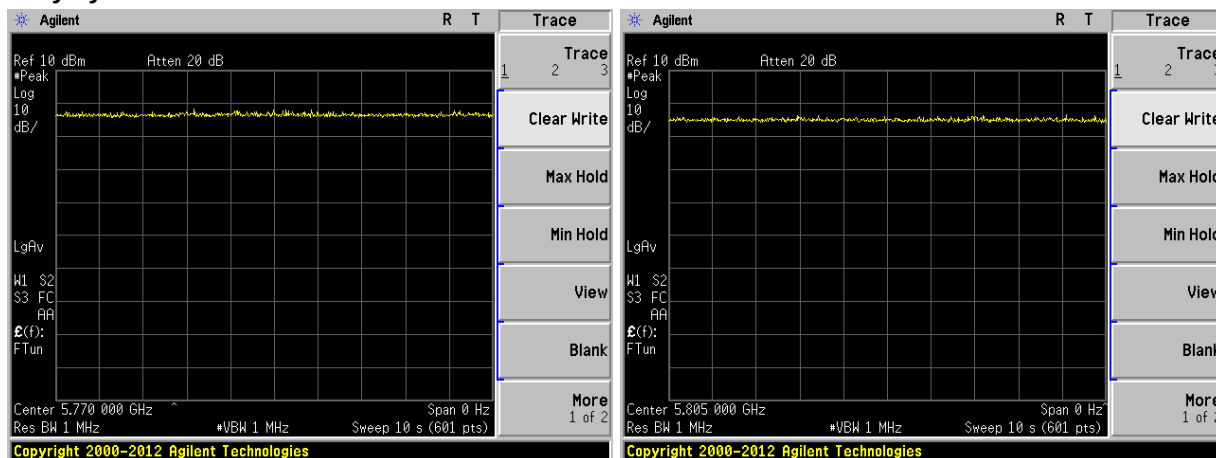

Test plot as follows:

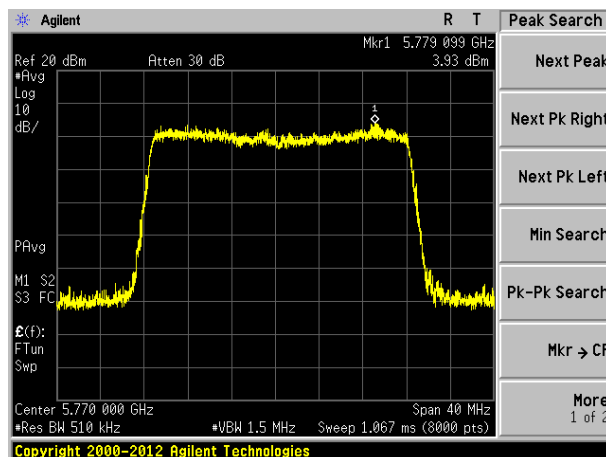


5770MHz

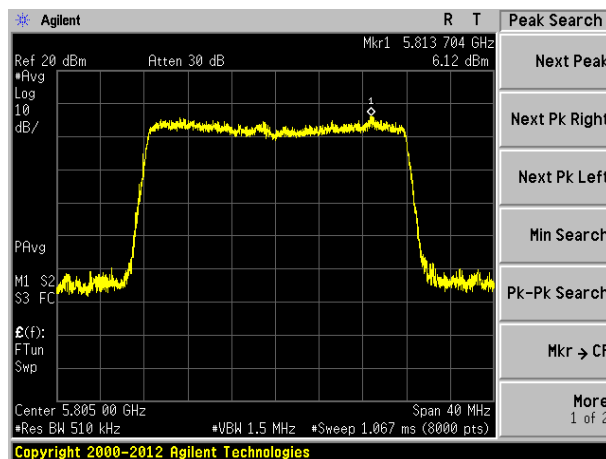

5805MHz

7.6 Band edge

7.6.1 Radiated Emission Method

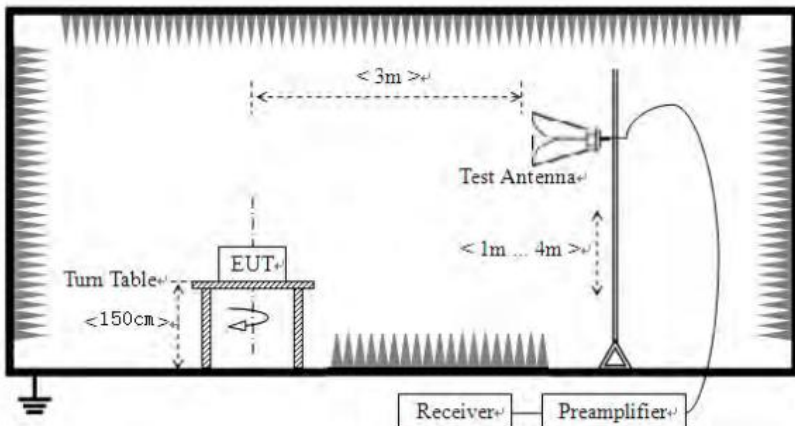Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	RMS
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. According to KDB 789033 D02v02r01 section G) 1) d), for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:
 $E[dBuV/m] = EIRP[dBm] + 95.2;$
 $E[dBuV/m] = -27 + 95.2 = 68.2dBuV/m.$
 $E[dBuV/m] = 10 + 95.2 = 105.2dBuV/m.$
 $E[dBuV/m] = 15.6 + 95.2 = 110.8dBuV/m.$
 $E[dBuV/m] = 27 + 95.2 = 122.2dBuV/m$

Measurement data:

5770MHz								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	27.70	32.36	9.72	23.83	45.95	68.20	-22.25	Horizontal
5700.00	28.41	32.5	9.79	23.84	46.86	105.20	-58.34	Horizontal
5720.00	29.00	32.53	9.81	23.85	47.49	110.80	-63.31	Horizontal
5725.00	29.73	32.53	9.83	23.86	48.23	122.20	-73.97	Horizontal
5850.00	27.48	32.7	9.99	23.87	46.30	122.20	-75.9	Horizontal
5855.00	29.89	32.72	9.99	23.88	48.72	110.80	-62.08	Horizontal
5875.00	28.93	32.74	10.04	23.89	47.82	105.20	-57.38	Horizontal
5925.00	29.37	32.8	10.11	23.90	48.38	68.20	-19.82	Horizontal
5650.00	27.74	32.36	9.72	23.83	45.99	68.20	-22.21	Vertical
5700.00	29.33	32.5	9.79	23.84	47.78	105.20	-57.42	Vertical
5720.00	29.35	32.53	9.81	23.85	47.84	110.80	-62.96	Vertical
5725.00	29.03	32.53	9.83	23.86	47.53	122.20	-74.67	Vertical
5850.00	27.44	32.7	9.99	23.87	46.26	122.20	-75.94	Vertical
5855.00	27.20	32.72	9.99	23.88	46.03	110.80	-64.77	Vertical
5875.00	29.05	32.74	10.04	23.89	47.94	105.20	-57.26	Vertical
5925.00	29.60	32.8	10.11	23.90	48.61	68.20	-19.59	Vertical


5805MHz								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	29.45	32.36	9.72	23.83	47.70	68.20	-20.5	Horizontal
5700.00	27.65	32.5	9.79	23.84	46.10	105.20	-59.1	Horizontal
5720.00	26.37	32.53	9.81	23.85	44.86	110.80	-65.94	Horizontal
5725.00	27.46	32.53	9.83	23.86	45.96	122.20	-76.24	Horizontal
5850.00	26.68	32.7	9.99	23.87	45.50	122.20	-76.7	Horizontal
5855.00	26.07	32.72	9.99	23.88	44.90	110.80	-65.9	Horizontal
5875.00	27.16	32.74	10.04	23.89	46.05	105.20	-59.15	Horizontal
5925.00	28.84	32.8	10.11	23.90	47.85	68.20	-20.35	Horizontal
5650.00	26.15	32.36	9.72	23.83	44.40	68.20	-23.8	Vertical
5700.00	27.77	32.5	9.79	23.84	46.22	105.20	-58.98	Vertical
5720.00	26.62	32.53	9.81	23.85	45.11	110.80	-65.69	Vertical
5725.00	27.35	32.53	9.83	23.86	45.85	122.20	-76.35	Vertical
5850.00	25.15	32.7	9.99	23.87	43.97	122.20	-78.23	Vertical
5855.00	28.50	32.72	9.99	23.88	47.33	110.80	-63.47	Vertical
5875.00	28.35	32.74	10.04	23.89	47.24	105.20	-57.96	Vertical
5925.00	25.69	32.8	10.11	23.90	44.70	68.20	-23.5	Vertical


Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


7.7 Spurious Emission

7.7.1 Radiated Emission Method

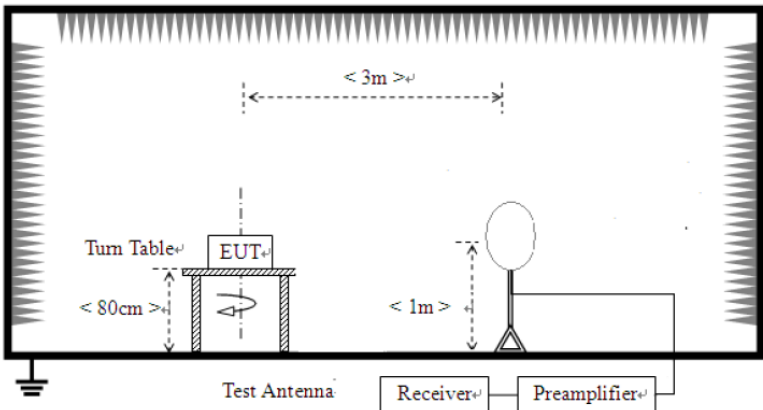Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		AV	1MHz	3MHz	Average Value
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to 1GHz				

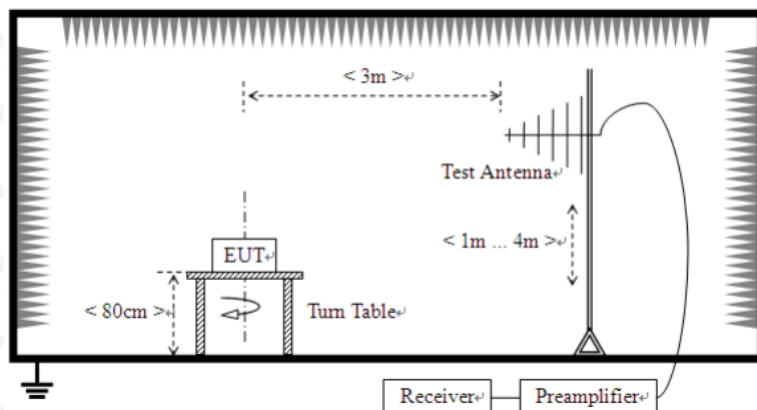

For radiated emissions above 1GHz

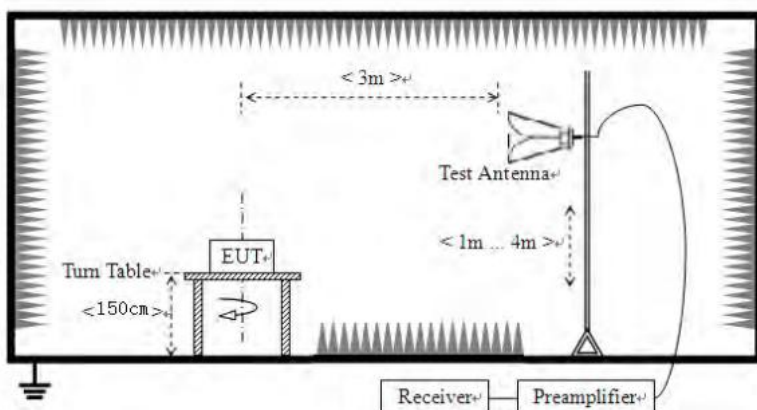

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-

	peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test results:	Pass					

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:


9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Below 1GHz


Pre-scan all test modes, found worst case at 5805MHz, and so only show the test result of 5805MHz

Horizontal:

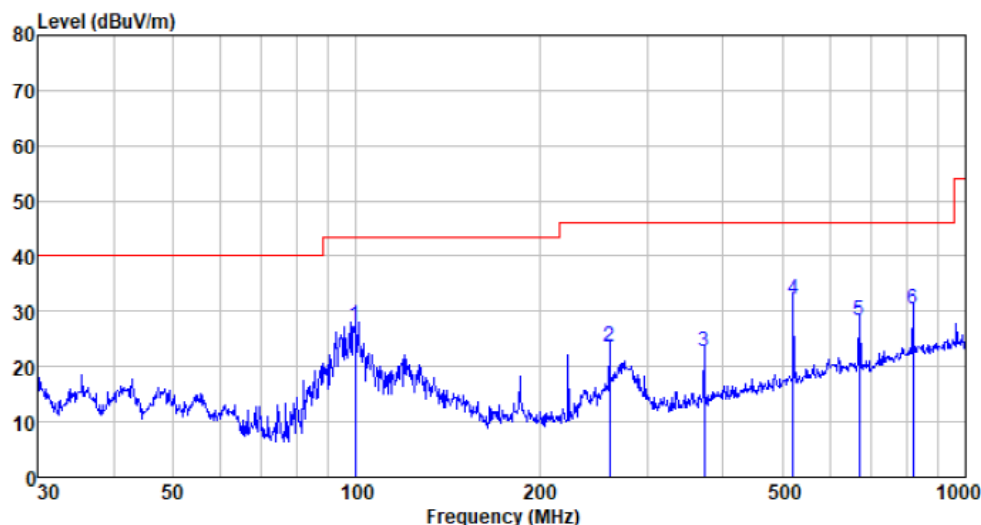

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
99.528	50.87	12.13	1.19	36.72	27.47	43.50	-16.03	QP
260.144	46.40	12.47	2.18	37.39	23.66	46.00	-22.34	QP
372.005	42.71	14.89	2.72	37.49	22.83	46.00	-23.17	QP
520.888	48.61	17.80	3.39	37.52	32.28	46.00	-13.72	QP
668.142	42.48	19.57	3.97	37.60	28.42	46.00	-17.58	QP
818.834	42.04	21.57	4.54	37.62	30.53	46.00	-15.47	QP

Vertical:

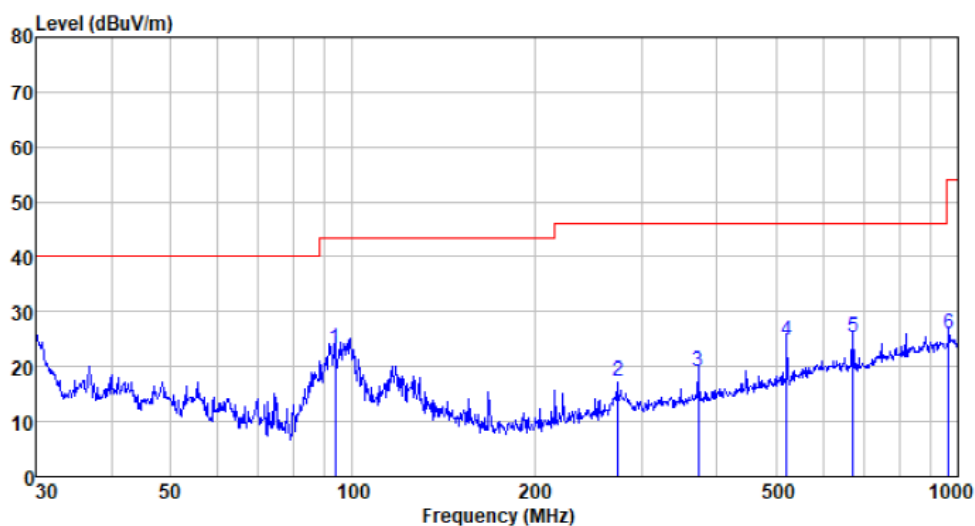

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
93.768	47.52	11.25	1.14	36.67	23.24	43.50	-20.26	QP
274.194	39.67	12.87	2.24	37.40	17.38	46.00	-28.62	QP
372.005	39.08	14.89	2.72	37.49	19.20	46.00	-26.80	QP
520.888	41.25	17.80	3.39	37.52	24.92	46.00	-21.08	QP
670.489	39.45	19.57	3.98	37.60	25.40	46.00	-20.60	QP
965.542	36.00	22.57	5.09	37.54	26.12	54.00	-27.88	QP

Above 1GHz:

5770MHz:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
11540.00	34.23	39.34	8.75	36.29	46.03	68.20	-22.17	Vertical
17303.00	30.85	41.26	11.43	36.27	47.27	68.20	-20.93	Vertical
11540.00	33.98	39.34	8.75	36.29	45.78	68.20	-22.42	Horizontal
17303.00	31.35	41.26	11.43	36.27	47.77	68.20	-20.43	Horizontal


5085MHz:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
11608.00	33.00	39.22	8.78	36.28	44.72	68.20	-23.48	Vertical
17422.00	30.60	42.04	11.53	36.26	47.91	68.20	-20.29	Vertical
11608.00	32.82	39.22	8.78	36.28	44.54	68.20	-23.66	Horizontal
17422.00	30.62	42.04	11.53	36.26	47.93	68.20	-20.27	Horizontal

Notes:

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. Test result on peak value is lower than limit 20db, then average measurement needn't be performed.

7.8 Frequency stability

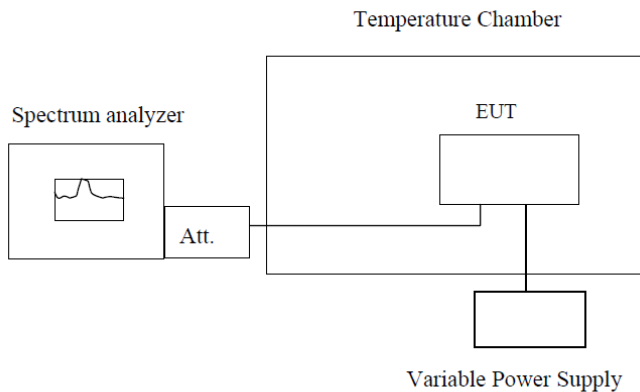Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Frequency stability versus Temp.					
Power Supply: DC 12V					
Temp. (°C)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)
-30	5770	5770.52	5770.35	5770.55	5770.09
	5805	5805.81	5805.56	5805.73	5805.28
-20	5770	5770.51	5770.29	5770.50	5770.86
	5805	5805.17	5805.30	5805.15	5805.56
-10	5770	5770.52	5770.77	5770.82	5770.20
	5805	5805.88	5805.60	5805.37	5805.78
0	5770	5770.28	5770.83	5770.93	5770.70
	5805	5805.16	5805.40	5805.33	5805.00
10	5770	5770.91	5770.87	5771.00	5770.21
	5805	5805.20	5805.02	5805.38	5805.29
20	5770	5770.44	5770.80	5770.89	5770.84
	5805	5805.45	5805.56	5805.64	5805.02
30	5770	5770.56	5770.49	5770.90	5770.74
	5805	5805.53	5805.10	5805.33	5805.59
40	5770	5770.38	5770.80	5770.29	5770.42
	5805	5805.45	5805.91	5805.99	5805.65
50	5770	5770.03	5770.51	5770.86	5770.26
	5805	5805.38	5805.49	5805.19	5805.11

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VDC)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)
6	5770	5770.10	5770.26	5770.97	5770.80
	5805	5805.84	5805.28	5805.79	5805.10
25.2	5770	5770.67	5770.32	5770.82	5770.40
	5805	5805.86	5805.73	5805.28	5805.84

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----