

S

T

S

L

A

B



FCC Part 15B TEST REPORT

Report No: STS1711026E01

Issued for

Shenzhen Yiliu technology co., Ltd

1103-2, block A, building 4, cheonan digital city, huangge road, longcheng street, longgang district, shenzhen city, Guangdong, China

Product Name:	Intelligent outdoor sports watch
Brand Name:	Disrup Ware
Model Name:	CL-1006 3G
Series Model:	N/A
FCC ID:	2AN6I-CL-10063G
Test Standard:	FCC Part 15B

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.



**TEST RESULT CERTIFICATION****Applicant's name**.....: Shenzhen Yiliu technology co., LtdAddress.....: 1103-2, block A, building 4, cheonan digital city, huangge road,
longcheng street, longgang district, shenzhen city, Guangdong,
China**Manufacture's Name**: Shenzhen Yiliu technology co., LtdAddress.....: 1103-2, block A, building 4, cheonan digital city, huangge road,
longcheng street, longgang district, shenzhen city, Guangdong,
China**Product description**

Product name.....: Intelligent outdoor sports watch

Brand name.....: Disrup Ware

Model Name: CL-1006 3G

Series Model: N/A

Standards.....: FCC Part 15B

Test procedure ANSI C63.4-2014

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....

Date of performance of tests 02 Nov. 2017~05 Nov. 2017

Date of Issue..... 06 Nov. 2017

Test Result **Pass**

Testing Engineer :

(Kyle Rao)

Technical Manager :

(Chopin Xiao)

Authorized Signatory :


(Vita Li)





Table of Contents

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	14

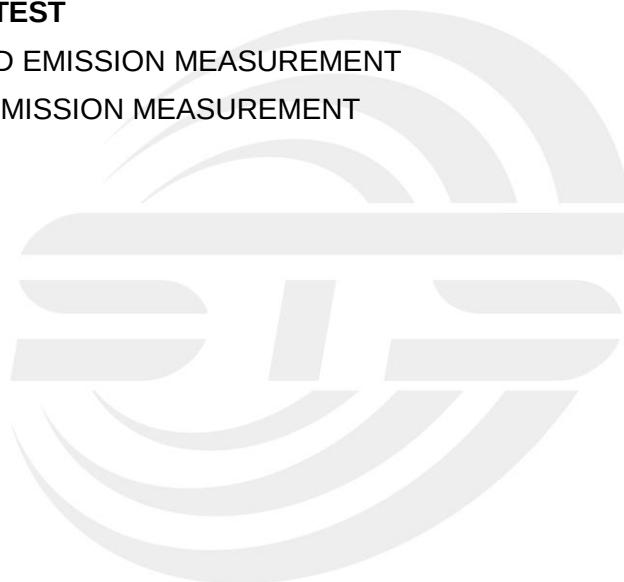

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	06 Nov. 2017	STS1711026E01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B (10-1-05 Edition)	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACTORY

Company Name:	Shenzhen STS Test Services Co. Ltd.
Address:	1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86-755 3688 6288
Fax:	+86-755 3688 6277
Registration No.:	CNAS Registration No.: L7649; FCC Registration No.: 625569
	IC Registration No.: 12108A; A2LA Certificate No.: 4338.01;

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	All emissions,radiated(<30M) (9KHz-30MHz)	$\pm 2.45\text{dB}$
4	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 3.80\text{dB}$
5	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 3.97\text{dB}$
6	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	Intelligent outdoor sports watch
Brand Name	Disrup Ware
Model Name	CL-1006 3G
Series Model	N/A
Model Difference	N/A
Frequency Bands	GSM 850: 824.2~848.8MHz PCS1900: 1850.2~1909.8MHz WCDMA Band II: 1852.4~1907.6MHz WCDMA Band V: 826.4~846.6MHz WLAN 802.11b/g/n(HT20/40):2410~2460MHz Bluetooth: 2402~2480MHz
Modulation Mode	GSM: GMSK; WCDMA: QPSK; HSDPA:QPSK/16QAM; WLAN: CCK/BPSK/QPSK/16QAM; Bluetooth: BT(1Mbps): GFSK
Adapter	Input: AC100-240V, 200mA, 50/60Hz Output: DC 5V, 1A
Battery	Rated Voltage: 3.8V Capacity: 485 mAh (1.84W) Charge Limit: 4.2V
Hardware version number	V2.0
Software version number	N/A

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB port communication with PC


For Conducted Test	
Final Test Mode	Description
Mode 1	USB port communication with PC

For Radiated Test	
Final Test Mode	Description
Mode 1	USB port communication with PC

NOTE:

1. The test modes were carried out for all operation modes. Only worst case will be show in this report.
2. We have be tested for all avaiable U.S. voltage and frequencies(For 120V, 50/60Hz) for which the device is capable of operation.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

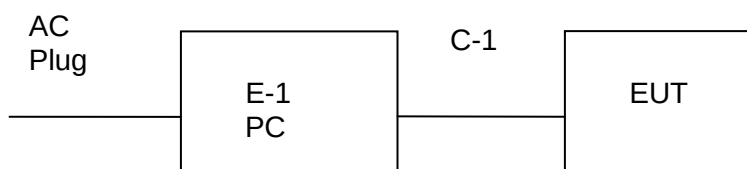



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	PC	4CV428DQXR	500-320cx	Auxiliary equipment

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable (FTP)	NO	100cm	Auxiliary equipment

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESCI	101427	2017.10.15	2018.10.14
Bilog Antenna	TESEQ	CBL6111D	34678	2017.03.24	2018.03.23
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2017.03.06	2018.03.05
Power Amplifier	Agilent	8449B	60538	2017.10.15	2018.10.14
Spectrum Analyzer	Agilent	E4407B	MY50140340	2017.03.11	2018.03.10
Pre-amplifier(0.1M-3 GHz)	EM	EM330	60538	2017.03.12	2018.03.11
Spectrum Analyzer	Agilent	N9020A	MY49100060	2017.03.11	2018.03.10
EMI Test Receiver	ESW	R&S	101535	2017.06.01	2018.05.31

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
EMI Test Receiver	R&S	ESPI	102086	2017.10.15	2018.10.14
LISN	R&S	ENV216	101242	2017.10.15	2018.10.14
LISN	EMCO	3810/2NM	000-23625	2017.10.15	2018.10.14
Absorbing clamp	R&S	MDS-21	100668	2017.10.20	2018.10.19



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
 - I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
 - LISN at least 80 cm from nearest part of EUT chassis.
 - For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

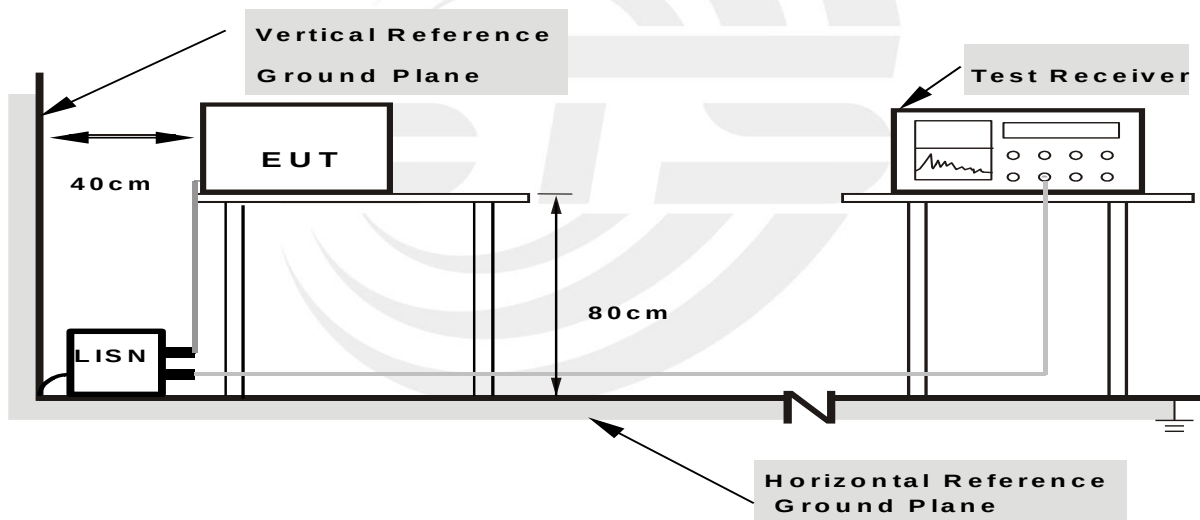

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	26.5℃	Relative Humidity:	68%
Pressure:	1010hPa	Phase:	L
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1548	32.77	9.76	42.53	65.74	-23.21	QP
2	0.1548	17.48	9.76	27.24	55.74	-28.50	AVG
3	0.5540	35.74	9.95	45.69	56.00	-10.31	QP
4	0.5540	30.57	9.95	40.52	46.00	-5.48	AVG
5	0.8980	24.81	9.82	34.63	56.00	-21.37	QP
6	0.8980	17.98	9.82	27.80	46.00	-18.20	AVG
7	1.5700	23.92	9.84	33.76	56.00	-22.24	QP
8	1.5700	14.62	9.84	24.46	46.00	-21.54	AVG
9	10.3860	21.78	9.94	31.72	60.00	-28.28	QP
10	10.3860	9.15	9.94	19.09	50.00	-30.91	AVG
11	27.2780	25.82	10.39	36.21	60.00	-23.79	QP
12	27.2780	11.70	10.39	22.09	50.00	-27.91	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

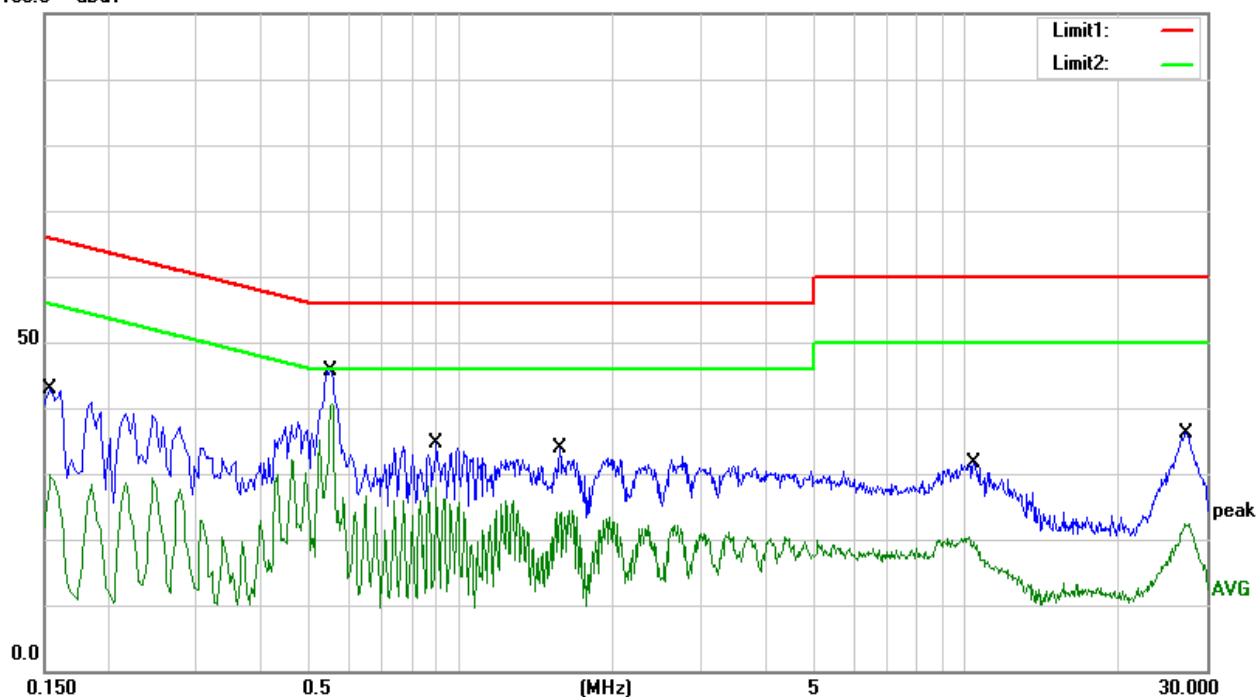




Temperature:	26.5℃	Relative Humidity:	68%
Pressure:	1010hPa	Phase:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.1540	31.84	9.76	41.60	65.78	-24.18	QP
2	0.1540	16.37	9.76	26.13	55.78	-29.65	AVG
3	0.5460	30.65	9.95	40.60	56.00	-15.40	QP
4	0.5460	13.98	9.95	23.93	46.00	-22.07	AVG
5	1.4780	23.17	9.83	33.00	56.00	-23.00	QP
6	1.4780	7.38	9.83	17.21	46.00	-28.79	AVG
7	4.4940	20.58	9.94	30.52	56.00	-25.48	QP
8	4.4940	4.94	9.94	14.88	46.00	-31.12	AVG
9	12.1140	20.60	9.99	30.59	60.00	-29.41	QP
10	12.1140	4.76	9.99	14.75	50.00	-35.25	AVG
11	27.4860	27.75	10.40	38.15	60.00	-21.85	QP
12	27.4860	13.50	10.40	23.90	50.00	-26.10	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBUV

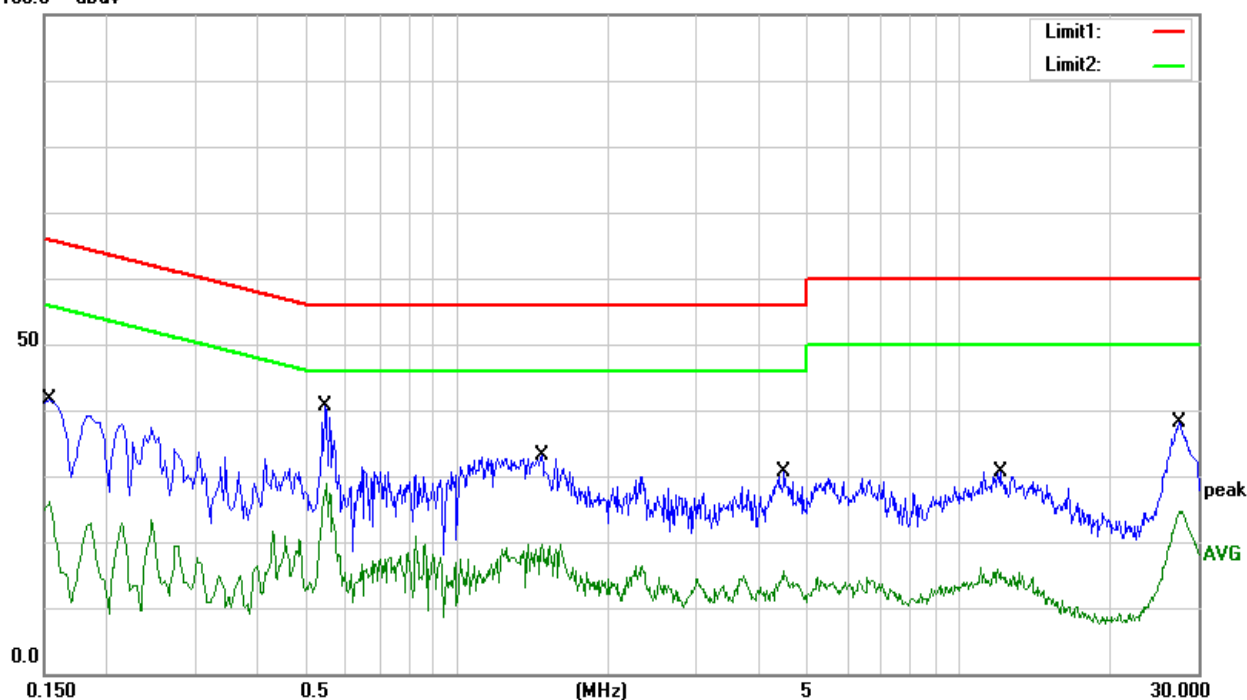

Note: The test voltage is 100-240V, both of which have assessment tests, and the worst test data is in the report.



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 Radiated Emission Limits

In case the emission fall within the restricted band specified on 15.105(a)&109(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	5th harmonic (Peak/AV)
RB / VB (emission in restricted band)	30MHz to 1000MHz: 100 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	30MHz to 1000MHz: 100 KHz / 300 KHz Above 1000MHz: 1 MHz / 3 MHz

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and above 1GHz.

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

- c. the height of the antenna shall vary between 1m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency 30MHz~1GHz

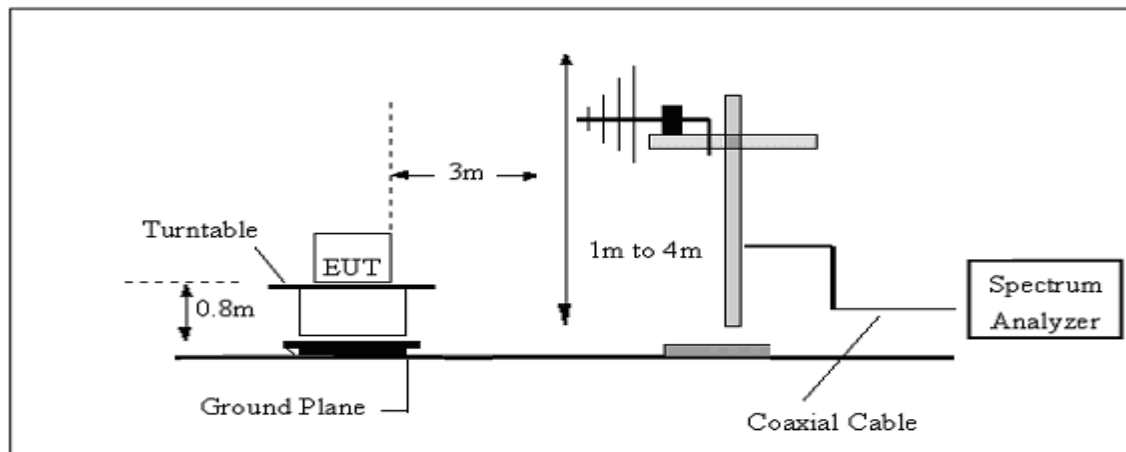

(B) Radiated Emission Test-Up Frequency Above 1GHz

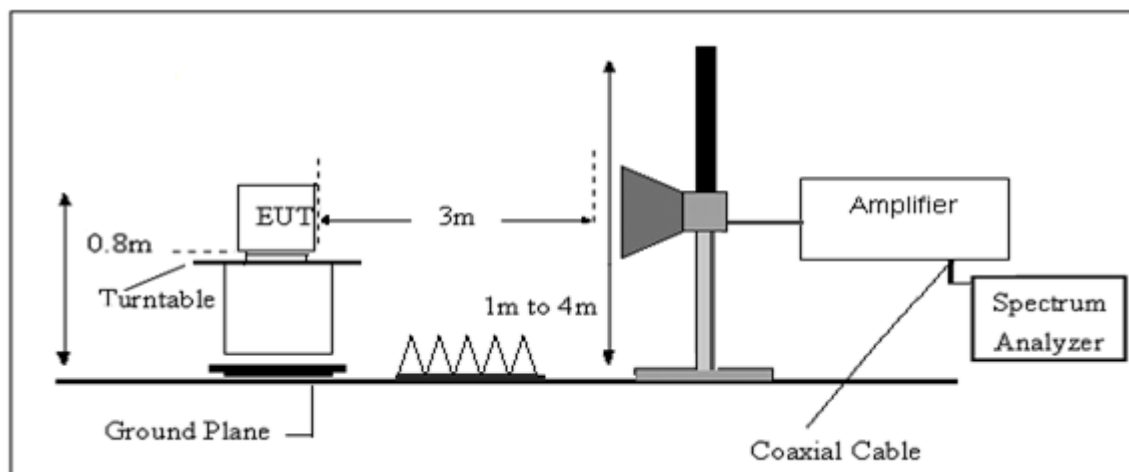

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS


30MHz -1000MHz

Temperature:	24.6 °C	Relative Humidity:	59%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Results (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	52.7600	43.36	-22.27	21.09	40.00	-18.91	QP
2	85.2980	42.51	-21.37	21.14	40.00	-18.86	QP
3	100.5806	42.28	-19.14	23.14	43.50	-20.36	QP
4	180.0165	41.53	-19.44	22.09	43.50	-21.41	QP
5	375.9384	31.86	-12.73	19.13	46.00	-26.87	QP
6	701.7610	30.31	-5.29	25.02	46.00	-20.98	QP

Remark:

1. Margin = Result (Result = Reading + Factor)–Limit

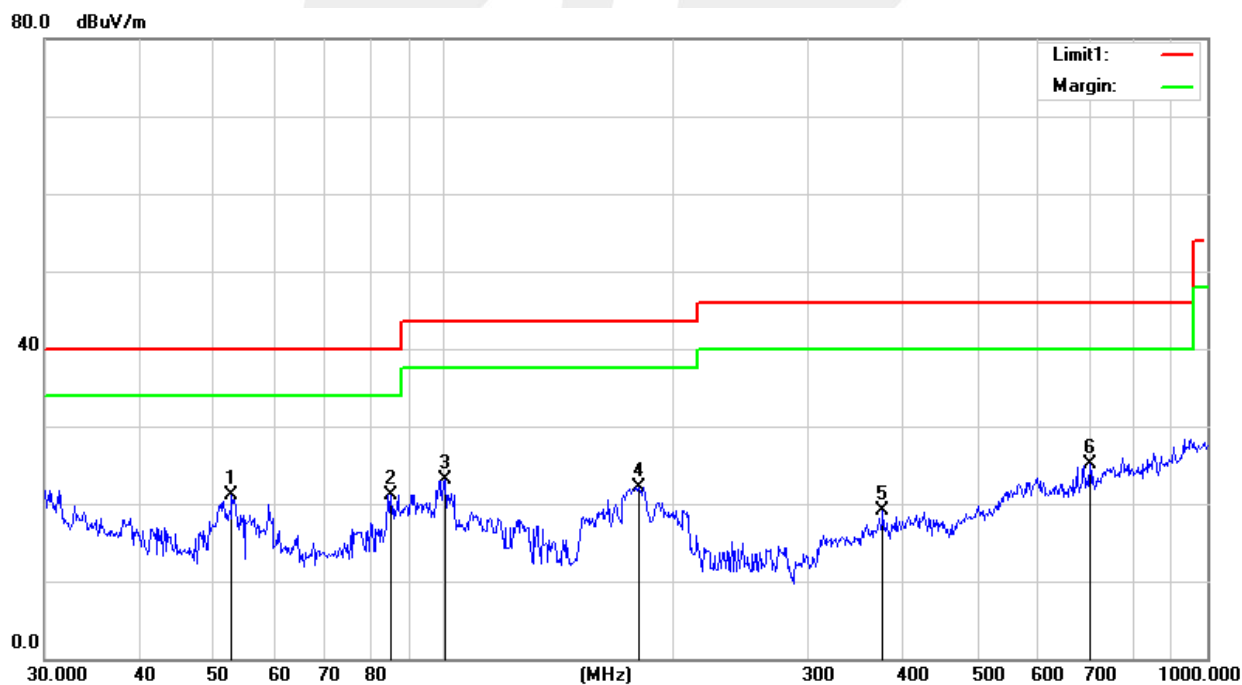




Temperature:	24.6 °C	Relative Humidity:	59%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.2110	44.35	-11.30	33.05	40.00	-6.95	QP
2	39.1613	49.59	-15.89	33.70	40.00	-6.30	QP
3	53.8817	47.77	-22.59	25.18	40.00	-14.82	QP
4	63.3132	45.73	-24.26	21.47	40.00	-18.53	QP
5	135.0320	42.91	-17.52	25.39	43.50	-18.11	QP
6	150.0107	43.87	-17.97	25.90	43.50	-17.60	QP

Remark:

1. Margin = Result (Result = Reading + Factor)-Limit

80.0 dBuV/m

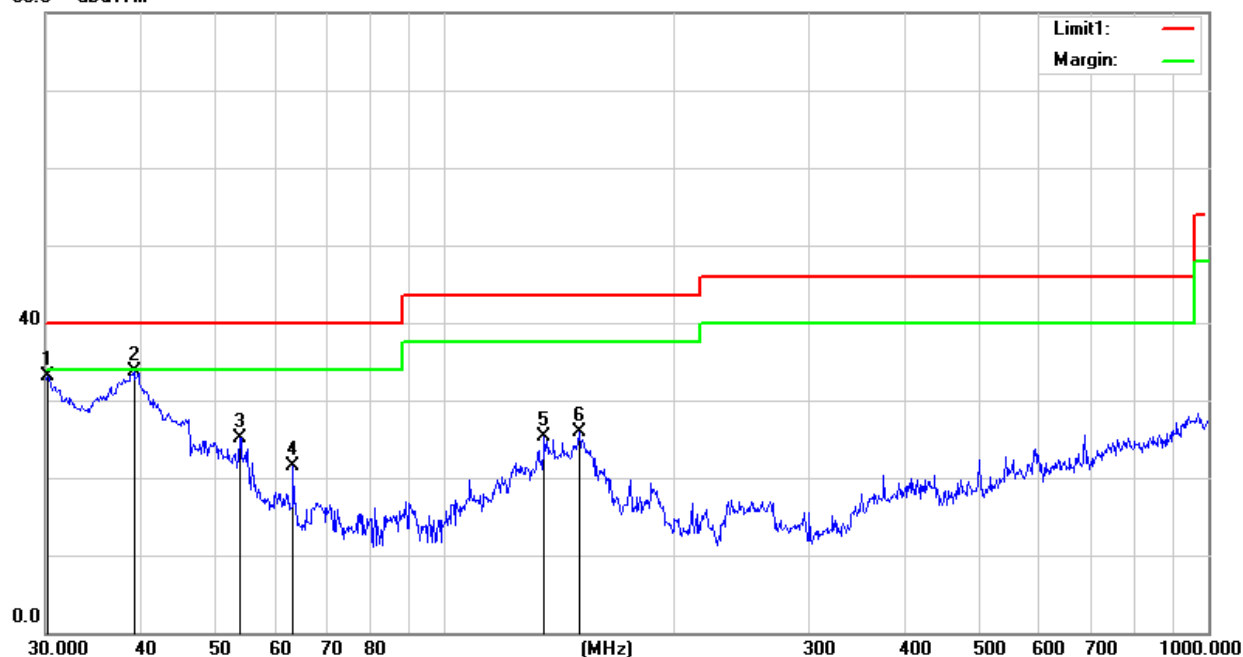



(1 GHz to 25GHz.)

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical/Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1

PK

Freq.	Ant. Pol	Peak	Amplifier	Loss	Antenna Factor	Orrected Factor	Actual Fs	Peak	Peak
(MHz)	H/V	Reading (dBuV)	(dB)	(dB)	(dB/m)	(dB)	Peak (dBuV/m)	Limit (dBuV/m)	margin (dB)
2005.32	H	56.23	43.81	5.42	25.93	-12.54	43.77	74.00	-30.23
2508.61	H	50.58	44.47	6.11	27.64	-10.81	39.86	74.00	-34.14
3000.42	H	52.55	44.78	6.73	28.22	-9.82	42.72	74.00	-31.28
4400.87	H	54.13	44.35	8.42	30.44	-5.48	48.64	74.00	-25.36
2005.34	V	51.26	43.84	5.48	25.95	-12.54	38.85	74.00	-35.15
2508.61	V	49.35	44.48	6.23	27.69	-10.83	38.79	74.00	-35.21
3000.43	V	53.65	44.75	6.76	28.26	-9.85	43.92	74.00	-30.08
4400.86	V	48.25	44.34	8.42	30.45	-5.48	42.78	74.00	-31.22
5506.84	V	35.34	44.21	9.77	32.23	-2.59	33.13	74.00	-40.87

AV

Freq.	Ant. Pol	AV	Amplifier	Loss	Antenna Factor	Orrected Factor		AV	AV
(MHz)	H/V	Reading (dBuV)	(dB)	(dB)	(dB/m)	(dB)	AV (dBuV/m)	Limit (dBuV/m)	margin (dB)
1403.35	H	48.26	45.13	4.24	25.11	4.24	32.48	54.00	-21.52
3000.76	H	47.13	44.78	6.71	28.26	-9.80	37.32	54.00	-16.68
4002.47	H	52.35	44.25	7.93	29.74	-6.60	45.77	54.00	-8.23
5506.84	H	46.35	44.23	9.71	32.32	-2.50	44.15	54.00	-9.85
N/A									
1403.35	V	35.31	45.14	4.29	25.15	-16.00	19.61	54.00	-34.39
3000.76	V	41.52	44.75	6.75	28.26	-9.80	31.78	54.00	-22.22
4002.47	V	36.39	44.24	7.96	29.74	-6.60	29.85	54.00	-24.15
5506.84	V	35.24	44.26	9.72	32.35	-2.50	33.05	54.00	-20.95



Notes:

1. Measuring frequencies from 1 GHz to 25GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode of the emission shown in Actual FS column.
3. The frequency that above 5.5GHz is mainly from the environment noise.

*****END OF THE REPORT*****

