



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V05
Report Template Revision Date: 2021-11-03

Test Report

Report No.: CQASZ20250701673E-01

Applicant: Shenzhen Dayun Links Co., Ltd

Address of Applicant: Room 501, No.B Building 1, Bestda Medical Device Building, No.28, Nantong Avenue, Baolong Street, Longgang, Shenzhen, Guangdong,

Equipment Under Test (EUT):

EUT Name: Video Baby monitor

Model No.: BM5J488, BM5J7, BM7TX, BM5G7, BM5J71, BM5G71, EPEL-BMONITOR-01-24

Test Model No.: BM7TX

Brand Name: N/A

FCC ID: 2ANBK-BM7TX

Standards: 47 CFR Part 15, Subpart C

KDB558074 D01 15.247 Meas Guidance v05r02

Date of Receipt: 2025-07-18

Date of Test: 2025-07-18 to 2025-07-30

Date of Issue: 2025-07-30

Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above

Tested By: lewis zhou
(Lewis Zhou)

Reviewed By: Timo Lei
(Timo Lei)

Approved By: Jack Ai
(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20250701673E-01	Rev.01	Initial report	2025-07-30

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section 15.249 (a)/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.249(a)/15.205	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2013)	PASS

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
4.6 TEST LOCATION	9
4.7 TEST FACILITY	9
4.8 DEVIATION FROM STANDARDS	9
4.9 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
4.11 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 RADIATED EMISSION	15
5.4 20DB BANDWIDTH	23
6 PHOTOGRAPHS	26
6.1 RADIATED EMISSION TEST SETUP	26
6.2 CONDUCTED EMISSION TEST SETUP	27
6.3 EUT CONSTRUCTIONAL DETAILS	28
*** END OF REPORT ***	34

4 General Information

4.1 Client Information

Applicant:	Shenzhen Dayun Links Co., Ltd
Address of Applicant:	Room 501, No.B Building 1, Bestda Medical Device Building, No.28, Nantong Avenue, Baolong Street, Longgang, Shenzhen, Guangdong,
Manufacturer:	Shenzhen Dayun Links Co., Ltd
Address of Manufacturer:	Room 501, No.B Building 1, Bestda Medical Device Building, No.28, Nantong Avenue, Baolong Street, Longgang, Shenzhen, Guangdong,
Factory:	Shenzhen Dayun Links Co., Ltd
Address of Factory:	Room 501, No.B Building 1, Bestda Medical Device Building, No.28, Nantong Avenue, Baolong Street, Longgang, Shenzhen, Guangdong,

4.2 General Description of EUT

EUT Name:	Video Baby monitor
Model No.:	BM5J488, BM5J7, BM7TX, BM5G7, BM5J71, BM5G71, EPEL-BMONITOR-01-24
Test Model No.:	BM7TX
Trade Mark:	N/A
Software Version:	Tx:48822109
Hardware Version:	BM_7XYD_MAIN_V1.0.0.0
Frequency Range:	2410.001MHz-2473.001MHz
Modulation Type:	GFSK
Number of Channels:	19
Sample Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	EUT Key
Antenna Type:	Internal antenna
Antenna Gain:	-1.12dBi
Power Supply:	Power supply DC5V form adapter Adapter: Model No.:PS10UA050K2000UU Input:100-240V~50/60Hz 0.35A Max Output:5V 2A 10W

Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2410.001MHz	8	2434.5MHz	15	2459MHz
2	2413.5MHz	9	2438MHz	16	2462.5MHz
3	2417MHz	10	2441.501MHz	17	2466MHz
4	2420.5MHz	11	2445MHz	18	2469.5MHz
5	2424MHz	12	2448.5MHz	19	2473.001MHz
6	2427.5MHz	13	2452MHz	20	/
7	2431MHz	14	2455.5MHz	21	/

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	2410.001MHz
The Middle channel(CH10)	2441.501MHz
The Highest channel(CH19)	2473.001MHz

4.3 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	27 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Temperature:	26 °C
Humidity:	59 % RH
Atmospheric Pressure:	1009mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009mbar
Test mode:	
Transmitting mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	MI	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	5.12dB	(1)
Radiated Emission	Above 1GHz	4.60dB	(1)
Conducted Disturbance	0.15~30MHz	3.34dB	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.7 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESPI3	CQA-013	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1

Note:


The temporary antenna connector is soldered on the pcb board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

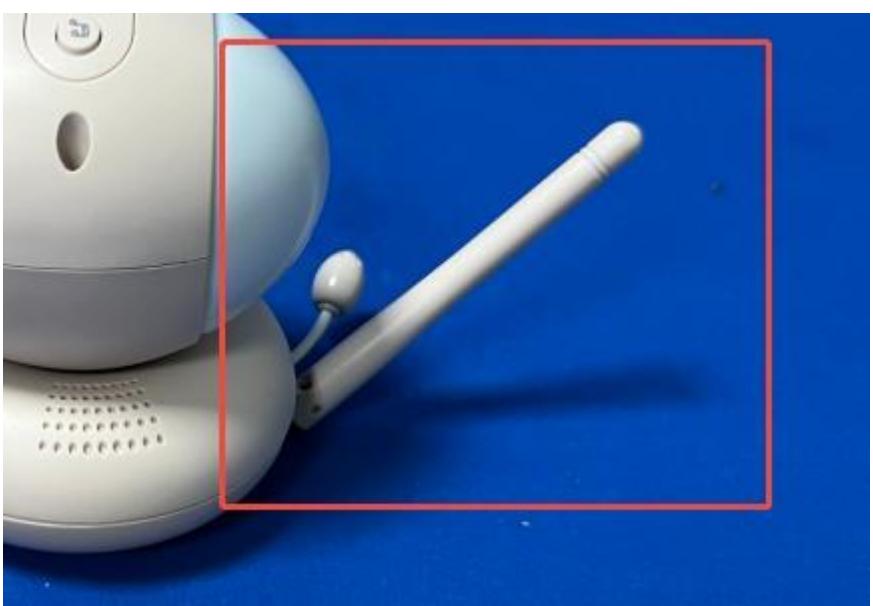Standard requirement:	47 CFR Part 15C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	 
	<p>The antenna is internal antenna. The best case gain of the antenna is -1.12dBi.</p>


5.2 Conducted Emissions

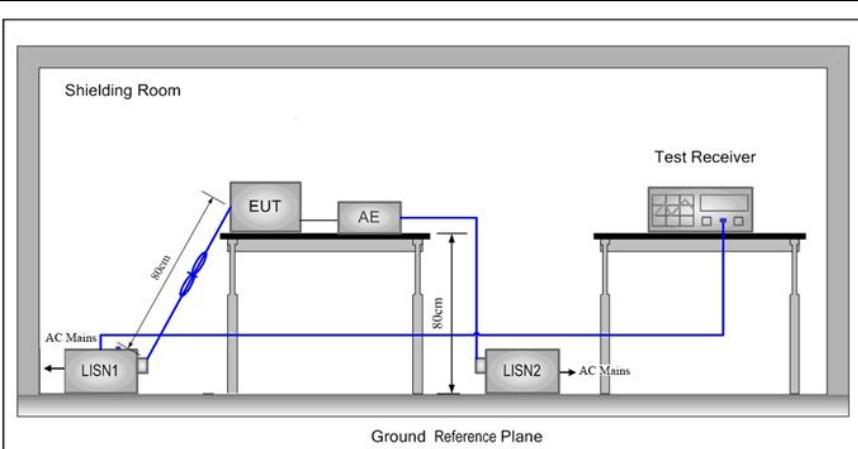Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 		
Test Setup:			

Test Mode:	Charge +Transmitting mode.
Final Test Mode:	Charge +Transmitting mode
Test Results:	Pass

Measurement Data:

Live line:

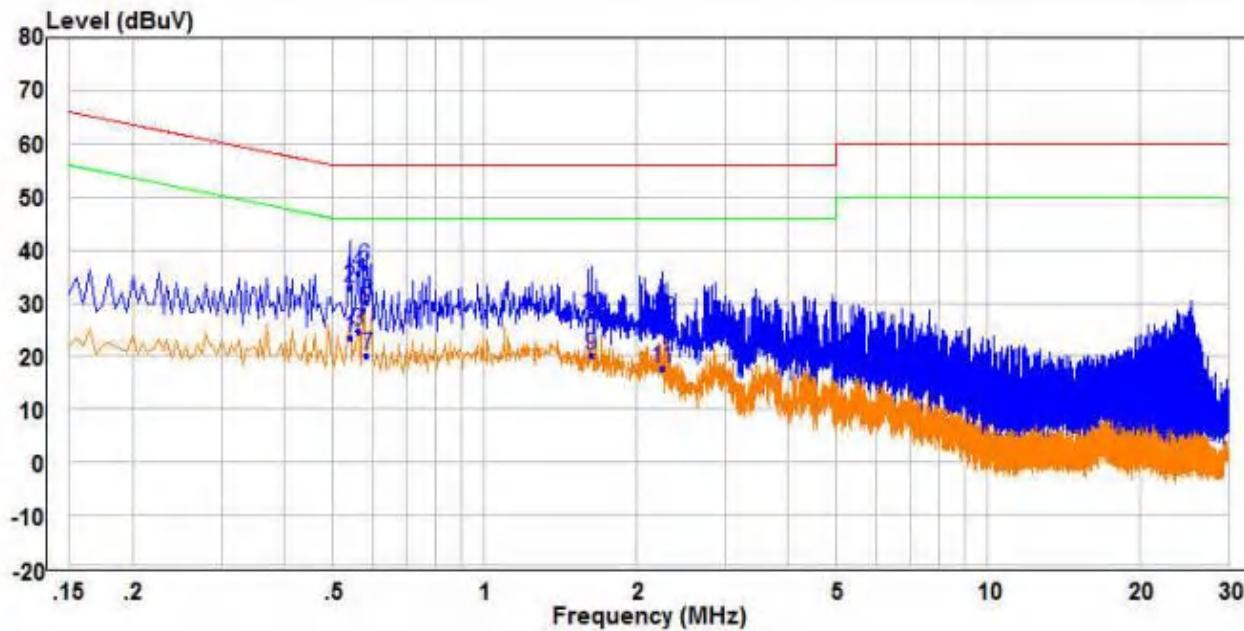


Freq	Read		Level	Limit	Over	Remark	Pol/Phase	
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.540	13.74	9.74	23.48	46.00	-22.52	Average	Line
2	0.540	23.22	9.74	32.96	56.00	-23.04	QP	Line
3	0.560	14.95	9.76	24.71	46.00	-21.29	Average	Line
4	0.560	25.77	9.76	35.53	56.00	-20.47	QP	Line
5 PP	0.575	18.78	9.78	28.56	46.00	-17.44	Average	Line
6 QP	0.575	27.08	9.78	36.86	56.00	-19.14	QP	Line
7	0.585	10.26	9.79	20.05	46.00	-25.95	Average	Line
8	0.585	20.52	9.79	30.31	56.00	-25.69	QP	Line
9	1.630	9.13	11.07	20.20	46.00	-25.80	Average	Line
10	1.630	16.58	11.07	27.65	56.00	-28.35	QP	Line
11	2.255	6.43	11.39	17.82	46.00	-28.18	Average	Line
12	2.255	15.29	11.39	26.68	56.00	-29.32	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

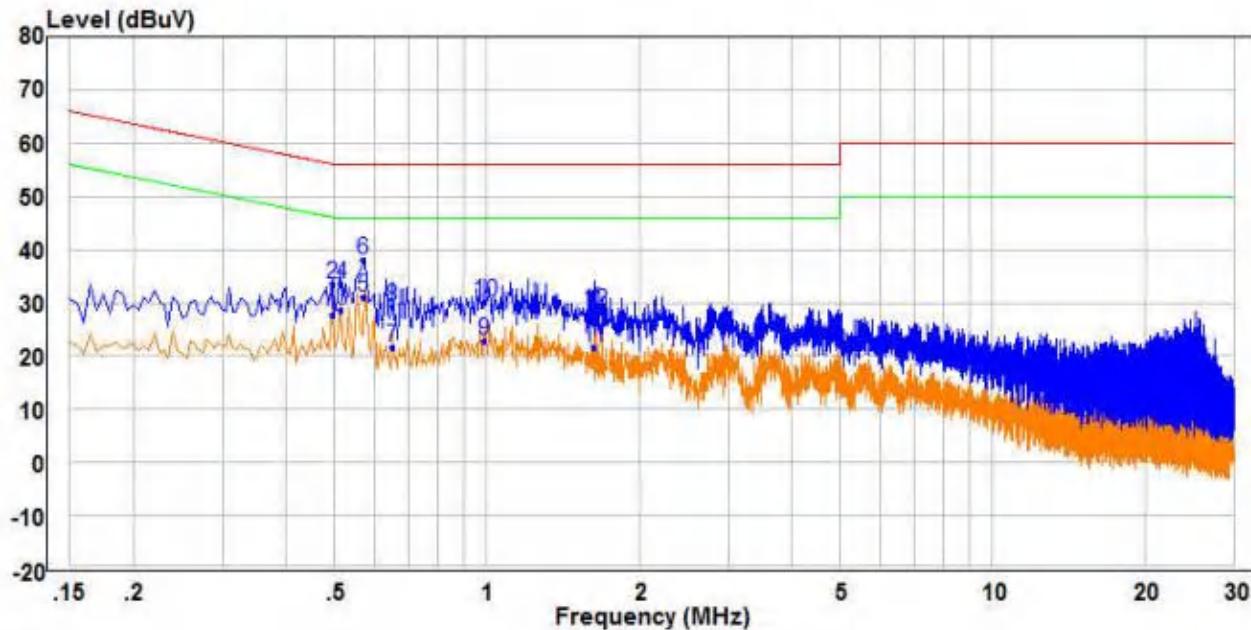




Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase	
	MHz			dBuV	dB			
1	0.495	18.10	9.70	27.80	46.08	-18.28	Average	
2	0.495	23.71	9.70	33.41	56.08	-22.67	QP	
3	0.515	18.98	9.72	28.70	46.00	-17.30	Average	
4	0.515	23.87	9.72	33.59	56.00	-22.41	QP	
5	PP	0.570	21.34	9.77	31.11	46.00	-14.89	Average
6	QP	0.570	28.22	9.77	37.99	56.00	-18.01	QP
7	0.650	11.89	9.85	21.74	46.00	-24.26	Average	
8	0.650	19.39	9.85	29.24	56.00	-26.76	QP	
9	0.990	13.19	9.71	22.90	46.00	-23.10	Average	
10	0.990	20.33	9.71	30.04	56.00	-25.96	QP	
11	1.630	12.04	9.73	21.77	46.00	-24.23	Average	
12	1.630	18.50	9.73	28.23	56.00	-27.77	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Radiated Emission


Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	

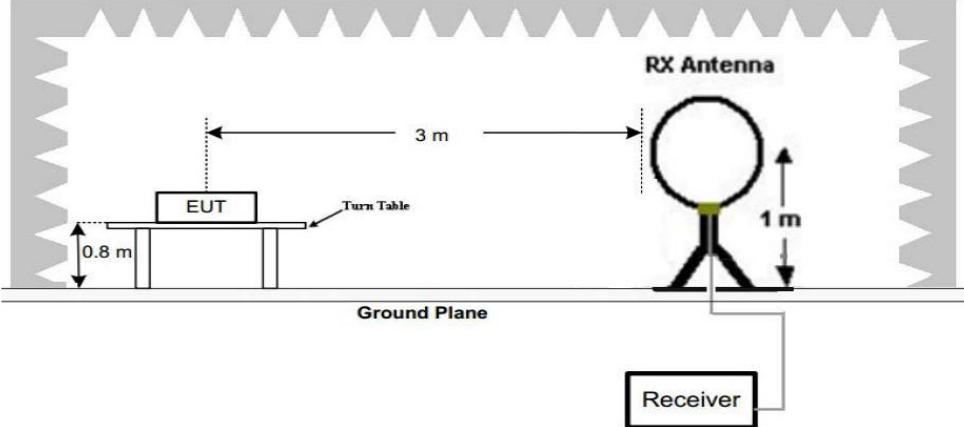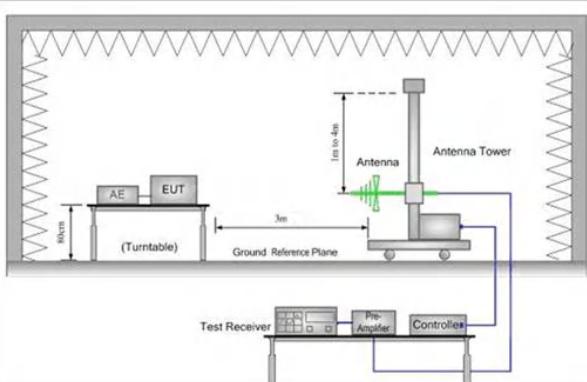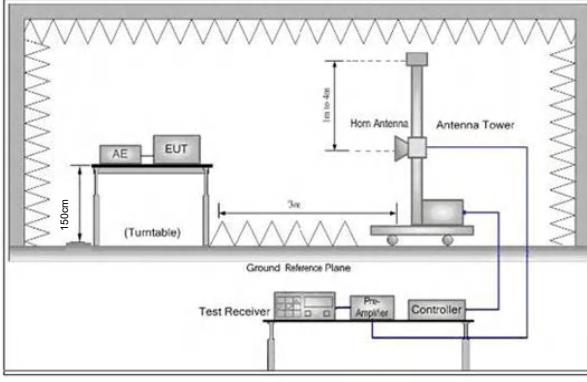Test Setup:	
	<p>Figure 1. Below 30MHz</p>  
Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table</p>

	<p>was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <ul style="list-style-type: none">e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. Test the EUT in the lowest channel, the middle channel, the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data
30MHz~1GHz

Test mode:	Transmitting	Vertical
------------	--------------	----------

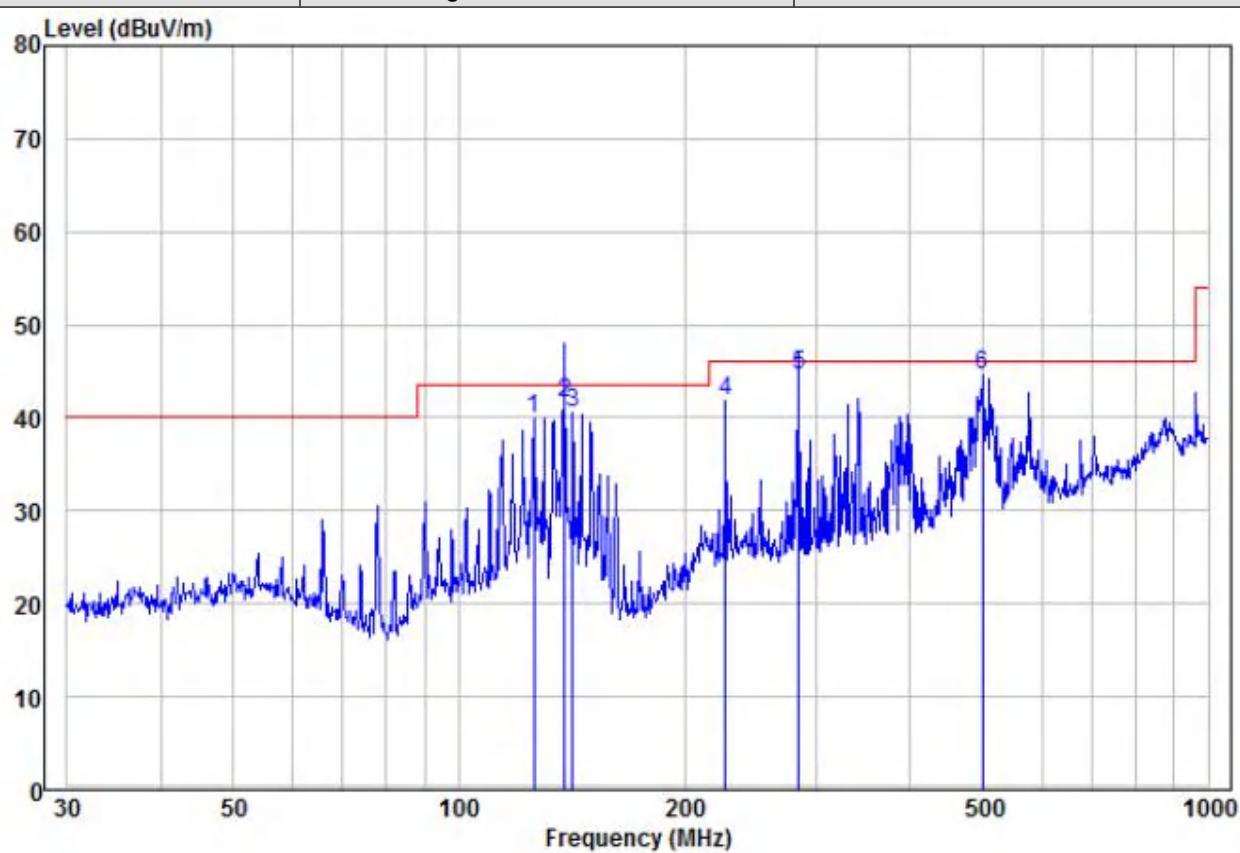

Freq	Read			Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos	
	Freq	Level	Factor							
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB				
1 pk	125.89	29.51	10.49	40.00	43.50	-3.50	Peak	VERTICAL	100	46
2	138.39	32.00	9.62	41.62	43.50	-1.88	QP	VERTICAL	100	59
3	141.83	30.93	9.60	40.53	43.50	-2.97	QP	VERTICAL	100	118
4	226.89	27.36	14.43	41.79	46.00	-4.21	Peak	VERTICAL	100	163
5 pp	283.98	27.30	17.32	44.62	46.00	-1.38	QP	VERTICAL	100	282
6	499.42	22.69	21.81	44.50	46.00	-1.50	QP	VERTICAL	100	308

Test mode:	Transmitting	Horizontal
------------	--------------	------------

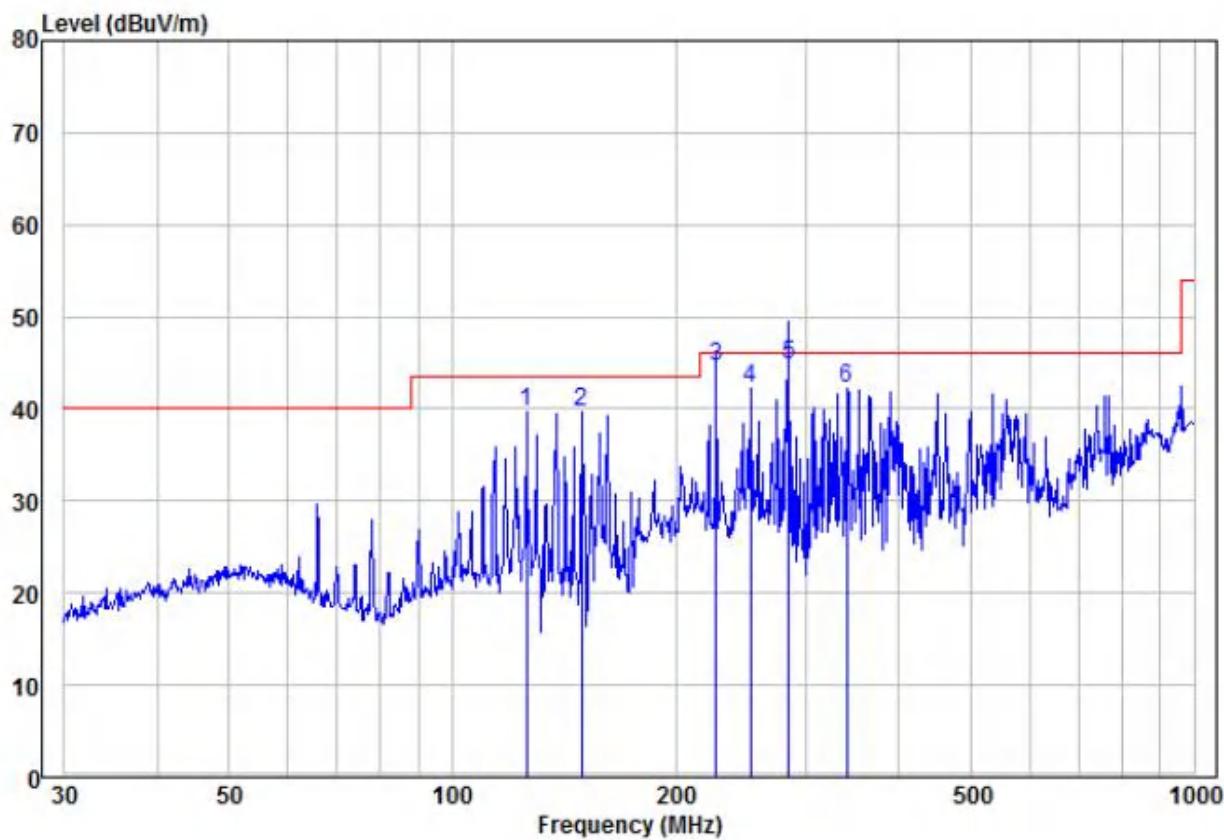

Freq	Read			Limit Level	Over Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	125.89	29.20	10.49	39.69	43.50	-3.81	Peak	HORIZONTAL	100	73
2	149.49	29.90	9.81	39.71	43.50	-3.79	Peak	HORIZONTAL	100	86
3	226.89	30.11	14.43	44.54	46.00	-1.46	QP	HORIZONTAL	100	153
4 pk	252.06	25.85	16.43	42.28	46.00	-3.72	Peak	HORIZONTAL	100	99
5 pp	283.98	27.40	17.32	44.72	46.00	-1.28	QP	HORIZONTAL	100	125
6	340.78	23.36	18.77	42.13	46.00	-3.87	Peak	HORIZONTAL	100	201

Above 1GHz									
Test mode:		Transmitting		Test channel:		Lowest			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant Pol	Antenna Height	Table Angle
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V	(m)	(Degree)
2390	59.78	-9.2	50.58	74	-23.42	Peak	H	1.5	212
2390	45.20	-9.2	36.00	54	-18.00	AVG	H	1.5	125
2400	44.67	-9.39	35.28	74	-38.72	Peak	H	1.5	277
2400	43.82	-9.39	34.43	54	-19.57	AVG	H	1.5	115
2410.001	100.79	-9.33	91.46	114	-22.54	peak	H	1.5	241
2410.001	95.68	-9.33	86.35	94	-7.65	AVG	H	1.5	322
4820.002	56.10	-4.28	51.82	74	-22.18	peak	H	1.5	356
4820.002	43.24	-4.28	38.96	54	-15.04	AVG	H	1.5	178
7230.003	51.02	1.13	52.15	74	-21.85	peak	H	1.5	213
7230.003	36.55	1.13	37.68	54	-16.32	AVG	H	1.5	88
2390	61.78	-9.2	52.58	74	-21.42	peak	V	1.5	12
2390	43.75	-9.2	34.55	54	-19.45	AVG	V	1.5	334
2400	61.57	-9.39	52.18	74	-21.82	peak	V	1.5	46
2400	44.58	-9.39	35.19	54	-18.81	AVG	V	1.5	18
2410.001	96.62	-9.33	87.29	114	-26.71	peak	V	1.5	270
2410.001	91.51	-9.33	82.18	94	-11.82	AVG	V	1.5	83
4820.002	55.68	-4.28	51.40	74	-22.60	peak	V	1.5	183
4820.002	42.75	-4.28	38.47	54	-15.53	AVG	V	1.5	200
7230.003	50.90	1.13	52.03	74	-21.97	peak	V	1.5	231
7230.003	38.30	1.13	39.43	54	-14.57	AVG	V	1.5	27


Test mode:		Transmitting		Test channel:		Middle			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over (dB)	Detector Type	Ant . Pol. H/V	Antenna Height (m)	Table Angle (Degree)
							H	1.5	322
2441.501	100.06	-9.37	90.69	114	-23.31	peak	H	1.5	322
2441.501	98.19	-9.37	88.82	94	-5.18	AVG	H	1.5	331
4883.002	56.01	-4.14	51.87	74	-22.13	peak	H	1.5	208
4883.002	42.62	-4.14	38.48	54	-15.52	AVG	H	1.5	99
7324.503	51.62	0.56	52.18	74	-21.82	peak	H	1.5	209
7324.503	36.80	0.56	37.36	54	-16.64	AVG	H	1.5	130
2441.501	96.34	-9.36	86.98	114	-27.02	peak	V	1.5	79
2441.501	93.44	-9.36	84.08	94	-9.92	AVG	V	1.5	314
4883.002	55.00	-4.14	50.86	74	-23.14	peak	V	1.5	67
4883.002	41.32	-4.14	37.18	54	-16.82	AVG	V	1.5	129
7324.503	50.71	0.56	51.27	74	-22.73	peak	V	1.5	226
7324.503	36.85	0.56	37.41	54	-16.59	AVG	V	1.5	353

Test mode:		Transmitting		Test channel:		Highest			
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over (dB)	Detector Type	Ant Pol	Antenna Height (m)	Table Angle (Degree)
							H/ V	(m)	
2473.001	100.04	-9.23	90.81	114	-23.19	peak	H	1.5	154
2473.001	97.25	-9.23	88.02	94	-5.98	AVG	H	1.5	241
2483.5	60.71	-9.29	51.42	74	-22.58	Peak	H	1.5	239
2483.5	43.93	-9.29	34.64	54	-19.36	AVG	H	1.5	287
4946.002	55.16	-4.03	51.13	74	-22.87	peak	H	1.5	250
4946.002	42.55	-4.03	38.52	54	-15.48	AVG	H	1.5	259
7419.003	53.06	1.68	54.74	74	-19.26	peak	H	1.5	112
7419.003	38.65	1.68	40.33	54	-13.67	AVG	H	1.5	20
2473.001	97.09	-9.23	87.86	114	-26.14	peak	V	1.5	163
2473.001	93.66	-9.23	84.43	94	-9.57	AVG	V	1.5	182
2483.5	60.26	-9.29	50.97	74	-23.03	peak	V	1.5	277
2483.5	45.40	-9.29	36.11	54	-17.89	AVG	V	1.5	145
4946.002	57.00	-4.03	52.97	74	-21.03	peak	V	1.5	34
4946.002	43.12	-4.03	39.09	54	-14.91	AVG	V	1.5	4
7419.003	50.94	1.68	52.62	74	-21.38	peak	V	1.5	179
7419.003	37.65	1.68	39.33	54	-14.67	AVG	V	1.5	137

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 10GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

5.4 20dB Bandwidth

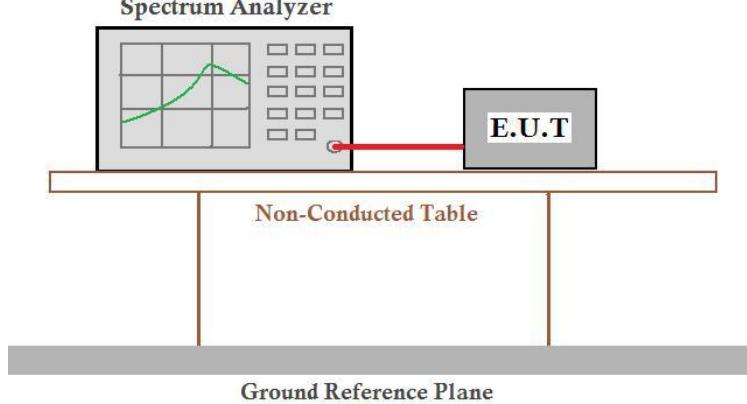
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Mode:	Transmitting with GFSK modulation.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	4.439	Pass
Middle	4.423	Pass
Highest	4.407	Pass


Test plot as follows:

Test channel:	Lowest
---------------	--------

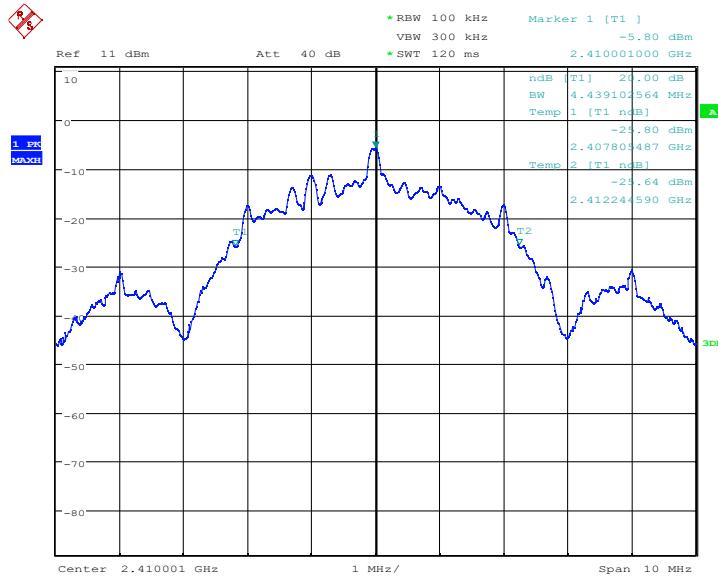


Date: 29.JUL.2025 12:01:48

Test channel:	Middle
---------------	--------

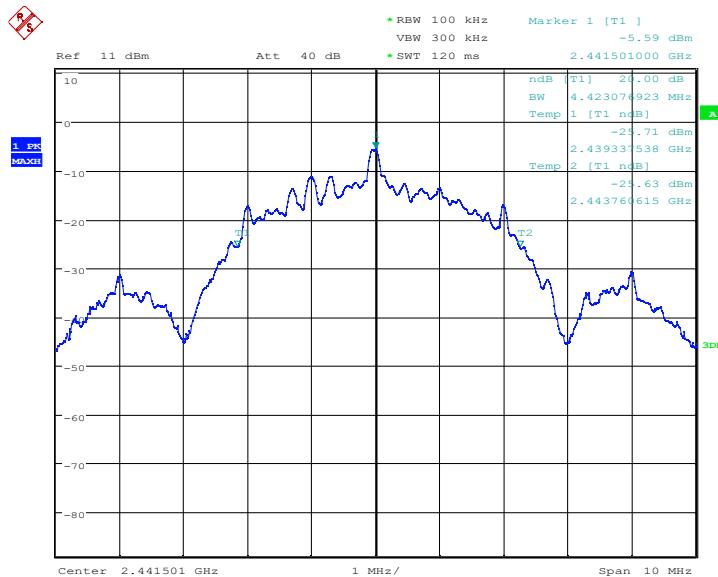

Date: 29.JUL.2025 12:02:56

Test channel:	Highest
---------------	---------

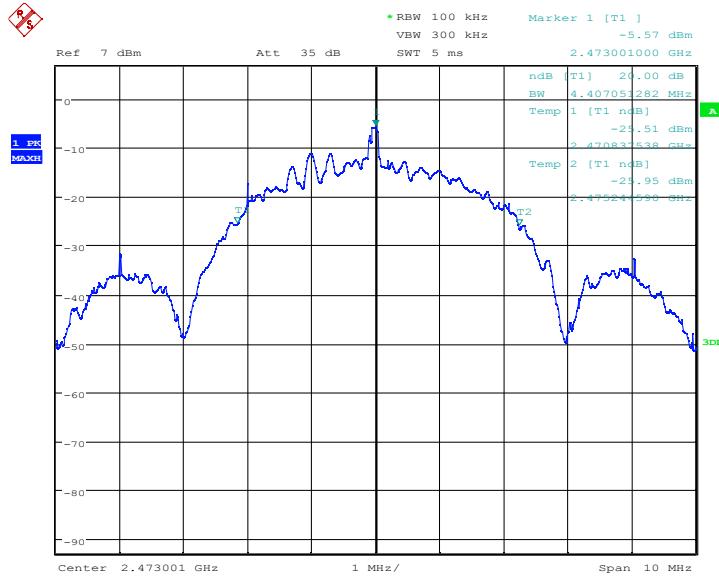

Date: 30.JUL.2025 09:51:59

6 Photographs

6.1 Radiated Emission Test Setup

9kHz~30MHz



30MHz~1GHz:



Above 1GHz:



6.2 Conducted Emission Test Setup






6.3 EUT Constructional Details










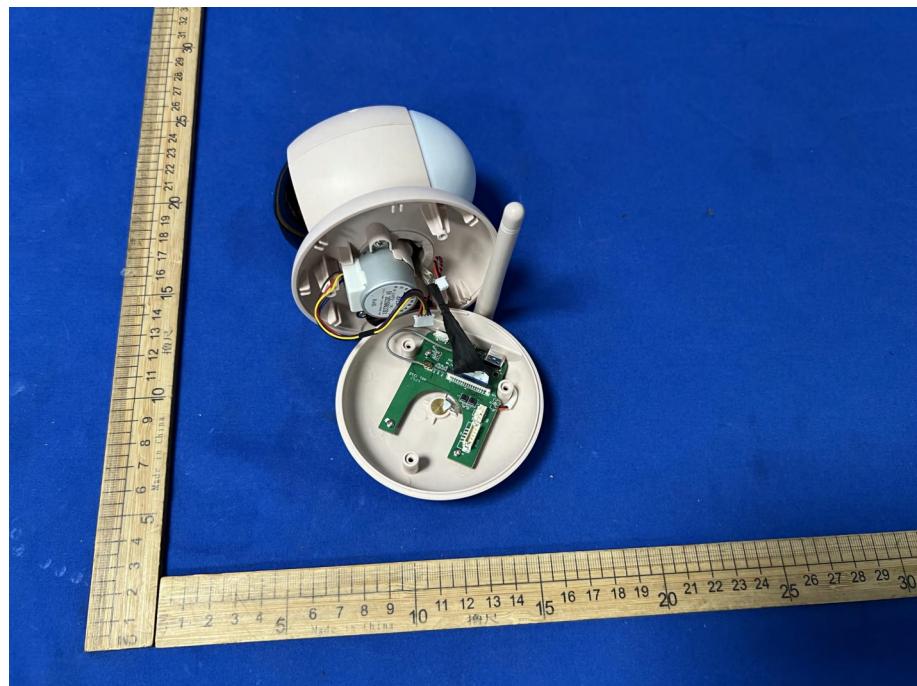

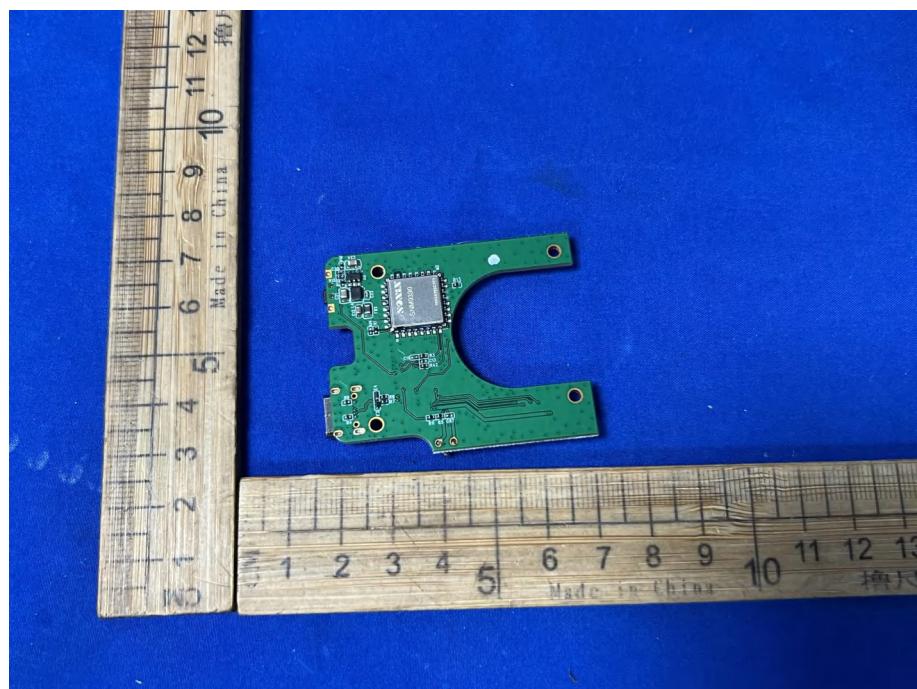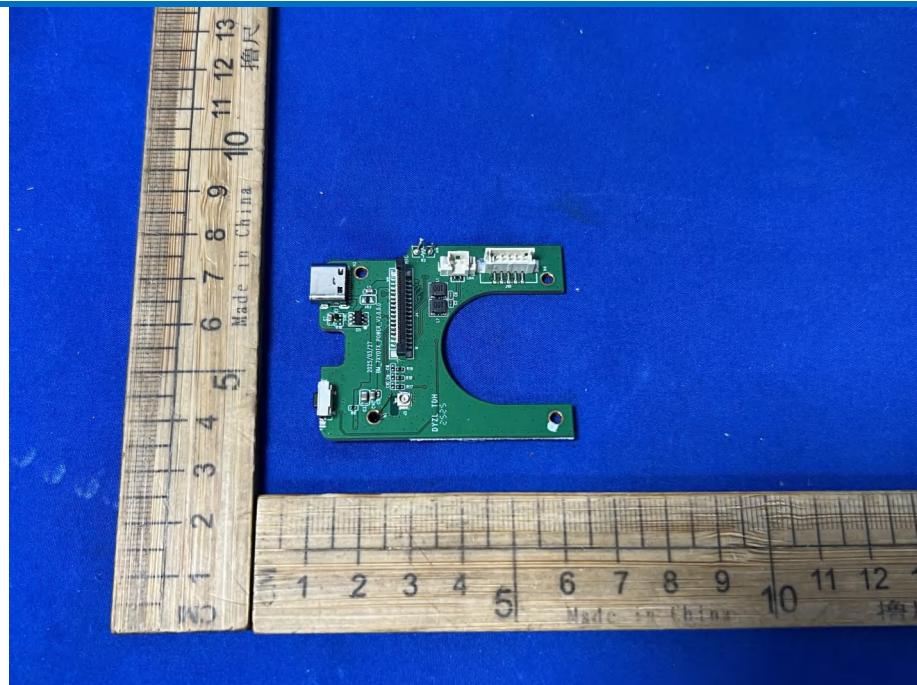

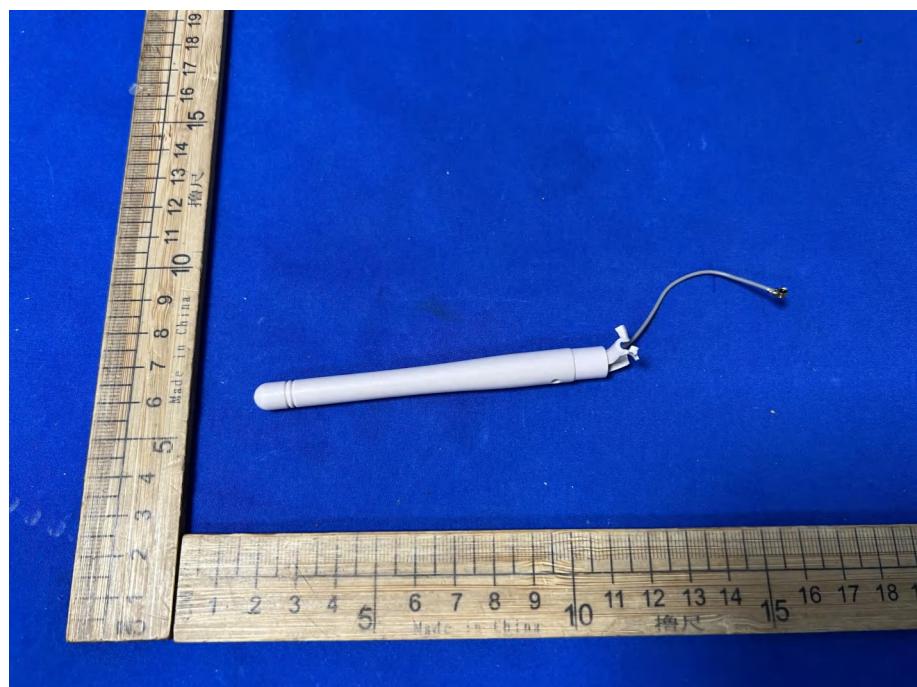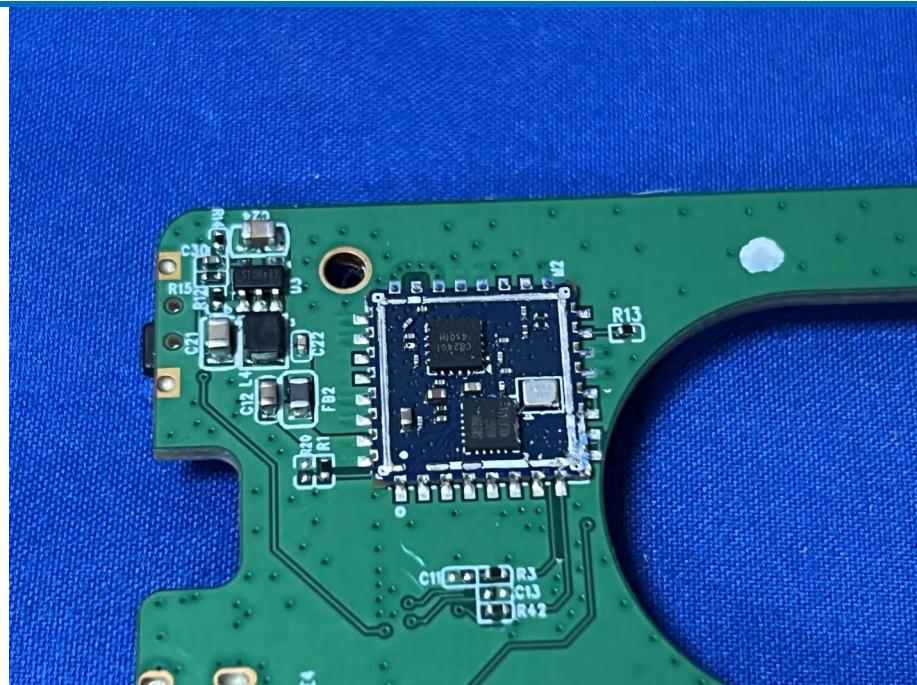

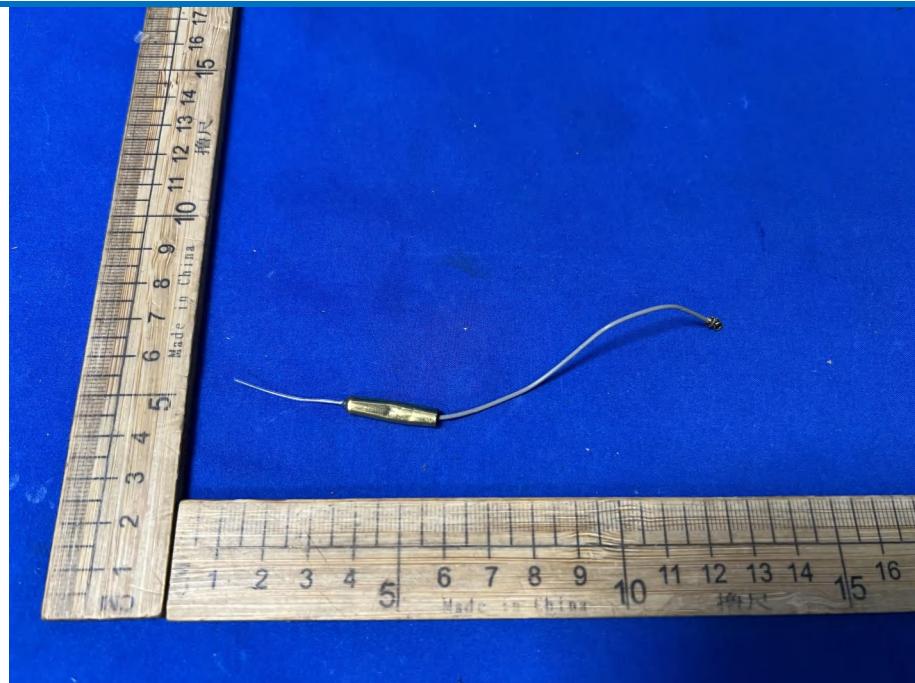

*** END OF REPORT ***