

FCC and ISED Canada Testing of the

Unikey Technologies, Inc.
SR3-UK


In accordance with FCC 47 CFR part 15.247 and
ISED Canada's Radio Standards Specifications
RSS-247

Prepared for: Unikey Technologies, Inc.
111 W Jefferson St. STE 100
Orlando, FL 32801

FCC ID: 2ANJI-SR3
IC: 10727A-SR3

COMMERCIAL-IN-CONFIDENCE

Document Number: TP72151666.100 | Version Number: 01

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Authorized Signatory	Peter Walsh	2019 -September-18	
Testing	Thierry Jean-Charles	2019-September-18	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

FCC Accreditation Designation Number US1063 Tampa, FL Test Laboratory	Innovation, Science, and Economic Development Canada Accreditation Site Number 2087A-2 Tampa, FL Test Laboratory
--	--

EXECUTIVE SUMMARY

Samples of this product were tested and found to be in compliance with 15.247 and ISED Canada's RSS-247.

 A2LA Cert. No. 2955.15	DISCLAIMER AND COPYRIGHT This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America. © TÜV SÜD.
	DISCLAIMER AND COPYRIGHT Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation. Results of test not covered by our A2LA Accreditation Schedule are marked NUA (Not A2LA Accredited).

TÜV SÜD America
5610 West Sligh Ave., Suite 100
Tampa, FL 33634

Phone: 813-284-2715
www.tuv-sud-america.com



America

Add value.
Inspire trust.

TÜV SÜD

TÜV®



Contents

1	Report Summary	2
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results	4
1.4	Product Information	5
1.5	Deviations from the Standard.....	7
1.6	EUT Modification Record	8
1.7	Test Location	8
2	Test Details	9
2.1	Antenna Requirements.....	9
2.2	6 dB Bandwidth	10
2.3	99% Bandwidth	13
2.4	Peak Output Power	16
2.5	Band-Edge Compliance of RF Conducted Emissions	19
2.6	RF Conducted Spurious Emissions	22
2.7	Radiated Spurious Emissions into Restricted Frequency Bands.....	27
2.8	Power Spectral Density.....	35
2.9	Power Line Conducted Emissions	38
3	Test Equipment Information	42
3.1	General Test Equipment Used	42
4	Diagram of Test Set-ups.....	43
5	Measurement Uncertainty	46
6	Accreditation, Disclaimers and Copyright.....	47



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	2019-September-18

1.2 Introduction

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.247 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein.



Applicant	Unikey Technologies, Inc.
Manufacturer	Unikey Technologies, Inc.
Applicant's Email Address	allen@unikey.com
Model Number(s)	SR3-UK
Serial Number(s)	4
FCC ID	2ANJI-SR3
ISED Certification Number	10727A-SR3
Hardware Version(s)	SR3-UK-BOM-0001r4
Software Version(s)	1.8.31
Number of Samples Tested	1
Test Specification/Issue/Date	US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2018 Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-247 — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 2, February 2017
Test Plan/Issue/Date	2019-April-23
Order Number	72151666
Date	2019-July-23
Date of Receipt of EUT	2019-July-29
Start of Test	2019-July-29
Finish of Test	2019-August-24
Name of Engineer(s)	Thierry Jean-Charles
Related Document(s)	ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2018. FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules. Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN - General Requirements for Compliance of Radio Apparatus, Issue 5, Amendment 1, March 2019.



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC Part 15.247 and ISED Canada's RSS-247 is shown below.

Table 1.3-1: Test Result Summary

Test Parameter	Test Plan (Yes/No)	Test Result	FCC 47 CFR Rule Part	ISED Canada's RSS	Test Report Page No
Antenna Requirement	Yes	Pass	15.203, 15.204	-----	9
6 dB Bandwidth	Yes	Pass	15.247(a)(2)	RSS-247 5.2(a)	10
99% Bandwidth	Yes	Pass	-----	RSS-GEN 6.7	13
Peak Output Power	Yes	Pass	15.247(b)(3)	RSS-247 5.4(d)	16
Band-Edge Compliance of RF Conducted Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	19
RF Conducted Spurious Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	22
Radiated Spurious Emissions into Restricted Frequency Bands	Yes	Pass	15.205, 15.209	RSS-GEN 8.9, 8.10	27
Power Spectral Density	Yes	Pass	15.247(e)	RSS-247 5.2(b)	35
Power Line Conducted Emissions	Yes	Pass	15.207	RSS-GEN 8.8	38



1.4 Product Information

1.4.1 Technical Description

The EUT is a mobile enabled PACS Access control reader. The device includes a 2.4 GHz Bluetooth Low Energy (BLE) transceiver as well as 125 kHz RFID. The test report covers the compliance of the BLE radio.

Technical Details

Mode of Operation: IEEE 802.15.1 Bluetooth Low Energy (BLE)
Frequency Range: 2402 - 2480 MHz
Number of Channels: 40
Channel Separation: 2 MHz
Data Rate: 1 Mbps
Modulations: GFSK
Antenna Type/Gain: Patch Antenna / 3.5 dBi
Input Power: 12 VDC

A full description and detailed product specification details are available from the manufacturer.

Table 1.4.1-1 – Cable Descriptions

Cable/Port	Description
Data Cable	6 leads, 10 m, Not Shielded, EUT to Access Controller
Power Leads	0.7 m, Not Shielded, Power Supply to Access Controller

Table 1.4.1-2 – Support Equipment Descriptions

Make/Model	Description
Linear/Emerge e3 Series	Remote Access Controller, SN: 620-100954B2184900031
Linear/PIP12VDC60W	12 VDC Power Supply



Declaration of Build Status

Declaration of Build Status

EQUIPMENT DESCRIPTION	
Model Name/Number	SR3-UK
Part Number	SR3-UK-0001-R1
Hardware Version	SR3-UK-BOM-0001r4
Software Version	1.8.31
FCC ID (if applicable)	2ANJ1-SR3
ISED ID (if applicable)	10727A- SR3
Technical Description (Please provide a brief description of the intended use of the equipment)	Mobile enabled PACS Access control reader.

UN-INTENTIONAL RADIATOR	
Highest frequency generated or used in the device or on which the device operates or tunes	2.480 GHz
Lowest frequency generated or used in the device or on which the device operates or tunes	2.402GHz (low ch BLE). 125kHz prox card
Class A Digital Device (Use in commercial, industrial or business environment) ☐	
Class B Digital Device (Use in residential environment only) ☒	

Power Source			
AC	Single Phase	Three Phase	Nominal Voltage
	☒	☐	N/A
External DC	Nominal Voltage		Maximum Current
	12v		300mA
Battery	Nominal Voltage		Battery Operating End Point Voltage
	N/A		N/A

EXTREME CONDITIONS			
Maximum temperature	+50 °C	Minimum temperature	-40 °C

Ancillaries	
Please list all ancillaries which will be used with the device.	
PACS access controller	

I hereby declare that the information supplied is correct and complete.

Name: Anders Johansson

Position held: Hardware Lead

Date: Aug 19, 2019



1.4.2 Modes of Operation

Both the BLE and 125 kHz transmitters were active during the evaluation. The EUT was set to a TX output power setting of 5 during the evaluation.

1.4.3 Monitoring of Performance

The radiated emissions evaluation was performed on the EUT connected to an access controller which was set outside of the testing environment. The EUT was tested in the orientation of typical installation.

The RF conducted measurements were performed through the u. FL. connector on the EUT PCB.

The power line conducted emissions measurements were performed on the power supply of the remote access controller through which the EUT was powered.

1.4.4 Performance Criteria

The report documents the compliance of the BLE radio with the FCC Section 15.247 and ISED Canada RSS-247 requirements. The 125 kHz transmitter was active during the evaluation. No intermodulation product from the co-located radios transmitting at the same time could be observed during the evaluation. A summary of the parameters that were evaluated is provided below.

Table 1.4.4 -1: Performance Criteria

Parameter	Requirement
Antenna Requirement	FCC: Section 15.203. 15.204
6 dB Bandwidth	FCC: Section 15.247(a)(2); ISED Canada: RSS-247 5.2(a)
99% Bandwidth	ISED Canada: RSS-GEN 6.7
Peak Output Power	FCC: Section 15.247(b)(3); ISED Canada:RSS-247 5.4(d)
Band-Edge Compliance of RF Conducted Emissions	FCC: Section 15.247(d); ISED Canada: RSS-247 5.5
RF Conducted Spurious Emissions	FCC: Section 15.247(d); ISED Canada: RSS-247 5.5
Radiated Spurious Emissions into Restricted Frequency Bands	FCC: Sections 15.205, 15.209; ISED Canada: RSS-GEN 8.9, 8.10
Power Spectral Density	FCC: Section 15.247(e); ISED Canada: RSS-247(b)
Power Line Conducted Emissions	FCC: Section 15.207; ISED Canada: RSS-GEN 8.8

1.5 Deviations from the Standard

The EUT was evaluated without any deviation from the test standards.



1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
LC filter values	C19, C21 = 3.9 nH C46, C97 = 1.5 PF	Unikey	8/8/2019
DC Blocking	C19 = 47 pF	Unikey	8/8/2019

The equipment was tested with the modifications listed above to meet the test requirements.

The DC blocking was implemented to resolve an anomaly at the RF switch when the EUT RF port was connected to a spectrum analyzer for the RF conducted measurements.

1.7 Test Location

TÜV SÜD Product Service conducted the following tests at our Tampa FL Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
AC Powered Operating		
Antenna Requirement		A2LA
6 dB Bandwidth	Thierry Jean-Charles	A2LA
99% Bandwidth	Thierry Jean-Charles	A2LA
Peak Output Power	Thierry Jean-Charles	A2LA
Band-Edge Compliance of RF Conducted Emissions	Thierry Jean-Charles	A2LA
RF Conducted Spurious Emissions	Thierry Jean-Charles	A2LA
Radiated Spurious Emissions into Restricted Frequency Bands	Thierry Jean-Charles	A2LA
Power Spectral Density	Thierry Jean-Charles	A2LA
Power Line Conducted Emissions	Thierry Jean-Charles	A2LA

Office Address:

TÜV SÜD America, Inc.
5610 W. Sligh Ave, Suite 100
Tampa, FL 33634
USA



2 Test Details

2.1 Antenna Requirements

2.1.1 Specification Reference

FCC: Section 15.203, 15.204

2.1.2 Equipment Under Test and Modification State

SN: 4

2.1.3 Date of Test

7/29/2019

2.1.4 Test Method

N/A

2.1.5 Environmental Conditions

Ambient Temperature	N/A
Relative Humidity	N/A
Atmospheric Pressure	N/A

2.1.6 Test Results

Limit Clause FCC Sections: 15.203, 15.204

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT uses an integral 3.5 dBi patch antenna that is directly soldered to the PCB. The antenna is not removable and thus meets the requirements of FCC Section 15.203 and 15.204.

2.1.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

As this is a visual inspection, no test equipment was used.



2.2 6 dB Bandwidth

2.2.1 Specification Reference

FCC: Section 15.247(a)(2)
ISED Canada: RSS-247 5.2(a)

2.2.2 Equipment Under Test and Modification State

SN: 4

2.2.3 Date of Test

8/14/2019

2.2.4 Test Method

The 6dB bandwidth was measured in accordance with ANSI C63.10 Subclause 11.8.1 Option 1. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. Span was set large enough to capture the emissions and >> RBW. A peak detector was used for the measurements.

2.2.5 Environmental Conditions

Ambient Temperature 24.4°C
Relative Humidity 43.7 %
Atmospheric Pressure 1015 mbar

2.2.6 Test Results


AC Powered Operating

Limit Clause FCC Part 15.247(a)(2), ISED RSS-247 5.2(a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


Table 2.2.6-1: 6 dB Bandwidth Test Results

Frequency (MHz)	6 dB Bandwidth (kHz)
2402	724.8750
2440	731.2500
2480	731.4375

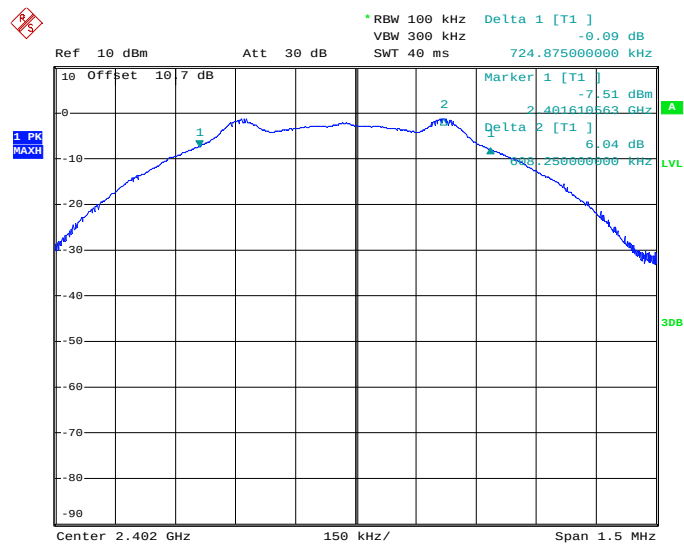


Date: 14.AUG.2019 09:49:56

Figure 2.2.6-1: 6 dB Bandwidth – Low Channel

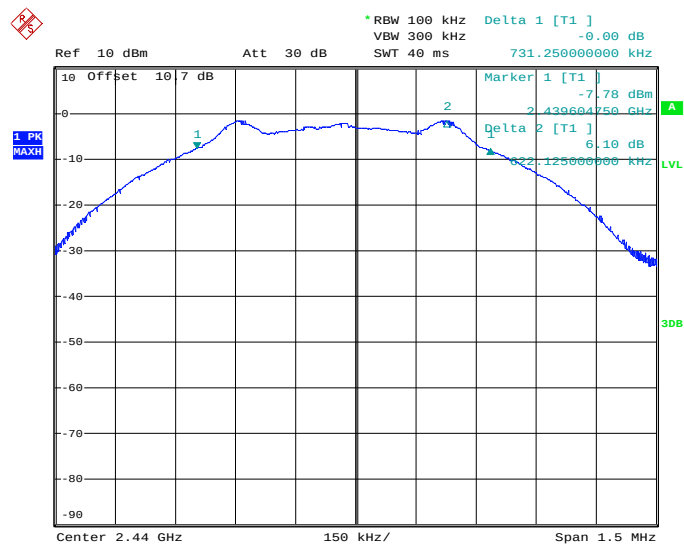

Date: 14.AUG.2019 10:39:18

Figure 2.2.6-2: 6 dB Bandwidth – Middle Channel

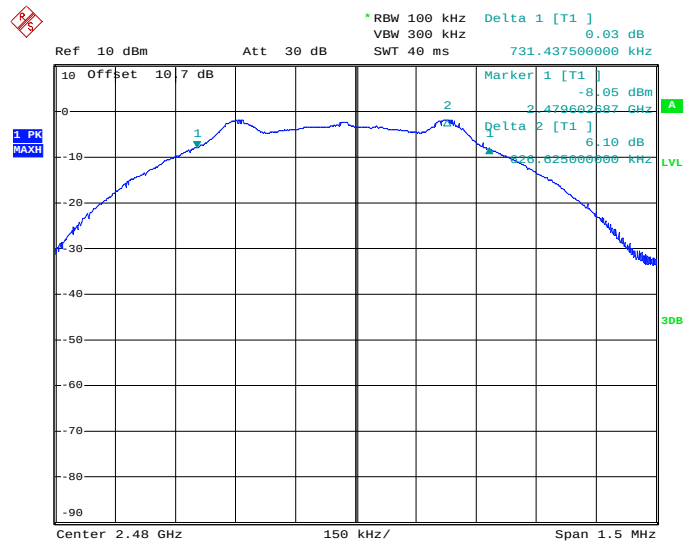

Date: 14.AUG.2019 11:12:45

Figure 2.2.6-3: 6 dB Bandwidth – High Channel

2.2.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	N/A	24	28-Nov-19
Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-10	BEMC02110	N/A	12	27-Jul-20

TU - Traceability Unscheduled
O/P MON - Traceability Unscheduled
N/A - Not Applicable



2.3 99% Bandwidth

2.3.1 Specification Reference

ISED Canada: RSS-GEN 6.7

2.3.2 Equipment Under Test and Modification State

SN: 4

2.3.3 Date of Test

8/14/2019

2.3.4 Test Method

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission. The RBW was set to 1% to 5% of the approximated bandwidth. The occupied 99% bandwidth was measured by using 99% bandwidth equipment function of the spectrum analyzer using a peak detector.

2.3.5 Environmental Conditions

Ambient Temperature 24.4°C
Relative Humidity 43.7 %
Atmospheric Pressure 1015 mbar


2.3.6 Test Results

DC Powered Operating

Limit Clause ISED RSS-GEN 6.7


Table 2.3.6-1: 99% Bandwidth Test Results

Frequency (MHz)	99% Bandwidth (kHz)
2402	1063.75
2440	1061.25
2480	1058.75

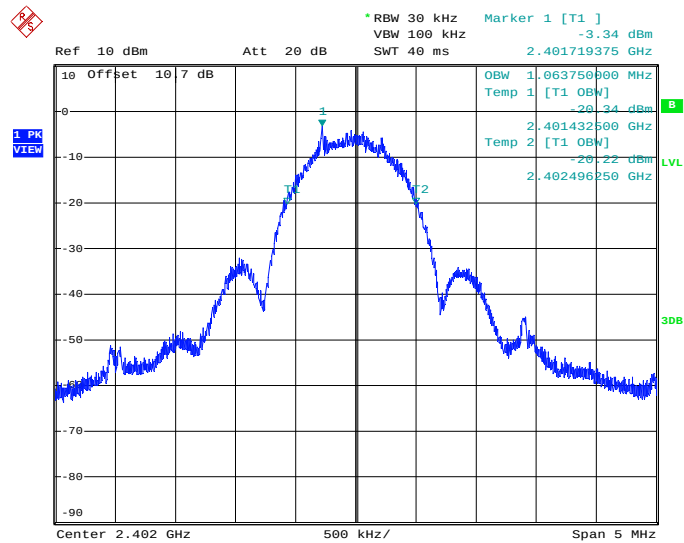


Date: 14.AUG.2019 09:54:24

Figure 2.3.6-1: 99% Bandwidth – Low Channel

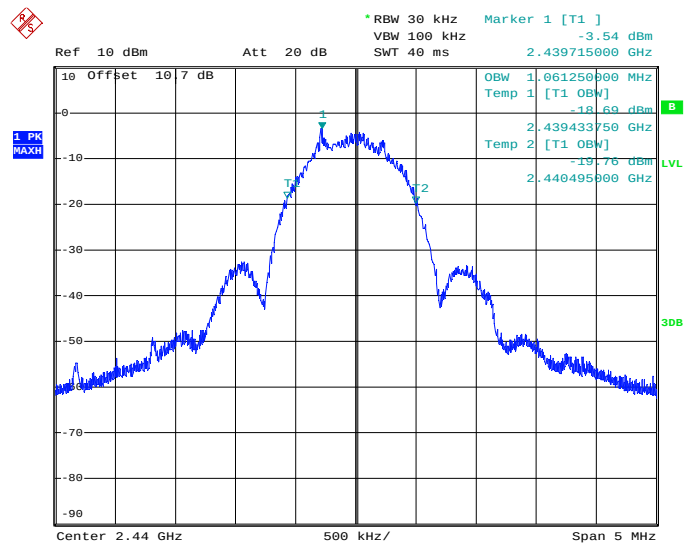

Date: 14.AUG.2019 10:35:16

Figure 2.3.6-2: 99% Bandwidth – Middle Channel

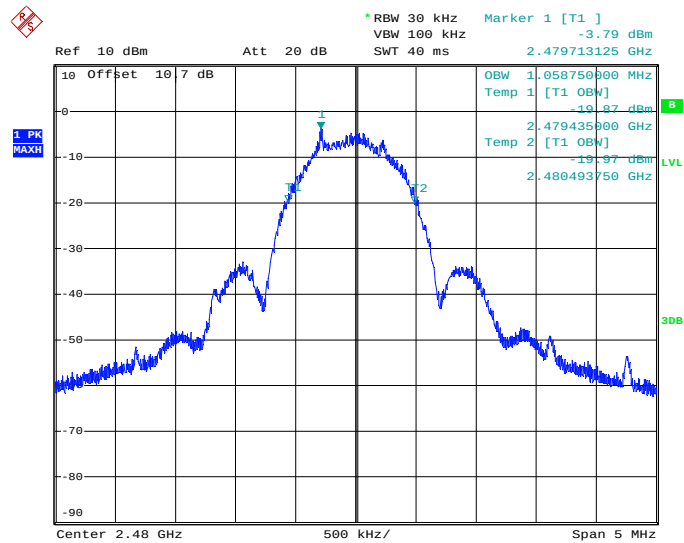

Date: 14.AUG.2019 11:09:07

Figure 2.3.6-3: 99% Bandwidth – High Channel

2.3.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	N/A	24	28-Nov-19
Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-10	BEMC02110	N/A	12	27-Jul-20

TU - Traceability Unscheduled
O/P MON - Traceability Unscheduled
N/A - Not Applicable



2.4 Peak Output Power

2.4.1 Specification Reference

FCC Section 15.247(b)(3)
ISED Canada: RSS-247 5.4(d)

2.4.2 Equipment Under Test and Modification State

SN: 4

2.4.3 Date of Test

8/14/2019

2.4.4 Test Method

The fundamental emission output power was measured in accordance with ANSI C63.10 Subclause 11.9.1.1 RBW $\geq$ DTS bandwidth. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer through suitable attenuation.

2.4.5 Environmental Conditions

Ambient Temperature 24.4°C
Relative Humidity 43.7 %
Atmospheric Pressure 1015 mbar

2.4.6 Test Results


AC Powered Operating

Limit Clause FCC Part 15.247(b)(3), ISED RSS-247 5.4(d)

The Maximum Output Power allowed for systems using digital modulation is 1 Watt (30 dBm)


Table 2.4.6-1: RF Output Power Test Results

Frequency (MHz)	Power (dBm)
2402	-1.05
2440	-1.26
2480	-1.54

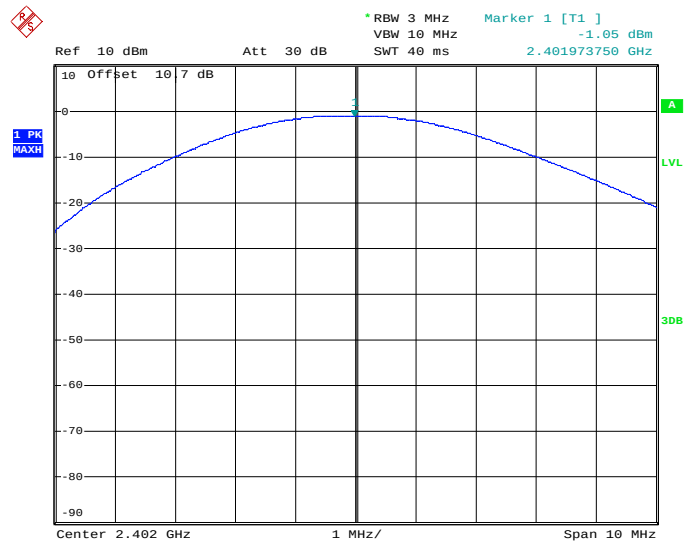


Date: 14.AUG.2019 10:02:38

Figure 2.4.6-1: RF Output Power – Low Channel

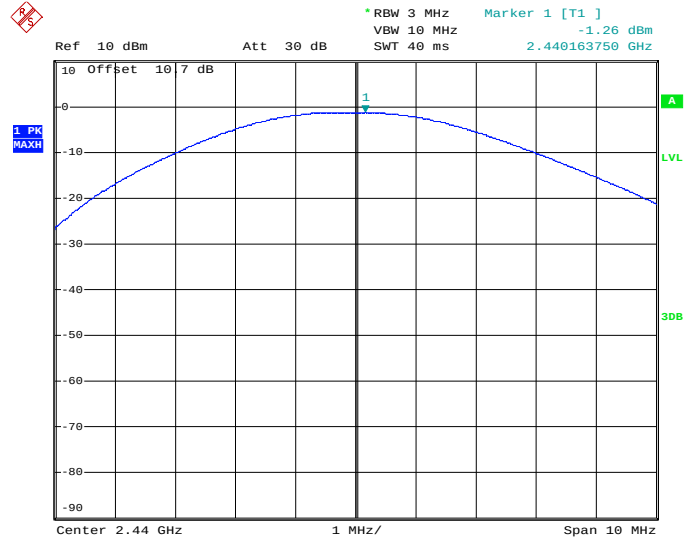

Date: 14.AUG.2019 10:56:49

Figure 2.4.6-2: RF Output Power – Middle Channel

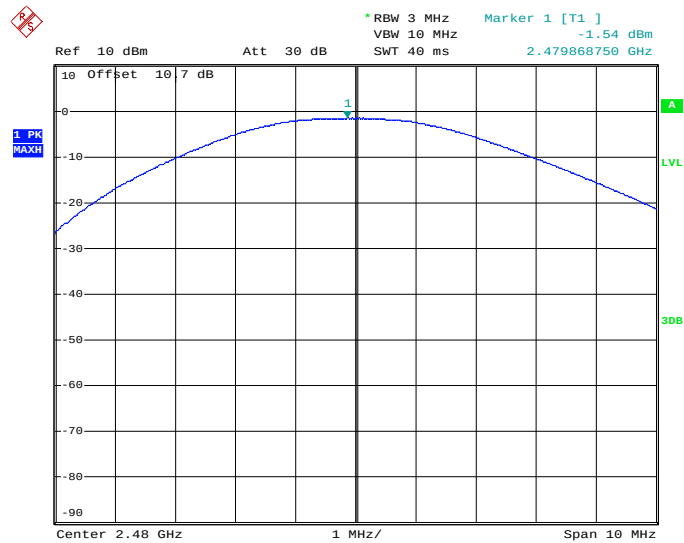

Date: 14.AUG.2019 11:19:45

Figure 2.4.6-3: RF Output Power – High Channel

2.4.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	N/A	24	28-Nov-19
Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-10	BEMC02110	N/A	12	27-Jul-20

TU - Traceability Unscheduled
O/P MON - Traceability Unscheduled
N/A - Not Applicable



2.5 Band-Edge Compliance of RF Conducted Emissions

2.5.1 Specification Reference

FCC: Section 15.247(d)
ISED Canada: RSS-247 5.5

2.5.2 Equipment Under Test and Modification State

SN: 4

2.5.3 Date of Test

8/14/2019

2.5.4 Test Method

The RF Conducted Emissions at the Band-Edges were measured in accordance with Subclause 11.11 of ANSI C63.10. The RF output port of the EUT was connected to the input of the spectrum analyzer through suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, and the VBW was set to ≥ 300 kHz.

2.5.5 Environmental Conditions


Ambient Temperature	24.4 °C
Relative Humidity	43.7 %
Atmospheric Pressure	1015 mbar

2.5.6 Test Results

AC Powered Operating


Limit Clause FCC Section 15.247(d), ISED Canada: RSS-247 5.5

In any 100 kHz bandwidth outside of the frequency band the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

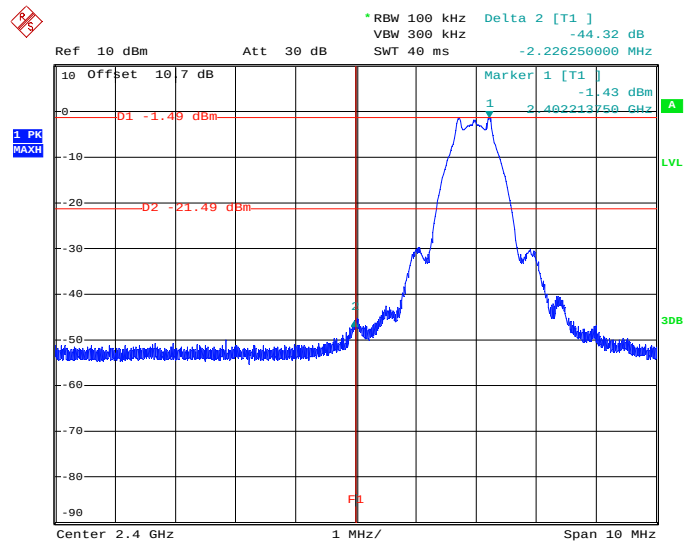

Date: 14.AUG.2019 10:07:57

Figure 2.5.6-1: Lower Band-Edge

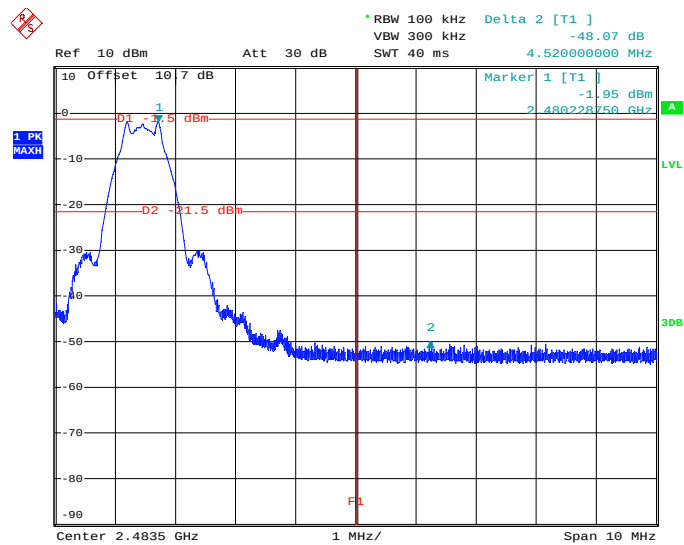

Date: 14.AUG.2019 11:23:39

Figure 2.5.6-2: Upper Band-Edge



2.5.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	N/A	24	28-Nov-19
Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-10	BEMC02110	N/A	12	27-Jul-20

TU - Traceability Unscheduled

O/P MON - Traceability Unscheduled

N/A - Not Applicable



2.6 RF Conducted Spurious Emissions

2.6.1 Specification Reference

FCC: Section 15.247(d)
ISED Canada: RSS-247 5.5

2.6.2 Equipment Under Test and Modification State

SN: 4

2.6.3 Date of Test

8/14/2019

2.6.4 Test Method

The RF Conducted Spurious Emissions were measured in accordance with Subclause 11.11 of ANSI C63.10. The RF output port of the equipment under test was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30 MHz to 25 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak Max Hold function of the analyzer was utilized.

2.6.5 Environmental Conditions


Ambient Temperature	24.4 °C
Relative Humidity	43.7 %
Atmospheric Pressure	1015 mbar

2.6.6 Test Results

AC Powered Operating


Limit Clause FCC Section 15.247(d), ISED Canada: RSS-247 5.5

In any 100 kHz bandwidth outside of the frequency band the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

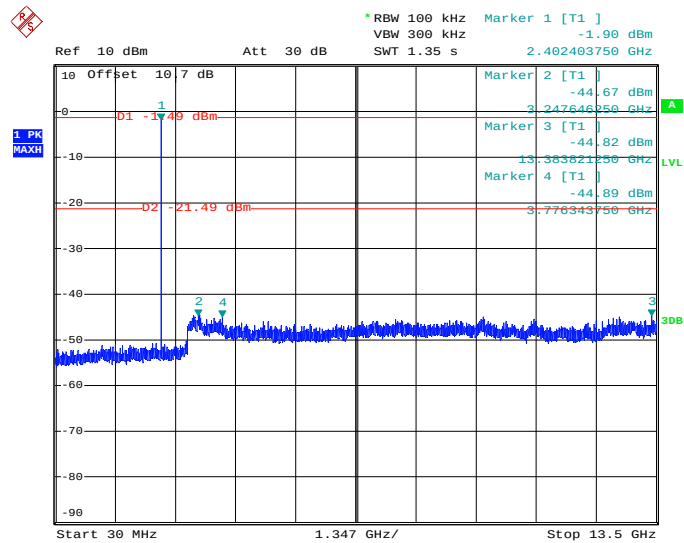


Date: 14.AUG.2019 10:12:44

Figure 2.6.6-1: 30 MHz - 13.5 GHz – Low Channel

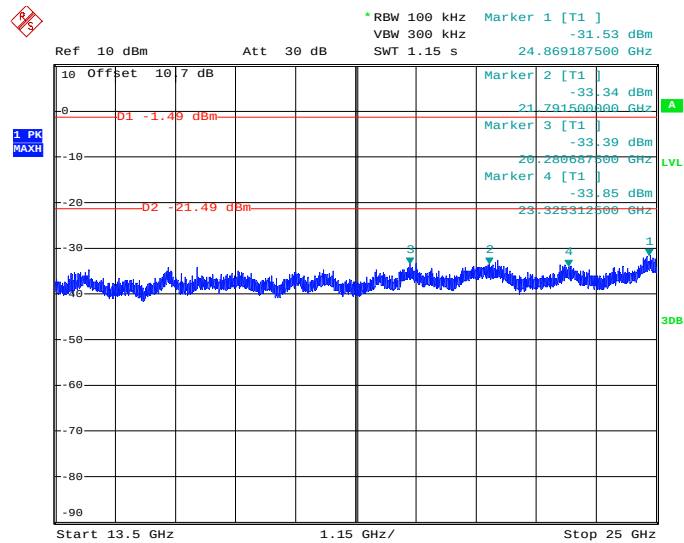


Date: 14.AUG.2019 10:14:29

Figure 2.6.6-2: 13.5 GHz - 25 GHz – Low Channel

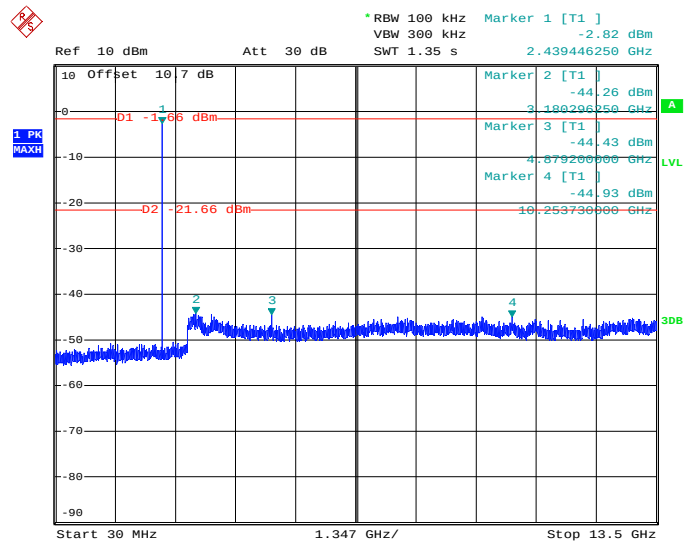


Date: 14.AUG.2019 11:01:53

Figure 2.6.6-3: 30 MHz - 13.5 GHz – Middle Channel

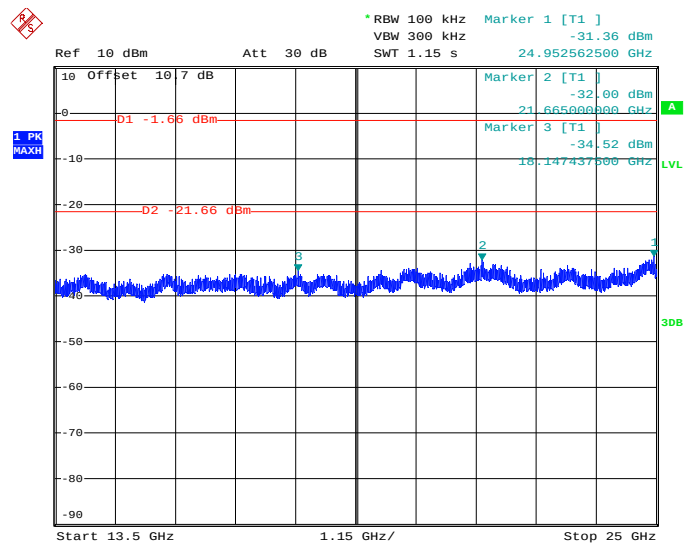


Date: 14.AUG.2019 11:03:27

Figure 2.6.6-4: 13.5 GHz - 25 GHz – Middle Channel

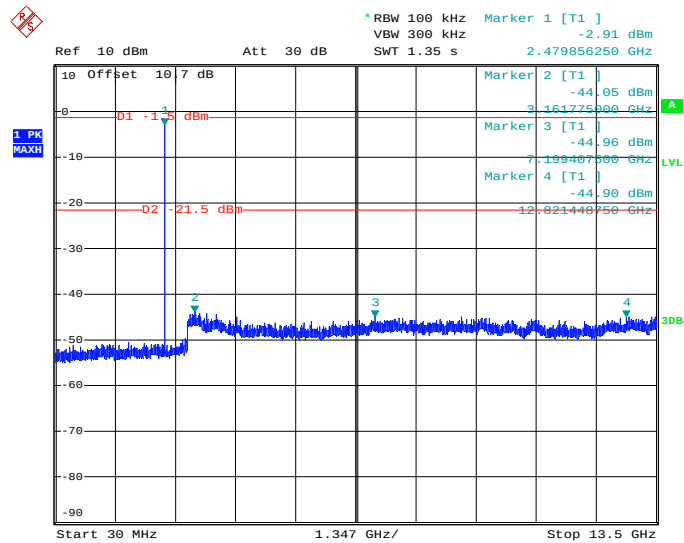

Date: 14.AUG.2019 11:33:29

Figure 2.6.6-5: 30 MHz - 13.5 GHz – High Channel

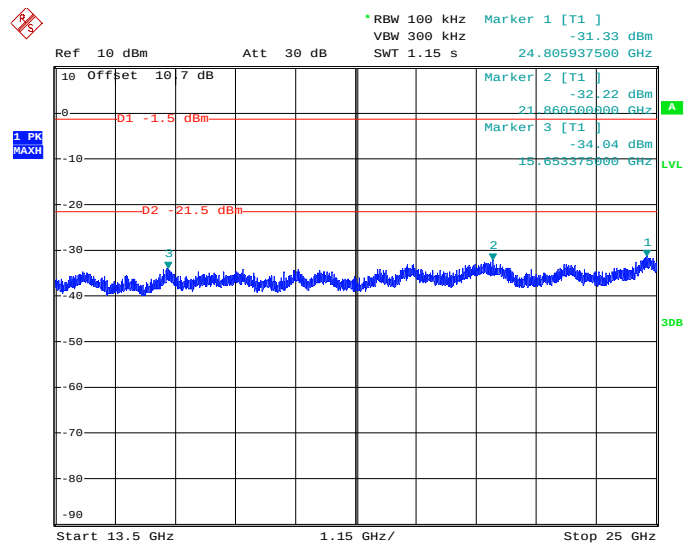

Date: 14.AUG.2019 11:41:08

Figure 2.6.6-6: 13.5 GHz - 25 GHz – High Channel



2.6.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	N/A	24	28-Nov-19
Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-10	BEMC02110	N/A	12	27-Jul-20

TU - Traceability Unscheduled

O/P MON - Traceability Unscheduled

N/A - Not Applicable



2.7 Radiated Spurious Emissions into Restricted Frequency Bands

2.7.1 Specification Reference

FCC Sections: 15.205, 15.209;
ISED Canada: RSS-GEN 8.9, 8.10

2.7.2 Equipment Under Test and Modification State

SN: 4

2.7.3 Date of Test

7/29/2019 to 8/16/2019

2.7.4 Test Method

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in Section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1 m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements are made with RBW of 1 MHz and VBW of 3 MHz. Average measurements are performed in the linear scale using VBW of 30 Hz.

2.7.5 Duty Cycle Correction

The EUT was configured to transmit at 100% duty cycle during the evaluation. No duty cycle correction factor was applied to the average measurements for the corrected average results.

2.7.6 Environmental Conditions

Ambient Temperature	23.6 °C
Relative Humidity	46 %
Atmospheric Pressure	1013.4 mbar



2.7.7 Test Results

AC Powered Operating

Limit Clause FCC Sections 15.205, 15.209, ISCED Canada: RSS-GEN 8.9, 8.10

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.4090-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

Table 2.7.7-1: TX Radiated Spurious Emissions Results

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
4804	51.27	45.95	H	4.10	55.37	50.05	74.0	54.0	18.6	3.9
4804	44.62	37.37	V	4.10	48.72	41.47	74.0	54.0	25.3	12.5
12010	38.57	26.86	H	17.95	56.52	44.81	74.0	54.0	17.5	9.2
12010	38.76	28.02	V	17.95	56.71	45.97	74.0	54.0	17.3	8.0
Middle Channel										
4880	50.26	44.77	H	4.26	54.52	49.03	74.0	54.0	19.5	5.0
4880	42.70	33.61	V	4.26	46.96	37.87	74.0	54.0	27.0	16.1
7320	46.89	39.77	H	9.25	56.14	49.02	74.0	54.0	17.9	5.0
7320	46.48	38.50	V	9.25	55.73	47.75	74.0	54.0	18.3	6.3
12200	39.98	29.41	H	17.73	57.71	47.14	74.0	54.0	16.3	6.9
12200	38.86	27.14	V	17.73	56.59	44.87	74.0	54.0	17.4	9.1
High Channel										
2483.5	52.60	41.54	H	-1.91	50.69	39.63	74.0	54.0	23.3	14.4
2483.5	53.24	42.72	V	-1.91	51.33	40.81	74.0	54.0	22.7	13.2
4960	46.81	40.25	H	4.43	51.24	44.68	74.0	54.0	22.8	9.3
4960	41.13	31.67	V	4.43	45.56	36.10	74.0	54.0	28.4	17.9
7440	45.06	36.22	H	9.42	54.48	45.64	74.0	54.0	19.5	8.4
7440	47.47	39.81	V	9.42	56.89	49.23	74.0	54.0	17.1	4.8
12400	38.37	26.73	H	17.50	55.87	44.23	74.0	54.0	18.1	9.8
12400	38.71	26.29	V	17.50	56.21	43.79	74.0	54.0	17.8	10.2

Notes: All emissions above 12.4 GHz were attenuated below the limits and the noise floor of the measurement equipment.

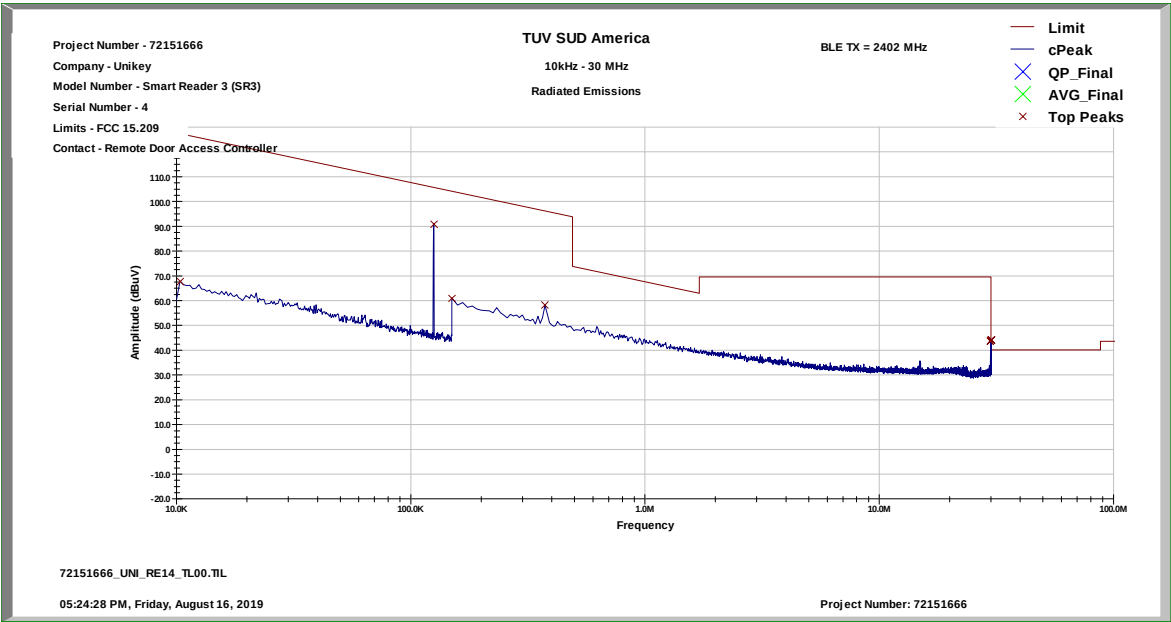


Figure 2.7.7-1: Worst Case Radiated Emissions Pre-Scan Plot below 30 MHz

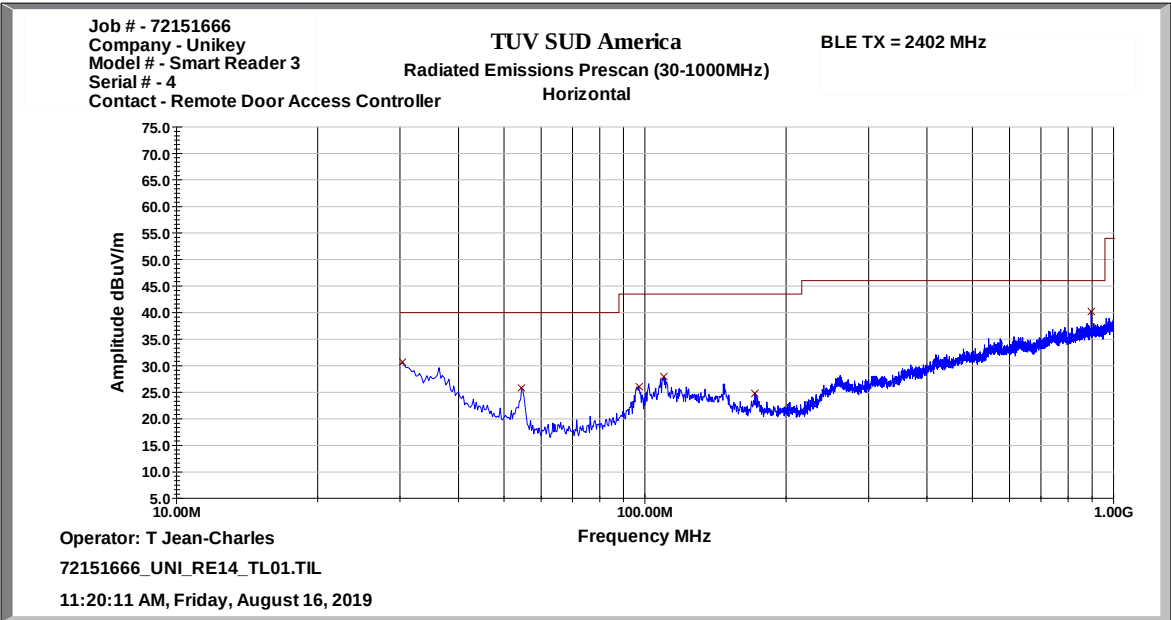


Figure 2.7.7-2: Worst Case Radiated Emissions Pre-Scan Plot 30 MHz – 1 GHz – Horizontal Polarization

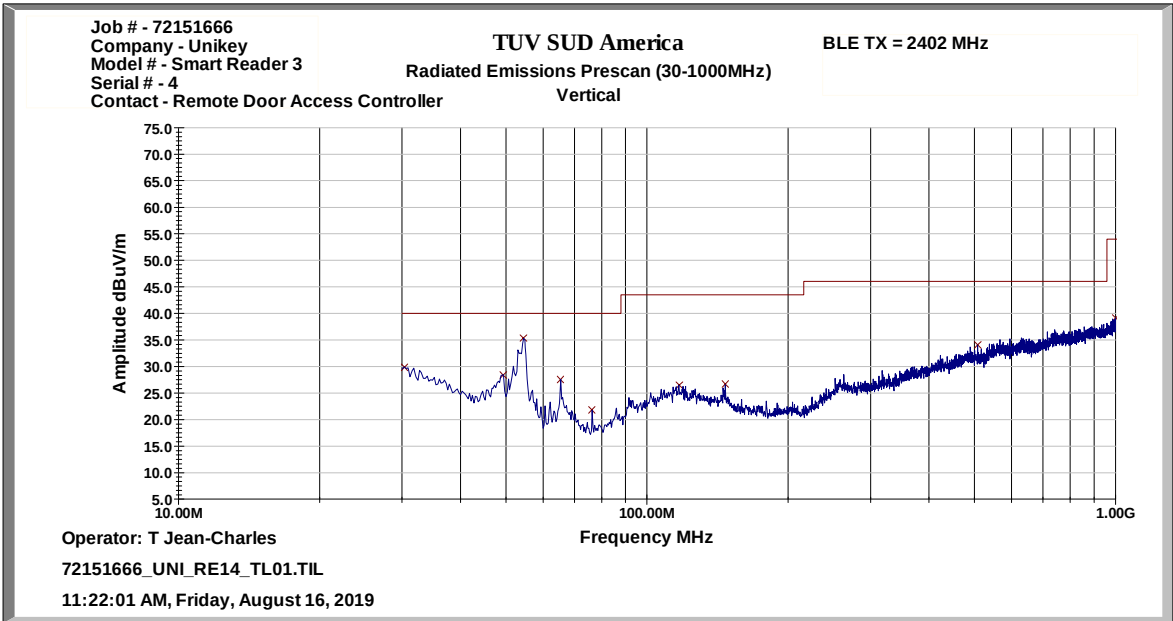


Figure 2.7.7-3: Worst Case Radiated Emissions Pre-Scan Plot 30 MHz – 1 GHz – Vertical Polarization

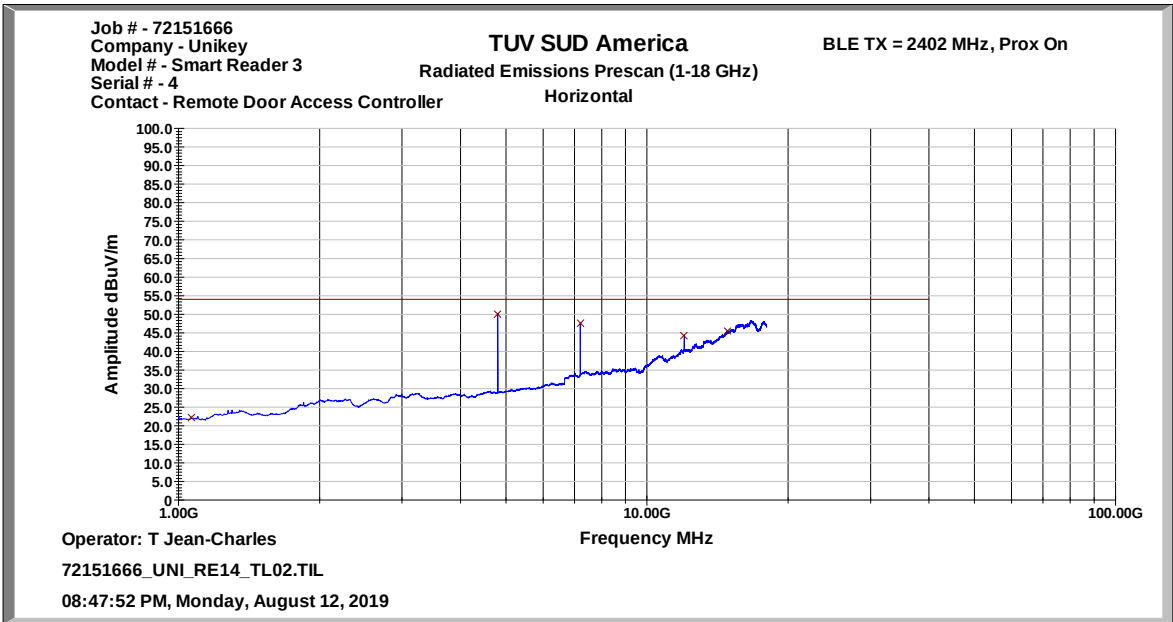


Figure 2.7.7-4: Worst Case Radiated Emissions Pre-Scan Plot 1 GHz – 18 GHz – Horizontal Polarization

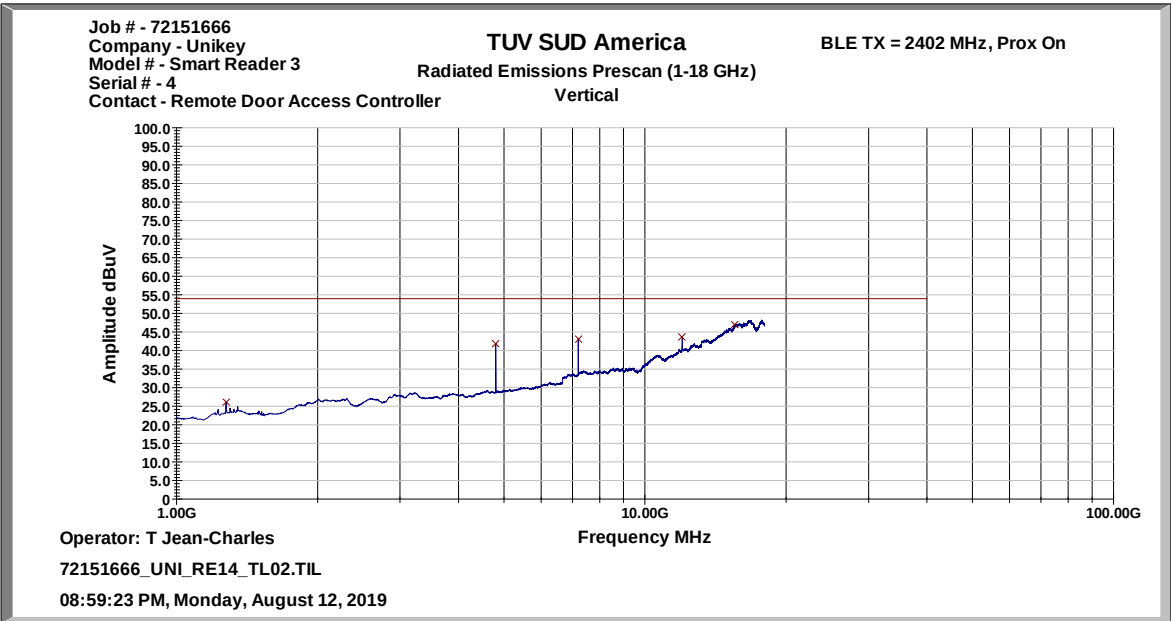


Figure 2.7.7-5: Worst Case Radiated Emissions Pre-Scan Plot 1 GHz – 18 GHz – Vertical Polarization

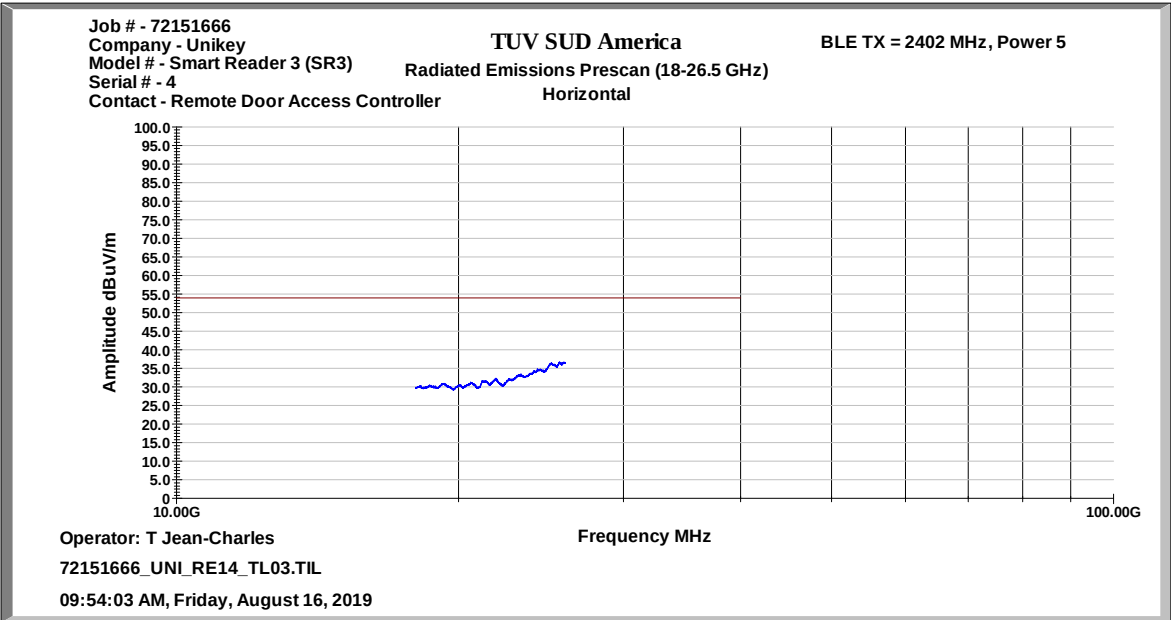


Figure 2.7.7-6: Worst Case Radiated Emissions Pre-Scan Plot 18 GHz – 26.5 GHz – Horizontal Polarization

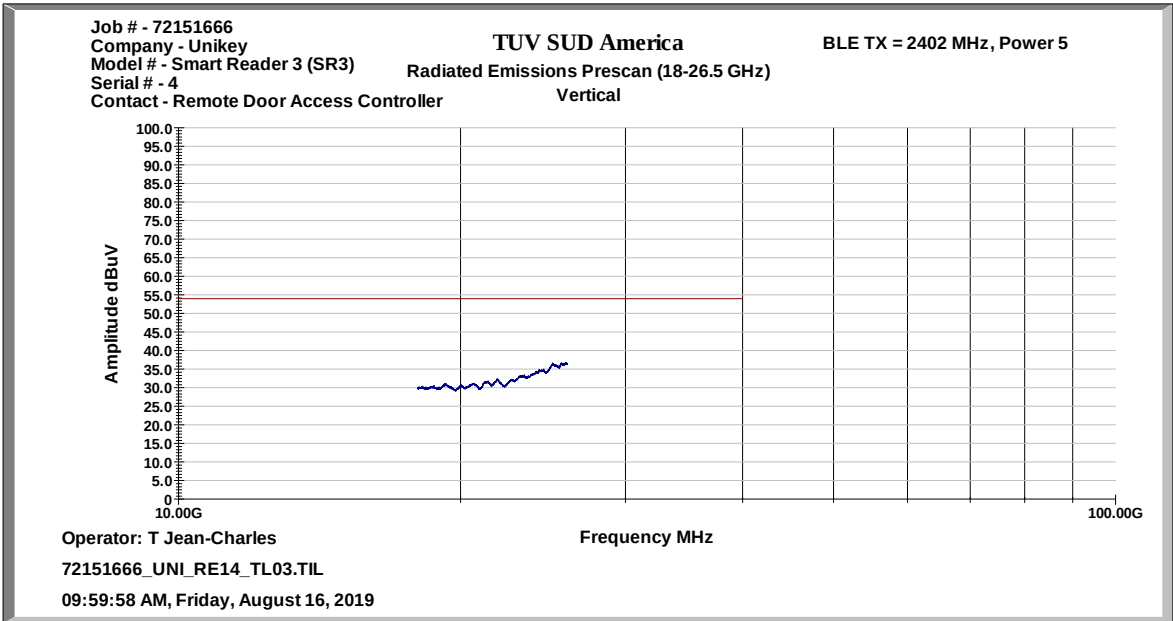


Figure 2.7.7- 7: Worst Case Radiated Emissions Pre-Scan Plot 18 GHz – 26.5 GHz – Vertical Polarization



2.7.8 Sample Calculations

$$R_c = R_u + CF_T$$

Where:

CF_T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_u	=	Uncorrected Reading
R_c	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $51.27 + 4.1 = 51.74 \text{ dB}\mu\text{V/m}$

Margin: $74 \text{ dB}\mu\text{V/m} - 51.74 \text{ dB}\mu\text{V/m} = 18.63 \text{ dB}$

Example Calculation: Average

Corrected Level: $45.95 + 4.1 - 0 = 50.05 \text{ dB}\mu\text{V/m}$

Margin: $54 \text{ dB}\mu\text{V/m} - 50.05 \text{ dB}\mu\text{V/m} = 3.95 \text{ dB}$



2.7.9 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
9kHz-26.5GHz EMC analyzer/HYZ	Agilent	E7405A	BEMC00523	A.14.06	24	27-Nov-20
10dB Attenuator	Merrimac	FAN-6-10K	BEMC02086	N/A	12	17-Oct-19
Tile Automation Software	ETS Lindgren	TILE4! - Version 4.2.A	BEMC02095	4.2A	N/A	NCR
BI LOG PERIODIC, ANTENNA	Schaffner	CBL6112B	TEMC00005	N/A	24	19-Dec-19
Loop Antenna	Com Power	AL-130	TEMC00025	N/A	24	07-Nov-19
Horn Antenna	Schwarzbeck	BBHA-9170	TEMC00029	N/A	60	23-Aug-21
EMC Chamber	Panashield	N/A	TEMC00031	N/A	24	28-Jan-20
Double Ridge Guide Horn	ETS Lindgren	3117	TEMC00061	N/A	24	13-Feb-20
18 GHz-40 GHz Microwave Preamplifier	COM-power	PAM-840A	TEMC00147	N/A	24	30-May-20
PAM-118A	Com-Power Corporatio	PAM-118A	TEMC00160	N/A	12	27-Apr-20
4A & 4B Test Cables	MegaPhase, LLC	1GVT4	TEMC00171	N/A	24	30-May-20
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-01	TEMC00176	N/A	12	10-Apr-20
Radiated Cable Set 30 MHz - 1 GHz	TUV SUD Tampa	Cable 2	TEMC00179	N/A	12	07-May-20
Radiated Cable Set 9 kHz - 30 MHz	TUV SUD Tampa	Cable 2	TEMC00186	N/A	12	08-May-20

TU - Traceability Unscheduled

O/P MON - Traceability Unscheduled

N/A - Not Applicable



2.8 Power Spectral Density

2.8.1 Specification Reference

FCC: Section 15.247(e)
ISED Canada: RSS-247 5.2(b)

2.8.2 Equipment Under Test and Modification State

SN: 4

2.8.3 Date of Test

8/14/2019

2.8.4 Test Method

The power spectral density was measured in accordance with ANSI C63.10 Subclause 11.10.2 Method PKPSD (peak PSD). The RF output port of the EUT was directly connected to the input of the spectrum analyzer. Offset values were input for cable and external attenuation. The spectrum analyzer RBW was set to 3 kHz and VBW to 10 kHz. The Span was adjusted to 1.5 times the DTS bandwidth and the sweep time was set to auto. The measurements were performed using a Peak detector.

2.8.5 Environmental Conditions

Ambient Temperature 24.4 °C
Relative Humidity 43.7 %
Atmospheric Pressure 1015 mbar

2.8.6 Test Results


AC Powered Operating

Limit FCC: Section 15.247(e), ISED Canada: RSS-247 5.2(b)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time of continuous transmission.


Table 2.8.6-1: Power Spectral Density Test Results

Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
2402	-11.27	8	19.27
2440	-11.53	8	19.53
2480	-12.13	8	20.13

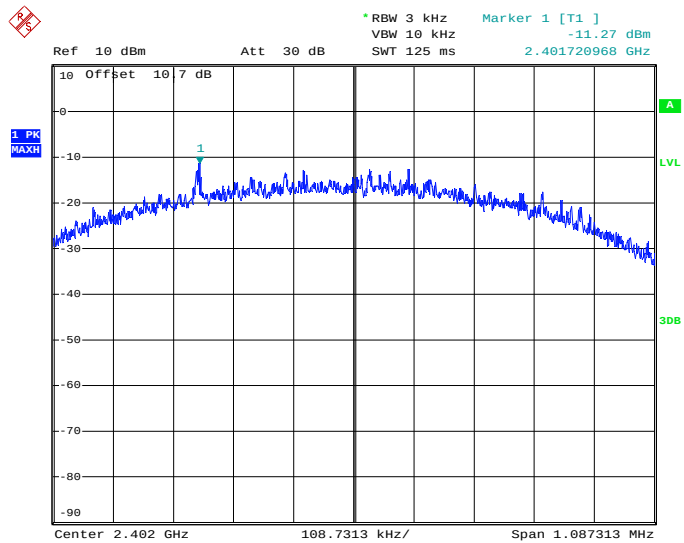


Date: 14.AUG.2019 09:57:40

Figure 2.8.6-1: Power Spectral Density – Low Channel

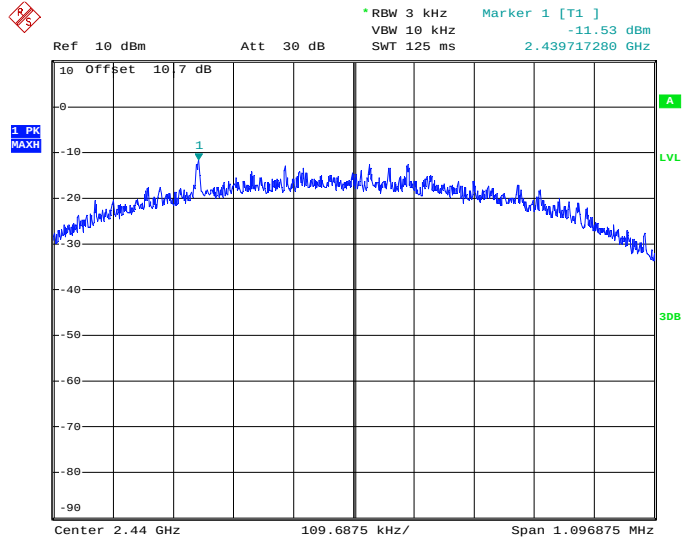

Date: 14.AUG.2019 10:54:50

Figure 2.8.6-2: Power Spectral Density – Middle Channel

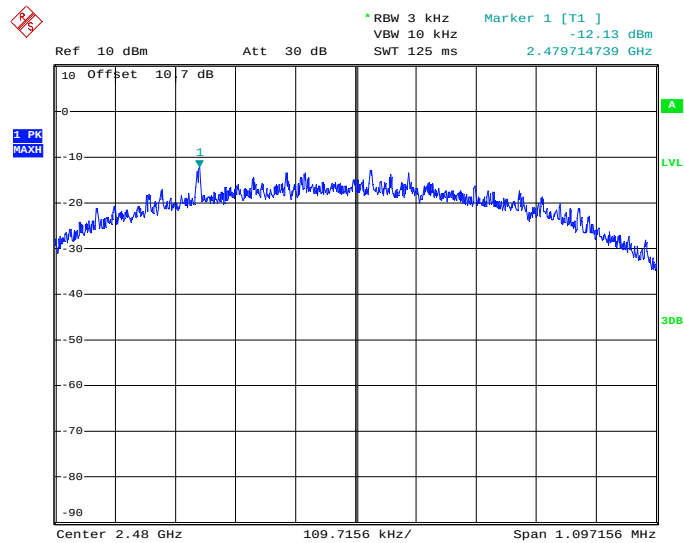

Date: 14.AUG.2019 11:16:57

Figure 2.8.6-3: Power Spectral Density – High Channel

2.8.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	N/A	24	28-Nov-19
Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-10	BEMC02110	N/A	12	27-Jul-20

TU - Traceability Unscheduled
O/P MON - Traceability Unscheduled
N/A - Not Applicable



2.9 Power Line Conducted Emissions

2.9.1 Specification Reference

FCC: Section 15.207
ISED Canada; RSS-GEN 8.8

2.9.2 Equipment Under Test and Modification State

SN: 4

2.9.3 Date of Test

8/14/2019

2.9.4 Test Method

ANSI C63.10 section 6.2 was the guiding document for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss
Margin = Applicable Limit - Corrected Reading

2.9.5 Environmental Conditions

Ambient Temperature 24.3 °C
Relative Humidity 44.3 %
Atmospheric Pressure 1013.3 mbar

2.9.6 Test Results

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

**Table 2.9.6-1: Power Line Conducted Emissions – Quasi-Peak Detector Results**

Frequency (MHz)	Quasi-peak (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	51.61	L1	10.0	13.91	65.52
0.213000	43.22	L1	10.0	19.87	63.09
0.528000	42.32	L1	10.0	13.68	56.00
0.892500	32.78	N	10.1	23.22	56.00
1.279500	31.66	N	10.2	24.34	56.00
4.893000	29.10	N	10.5	26.90	56.00
10.374000	37.65	L1	11.0	22.35	60.00
10.626000	46.85	L1	11.0	13.15	60.00
10.873500	38.14	L1	11.0	21.86	60.00
29.373000	38.36	L1	12.3	21.64	60.00

Table 2.9.6-2: Power Line Conducted Emissions – Average Detector Results

Frequency (MHz)	Average (dBμV)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	46.04	L1	10.0	9.48	55.52
0.249000	32.88	L1	10.0	18.91	51.79
0.541500	38.14	L1	10.0	7.86	46.00
0.609000	34.31	L1	10.0	11.69	46.00
0.892500	29.47	N	10.1	16.53	46.00
1.279500	28.15	N	10.2	17.85	46.00
5.577000	24.75	N	10.6	25.25	50.00
10.374000	33.91	L1	11.0	16.09	50.00
10.626000	46.69	N	11.0	3.31	50.00
29.625000	37.93	L1	12.3	12.07	50.00

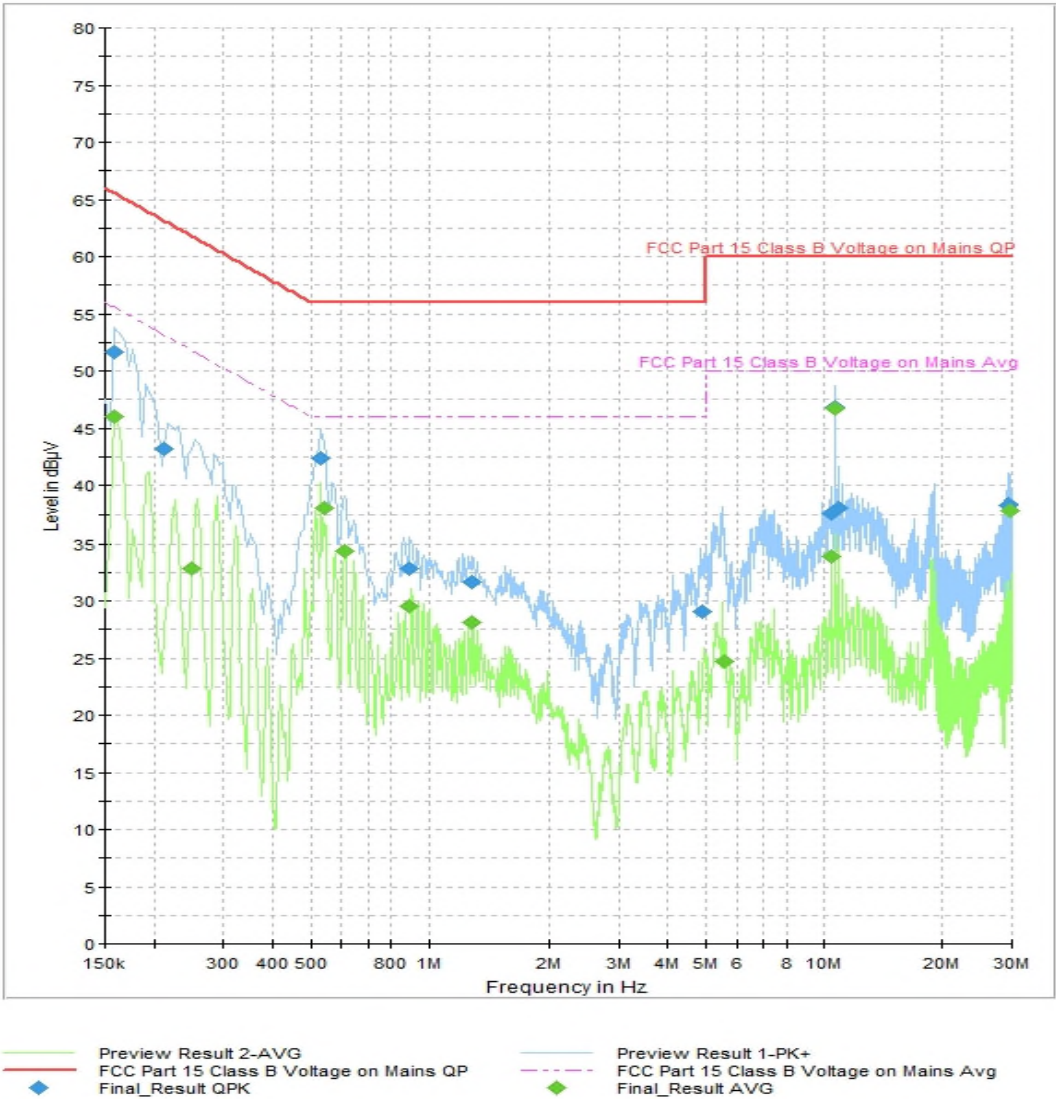


Figure 2.9.6-1: Graphical Results - AC Mains Composite Line and Neutral Plot



2.9.7 Test Location and Test Equipment Used

This test was carried out in TÜV SÜD America, Inc., 5610 W. Sligh Ave, Suite 100, Tampa, FL 33634, USA.

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
LISN	Rohde & Schwarz	ESH3-Z5	TEMC00002	N/A	12	27-Sep-19
EMI Test Receiver	Rohde & Schwarz	ESCS30	TEMC00011	N/A	24	17-Nov-19
RFI/EMI Shielded Enclosure	UNIVERSAL SHIELDING CORP.	N/A	TEMC00100	N/A	N/A	NCR
Test Software	Rohde & Schwarz	EMC32	TEMC00184	N/A	N/A	NCR

TU - Traceability Unscheduled

O/P MON - Traceability Unscheduled

N/A - Not Applicable



3 Test Equipment Information

3.1 General Test Equipment Used

Instrument	Manufacturer	Type No	TE No	Software / Firmware Revision	Calibration Period (months)	Calibration Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	BEMC00283	N/A	24	28-Nov-19
9kHz-26.5GHz EMC analyzer/HYZ	Agilent	E7405A	BEMC00523	A.14.06	24	27-Nov-20
10dB Attenuator	Merrimac	FAN-6-10K	BEMC02086	N/A	12	17-Oct-19
Tile Automation Software	ETS Lindgren	TILE4! - Version 4.2.A	BEMC02095	4.2A	N/A	NCR
Attenuator 10dB, 2.9 mm-M/F, DC-40GHz 2 W	Aeroflex Inmet	40AH2W-10	BEMC02110	N/A	12	27-Jul-20
LISN	Rohde & Schwarz	ESH3-Z5	TEMC00002	N/A	12	27-Sep-19
BI LOG PERIODIC, ANTENNA	Schaffner	CBL6112B	TEMC00005	N/A	24	19-Dec-19
EMI Test Receiver	Rohde & Schwarz	ESCS30	TEMC00011	N/A	24	17-Nov-19
Loop Antenna	Com Power	AL-130	TEMC00025	N/A	24	7-Nov-19
Horn Antenna	Schwarzbeck	BBHA-9170	TEMC00029	N/A	60	23-Aug-21
EMC Chamber	Panasheild	N/A	TEMC00031	N/A	24	28-Jan-20
Double Ridge Guide Horn	ETS Lindgren	3117	TEMC00061	N/A	24	13-Feb-20
RFI/EMI Shielded Enclosure	UNIVERSAL SHIELDING CORP.	N/A	TEMC00100	N/A	N/A	NCR
18 GHz-40 GHz Microwave Preamplifier	COM-power	PAM-840A	TEMC00147	N/A	24	30-May-20
PAM-118A	Com-Power Corporatio	PAM-118A	TEMC00160	N/A	12	27-Apr-20
4A & 4B Test Cables	MegaPhase, LLC	1GVT4	TEMC00171	N/A	24	30-May-20
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-01	TEMC00176	N/A	12	10-Apr-20
Radiated Cable Set 30 MHz - 1 GHz	TUV SUD Tampa	Cable 2	TEMC00179	N/A	12	7-May-20
Test Software	Rohde & Schwarz	EMC32	TEMC00184	N/A	N/A	NCR
Radiated Cable Set 9 kHz - 30 MHz	TUV SUD Tampa	Cable 2	TEMC00186	N/A	12	8-May-20

TU - Traceability Unscheduled
O/P MON - Traceability Unscheduled
N/A - Not Applicable

4 Diagram of Test Set-ups

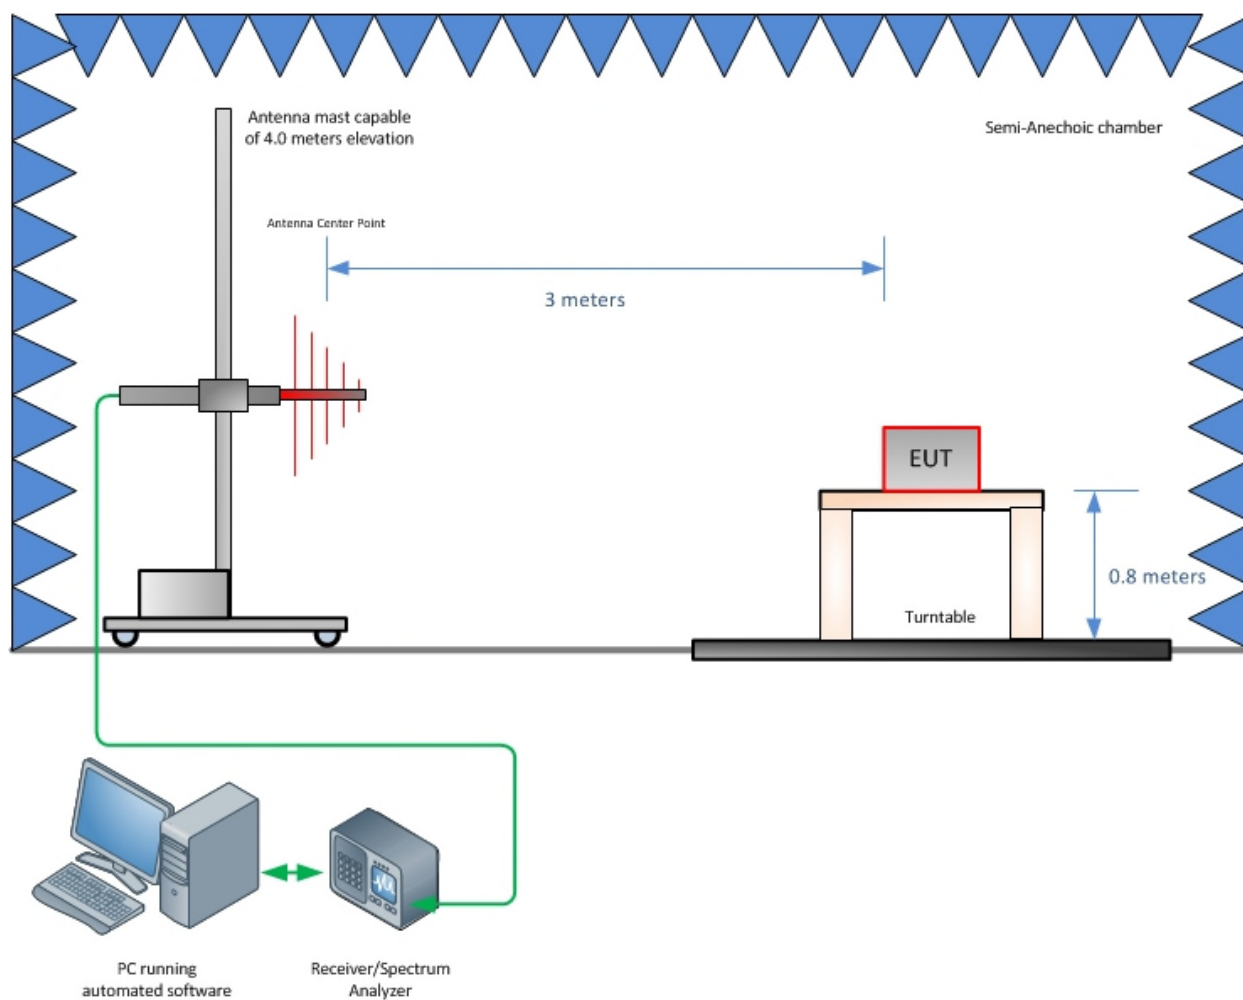


Figure 4-1 - Radiated Emissions Test Setup up to 1 GHz

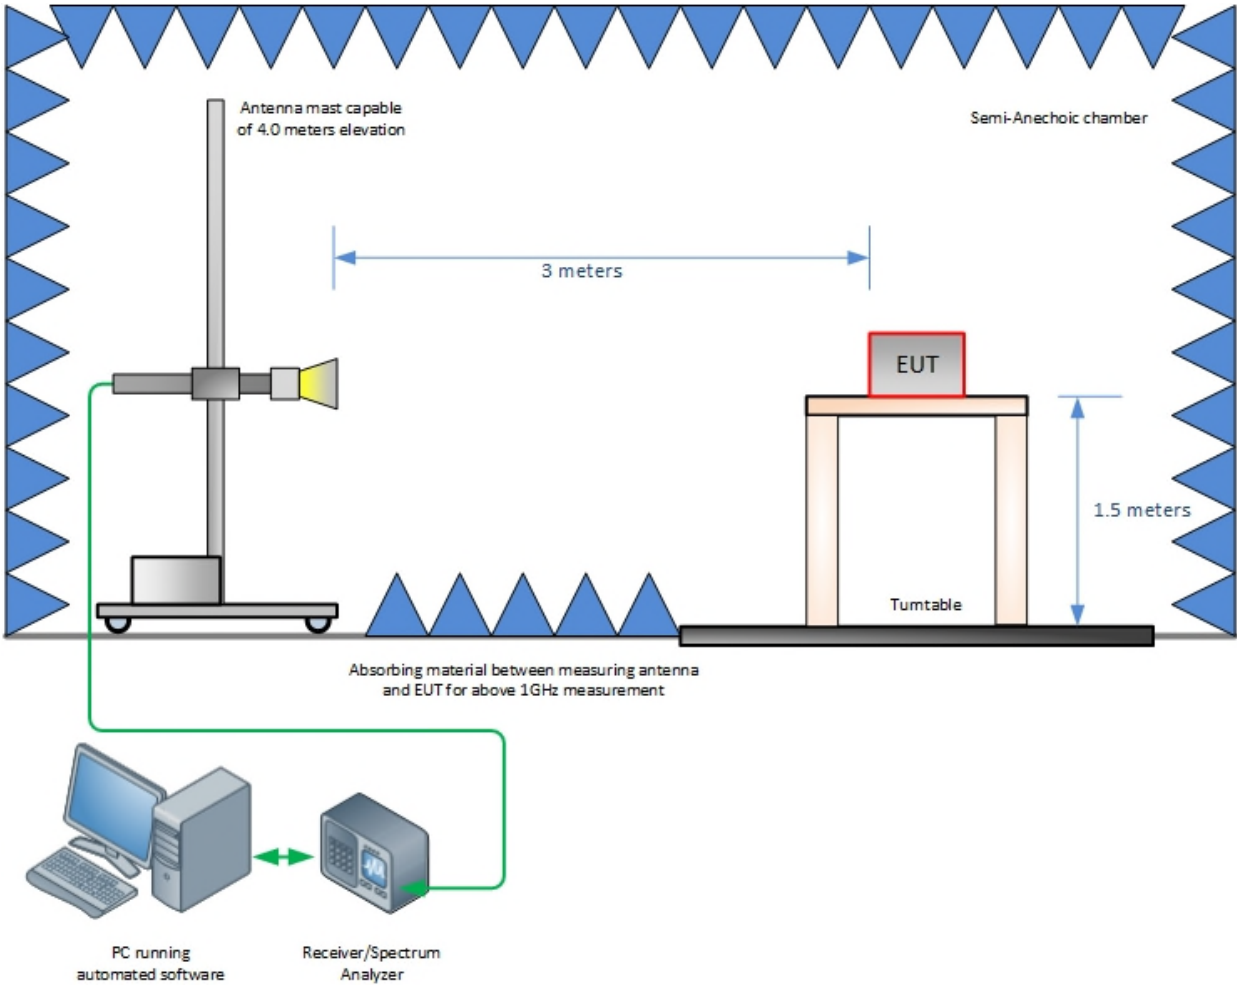


Figure 4-2 - Radiated Emissions Test Setup above 1 GHz

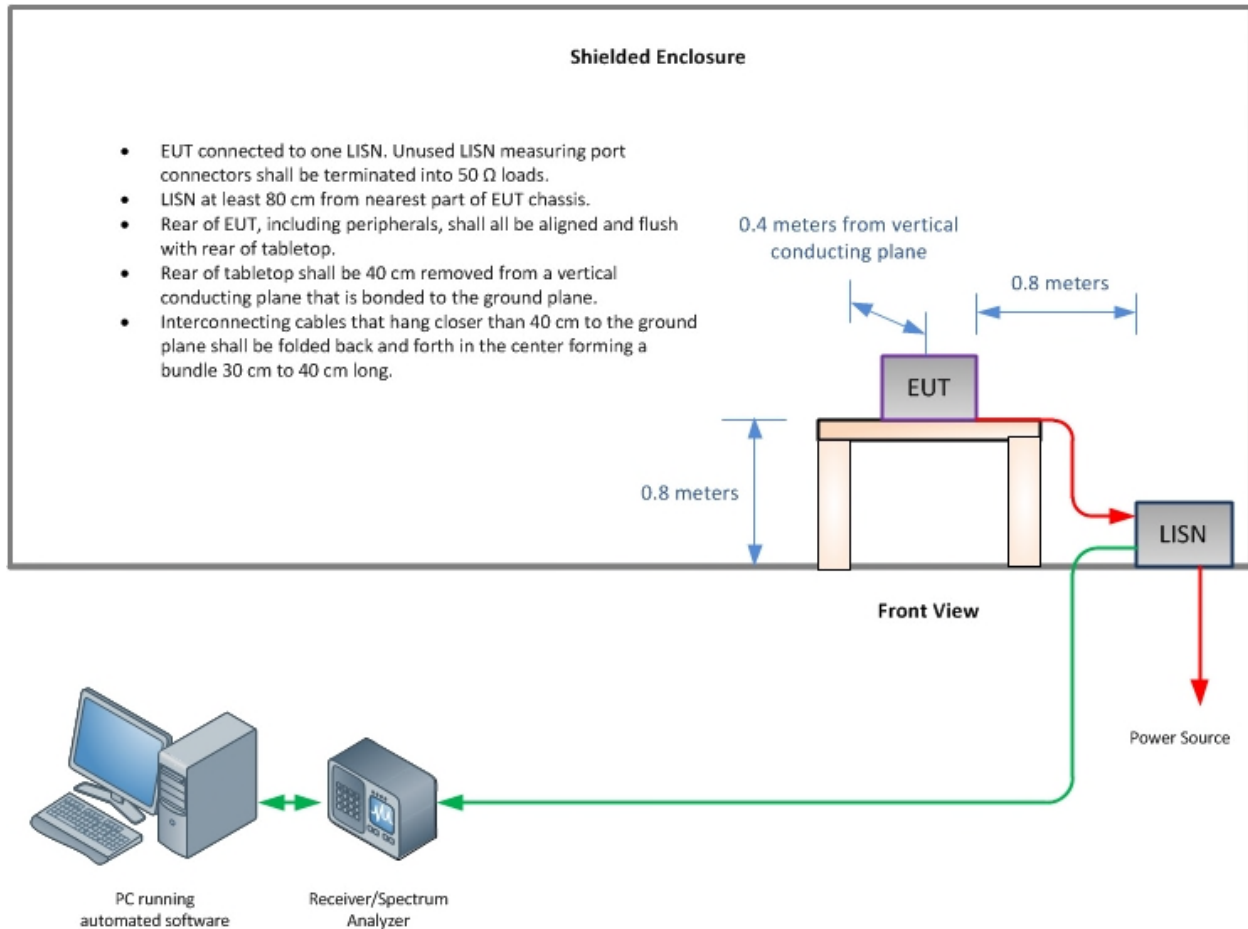


Figure 4-3 – Conducted Emissions Test Setup



5 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Table 6-1 - Values of U_{CISPR} and U_{Lab}

Measurement	U_{CISPR}	U_{Lab}
Conducted disturbance (mains port) (9 kHz – 150 kHz) (150 kHz – 30 MHz)	3.8 dB 3.4 dB	3.71 dB 3.31 dB
Conducted disturbance (telecom port) (150 kHz – 30 MHz 55 dB LCL) (150 kHz – 30 MHz 65 dB LCL) (150 kHz – 30 MHz 75 dB LCL)	5.0 dB 5.0 dB 5.0 dB	4.11 dB 4.50 dB 4.94 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1 000 MHz) (1 – 6 GHz) (6-18 GHz)	6.3 dB 5.2 dB 5.5 dB	5.85 dB 4.48 dB 4.48 dB

Notes:

U_{CISPR} resembles a value of measurement uncertainty for a specific test, which was determined by considering uncertainties associated with the quantities listed in CISPR 16-4-2:2011.

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If U_{Lab} is less than or equal to U_{CISPR} in Table 5.0-1, then:

- o compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- o non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If U_{Lab} is greater than U_{CISPR} , then:

- o compliance is deemed to occur if no measured disturbance, increased by $(U_{\text{Lab}} - U_{\text{CISPR}})$, exceeds the disturbance limit;
- o non-compliance is deemed to occur if any measured disturbance, increased by $(U_{\text{Lab}} - U_{\text{CISPR}})$, exceeds the disturbance limit.

The TÜV SÜD AMERICA, Inc. calculated MU is less than the internationally accepted MU, therefore an adjustment to the measured result as mentioned above is not necessary.



6 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and or its professional staff hold government and professional organization certifications for A2LA, ANSI, IEEE, NIST, iNARTE and VCCI.