

1RB										
Front Side	132322/1745	20M QPSK(1,0)	0.443	0.238	-1.47	22.48	23.00	0.499	2025/4/27	
Back Side	132322/1745	20M QPSK(1,0)	0.588	0.323	-1.11	22.48	23.00	0.663	2025/4/27	20#
Left Side	132322/1745	20M QPSK(1,0)	0.236	0.127	0.92	22.48	23.00	0.266	2025/4/27	
Right Side	132322/1745	20M QPSK(1,0)	0.060	0.032	0.24	22.48	23.00	0.068	2025/4/27	
Top Side	132322/1745	20M QPSK(1,0)	0.310	0.165	1.61	22.48	23.00	0.349	2025/4/27	
50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.262	0.142	-4.60	21.52	22.00	0.293	2025/4/27	
Back Side	132322/1745	20M QPSK(50,0)	0.295	0.178	-1.20	21.52	22.00	0.329	2025/4/27	
Left Side	132322/1745	20M QPSK(50,0)	0.139	0.065	0.17	21.52	22.00	0.155	2025/4/27	
Right Side	132322/1745	20M QPSK(50,0)	0.032	0.018	-1.13	21.52	22.00	0.036	2025/4/27	
Top Side	132322/1745	20M QPSK(50,0)	0.182	0.085	1.23	21.52	22.00	0.203	2025/4/27	

NOTE: Hotspot SAR test results of LTE Band 66

10.1.18. SAR measurement Result of WLAN 2.4G

Test Position of Body-Worn with 0mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.095	0.049	-2.12	15.80	16.00	0.099	2025/5/02	8#
Back Side	6/2437	802.11b	0.080	0.039	-2.82	15.80	16.00	0.084	2025/5/02	

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 0mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	6/2437	802.11b	0.095	0.049	-2.12	15.80	16.00	0.099	2025/5/02	8#
Back Side	6/2437	802.11b	0.080	0.039	-2.82	15.80	16.00	0.084	2025/5/02	

Right Side	6/2437	802.11b	0.091	0.046	-1.51	15.80	16.00	0.095	2025/5/02	
Top Side	6/2437	802.11b	0.072	0.037	-0.98	15.80	16.00	0.075	2025/5/02	

NOTE: Hotspot SAR test results of WLAN 2.4G

10.1.19. SAR measurement Result of WLAN 5.2G

Test Position of Body-Worn with 0mm	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	40/5200	802.11a	0.215	0.070	-1.41	12.49	13.00	0.242	2025/4/13	
Back Side	40/5200	802.11a	0.168	0.056	-2.77	12.49	13.00	0.189	2025/4/13	

NOTE: Body-Worn SAR test results of WLAN 5.2G

Test Position of Hotspot with 0mm	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	40/5200	802.11a	0.215	0.070	-1.41	12.49	13.00	0.242	2025/4/13	
Back Side	40/5200	802.11a	0.168	0.056	-2.77	12.49	13.00	0.189	2025/4/13	
Right Side	40/5200	802.11a	0.379	0.126	0.63	12.49	13.00	0.426	2025/4/13	6#
Top Side	40/5200	802.11a	0.084	0.027	-1.59	12.49	13.00	0.094	2025/4/13	

NOTE: Hotspot SAR test results of WLAN 5.2G

10.1.20. SAR measurement Result of WLAN 5.8G

Test Position of Body-Worn with 0mm	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	149/5745	802.11a	0.303	0.098	-1.96	11.38	11.50	0.311	2025/5/03	
Back Side	149/5745	802.11a	0.212	0.067	3.38	11.38	11.50	0.218	2025/5/03	

NOTE: Body-Worn SAR test results of WLAN 5.8G

Test Position of	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g	Date	Plot
			1-g	10-g						

Hotspot with 0mm								(W/Kg)		
Front Side	149/5745	802.11a	0.303	0.098	-1.96	11.38	11.50	0.311	2025/5/03	
Back Side	149/5745	802.11a	0.212	0.067	3.38	11.38	11.50	0.218	2025/5/03	
Right Side	149/5745	802.11a	0.523	0.171	3.37	11.38	11.50	0.538	2025/5/03	7#
Top Side	149/5745	802.11a	0.112	0.035	2.25	11.38	11.50	0.115	2025/5/03	

NOTE: Hotspot SAR test results of WLAN 5.8G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation $< 1.6\text{W/kg}$.
- $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DTS			
Hotspot	Front Side	0.585	0.099	0.684	N/A	N/A
	Back Side	0.663	0.084	0.747	N/A	N/A
Body	Front Side	0.585	0.099	0.684	N/A	N/A
	Back Side	0.663	0.084	0.747	N/A	N/A
	Left Side	0.307	N/A	0.307	N/A	N/A
	Right Side	0.069	0.095	0.164	N/A	N/A
	Top Side	0.528	0.075	0.603	N/A	N/A
	Bottom Side	N/A	N/A	N/A	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	NII			
Hotspot	Front Side	0.585	0.311	0.896	N/A	N/A
	Back Side	0.663	0.218	0.881	N/A	N/A
Body	Front Side	0.585	0.311	0.896	N/A	N/A
	Back Side	0.663	0.218	0.881	N/A	N/A
	Left Side	0.307	N/A	0.307	N/A	N/A

	Right Side	0.069	0.538	0.607	N/A	N/A
	Top Side	0.528	0.115	0.643	N/A	N/A
	Bottom Side	N/A	N/A	N/A	N/A	N/A

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Hotspot	Front Side	0.585	0.167	0.752	0.585	0.167
	Back Side	0.663	0.167	0.830	0.663	0.167
Body	Front Side	0.585	0.167	0.752	0.585	0.167
	Back Side	0.663	0.167	0.830	0.663	0.167
	Left Side	0.307	N/A	0.307	0.307	N/A
	Right Side	0.069	0.167	0.236	0.069	0.167
	Top Side	0.528	0.167	0.695	0.528	0.167
	Bottom Side	N/A	N/A	N/A	N/A	N/A

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1SystemPerformanceCheck-750MHz
MEASUREMENT 2SystemPerformanceCheck-835MHz
MEASUREMENT 3 SystemPerformanceCheck-1800MHz
MEASUREMENT 4SystemPerformanceCheck-1900MHz
MEASUREMENT 5 SystemPerformanceCheck-1900MHz
MEASUREMENT 6SystemPerformanceCheck-2450MHz
MEASUREMENT 7SystemPerformanceCheck-2600MHz
MEASUREMENT 8SystemPerformanceCheck-5200MHz
MEASUREMENT 9SystemPerformanceCheck-5800MHz

1# System check at 750 MHz


Date of measurement: 25/4/2025

A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.42
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	750.000
Relative permittivity (real part)	41.05
Relative permittivity (imaginary part)	21.28
Conductivity (S/m)	0.89

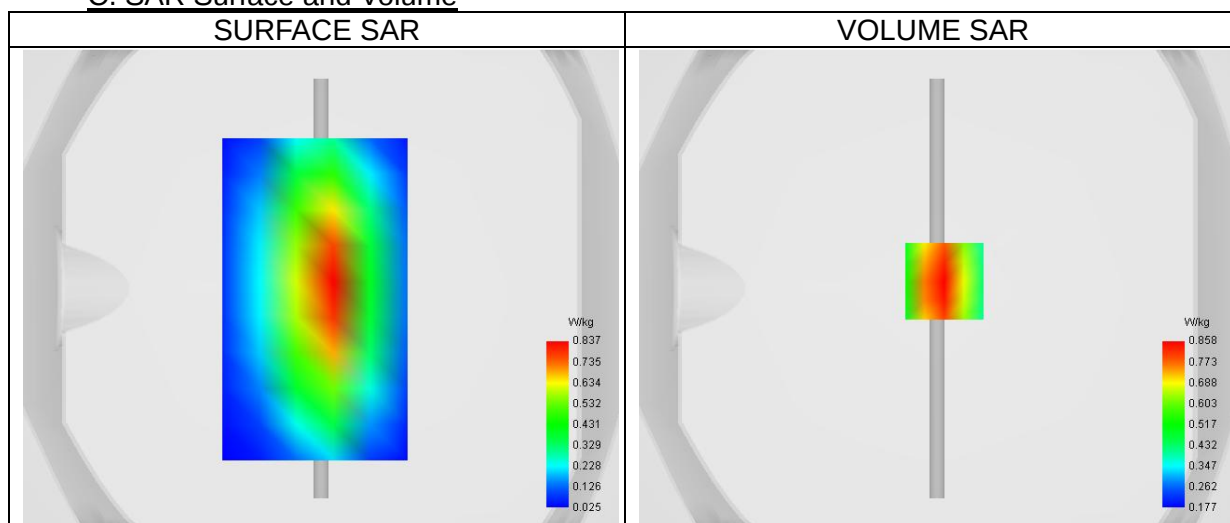C. SAR Surface and Volume


Maximum location: X=3.00, Y=3.00 ; SAR Peak: 1.08 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.578
SAR 1g (W/Kg)	0.830
Variation (%)	-0.37
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	75.07

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.075	0.858	0.644	0.490	0.369	0.282	0.232

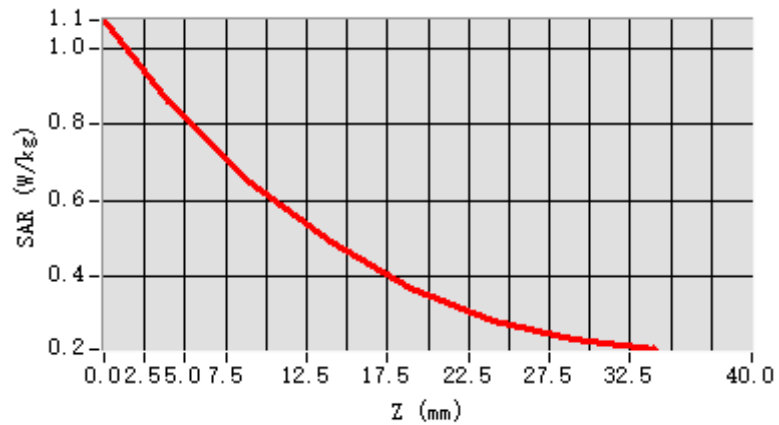

F. 3D Image

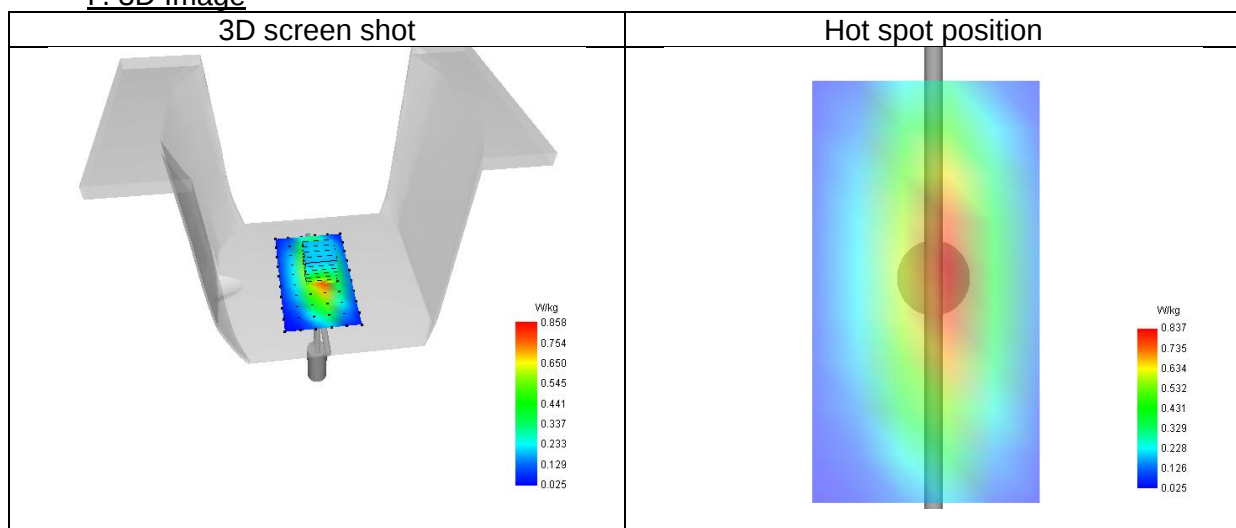

2# System check at 835 MHz
Date of measurement: 29/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	835.00
Relative permittivity (real part)	42.54
Relative permittivity (imaginary part)	20.15
Conductivity (S/m)	0.94

C. SAR Surface and Volume

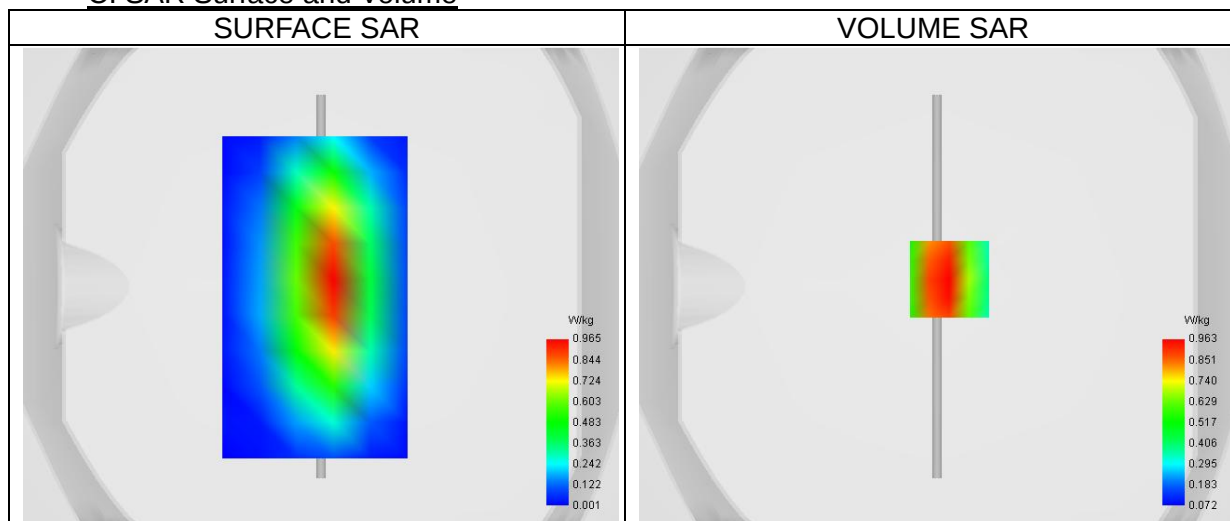


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 1.47 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.566
SAR 1g (W/Kg)	0.942
Variation (%)	-0.19
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	62.77

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.459	0.963	0.599	0.403	0.294	0.214	0.141

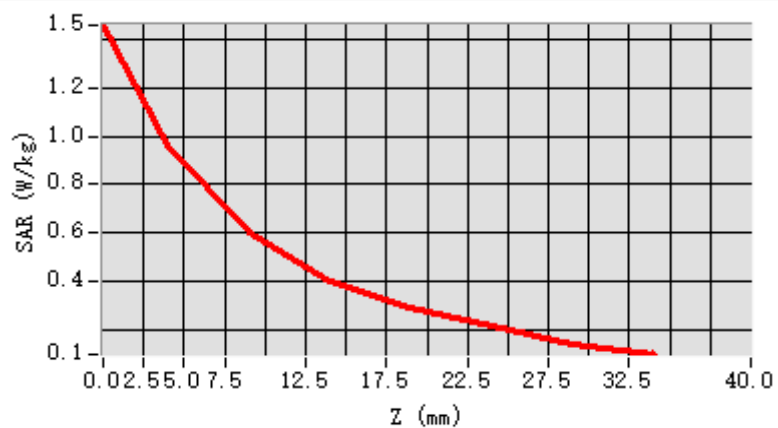

F. 3D Image

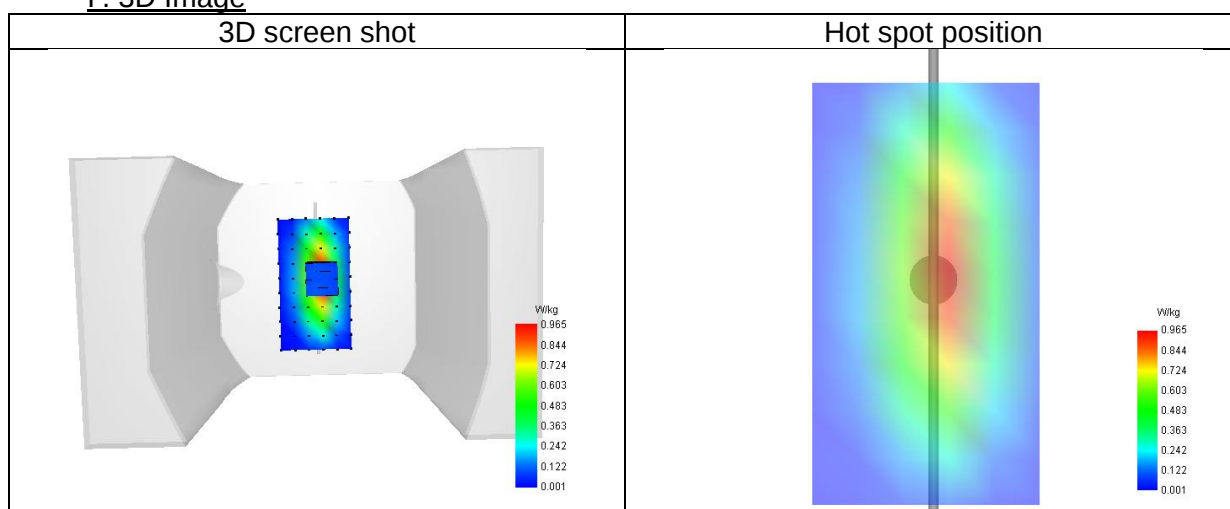

3# System check at 1800 MHz
Date of measurement: 27/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels/Frequency	Middle
Signal	CW

B. Permittivity

Middle TX Frequency (MHz)	1800.000
Relative permittivity (real part)	40.06
Relative permittivity (imaginary part)	14.32
Conductivity (S/m)	1.43

C. SAR Surface and Volume

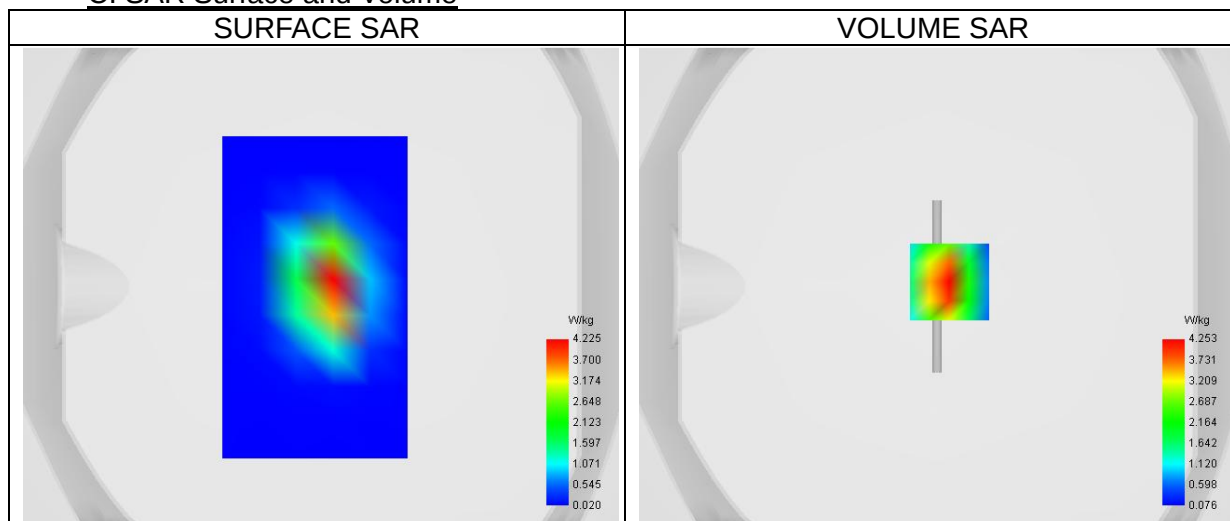


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 7.06 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.983
SAR 1g (W/Kg)	4.035
Variation (%)	-0.20
Horizontal validation criteria: minimum distance (mm)	11.31
Vertical validation criteria: SAR ratio M2/M1 (%)	52.53

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.967	4.253	2.234	1.244	0.722	0.429	0.264

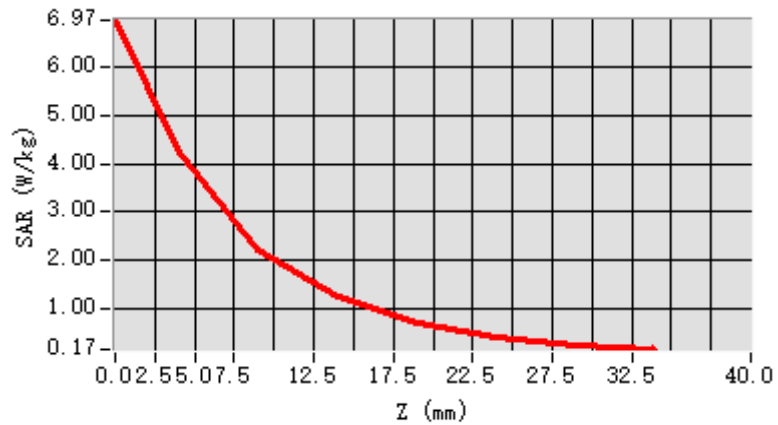

F. 3D Image

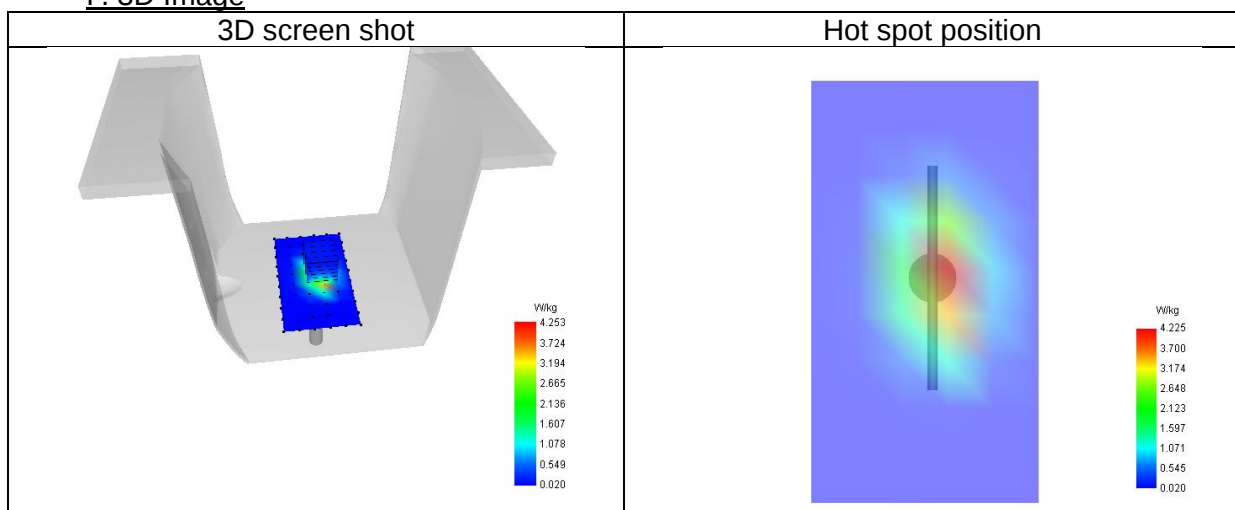

4# System check at 1900 MHz
Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	1900.00
Relative permittivity (real part)	38.78
Relative permittivity (imaginary part)	13.83
Conductivity (S/m)	1.46

C. SAR Surface and Volume

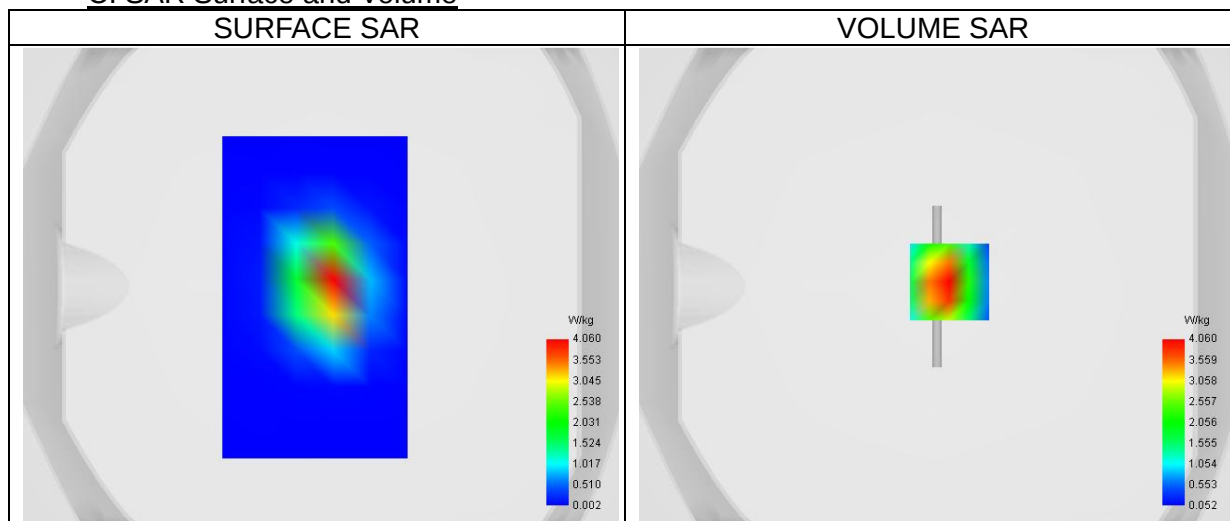


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 6.66 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.971
SAR 1g (W/Kg)	4.006
Variation (%)	-1.46
Horizontal validation criteria: minimum distance (mm)	11.31
Vertical validation criteria: SAR ratio M2/M1 (%)	54.40

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.476	4.060	2.209	1.250	0.718	0.422	0.249

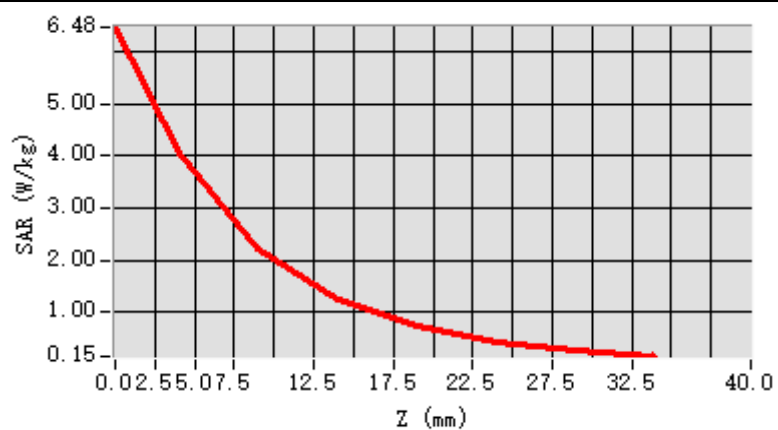

F. 3D Image

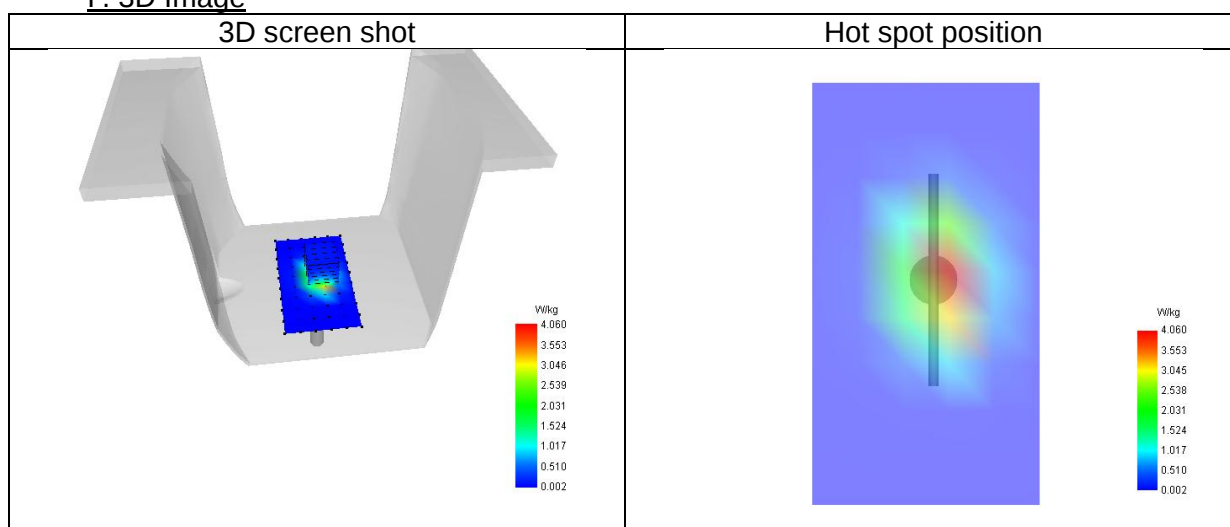

5# System check at 1900 MHz
Date of measurement: 30/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	1900.00
Relative permittivity (real part)	38.58
Relative permittivity (imaginary part)	13.84
Conductivity (S/m)	1.46

C. SAR Surface and Volume

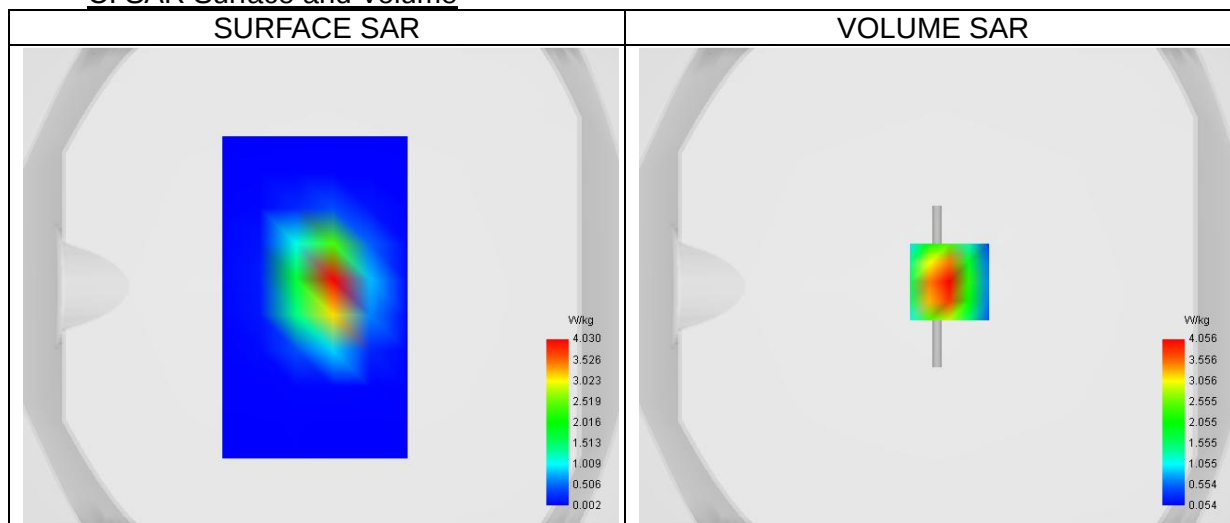


Maximum location: X=5.00, Y=2.00 ; SAR Peak: 6.64 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.969
SAR 1g (W/Kg)	3.998
Variation (%)	-0.09
Horizontal validation criteria: minimum distance (mm)	11.31
Vertical validation criteria: SAR ratio M2/M1 (%)	54.43

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.466	4.056	2.208	1.256	0.721	0.422	0.251

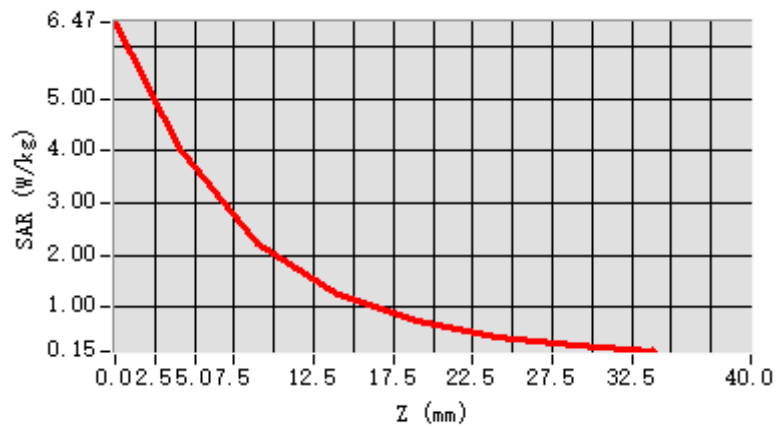

F. 3D Image

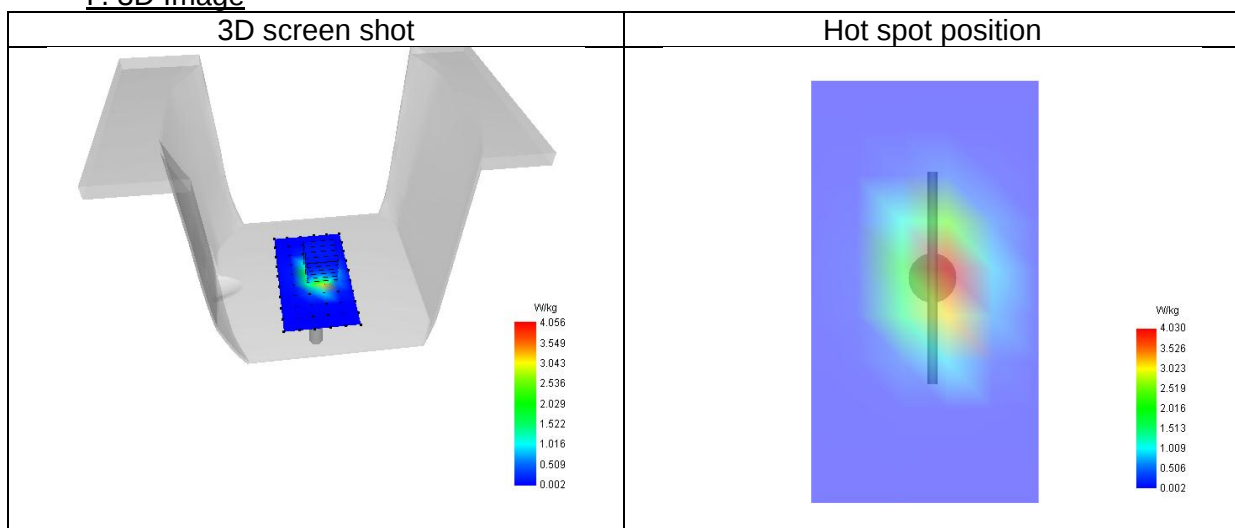

6# System check at 2450 MHz

Date of measurement: 2/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	2450.00
Relative permittivity (real part)	38.46
Relative permittivity (imaginary part)	13.13
Conductivity (S/m)	1.79

C. SAR Surface and Volume

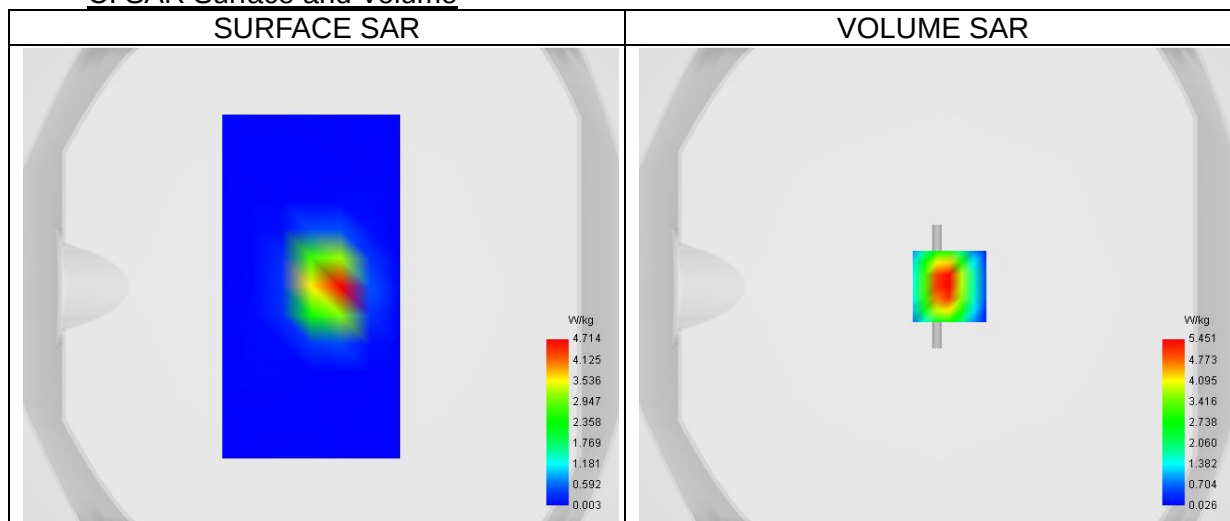


Maximum location: X=5.00, Y=0.00 ; SAR Peak: 9.71 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.184
SAR 1g (W/Kg)	5.062
Variation (%)	0.29
Horizontal validation criteria: minimum distance (mm)	10.00
Vertical validation criteria: SAR ratio M2/M1 (%)	47.71

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	9.381	5.451	2.601	1.284	0.654	0.340	0.185

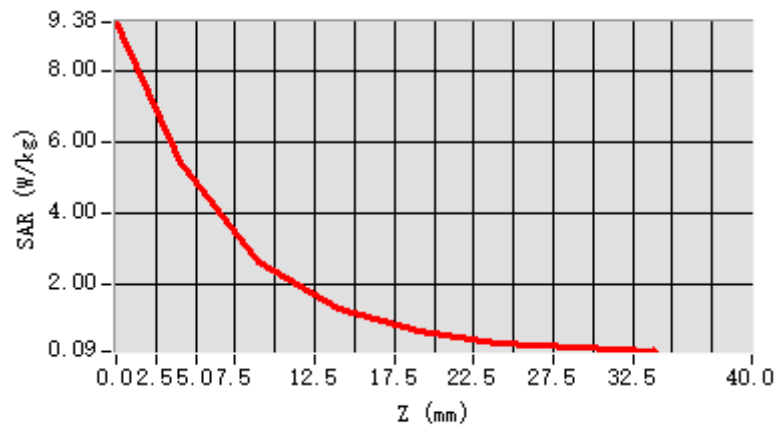

F. 3D Image

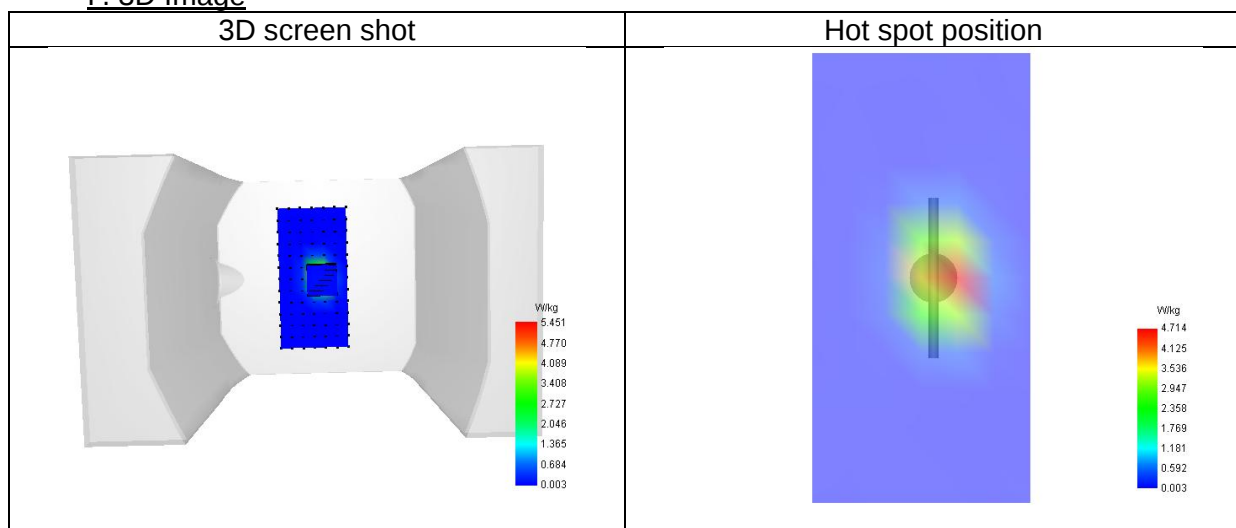

7# System check at 2600 MHz

Date of measurement: 1/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	2600.00
Relative permittivity (real part)	39.48
Relative permittivity (imaginary part)	13.72
Conductivity (S/m)	1.98

C. SAR Surface and Volume

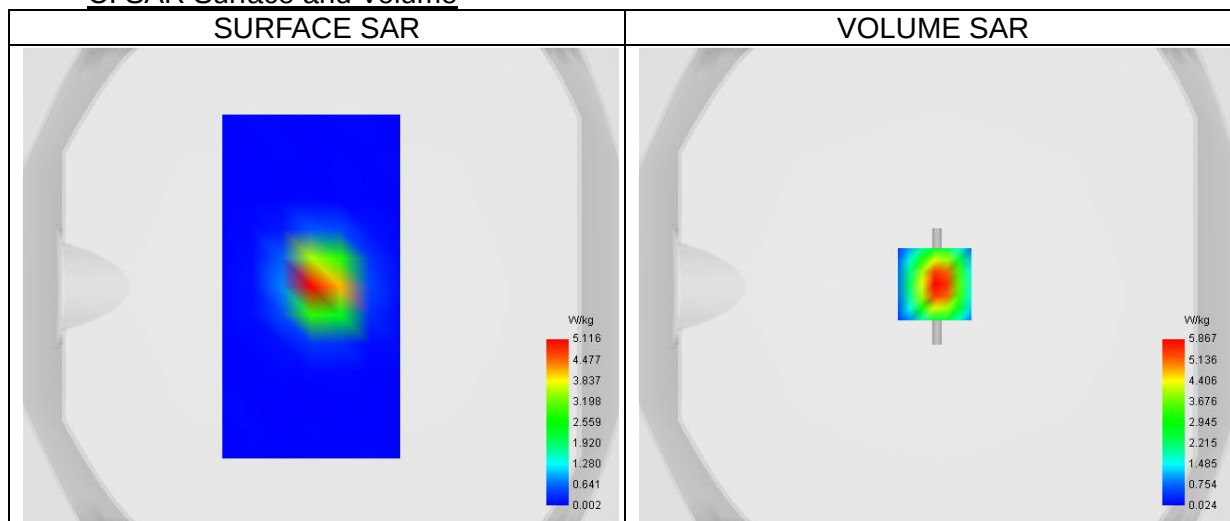


Maximum location: X=-1.00, Y=1.00 ; SAR Peak: 10.21 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.348
SAR 1g (W/Kg)	5.415
Variation (%)	1.19
Horizontal validation criteria: minimum distance (mm)	10.00
Vertical validation criteria: SAR ratio M2/M1 (%)	47.20

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	10.166	5.867	2.769	1.345	0.671	0.347	0.169

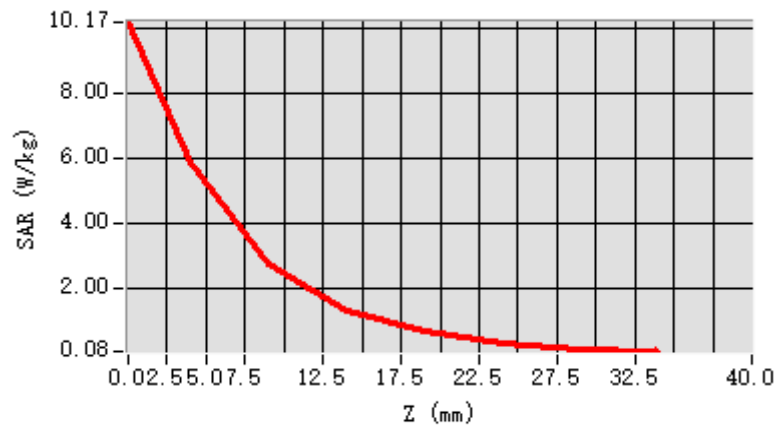

F. 3D Image

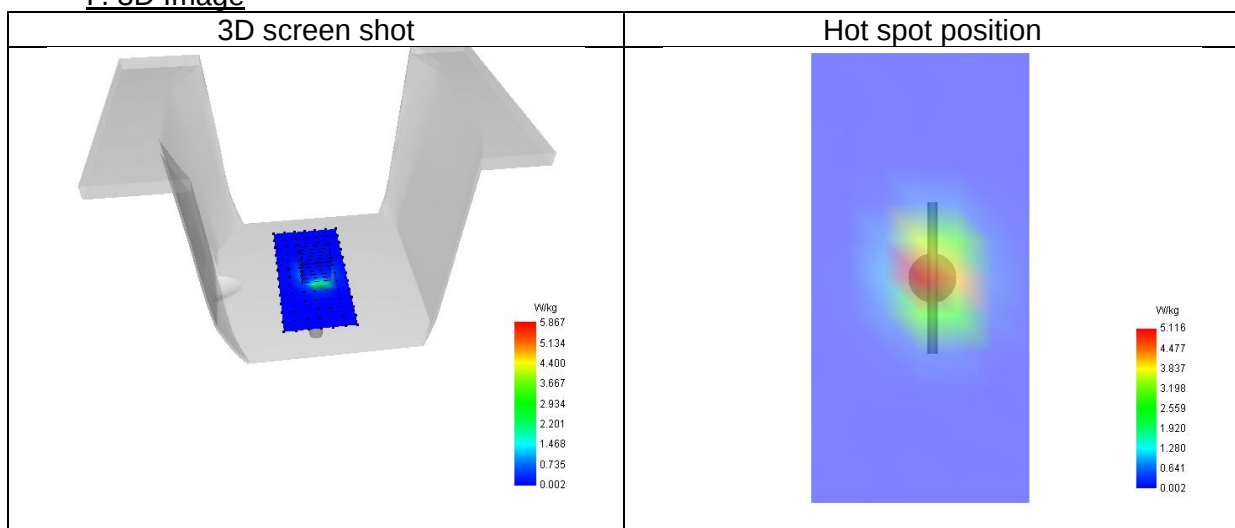

8# System check at 5200 MHz
Date of measurement: 13/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5200.00
Relative permittivity (real part)	34.90
Relative permittivity (imaginary part)	15.97
Conductivity (S/m)	4.62

C. SAR Surface and Volume

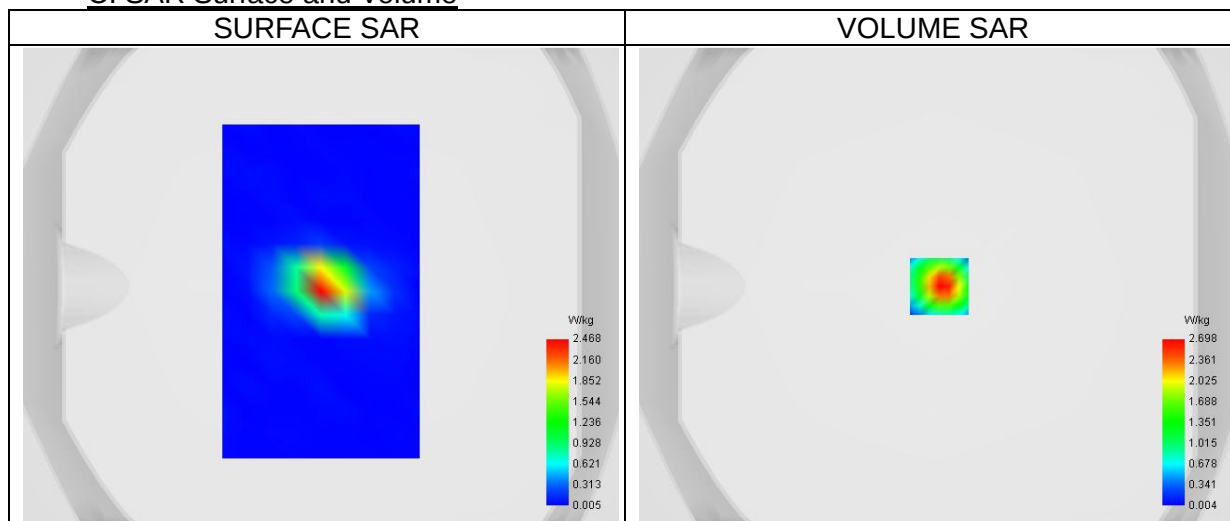


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 4.79 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.527
SAR 1g (W/Kg)	1.573
Variation (%)	-0.80
Horizontal validation criteria: minimum distance (mm)	8.94
Vertical validation criteria: SAR ratio M2/M1 (%)	52.66

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	4.42	2.69	1.42	0.80	0.43	0.21	0.13	0.06	0.05	0.02	0.03	0.01
	3	8	1	1	7	4	1	4	0	9	3	2

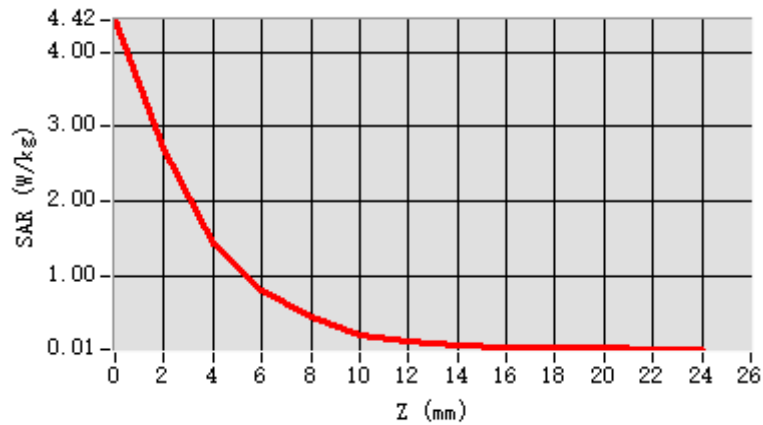

F. 3D Image

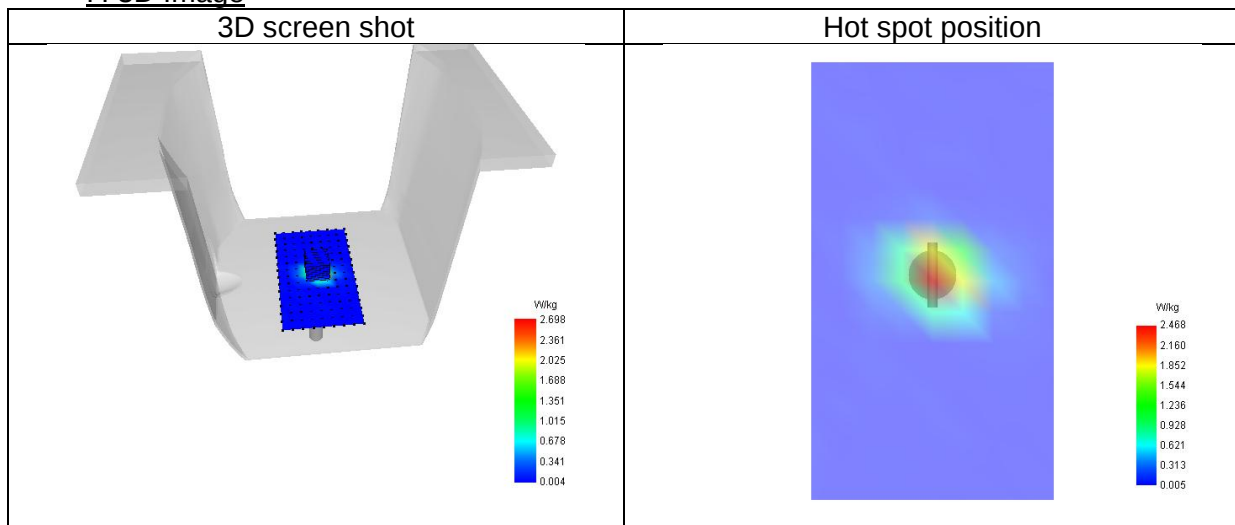

9# System check at 5800 MHz

Date of measurement: 3/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Signal	CW
Channels/Frequency	Middle

B. Permittivity

Middle TX Frequency (MHz)	5800.00
Relative permittivity (real part)	36.07
Relative permittivity (imaginary part)	15.82
Conductivity (S/m)	5.10

C. SAR Surface and Volume

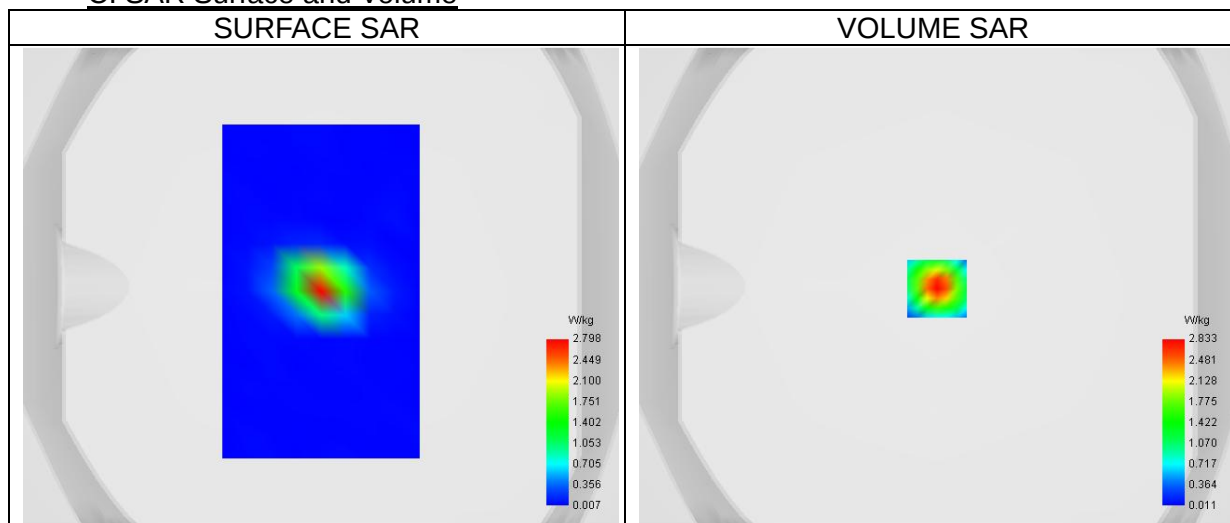


Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 4.96 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.566
SAR 1g (W/Kg)	1.660
Variation (%)	1.69
Horizontal validation criteria: minimum distance (mm)	8.94
Vertical validation criteria: SAR ratio M2/M1 (%)	54.67

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	4.53	2.83	1.54	0.91	0.51	0.27	0.15	0.08	0.05	0.04	0.03	0.03
	9	3	9	0	0	9	0	1	7	9	7	5

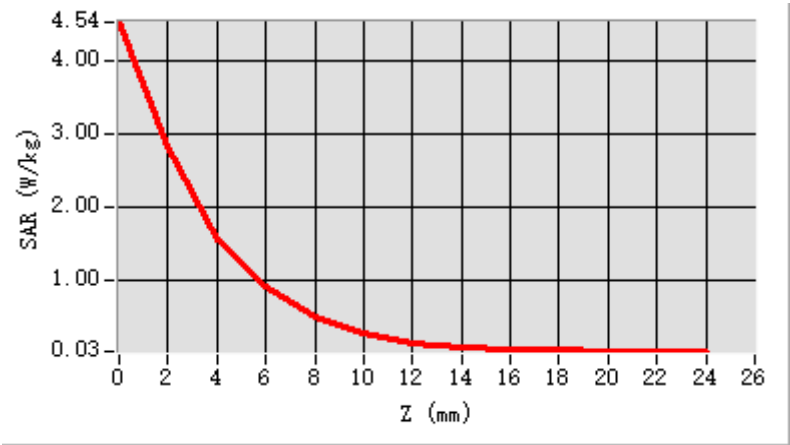

F. 3D Image

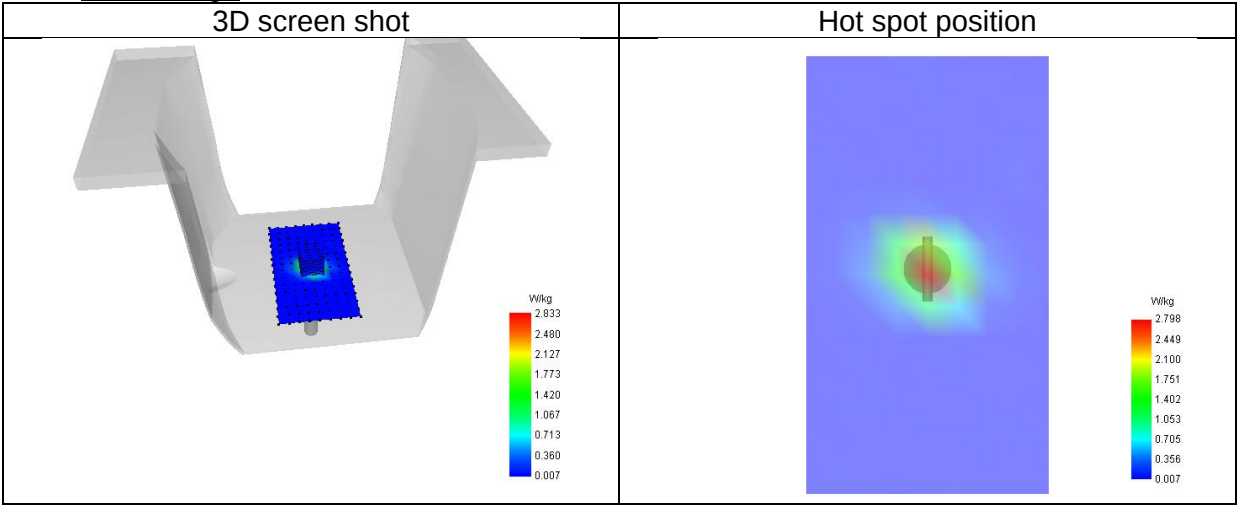

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1GSM 850 Body
MEASUREMENT 2GSM 1900 Body
MEASUREMENT 3WCDMA Band 2 Body
MEASUREMENT 4WCDMA Band 4 Body
MEASUREMENT 5WCDMA Band 5 Body
MEASUREMENT 6 WLAN 5.2G Body
MEASUREMENT 7 WLAN 5.8G Body
MEASUREMENT 8 WLAN 2.4G Body
MEASUREMENT 9LTE Band 2 Body
MEASUREMENT 10LTE Band 4 Body
MEASUREMENT 11LTE Band 5 Body
MEASUREMENT 12LTE Band 7 Body
MEASUREMENT 13LTE Band 12 Body
MEASUREMENT 14LTE Band 17 Body
MEASUREMENT 15LTE Band 25 Body
MEASUREMENT 16LTE Band 26a Body
MEASUREMENT 17LTE Band 26b Body
MEASUREMENT 18LTE Band 38 Body
MEASUREMENT 19LTE Band 41 Body
MEASUREMENT 20LTE Band 66 Body

1# SAR Measurement at GPRS850 (Body, Validation Plane)


Date of measurement: 29/4/2025

A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS850
Signal	TDMA (GPRS)
Channels/Frequency	Middle (189)/ frequency 836.40 Mhz
Modulation	GMSK (CS-4)
TX-slots	4

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	42.46
Relative permittivity (imaginary part)	20.18
Conductivity (S/m)	0.94

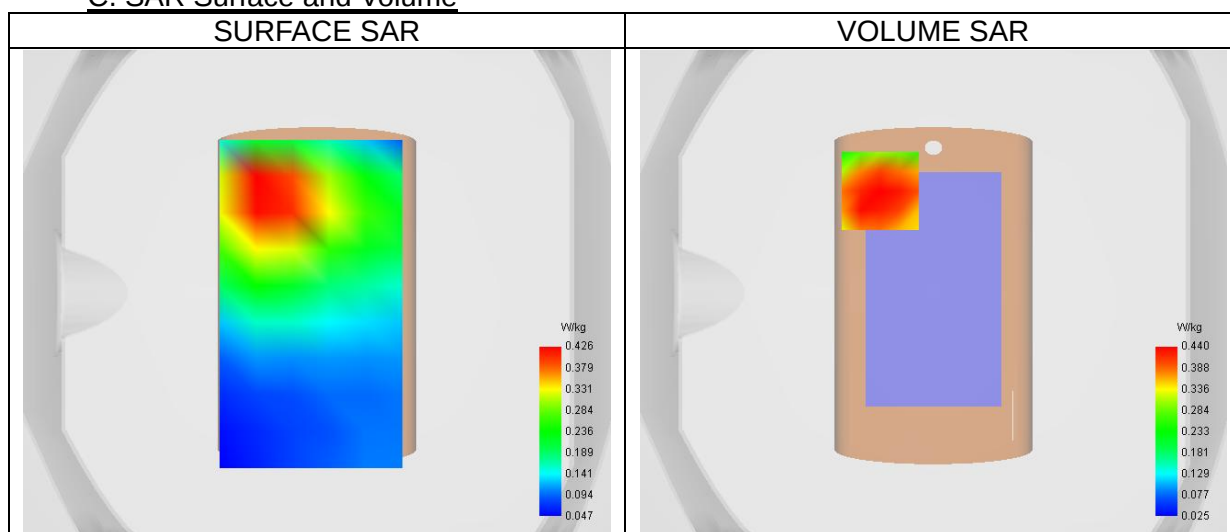C. SAR Surface and Volume


Maximum location: X=-22.00, Y=42.00 ; SAR Peak: 0.60 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.287
SAR 1g (W/Kg)	0.439
Variation (%)	-0.62
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.601	0.440	0.302	0.223	0.154	0.114	0.079

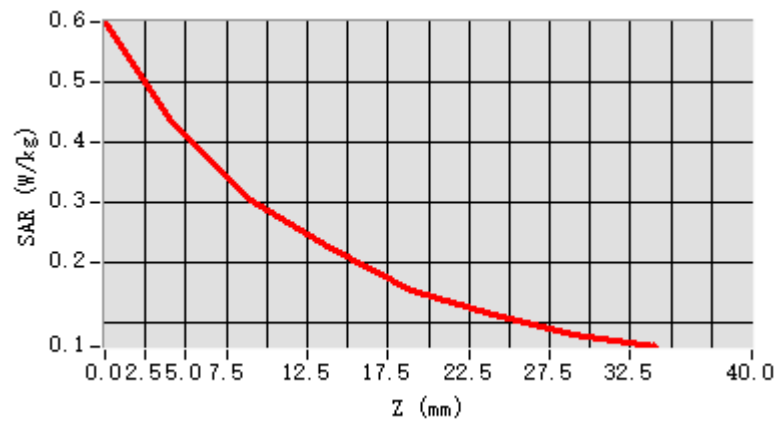

F. 3D Image

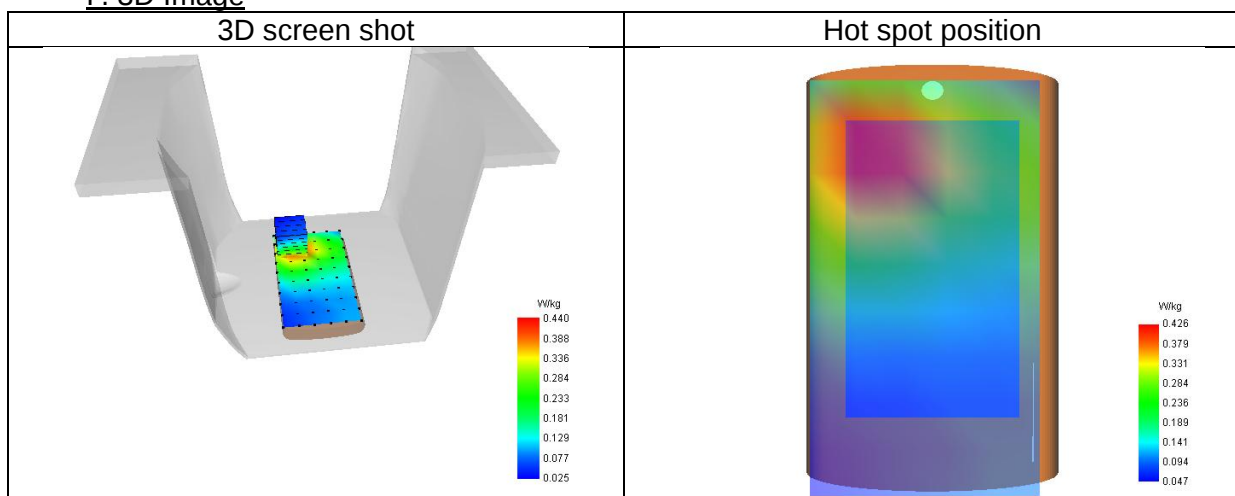

2# SAR Measurement at GPRS1900 (Body, Validation Plane)

Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	GPRS1900
Signal	TDMA (GPRS)
Channels/Frequency	Middle (661)/ frequency 1880.00 Mhz
Modulation	GMSK (CS-4)
TX-slots	4

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	38.86
Relative permittivity (imaginary part)	13.85
Conductivity (S/m)	1.45

C. SAR Surface and Volume

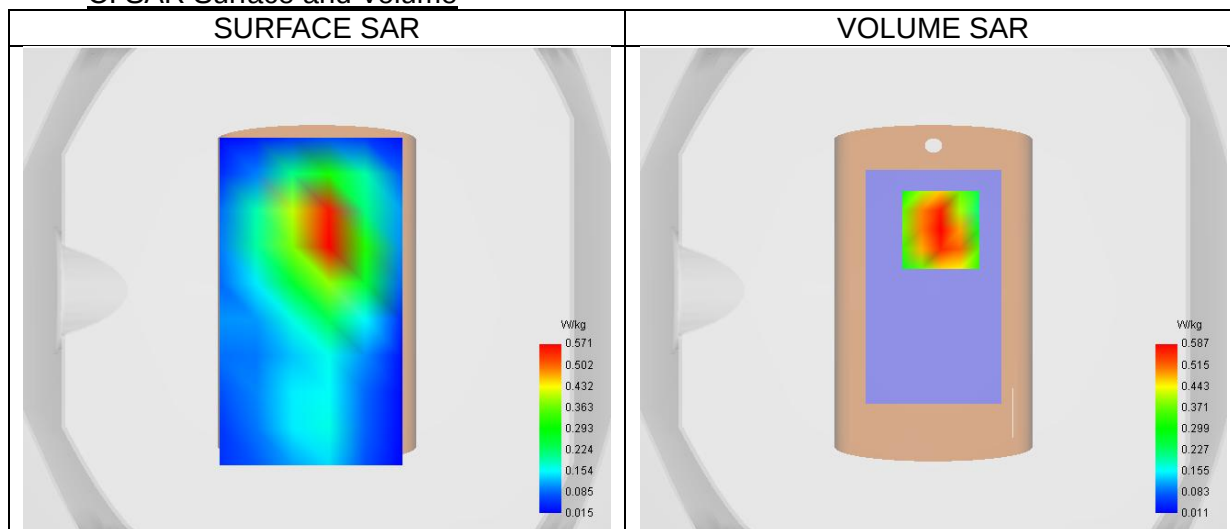


Maximum location: X=3.00, Y=25.00 ; SAR Peak: 0.90 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.320
SAR 1g (W/Kg)	0.571
Variation (%)	-2.17
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	60.30

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.878	0.587	0.342	0.210	0.116	0.071	0.042

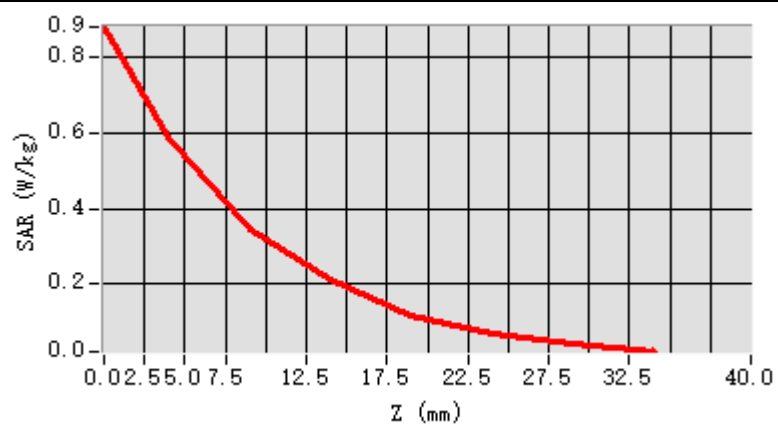

F. 3D Image

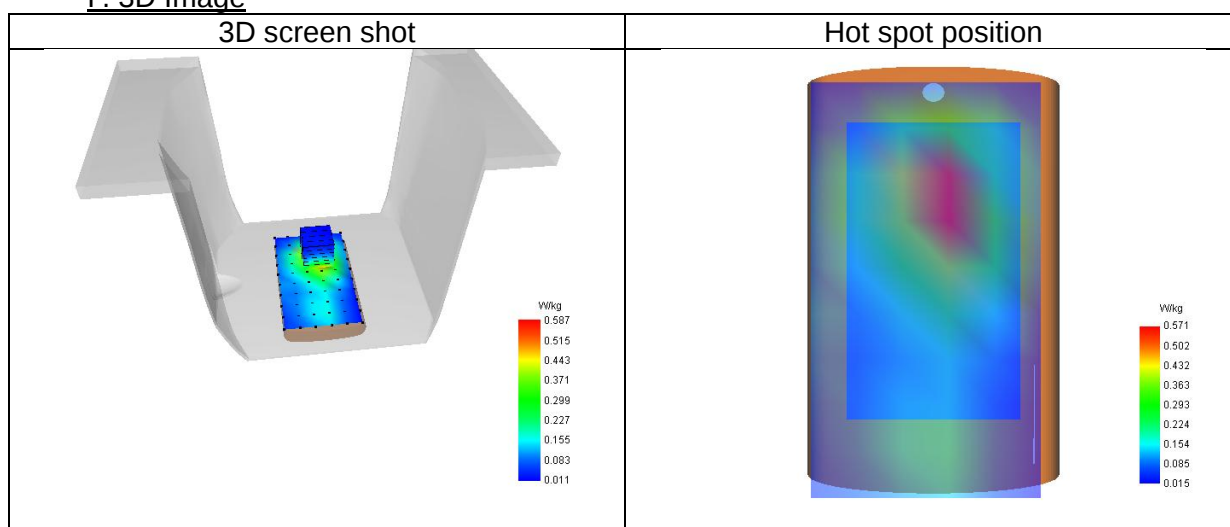

3# SAR Measurement at Band 2 (1900) (Body, Validation Plane)

Date of measurement: 28/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Signal	WCDMA
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	38.86
Relative permittivity (imaginary part)	13.85
Conductivity (S/m)	1.45

C. SAR Surface and Volume

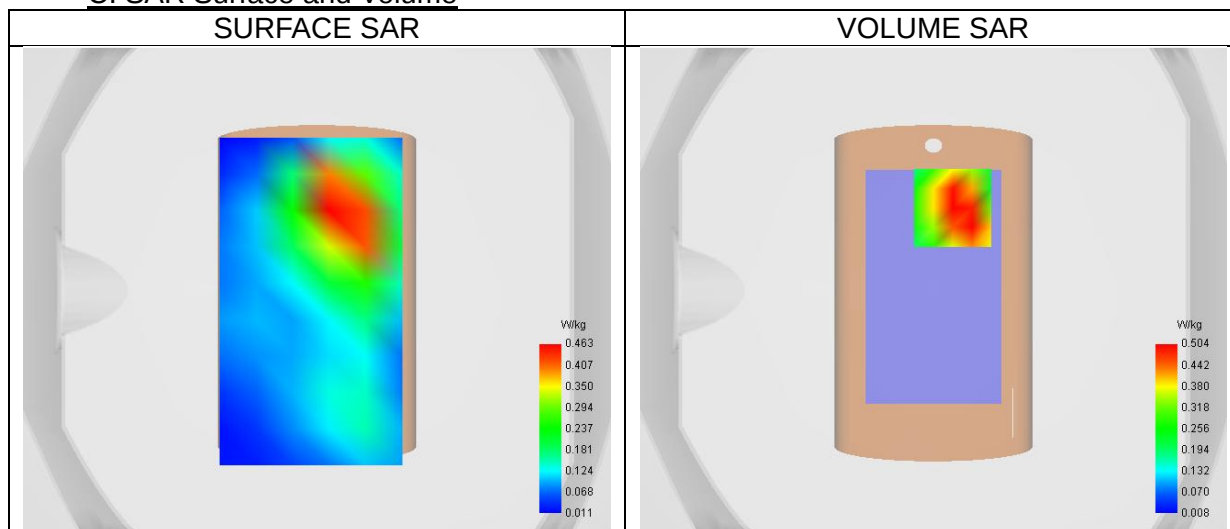


Maximum location: X=8.00, Y=34.00 ; SAR Peak: 0.81 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.274
SAR 1g (W/Kg)	0.507
Variation (%)	-0.39
Horizontal validation criteria: minimum distance (mm)	17.89
Vertical validation criteria: SAR ratio M2/M1 (%)	61.04

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.764	0.504	0.294	0.175	0.104	0.058	0.035

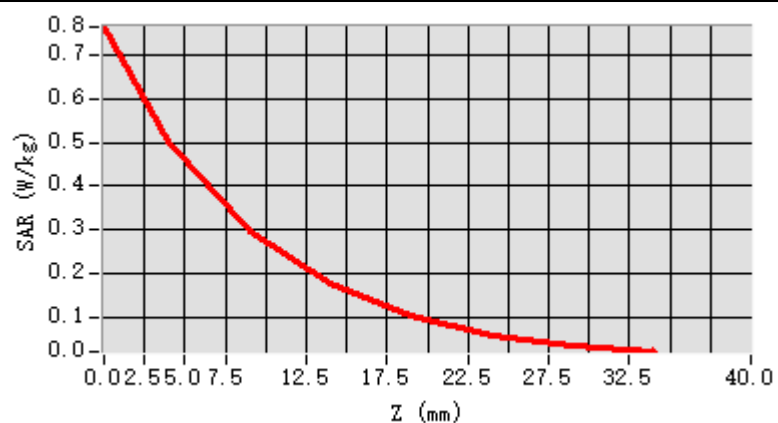

F. 3D Image

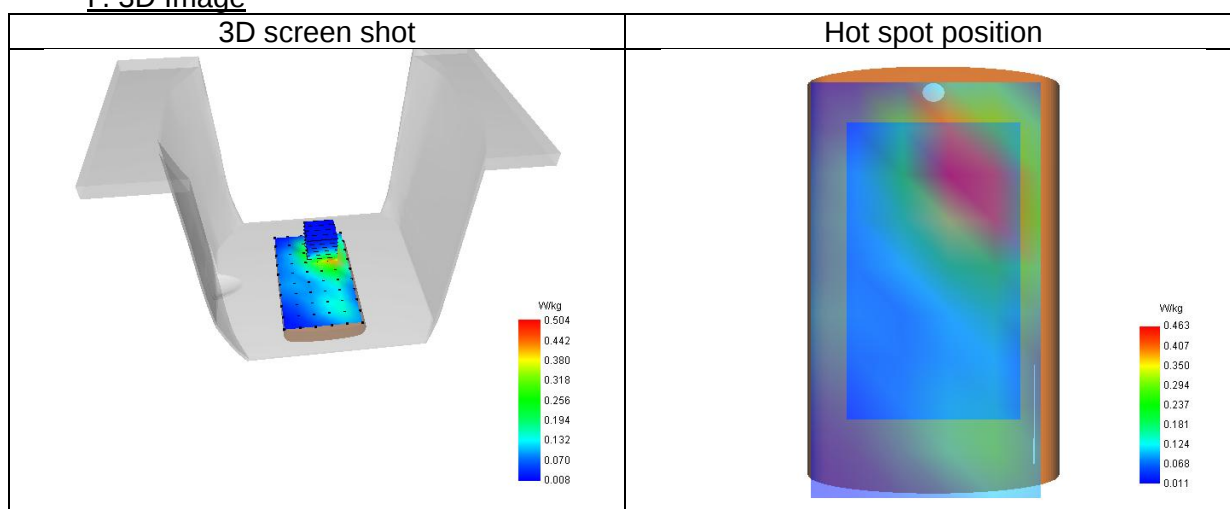

4# SAR Measurement at Band 4 (1700) (Body, Validation Plane)

Date of measurement: 27/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Signal	WCDMA
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.52
Relative permittivity (imaginary part)	14.25
Conductivity (S/m)	1.37

C. SAR Surface and Volume

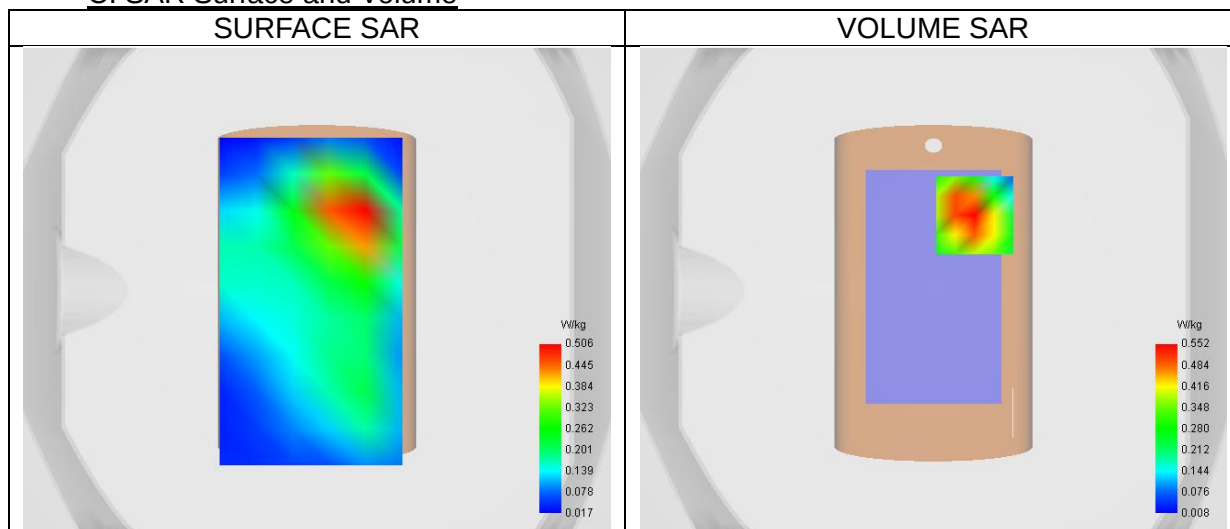


Maximum location: X=17.00, Y=31.00 ; SAR Peak: 0.84 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.291
SAR 1g (W/Kg)	0.522
Variation (%)	-0.53
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	59.41

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.820	0.552	0.328	0.198	0.117	0.069	0.043

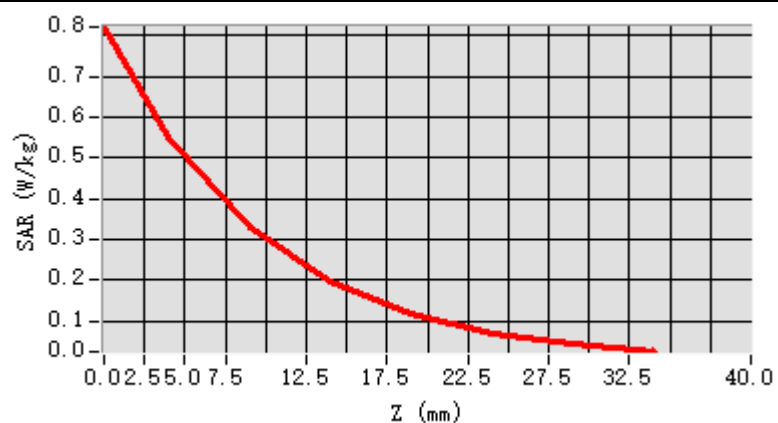

F. 3D Image

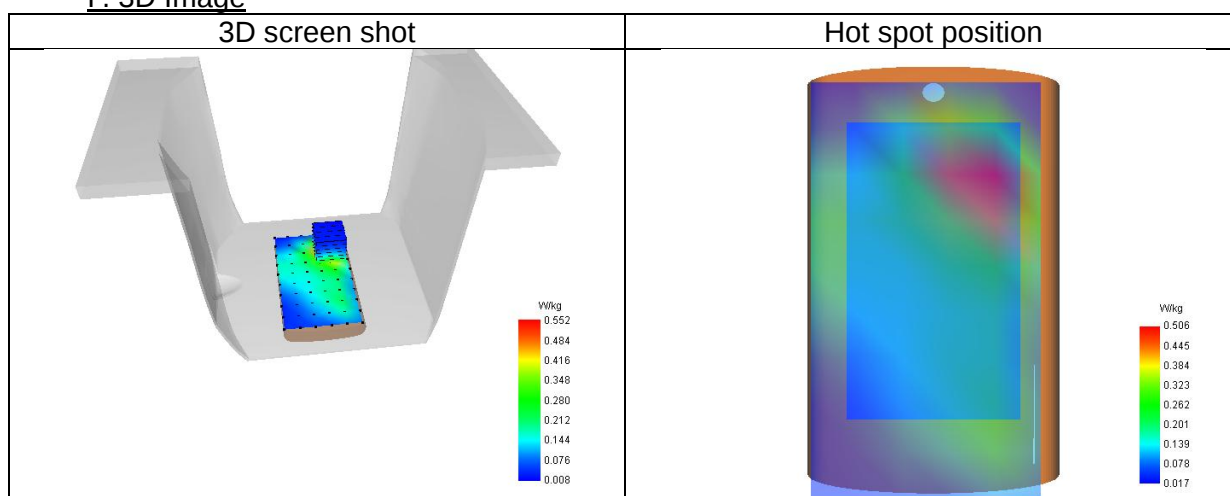

5# SAR Measurement at Band 5 (850) (Body, Validation Plane)

Date of measurement: 29/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Signal	WCDMA
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz
Mode	Release 99
Connection Type	RMC, 12.2 kbps

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	42.46
Relative permittivity (imaginary part)	20.18
Conductivity (S/m)	0.94

C. SAR Surface and Volume

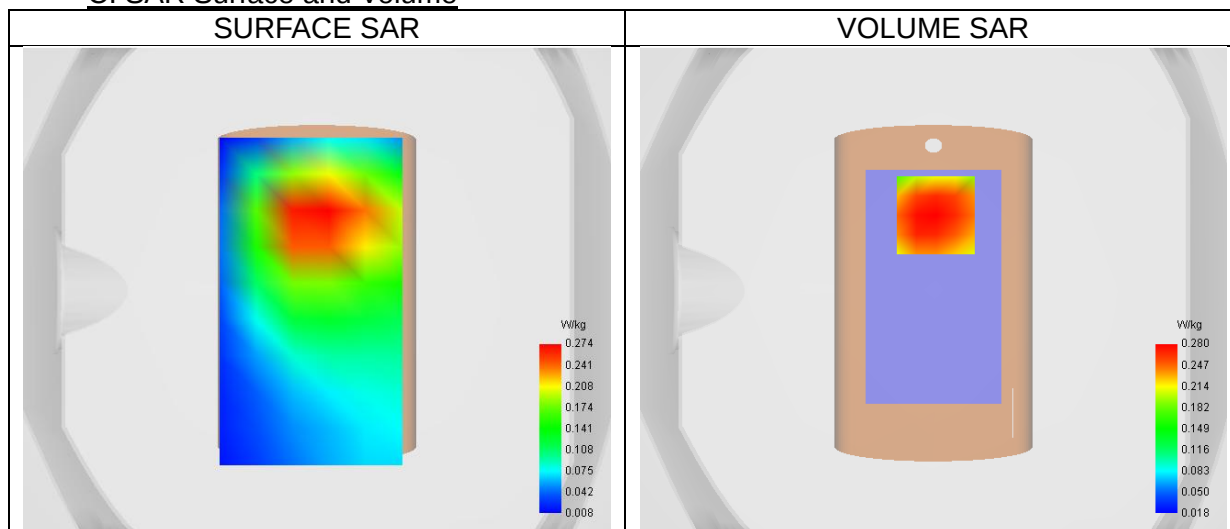


Maximum location: X=1.00, Y=31.00 ; SAR Peak: 0.37 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.189
SAR 1g (W/Kg)	0.279
Variation (%)	-2.15
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.363	0.280	0.203	0.147	0.107	0.076	0.054

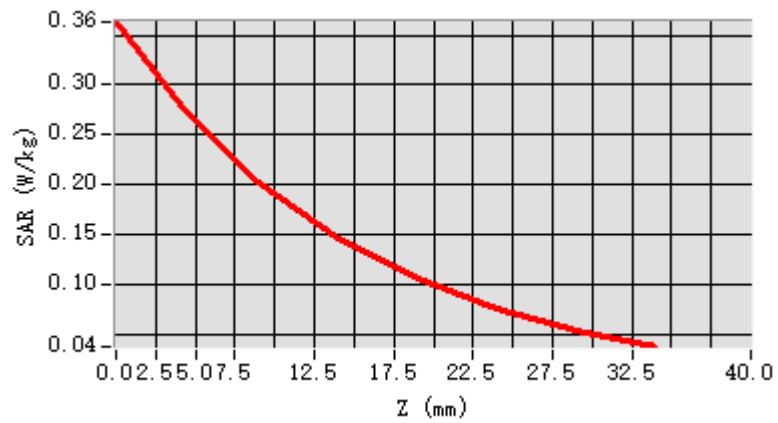

F. 3D Image

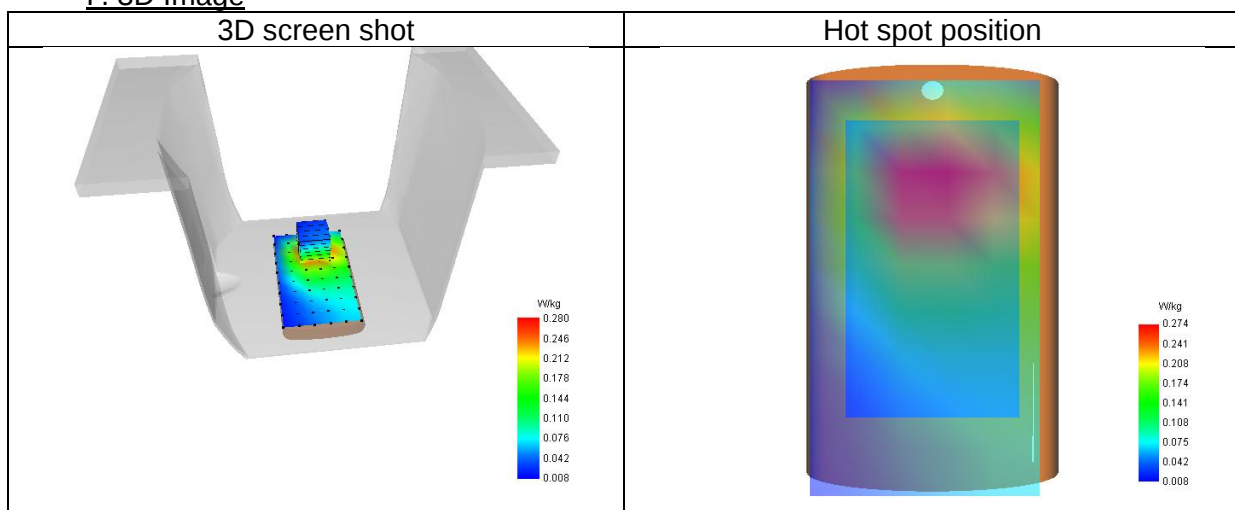

6# SAR Measurement at U-NII-1 (Body, Validation Plane)

Date of measurement: 13/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.89
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Signal	IEEE 802.11 a
Channels/Frequency	Middle (40)/ frequency 5200.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5200.00
Relative permittivity (real part)	34.90
Relative permittivity (imaginary part)	15.97
Conductivity (S/m)	4.62

C. SAR Surface and Volume

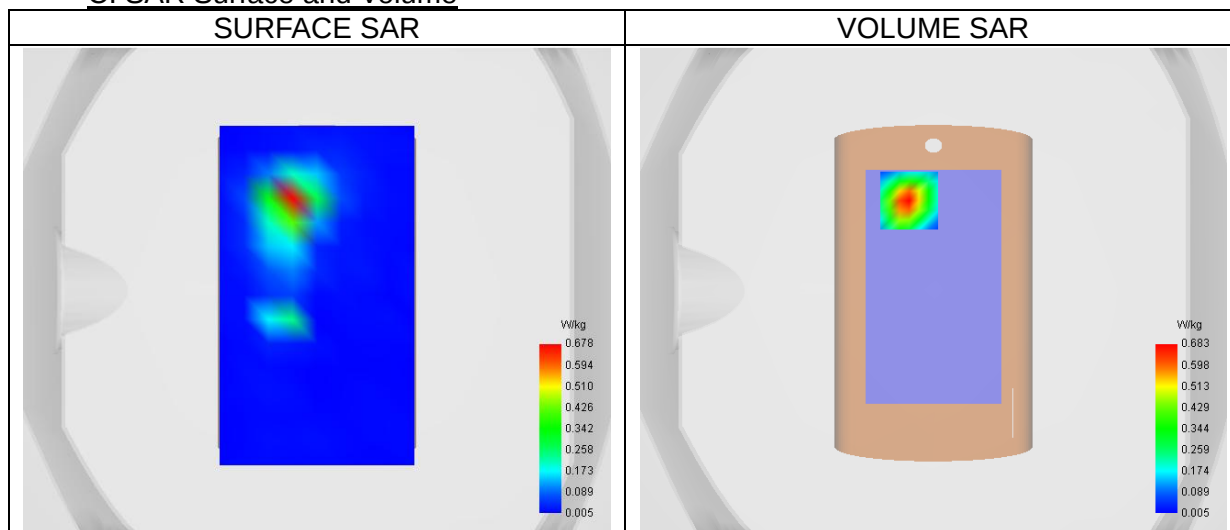


Maximum location: X=-10.00, Y=37.00 ; SAR Peak: 1.15 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.126
SAR 1g (W/Kg)	0.379
Variation (%)	0.63
Horizontal validation criteria: minimum distance (mm)	8.00
Vertical validation criteria: SAR ratio M2/M1 (%)	55.89

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	1.11	0.68	0.38	0.20	0.11	0.06	0.03	0.01	0.01	0.01	0.00	0.00
	7	3	2	1	7	5	8	8	5	2	6	6

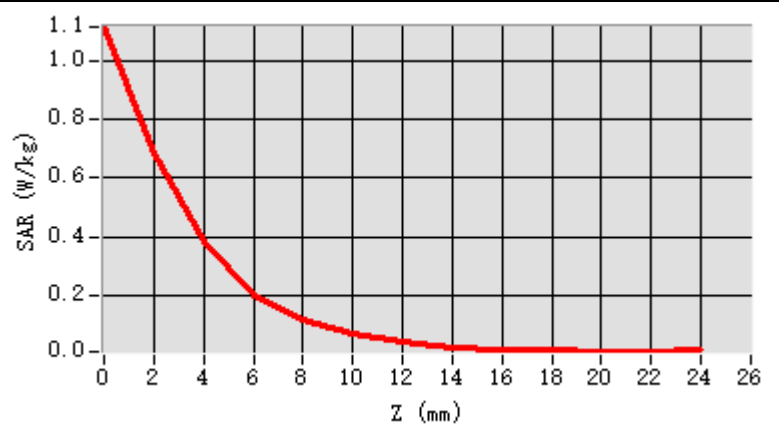

F. 3D Image

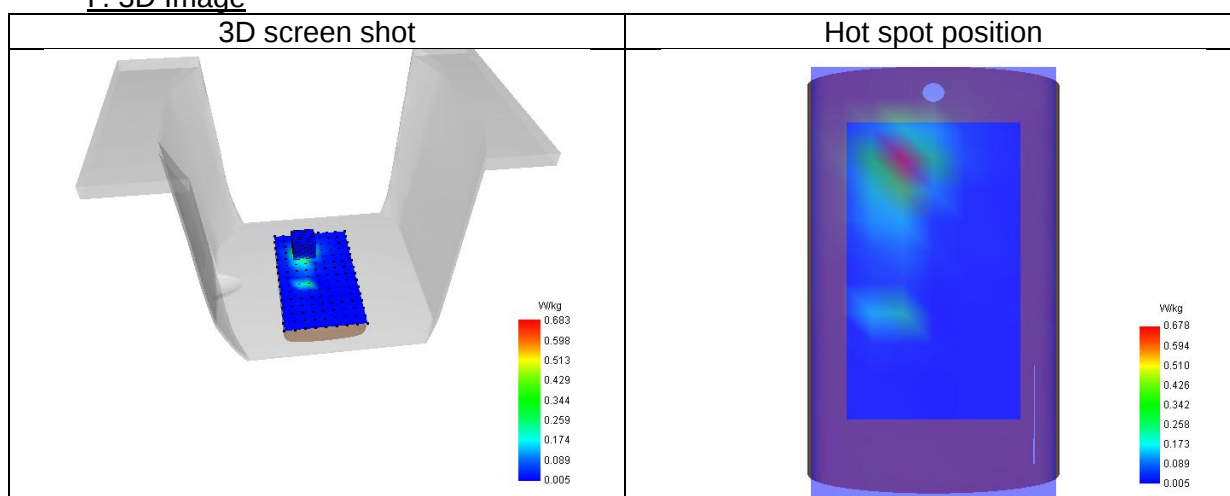

7# SAR Measurement at U-NII-3 (Body, Validation Plane)

Date of measurement: 3/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	1.90
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12, dx=4mm dy=4mm dz=2.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-3
Signal	IEEE 802.11 a
Channels/Frequency	Middle (149)/ frequency 5745.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5745.00
Relative permittivity (real part)	36.15
Relative permittivity (imaginary part)	15.70
Conductivity (S/m)	5.04

C. SAR Surface and Volume

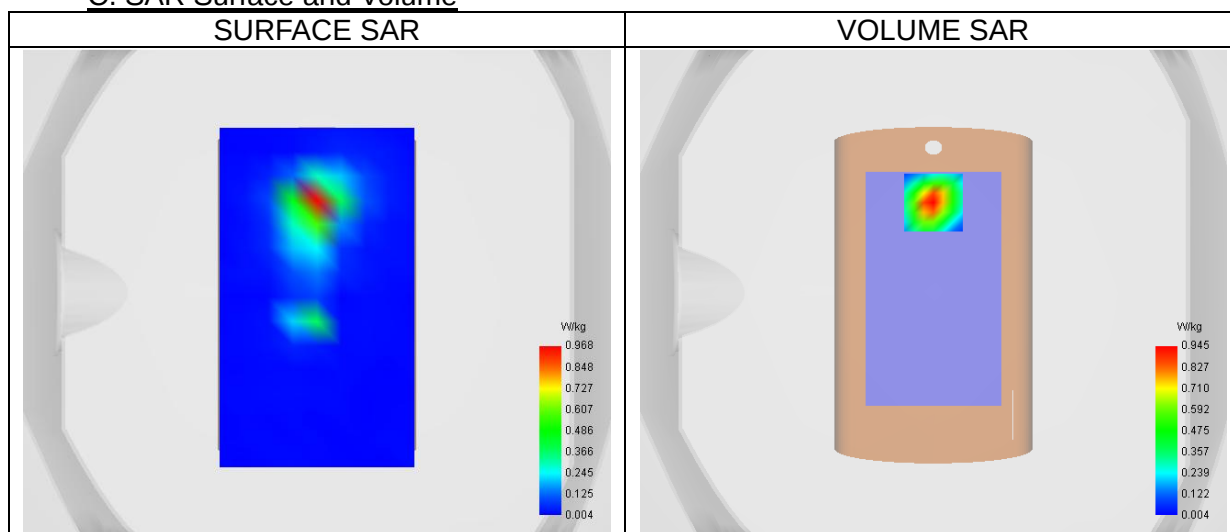


Maximum location: X=0.00, Y=37.00 ; SAR Peak: 1.60 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.171
SAR 1g (W/Kg)	0.523
Variation (%)	3.37
Horizontal validation criteria: minimum distance (mm)	8.94
Vertical validation criteria: SAR ratio M2/M1 (%)	55.15

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.0	12.0	14.0	16.0	18.0	20.0	22.0
						0	0	0	0	0	0	0
SAR (W/Kg)	1.52	0.94	0.52	0.29	0.15	0.08	0.04	0.02	0.02	0.01	0.01	0.01
	4	5	1	6	7	6	6	5	2	6	3	3

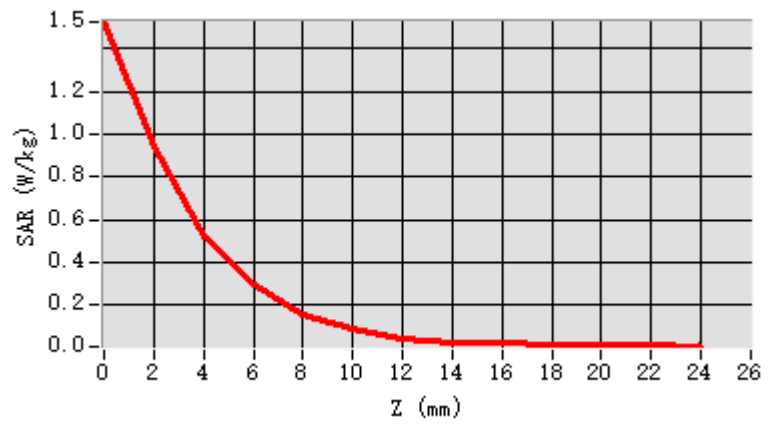

F. 3D Image

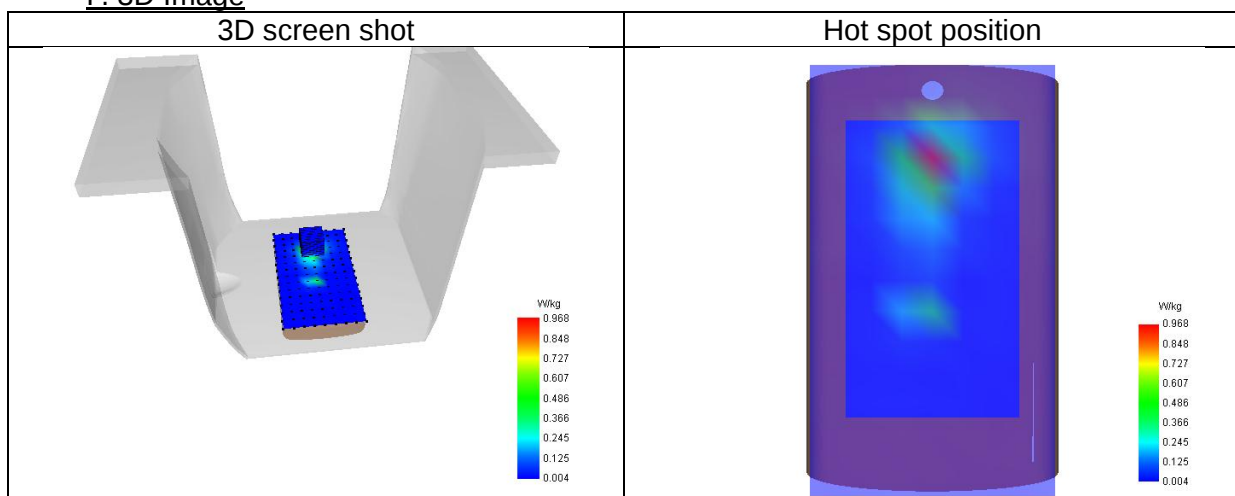

8# SAR Measurement at ISM (Body, Validation Plane)

Date of measurement: 2/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.74
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Signal	IEEE 802.11 b
Channels/Frequency	Middle (6)/ frequency 2437.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2437.00
Relative permittivity (real part)	38.48
Relative permittivity (imaginary part)	13.13
Conductivity (S/m)	1.78

C. SAR Surface and Volume

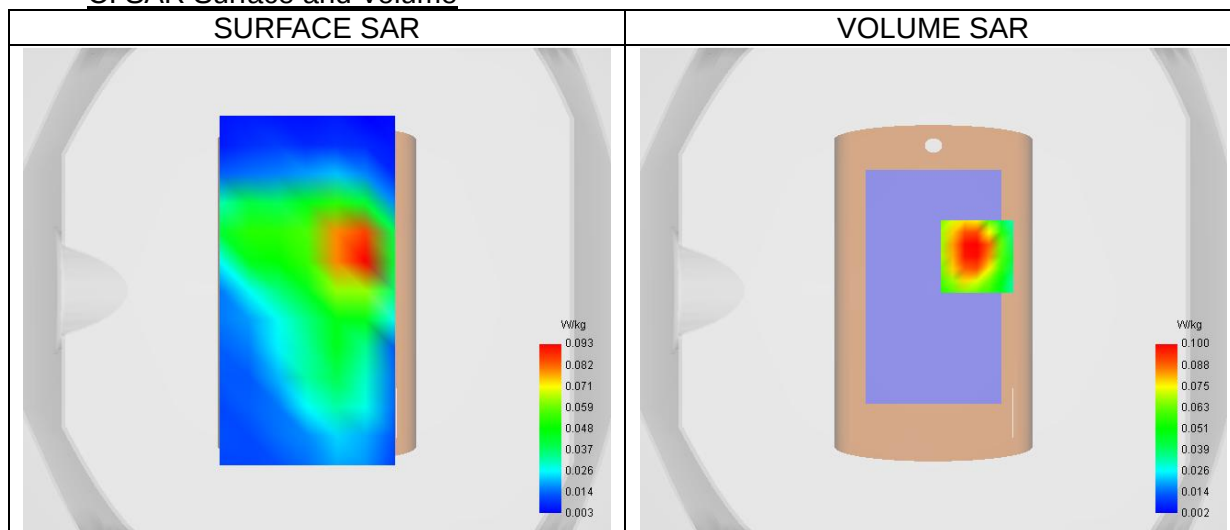


Maximum location: X=18.00, Y=14.00 ; SAR Peak: 0.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.049
SAR 1g (W/Kg)	0.095
Variation (%)	-2.12
Horizontal validation criteria: minimum distance (mm)	14.14
Vertical validation criteria: SAR ratio M2/M1 (%)	53.89

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.169	0.100	0.049	0.028	0.014	0.009	0.006

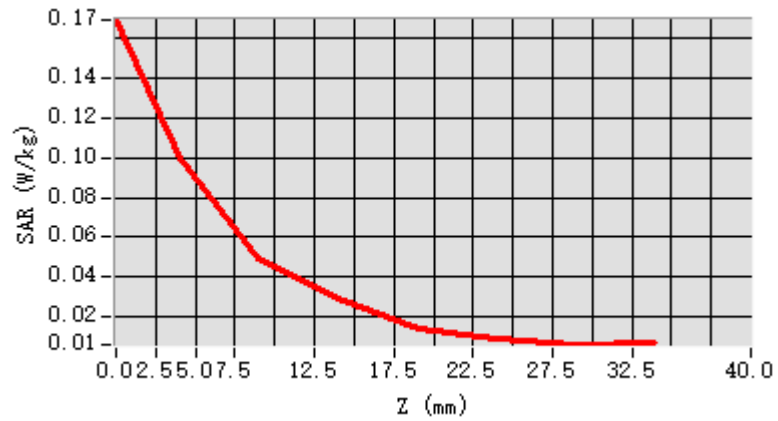

F. 3D Image

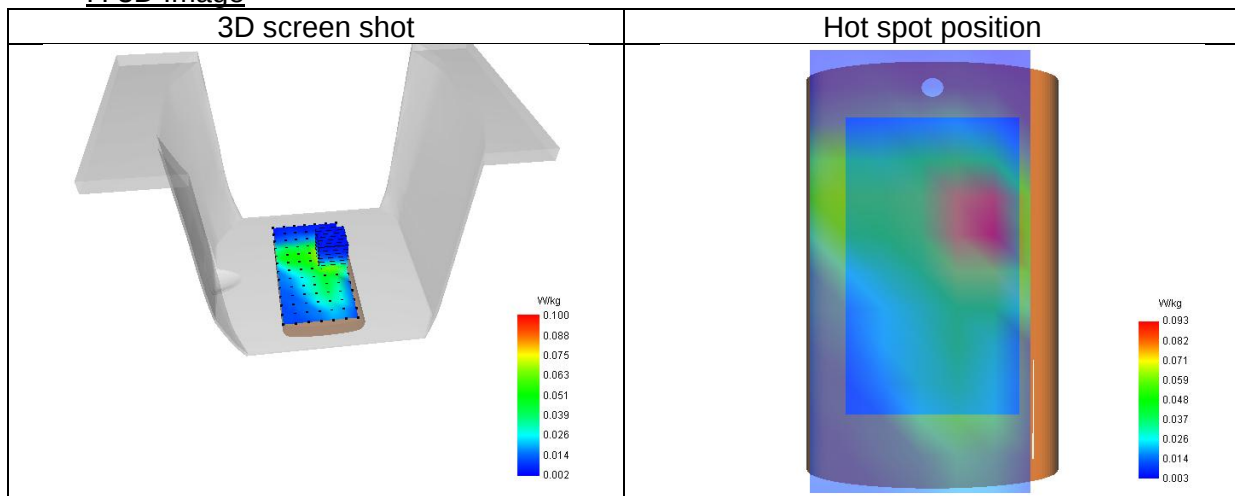

9# SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 30/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (18900)/ frequency 1880.00 Mhz
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	1880.00

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	38.66
Relative permittivity (imaginary part)	13.86
Conductivity (S/m)	1.45

C. SAR Surface and Volume

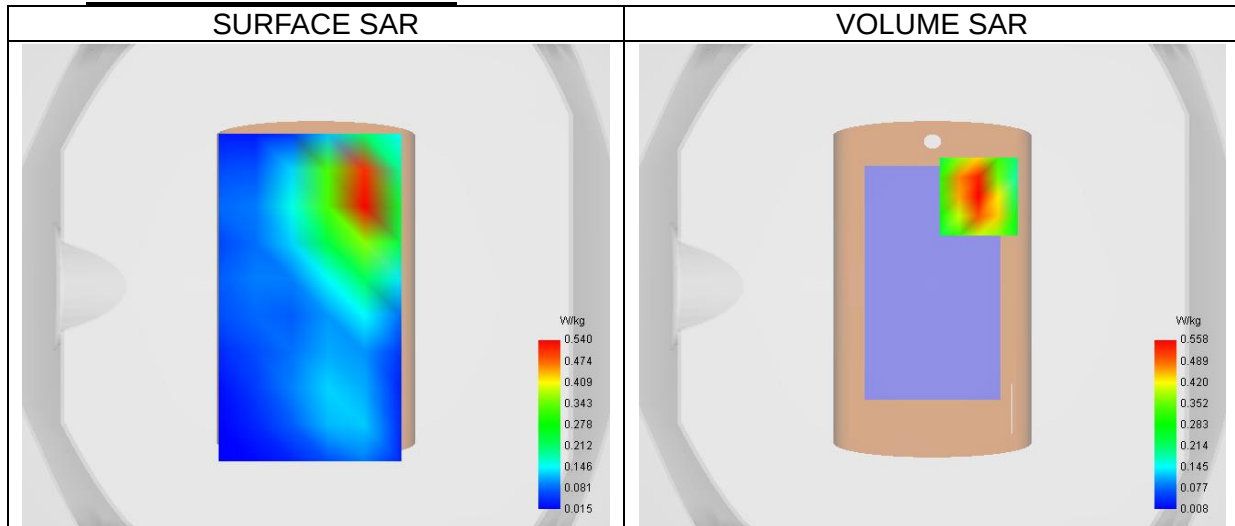


Maximum location: X=19.00, Y=37.00 ; SAR Peak: 0.87 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.293
SAR 1g (W/Kg)	0.540
Variation (%)	-0.40
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	57.67

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.849	0.558	0.322	0.190	0.109	0.067	0.038

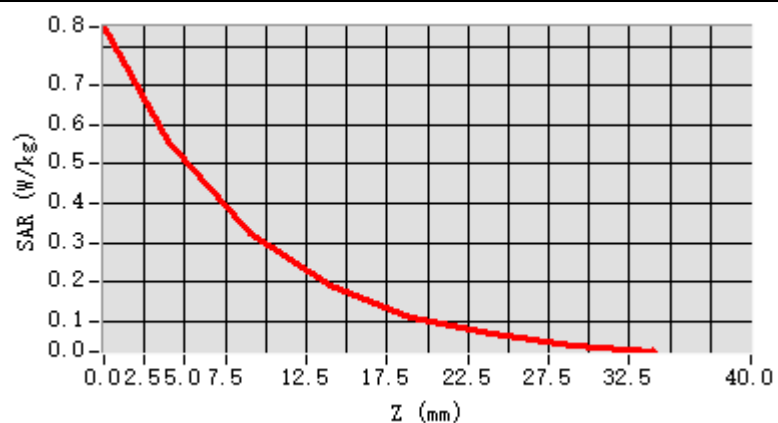

F. 3D Image

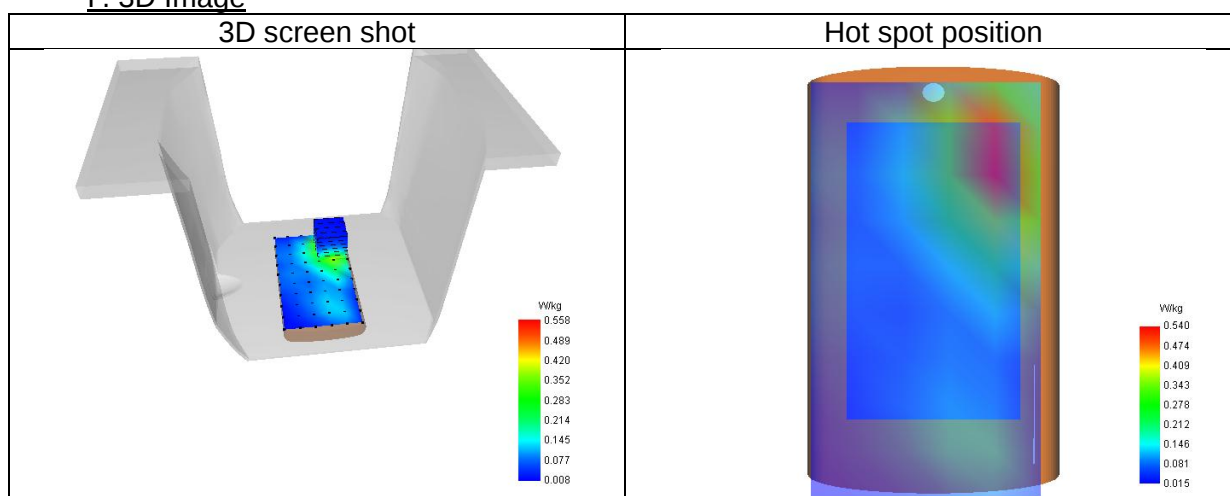

10# SAR Measurement at LTE band 4 (Body, Validation Plane)

Date of measurement: 27/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (20175)/ frequency 1732.50 Mhz
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	1732.50

B. Permittivity

Middle TX Frequency (MHz)	1732.50
Relative permittivity (real part)	40.52
Relative permittivity (imaginary part)	14.26
Conductivity (S/m)	1.37

C. SAR Surface and Volume

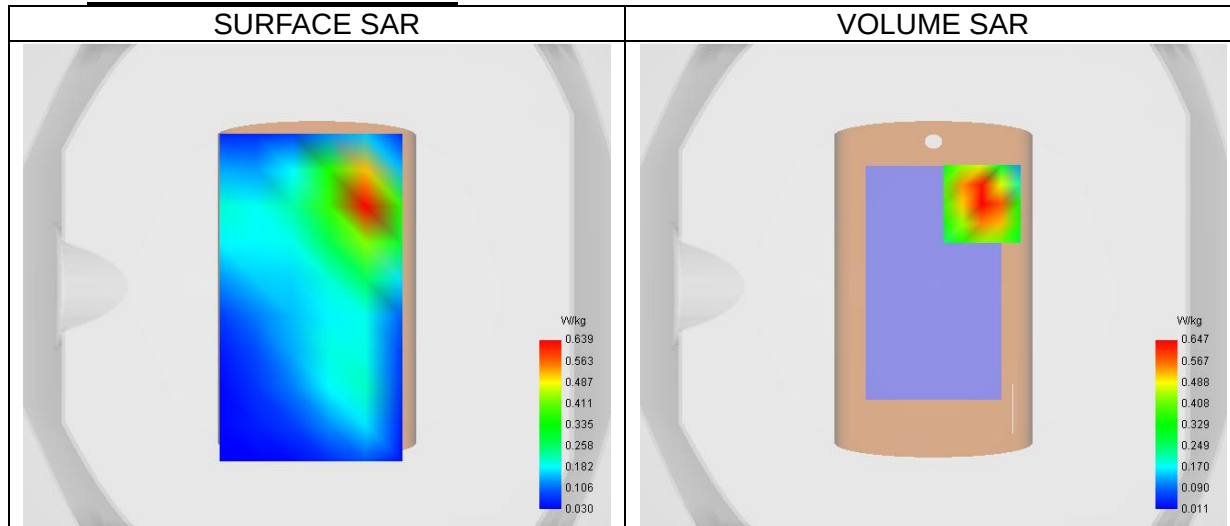


Maximum location: X=20.00, Y=34.00 ; SAR Peak: 1.01 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.343
SAR 1g (W/Kg)	0.623
Variation (%)	-0.87
Horizontal validation criteria: minimum distance (mm)	17.89
Vertical validation criteria: SAR ratio M2/M1 (%)	60.03

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.964	0.647	0.388	0.237	0.145	0.086	0.050

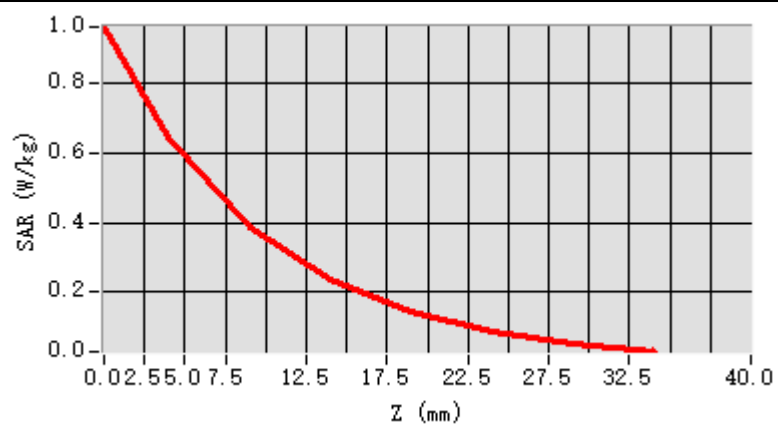

F. 3D Image

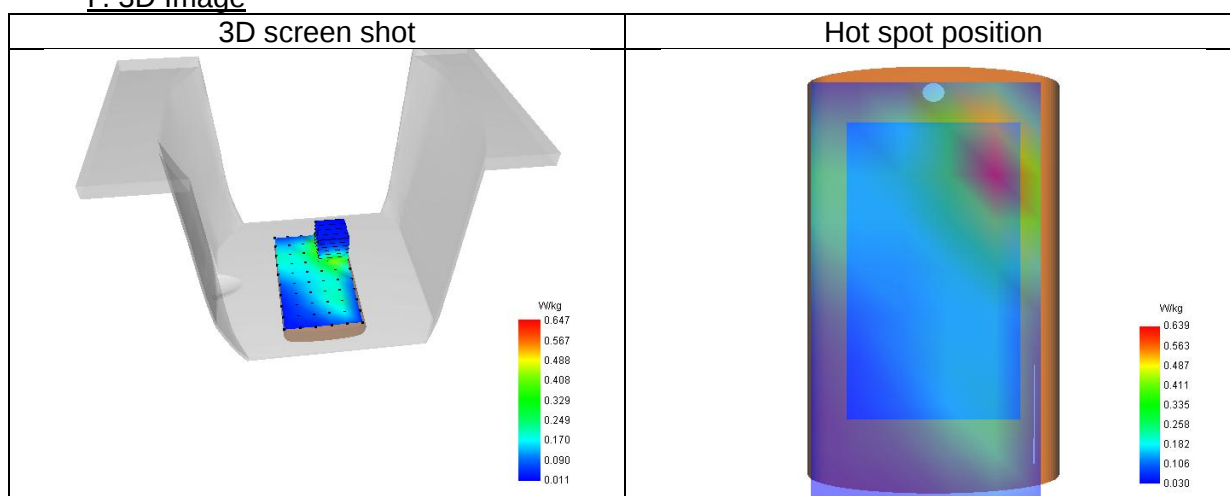

11# SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 29/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (20525)/ frequency 836.50 Mhz
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	836.50

B. Permittivity

Middle TX Frequency (MHz)	836.50
Relative permittivity (real part)	42.46
Relative permittivity (imaginary part)	20.18
Conductivity (S/m)	0.94

C. SAR Surface and Volume

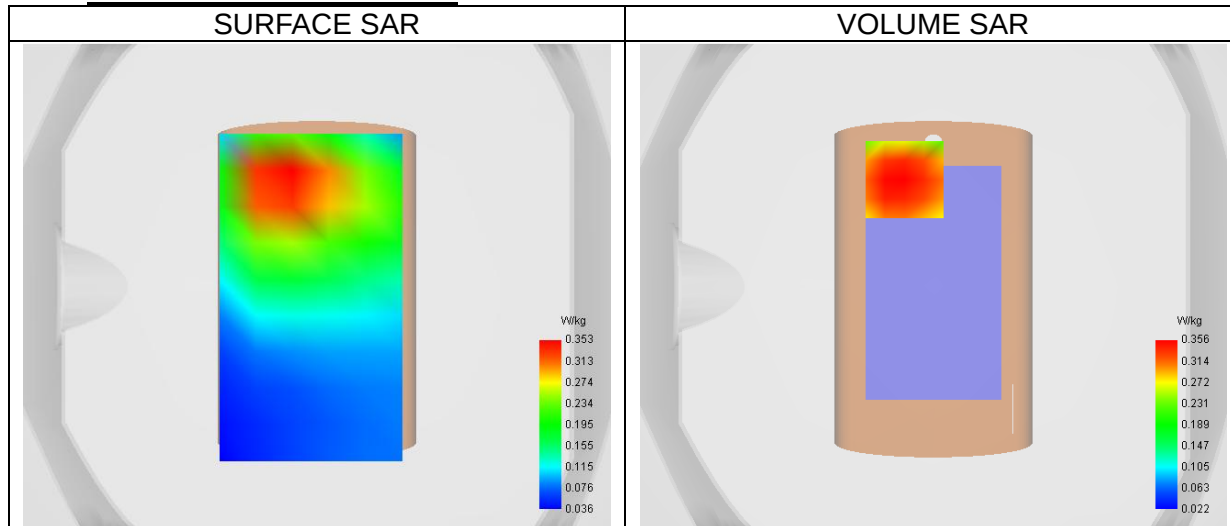


Maximum location: X=-12.00, Y=44.00 ; SAR Peak: 0.47 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.242
SAR 1g (W/Kg)	0.355
Variation (%)	-0.42
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.451	0.356	0.262	0.190	0.137	0.100	0.070

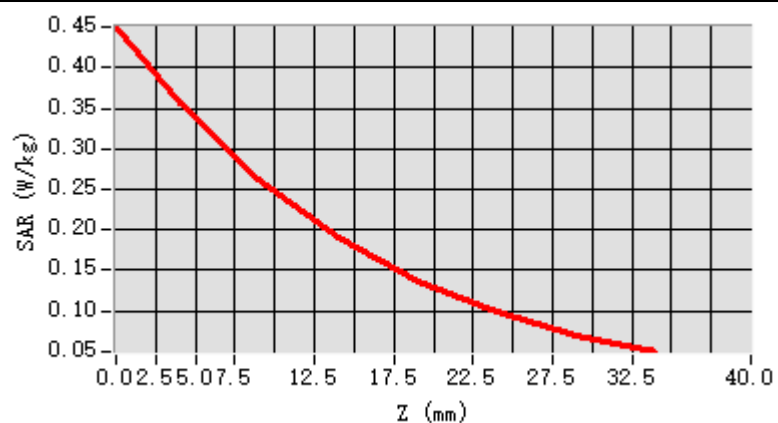

F. 3D Image

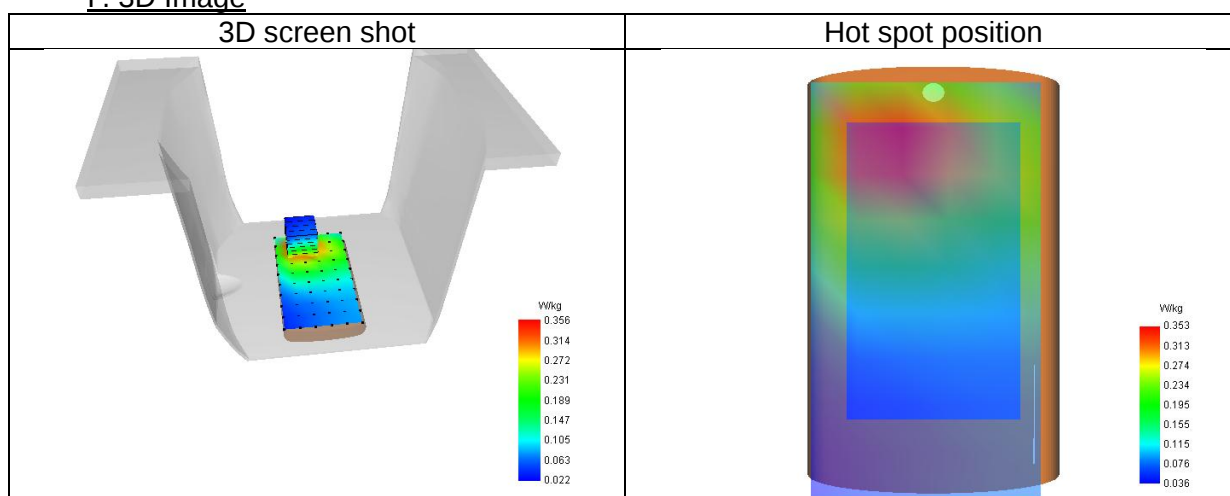

12# SAR Measurement at LTE band 7 (Body, Validation Plane)

Date of measurement: 1/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 7
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (21100)/ frequency 2535.00 Mhz
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	2530.50

B. Permittivity

Middle TX Frequency (MHz)	2530.50
Relative permittivity (real part)	39.84
Relative permittivity (imaginary part)	13.59
Conductivity (S/m)	1.91

C. SAR Surface and Volume

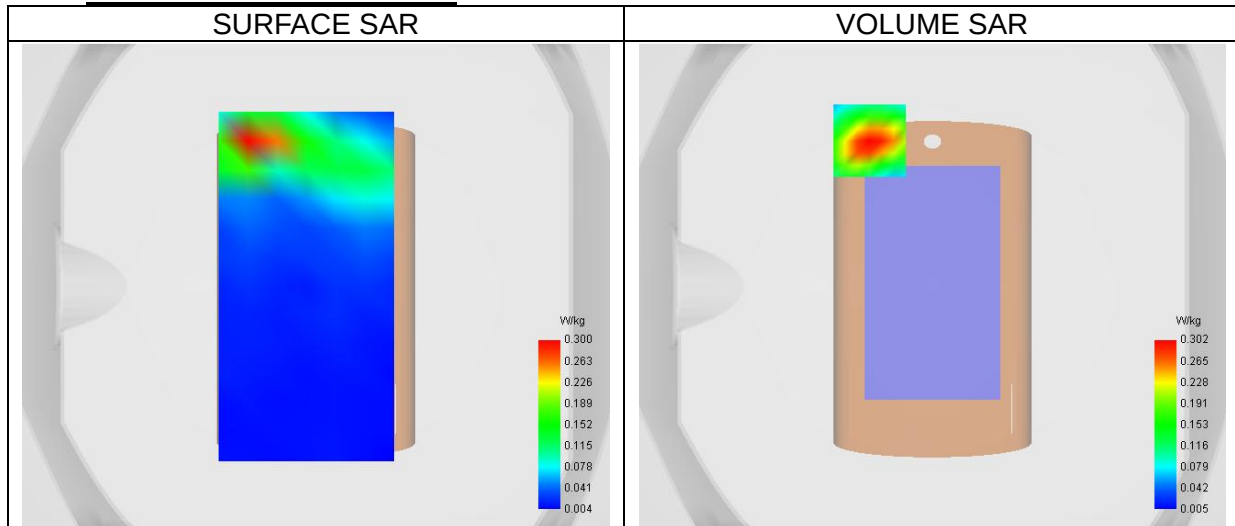


Maximum location: X=-26.00, Y=60.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.135
SAR 1g (W/Kg)	0.277
Variation (%)	-0.44
Horizontal validation criteria: minimum distance (mm)	14.14
Vertical validation criteria: SAR ratio M2/M1 (%)	59.57

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00	20.00	24.00	28.00
SAR (W/Kg)	0.489	0.302	0.180	0.109	0.068	0.039	0.024	0.017

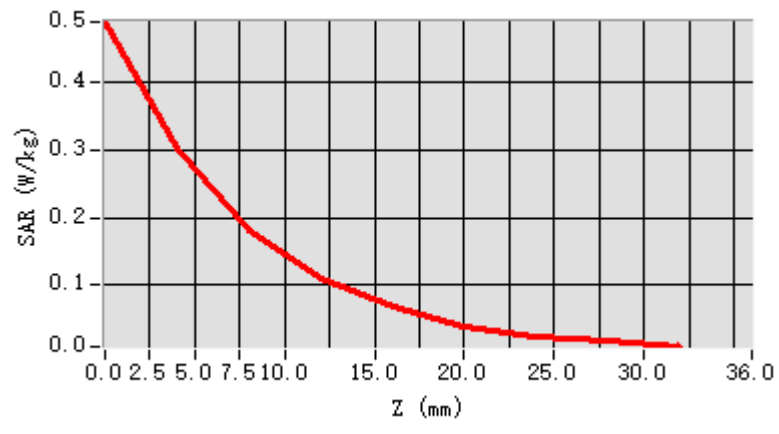

F. 3D Image

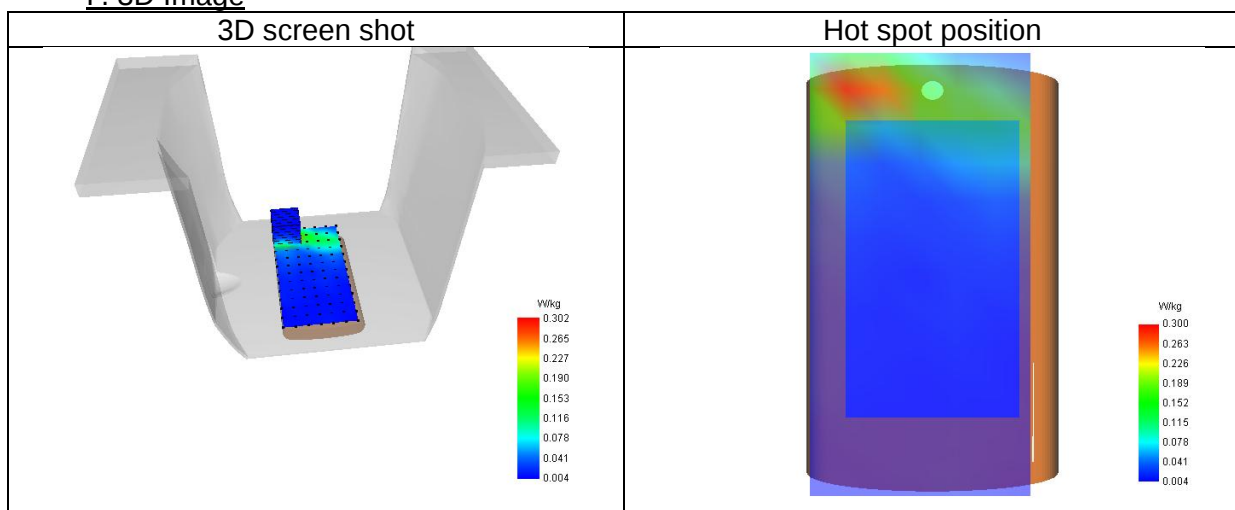

13# SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 25/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.42
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (23095)/ frequency 707.50 Mhz
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	707.50

B. Permittivity

Middle TX Frequency (MHz)	707.50
Relative permittivity (real part)	41.59
Relative permittivity (imaginary part)	21.59
Conductivity (S/m)	0.85

C. SAR Surface and Volume

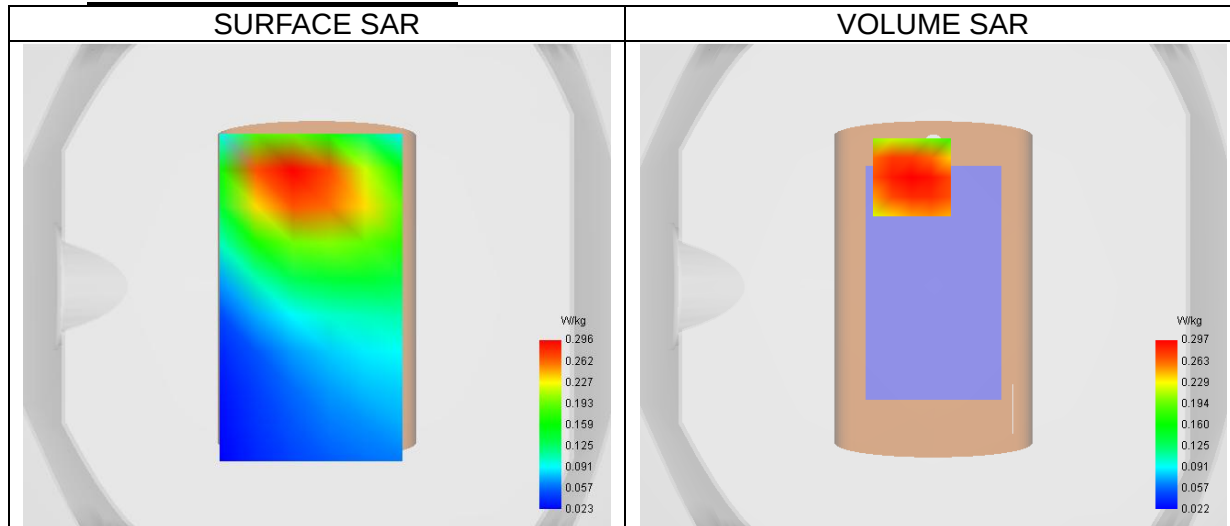


Maximum location: X=-9.00, Y=45.00 ; SAR Peak: 0.39 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.200
SAR 1g (W/Kg)	0.286
Variation (%)	-0.12
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.377	0.297	0.219	0.162	0.119	0.086	0.065

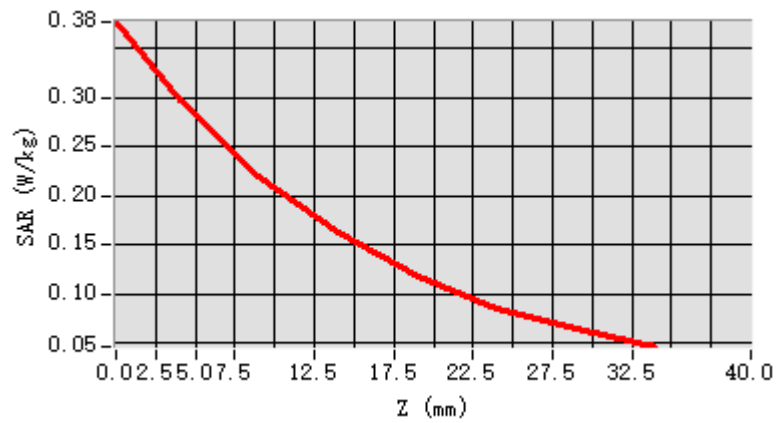

F. 3D Image

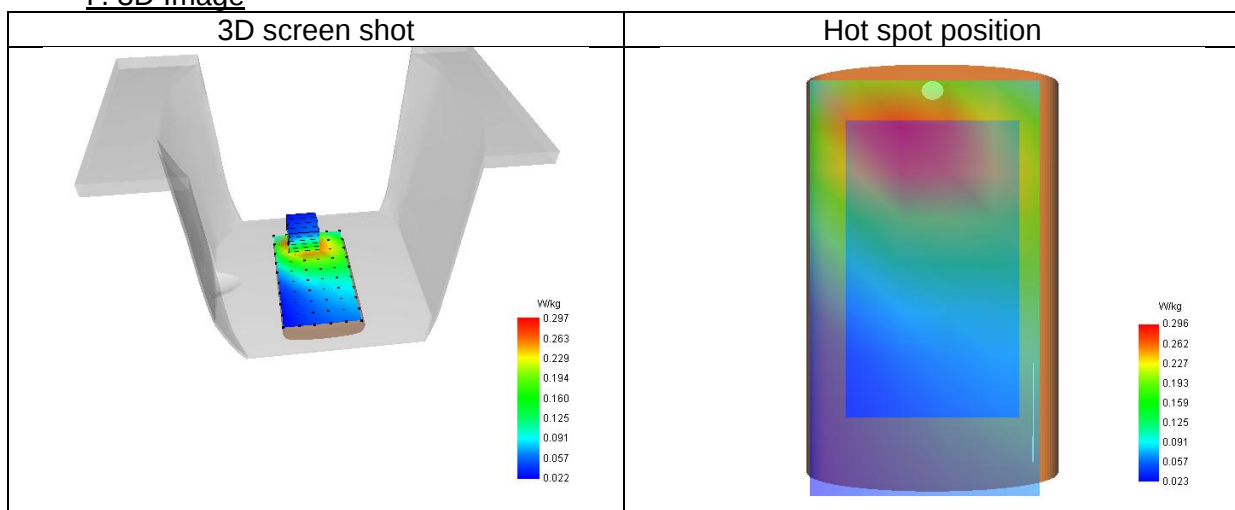

14# SAR Measurement at LTE band 17 (Body, Validation Plane)

Date of measurement: 25/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.42
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 17
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (23790)/ frequency 710.00 Mhz
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	710.00

B. Permittivity

Middle TX Frequency (MHz)	710.00
Relative permittivity (real part)	41.57
Relative permittivity (imaginary part)	21.53
Conductivity (S/m)	0.85

C. SAR Surface and Volume

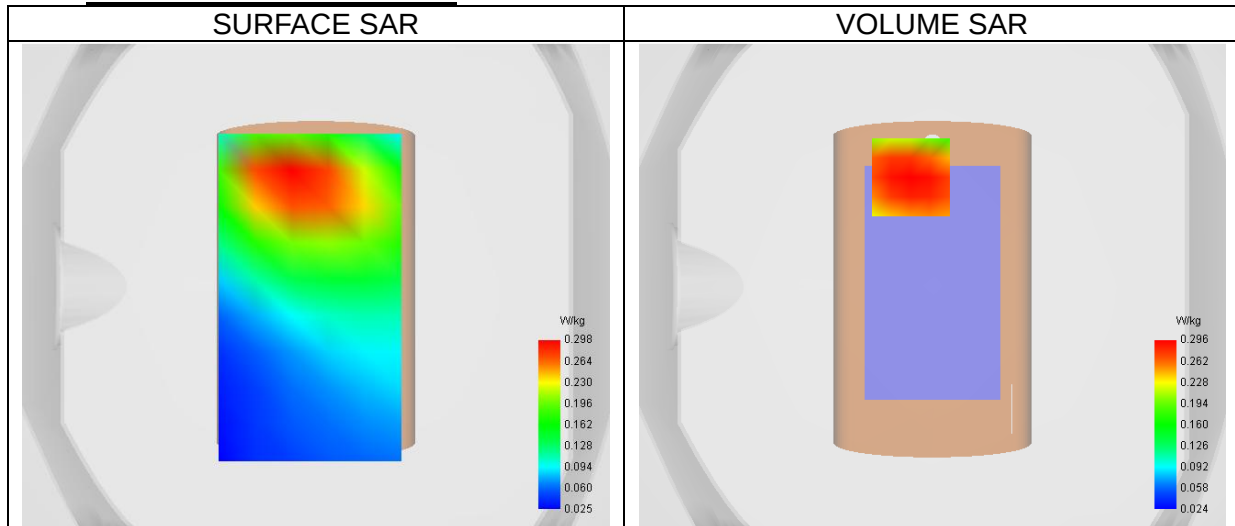


Maximum location: X=-9.00, Y=45.00 ; SAR Peak: 0.38 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.201
SAR 1g (W/Kg)	0.286
Variation (%)	-2.28
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.372	0.296	0.219	0.161	0.118	0.087	0.065

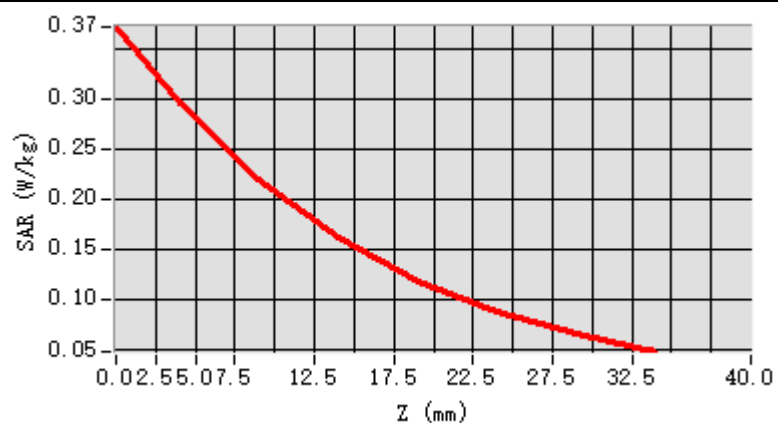

F. 3D Image

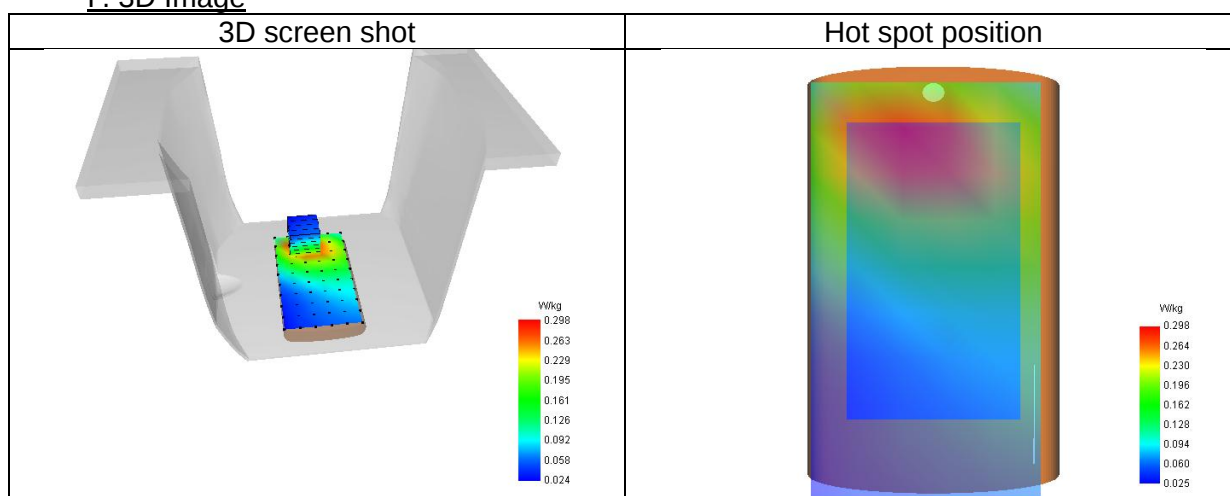

15# SAR Measurement at LTE band 25 (Body, Validation Plane)

Date of measurement: 30/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.57
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 25
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (26365)/ frequency 1882.50 Mhz
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	1882.50

B. Permittivity

Middle TX Frequency (MHz)	1882.50
Relative permittivity (real part)	38.65
Relative permittivity (imaginary part)	13.87
Conductivity (S/m)	1.45

C. SAR Surface and Volume

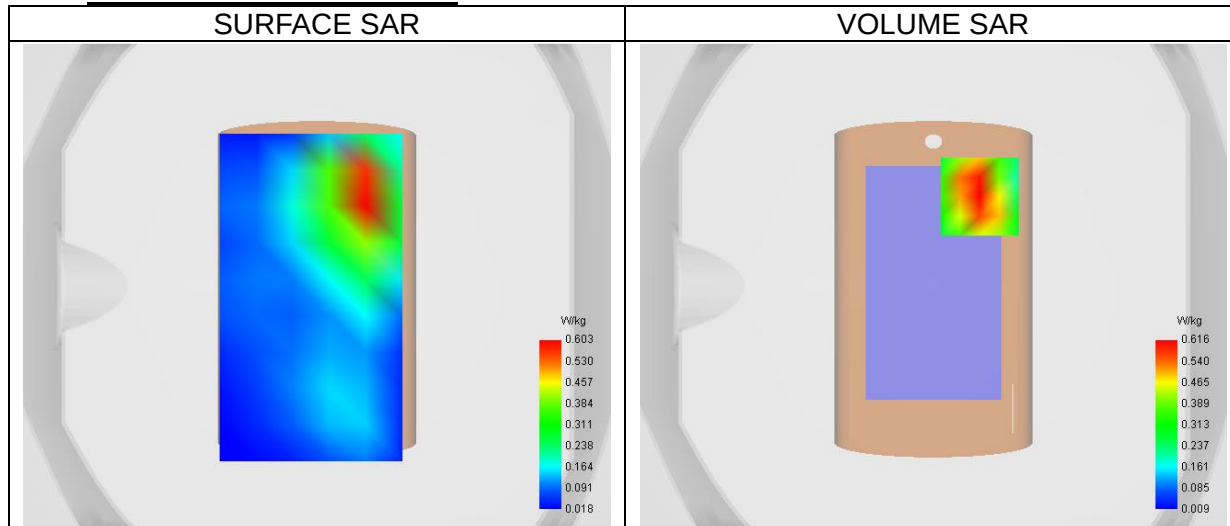


Maximum location: X=19.00, Y=37.00 ; SAR Peak: 0.98 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.326
SAR 1g (W/Kg)	0.602
Variation (%)	-0.91
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	58.05

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.935	0.616	0.358	0.211	0.124	0.073	0.043

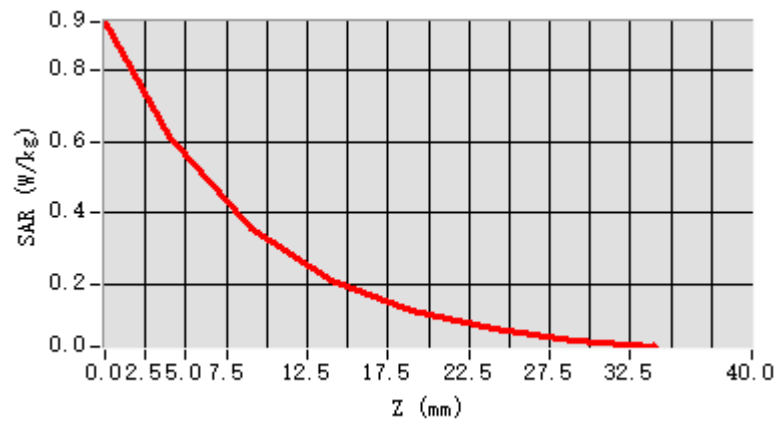

F. 3D Image

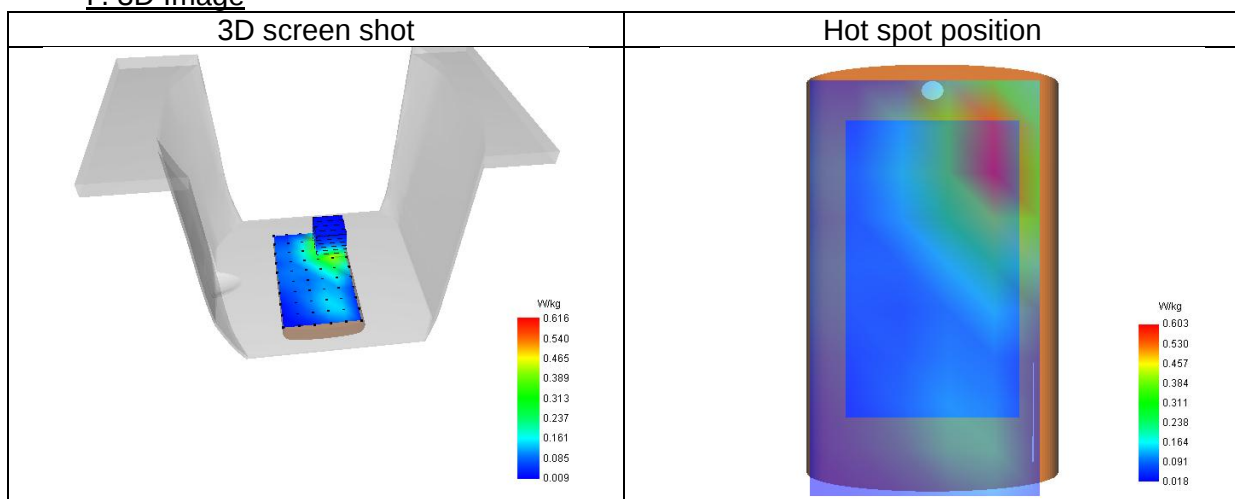

16# SAR Measurement at LTE band 26A (Body, Validation Plane)

Date of measurement: 29/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 26A
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (26740)/ frequency 819.00 Mhz
Cell Bandwidth	10 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	819.00

B. Permittivity

Middle TX Frequency (MHz)	819.00
Relative permittivity (real part)	42.73
Relative permittivity (imaginary part)	20.16
Conductivity (S/m)	0.92

C. SAR Surface and Volume

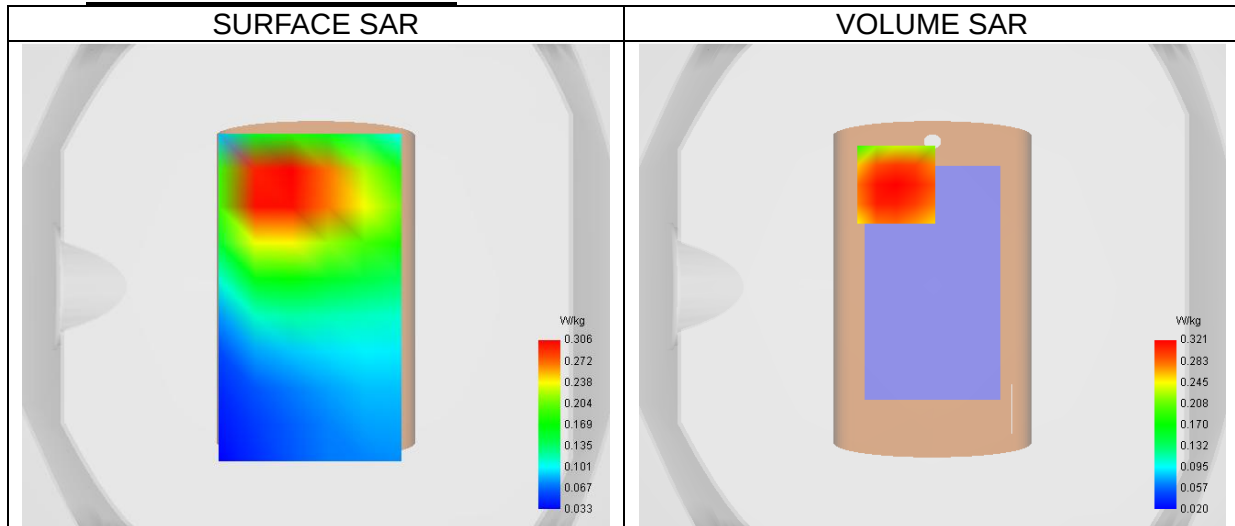


Maximum location: X=-15.00, Y=42.00 ; SAR Peak: 0.42 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.212
SAR 1g (W/Kg)	0.317
Variation (%)	0.08
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.414	0.321	0.230	0.165	0.118	0.085	0.061

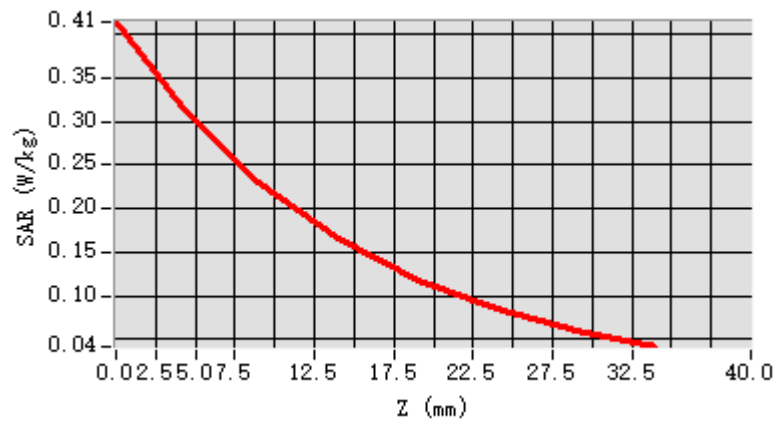

F. 3D Image

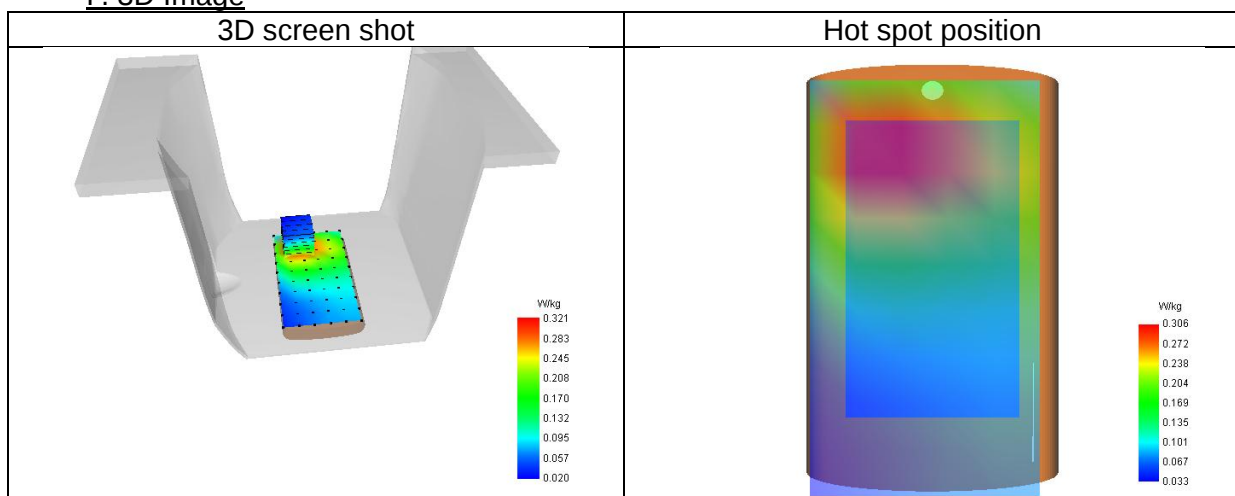

17# SAR Measurement at LTE band 26B (Body, Validation Plane)

Date of measurement: 29/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.34
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 26B
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (26865)/ frequency 831.50 Mhz
Cell Bandwidth	15 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	831.50

B. Permittivity

Middle TX Frequency (MHz)	831.50
Relative permittivity (real part)	42.51
Relative permittivity (imaginary part)	20.17
Conductivity (S/m)	0.93

C. SAR Surface and Volume

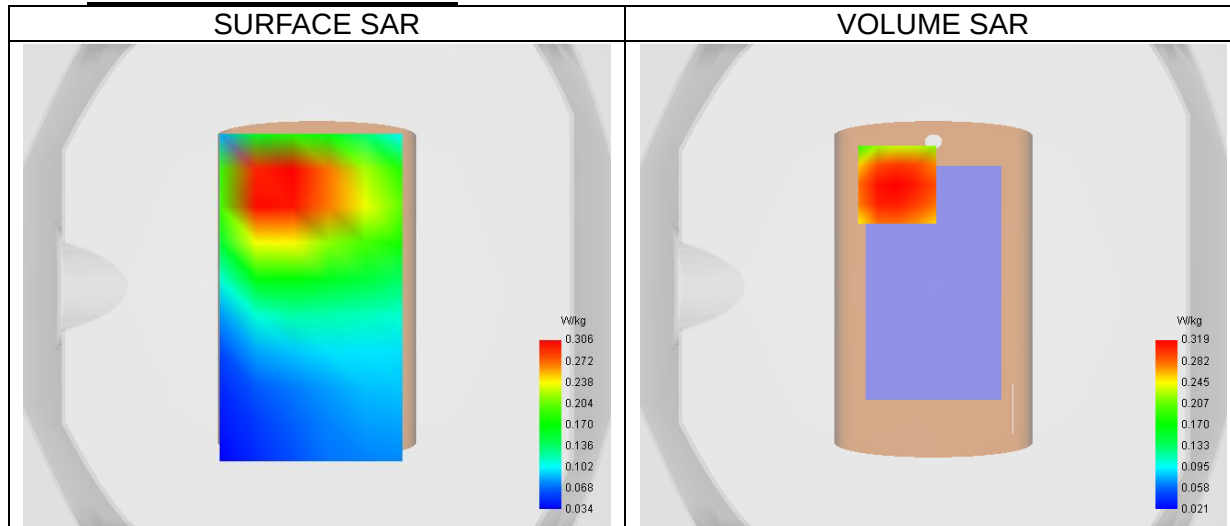


Maximum location: X=-15.00, Y=42.00 ; SAR Peak: 0.43 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.212
SAR 1g (W/Kg)	0.318
Variation (%)	0.58
Horizontal validation criteria: minimum distance (mm)	0.00
Vertical validation criteria: SAR ratio M2/M1 (%)	0.00

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.414	0.319	0.231	0.165	0.119	0.086	0.061

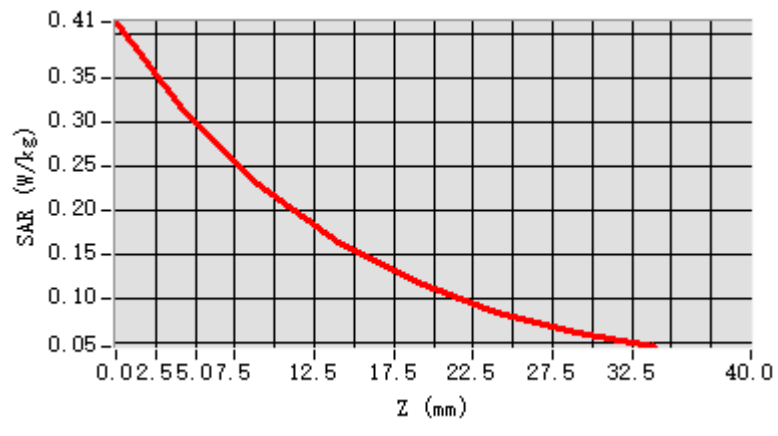

F. 3D Image

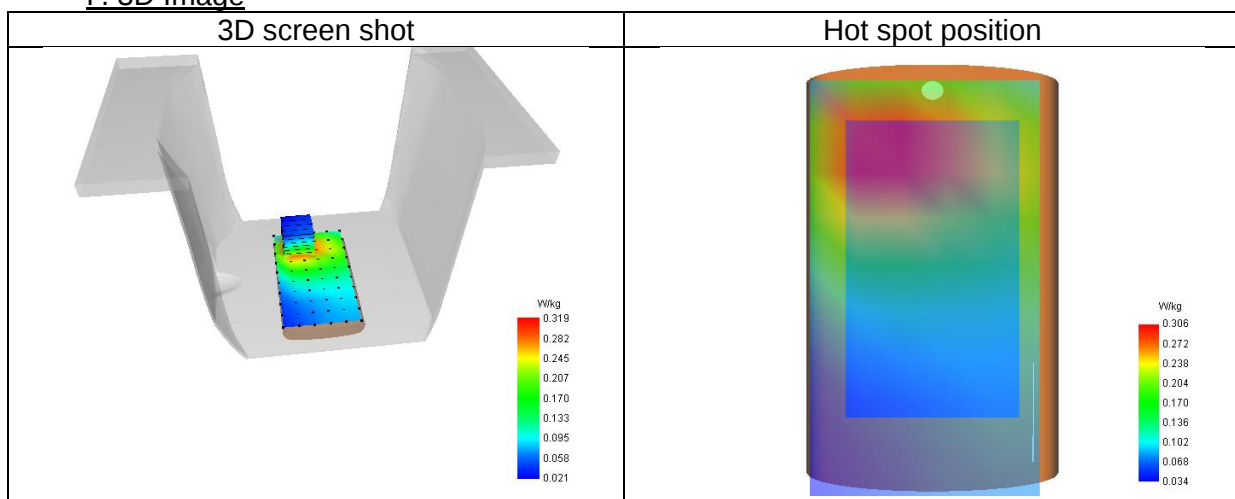

18# SAR Measurement at LTE band 38 (Body, Validation Plane)

Date of measurement: 1/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 38
Signal	LTE TDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (38000)/ frequency 2595.00 Mhz
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	2595.00

B. Permittivity

Middle TX Frequency (MHz)	2595.00
Relative permittivity (real part)	39.45
Relative permittivity (imaginary part)	13.78
Conductivity (S/m)	1.99

C. SAR Surface and Volume

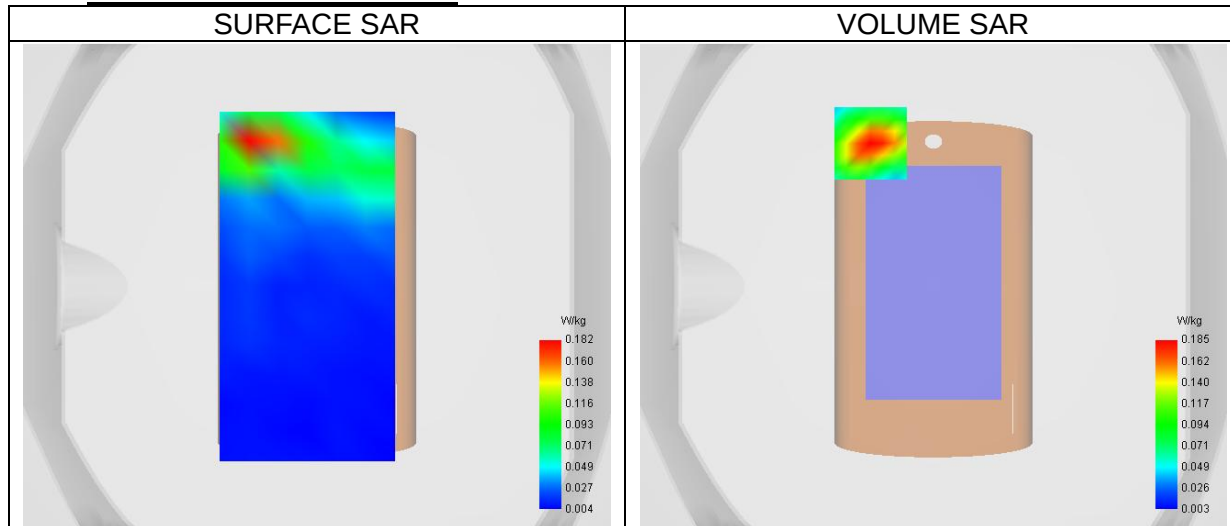


Maximum location: X=-26.00, Y=59.00 ; SAR Peak: 0.31 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.081
SAR 1g (W/Kg)	0.169
Variation (%)	4.41
Horizontal validation criteria: minimum distance (mm)	11.18
Vertical validation criteria: SAR ratio M2/M1 (%)	51.25

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.309	0.185	0.095	0.048	0.025	0.015	0.006

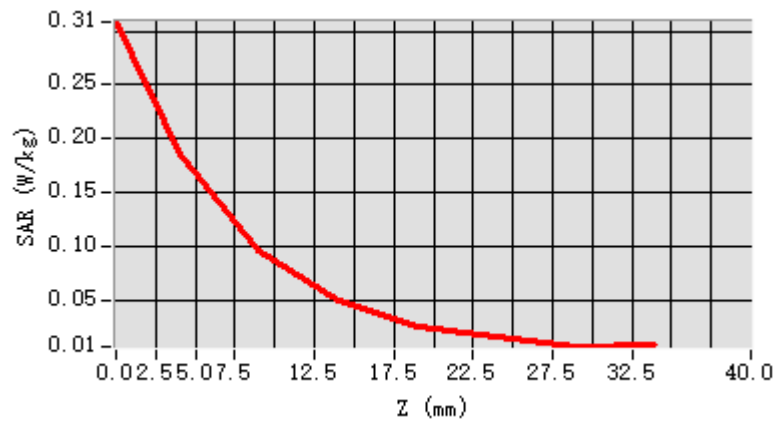

F. 3D Image

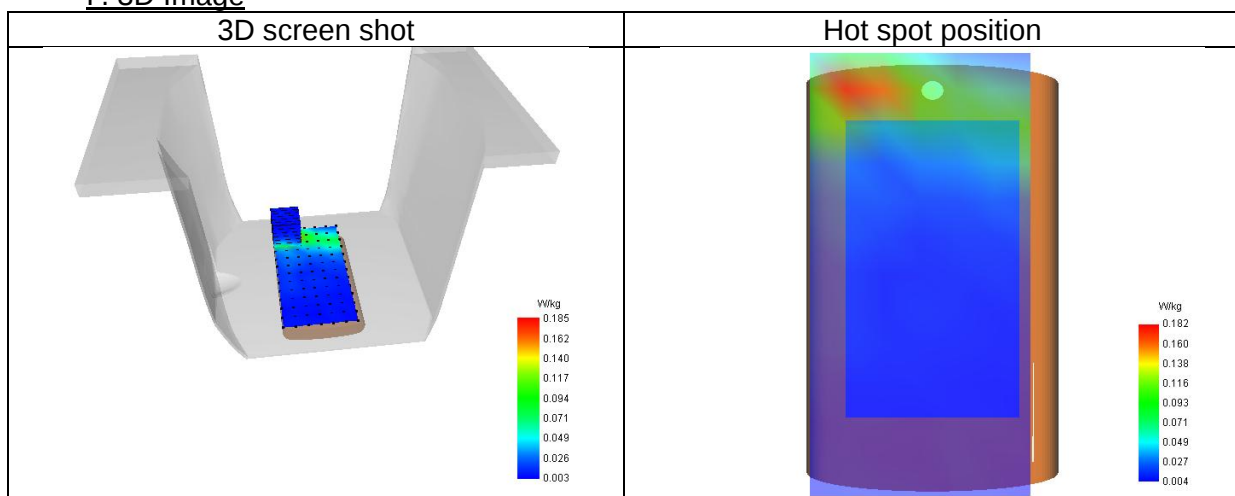

19# SAR Measurement at LTE band 41 (Body, Validation Plane)

Date of measurement: 1/5/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7, dx=5mm dy=5mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 41
Signal	LTE TDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (40620)/ frequency 2593.00 Mhz
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	2593.00

B. Permittivity

Middle TX Frequency (MHz)	2593.00
Relative permittivity (real part)	39.53
Relative permittivity (imaginary part)	13.73
Conductivity (S/m)	1.98

C. SAR Surface and Volume

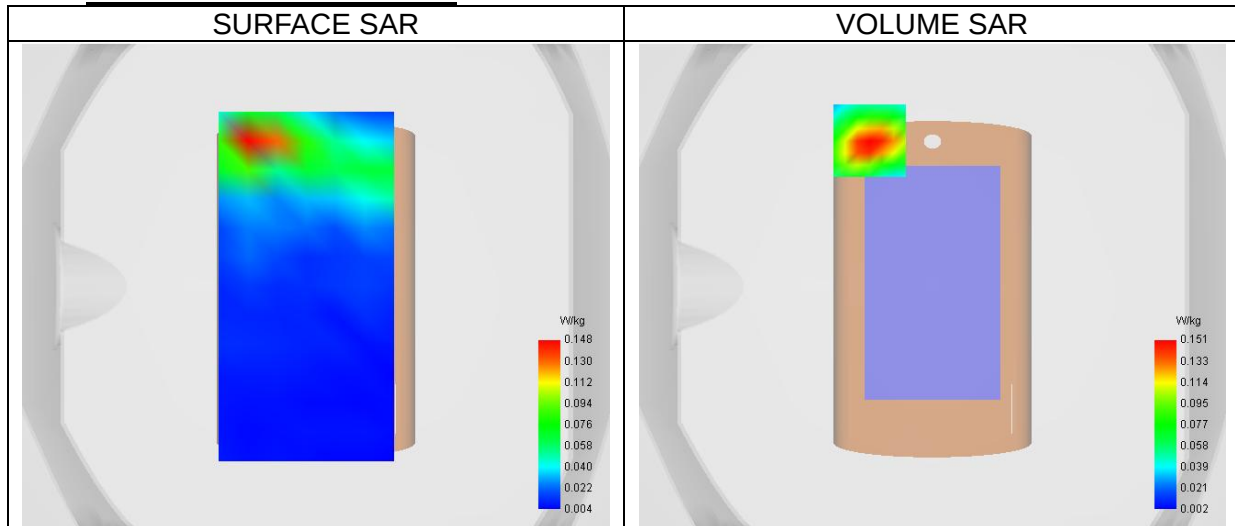


Maximum location: X=-26.00, Y=60.00 ; SAR Peak: 0.25 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.139
Variation (%)	4.84
Horizontal validation criteria: minimum distance (mm)	11.18
Vertical validation criteria: SAR ratio M2/M1 (%)	51.52

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.245	0.151	0.078	0.039	0.020	0.012	0.008

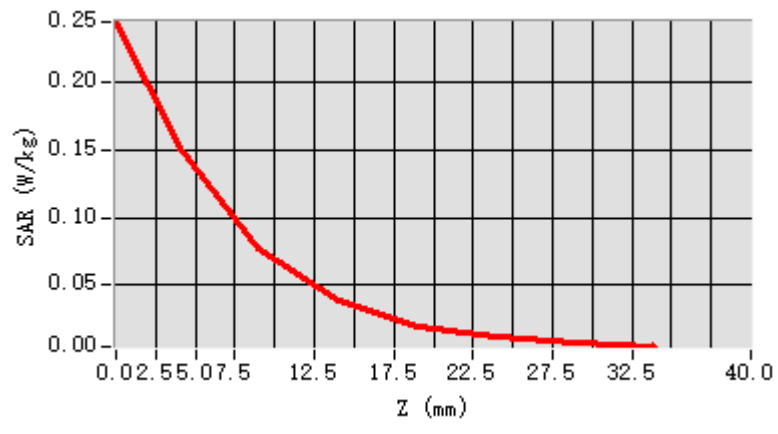

F. 3D Image

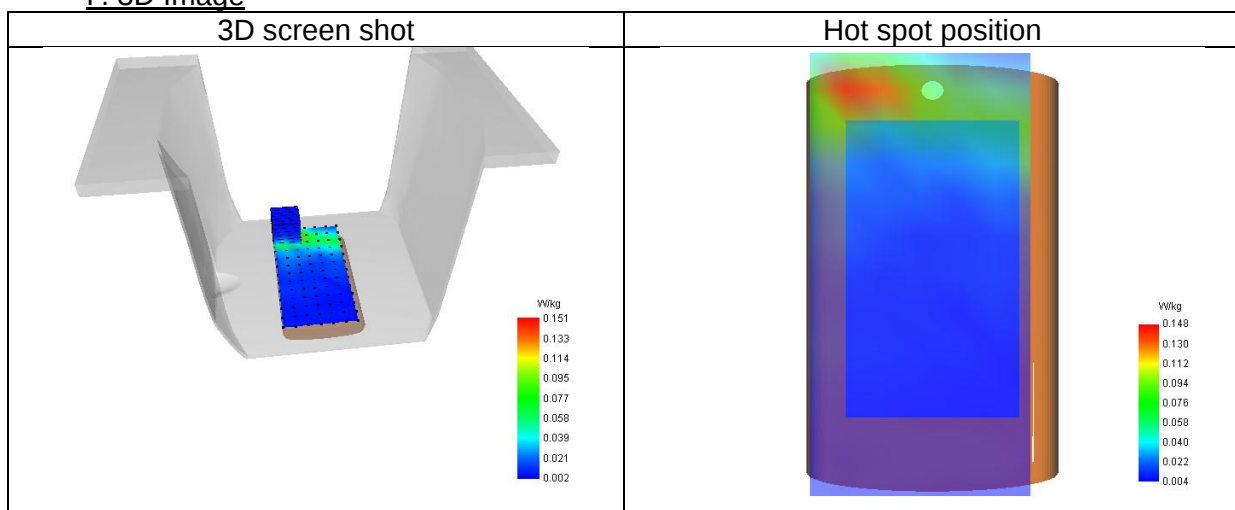

20# SAR Measurement at LTE band 66 (Body, Validation Plane)

Date of measurement: 27/4/2025


A. Experimental conditions.

Probe	4024-EPGO-442
ConvF	2.51
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5.0mm, Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 66
Signal	LTE FDD
Channel Center [EARFCN] / Channel Center [MHz]	Middle (132322)/ frequency 1745.00 Mhz
Cell Bandwidth	20 Mhz
Modulation	SC-OFDM - QPSK
Middle TX Frequency (MHz)	1745.00

B. Permittivity

Middle TX Frequency (MHz)	1745.00
Relative permittivity (real part)	40.45
Relative permittivity (imaginary part)	14.25
Conductivity (S/m)	1.38

C. SAR Surface and Volume

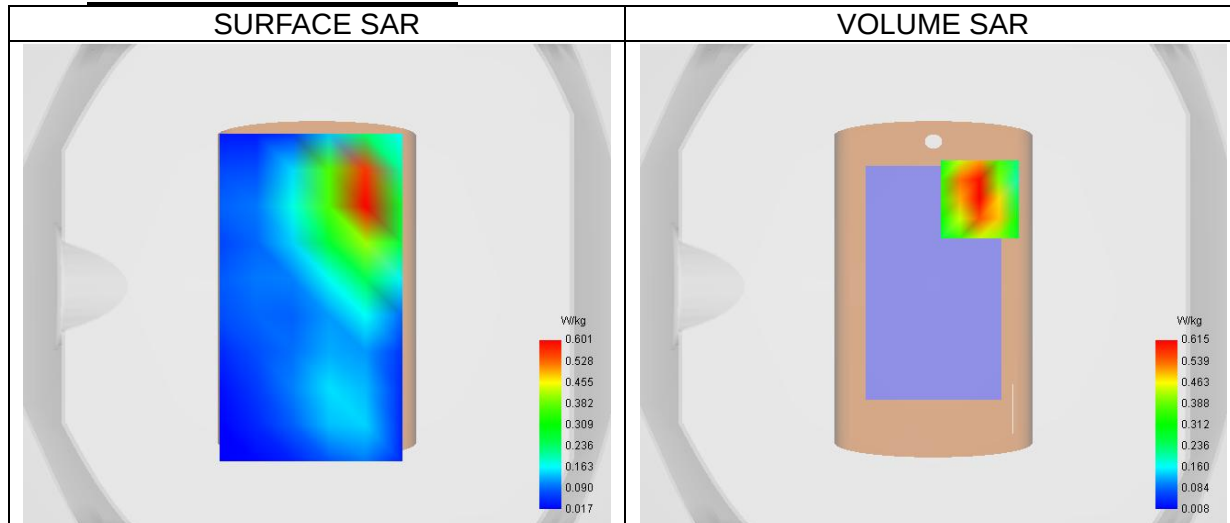


Maximum location: X=19.00, Y=36.00 ; SAR Peak: 0.97 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.323
SAR 1g (W/Kg)	0.588
Variation (%)	-1.11
Horizontal validation criteria: minimum distance (mm)	16.00
Vertical validation criteria: SAR ratio M2/M1 (%)	58.49

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.930	0.615	0.360	0.213	0.125	0.074	0.043

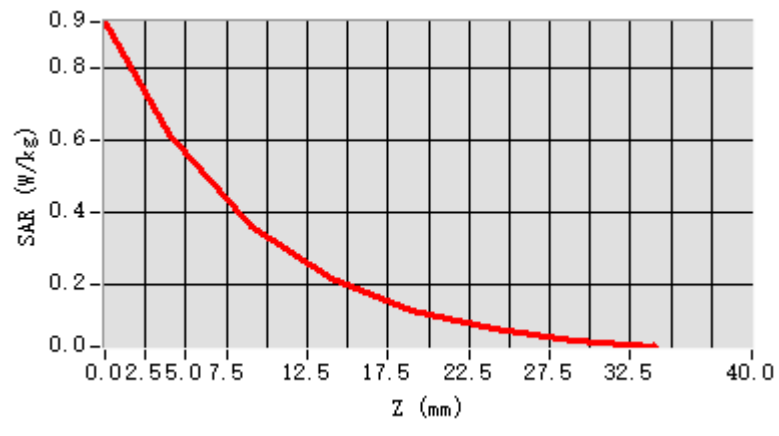

F. 3D Image

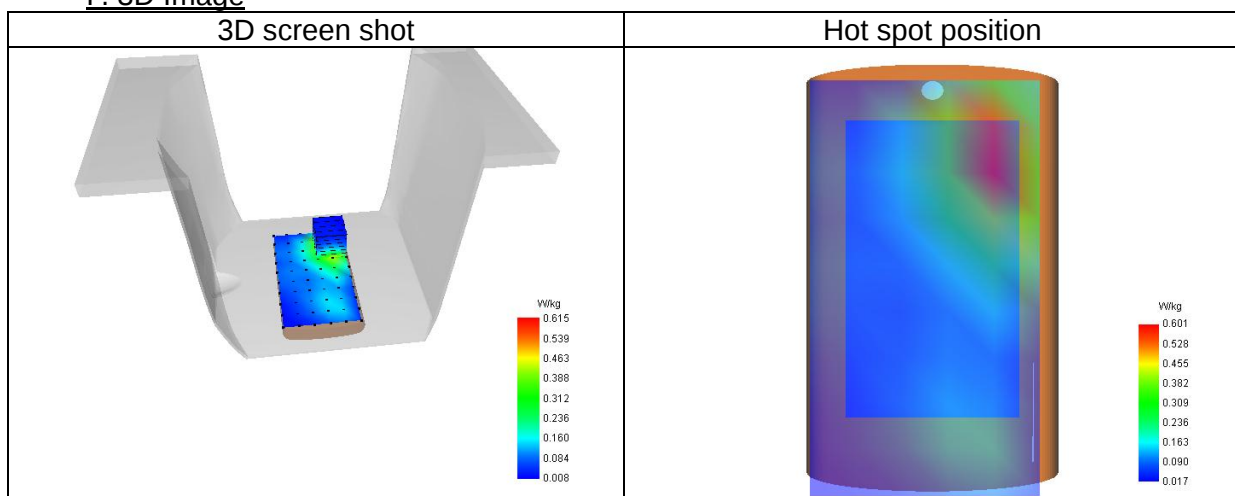

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe -4024-EPGO-442
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
5000-6000 MHz Dipole - SN 13/14WGA 33

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-Field Probe Calibration Report

Ref : ACR.278.12.24.BES.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: 4024-EPGO-442

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon

29280 PLOUZANE - FRANCE

Calibration date: 10/04/2024



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.278.12.24.BES.A

	Name	Function	Date	Signature
Prepared by :	Cyrille ONNEE	Measurement Responsible	10/4/2024	
Checked & approved by:	Pedro Ruiz	Technical Manager	10/4/2024	
Authorized by:	Pedro Ruiz	Laboratory Director	10/4/2024	

Assinado por:

Pedro RUIZ

28093B31C46F428...

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Cyrille ONNEE	10/4/2024	Initial release

Docusign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.278.12.24.BES.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Sensitivity	4
3.2	Linearity	5
3.3	Isotropy	5
3.4	Boundary Effect	5
3.5	Probe Modulation Response	6
4	Measurement Uncertainty	6
5	Calibration Results	6
5.1	Calibration in air	6
5.2	Calibration in liquid	7
6	Verification Results	9
7	List of Equipment	9

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.278.12.24.BES.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	4024-EPGO-442
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-7.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.206 MΩ Dipole 2: R2=0.223 MΩ Dipole 3: R3=0.235 MΩ

2 PRODUCT DESCRIPTION**2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.

**Figure 1 – MVG COMOSAR Dosimetric E field Probe**

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their effect. All calibrations / measurements performed meet the fore-mentioned standards.

3.1 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards for frequency range 600-7500MHz and using the calorimeter cell method (transfer method) as outlined in the standards for frequency 150-450 MHz.

DocuSign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.278.12.24.BES.A

3.2 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.3 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.4 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect $SAR_{uncertainty}[\%]$ for scanning distances larger than 4mm is 1.0% Limit ,2%).

Docusign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.278.12.24.BES.A

3.5 PROBE MODULATION RESPONSE

MVG's probe were evaluated experimentally with various modulated signal and the deviation from CW response were found neglectable in the used power range of the probe. So the correction to taking into account the linearization parameters for different modulation is null, therefore the CW factor given in this report can be used whatever the measured modulation

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with a SAR probe calibration using the waveguide or calorimetric cell technique depending on the frequency.

The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-11% for the frequency range 150-450MHz.


The estimated expanded uncertainty (k=2) in calibration for SAR (W/kg) is +/-14% for the frequency range 600-7500MHz.

5 CALIBRATION RESULTS

Ambient condition	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 CALIBRATION IN AIR

The following curve represents the measurement in waveguide of the voltage picked up by the probe toward the E-field generated inside the waveguide.

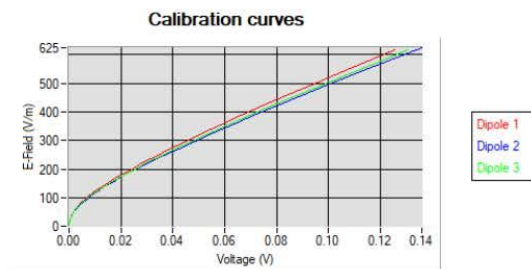

From this curve, the sensitivity in air is calculated using the below formula.

$$E^2 = \sum_{i=1}^3 \frac{V_i (1 + V_i / DCP_i)}{Norm_i}$$

Page: 6/10

Template ACR.DDD.N.YY.MVGB.ISSUE COMOSAR Probe vM

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Docusign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.278.12.24.BES.A

where

V_i =voltage readings on the 3 channels of the probe

DCPi=diode compression point given below for the 3 channels of the probe

Normi=dipole sensitivity given below for the 3 channels of the probe

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.73	0.79	0.78

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
105	109	103

5.2 CALIBRATION IN LIQUID

The calorimeter cell or the waveguide is used to determine the calibration in liquid using the formula below.

$$\text{ConvF} = \frac{E_{\text{liquid}}^2}{E_{\text{air}}^2}$$

The E-field in the liquid is determined from the SAR measurement according to the below formula.

$$E_{\text{liquid}}^2 = \frac{\rho \text{ SAR}}{\sigma}$$

where

σ =the conductivity of the liquid

ρ =the volumetric density of the liquid

SAR=the SAR measured from the formula that depends on the setup used. The SAR formulas are given below

For the calorimeter cell (150-450 MHz), the formula is:

$$\text{SAR} = c \frac{dT}{dt}$$

where

c =the specific heat for the liquid

dT/dt =the temperature rises over the time

For the waveguide setup (600-75000 MHz), the formula is:

$$\text{SAR} = \frac{4P_W}{ab\delta} e^{-\frac{2z}{\delta}}$$

Page: 7/10

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vM

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Docusign Envelope ID: 223C1A7C-4751-4B95-8502-1618DC0951E3



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.278.12.24.BES.A

where

a=the larger cross-sectional of the waveguide

b=the smaller cross-sectional of the waveguide

δ =the skin depth for the liquid in the waveguide

Pw=the power delivered to the liquid

The below table summarize the ConvF for the calibrated liquid. The curves give examples for the measured SAR depending on the voltage in some liquid.

Liquid	Frequency (MHz*)	ConvF
HL750	750	2.42
HL850	835	2.34
HL900	900	2.24
HL1800	1800	2.51
HL1900	1900	2.57
HL2000	2000	2.64
HL2300	2300	2.73
HL2450	2450	2.74
HL2600	2600	2.51
HL3300	3300	2.11
HL3500	3500	2.15
HL3700	3700	2.08
HL3900	3900	2.27
HL4200	4200	2.39
HL4600	4600	2.30
HL4900	4900	2.13
HL5200	5200	1.89
HL5400	5400	1.97
HL5600	5600	1.88
HL5800	5800	1.90

(*) Frequency validity is ± 50 MHz below 600MHz, ± 100 MHz from 600MHz to 6GHz and ± 700 MHz above 6GHz

