

MEASUREMENT REPORT

FCC PART 15C / RSS-247 WLAN 802.11b/g/n

FCC ID: 2ANOT-204890

IC: 23166-204890

APPLICANT: Alliance Laundry Systems LLC

Application Type: Certification

Product: Wireless Network Control

Model No.: 204890

Brand Name: Alliance

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

ISED Rule(s): RSS-247 Issue 2, RSS-GEN Issue 5

Test Procedure(s): ANSI C63.10-2013

Test Date: October 14 ~ November 28, 2019

Reviewed By:

Paddy Chen
(Paddy Chen)

Approved By:

Chenz Ker
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1910TW0109-U1	Rev. 01	Initial Report	11-28-2019	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report	7
2.3. Host Device Information.....	7
2.4. Working Frequencies for this report	8
2.5. Test Mode	8
2.6. Description of Test Software	8
2.7. Device Capabilities	9
2.8. Test Configuration.....	10
2.9. EMI Suppression Device(s)/Modifications.....	10
2.10. Labeling Requirements	10
3. DESCRIPTION of TEST	11
3.1. Evaluation Procedure.....	11
3.2. AC Line Conducted Emissions	11
3.3. Radiated Emissions	12
4. ANTENNA REQUIREMENTS	13
5. TEST EQUIPMENT CALIBRATION DATE	14
6. MEASUREMENT UNCERTAINTY	16
7. TEST RESULT	17
7.1. Summary.....	17
7.2. Occupied Bandwidth Measurement	18
7.2.1. Test Limit	18
7.2.2. Test Procedure used	18
7.2.3. Test Setting	18
7.2.4. Test Setup	19
7.2.5. Test Result	20
7.3. Output Power Measurement.....	27
7.3.1. Test Limit	27
7.3.2. Test Procedure Used.....	27
7.3.3. Test Setting	27

7.3.4. Test Setup	28
7.3.5. Test Result	29
7.4. Power Spectral Density Measurement.....	31
7.4.1. Test Limit.....	31
7.4.2. Test Procedure Used.....	31
7.4.3. Test Setting	31
7.4.4. Test Setup	32
7.4.5. Test Result	33
7.5. Conducted Band Edge and Out-of-Band Emissions.....	37
7.5.1. Test Limit.....	37
7.5.2. Test Procedure Used.....	37
7.5.3. Test Settiting	37
7.5.4. Test Setup	38
7.5.5. Test Result	39
7.6. Radiated Spurious Emission Measurement.....	46
7.6.1. Test Limit.....	46
7.6.2. Test Procedure Used.....	46
7.6.3. Test Setting	46
7.6.4. Test Setup	48
7.6.5. Test Result	49
7.7. Radiated Restricted Band Edge Measurement.....	60
7.7.1. Test Limit.....	60
7.7.2. Test Procedure Used.....	63
7.7.3. Test Setting	63
7.7.4. Test Setup	64
7.7.5. Test Result	65
7.8. AC Conducted Emissions Measurement	89
7.8.1. Test Limit.....	89
7.8.2. Test Setup	89
7.8.3. Test Result	90
8. CONCLUSION	92
Appendix A - Test Setup Photograph	93
Appendix B - EUT Photograph	94

General Information

Applicant:	Alliance Laundry Systems LLC
Applicant Address:	221 Shepard Street PO Box 990 Ripon, WI 54971
Manufacturer:	Alliance Laundry Systems LLC
Manufacturer Address:	221 Shepard Street PO Box 990 Ripon, WI 54971
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 153292 and 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

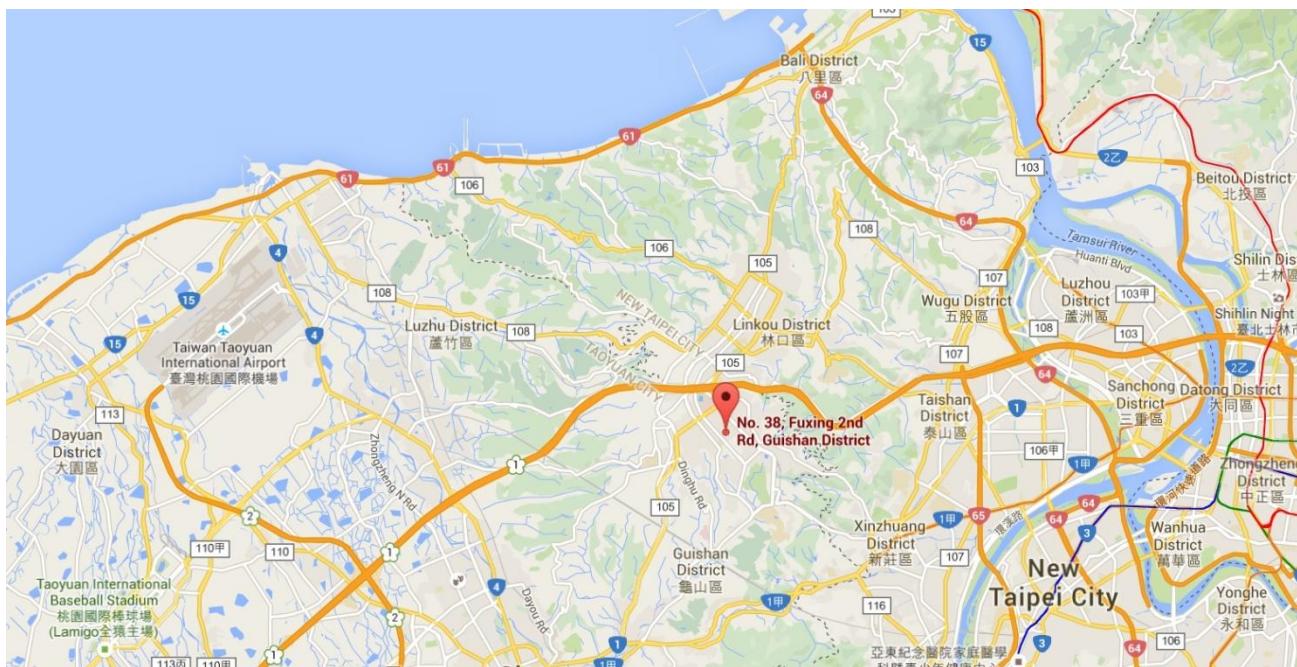

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	Wireless Network Control
Model No.:	204890
Brand Name:	Alliance
Wi-Fi Specification:	802.11b/g/n-HT20

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20: 2412MHz ~ 2462MHz
Channel Number:	802.11b/g/n-HT20: 11
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 72.2Mbps
Antenna Type:	Dipole Antenna
Antenna Gain:	2.0dBi

2.3. Host Device Information

Product Name:	Wireless Network Control Host
Model No.:	Wireless Network Control
Brand Name:	Alliance

2.4. Working Frequencies for this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (11Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)

2.6. Description of Test Software

The test utility software used during testing was “RadioToolGUI”, and the version was 1.0.2.

Power parameter values refer to operation description.


2.7. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS).

Note: The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	51.15%
802.11g	33.45%
802.11n-HT20	33.33%

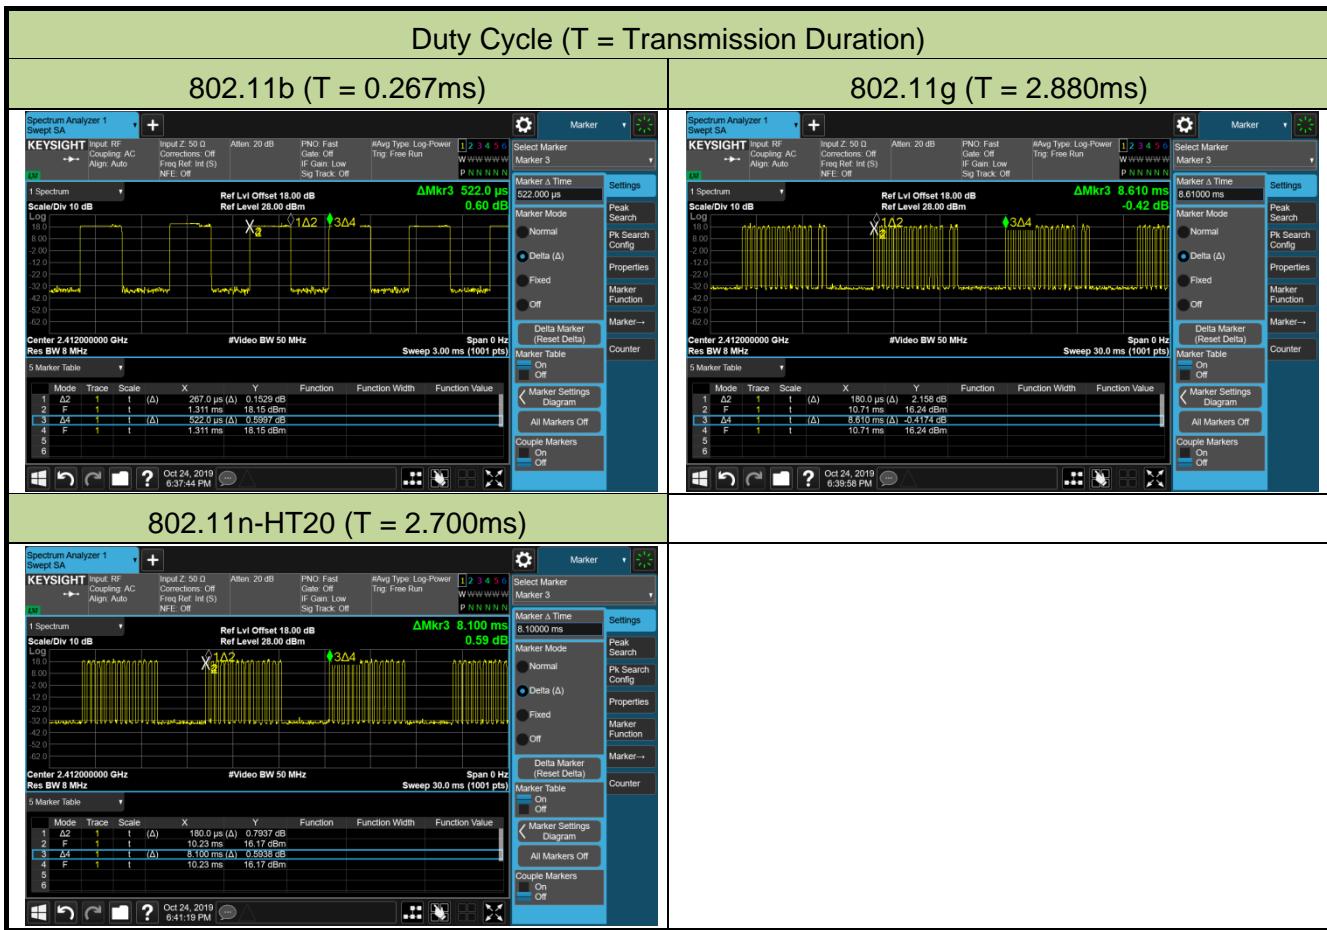

2.8. Test Configuration

The unit was tested per the guidance of ANSI C63.10-2013, which is used as the reference of appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 11 Section 3

The manufacturer, importer or distributor shall meet the labelling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labelling option, see Notice 2014-DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and were used in the measurement.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the unit is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2020/3/25
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2020/4/25
8-Wire ISN (T8-Cat6)	R&S	ENY81 CA6	MRTTWA00017	1 year	2020/4/23
8-Wire ISN (T8)	R&S	ENY81	MRTTWA00018	1 year	2020/4/23
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2020/5/29
Conducted Cable	Rosnol	N1C50-RG400-B1C50-500CM	MRTTWE00013	1 year	2020/6/18
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/5/30

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Acitive Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2020/4/29
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/6/04
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2020/4/22
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2020/4/23
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2020/4/24
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2020/4/24
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2020/3/26
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2020/3/25
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/10/31
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/10/30
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2020/4/22
Cable	Rosnol	K1K50-UP02 64-K1K50-4M	MRTTWE00012	1 year	2020/6/18
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2020/5/30

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2020/4/22
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2020/3/26
Wideband Radio Communication Taster	R&S	CMW 500	MRTTWA00041	1 year	2020/1/28
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/10/31
					2020/10/30
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2020/7/11
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2020/3/26
Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2020/6/10
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2020/5/30

Software	Version	Function
e3	9.160520a	EMI Test Software
EMI	V 3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission- Power Line
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 2.53dB
Conducted Emission- Impedance Stabilization Network Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 3.96dB
Radiated Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 3.92dB (Below 30M)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 4.25dB (30M~1G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 4.40dB (1G~18G)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 4.45dB (18G~40G)
Frequency Error
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 78.4Hz
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.84dB
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 2.65 dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 3.3%
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.82°C/ 3%
DC Voltage
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.3%

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
N/A	RSS-Gen [6.7]	99% Bandwidth	N/A		Pass	
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	$\leq 1\text{Watt}$ & EIRP $\leq 4\text{Watt}$		Pass	Section 7.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	20dBc (Peak)		Pass	Section 7.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6&7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

7.2. Occupied Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8 (6dB bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% bandwidth)

7.2.3. Test Setting

For 6dB bandwidth


1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

For 99% bandwidth

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup


Spectrum Analyzer

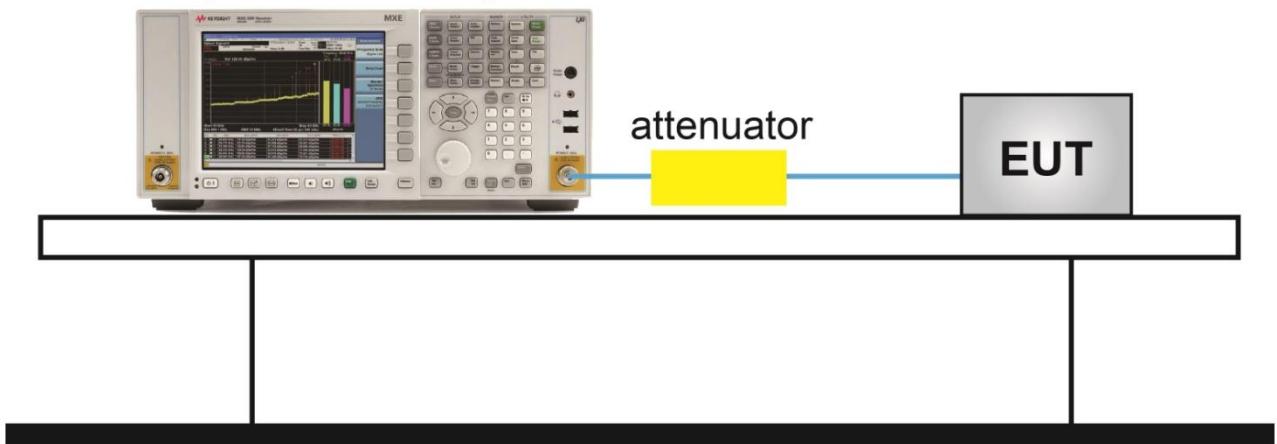



7.2.5. Test Result


Product	Wireless Network Control			Temperature	25°C		
Test Engineer	Kevin Ker			Relative Humidity	52%		
Test Site	SR1			Test Date	2019/10/24		


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	99% Bandwidth (MHz)	Result
802.11b	11Mbps	01	2412	10.05	≥ 0.5	14.26	Pass
802.11b	11Mbps	06	2437	10.04	≥ 0.5	14.24	Pass
802.11b	11Mbps	11	2462	10.06	≥ 0.5	14.25	Pass
802.11g	6Mbps	01	2412	15.12	≥ 0.5	16.44	Pass
802.11g	6Mbps	06	2437	15.14	≥ 0.5	17.16	Pass
802.11g	6Mbps	11	2462	15.12	≥ 0.5	16.41	Pass
802.11n-HT20	MCS0	01	2412	15.14	≥ 0.5	17.54	Pass
802.11n-HT20	MCS0	06	2437	15.15	≥ 0.5	17.71	Pass
802.11n-HT20	MCS0	11	2462	15.12	≥ 0.5	17.51	Pass

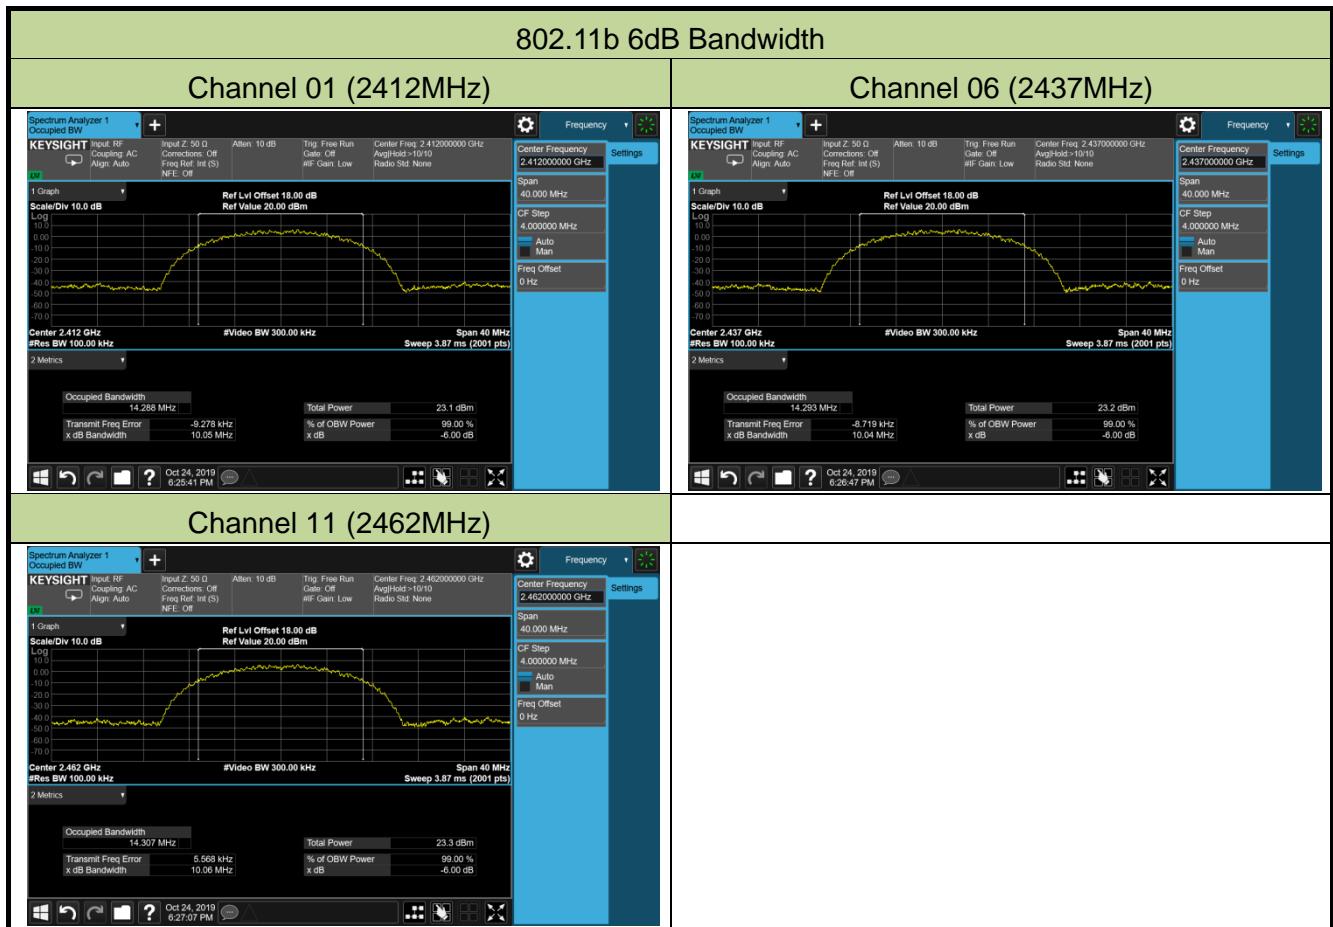


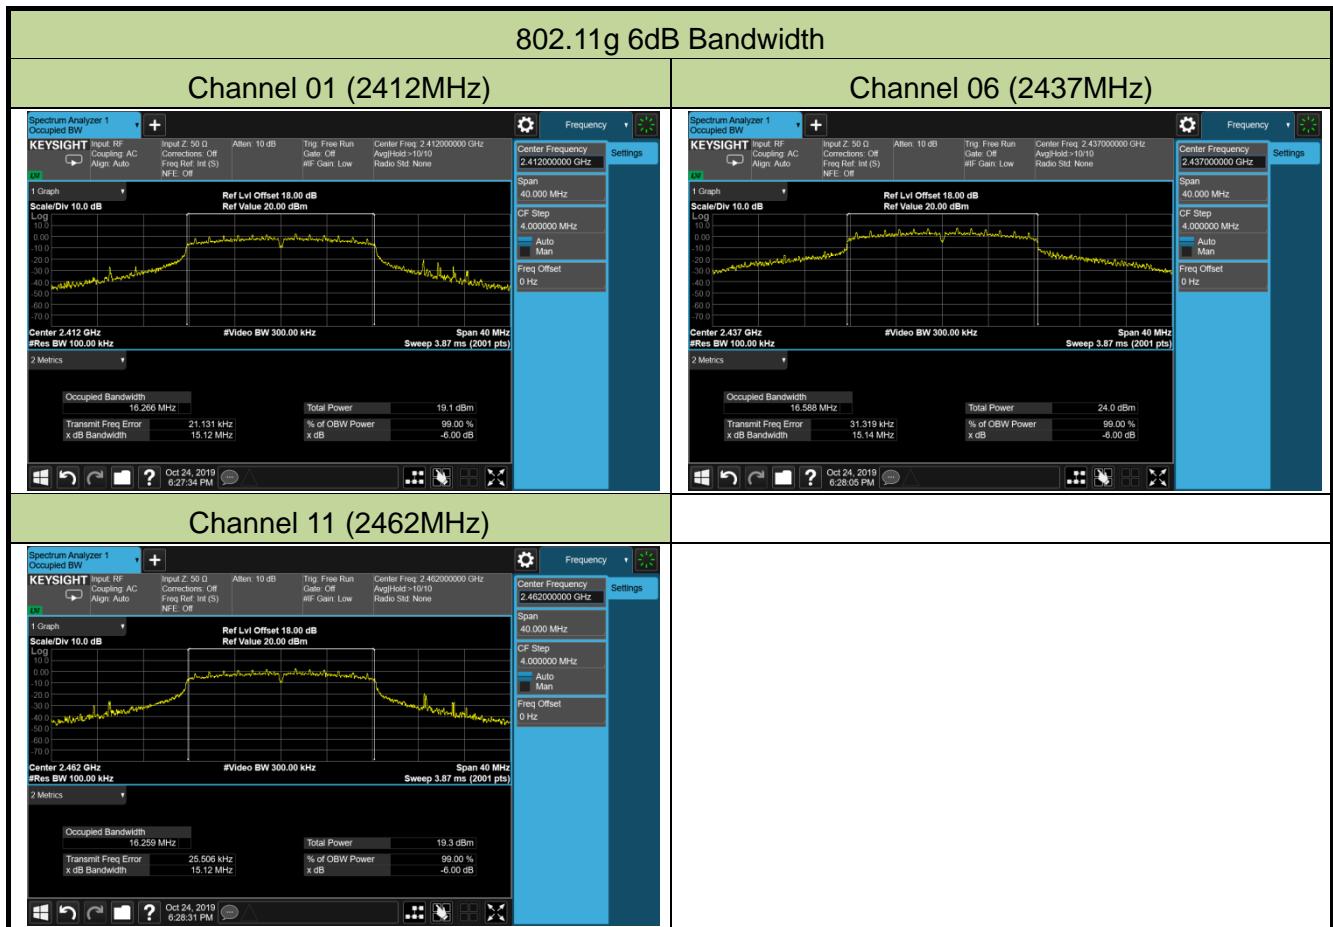

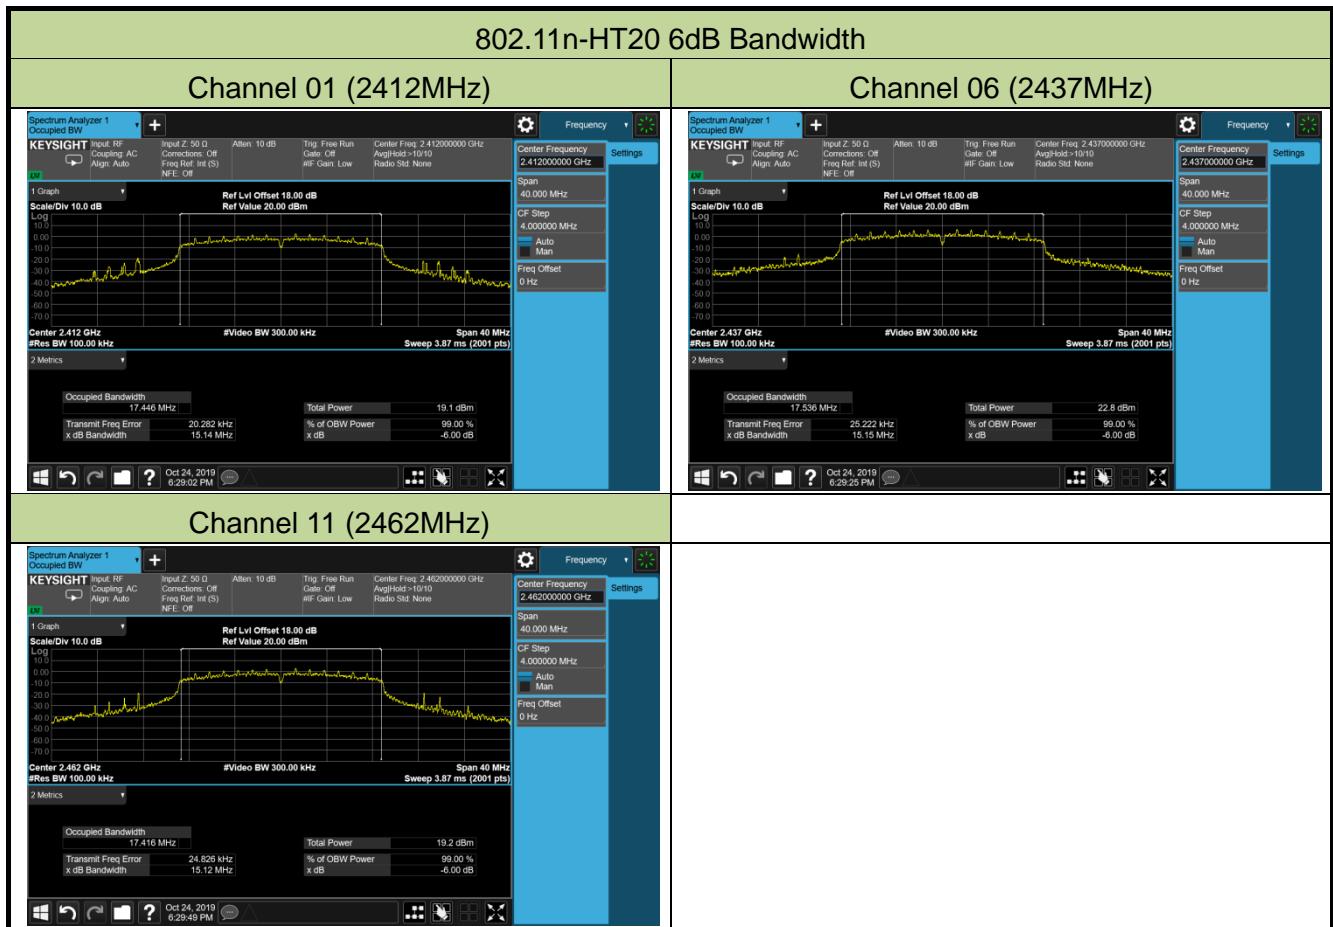

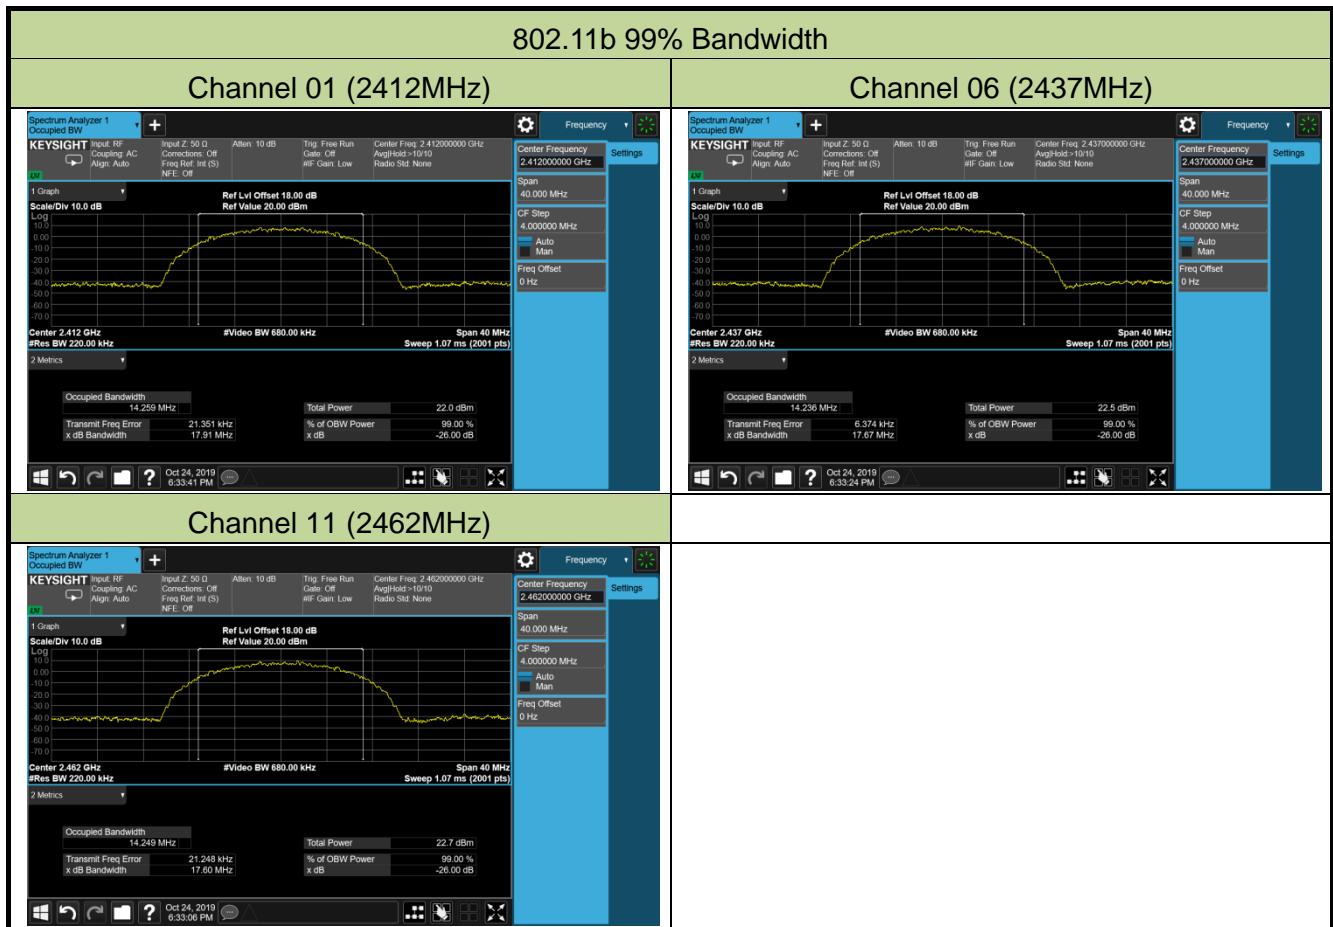

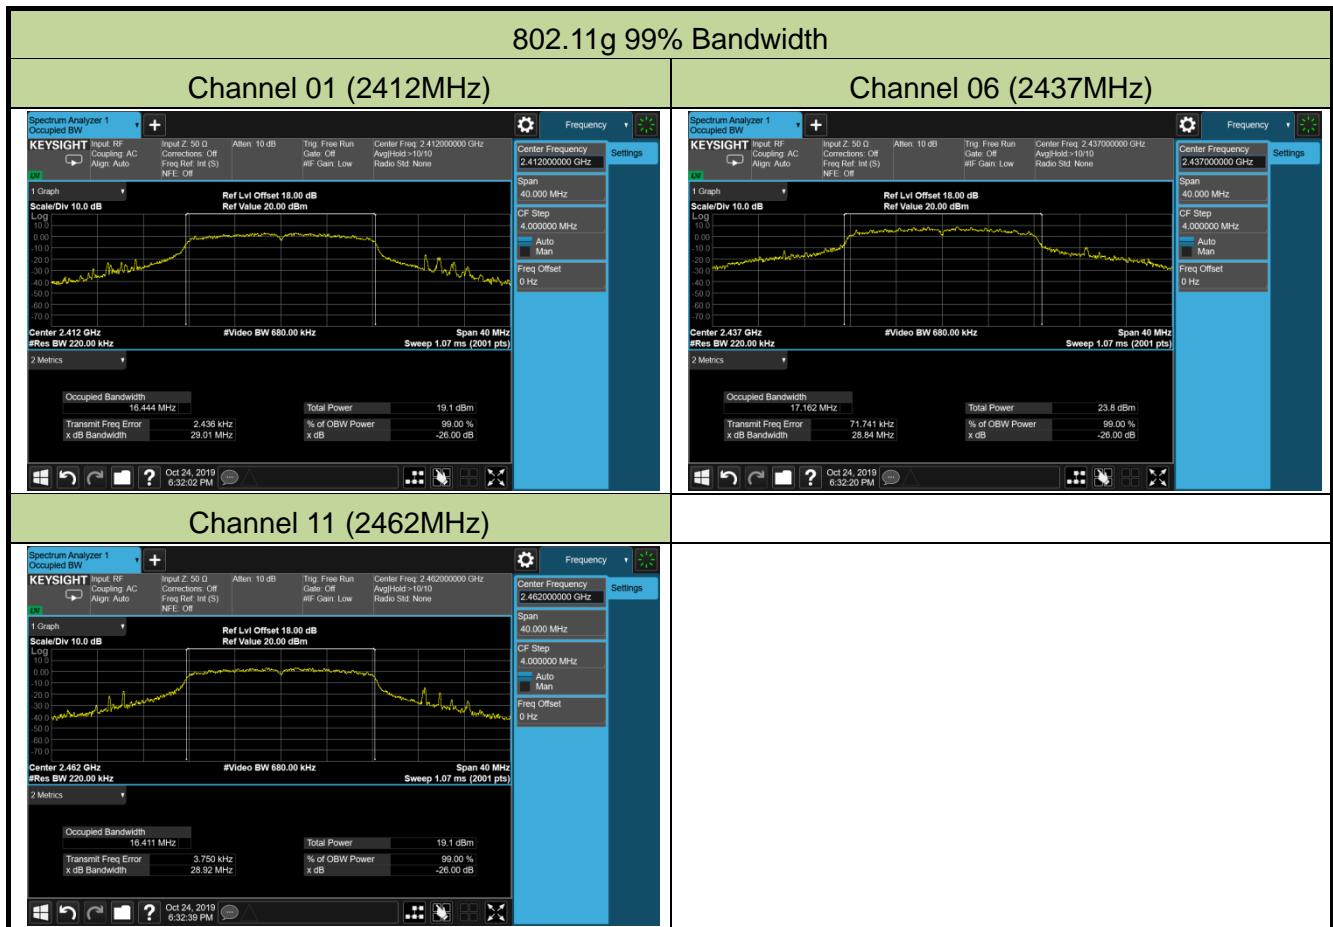

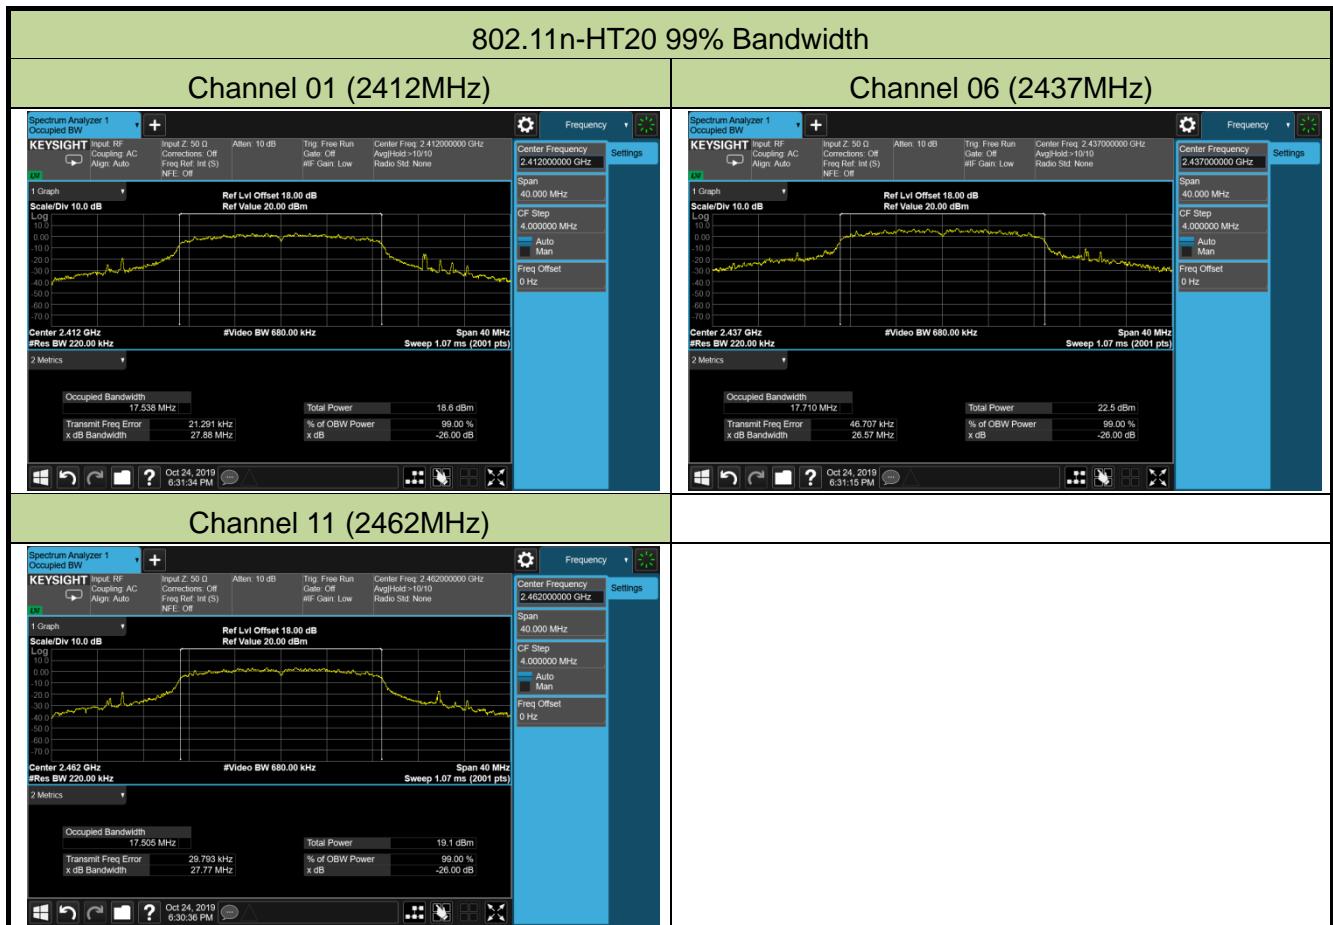

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum conducted output power shall be exceeded 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

7.3.2. Test Procedure Used

ANSI C63.10 - Section 11.9.1.3

ANSI C63.10 - Section 11.9.2.3.2


7.3.3. Test Setting

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a $VBW = 50MHz$ so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

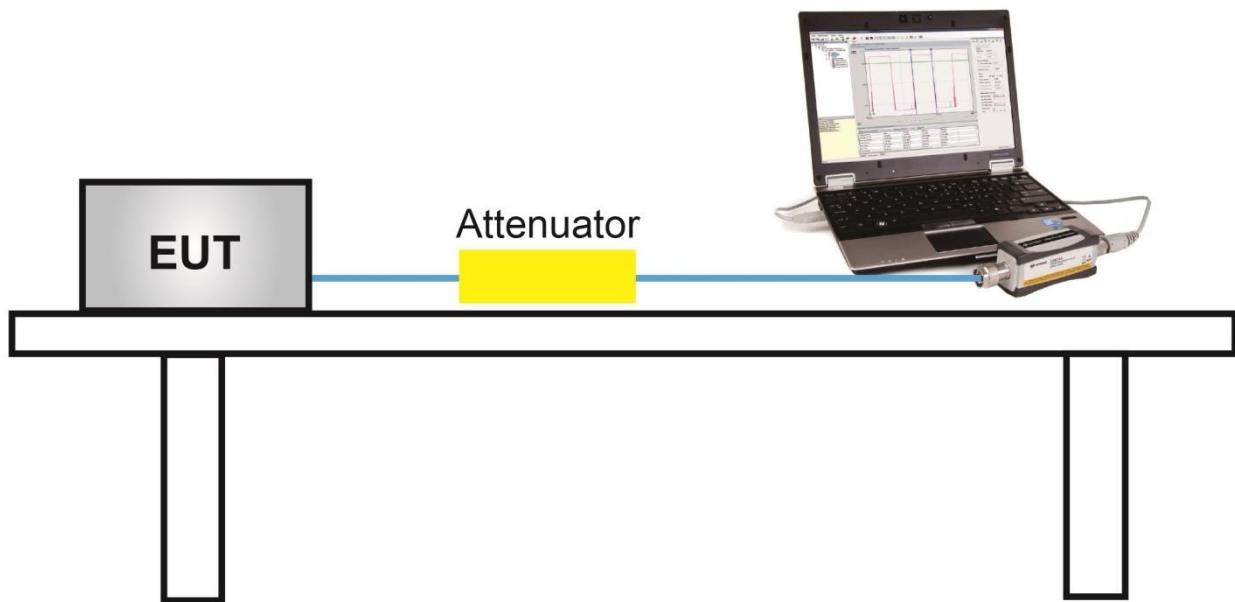7.3.4. Test Setup

7.3.5. Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (gray marker) for final test of each channel.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	17.28
				5.5Mbps	17.54
				11Mbps	17.72
802.11g	20	6	2437	6Mbps	16.70
				24Mbps	16.31
				54Mbps	16.14
802.11n	20	6	2437	MCS0	15.55
				MCS3	15.24
				MCS7	15.01

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	52%
Test Site	SR1	Test Date	2019/10/24

Test Result of Peak Output Power

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
11b	11Mbps	01	2412	16.89	≤ 30.00	18.89	≤ 36.02	Pass
11b	11Mbps	06	2437	19.67	≤ 30.00	21.67	≤ 36.02	Pass
11b	11Mbps	11	2462	16.60	≤ 30.00	18.60	≤ 36.02	Pass
11g	6Mbps	01	2412	20.03	≤ 30.00	13.42	≤ 36.02	Pass
11g	6Mbps	06	2437	20.88	≤ 30.00	13.49	≤ 36.02	Pass
11g	6Mbps	11	2462	20.13	≤ 30.00	13.52	≤ 36.02	Pass
11n-HT20	MCS0	01	2412	20.09	≤ 30.00	13.30	≤ 36.02	Pass
11n-HT20	MCS0	06	2437	20.41	≤ 30.00	13.45	≤ 36.02	Pass
11n-HT20	MCS0	11	2462	20.31	≤ 30.00	13.49	≤ 36.02	Pass

Note: E.I.R.P (dBm) = Peak Power (dBm) + Antenna Gain (dBi), Antenna Gain = 2.0 dBi.

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
11b	11Mbps	01	2412	14.90	≤ 30.00	16.90	≤ 36.02	Pass
11b	11Mbps	06	2437	17.72	≤ 30.00	19.72	≤ 36.02	Pass
11b	11Mbps	11	2462	14.55	≤ 30.00	16.55	≤ 36.02	Pass
11g	6Mbps	01	2412	12.00	≤ 30.00	14.00	≤ 36.02	Pass
11g	6Mbps	06	2437	16.70	≤ 30.00	18.70	≤ 36.02	Pass
11g	6Mbps	11	2462	12.17	≤ 30.00	14.17	≤ 36.02	Pass
11n-HT20	MCS0	01	2412	11.43	≤ 30.00	13.43	≤ 36.02	Pass
11n-HT20	MCS0	06	2437	15.55	≤ 30.00	17.55	≤ 36.02	Pass
11n-HT20	MCS0	11	2462	12.19	≤ 30.00	14.19	≤ 36.02	Pass

Note: E.I.R.P (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = 2.0 dBi.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


7.4.2. Test Procedure Used

ANSI C63.10 Section 11.10.5

7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


7.4.4. Test Setup

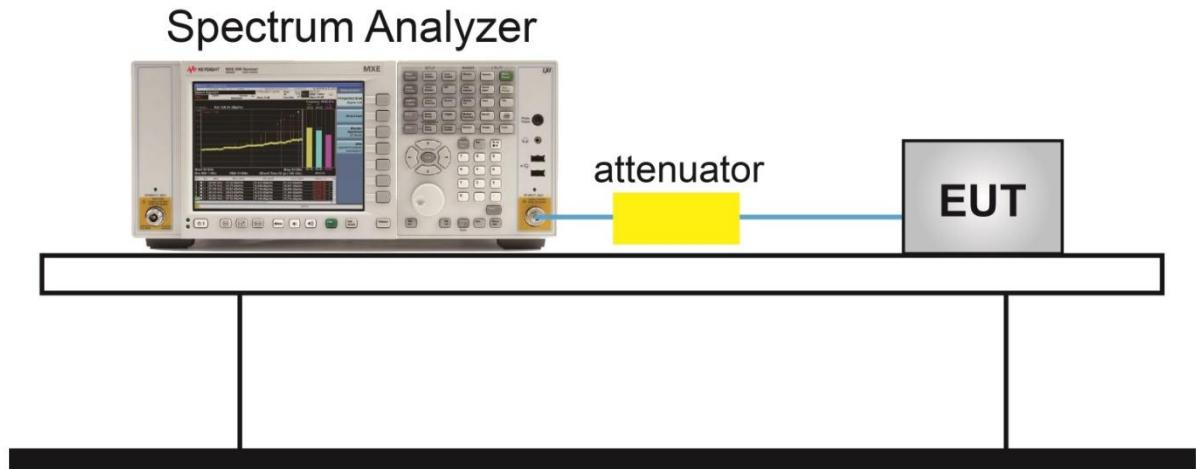



7.4.5. Test Result

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	52%
Test Site	SR1	Test Date	2019/10/24

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	PK PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	11Mbps	1	2412	-9.92	≤ 8.00	Pass
11b	11Mbps	6	2437	-6.88	≤ 8.00	Pass
11b	11Mbps	11	2462	-8.98	≤ 8.00	Pass
11g	6Mbps	1	2412	-12.45	≤ 8.00	Pass
11g	6Mbps	6	2437	-8.13	≤ 8.00	Pass
11g	6Mbps	11	2462	-13.22	≤ 8.00	Pass
11n-HT20	MCS0	1	2412	-11.54	≤ 8.00	Pass
11n-HT20	MCS0	6	2437	-7.59	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-12.09	≤ 8.00	Pass

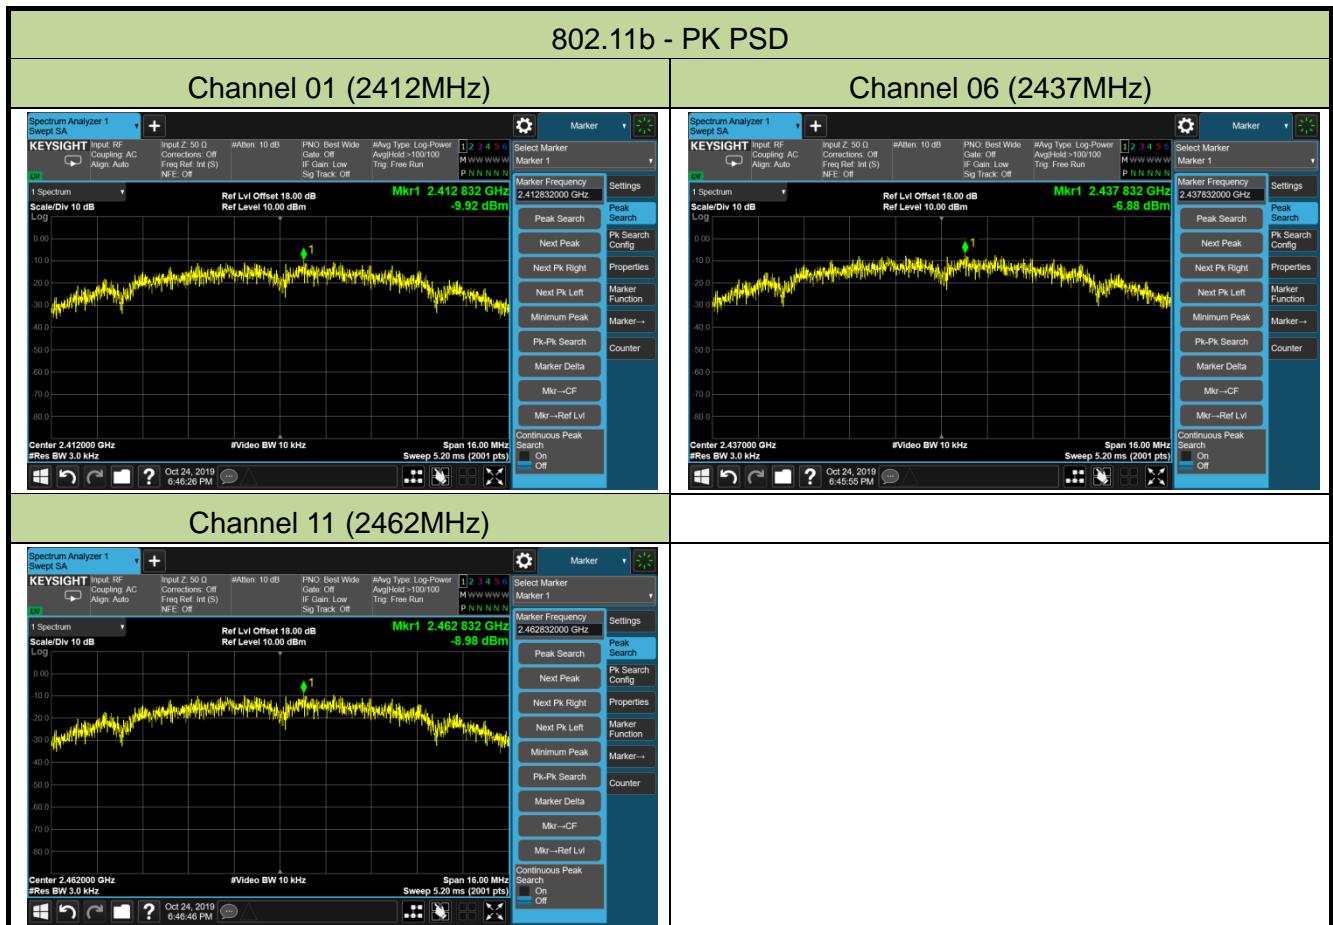

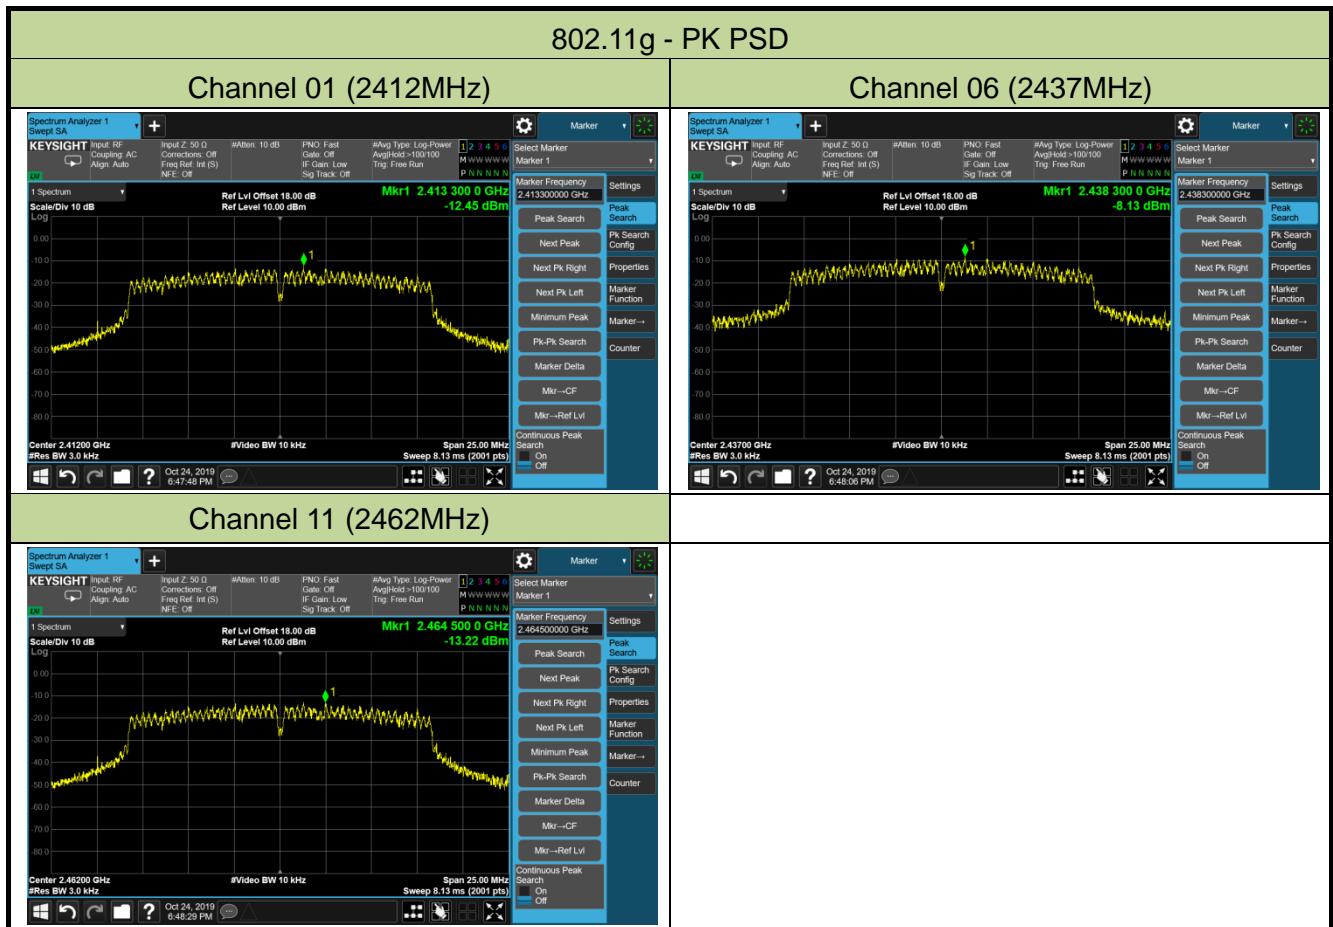

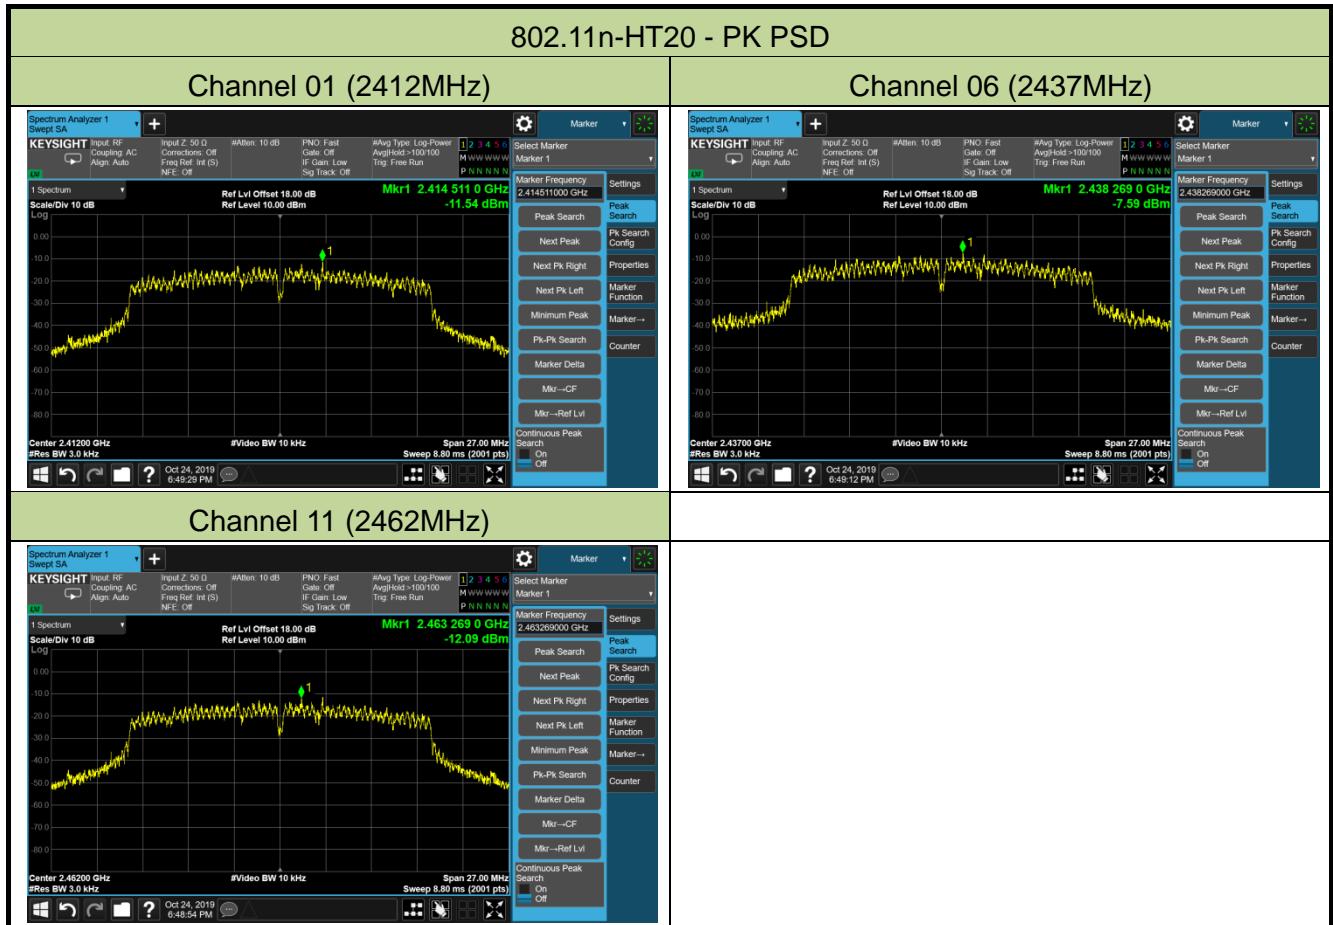

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10 - Section 11.11

7.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to \geq 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW \geq 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Notes


1. RBW was set to 1.3MHz rather than 100 kHz in order to increase the measurement speed; meanwhile, the VBW was set to 4MHz instead of 300 kHz.
2. The display line shown in the following plots denotes the limit at 20dB below the fundamental emission level measured in a 100 kHz bandwidth. However, since the traces in the following plots are measured with a 1.3 MHz RBW, the display line may not necessarily appear to be 20 dB below the level of the fundamental measured in a 1.3 MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

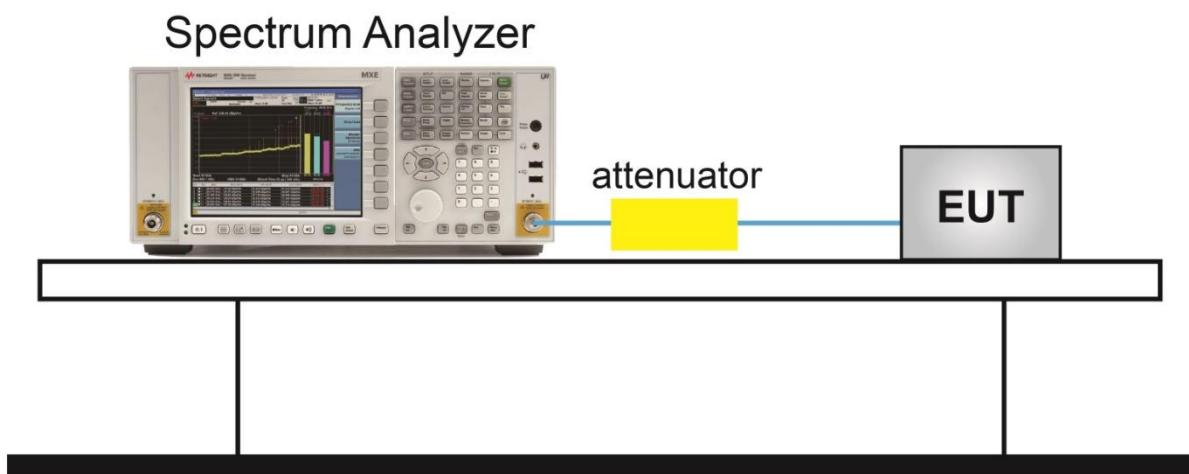
7.5.4. Test Setup

7.5.5. Test Result

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	52%
Test Site	SR1	Test Date	2019/10/27

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
802.11b	11Mbps	01	2412	20dBc	Pass
802.11b	11Mbps	06	2437	20dBc	Pass
802.11b	11Mbps	11	2462	20dBc	Pass
802.11g	6Mbps	01	2412	20dBc	Pass
802.11g	6Mbps	06	2437	20dBc	Pass
802.11g	6Mbps	11	2462	20dBc	Pass
802.11n-HT20	MCS0	01	2412	20dBc	Pass
802.11n-HT20	MCS0	06	2437	20dBc	Pass
802.11n-HT20	MCS0	11	2462	20dBc	Pass

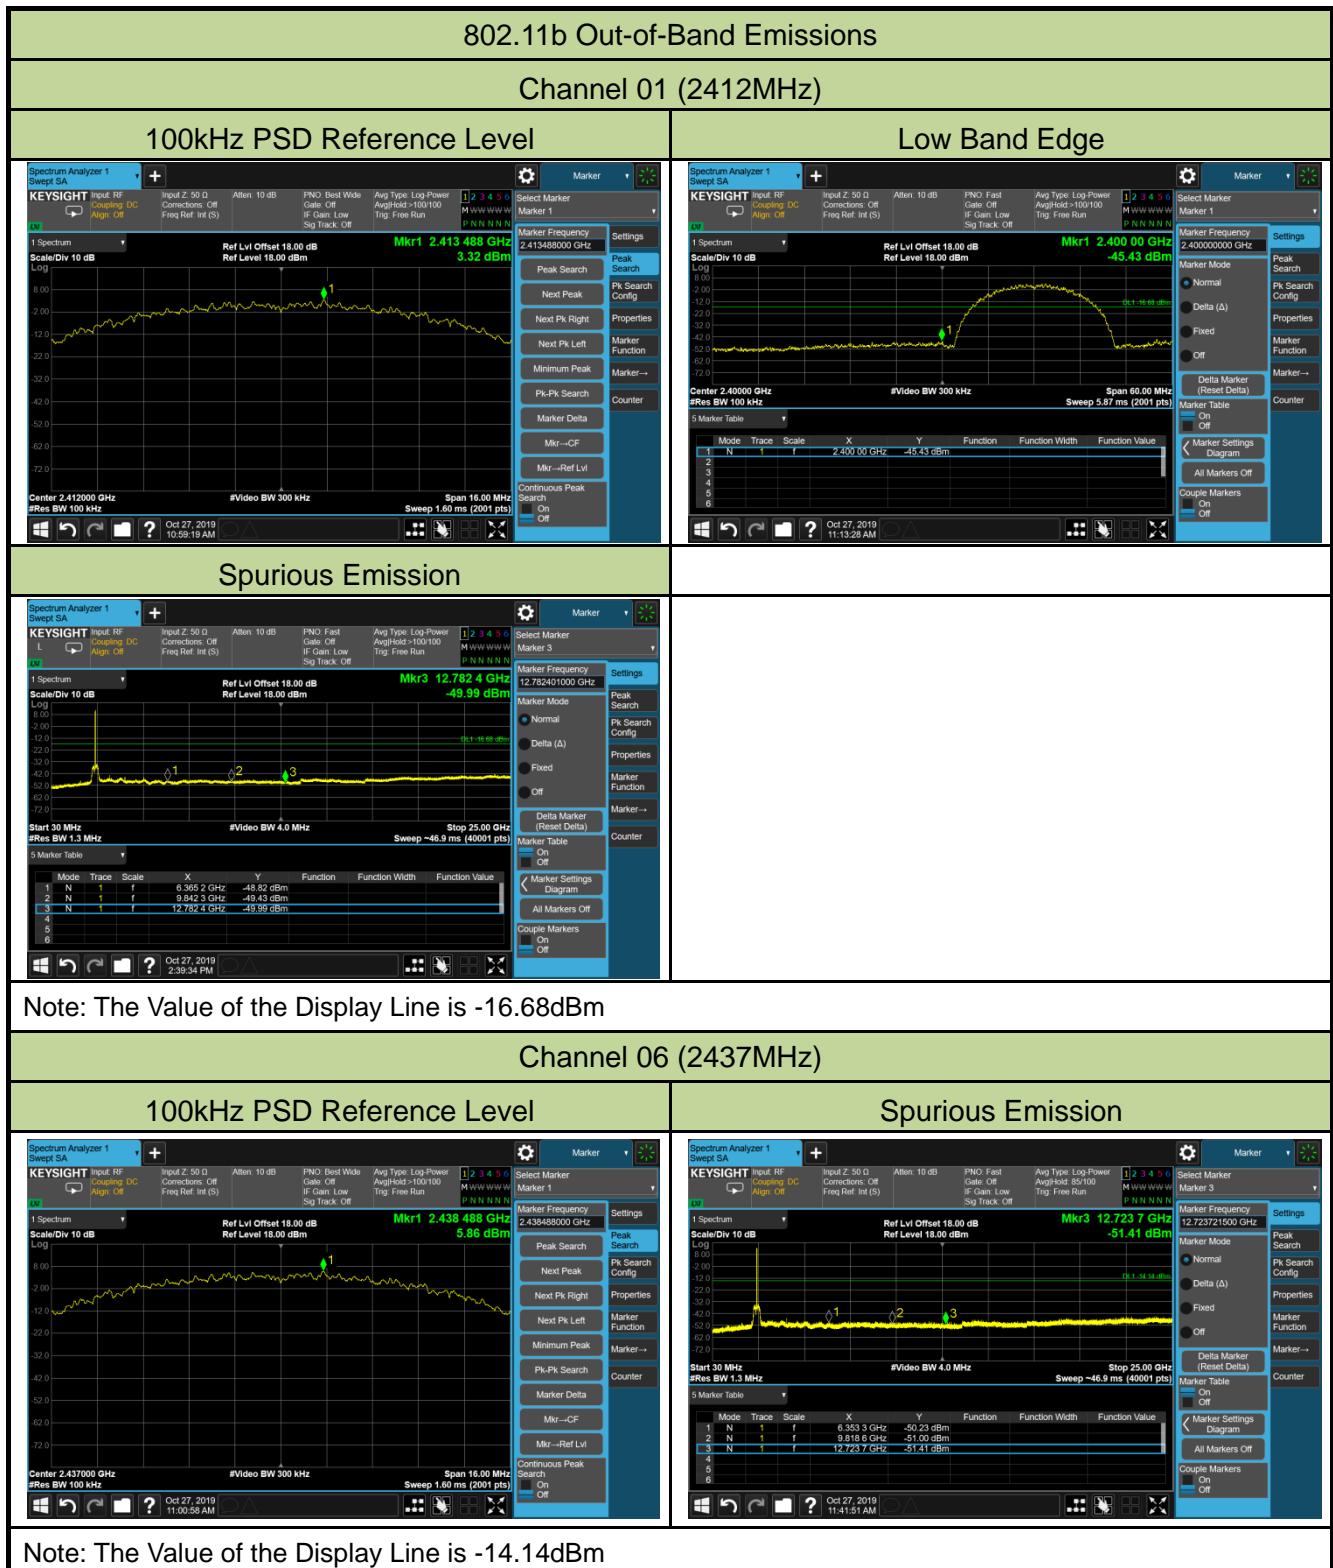

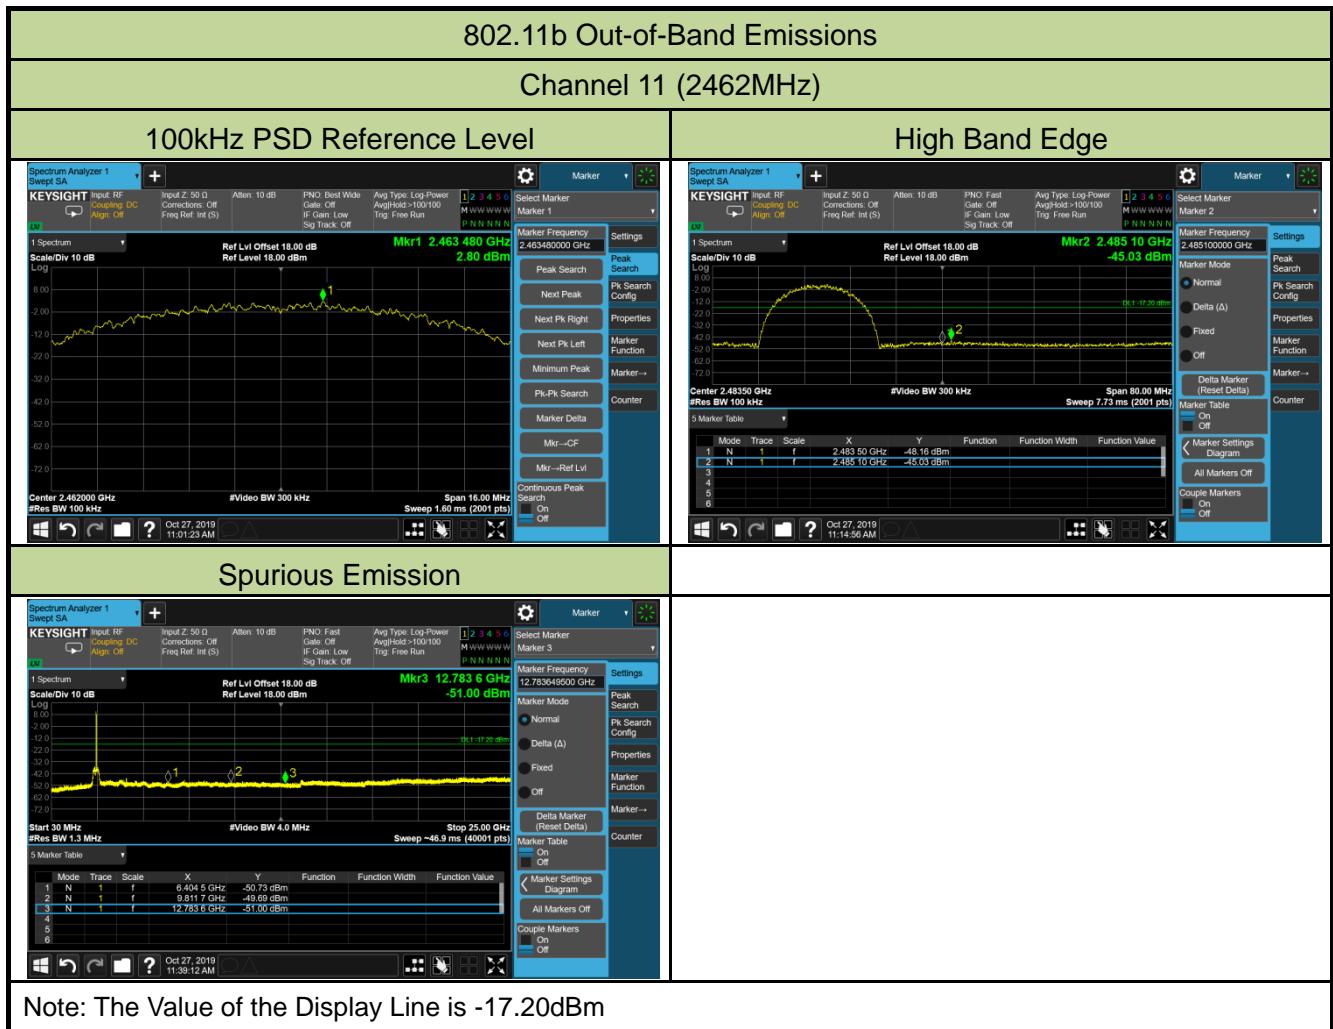

Note: The Value of the Display Line is -17.20dBm

