

FCC REPORT

Applicant: YANSHAN YONGSHENGJIE TECHNOLOGY CO.,LTD
Address of Applicant: BUBIAO INDUSTRIAL TRANSFER PARK,YANSHAN COUNTY,WENSHAN CITY,YUNNAN PROVINCE,CHINA
Manufacturer/Factory: YANSHAN YONGSHENGJIE TECHNOLOGY CO.,LTD
Address of Manufacturer/Factory: BUBIAO INDUSTRIAL TRANSFER PARK,YANSHAN COUNTY,WENSHAN CITY,YUNNAN PROVINCE,CHINA
Equipment Under Test (EUT)

Product Name: Car Audio Palyer(without CD)
Model No.: PV-91B, YSJ-3242M, PL-81B, YSJ-3252M, PV-91BP, YSJ-5245M, PL-81BP, YSJ-5255M
FCC ID: 2ANS2-YSJ01SPM
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2017
Date of sample receipt: July 03, 2017
Date of Test: July 04-09, 2017
Date of report issued: July 10, 2017
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	July 10, 2017	Original

Prepared By:




Date:

July 10, 2017

Project Engineer

Check By:



Date:

July 10, 2017

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 RADIATED EMISSION METHOD	10
7.2.1 Field Strength of The Fundamental Signal	12
7.2.2 Spurious emissions.....	13
7.2.3 Bandedge emissions.....	17
7.3 20dB OCCUPY BANDWIDTH	21
8 TEST SETUP PHOTO	23
9 EUT CONSTRUCTIONAL DETAILS	24

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of $k=2$ and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Car Audio Palyer(without CD)
Model No.:	PV-91B, YSJ-3242M, PL-81B, YSJ-3252M, PV-91BP, YSJ-5245M, PL-81BP, YSJ-5255M
Test Model No:	PL-81B
<i>Remark:All above models are identical in the same PCB layout, interior structure and electrical circuits. Th differences are color and model name for commercial purpose.</i>	
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	PCB antenna
Antenna gain:	0dBi (Declared by Applicant)
Power supply:	DC 12V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Pre-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	92.14	93.23	91.26

Final Test Mode:

The EUT was tested in GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation is the worst case.

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”:

Y axis (see the test setup photo)

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
GS	Lead-Acid battery	S5D26R-MFZ	9442804454

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer


None.

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2017	June 28 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2017	June 28 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2017	June 28 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2017	June 28 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2017	June 28 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2017	June 28 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2017	June 28 2018
11	Coaxial cable	GTS	N/A	GTS210	June 29 2017	June 28 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2017	June 28 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2017	June 28 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2017	June 28 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2017	June 28 2018
16	Band filter	Amindeon	82346	GTS219	June 29 2017	June 28 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 29 2017	June 28 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 29 2017	June 28 2018


7 Test results and Measurement Data

7.1 Antenna requirement

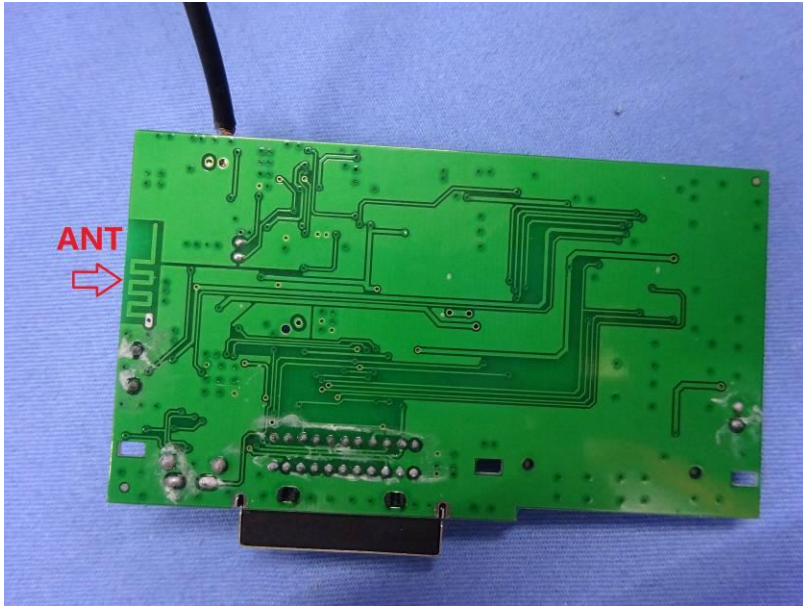Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
<i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi</i> 	

7.2 Radiated Emission Method

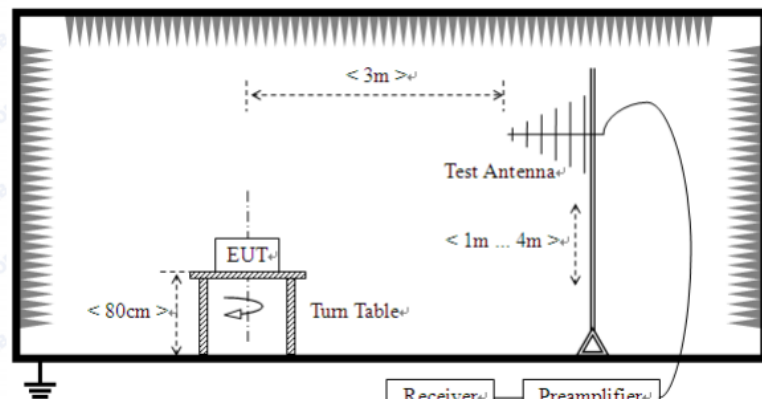Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.00		Quasi-peak Value
	88MHz-216MHz		43.50		Quasi-peak Value
	216MHz-960MHz		46.00		Quasi-peak Value
	960MHz-1GHz		54.00		Quasi-peak Value
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
					
	Above 1GHz				

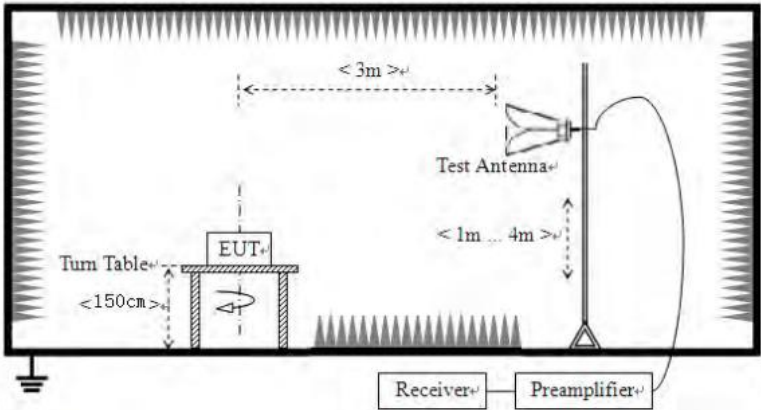	
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.2.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	94.02	27.58	5.39	34.01	92.98	114.00	-21.02	Vertical
2402.00	92.52	27.58	5.39	34.01	91.48	114.00	-22.52	Horizontal
2441.00	94.28	27.48	5.43	33.96	93.23	114.00	-20.77	Vertical
2441.00	92.23	27.48	5.43	33.96	91.18	114.00	-22.82	Horizontal
2480.00	94.15	27.52	5.47	33.92	93.22	114.00	-20.78	Vertical
2480.00	92.14	27.52	5.47	33.92	91.21	114.00	-22.79	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	84.32	27.58	5.39	34.01	83.28	94.00	-10.72	Vertical
2402.00	82.50	27.58	5.39	34.01	81.46	94.00	-12.54	Horizontal
2441.00	84.13	27.48	5.43	33.96	83.08	94.00	-10.92	Vertical
2441.00	82.02	27.48	5.43	33.96	80.97	94.00	-13.03	Horizontal
2480.00	83.69	27.52	5.47	33.92	82.76	94.00	-11.24	Vertical
2480.00	81.35	27.52	5.47	33.92	80.42	94.00	-13.58	Horizontal

Remark: RBW 3MHz, VBW 10MHz , peak detector for PK value, RBW 3MHz, VBW 10MHz AV detector for AV value

7.2.2 Spurious emissions

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
96.10	34.18	14.90	1.16	29.72	20.52	43.50	-22.98	Vertical
167.82	35.85	10.90	1.67	29.33	19.09	43.50	-24.41	Vertical
239.99	39.51	14.09	2.07	29.56	26.11	46.00	-19.89	Vertical
480.53	40.00	18.07	3.22	29.34	31.95	46.00	-14.05	Vertical
601.43	29.49	20.46	3.73	29.30	24.38	46.00	-21.62	Vertical
938.83	25.03	23.34	4.99	29.10	24.26	46.00	-21.74	Vertical
96.10	30.09	14.90	1.16	29.72	16.43	43.50	-27.07	Horizontal
128.11	34.73	11.22	1.42	29.52	17.85	43.50	-25.65	Horizontal
239.99	48.10	14.09	2.07	29.56	34.70	46.00	-11.30	Horizontal
360.45	30.55	16.43	2.67	29.69	19.96	46.00	-26.04	Horizontal
480.53	42.38	18.07	3.22	29.34	34.33	46.00	-11.67	Horizontal
721.73	32.94	21.10	4.17	29.20	29.01	46.00	-16.99	Horizontal

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	37.30	31.78	8.60	32.09	45.59	74.00	-28.41	Vertical
7206.00	31.82	36.15	11.65	32.00	47.62	74.00	-26.38	Vertical
9608.00	31.46	37.95	14.14	31.62	51.93	74.00	-22.07	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	41.58	31.78	8.60	32.09	49.87	74.00	-24.13	Horizontal
7206.00	33.58	36.15	11.65	32.00	49.38	74.00	-24.62	Horizontal
9608.00	30.88	37.95	14.14	31.62	51.35	74.00	-22.65	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.11	31.78	8.60	32.09	34.40	54.00	-19.60	Vertical
7206.00	20.51	36.15	11.65	32.00	36.31	54.00	-17.69	Vertical
9608.00	19.59	37.95	14.14	31.62	40.06	54.00	-13.94	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.34	31.78	8.60	32.09	38.63	54.00	-15.37	Horizontal
7206.00	22.68	36.15	11.65	32.00	38.48	54.00	-15.52	Horizontal
9608.00	19.32	37.95	14.14	31.62	39.79	54.00	-14.21	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	36.78	31.85	8.67	32.12	45.18	74.00	-28.82	Vertical
7323.00	31.48	36.37	11.72	31.89	47.68	74.00	-26.32	Vertical
9764.00	31.16	38.35	14.25	31.62	52.14	74.00	-21.86	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	40.96	31.85	8.67	32.12	49.36	74.00	-24.64	Horizontal
7323.00	33.19	36.37	11.72	31.89	49.39	74.00	-24.61	Horizontal
9764.00	30.53	38.35	14.25	31.62	51.51	74.00	-22.49	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	25.70	31.85	8.67	32.12	34.10	54.00	-19.90	Vertical
7323.00	20.23	36.37	11.72	31.89	36.43	54.00	-17.57	Vertical
9764.00	19.34	38.35	14.25	31.62	40.32	54.00	-13.68	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	29.87	31.85	8.67	32.12	38.27	54.00	-15.73	Horizontal
7323.00	22.37	36.37	11.72	31.89	38.57	54.00	-15.43	Horizontal
9764.00	19.03	38.35	14.25	31.62	40.01	54.00	-13.99	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	36.23	31.93	8.73	32.16	44.73	74.00	-29.27	Vertical
7440.00	31.12	36.59	11.79	31.78	47.72	74.00	-26.28	Vertical
9920.00	30.83	38.81	14.38	31.88	52.14	74.00	-21.86	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	40.30	31.93	8.73	32.16	48.80	74.00	-25.20	Horizontal
7440.00	32.78	36.59	11.79	31.78	49.38	74.00	-24.62	Horizontal
9920.00	30.15	38.81	14.38	31.88	51.46	74.00	-22.54	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	25.30	31.93	8.73	32.16	33.80	54.00	-20.20	Vertical
7440.00	19.96	36.59	11.79	31.78	36.56	54.00	-17.44	Vertical
9920.00	19.10	38.81	14.38	31.88	40.41	54.00	-13.59	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	29.42	31.93	8.73	32.16	37.92	54.00	-16.08	Horizontal
7440.00	22.07	36.59	11.79	31.78	38.67	54.00	-15.33	Horizontal
9920.00	18.75	38.81	14.38	31.88	40.06	54.00	-13.94	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

7.2.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

GFSK mode


Test channel:	Lowest channel
Polarization	Horizontal

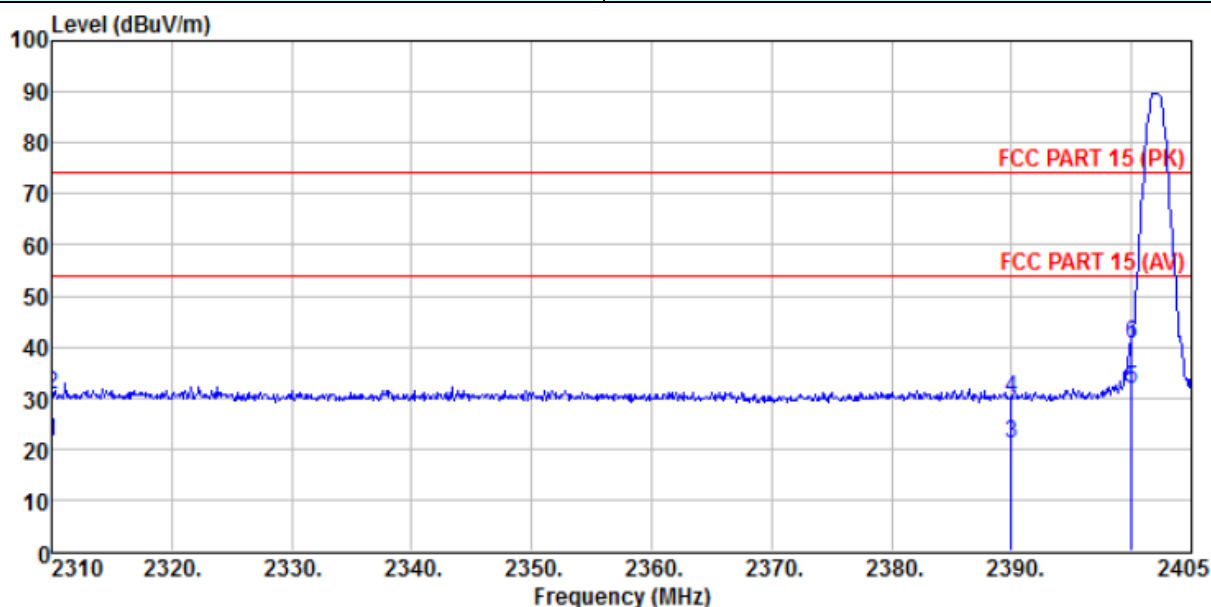

Site : 3m chamber
Condition: FCC PART 15 (PK) 3m HORIZONTAL
Remark : GFSK 2402MHz

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	24.76	27.91	5.30	36.64	21.33	54.00	-32.67	Average
2	2310.000	33.89	27.91	5.30	36.64	30.46	74.00	-43.54	Peak
3	2390.000	24.71	27.59	5.38	36.71	20.97	54.00	-33.03	Average
4	2390.000	33.55	27.59	5.38	36.71	29.81	74.00	-44.19	Peak
5	2400.000	35.56	27.58	5.39	36.71	31.82	54.00	-22.18	Average
6	2400.000	44.42	27.58	5.39	36.71	40.68	74.00	-33.32	Peak


Test channel:	Lowest channel
Polarization	Vertical

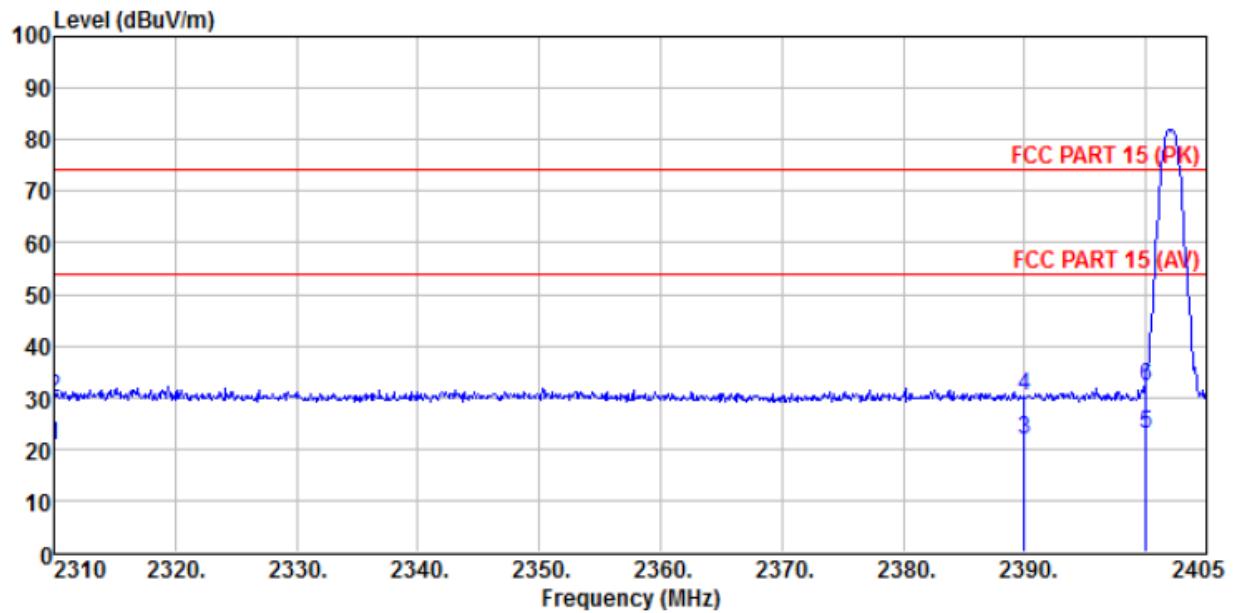

Site : 3m chamber
Condition: FCC PART 15 (PK) 3m VERTICAL
Remark : GFSK 2402MHz

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	24.16	27.91	5.30	36.64	20.73	54.00	-33.27	Average
2	2310.000	33.16	27.91	5.30	36.64	29.73	74.00	-44.27	Peak
3	2390.000	25.47	27.59	5.38	36.71	21.73	54.00	-32.27	Average
4	2390.000	33.95	27.59	5.38	36.71	30.21	74.00	-43.79	Peak
5	2400.000	26.50	27.58	5.39	36.71	22.76	54.00	-31.24	Average
6	2400.000	35.74	27.58	5.39	36.71	32.00	74.00	-42.00	Peak


Test channel:	Highest channel
Polarization	Horizontal

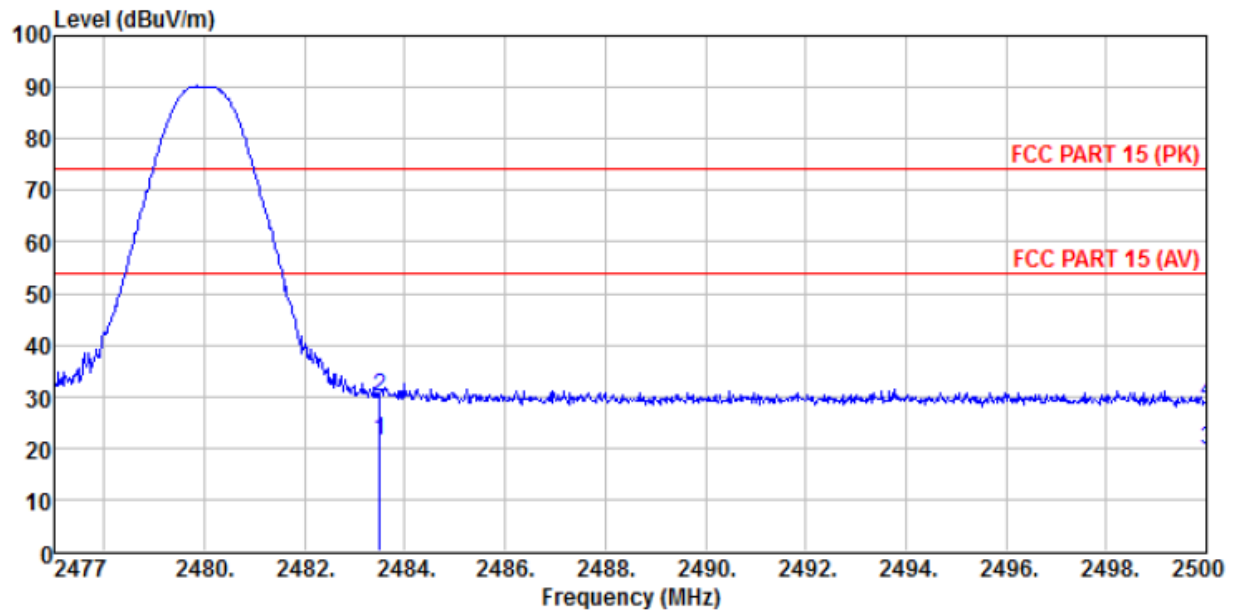

Site : 3m chamber
Condition: FCC PART 15 (PK) 3m HORIZONTAL
Remark : 2480MHz

	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level Factor	Loss Factor	Level	Line	Limit Remark				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	2483.500	25.16	27.53	5.47	36.78	21.38	54.00	-32.62	Average
2	2483.500	33.70	27.53	5.47	36.78	29.92	74.00	-44.08	Peak
3	2500.000	23.29	27.55	5.49	36.79	19.54	54.00	-34.46	Average
4	2500.000	32.68	27.55	5.49	36.79	28.93	74.00	-45.07	Peak

Test channel:	Highest channel
Polarization	Vertical

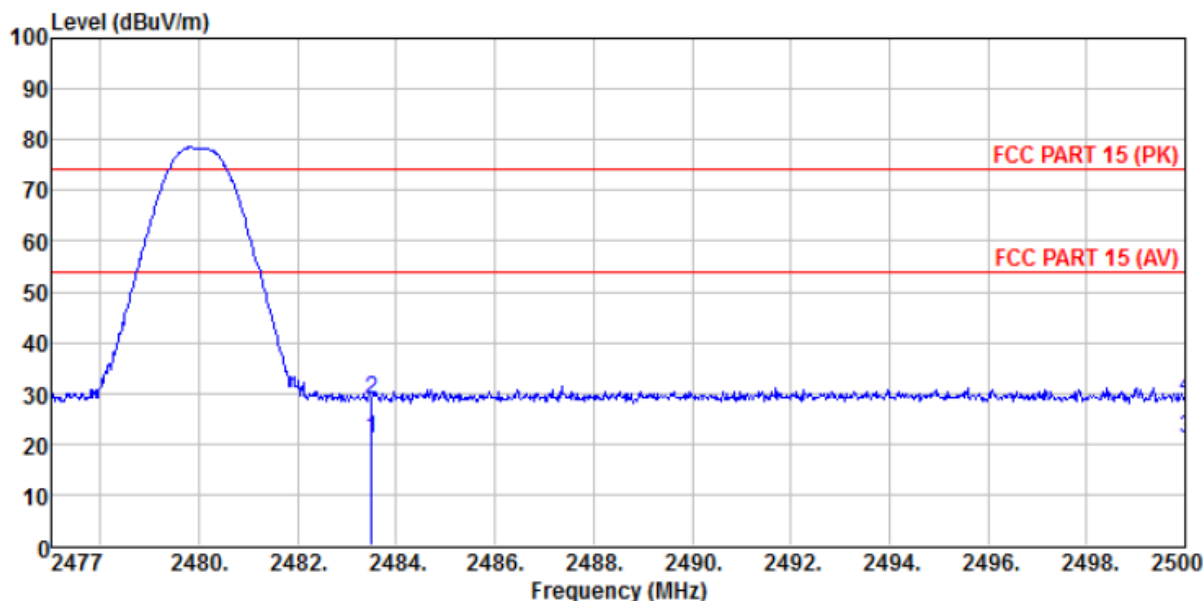


Site : 3m chamber
Condition: FCC PART 15 (PK) 3m VERTICAL
Remark : 2480MHz

	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2483.500	24.75	27.53	5.47	36.78	20.97	54.00	-33.03	Average
2 2483.500	32.69	27.53	5.47	36.78	28.91	74.00	-45.09	Peak
3 2500.000	24.86	27.55	5.49	36.79	21.11	54.00	-32.89	Average
4 2500.000	33.01	27.55	5.49	36.79	29.26	74.00	-44.74	Peak

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
RBW 1MHz, VBW 3MHz , peak detector for PK value, RBW 1MHz, VBW 10Hz AV detector for AV value


7.3 20dB Occupy Bandwidth

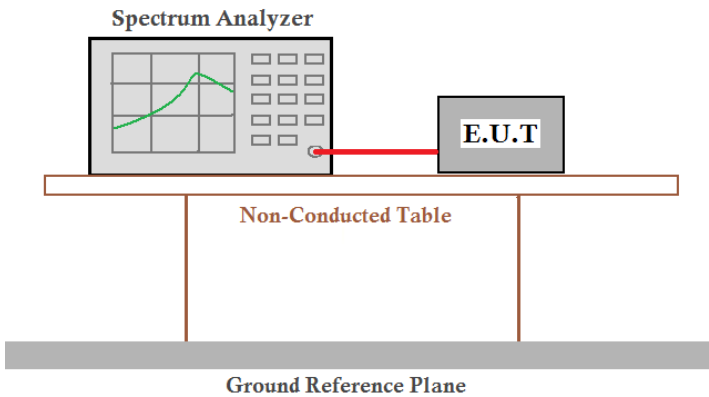Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	0.872	Pass
Middle	0.868	Pass
Highest	0.873	Pass


Test plot as follows:

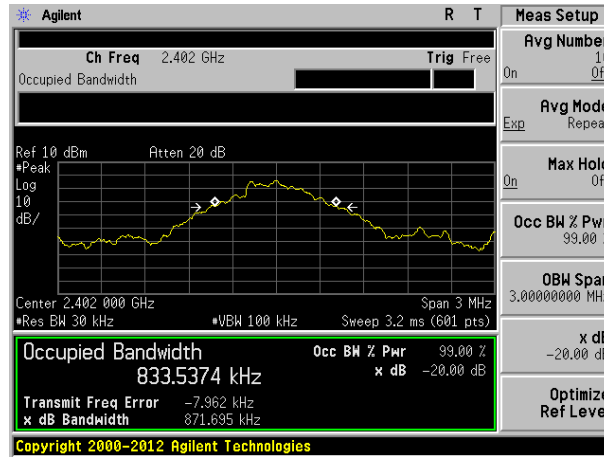

Lowest channel

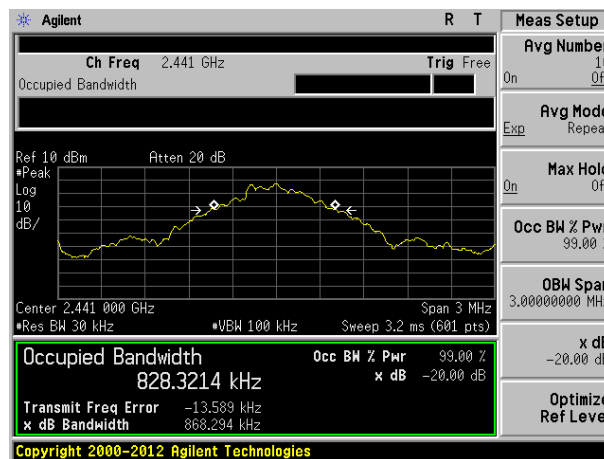


Middle channel

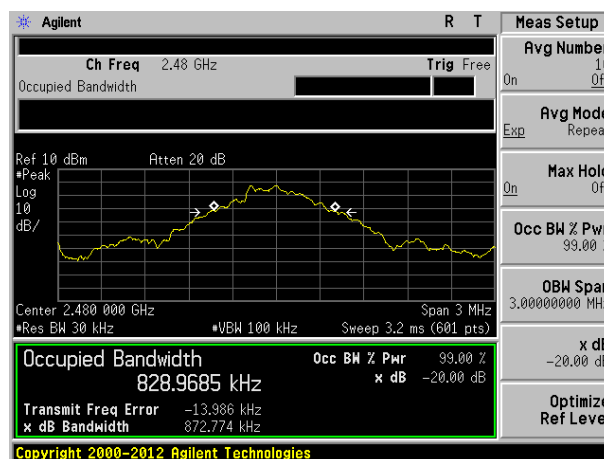



Highest channel

8 Test Setup Photo

Radiated Emission

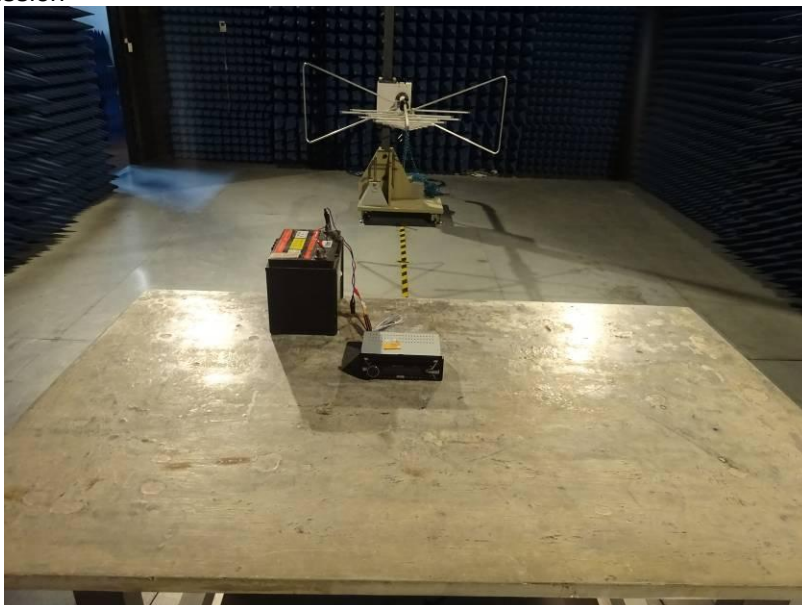


9 EUT Constructional Details

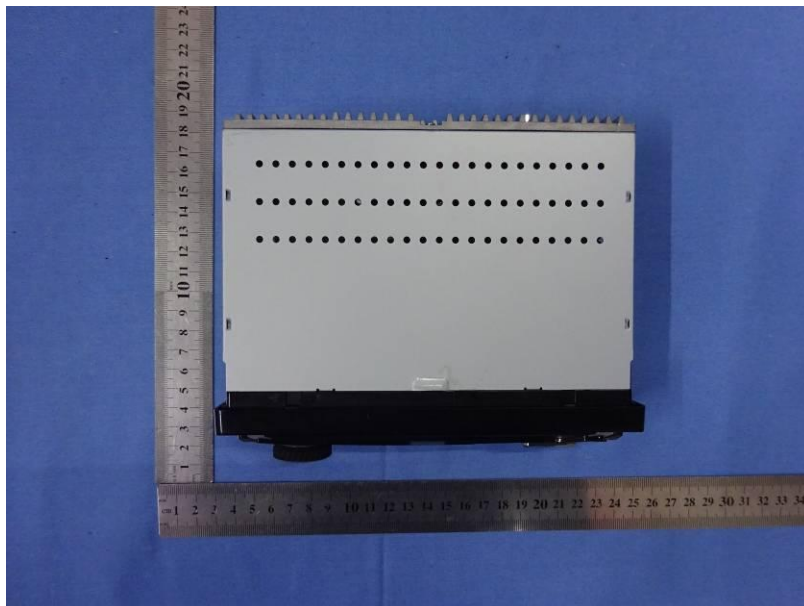
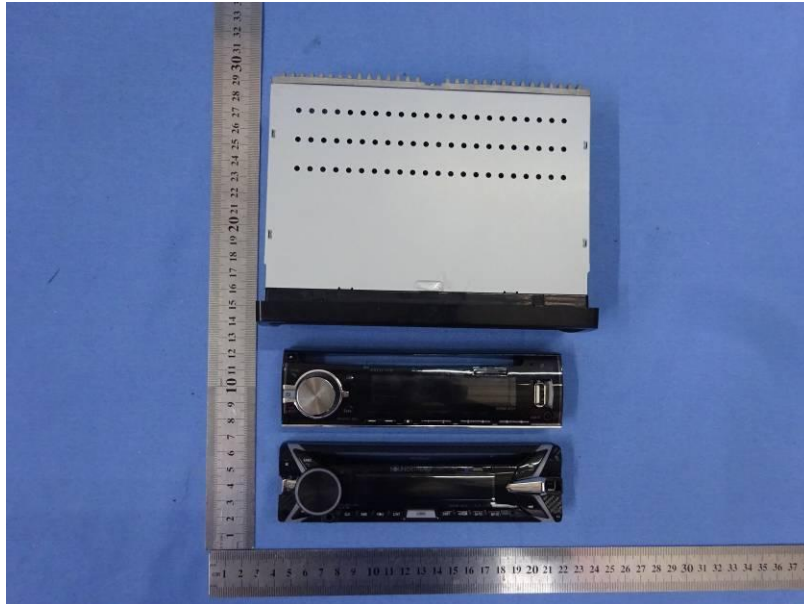









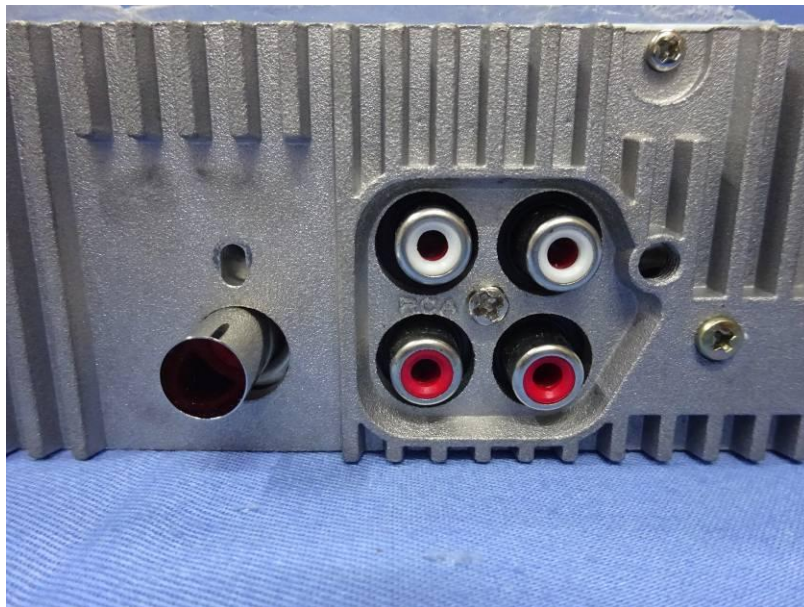






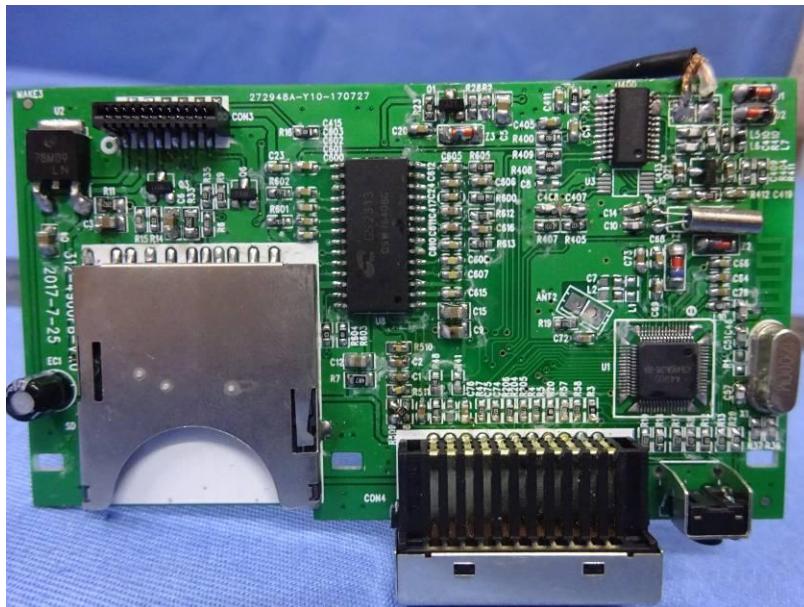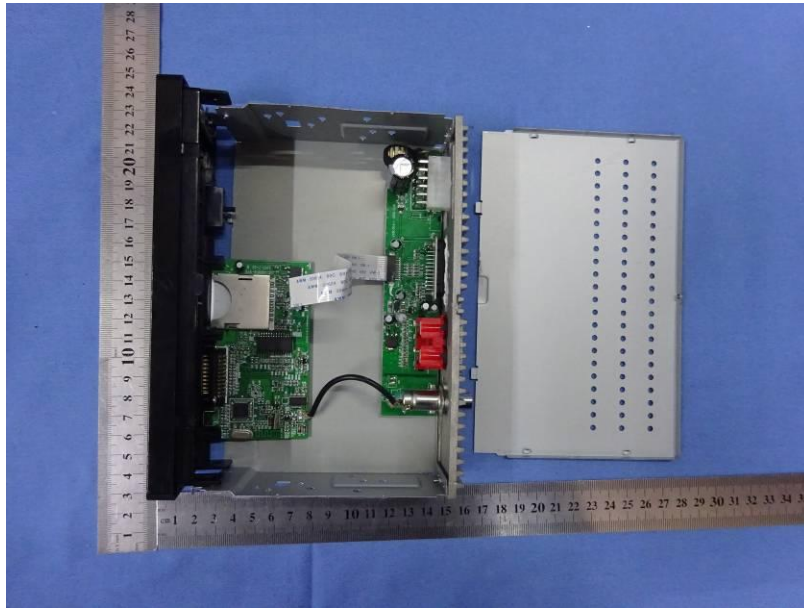


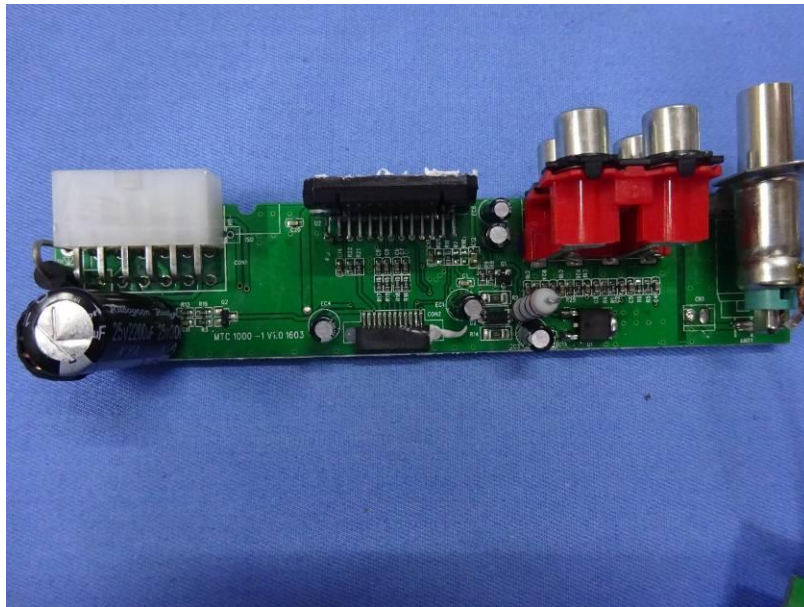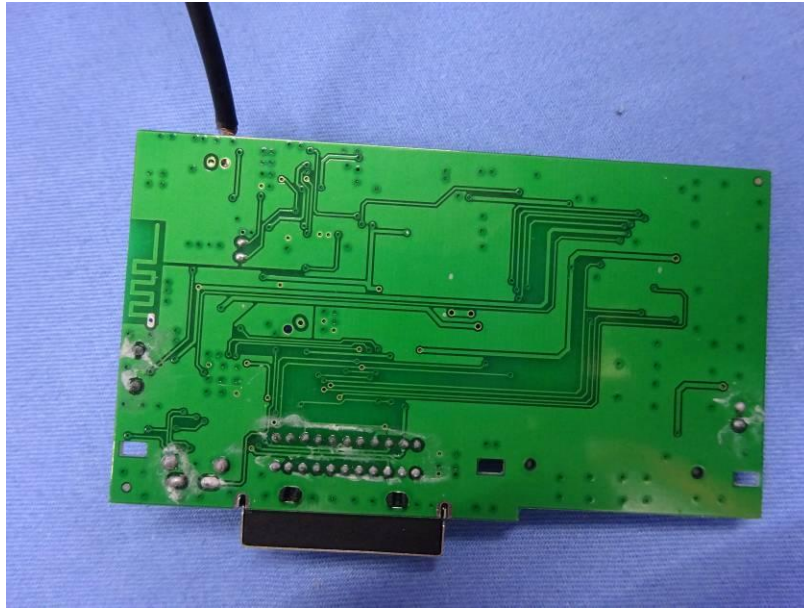

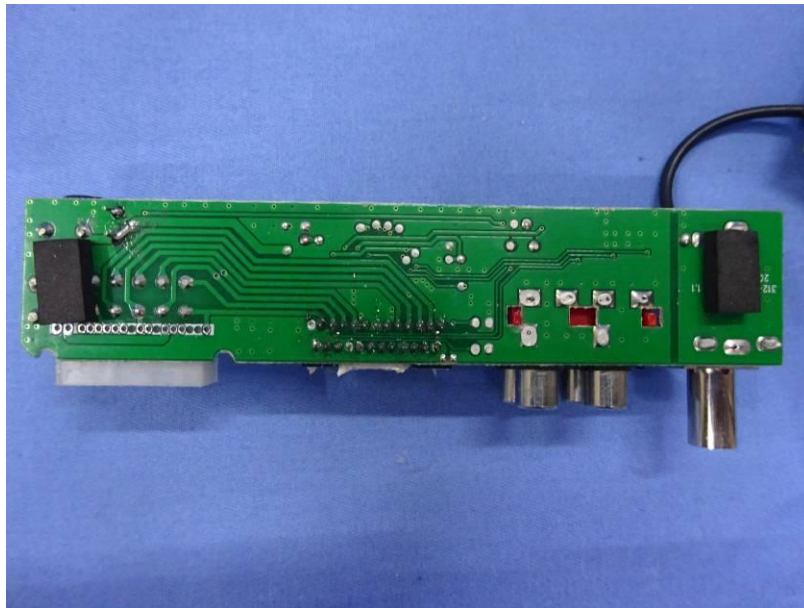

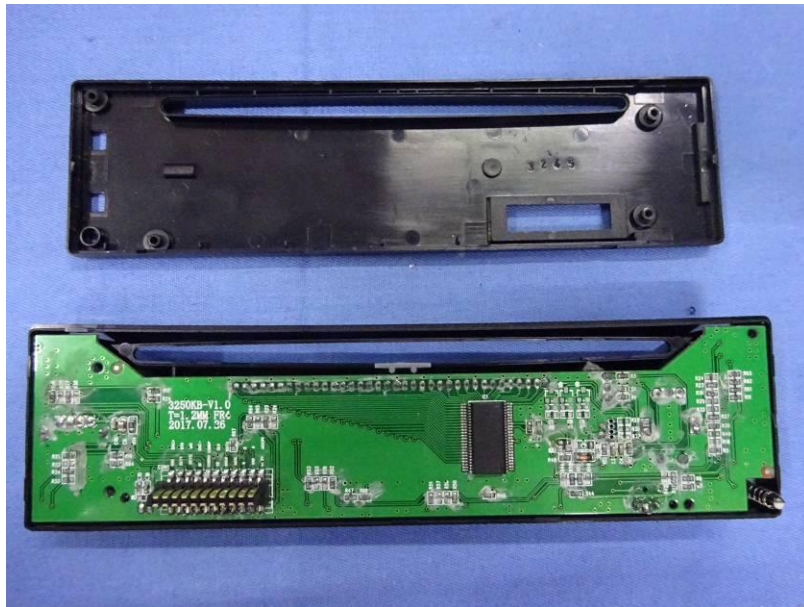

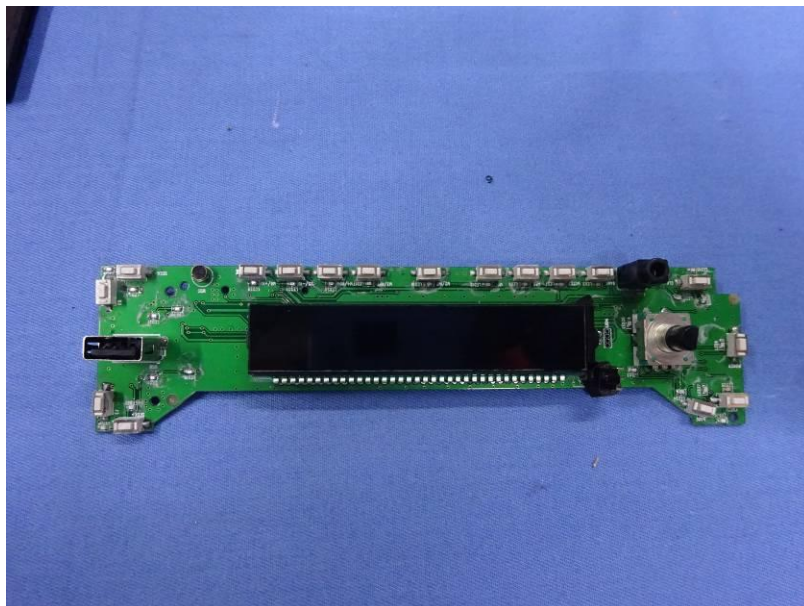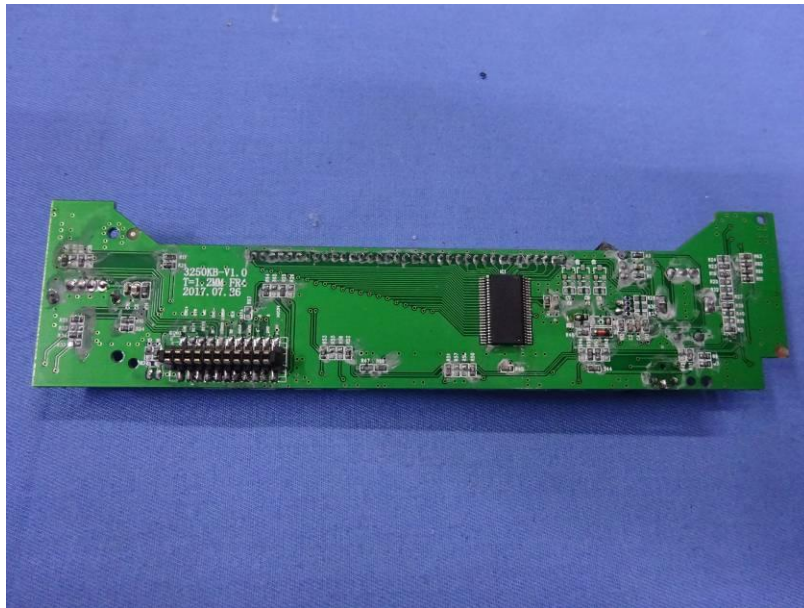

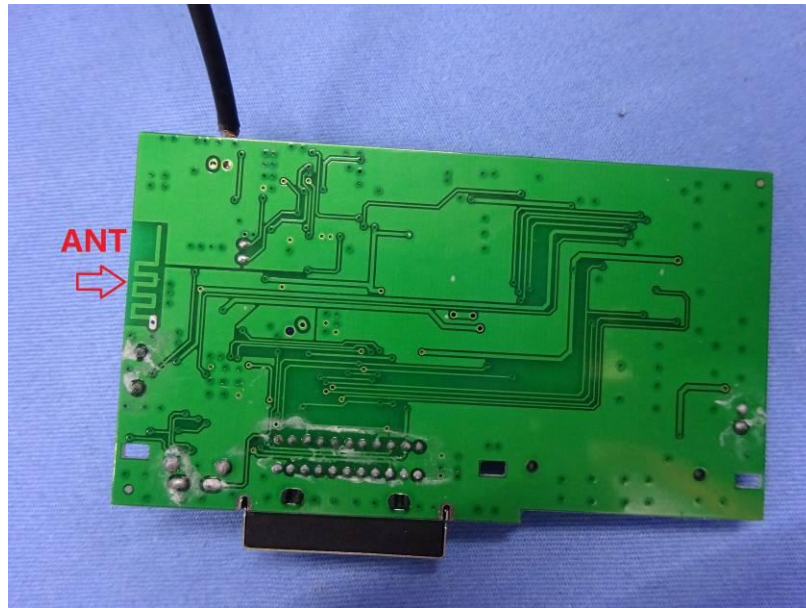

-----End-----