



TEST REPORT

Report Reference No. : **TRE1710006801** R/C.....: 73304

FCC ID..... : **2ANSP-SPE30**

Applicant's name..... : **SPRITE (Group) LIMITED**

Address..... : ShenLiang Group, No.299 GuanPing Road, LongHua District, ShenZhen, China

Manufacturer..... : SPRITE (Group) LIMITED

Address..... : ShenLiang Group, No.299 GuanPing Road, LongHua District, ShenZhen, China

Test item description : **Wireless Bluetooth Earphone**

Trade Mark : SPRITE

Model/Type reference..... : SPE30

Listed Model(s) : SPE31

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Oct. 17, 2017

Date of testing..... : Oct. 17, 2017 - Oct. 30, 2017

Date of issue..... : Oct. 30, 2017

Result..... : **PASS**

Compiled by
(Position+Printed name+Signature): File administrators Becky Liang

Becky Liang

Supervised by
(Position+Printed name+Signature): Project Engineer Jerry Wang

Jerry Wang

Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna requirement	10
5.2.	Conducted Emissions (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	20 dB Bandwidth	18
5.5.	Carrier Frequencies Separation	22
5.6.	Hopping Channel Number	24
5.7.	Dwell Time	26
5.8.	Pseudorandom Frequency Hopping Sequence	33
5.9.	Restricted band (radiated)	34
5.10.	Band edge and Spurious Emissions (conducted)	36
5.11.	Spurious Emissions (radiated)	56
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>60</u>
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	<u>62</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Version No.	Date of issue	Description
00	Oct. 30, 2017	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	Pass	Jerry Wang
AC Power Line Conducted Emissions	15.207	Pass	Shower Dai
Conducted Peak Output Power	15.247 (b)(1)	Pass	Baozhu Hu
20 dB Bandwidth	15.247 (a)(1)	Pass	Baozhu Hu
Carrier Frequencies Separation	15.247 (a)(1)	Pass	Baozhu Hu
Hopping Channel Number	15.247 (a)(1)	Pass	Baozhu Hu
Dwell Time	15.247 (a)(1)	Pass	Baozhu Hu
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass	Baozhu Hu
Restricted band	15.247(d)/15.205	Pass	Baozhu Hu
Radiated Emissions	15.247(d)/15.209	Pass	Si Ding

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	SPRITE (Group) LIMITED
Address:	ShenLiang Group, No.299 GuanPing Road, LongHua District, ShenZhen, China
Manufacturer:	SPRITE (Group) LIMITED
Address:	ShenLiang Group, No.299 GuanPing Road, LongHua District, ShenZhen, China

3.2. Product Description

Name of EUT:	Wireless Bluetooth Earphone
Trade Mark:	SPRITE
Model No.:	SPE30
Listed Model(s):	SPE31
Power supply:	DC 5V for USB port and DC 3.7V for internal battery
Adapter information:	-
Hardware version:	V2.0
Software version:	V1.3
Bluetooth	
Version:	Supported BT4.1+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Integral Antenna
Antenna gain:	0 dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

➤ TEST MODE

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

Note: The EUT comprises left and right channel earphone, both are the same and only the test data of left earphone recorded in this report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	PC	Manufacturer:	TOSHIBA
		Model:	Satellite M800
	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2016/11/13
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2016/11/13
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2016/11/13
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	-	-

Radiated Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI test receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13
2	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2016/11/13
3	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
4	Horn antenna	ShwarzBeck	9120D	1011	2016/11/13
5	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
6	Amplifier	Sonoma	310N	E009-13	2016/11/13
7	JS Amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2016/11/13
8	Amplifier	Compliance Direction systems	PAP1-4060	120	2016/11/13
9	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
10	EMI test Software	Rohde&Schwarz	ESK1	-	-
11	EMI test Software	Audix	E3	-	-
12	TURNTABLE	MATURO	TT2.0	-	-
13	ANTENNA MAST	MATURO	TAM-4.0-P	-	-

RF Conducted methods					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	2016/11/13

The Cal.Interval was one year.

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☒ **Passed** ☐ **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

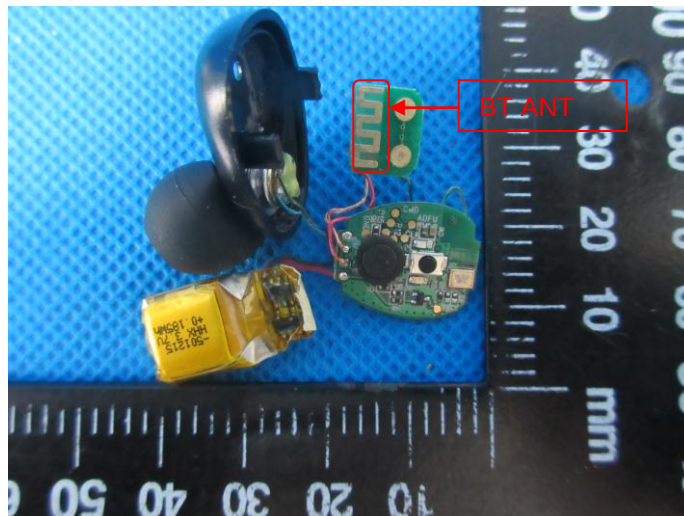

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

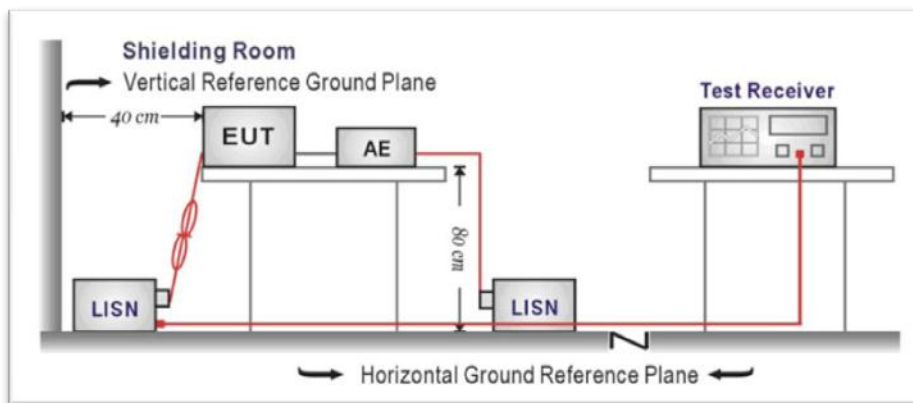

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS


☒ Passed ☐ Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

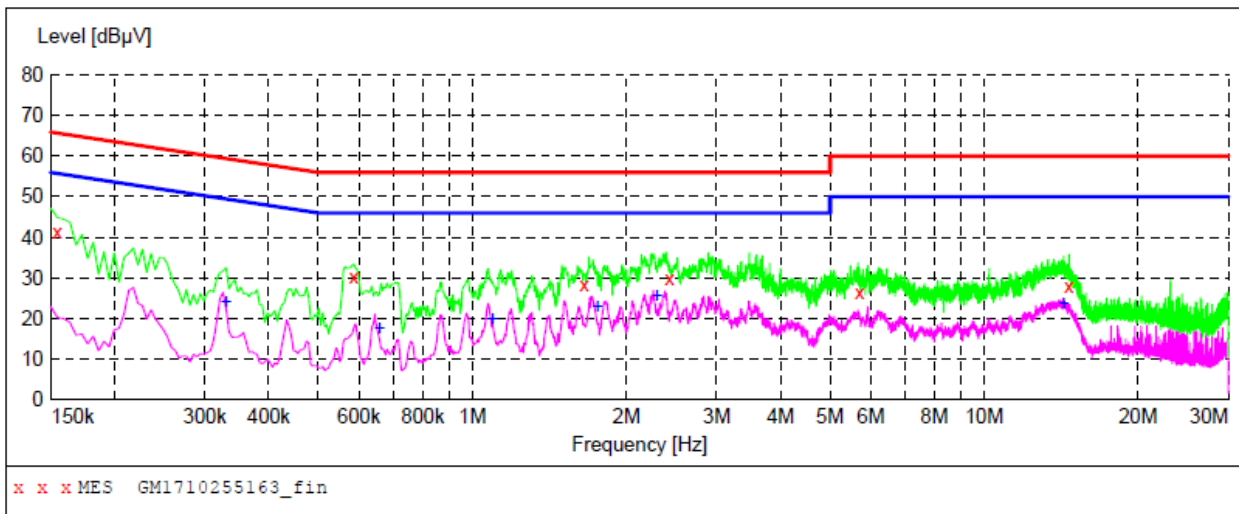


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	41.30	10.4	66	24.5	QP	L1	GND
0.586500	30.40	10.2	56	25.6	QP	L1	GND
1.653000	28.40	10.2	56	27.6	QP	L1	GND
2.427000	29.70	10.2	56	26.3	QP	L1	GND
5.716500	26.50	10.3	60	33.5	QP	L1	GND
14.658000	27.80	10.5	60	32.2	QP	L1	GND

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.330000	24.00	10.2	50	25.5	AV	L1	GND
0.658500	17.70	10.2	46	28.3	AV	L1	GND
1.095000	19.90	10.2	46	26.1	AV	L1	GND
1.756500	23.00	10.2	46	23.0	AV	L1	GND
2.292000	25.70	10.2	46	20.3	AV	L1	GND
14.298000	23.70	10.5	50	26.3	AV	L1	GND

Test Line:

N

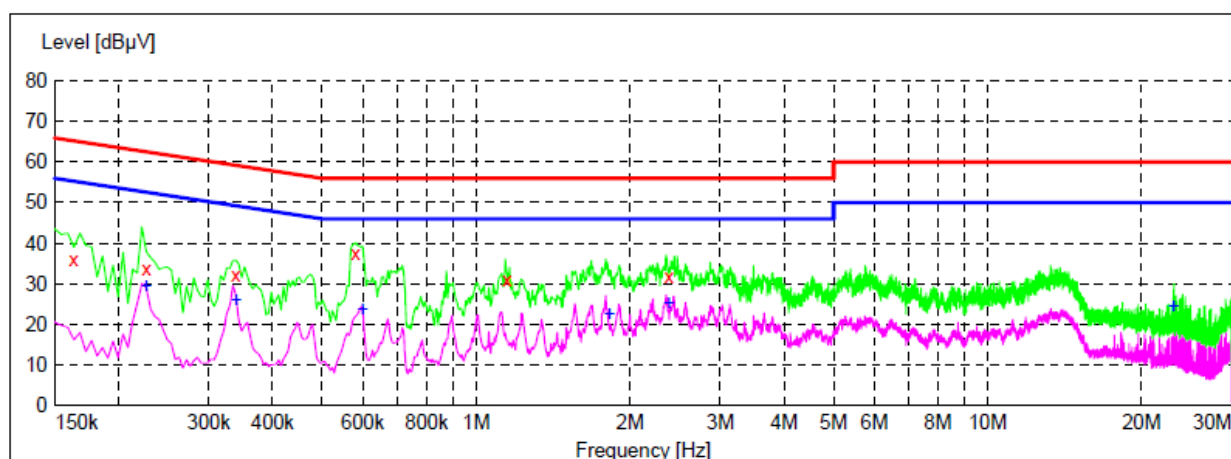

x x x MES GM1710255164_fin

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.163500	36.10	10.4	65	29.2	QP	N	GND
0.226500	33.80	10.3	63	28.8	QP	N	GND
0.339000	32.20	10.2	59	27.0	QP	N	GND
0.582000	37.60	10.2	56	18.4	QP	N	GND
1.149000	30.80	10.2	56	25.2	QP	N	GND
2.382000	31.60	10.2	56	24.4	QP	N	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.226500	29.40	10.3	53	23.2	AV	N	GND
0.339000	25.90	10.2	49	23.3	AV	N	GND
0.600000	23.80	10.2	46	22.2	AV	N	GND
1.824000	22.40	10.2	46	23.6	AV	N	GND
2.382000	25.40	10.2	46	20.6	AV	N	GND
23.127000	24.40	10.7	50	25.6	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

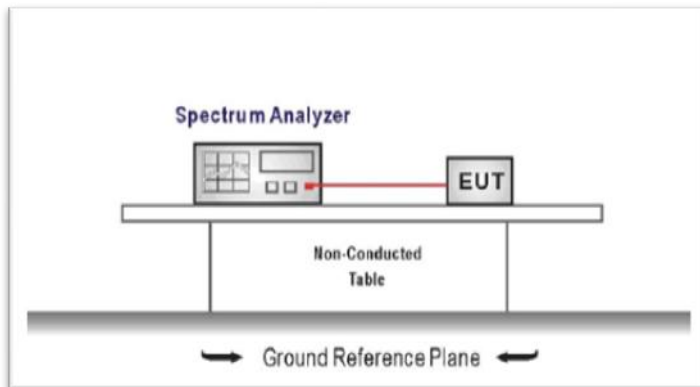

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ the 20 dB bandwidth of the emission being measured, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:


Please refer to the clause 3.3



TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	3.375	≤ 30.00	Pass
	39	1.172		
	78	0.643		
$\pi/4$ DQPSK	00	4.588	≤ 21.00	Pass
	39	2.443		
	78	1.991		
8DPSK	00	4.914	≤ 21.00	Pass
	39	2.716		
	78	2.336		

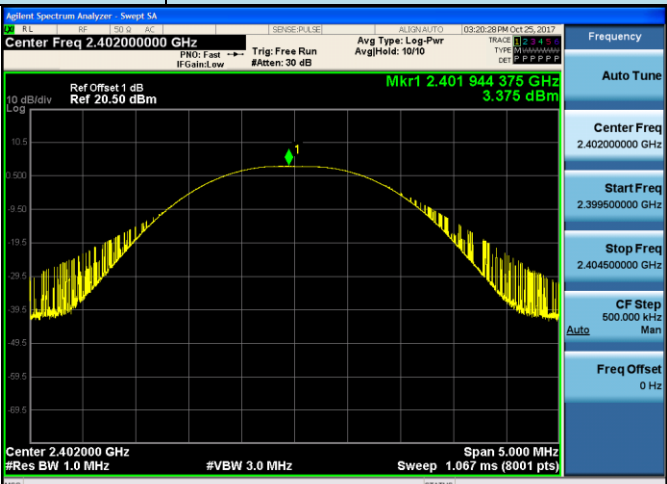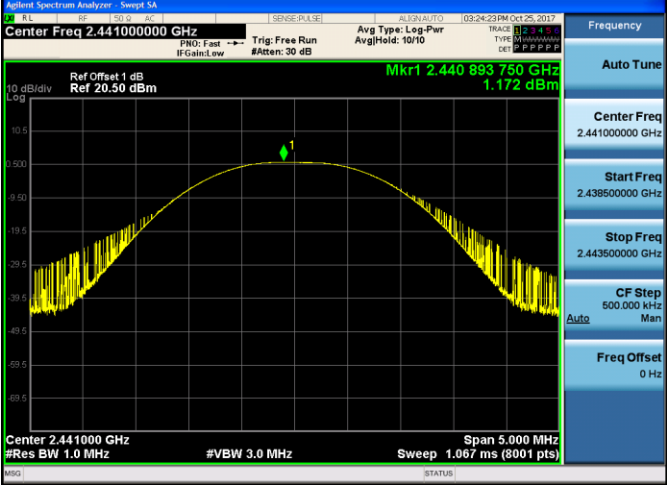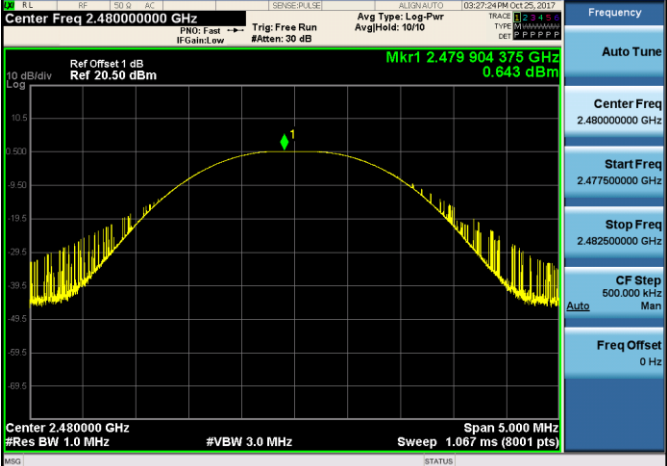Modulation Type:		GFSK
CH00		
CH39		
CH78		

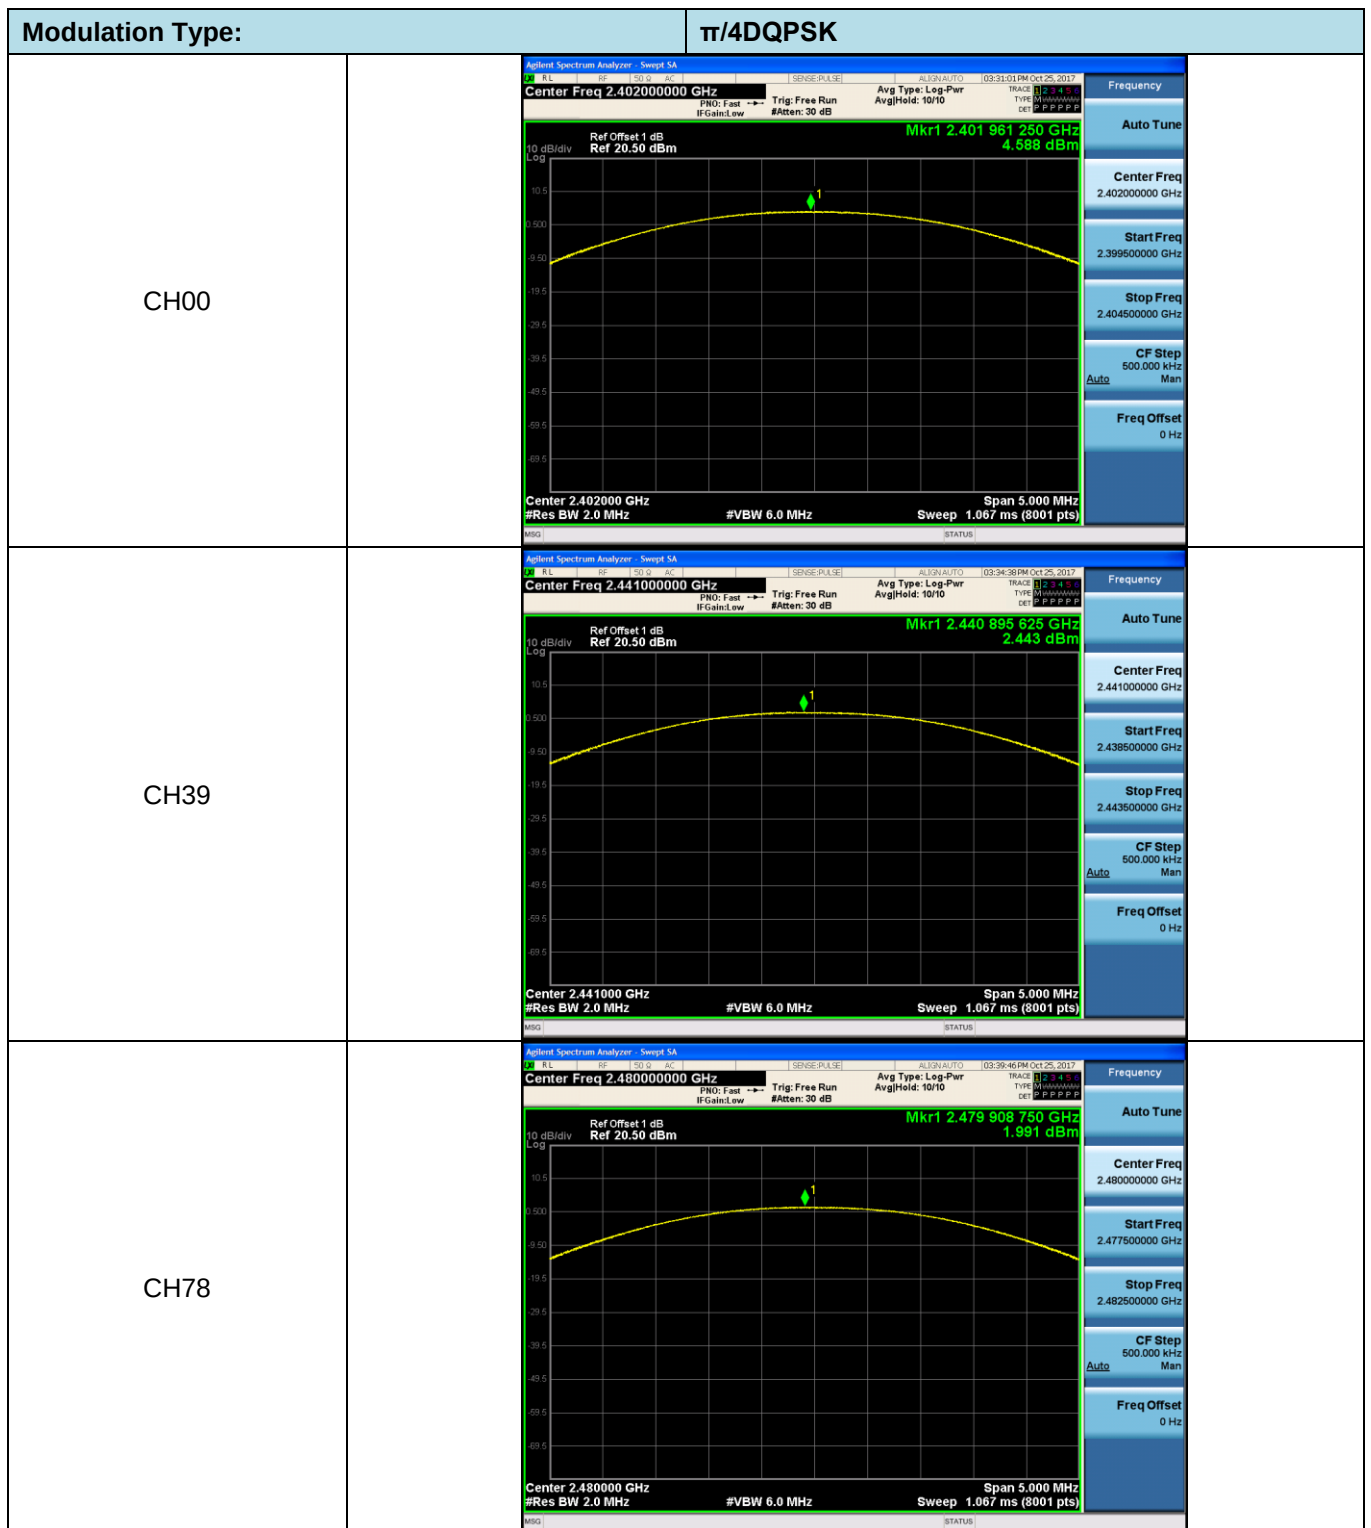

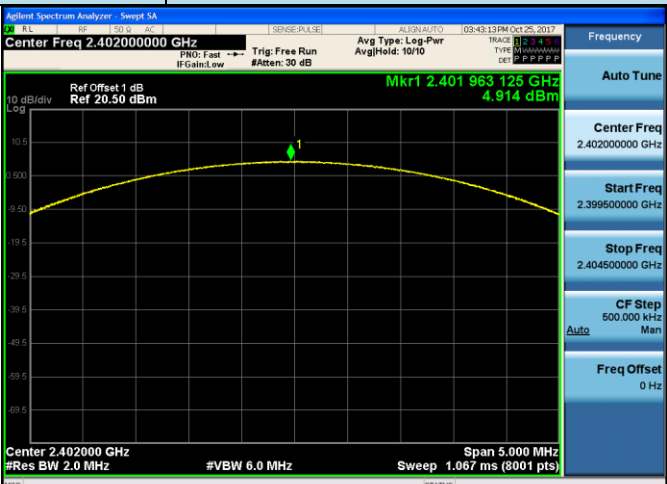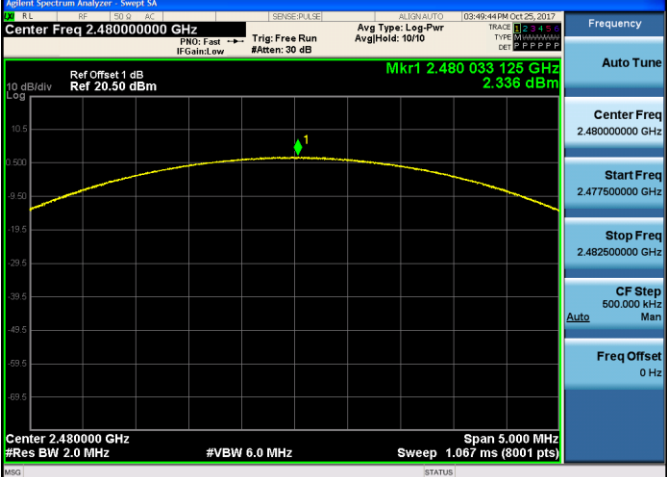
Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

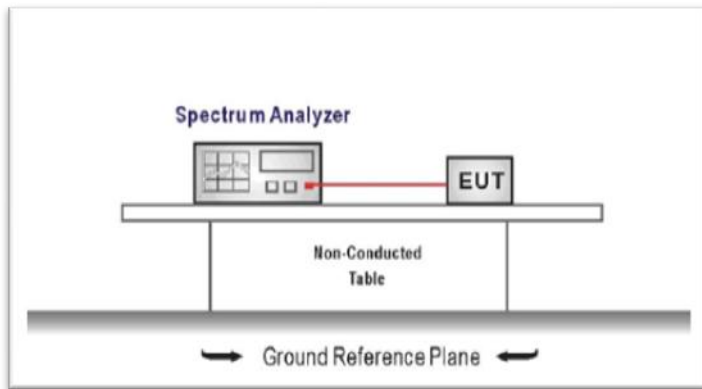

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:




Please refer to the clause 3.3




TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.9393	-	Pass
	39	0.9390		
	78	0.9609		
$\pi/4$ DQPSK	00	1.291	-	Pass
	39	1.295		
	78	1.292		
8DPSK	00	1.296	-	Pass
	39	1.293		
	78	1.296		

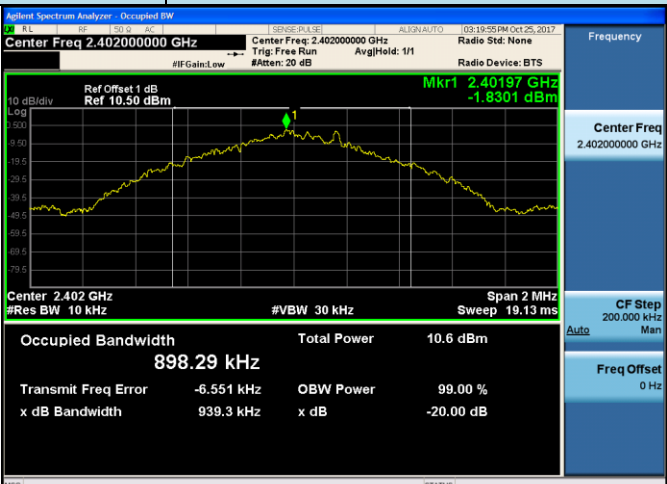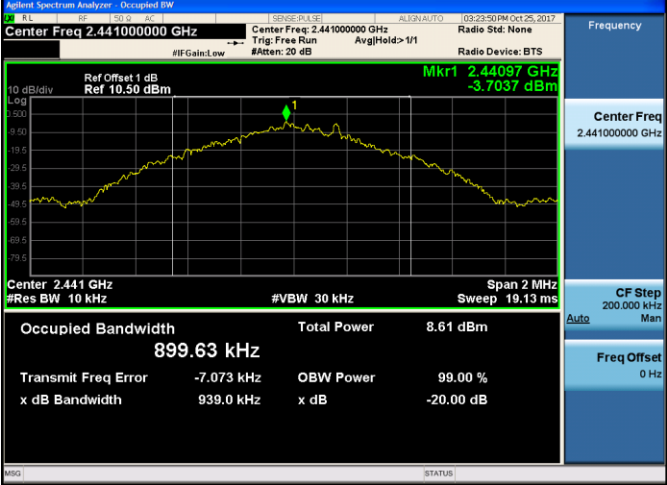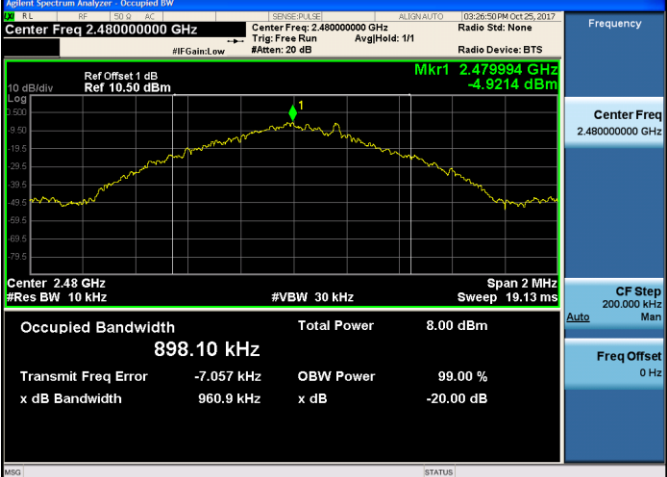Modulation Type:		GFSK	
CH00		Frequency Center Freq 2.402000000 GHz CF Step 200.000 kHz Auto Freq Offset 0 Hz	
CH39		Frequency Center Freq 2.441000000 GHz CF Step 200.000 kHz Auto Freq Offset 0 Hz	
CH78		Frequency Center Freq 2.480000000 GHz CF Step 200.000 kHz Auto Freq Offset 0 Hz	

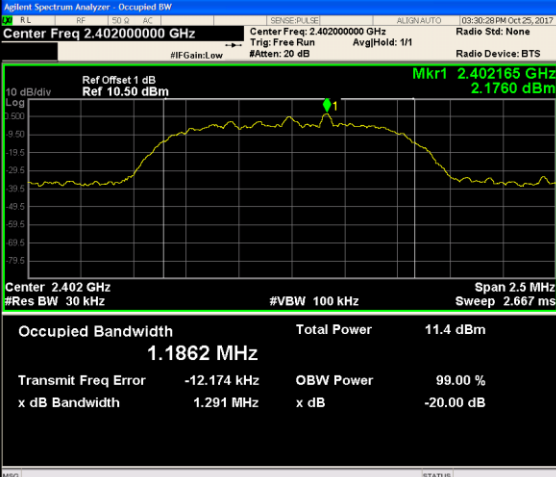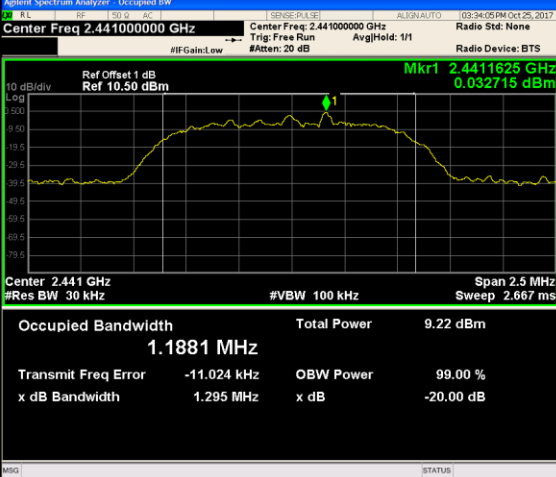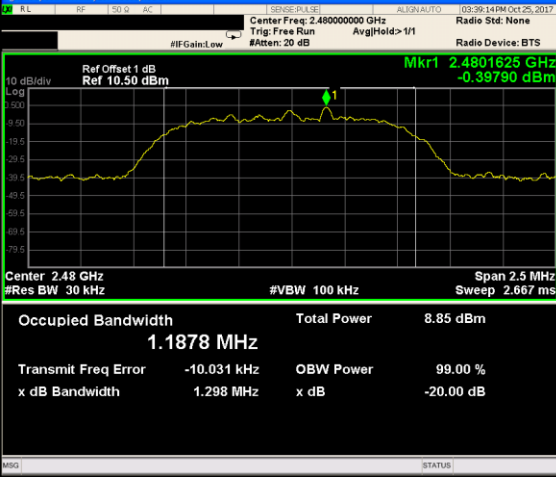Modulation Type:		$\pi/4$ DQPSK
CH00		Frequency Center Freq 2.40200000 GHz CF Step 250.000 kHz Freq Offset 0 Hz
CH39		Frequency Center Freq 2.44100000 GHz CF Step 250.000 kHz Freq Offset 0 Hz
CH78		Trace/Detector Clear Write Average Max Hold Min Hold Detector Peak

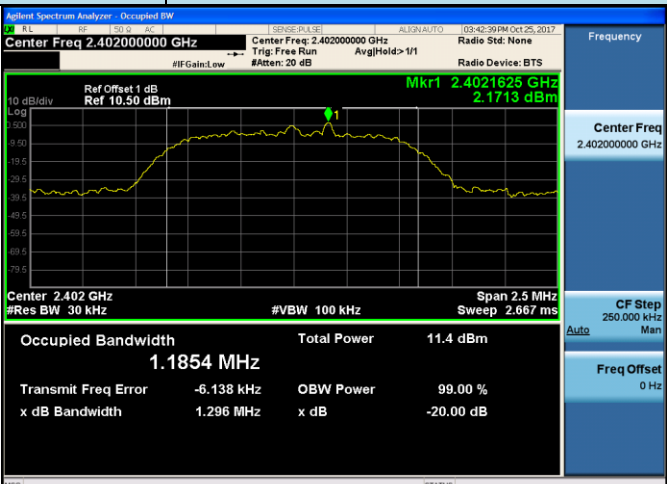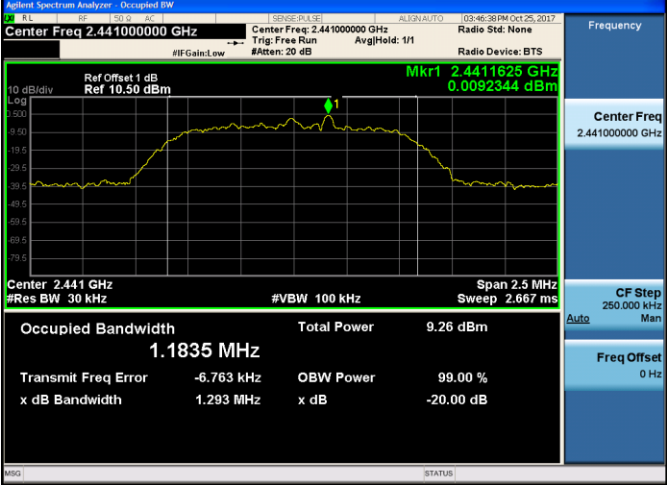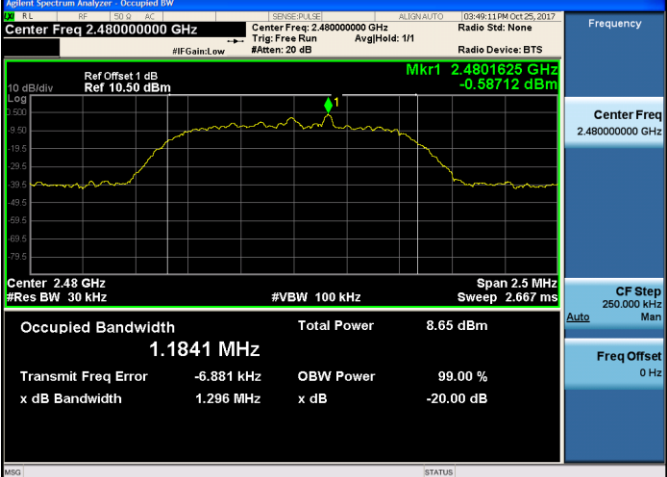
Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.

TEST CONFIGURATION

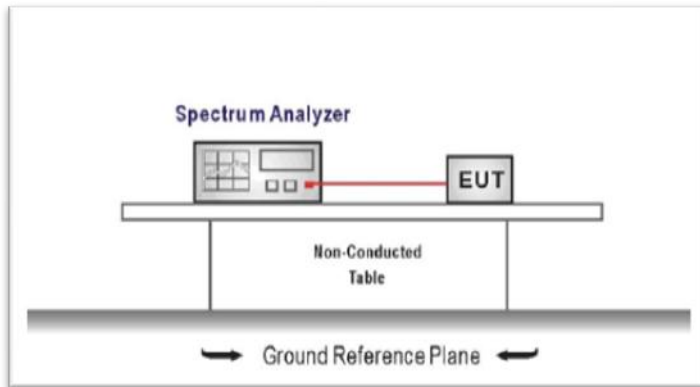

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW $\geq 1\%$ of the span, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.002	≥ 0.961	Pass
$\pi/4$ DQPSK	39	1.071	≥ 0.863	Pass
8DPSK	39	1.003	≥ 0.864	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit = $2/3 \times$ The maximum 20 dB Bandwidth for $\pi/4$ DQPSK modulation on the section 5.4.

8DPSK limit = $2/3 \times$ The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4


GFSK	Agilent Spectrum Analyzer - Sweep SA SENSE:PLA:SE ALGN:AU:TO 04:04:45 PM Oct 25, 2017 Center Freq 2.441500000 GHz PRN: Wide IF Gain:Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr AvgHld: 10/10 TRACE TYPE 0 1 2 3 4 5 6 7 8 9 10 11 DET P P P P P P Frequency Auto Tune Center Freq 2.441500000 GHz Start Freq 2.440500000 GHz Stop Freq 2.442500000 GHz CF Step 200.000 kHz Man Freq Offset 0 Hz 10 dB/div Log Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 1.002 25 MHz 0.285 dB 1Δ2 Start 2.440500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (8001 pts) Stop 2.442500 GHz MR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 Δ2 1 f (Δ) 1.002 25 MHz (Δ) 0.285 dB 2 F 1 f 2.440 985 50 GHz -4.270 dBm 3 4 5 6 7 8 9 10 11 MSG STATUS
$\pi/4$ DQPSK	Agilent Spectrum Analyzer - Sweep SA SENSE:PLA:SE ALGN:AU:TO 04:07:30 PM Oct 25, 2017 Marker 1 1.071000000 MHz PRN: Wide IF Gain:Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr AvgHld: 10/10 TRACE TYPE 0 1 2 3 4 5 6 7 8 9 10 11 DET P P P P P P Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 10 dB/div Log Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 1.071 00 MHz -1.857 dB 1Δ2 Start 2.440500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (8001 pts) Stop 2.442500 GHz MR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 Δ2 1 f (Δ) 1.071 00 MHz (Δ) -1.857 dB 2 F 1 f 2.440 947 00 GHz -3.417 dBm 3 4 5 6 7 8 9 10 11 MSG STATUS
8DPSK	Agilent Spectrum Analyzer - Sweep SA SENSE:PLA:SE ALGN:AU:TO 04:15:08 PM Oct 25, 2017 Marker 1 1.003000000 MHz PRN: Wide IF Gain:Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr AvgHld: 10/10 TRACE TYPE 0 1 2 3 4 5 6 7 8 9 10 11 DET P P P P P P Peak Search Next Peak Next Pk Right Next Pk Left Marker Delta Mkr--CF Mkr--Ref Lvl More 1 of 2 10 dB/div Log Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 1.003 00 MHz -0.151 dB 1Δ2 Start 2.440500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (8001 pts) Stop 2.442500 GHz MR MODE TRC SCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE 1 Δ2 1 f (Δ) 1.003 00 MHz (Δ) -0.151 dB 2 F 1 f 2.441 032 50 GHz -4.271 dBm 3 4 5 6 7 8 9 10 11 MSG STATUS

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

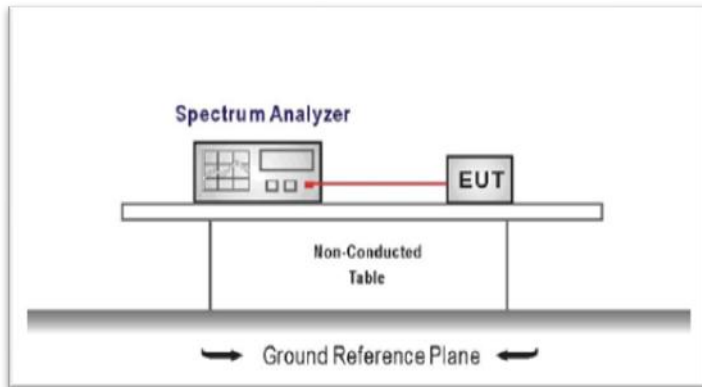

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = the frequency band of operation
 RBW $\geq$ 1% of the span, VBW $\geq$ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	≥ 15.00	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

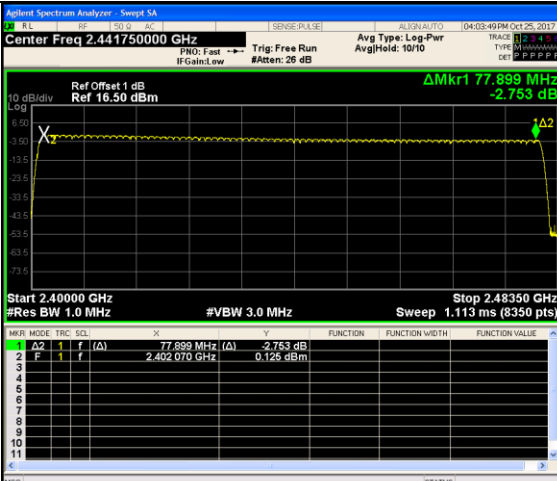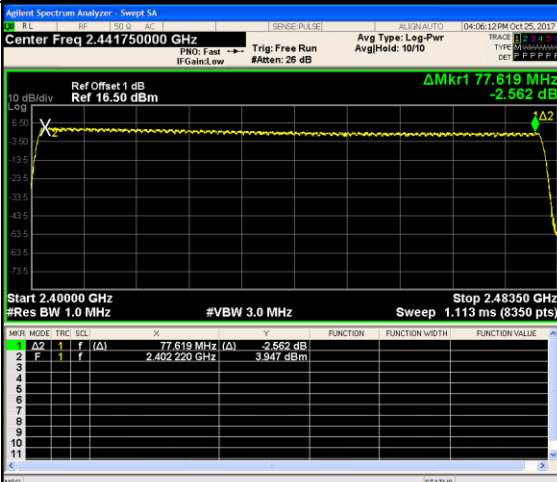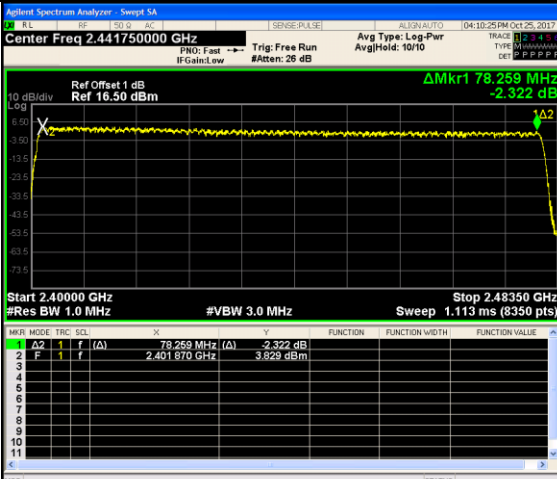
GFSK	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 77.899 MHz -2.753 dB Start 2.400000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.483500 GHz Sweep 1.113 ms (8350 pts) Marker Mode: TRC: SCL: X: Y: FUNCTION: FUNCTION WIDTH: FUNCTION VALUE <table><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>77.899 MHz (Δ)</td><td>-2.753 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 070 GHz</td><td>0.126 dBm</td><td></td><td></td><td></td></tr></table>	1	Δ2	1	f	(Δ)	77.899 MHz (Δ)	-2.753 dB				2	F	1	f		2.402 070 GHz	0.126 dBm				Frequency Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz
1	Δ2	1	f	(Δ)	77.899 MHz (Δ)	-2.753 dB																
2	F	1	f		2.402 070 GHz	0.126 dBm																
$\pi/4$ DQPSK	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 77.619 MHz -2.562 dB Start 2.400000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.483500 GHz Sweep 1.113 ms (8350 pts) Marker Mode: TRC: SCL: X: Y: FUNCTION: FUNCTION WIDTH: FUNCTION VALUE <table><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>77.619 MHz (Δ)</td><td>-2.562 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 220 GHz</td><td>3.947 dBm</td><td></td><td></td><td></td></tr></table>	1	Δ2	1	f	(Δ)	77.619 MHz (Δ)	-2.562 dB				2	F	1	f		2.402 220 GHz	3.947 dBm				Frequency Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz
1	Δ2	1	f	(Δ)	77.619 MHz (Δ)	-2.562 dB																
2	F	1	f		2.402 220 GHz	3.947 dBm																
8DPSK	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 1 dB Ref 16.50 dBm ΔMkr1 78.259 MHz -2.322 dB Start 2.400000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.483500 GHz Sweep 1.113 ms (8350 pts) Marker Mode: TRC: SCL: X: Y: FUNCTION: FUNCTION WIDTH: FUNCTION VALUE <table><tr><td>1</td><td>Δ2</td><td>1</td><td>f</td><td>(Δ)</td><td>78.259 MHz (Δ)</td><td>-2.322 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.401 870 GHz</td><td>3.929 dBm</td><td></td><td></td><td></td></tr></table>	1	Δ2	1	f	(Δ)	78.259 MHz (Δ)	-2.322 dB				2	F	1	f		2.401 870 GHz	3.929 dBm				Frequency Auto Tune Center Freq 2.441750000 GHz Start Freq 2.400000000 GHz Stop Freq 2.483500000 GHz CF Step 8.350000 MHz Freq Offset 0 Hz
1	Δ2	1	f	(Δ)	78.259 MHz (Δ)	-2.322 dB																
2	F	1	f		2.401 870 GHz	3.929 dBm																

5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

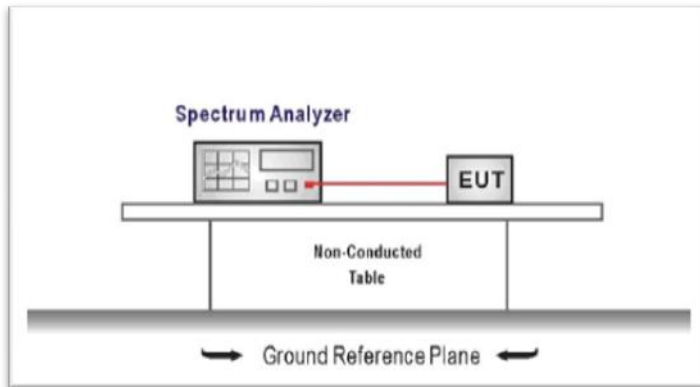

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW $\geq$ RBW
 Sweep = as necessary to capture the entire dwell time per hopping channel,
 Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:



Please refer to the clause 3.3

TEST RESULTS


☒ Passed ☐ Not Applicable


TestMode	Antenna	Channel	BurstWidth(ms)	TotalHops	Result(s)	Limit(s)	Verdict
DH1	ANT1	HOP	0.36	316	0.114	0.4	PASS
DH3	ANT1	HOP	1.62	158	0.257	0.4	PASS
DH5	ANT1	HOP	2.87	103	0.296	0.4	PASS
2DH1	ANT1	HOP	0.38	316	0.119	0.4	PASS
2DH3	ANT1	HOP	1.63	157	0.256	0.4	PASS
2DH5	ANT1	HOP	2.88	104	0.299	0.4	PASS
3DH1	ANT1	HOP	0.38	316	0.119	0.4	PASS
3DH3	ANT1	HOP	1.63	157	0.255	0.4	PASS
3DH5	ANT1	HOP	2.88	104	0.299	0.4	PASS

DH1 ANT1 HOP 0.37 316 0.116 0.4 PASS

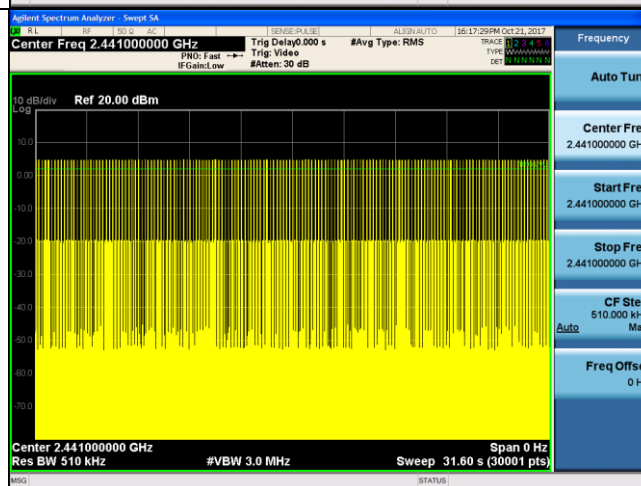
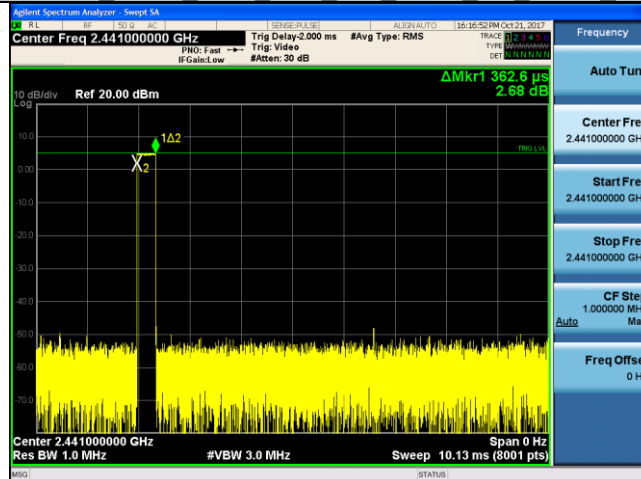


DH3 ANT1 HOP 1.62 158 0.257 0.4 PASS

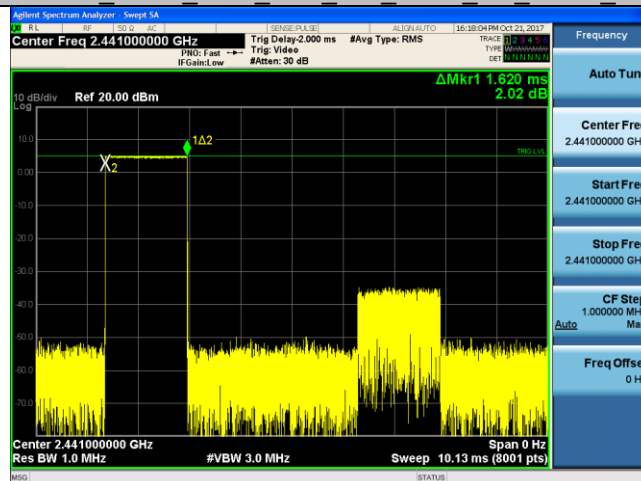


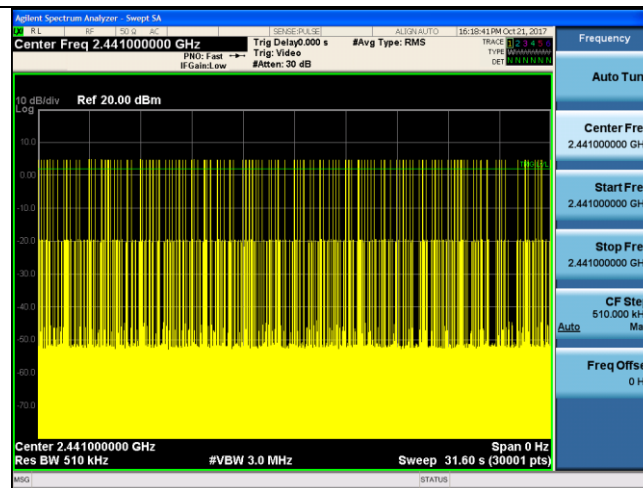



DH5_ANT1_HOP_2.87_103_0.296_0.4_PASS

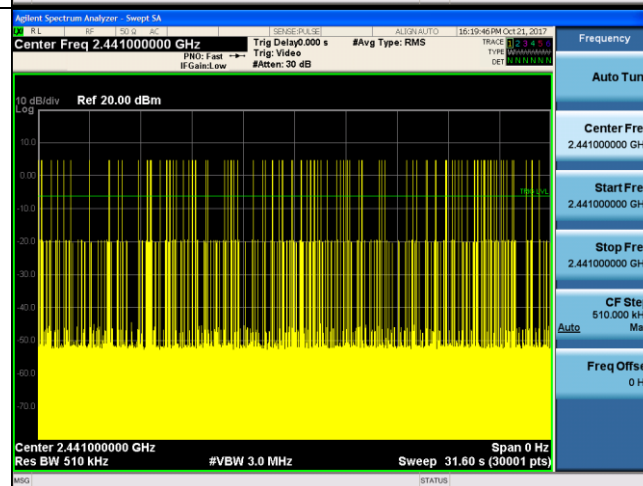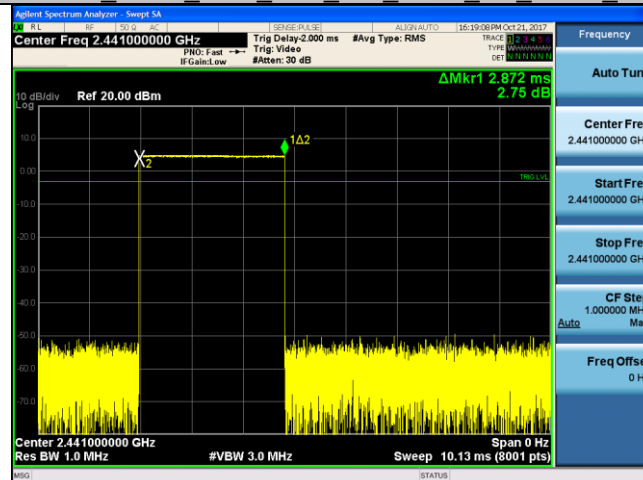


2DH1_ANT1_HOP_0.38_316_0.119_0.4_PASS

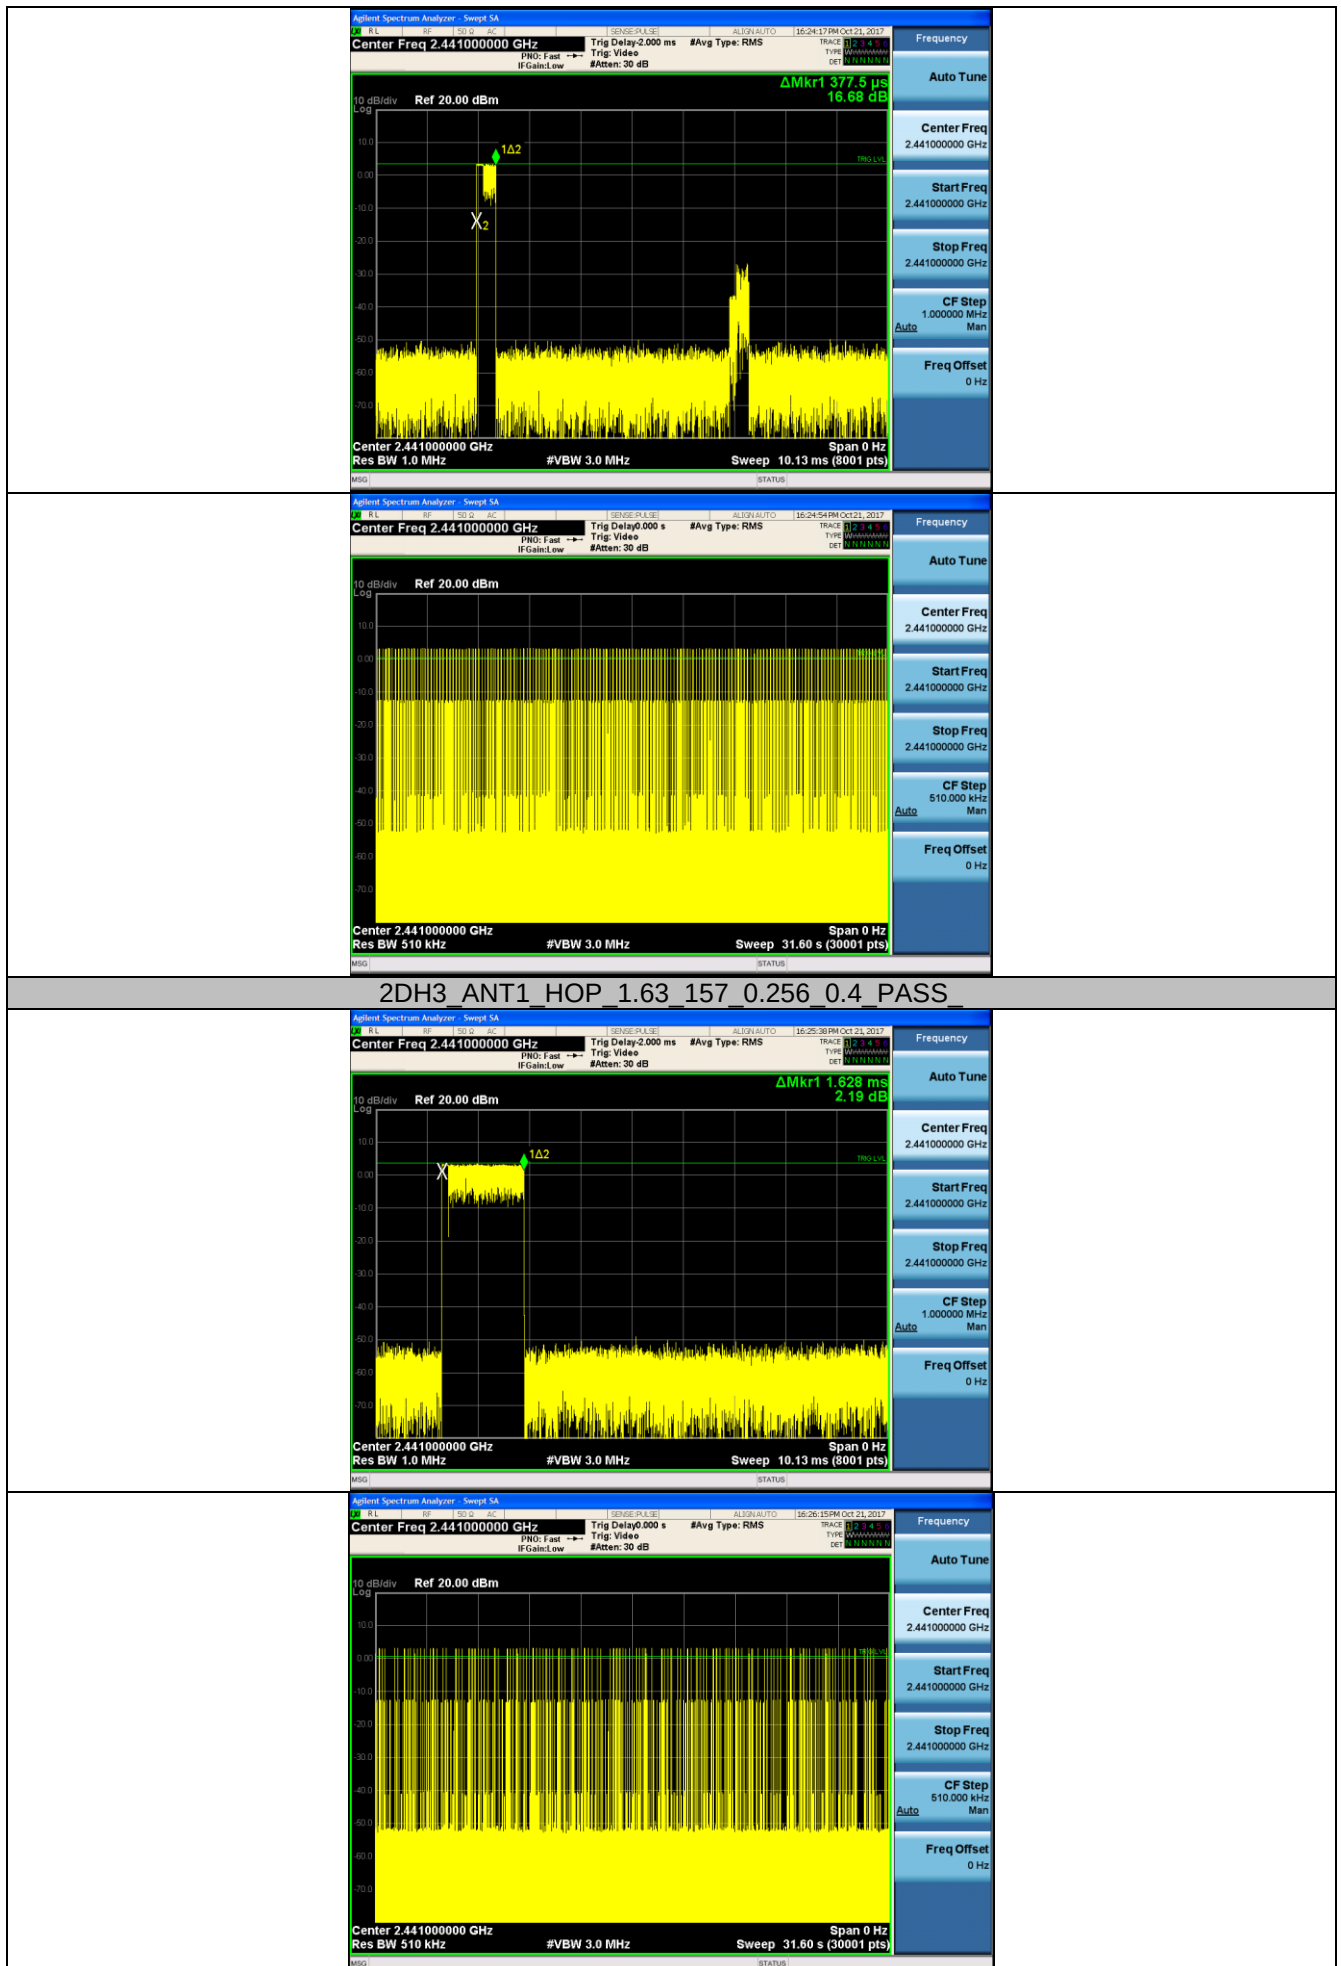


2DH5 ANT1 HOP 2.88 104 0.299 0.4 PASS

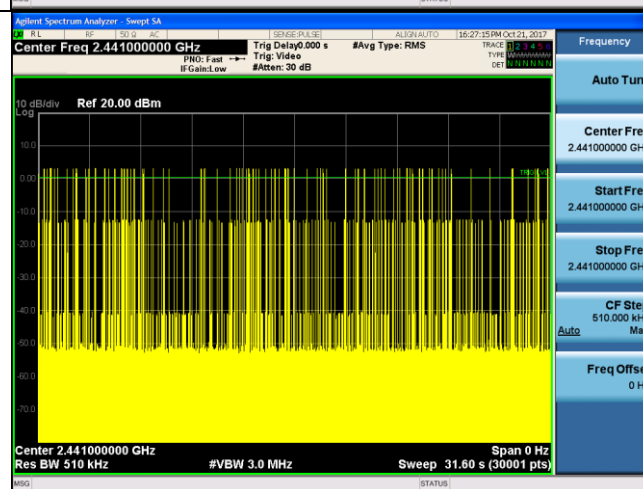
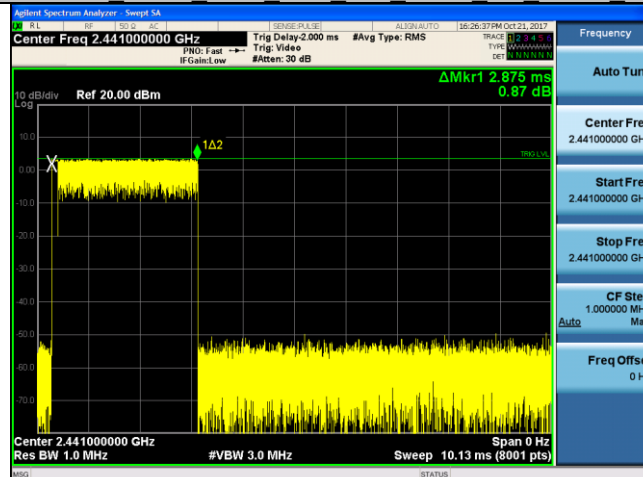


3DH1 ANT1 HOP 0.38 316 0.119 0.4 PASS

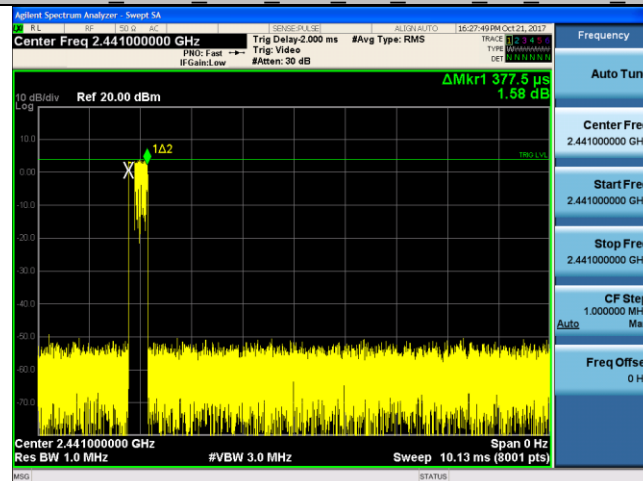


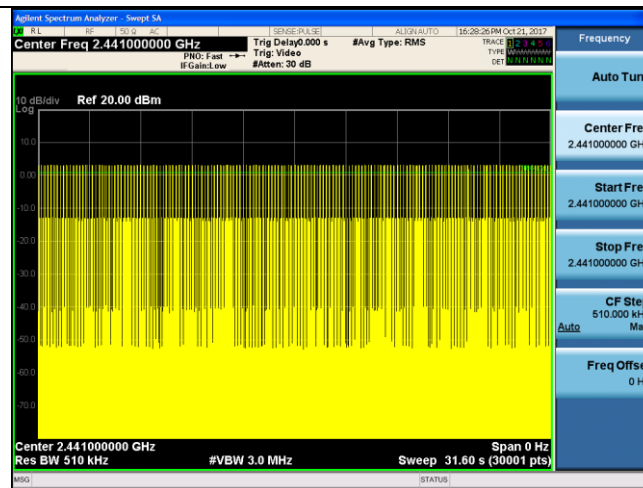

3DH3 ANT1 HOP 1.63 157 0.255 0.4 PASS

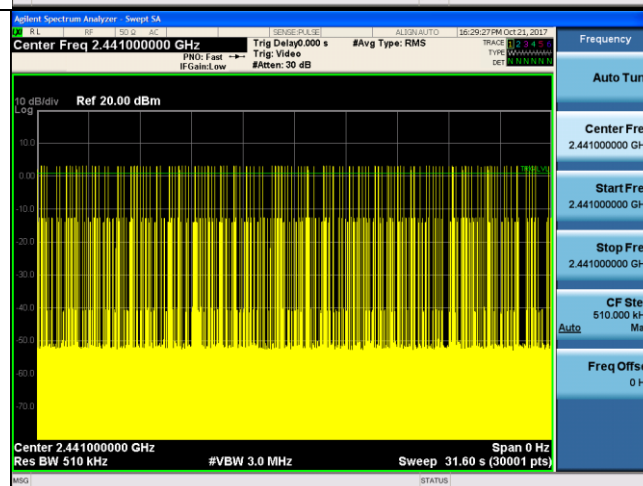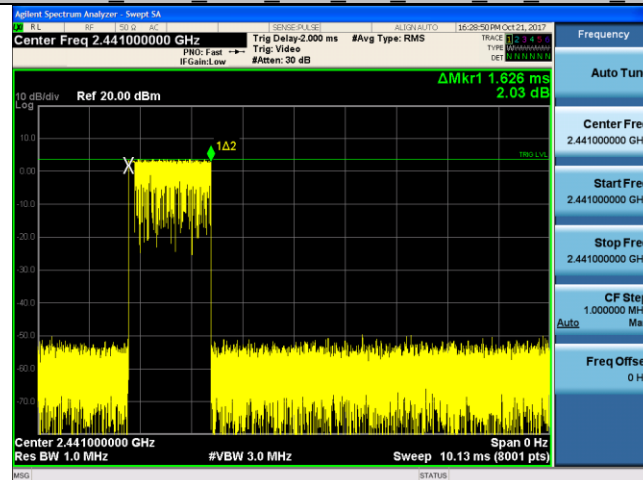

3DH5 ANT1 HOP 2.88 104 0.299 0.4 PASS

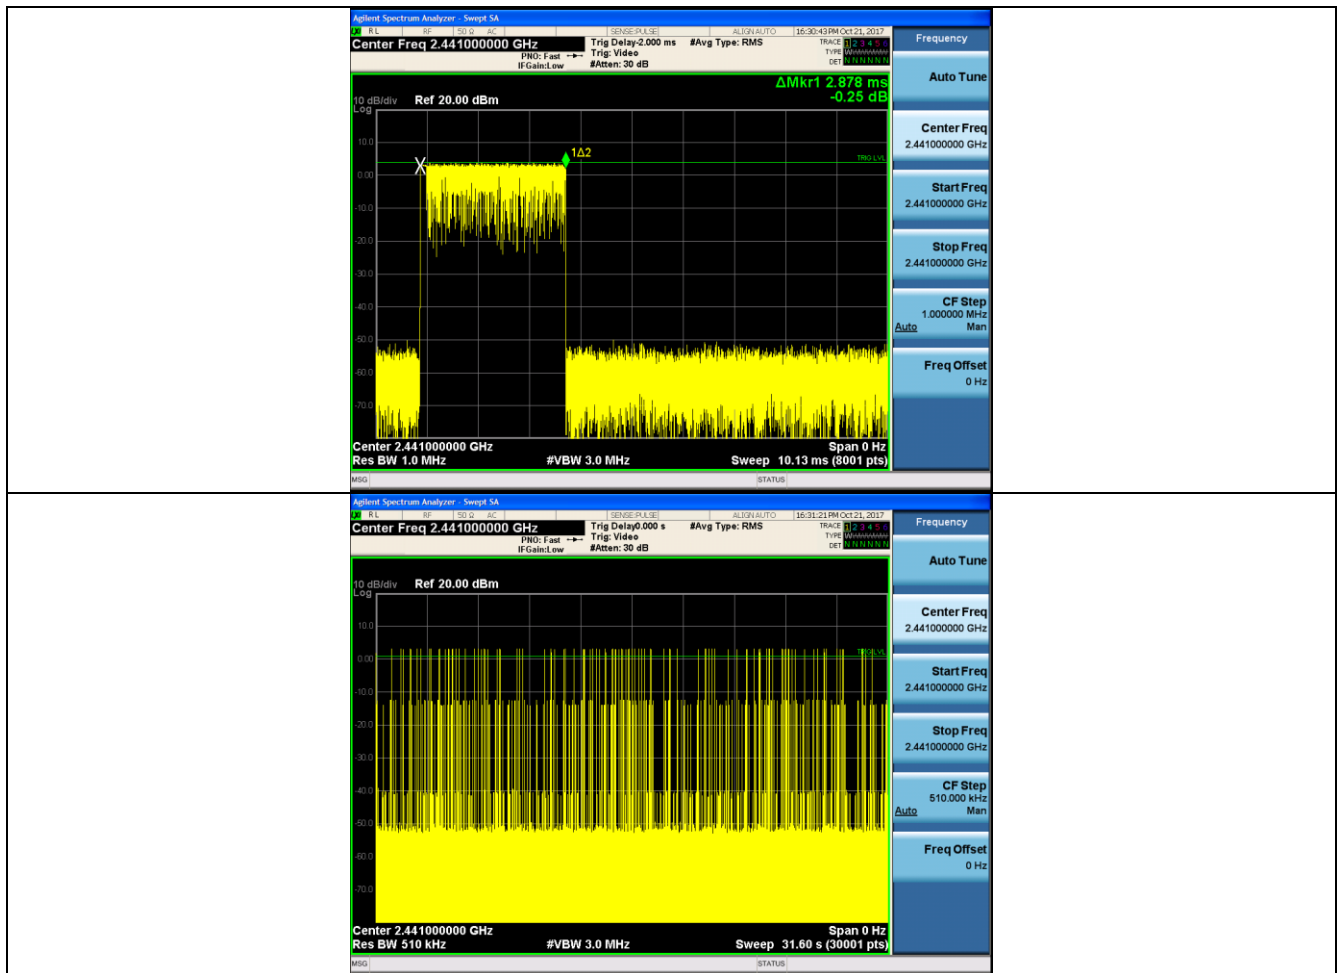

5.8. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

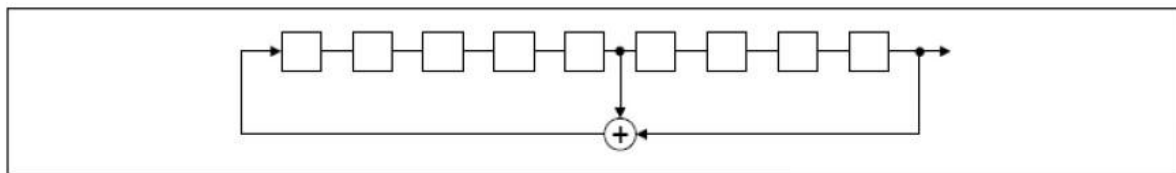

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

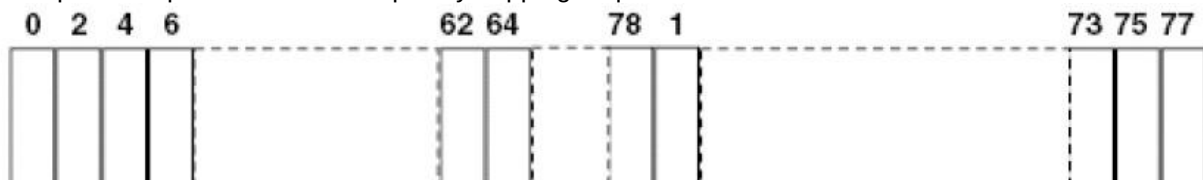

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

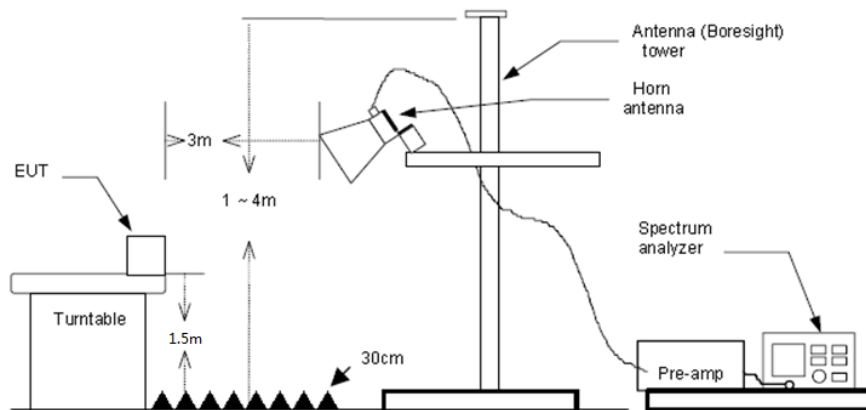

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

CH00									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization	Test value
2310.00	31.85	28.05	6.62	37.65	28.87	74.00	-45.13	Horizontal	Peak
2390.03	32.24	27.65	6.75	37.87	28.77	74.00	-45.23	Horizontal	Peak
2310.00	32.36	28.05	6.62	37.65	29.38	74.00	-44.62	Vertical	Peak
2390.03	34.73	27.65	6.75	37.87	31.26	74.00	-42.74	Vertical	Peak
2310.00	20.09	28.05	6.62	37.65	17.11	54.00	-36.89	Horizontal	Average
2390.03	19.43	27.65	6.75	37.87	15.96	54.00	-38.04	Horizontal	Average
2310.00	20.06	28.05	6.62	37.65	17.08	54.00	-36.92	Vertical	Average
2390.03	18.84	27.65	6.75	37.87	15.37	54.00	-38.63	Vertical	Average


CH78									
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization	Test value
2483.50	39.21	27.26	6.83	37.87	35.43	74.00	-38.57	Horizontal	Peak
2495.48	50.84	27.22	6.84	37.87	47.03	74.00	-26.97	Horizontal	Peak
2500.00	31.19	27.20	6.84	37.87	27.36	74.00	-46.64	Horizontal	Peak
2483.50	39.37	27.26	6.83	37.87	35.59	74.00	-38.41	Vertical	Peak
2488.97	45.65	27.24	6.83	37.87	41.85	74.00	-32.15	Vertical	Peak
2500.00	32.13	27.20	6.84	37.87	28.30	74.00	-45.70	Vertical	Peak
2483.50	35.01	27.26	6.83	37.87	31.23	54.00	-22.77	Horizontal	Average
2500.00	16.98	27.20	6.84	37.87	13.15	54.00	-40.85	Horizontal	Average
2483.50	44.65	27.26	6.83	37.87	40.87	54.00	-13.13	Vertical	Average
2500.00	20.94	27.20	6.84	37.87	17.11	54.00	-36.89	Vertical	Average

5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

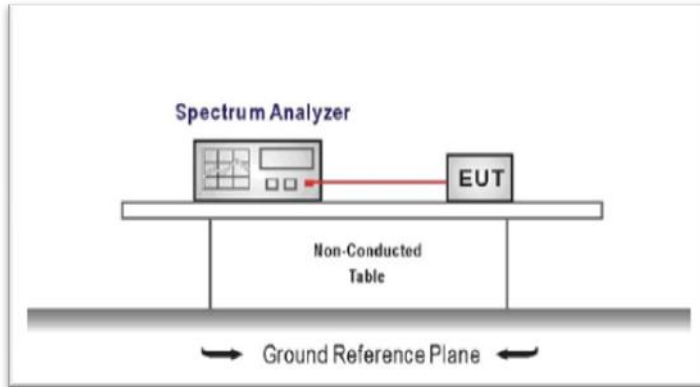

TEST PROCEDURE




1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW $\geq$ RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3




TEST RESULTS

☒ Passed ☐ Not Applicable

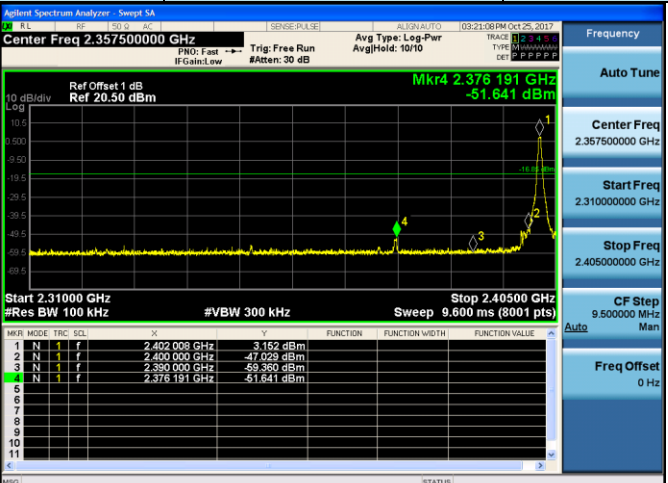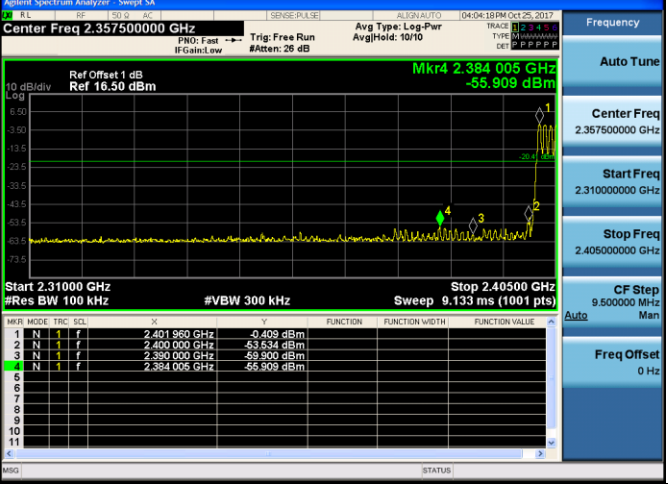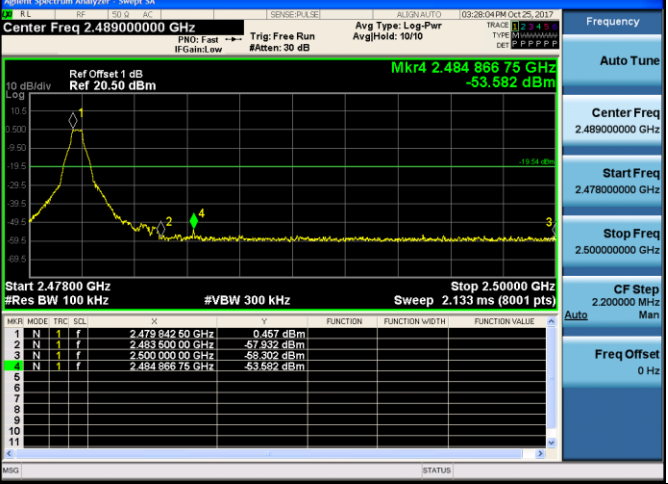
Test Item:	Band edge	Modulation type:	GFSK
CH00 No hopping mode			
CH00 Hopping mode			
CH78 No hopping mode			

CH78
Hopping mode

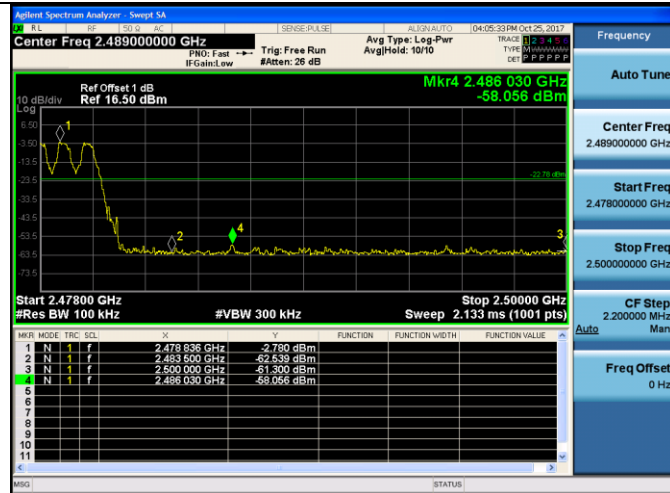

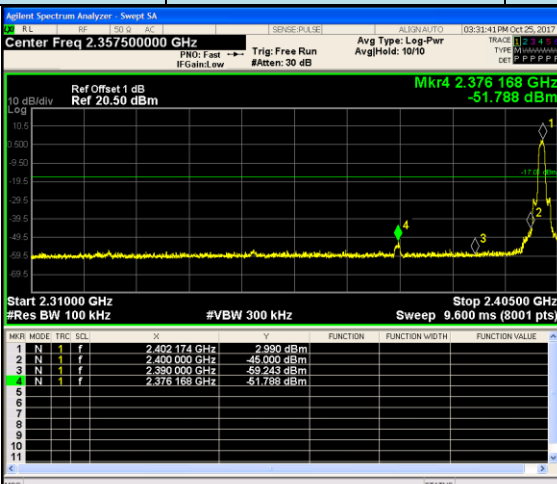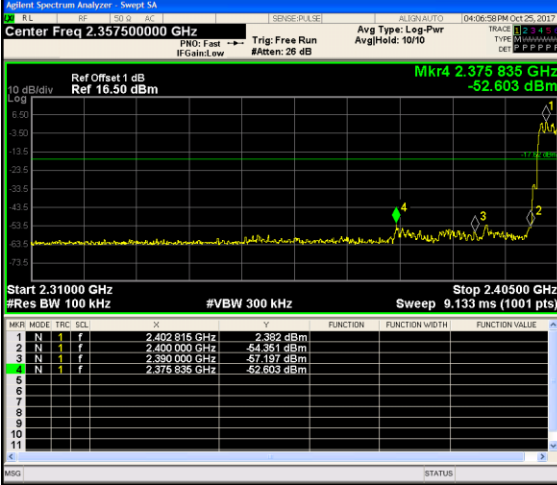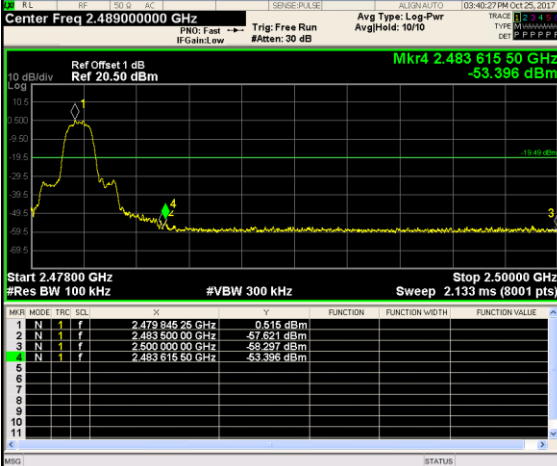Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK																																												
CH00 No hopping mode	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402174 GHz</td><td>2.990 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-45.000 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-59.243 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.376168 GHz</td><td>-51.788 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402174 GHz	2.990 dBm				2	N	1	f	2.400000 GHz	-45.000 dBm				3	N	1	f	2.390000 GHz	-59.243 dBm				4	N	1	f	2.376168 GHz	-51.788 dBm				Frequency Auto Tune Center Freq 2.357500000 GHz Start Freq 2.310000000 GHz Stop Freq 2.405000000 GHz CF Step 9.500000 MHz Man Freq Offset 0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.402174 GHz	2.990 dBm																																										
2	N	1	f	2.400000 GHz	-45.000 dBm																																										
3	N	1	f	2.390000 GHz	-59.243 dBm																																										
4	N	1	f	2.376168 GHz	-51.788 dBm																																										
CH00 Hopping mode	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402815 GHz</td><td>2.382 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-54.351 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-57.197 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.375835 GHz</td><td>-52.603 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402815 GHz	2.382 dBm				2	N	1	f	2.400000 GHz	-54.351 dBm				3	N	1	f	2.390000 GHz	-57.197 dBm				4	N	1	f	2.375835 GHz	-52.603 dBm				Frequency Auto Tune Center Freq 2.357500000 GHz Start Freq 2.310000000 GHz Stop Freq 2.405000000 GHz CF Step 9.500000 MHz Man Freq Offset 0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.402815 GHz	2.382 dBm																																										
2	N	1	f	2.400000 GHz	-54.351 dBm																																										
3	N	1	f	2.390000 GHz	-57.197 dBm																																										
4	N	1	f	2.375835 GHz	-52.603 dBm																																										
CH78 No hopping mode	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.478845 GHz</td><td>0.615 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483800 GHz</td><td>-57.621 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-58.297 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.483615 GHz</td><td>-53.396 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478845 GHz	0.615 dBm				2	N	1	f	2.483800 GHz	-57.621 dBm				3	N	1	f	2.500000 GHz	-58.297 dBm				4	N	1	f	2.483615 GHz	-53.396 dBm				Frequency Auto Tune Center Freq 2.489000000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Man Freq Offset 0 Hz
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.478845 GHz	0.615 dBm																																										
2	N	1	f	2.483800 GHz	-57.621 dBm																																										
3	N	1	f	2.500000 GHz	-58.297 dBm																																										
4	N	1	f	2.483615 GHz	-53.396 dBm																																										

CH78
Hopping mode

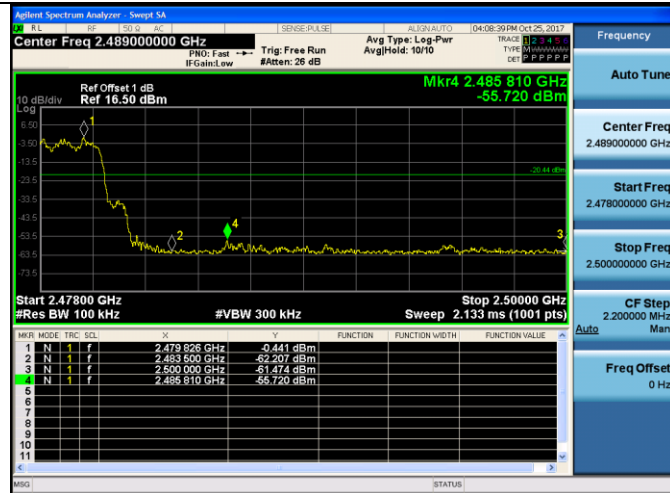

Test Item:	Band edge	Modulation type:	8DPSK																																													
CH00 No hopping mode	Agilent Spectrum Analyzer - Swept SA Center Freq 2.357500000 GHz Ref Offset 1 dB Ref 20.50 dBm Mkr4 2.375 989 GHz -52.187 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (8001 pts) <table><thead><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402174 GHz</td><td>2.995 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-46.196 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-49.076 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.375 989 GHz</td><td>-52.187 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.357500000 GHz Start Freq 2.310000000 GHz Stop Freq 2.405000000 GHz CF Step 9.500000 MHz Man Freq Offset 0 Hz			Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402174 GHz	2.995 dBm				2	N	1	f	2.400000 GHz	-46.196 dBm				3	N	1	f	2.390000 GHz	-49.076 dBm				4	N	1	f	2.375 989 GHz	-52.187 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.402174 GHz	2.995 dBm																																											
2	N	1	f	2.400000 GHz	-46.196 dBm																																											
3	N	1	f	2.390000 GHz	-49.076 dBm																																											
4	N	1	f	2.375 989 GHz	-52.187 dBm																																											
CH00 Hopping mode	Agilent Spectrum Analyzer - Swept SA Center Freq 2.357500000 GHz Ref Offset 1 dB Ref 16.50 dBm Mkr4 2.384 005 GHz -53.876 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.133 ms (1001 pts) <table><thead><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.403765 GHz</td><td>0.461 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-53.128 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-58.808 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.384 005 GHz</td><td>-53.876 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.357500000 GHz Start Freq 2.310000000 GHz Stop Freq 2.405000000 GHz CF Step 9.500000 MHz Man Freq Offset 0 Hz			Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.403765 GHz	0.461 dBm				2	N	1	f	2.400000 GHz	-53.128 dBm				3	N	1	f	2.390000 GHz	-58.808 dBm				4	N	1	f	2.384 005 GHz	-53.876 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.403765 GHz	0.461 dBm																																											
2	N	1	f	2.400000 GHz	-53.128 dBm																																											
3	N	1	f	2.390000 GHz	-58.808 dBm																																											
4	N	1	f	2.384 005 GHz	-53.876 dBm																																											
CH78 No hopping mode	Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 1 dB Ref 20.50 dBm Mkr4 2.483 502 75 GHz -54.617 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (8001 pts) <table><thead><tr><th>Mkr</th><th>Mode</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 839 75 GHz</td><td>0.450 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 00 GHz</td><td>-54.592 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-58.282 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.483 502 75 GHz</td><td>-54.617 dBm</td><td></td><td></td><td></td></tr></tbody></table> Frequency Auto Tune Center Freq 2.489000000 GHz Start Freq 2.478000000 GHz Stop Freq 2.500000000 GHz CF Step 2.200000 MHz Man Freq Offset 0 Hz			Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 839 75 GHz	0.450 dBm				2	N	1	f	2.483 500 00 GHz	-54.592 dBm				3	N	1	f	2.500 000 00 GHz	-58.282 dBm				4	N	1	f	2.483 502 75 GHz	-54.617 dBm			
Mkr	Mode	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.479 839 75 GHz	0.450 dBm																																											
2	N	1	f	2.483 500 00 GHz	-54.592 dBm																																											
3	N	1	f	2.500 000 00 GHz	-58.282 dBm																																											
4	N	1	f	2.483 502 75 GHz	-54.617 dBm																																											