

# FCC TEST REPORT

**Product Name:** Car Charger

**dealworthy™**

**Trade Mark:**

**heyday™**



**Model No.:** CAC-33KL-2A

**Add. Model No.:** N/A

**Report Number:** 24042311017RFC-1

**Test Standards:** FCC 47 CFR Part 15 Subpart C

**FCC ID:** 2AO23-BTFMC01

**Test Result:** PASS

**Date of Issue:** June 19, 2024

Prepared for:

**Chug, Inc.**

**7157 Shady Oak Rd, Eden Prairie MN 55344, United States**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and**  
**technology park, Longhua district, Shenzhen, China**

**TEL: +86-755-2823 0888**

**FAX: +86-755-2823 0886**

Prepared by:

*David Chen*

David Chen  
Senior Project Engineer

Reviewed by:

*Henry Lu*

Henry Lu  
Team Leader

Approved by:

*Robben Chen*

Robben Chen  
Assistant Manager

Date: June 19, 2024

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

**Version**

Version No.	Date	Description
V1.0	June 19, 2024	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1 CLIENT INFORMATION .....</b>	<b>4</b>
<b>1.2 EUT INFORMATION .....</b>	<b>4</b>
<b>1.2.1 GENERAL DESCRIPTION OF EUT .....</b>	<b>4</b>
<b>1.2.2 DESCRIPTION OF ACCESSORIES .....</b>	<b>4</b>
<b>1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....</b>	<b>5</b>
<b>1.4 OTHER INFORMATION .....</b>	<b>5</b>
<b>1.5 DESCRIPTION OF SUPPORT UNITS .....</b>	<b>5</b>
<b>1.6 TEST LOCATION .....</b>	<b>6</b>
<b>1.7 TEST FACILITY .....</b>	<b>6</b>
<b>1.8 DEVIATION FROM STANDARDS .....</b>	<b>6</b>
<b>1.9 ABNORMALITIES FROM STANDARD CONDITIONS .....</b>	<b>6</b>
<b>1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....</b>	<b>6</b>
<b>1.11 MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>2. TEST SUMMARY .....</b>	<b>8</b>
<b>3. EQUIPMENT LIST .....</b>	<b>9</b>
<b>4. TEST CONFIGURATION .....</b>	<b>10</b>
<b>4.1 ENVIRONMENTAL CONDITIONS FOR TESTING .....</b>	<b>10</b>
<b>4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....</b>	<b>10</b>
<b>4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE .....</b>	<b>10</b>
<b>4.2 TEST CHANNELS .....</b>	<b>10</b>
<b>4.3 EUT TEST STATUS .....</b>	<b>10</b>
<b>4.4 PRE-SCAN .....</b>	<b>11</b>
<b>4.4.1 PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL .....</b>	<b>11</b>
<b>4.4.2 WORST-CASE DATA PACKETS .....</b>	<b>11</b>
<b>4.4.3 TESTED CHANNEL DETAIL .....</b>	<b>11</b>
<b>4.5 TEST SETUP .....</b>	<b>12</b>
<b>4.5.1 FOR RADIATED EMISSIONS TEST SETUP .....</b>	<b>12</b>
<b>4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP .....</b>	<b>13</b>
<b>4.5.3 FOR CONDUCTED RF TEST SETUP .....</b>	<b>14</b>
<b>4.6 SYSTEM TEST CONFIGURATION .....</b>	<b>14</b>
<b>4.7 DUTY CYCLE .....</b>	<b>15</b>
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION .....</b>	<b>16</b>
<b>5.1 REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>16</b>
<b>5.2 ANTENNA REQUIREMENT .....</b>	<b>16</b>
<b>5.3 CONDUCTED PEAK OUTPUT POWER .....</b>	<b>17</b>
<b>5.4 20 dB BANDWIDTH .....</b>	<b>18</b>
<b>5.5 CARRIER FREQUENCIES SEPARATION .....</b>	<b>19</b>
<b>5.6 NUMBER OF HOPPING CHANNEL .....</b>	<b>20</b>
<b>5.7 DWELL TIME .....</b>	<b>21</b>
<b>5.8 CONDUCTED OUT OF BAND EMISSION .....</b>	<b>22</b>
<b>5.9 RADIATED SPURIOUS EMISSIONS .....</b>	<b>23</b>
<b>5.10 BAND EDGE MEASUREMENTS (RADIATED) .....</b>	<b>27</b>
<b>APPENDIX A RF TEST DATA .....</b>	<b>30</b>
<b>A.1 99% BANDWIDTH .....</b>	<b>30</b>
<b>A.2 20dB BANDWIDTH .....</b>	<b>32</b>
<b>A.3 CARRIER FREQUENCIES SEPARATION .....</b>	<b>34</b>
<b>A.4 CONDUCTED OUT OF BAND EMISSION .....</b>	<b>35</b>
<b>A.5 DWELL TIME .....</b>	<b>41</b>
<b>A.6 NUMBER OF HOPPING CHANNEL .....</b>	<b>48</b>
<b>APPENDIX 1 PHOTOS OF TEST SETUP .....</b>	<b>49</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS .....</b>	<b>49</b>

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	Chug, Inc.
<b>Address of Applicant:</b>	7157 Shady Oak Rd, Eden Prairie MN 55344, United States
<b>Manufacturer 1:</b>	PYS VIETNAM TECHNOLOGY COMPANY LIMITED
<b>Manufacturer 2:</b>	PYS High-Tech Co., Ltd.
<b>Address of Manufacturer 1:</b>	CN-06, ThuanThanh II industrial zone, Mao Dien commune, ThuanThanh district, BacNinh, Vietnam
<b>Address of Manufacturer 2:</b>	1F~12F, Block 9, Lianhua Industrial Zone, Longhua, Shenzhen, Guangdong 518109 CHINA

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	Car Charger	
<b>Model No.:</b>	CAC-33KL-2A	
<b>Add. Model No.:</b>	N/A	
<b>Trade Mark:</b>	<b>dealworthy™</b> <b>heyday™</b> 	
<b>DUT Stage:</b>	Production Unit	
<b>EUT Supports Function:</b> (Provided by the customer)	2.4 GHz ISM Band:	Bluetooth 5.3
<b>Software Version:</b>	1.0.1 (Provided by the customer)	
<b>Hardware Version:</b>	N/A (Provided by the customer)	
<b>Sample Received Date:</b>	April 22, 2024	
<b>Sample Tested Date:</b>	May 11, 2024 to May 29, 2024	

#### 1.2.2 Description of Accessories

Cable	
<b>Description:</b>	USB Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	0.2 Meter

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2402 MHz to 2480 MHz
Bluetooth Version:	Bluetooth 5.3
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels:	79
Channel Separation:	1 MHz
Hopping Channel Type:	Adaptive Frequency Hopping Systems
Antenna Type:	PCB Antenna
Antenna Gain: (Provided by the customer)	2.54 dBi
Maximum Peak Power:	10.49 dBm
Normal Test Voltage:	DC 12V

### 1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
$f = 2402 + k$ MHz, $k = 0, \dots, 78$	
Note:	
$f$	is the operating frequency (MHz);
$k$	is the operating channel.

Modulation Configure				
Modulation	Packet	Packet Type	Packet Size	
GFSK	1-DH1	4	27	
	1-DH3	11	183	
	1-DH5	15	339	
$\pi/4$ DQPSK	2-DH1	20	54	
	2-DH3	26	367	
	2-DH5	30	679	
8DPSK	3-DH1	24	83	
	3-DH3	27	552	
	3-DH5	31	1021	

### 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

#### 1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude3400	16238087894	UnionTrust
mouse	DELL	MS111	CN-011D3V-73826-62N-0LK	UnionTrust

#### 2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 1.6 TEST LOCATION

---

### **Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

---

## 1.7 TEST FACILITY

---

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### **A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **ISED Wireless Device Testing Laboratories**

CAB identifier: CN0032

### **FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

---

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

### **Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.8 dB
2	Conducted emission 150kHz-30MHz	±3.4 dB
3	Radiated emission 9kHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

## 2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
<b>Antenna Requirement</b>	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247(b)(4)	N/A	PASS
<b>AC Power Line Conducted Emission</b>	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013 Section 6.2	N/A <sup>(Note2)</sup>
<b>Conducted Peak Output Power</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013 Section 7.8.5	PASS
<b>20 dB Bandwidth</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013 Section 6.9.2	PASS
<b>Carrier Frequencies Separation</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013 Section 7.8.2	PASS
<b>Number of Hopping Channel</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013 Section 7.8.3	PASS
<b>Dwell Time</b>	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013 Section 7.8.4	PASS
<b>Conducted Out of Band Emission</b>	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8	PASS
<b>Radiated Emissions</b>	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6	PASS
<b>Band Edge Measurement</b>	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013 Section 6.10.5	PASS

**Note:**

- 1) N/A: In this whole report not applicable.
- 2) This EUT is charged by AC adapter to the battery, it doesn't transmitting while charging

**Disclaimer and Explanations:**  
The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-Lindgren	3m	Euroshiedpn-C T001270-1317	11-Nov-2023	10-Nov-2026
<input type="checkbox"/>	Loop Antenna	ETS-Lindgren	6502	00202525	30-Oct-2023	29-Oct-2025
<input checked="" type="checkbox"/>	Receiver	ROHDE & SCHWARZ	ESIB26	100114	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025
<input checked="" type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-Lindgren	3142E	00201566	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Pre-amplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-Lindgren	3117-PA	00201541	1-Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118385	00201874	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-Lindgren	3116C-PA	00202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118384	202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	27-Nov-2023	26-Nov-2024
<input checked="" type="checkbox"/>	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	27-Nov-2023	26-Nov-2024
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	120932	29-Mar-2024	28-Mar-2025
<input checked="" type="checkbox"/>	Test Software	AutomationTestSystem	ECIT	Software Version: 1.0.7515.16529		

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	DC 12V	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Conducted Peak Output Power	24	61	100.3	S202404223222-ZJA02/3	Lucas Ouyang
20 dB Bandwidth					
Carrier Frequencies Separation					
Number of Hopping Channel					
Dwell Time					
Conducted Out of Band Emission					
Radiated Emissions					
Band Edge Measurement	21.5	56.9	100.2	S202404223222-ZJA03/3	Fire Huo

## 4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
GFSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
$\pi/4$ DQPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz
8DPSK (DH1, DH3, DH5)	2402 MHz to 2480 MHz	Channel 0	Channel 39	Channel 78
		2402 MHz	2441 MHz	2480 MHz

## 4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK/ $\pi/4$ DQPSK/8DPSK	1Tx	<ol style="list-style-type: none"> <li>Keep the EUT in continuously transmitting with Modulation test single</li> <li>Keep the EUT in continuously transmitting with Modulation test Hopping Frequency.</li> </ol>

#### Power Setting (Provided by the customer)

Power Setting: 7

#### Test Software (Provided by the customer)

Test software name: bt\_tool\_v1.1.2;

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

## 4.4 PRE-SCAN

### 4.4.1 Pre-scan under all packets at middle channel

Type of Modulation	Conducted Average Power (dBm) for packets								
	GFSK			π/4DQPSK			8DPSK		
packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Power (dBm)	2.85	6.03	6.71	2.78	5.85	6.51	2.82	5.87	6.53

### 4.4.2 Worst-case data packets

Type of Modulation	Worst-case data rates
GFSK	1-DH1
π/4DQPSK	2-DH3
8DPSK	3-DH5

### 4.4.3 Tested channel detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Type of Modulation	GFSK			π/4DQPSK			8DPSK		
Data Packets	1-DH1	1-DH3	1-DH5	2-DH1	2-DH3	2-DH5	3-DH1	3-DH3	3-DH5
Available Channel	0 to 78								
Test Item	Test channel and choose of data packets								
AC Power Line Conducted Emission	Frequency Hopping Channel 0 to 78								
Conducted Peak Output Power	N/A								
20 dB Bandwidth	Channel 0 & 39 & 78								
Carrier Frequencies Separation	Channel 0 & 39 & 78								
Number of Hopping Channel	Frequency Hopping Channel 0 to 78								
Dwell Time	Channel 39								
Conducted Out of Band Emission	Channel 0 & 39 & 78								
Radiated Emissions	Channel 0 & 39 & 78								
Band Edge Measurements (Radiated)	Channel 0 & 78								
Remark:									
1. The mark “ <input checked="" type="checkbox"/> ” means is chosen for testing;									
2. The mark “ <input type="checkbox"/> ” means is not chosen for testing.									

## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup

Figure 1. Below 30MHz



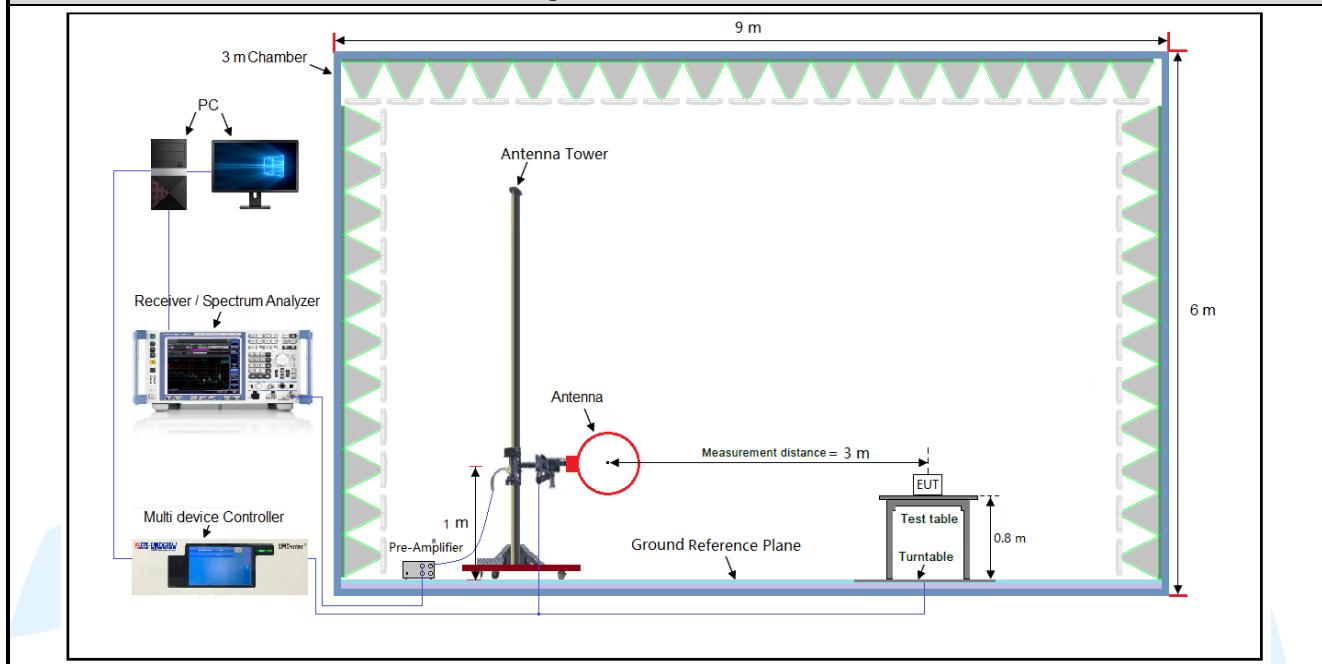



Figure 2. 30MHz to 1GHz




**Figure 3. Above 1GHz**

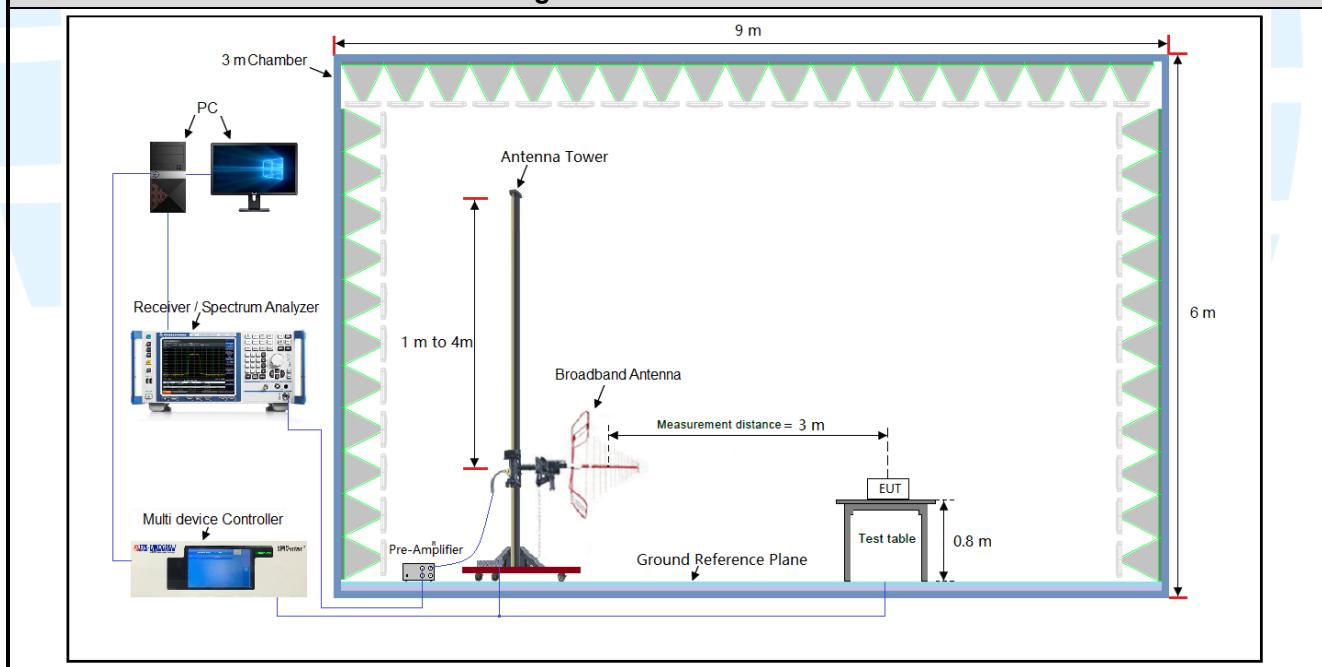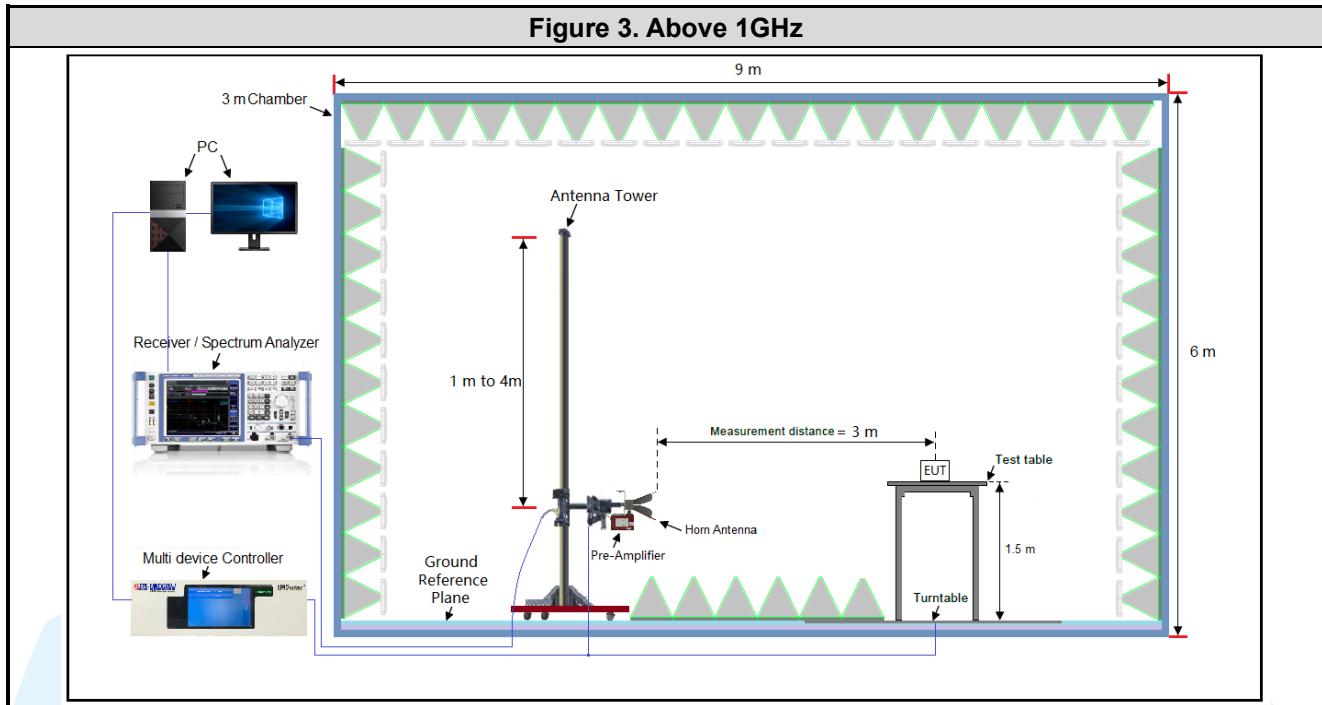

#### 4.5.2 For Conducted Emissions test setup

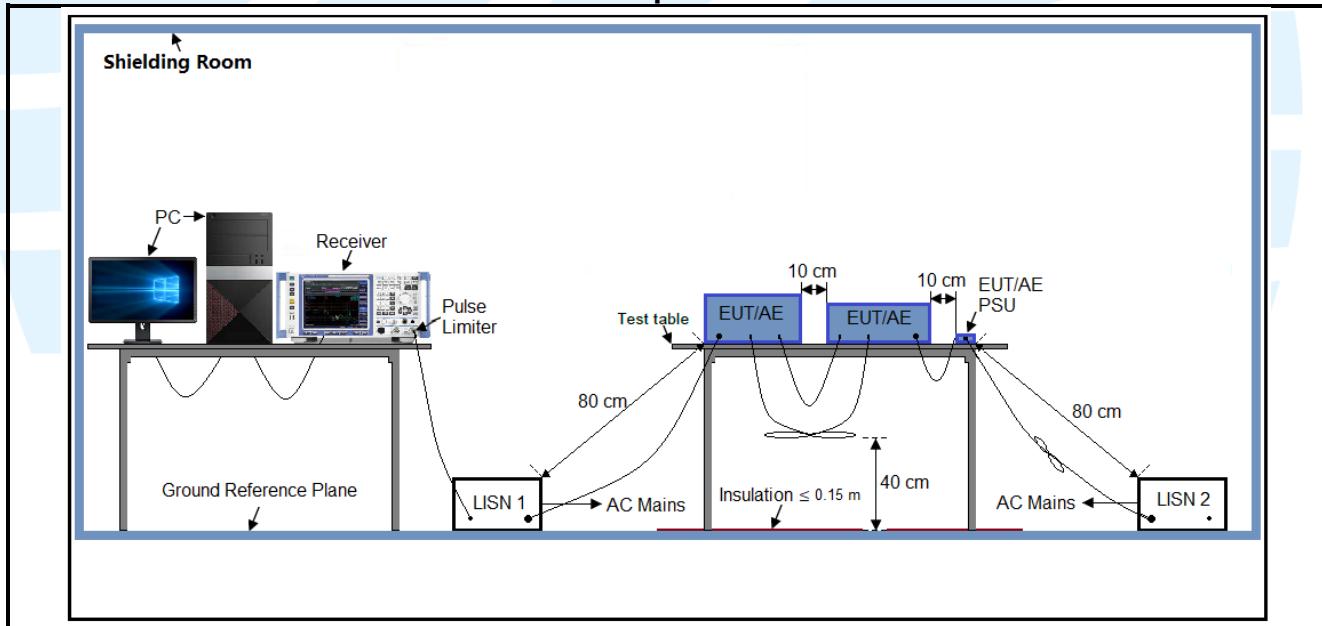

#### 4.5.3 For Conducted RF test setup

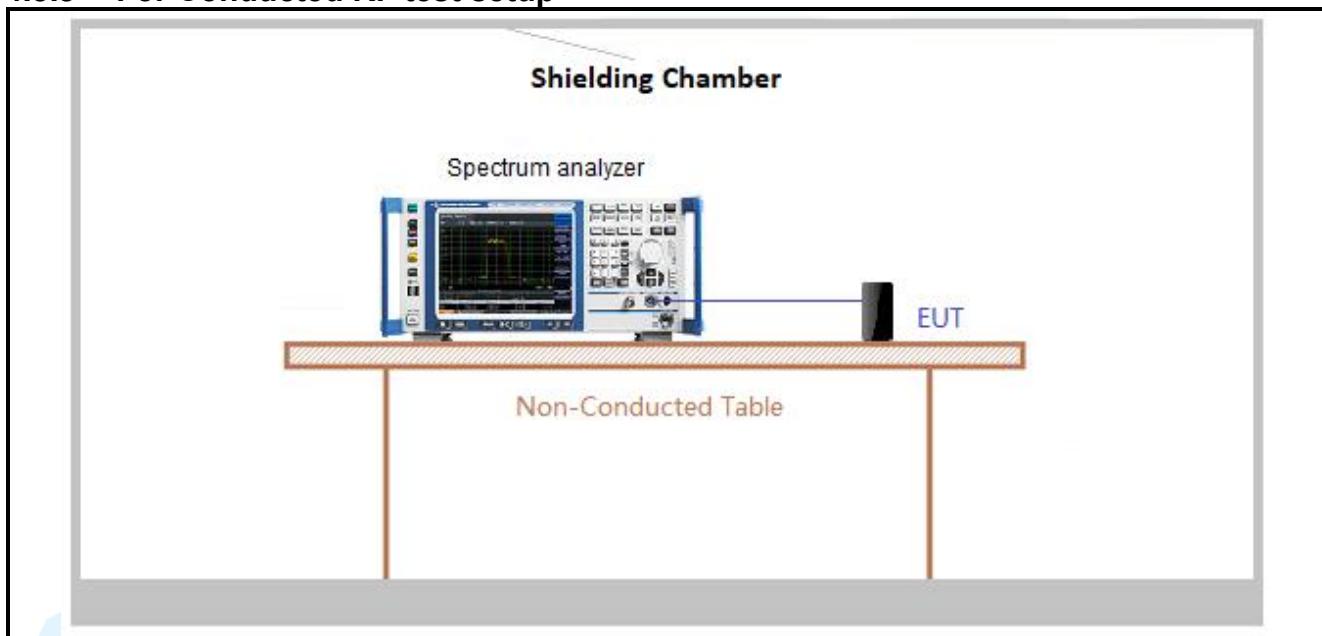

## 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.7V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.

### Test Results


Left-ear

Modulation	Packets	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
GFSK	1-DH5	2.894	3.748	0.77	77.21	1.12	0.35

#### Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;
- 3) Average factor =  $20 \log_{10} \text{Duty Cycle}$ .

The test plots as follows

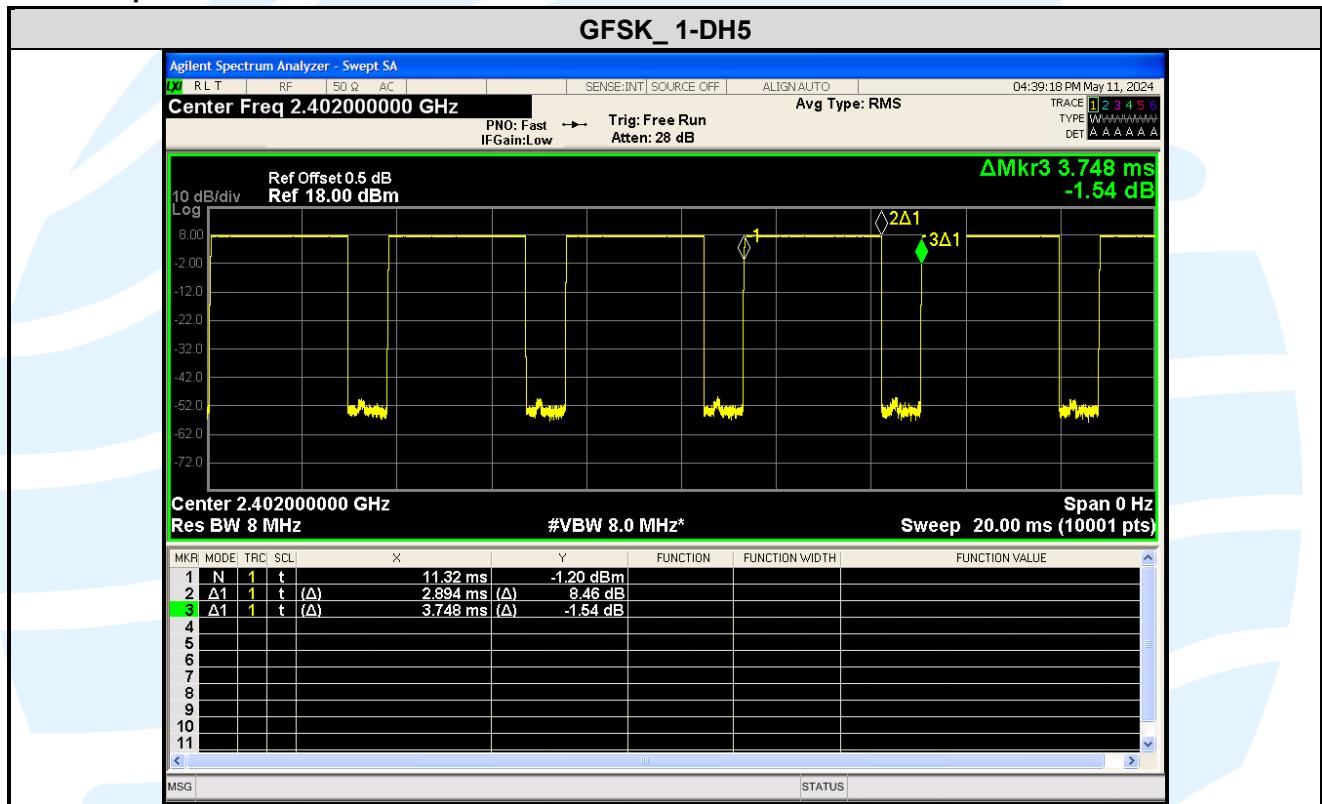

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

### 5.2 ANTENNA REQUIREMENT

Standard Requirement
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
<b>15.247(b) (4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<b>EUT Antenna:</b> Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 2.54 dBi.

### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section15.247 (b)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.5

**Limit:** For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW  $\geq$  RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Pass

Modulation	Channel	Frequency	Max. Peak Power		Peak Power Limit	Max. Avg. Power	Result
		(MHz)	(dBm)	(mW)			
GFSK	0	2402	7.83	6.07	20.97	6.43	Pass
	39	2441	7.73	5.93	20.97	<b>6.71</b>	Pass
	78	2480	7.49	5.61	20.97	6.42	Pass
$\pi/4$ DQPSK	0	2402	10.03	10.06	20.97	6.26	Pass
	39	2441	9.95	9.88	20.97	<b>6.51</b>	Pass
	78	2480	9.74	9.41	20.97	6.25	Pass
8DPSK	0	2402	<b>10.49</b>	11.19	20.97	6.28	Pass
	39	2441	10.42	11.01	20.97	<b>6.53</b>	Pass
	78	2480	10.24	10.58	20.97	6.22	Pass

## 5.420 DB BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

**Test Method:** ANSI C63.10-2013 Section 6.9.2

**Limit:** None; for reporting purposes only.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
- b) RBW = 1% to 5% of the OBW.
- c) VBW  $\geq 3 \times$  RBW
- d) Sweep = auto;
- e) Detector function = peak
- f) Trace = max hold
- g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Please refer to Appendix A

## 5.5 CARRIER FREQUENCIES SEPARATION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.2

**Limit:** Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.
- h) Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Please refer to Appendix A

## 5.6 NUMBER OF HOPPING CHANNEL

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(b)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.3

**Limit:** Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Please refer to Appendix A

## 5.7 DWELL TIME

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(a)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.4

**Limit:** Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- a) Span = zero span, centered on a hopping channel
- b) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- c) Sweep = As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function = peak
- e) Trace = max hold
- f) Use the marker-delta function to determine the dwell time

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Link mode

**Test Results:** Please refer to Appendix A

## 5.8 CONDUCTED OUT OF BAND EMISSION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247(d)

**Test Method:** ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8

**Limit:** In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

### Step 1:Measurement Procedure REF

- a) Set instrument center frequency to 2400 MHz or 2483.5 MHz.
- b) Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Sweep points  $\geq 2 \times$  Span/RBW
- h) Trace mode = max hold.
- i) Allow the trace to stabilize.
- j) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

### Step 2:Measurement Procedure OOB

- a) Set RBW = 100 kHz.
- b) Set VBW  $\geq 300$  kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Hopping Frequencies Transmitter mode

**Test Results:** Please refer to Appendix A

## 5.9 RADIATED SPURIOUS EMISSIONS

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

**Test Method:** ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6

### Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

### Limits:

#### Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

#### Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

**Test Setup:** Refer to section 4.5.1 for details.

#### Test Procedures:

##### 1. From 30 MHz to 1GHz test procedure as below:

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

##### 2. Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

- 2) Test the EUT in the lowest channel, middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The measurement data as follows:**


**Radiated Emission Test Data (9 kHz ~ 30 MHz):**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


**Radiated Emission Test Data (30 MHz ~ 1 GHz):**

**Worst-Case Configuration**

**Horizontal**

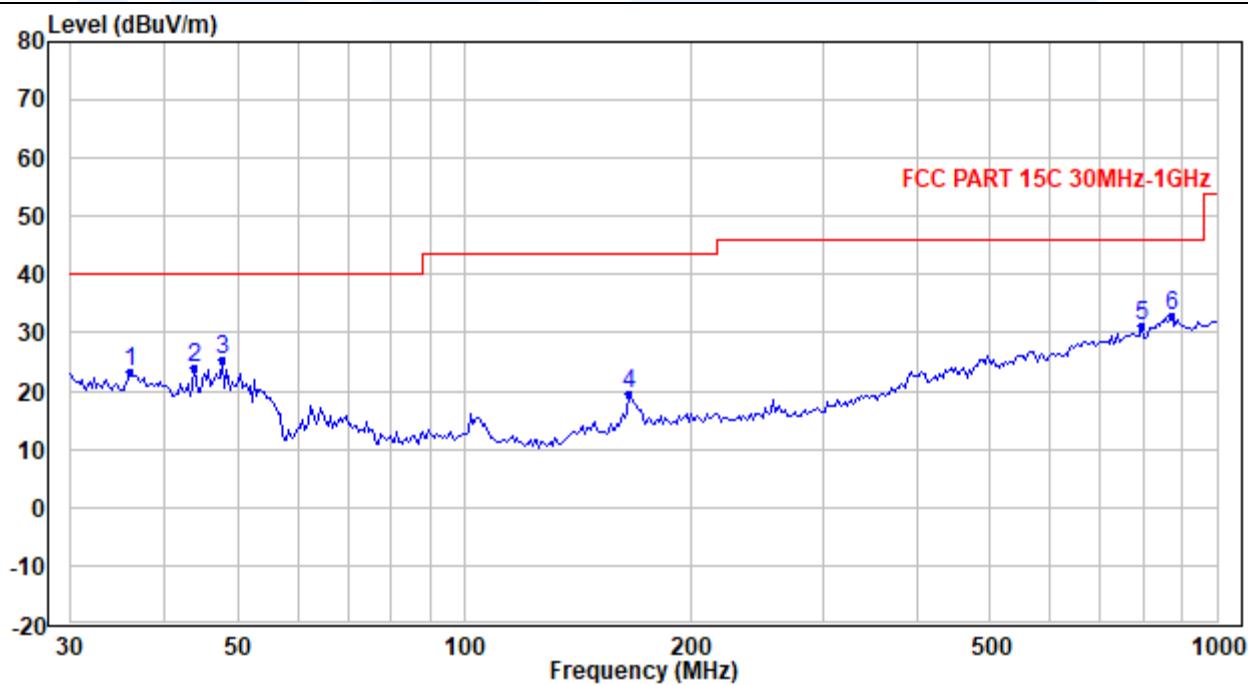

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.014	30.03	-6.72	23.31	40.00	-16.69	Peak
2	43.845	36.04	-12.12	23.92	40.00	-16.08	Peak
3	47.703	38.47	-13.10	25.37	40.00	-14.63	Peak
4	165.472	32.47	-12.93	19.54	43.50	-23.96	Peak
5	793.028	28.39	2.85	31.24	46.00	-14.76	Peak
6	868.886	28.57	4.21	32.78	46.00	-13.22	Peak

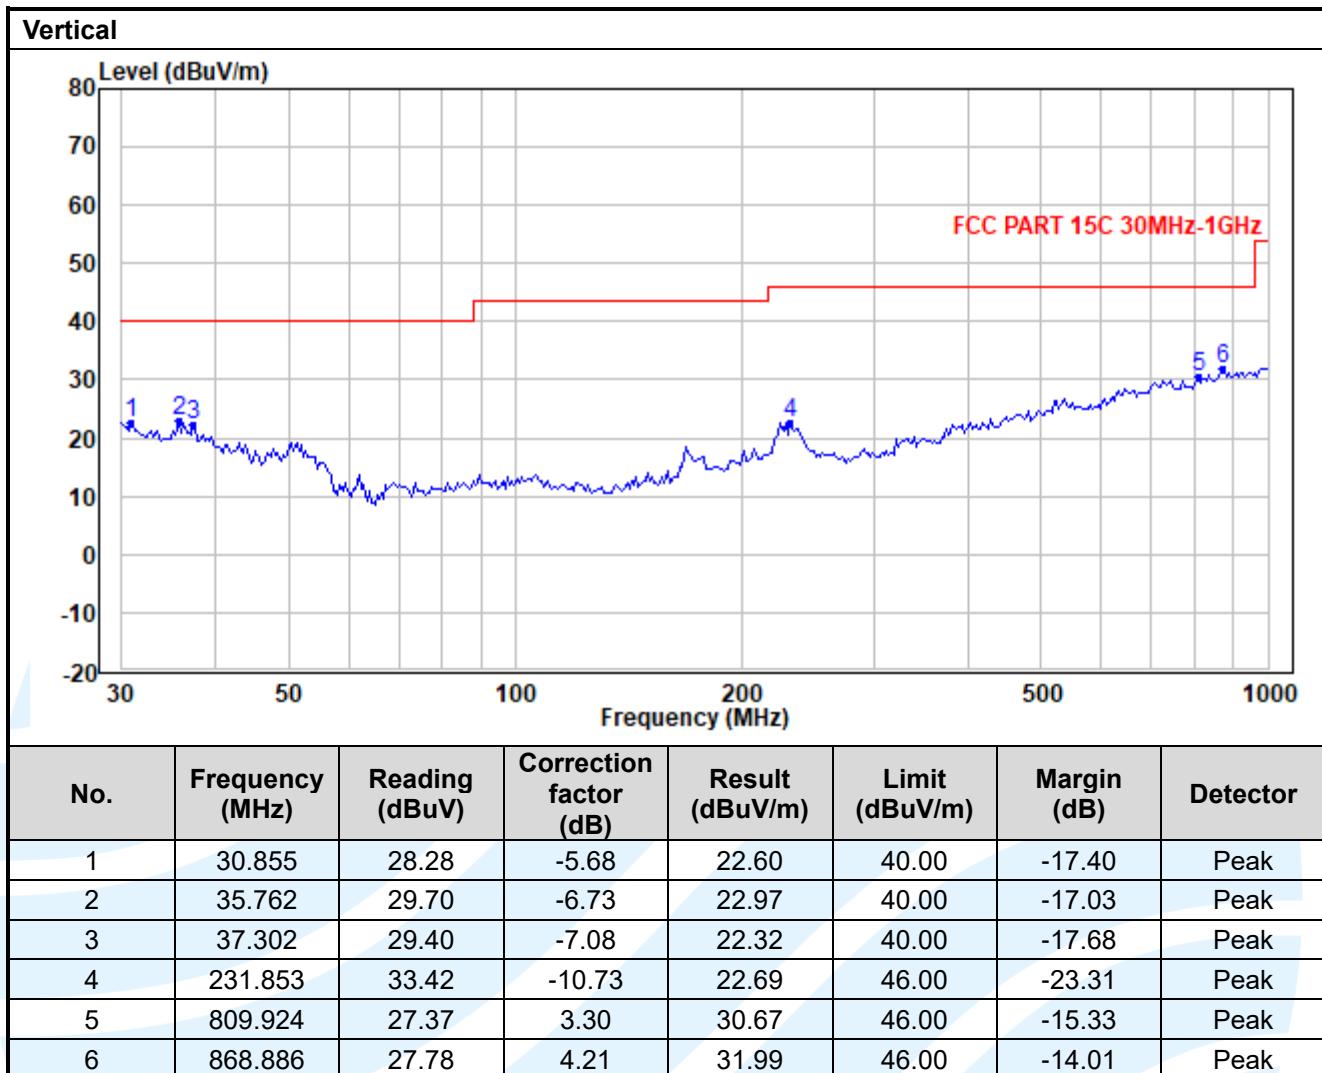

Radiated Emission Test Data (Above 1GHz):								
Lowest Channel:								
No.	Frequency (MHz)	Reading (dB $\mu$ V)	Correction factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Antenna Polaxis
1	7206	35.53	1.30	36.83	54.00	-17.17	Average	Horizontal
2	7206	47.75	1.30	49.05	74.00	-24.95	Peak	Horizontal
3	9608	34.30	3.11	37.41	54.00	-16.59	Average	Horizontal
4	9608	52.80	3.11	55.91	74.00	-18.09	Peak	Horizontal
5	7206	35.48	1.30	36.78	54.00	-17.22	Average	Vertical
6	7206	47.05	1.30	48.35	74.00	-25.65	Peak	Vertical
7	9608	34.19	3.11	37.30	54.00	-16.70	Average	Vertical
8	9608	52.82	3.11	55.93	74.00	-18.07	Peak	Vertical
Middle Channel:								
1	7323	35.66	1.31	36.97	54.00	-17.03	Average	Horizontal
2	7323	47.43	1.31	48.74	74.00	-25.26	Peak	Horizontal
3	9764	35.77	3.19	38.96	54.00	-15.04	Average	Horizontal
4	9764	53.32	3.19	56.51	74.00	-17.49	Peak	Horizontal
5	7323	35.58	1.31	36.89	54.00	-17.11	Average	Vertical
6	7323	48.13	1.31	49.44	74.00	-24.56	Peak	Vertical
7	9764	35.56	3.19	38.75	54.00	-15.25	Average	Vertical
8	9764	52.79	3.19	55.98	74.00	-18.02	Peak	Vertical
Highest Channel:								
1	7440	35.24	1.32	36.56	54.00	-17.44	Average	Horizontal
2	7440	47.41	1.32	48.73	74.00	-25.27	Peak	Horizontal
3	9920	34.85	3.29	38.14	54.00	-15.86	Average	Horizontal
4	9920	50.33	3.29	53.62	74.00	-20.38	Peak	Horizontal
5	7440	35.22	1.32	36.54	54.00	-17.46	Average	Vertical
6	7440	50.46	1.32	51.78	74.00	-22.22	Peak	Vertical
7	9920	34.69	3.29	37.98	54.00	-16.02	Average	Vertical
8	9920	50.02	3.29	53.31	74.00	-20.69	Peak	Vertical

## Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

## 5.10 BAND EDGE MEASUREMENTS (RADIATED)

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

**Test Method:** ANSI C63.10-2013 Section 6.10.5

**Limits:**

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dB $\mu$ V/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

**Test Setup:** Refer to section 4.5.1 for details.

**Test Procedures:**



Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).



1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The measurement data as follows:**

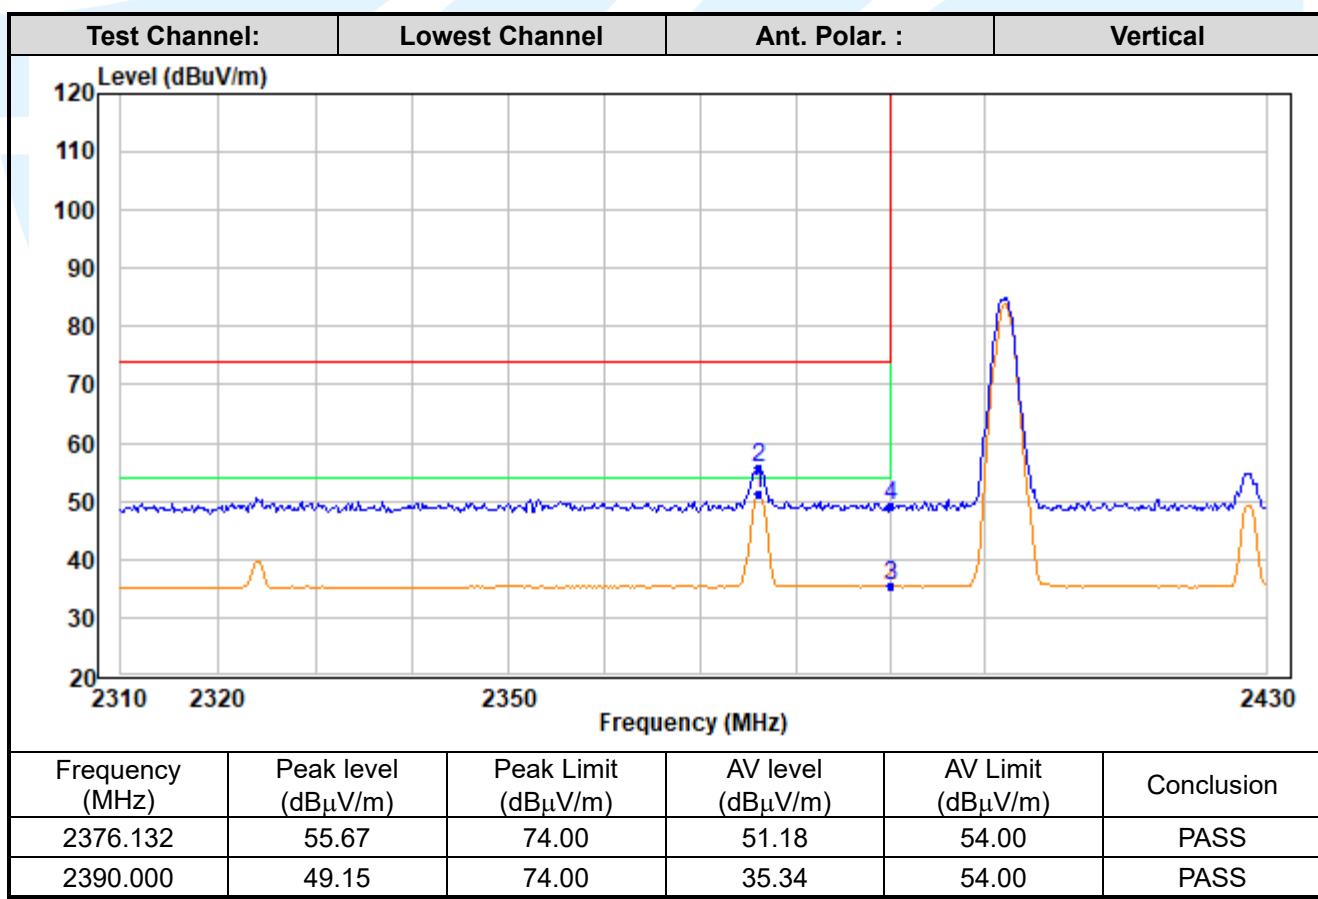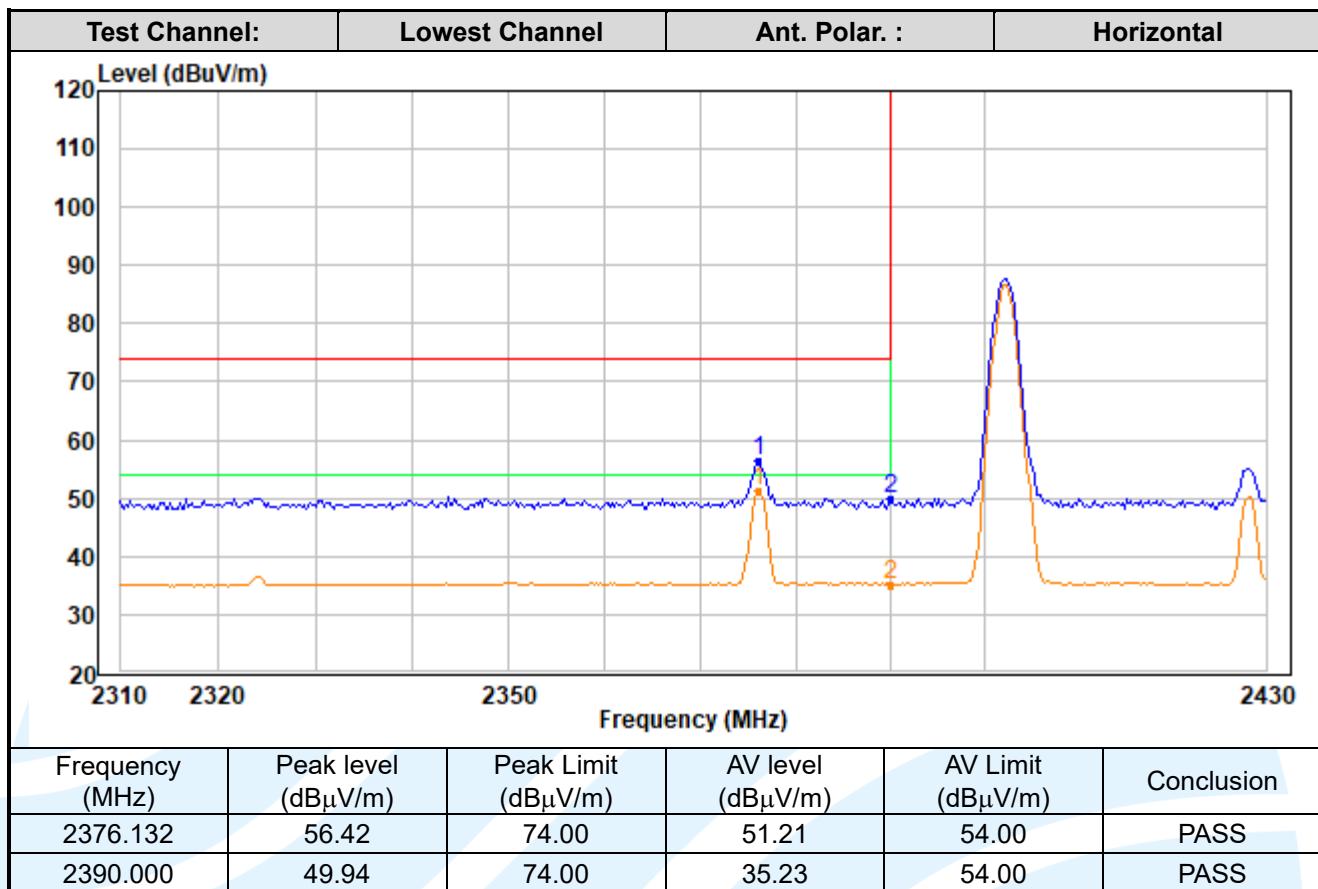

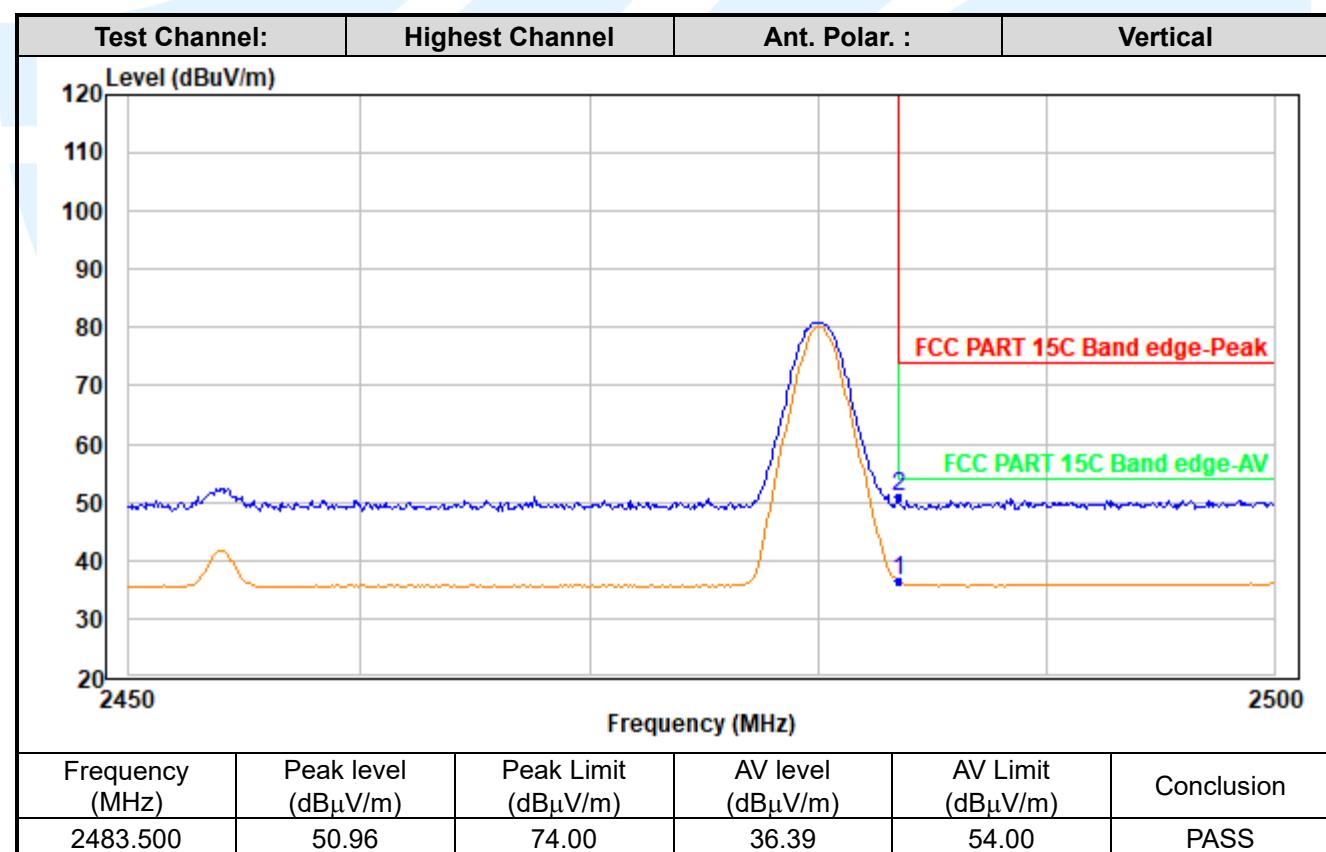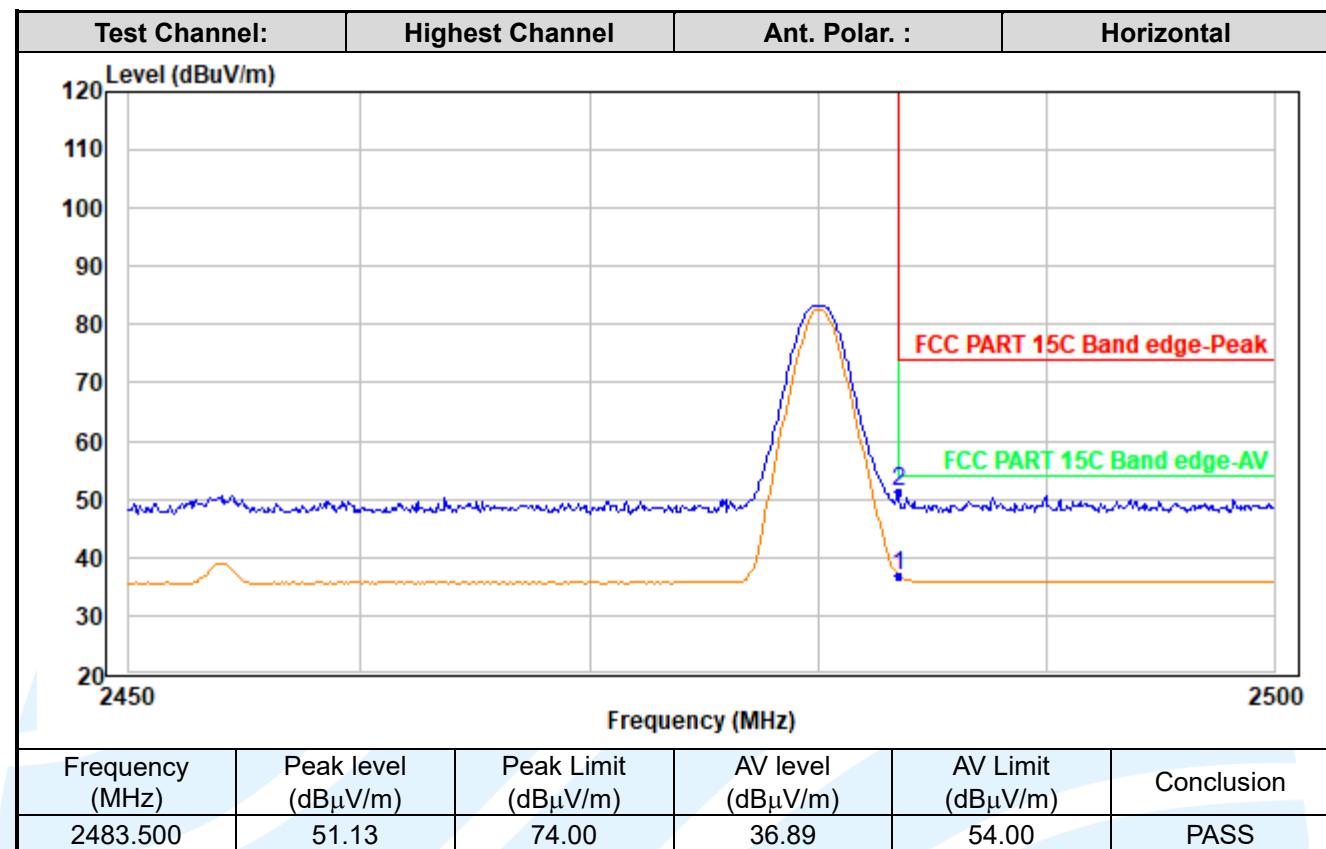



## APPENDIX A RF TEST DATA

### A.1 99% BANDWIDTH

Modulation	Channel	99% BW (MHz)
GFSK	0	0.83883
	39	0.83371
	78	0.84508
$\pi/4$ DQPSK	0	1.1903
	39	1.1908
	78	1.1848
8DPSK	0	1.2043
	39	1.2023
	78	1.2020

### Test Graphs



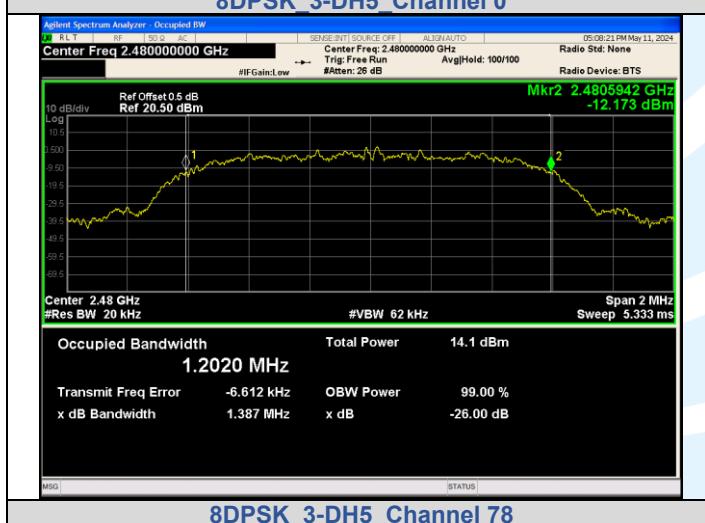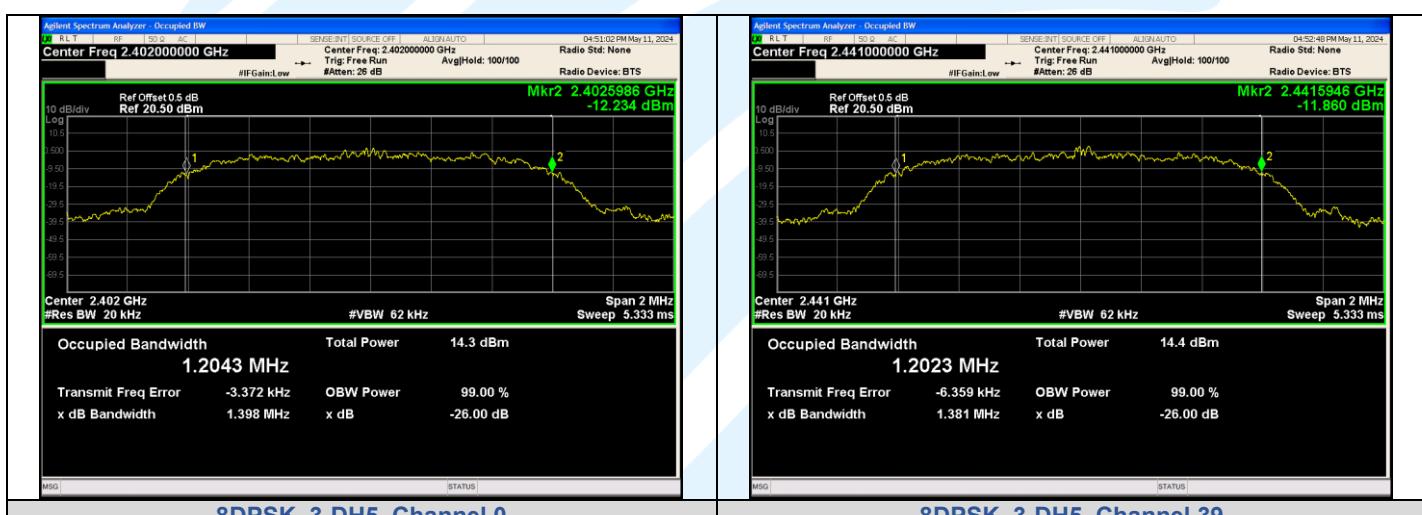


## A.2 20DB BANDWIDTH

Modulation	Channel	Center Frequency (MHz)	20 dB Bandwidth (MHz)
GFSK	0	2402 MHz	0.9508
	39	2441 MHz	0.9536
	78	2480 MHz	0.9514
T/4DQPSK	0	2402 MHz	1.326
	39	2441 MHz	1.326
	78	2480 MHz	1.320
8DPSK	0	2402 MHz	1.307
	39	2441 MHz	1.321
	78	2480 MHz	1.321

### Test Graphs



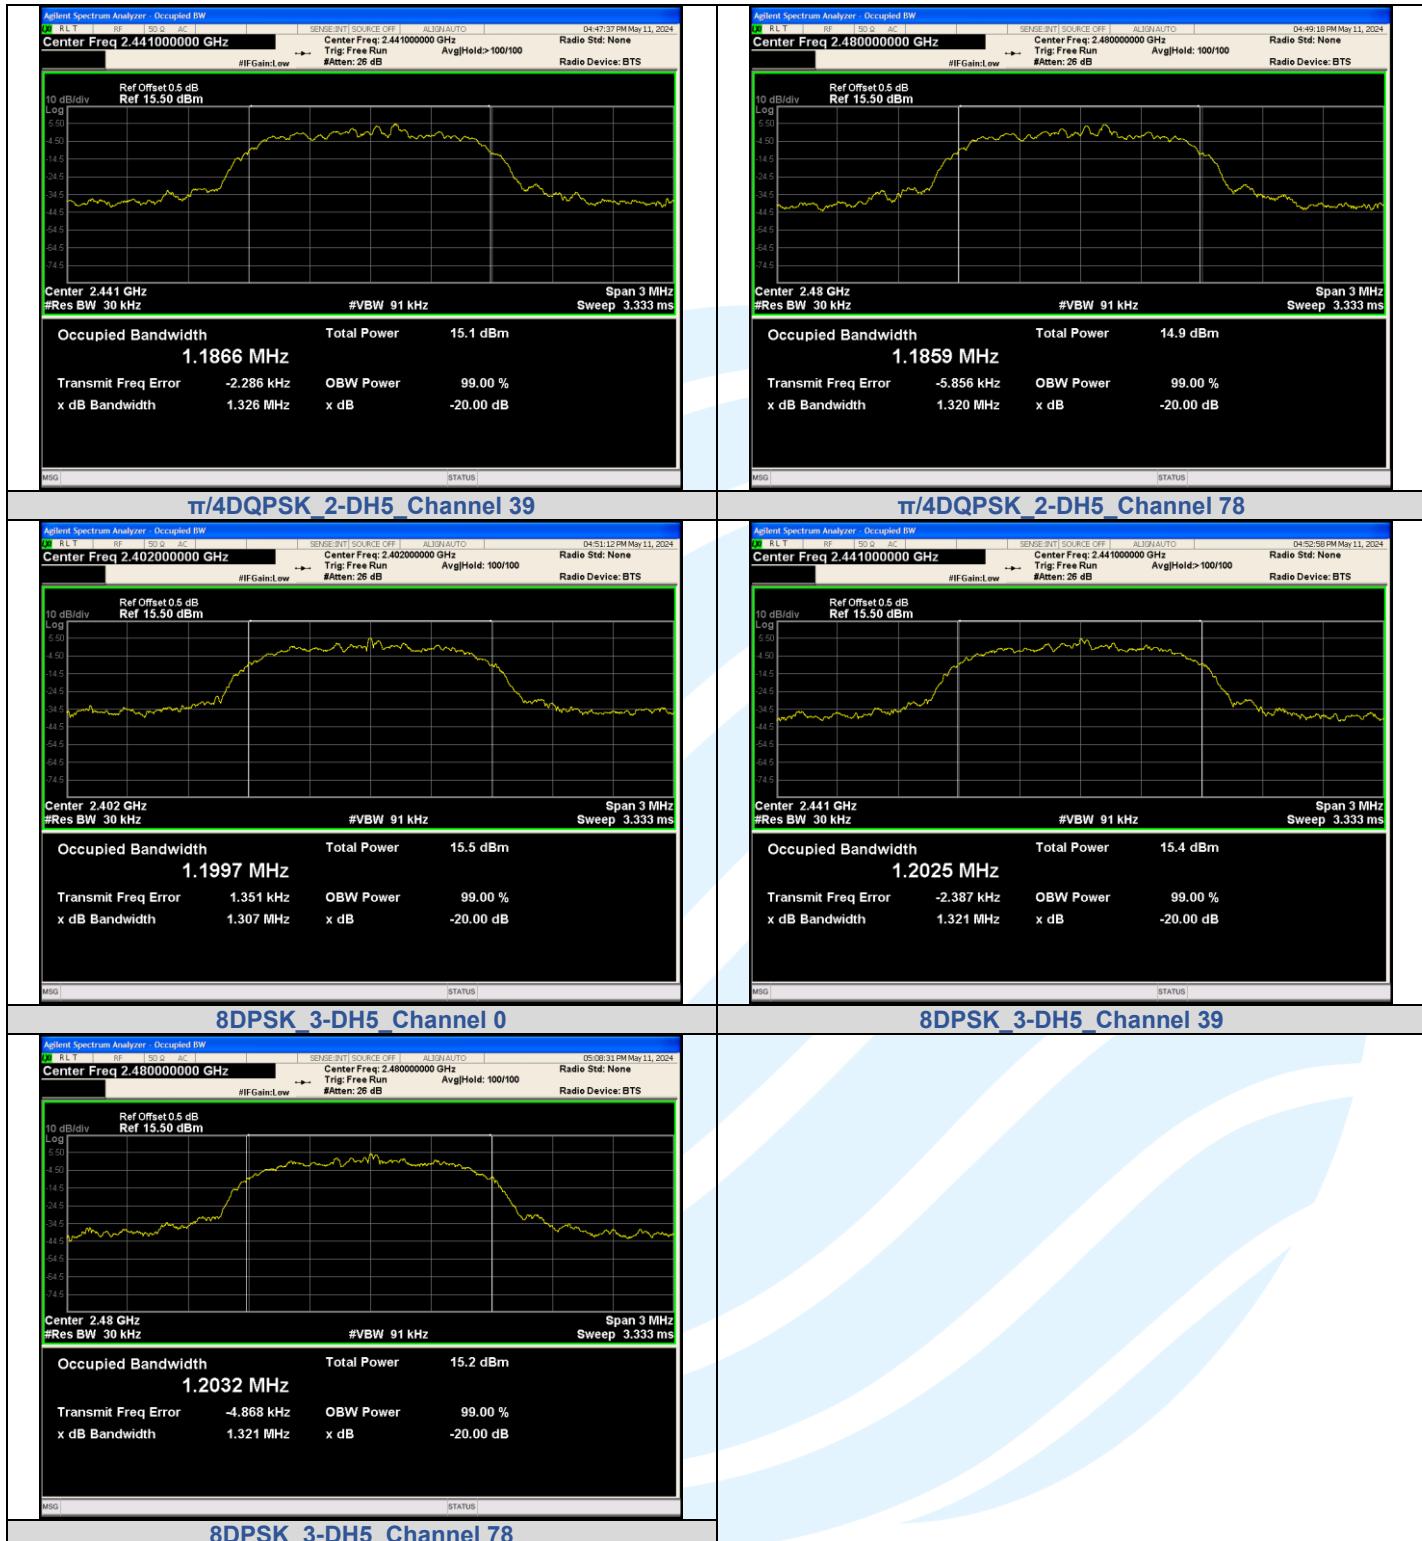

### A.3 CARRIER FREQUENCIES SEPARATION

Modulation	Packet	Left Center frequency (MHz)	Right Center frequency (MHz)	Hopping Frequency Separation (MHz)	Limit (MHz)	Result
GFSK	DH5	2439.8236	2440.8473	1.0237	0.636	PASS
$\pi/4$ DQPSK	2-DH5	2440.1584	2441.174	1.0156	0.884	PASS
8DPSK	3-DH5	2440.1191	2441.1527	1.0336	0.871	PASS

#### Test Graphs



## A.4 CONDUCTED OUT OF BAND EMISSION


Non-Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2398.78	-45.630	-12.36	-33.270	PASS
			2400.00	-49.727	-12.36	-37.367	PASS
			4804.30	-23.985	-12.36	-11.625	PASS
		39	4882.30	-23.992	-12.48	-11.512	PASS
			2483.50	-52.396	-12.71	-39.686	PASS
		78	4959.70	-23.405	-12.71	-10.695	PASS
$\pi/4$ DQPSK	2-DH5	0	2398.81	-46.224	-12.46	-33.764	PASS
			2400.00	-46.519	-12.46	-34.059	PASS
			4804.30	-26.170	-12.46	-13.710	PASS
		39	4882.30	-26.247	-12.58	-13.667	PASS
			2483.50	-54.024	-12.85	-41.174	PASS
		78	4959.70	-22.937	-12.85	-10.087	PASS
8DPSK	3-DH5	0	2398.76	-45.514	-12.31	-33.204	PASS
			2400.00	-46.549	-12.31	-34.239	PASS
			4804.30	-23.134	-12.31	-10.824	PASS
		39	4881.67	-26.112	-12.53	-13.582	PASS
			2483.50	-54.095	-12.74	-41.355	PASS
		78	4960.33	-24.689	-12.74	-11.949	PASS

Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result	
GFSK	DH5	Hopping	2398.02	-45.490	-12.38	-33.110	PASS	
			2400.00	-46.155	-12.38	-33.775	PASS	
			2483.50	-54.255	-12.78	-41.475	PASS	
			2397.02	-45.791	-12.46	-33.331	PASS	
			2400.00	-46.105	-12.46	-33.645	PASS	
			2483.50	-52.241	-12.8	-39.441	PASS	
$\pi/4$ DQPSK	2-DH5		2400.00	-45.895	-12.65	-33.245	PASS	
			2483.50	-48.503	-13.18	-35.323	PASS	
			2400.00	-46.122	-12.57	-33.552	PASS	
			2483.50	-49.117	-12.97	-36.147	PASS	
			2400.00	-45.961	-12.44	-33.521	PASS	
			2483.50	-48.566	-12.93	-35.636	PASS	
8DPSK	3-DH5		2400.00	-46.453	-12.48	-33.973	PASS	
			2483.50	-48.672	-12.84	-35.832	PASS	

### Test Graphs

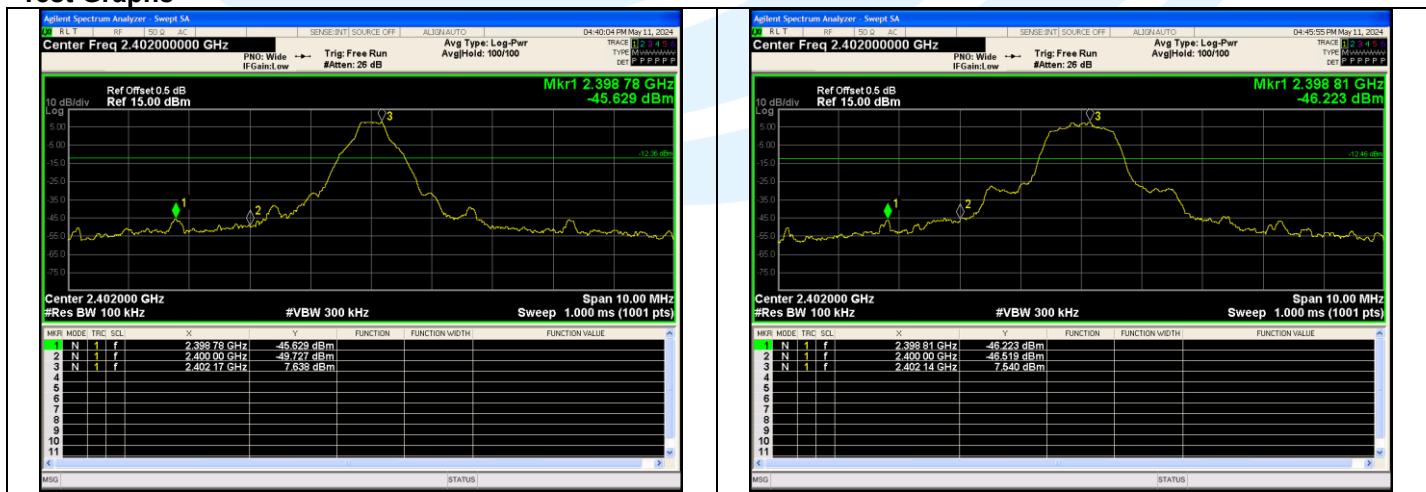

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

