

Test Report

Report No.: MTi220829009-02E2

Date of issue: 2023-06-01

Applicant: Chug Inc.

Product: 3-in-1 multi-charger

Model(s): QIC37, HKWP2993-25

FCC ID: 2AO23-QIC37

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1 General Description	5
1.1 Description of the EUT	5
1.2 Description of test modes.....	6
1.3 Description of support units	7
2 Measurement uncertainty	7
3 Test facilities and accreditations.....	8
3.1 Test laboratory	8
4 List of test equipment	9
5 Test result	10
5.2 Test setup	11
5.3 Test Procedures.....	11
5.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01	12
5.5 Test results	13
Photographs of the Test Setup.....	14
Photographs of the EUT.....	14

Test Result Certification

Applicant:	Chug Inc.
Address:	7157 Shady Oak Road, Eden Prairie, MN 55344, USA
Manufacturer:	Chug Inc.
Address:	7157 Shady Oak Road, Eden Prairie, MN 55344, USA

Product description

Product name:	3-in-1 multi-charger
Trademark:	heyday
Model name:	QIC37
Series Model:	HKWP2993-25
Standards:	FCC CFR 47 PART 1, § 1.1310
Test method:	KDB 680106 v03r01

Date of Test

Date of test:	2023-03-30 ~ 2023-04-18
Test result:	Pass

Test Engineer :


(Yanice Xie)

Reviewed By :


(Leon Chen)

Approved By :


(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	3-in-1 multi-charger
Model name:	QIC37
Series Model:	HKWP2993-25
Model difference:	All the models are the same circuit and module, except the model name.
Electrical rating:	Input: DC 12V/2.5A, 15V/2A Output: MagSafe Output: 15W, iWatch Output: 5W, Earphone Output: 5W
Accessories:	1. Adapter: Model: HKAP3891-30US Input: 100-240V~ 50/60Hz 0.8A Output: 5V=3A, 9V=3A, 12V=2.5A, 15V=2A 2. Cable: Type-C to Type-C cable 1.8m
Hardware version:	V1.0
Software version:	V1.0
RF specification:	
Operation frequency:	Transmitter 1(Earphone): 115 kHz – 205 kHz Transmitter 2(Phone): 115 kHz – 205 kHz&360 kHz Transmitter 3(Watch): 326.5 kHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode 1	Wireless MagSafe Output(5W)+iWatch(5W)+Earphone(5W)
Mode 2	Wireless MagSafe Output(7.5W)+iWatch(5W)+Earphone(5W)
Mode 3	Wireless MagSafe Output(15W)+iWatch(5W)+Earphone(5W)
Mode 4	Wireless MagSafe Output(5W)+iWatch(5W)
Mode 5	Wireless MagSafe Output(7.5W)+iWatch(5W)
Mode 6	Wireless MagSafe Output(15W)+iWatch(5W)
Mode 7	Wireless MagSafe Output(5W)+Earphone(5W)
Mode 8	Wireless MagSafe Output(7.5W)+Earphone(5W)
Mode 9	Wireless MagSafe Output(15W)+Earphone(5W)
Mode 10	Wireless iWatch(5W)+Earphone(5W)
Mode 11	Wireless MagSafe Output(5W)
Mode 12	Wireless MagSafe Output(7.5W)
Mode 13	Wireless MagSafe Output(15W)
Mode 14	Wireless iWatch(5W)
Mode 15	Wireless Earphone(5W)
Mode 16	Standby
The test data only show worst test mode: Mode 3	

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Iphone 12	A2404	F17DLCK70DYN	Apple
Air Pods	/	/	Apple
Earphone	/	/	Xiaomi

Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurement (9kHz~30MHz)	± 18.6%
Electric field measurements (9kHz~30MHz)	± 18.6%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	2022/08/15	2023/08/14

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30


f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup

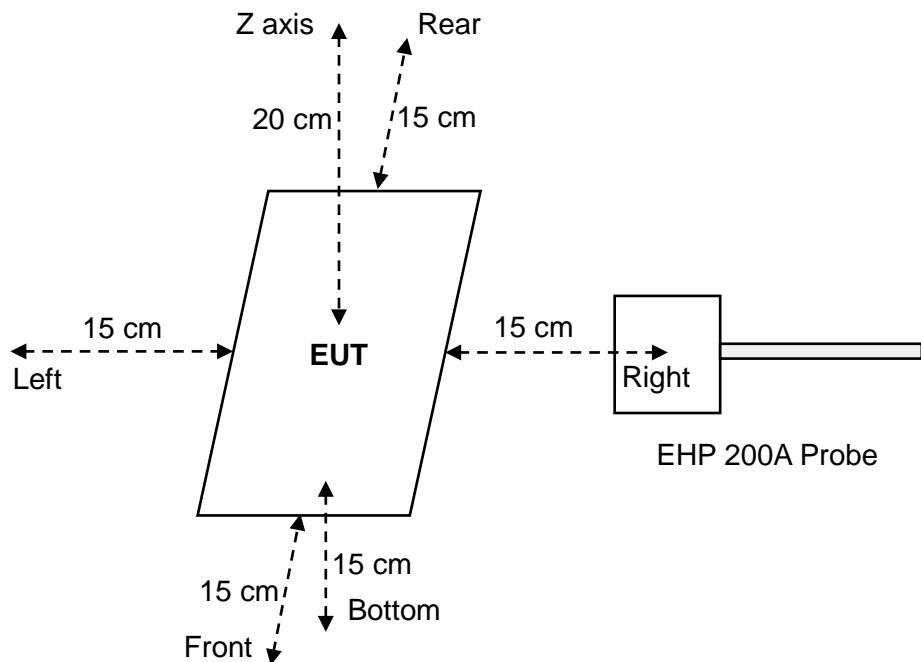

5.3 Test Procedures

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the device and 20 cm above the top surface of the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the dictates of KDB 680106 v03r01.

5.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01

Requirement	Device
1. Power transfer frequency is less than 1 MHz.	Yes. The operating frequencies are: Transmitter 1(Earphone): 115 kHz – 205 kHz Transmitter 2(Phone): 115 kHz – 205 kHz&360 kHz Transmitter 3(Watch): 326.5 kHz
2. Output power from each primary coil is less than or equal to 15 watts	Yes. The maximum output power is: Transmitter 1(Earphone): 5W Transmitter 2(Phone): 15W Transmitter 3(Watch): 5W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes. The EUT has three source primary coils.
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes. Mobile exposure conditions only.
6. The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes. See the test result in item 4.5.



5.5 Test results

Test condition 1: Mode 3 operating mode with client device (1 % battery status of client device)

Antenna	Probe Position	E-field (V/m)			H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)	Measurement	Limit	Max. Percentage (%)
1	Z axis	2.0989	614	0.58%	0.6645	1.63	43.84%
	Left	1.0266			0.7146		
	Right	3.5754			0.1790		
	Front	1.6798			0.1040		
	Rear	2.8126			0.2057		
	Bottom	1.4891			0.1123		

Test condition 2: Mode 3 operating mode with client device (50 % battery status of client device)

Antenna	Probe Position	E-field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	2.1158	614	0.58%	0.6661	1.63	43.25%
	Left	1.0205			0.705		
	Right	3.5918			0.1763		
	Front	1.6703			0.1036		
	Rear	2.8164			0.2085		
	bottom	1.4935			0.1037		

Test condition 3: Mode 3 operating mode with client device (99 % battery status of client device)

Antenna	Probe Position	E-field (V/m)			H-field (A/m)		
		Measurement	Limit	Percentage (%)	Measurement	Limit	Percentage (%)
1	Z axis	2.09	614	0.58%	0.6549	1.63	43.43%
	Left	1.0221			0.7079		
	Right	3.5619			0.172		
	Front	1.6685			0.0947		
	Rear	2.8027			0.2007		
	bottom	1.4774			0.105		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----