



FCC 47 CFR PART 15 SUBPART C 15.247

TEST REPORT

FOR

Cat2See Feeder

Model : C2SF001

Issued to
Cat2See LTD

Wisenbakh 17 apartment 4 Kefar Sava,4465115 Israel.

Issued by
WH Technology Corp.



EMC Test Site	Xizhi Office and Lab	7F., No.262, Sec. 3, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)
Tel.: +886-2-7729-7707 Fax: +886-2- 8648-1311		

Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. Personnel only, and shall be noted in the revision section of the document.



Contents

PHOTOS OF EUT 1. General Information	3
2. Report of Measurements and Examinations	5
2.1 List of Measurements and Examinations	5
3. Test Configuration of Equipment under Test	6
3.1 Description of the tested samples	6
3.2 Carrier Frequency of Channels	7
3.3 Test Mode and Test Software	8
3.4 TEST Methodology & General Test Procedures	9
3.5 Measurement Uncertainty	10
3.6 Description of the Support Equipments	10
4. Test and measurement equipment	11
4.1 calibration	11
4.2 equipment	11
5. Antenna Requirements	14
5.1 Standard Applicable	14
5.2 Antenna Construction and Directional Gain	14
6. Test of Conducted Emission	15
6.1 Test Limit	15
6.2 Test Procedures	15
6.3 Typical Test Setup	16
6.4 Test Result and Data	17
7. Test of Radiated Emission	17
7.1 Test Limit	18
7.2 Test Procedures	18
7.3 Typical Test Setup	19
7.4 Test Result and Data (9kHz ~ 30MHz)	20
7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)	20
7.6 Test Result and Data (Above 1GHz)	22
8. 6dB Bandwidth Measurement Data	28
8.1 Test Limit	28
8.2 Test Procedures	28
8.3 Test Setup Layout	28
8.4 Test Result and Data	29
9. Maximum Peak and Average Output Power	31
9.1 Test Limit	31
9.2 Test Procedures	31
9.3 Test Setup Layout	31



9.4	Test Result and Data	32
10.	Power Spectral Density	33
10.1	Test Limit	33
10.2	Test Procedures	33
10.3	Test Setup Layout	33
10.4	Test Result and Data	34
11.	Band Edges Measurement	36
11.1	Test Limit	36
11.2	Test Procedure	36
11.3	Test Setup Layout	36
11.4	Test Result and Data	37
11.5	Restrict Band Emission Measurement Data	39
12.	Restricted Bands of Operation	40
12.1	Labeling Requirement	40

APPENDIX 1 PHOTOS OF TEST CONFIGURATION

PHOTOS OF EUT



1. General Information

Applicant : Cat2See LTD

Address : Wisenbakh 17 apartment 4 Kefar Sava, 4465115 Israel.

Manufacturer : CAE Technology Development Co., Limited

Address : Unit 429, Hongqiao Zhonghua Yuan , No.2388, Hongqiao Road, Shanghai, China

EUT : Cat2See Feeder

Model Name : C2SF001

Model Differences : N/A

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.4-2014. The said equipment in the configuration described in this report shows the maximum emission levels emanating

FCC part 15 subpart C

Receipt Date : 02/28/2018

Final Test Date : 03/06/2018

Tested By:

Date

Bing Chang/ Engineer

Date

Reviewed by:

Bell Wei / Manager
Designation Number: TW2954



2. Report of Measurements and Examinations

2.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209 15.247(d)	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(d)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass



3. Test Configuration of Equipment under Test

3.1 Description of the tested samples

EUT Name : Cat2See Feeder

Model Number : C2SF001

FCCID : 2A06Q-C2SF001

Receipt Date : 02/28/2018

Power From : ☒Inside ☐Outside
☐Adaptor ☒Battery ☐AC Power Source
☐DC Power Source ☐Support Unit PC or NB

Operate Frequency : Refer to the channel list as described below (2.402 ~2.480 GHz)

Modulation Technique : GFSK

Number of Channels : 40

Channel spacing : ☐N/A ☒ 2 MHz

Operating Mode : ☐Simplex ☒ Half Duplex

Antenna Type : PCB Antenna

Antenna gain : 1 dBi



3.2 Carrier Frequency of Channels

BLE

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480



3.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook and EUT for RF test.
- c. Test Software: Radio Test.exe
- d. New Battery was used for all testing and the worst radiated emission case from X,Y and Z axis evaluation was selected for testing.
- e. The following test modes were performed for test:
 - BLE: CH00: 2402MHz, CH19: 2440MHz, CH39: 2480MHz



3.4 TEST Methodology & General Test Procedures

All testing as described bellowed were performed in accordance with ANSI C63.4:2014 and ANSI C63.10:2013.

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.4:2014. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

- 1) Putting the EUT on the platform and turning on the EUT (on/off button on the bottom of the EUT).
- 2) Setting test channel described as "Channel setting and operating condition", and testing channel by channel.
- 3) For the maximum output power measurement, we followed the method of measurement KDB558074 D01.
- 4) For the spurious emission test based on ANSI(2014), at the frequency where below 1GHz used quasi-peak detector mode; where above 1GHz used the peak and average detector mode. IF the peak value may be under average limit, the average mode will not be performed.



3.5 Measurement Uncertainty

Measurement Item	Uncertainty
Peak Output Power(conducted)	$\pm 1.345\text{dB}$
Power Spectral Density	$\pm 1.347\text{dB}$
Radiated emission(1G-25GHz)	$\pm 5.00\text{dB}$
Radiated emission(30M-1GHz)	$\pm 3.89\text{dB}$
Conducted emission	$\pm 1.81\text{dB}$

3.6 Description of the Support Equipments

Setup Diagram

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	N/A	N/A	N/A	N/A	N/A	N/A	N/A
INSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note: All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

Grounding: Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



4. Test and measurement equipment

4.1 calibration

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2 equipment

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

**TABLELIST OF TEST AND MEASUREMENT EQUIPMENT**

Test Site	Instrument	Manufacturer	Model No.	S/N	Next Cal. Date
Conduction	Spectrum (9K--3GHz)	R&S	FSP3	833387/010	2018/09/20
	EMI Receiver	R&S	ESHS10	830223/008	2018/05/22
	LISN	Rolf Heine Hochfrequenztechnik	NNB-2/16z	98062	2018/05/25
	ISN	Schwarzbeck	8-Wire ISN CAT5	CAT5-8158-0094	2018/09/21
	RF Cable	N/A	N/A	EMI-3	2018/10/19
Radiation	Bilog antenna(30M-1G)	ETC	MCTD2786B	BLB16M04004/J B-5-004	2018/05/03
	Double Ridged Guide Horn antenna(1G-18G)	ETC	MCTD 1209	DRH15N0 2009	2018/11/23
	Horn antenna (18G-26G)	com-power	AH-826	81000	2018/08/15
	LOOP Antenna (Below 30M)	com-power	AL-130	17117	2018/10/04
	Pre amplifier (30M-1G)	EMC INSTRUMENT	EMC9135	980334	2018/05/04
	Microwave Preamplifier (1G-18G)	EMC INSTRUMENT	EMC051845	980108&AT -18001	2018/10/23
	Pre amplifier (18G~26G)	MITEQ	JS4-18002600-3 0-5A	808329	2018/08/10
	EMI Test	R&S	ESVS30	826006/002	2018/11/28



	Receiver		(20M-1000MHz)		
	RF Cable (open site)	EMCI	N male on end of both sides (EMI4)	30m	2018/10/19
	RF CABLE (1~26.5G)	HARBOUT INDUSTRIES	LL142MI(4M+4M)	NA	2018/03/08
	RF CABLE (1~26.5G)	HARBOUR INDUSTRIES	LL142MI(7M)	NA	2018/08/11
	Spectrum (9K--7GHz)	R&S	FSP7	830180/006	2018/03/25
	Spectrum (9K--40GHz)	AGILENT	8564EC	4046A0032	2019/03/01
--	Power Meter	R&S	NRVS	100696	2018/08/10
--	Power Sensor	R&S	URV5-Z4	0395.1619.05	2018/08/10

***CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR**



5. Antenna Requirements

5.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Antenna Construction and Directional Gain

BLE:

Antenna Type: PCB Antenna

Antenna Gain: 1 dBi



6. Test of Conducted Emission

6.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 110 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2014 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

6.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



6.3 Typical Test Setup

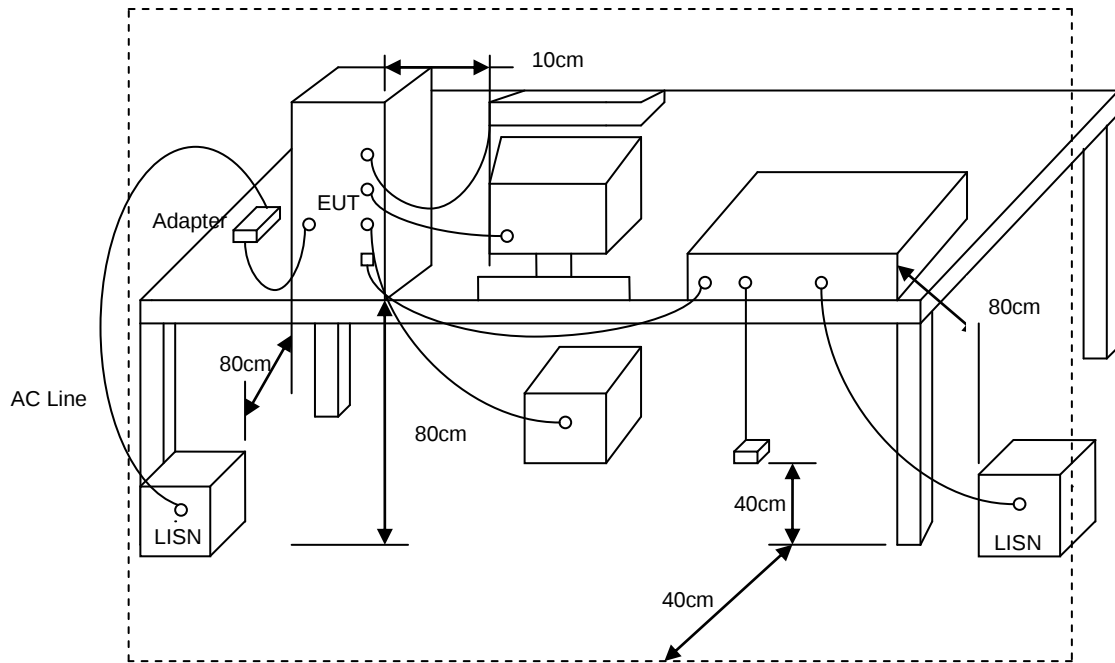



6.4 Test Result and Data

Remark: Because the EUT employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Measurements to demonstrate compliance with the conducted limits are not required for devices.



7. Test of Radiated Emission

7.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than




average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

7.3 Typical Test Setup

For radiated emissions below 30MHz

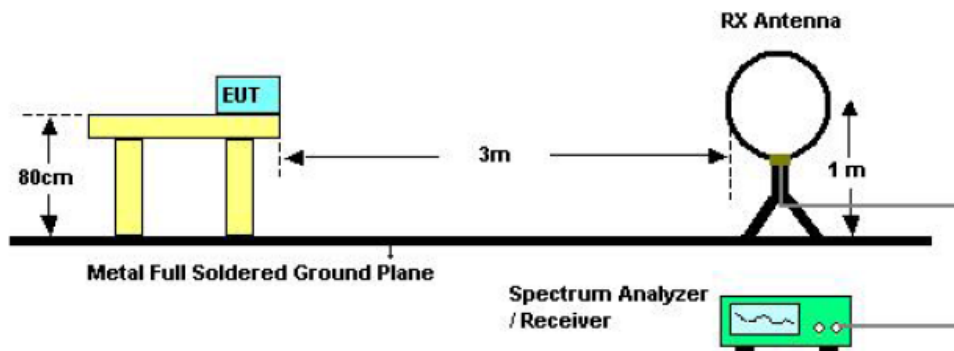

For radiated emissions above 30MHz

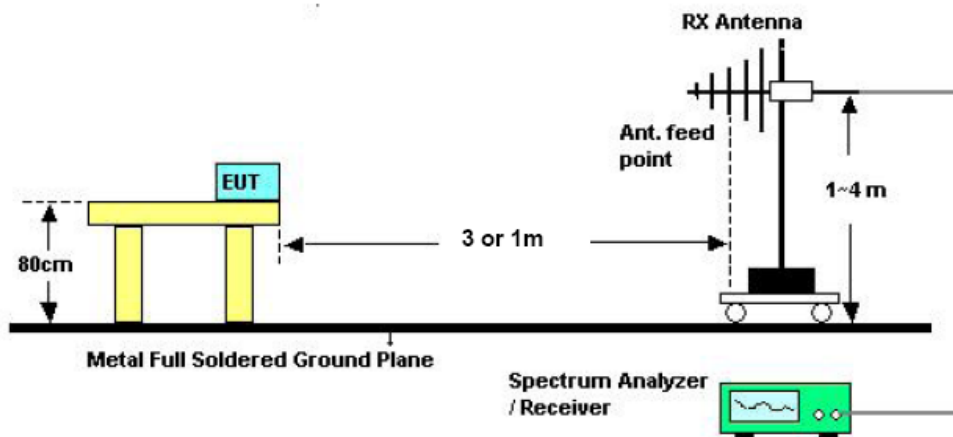

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].




7.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

7.5 Test Result and Data (30MHz ~ 1GHz, worst emissions found)


Power	:	DC 6V from battery	Pol/Phase	:	HORIZONTAL
Test Mode 1	:	TX CH0 2402MHz	Temperature	:	32 °C
Memo	:		Humidity	:	59%

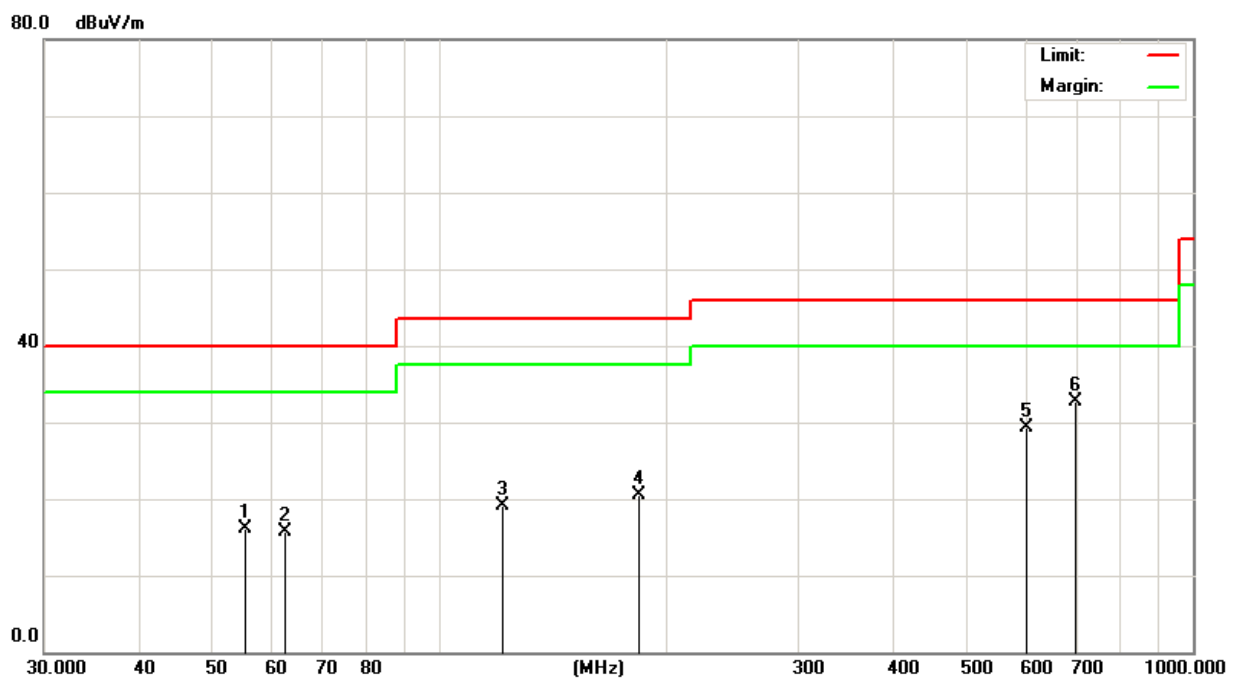

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		55.4147	31.91	-15.79	16.12	40.00	-23.88	QP
2		62.4314	33.81	-18.07	15.74	40.00	-24.26	QP
3		121.1231	34.14	-14.96	19.18	43.50	-24.32	QP
4		184.4898	32.60	-12.12	20.48	43.50	-23.02	QP
5		601.4265	30.96	-1.74	29.22	46.00	-16.78	QP
6	*	699.3046	32.27	0.44	32.71	46.00	-13.29	QP



Power	:	DC 6V from battery	Pol/Phase	:	VERTICAL
Test Mode 1	:	TX CH0 2402MHz	Temperature	:	32 °C
Memo	:		Humidity	:	59%

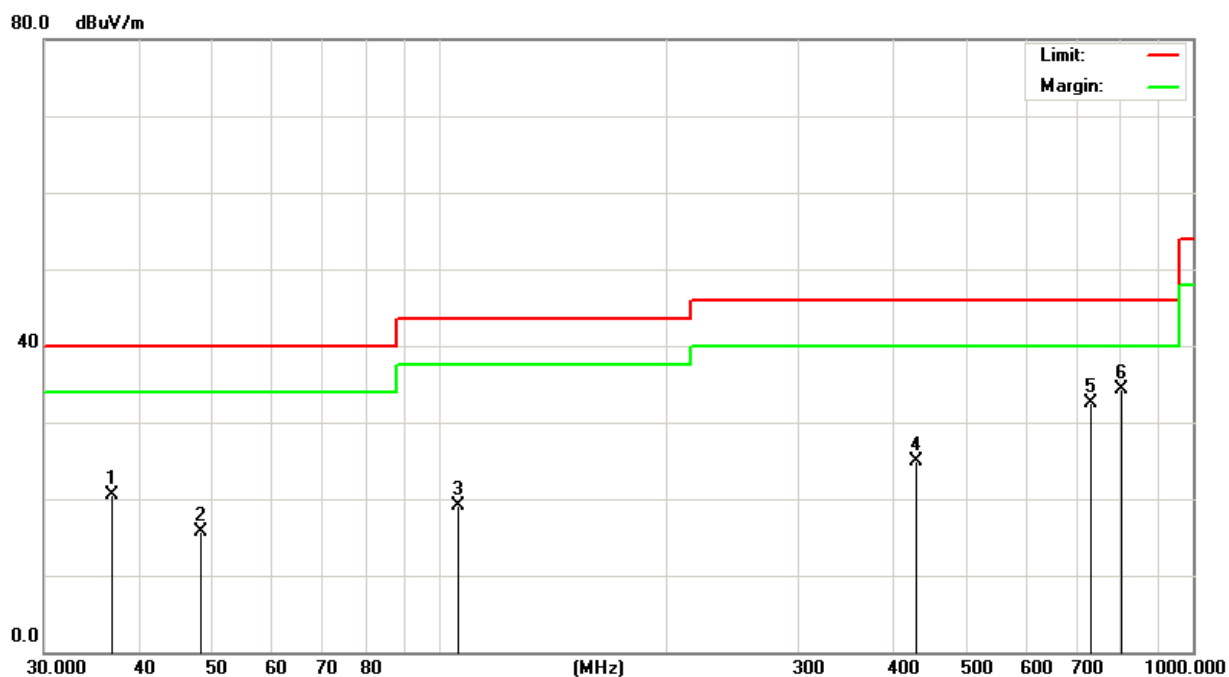

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		36.7662	37.24	-16.72	20.52	40.00	-19.48	QP
2		48.1626	33.99	-18.37	15.62	40.00	-24.38	QP
3		106.3850	32.55	-13.50	19.05	43.50	-24.45	QP
4		428.0193	31.46	-6.57	24.89	46.00	-21.11	QP
5		729.3583	32.99	-0.55	32.44	46.00	-13.56	QP
6	*	804.6028	31.54	2.82	34.36	46.00	-11.64	QP



7.6 Test Result and Data (Between 1~25 GHz)


Power	:	DC 6V from battery	Pol/Phase	:	HORIZONTAL/ VERTICAL
Test Mode 1	:	TX 1Mbps CH0,CH19,CH39	Temperature	:	30 °C
Memo	:		Humidity	:	59 %

CH0

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.000	49.85	5.06	54.91	74.00	-19.09	peak
4804.000	39.13	5.06	44.19	54.00	-9.81	AVG
7206.000	42.82	7.03	49.85	74.00	-24.15	peak
7206.000	32.65	7.03	39.68	54.00	-14.32	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

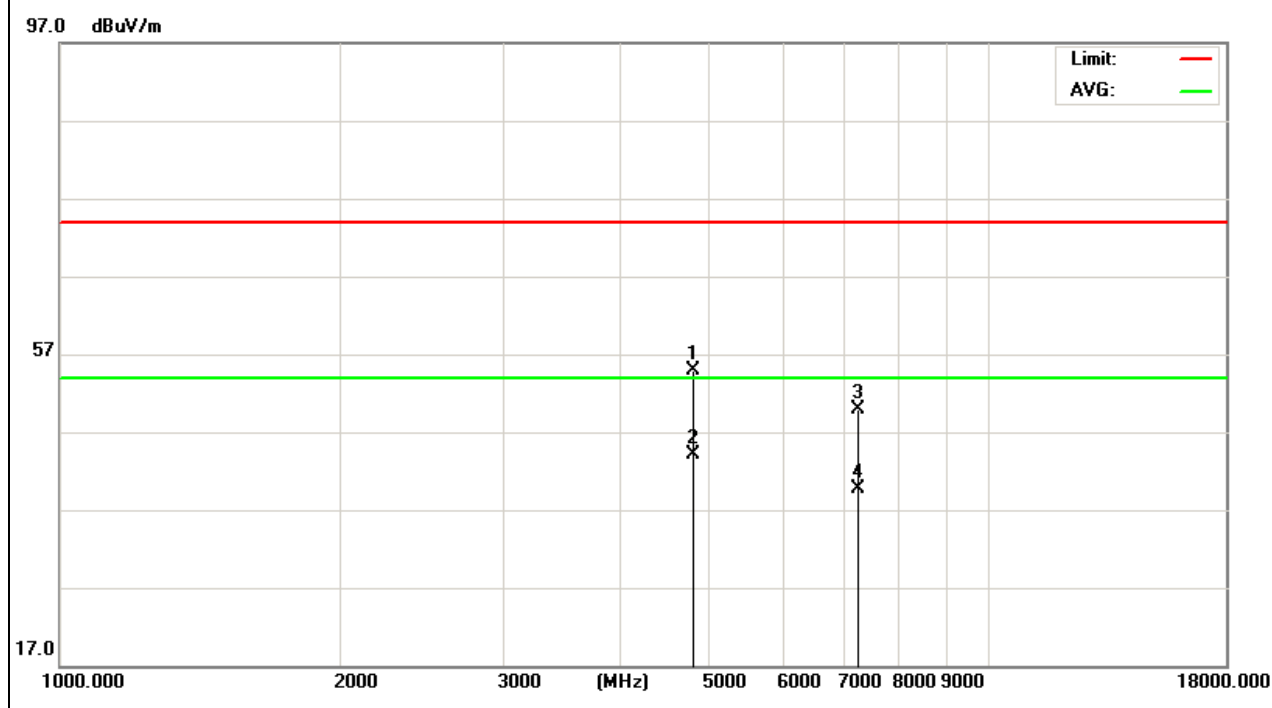




Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.000	48.93	5.06	53.99	74.00	-20.01	peak
4804.000	38.79	5.06	43.85	54.00	-10.15	AVG
7206.000	42.57	7.03	49.60	74.00	-24.40	peak
7206.000	33.22	7.03	40.25	54.00	-13.75	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

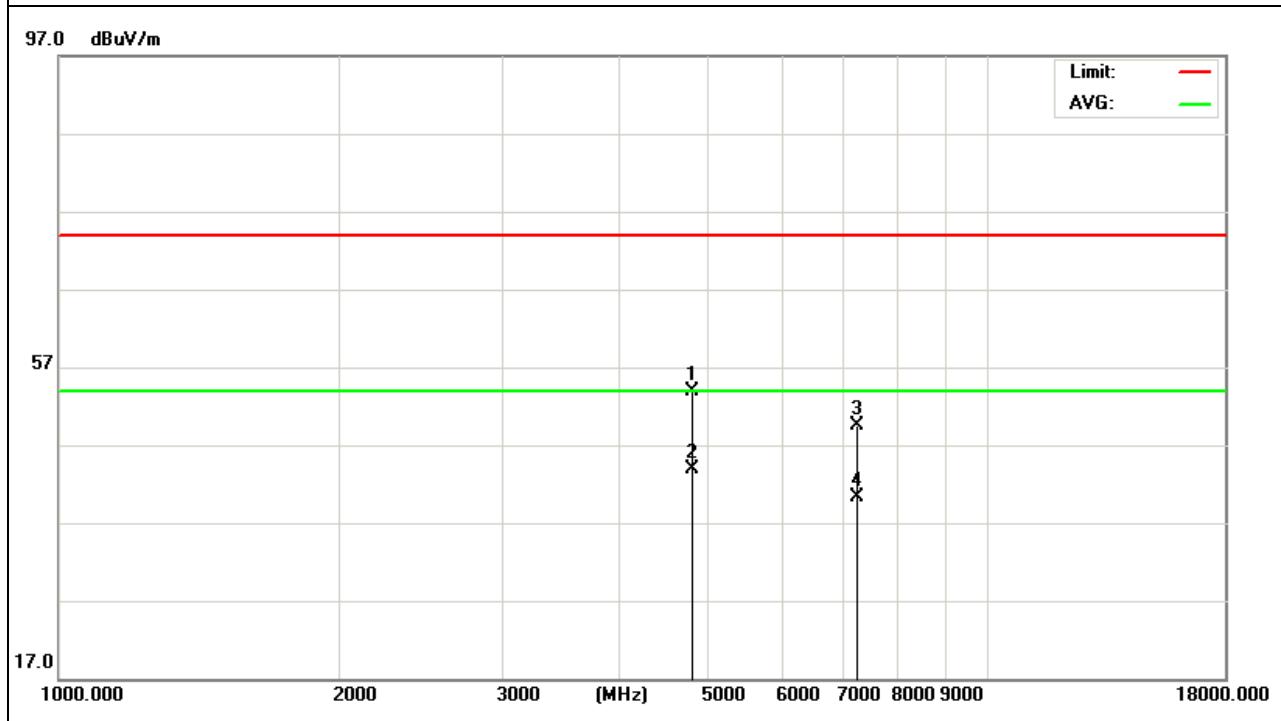

Note:

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




CH19

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880.000	49.30	5.14	54.44	74.00	-19.56	peak
4880.000	39.29	5.14	44.43	54.00	-9.57	AVG
7320.000	42.83	7.52	50.35	74.00	-23.65	peak
7320.000	33.44	7.52	40.96	54.00	-13.04	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

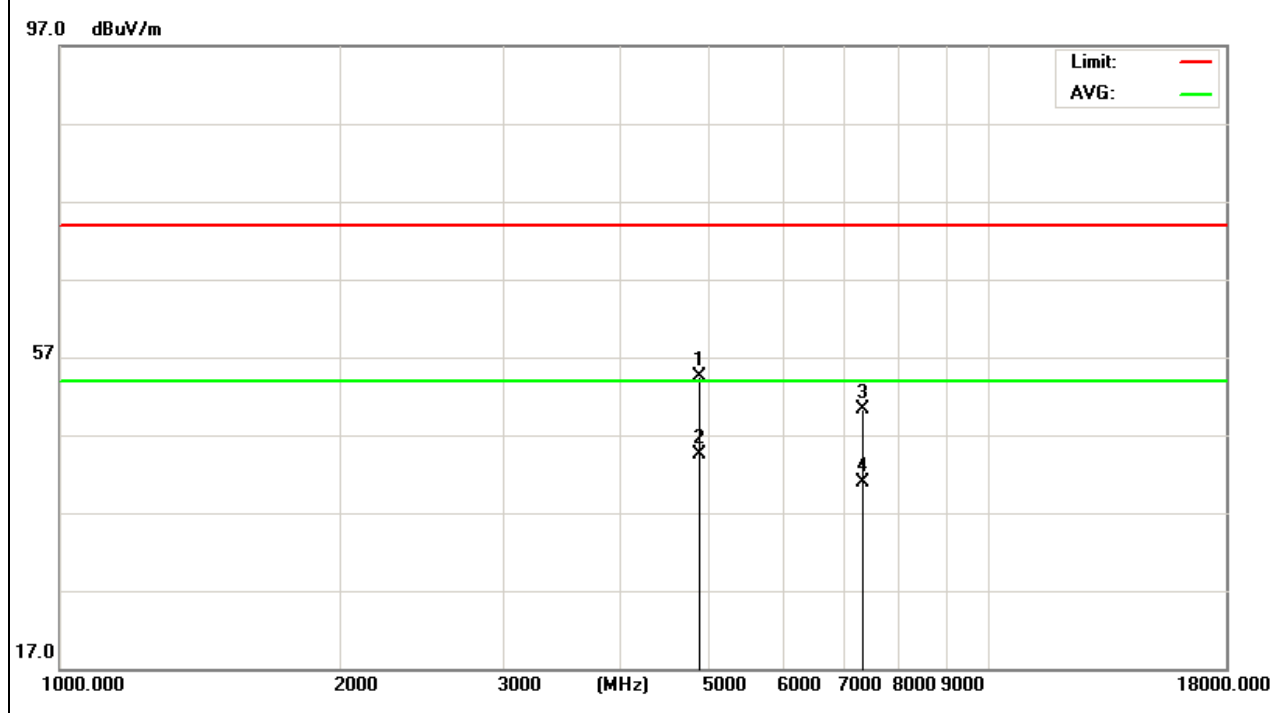




Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880.000	49.64	5.14	54.78	74.00	-19.22	peak
4880.000	38.69	5.14	43.83	54.00	-10.17	AVG
7320.000	42.79	7.52	50.31	74.00	-23.69	peak
7320.000	33.07	7.52	40.59	54.00	-13.41	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

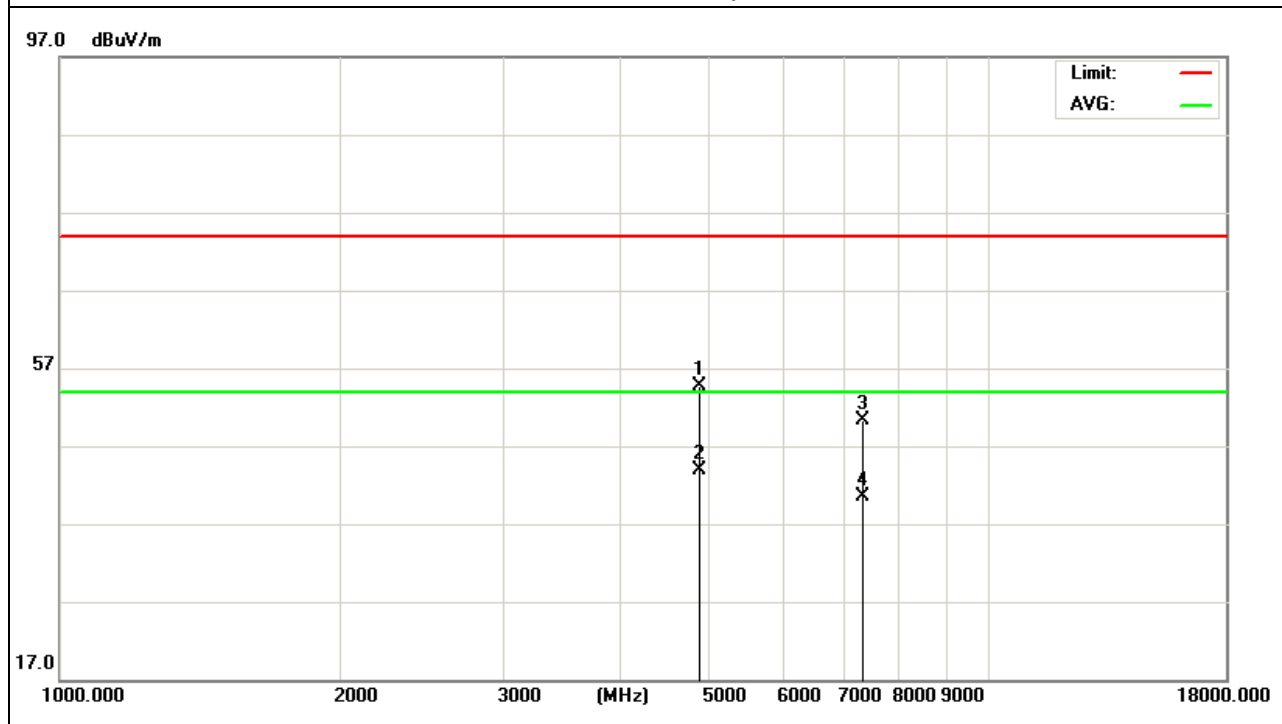

Note:

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




CH39

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.000	48.88	5.22	54.10	74.00	-19.90	peak
4960.000	39.48	5.22	44.70	54.00	-9.30	AVG
7440.000	43.51	8.06	51.57	74.00	-22.43	peak
7440.000	32.69	8.06	40.75	54.00	-13.25	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

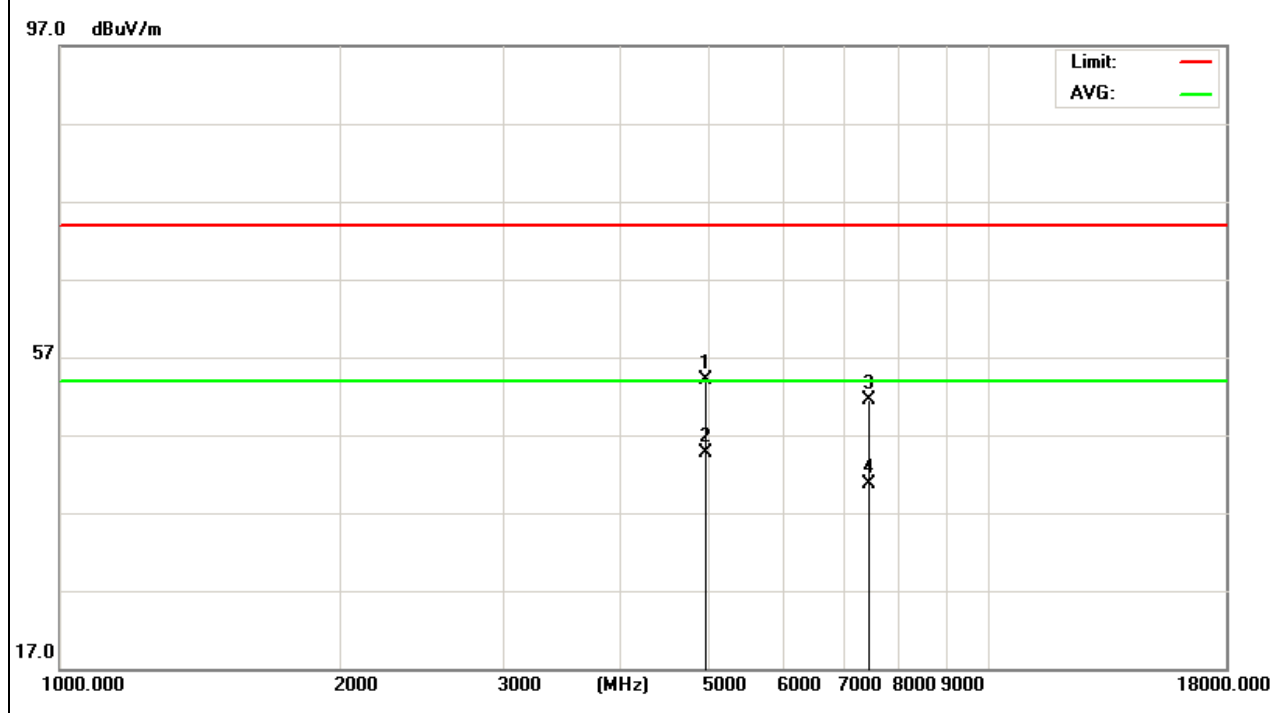




Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960.000	48.76	5.22	53.98	74.00	-20.02	peak
4960.000	40.01	5.22	45.23	54.00	-8.77	AVG
7440.000	42.99	8.06	51.05	74.00	-22.95	peak
7440.000	32.82	8.06	40.88	54.00	-13.12	AVG

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

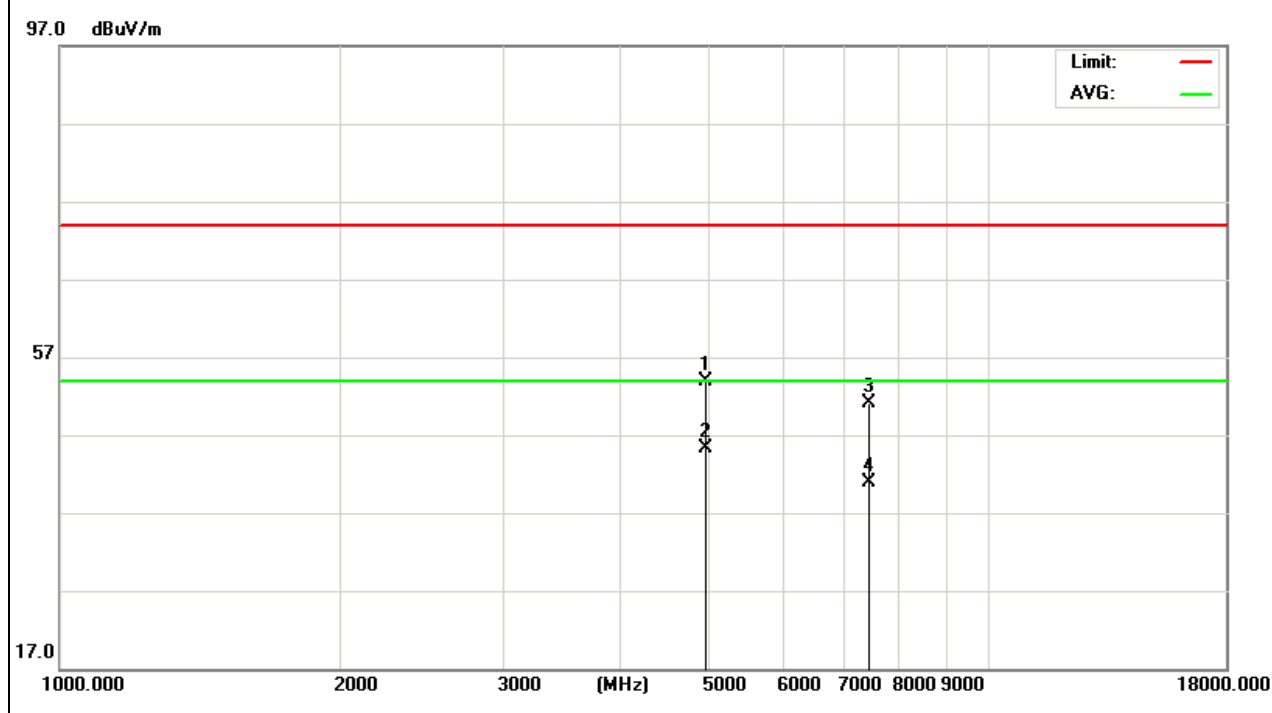

Note:

All the modulation modes were tested, the data of the worst mode are recorded in the above pages and the others modulation methods do not exceed the limits.

The disturbance above 18GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



8. 6dB Bandwidth Measurement Data


8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW $\geq 3 \times$ RBW.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

8.3 Test Setup Layout





8.4 Test Result and Data

Test Date: Feb. 28, 2018

Temperature: 20°C


Atmospheric pressure: 1000 pha

Humidity: 55%

Modulation Standard	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
GFSK	0	2402	0.646
	19	2440	0.652
	39	2480	0.659

Modulation Standard: GFSK


Channel: 0

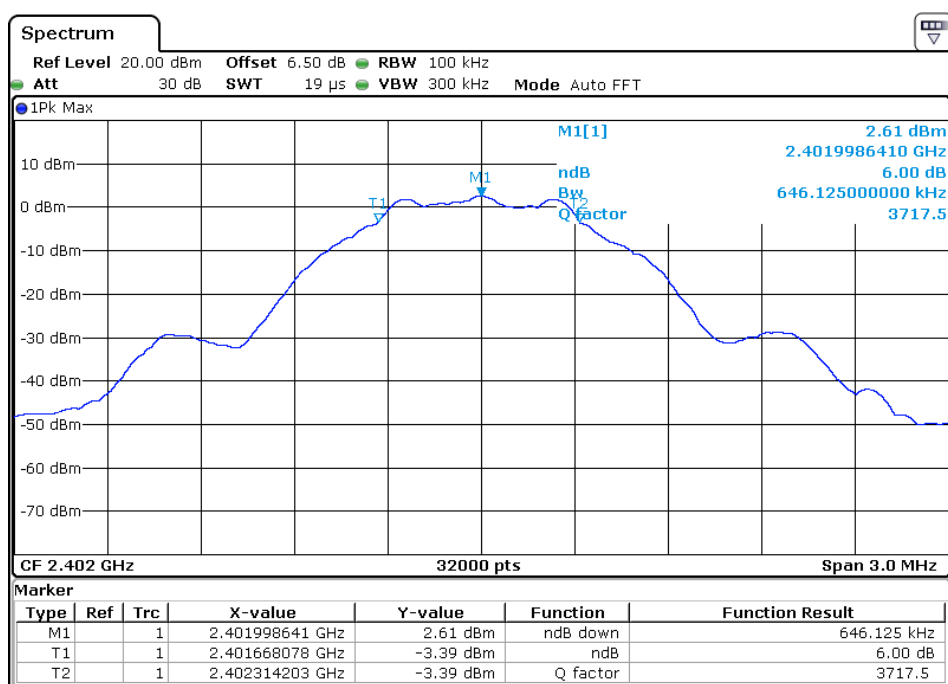




Modulation Standard: GFSK

Channel: 19

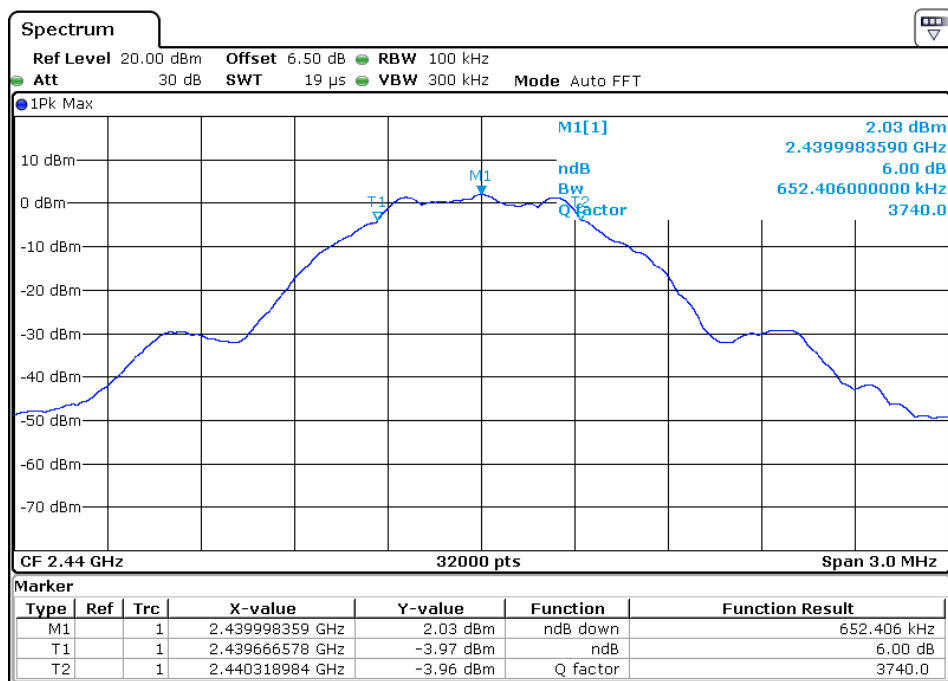

Modulation Standard: GFSK

Channel: 39

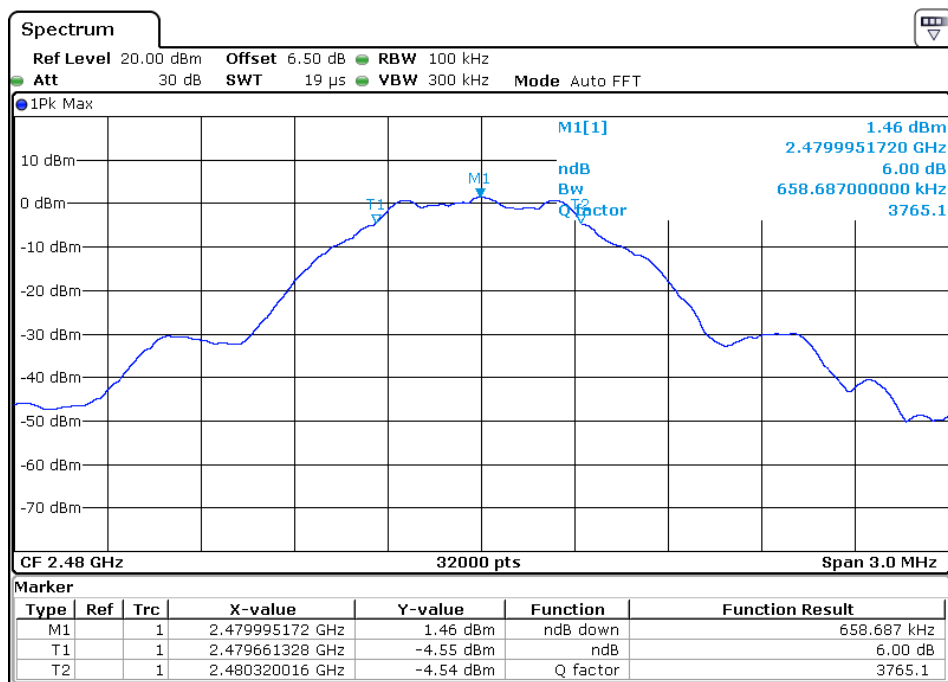



9. Maximum Peak Output Power

9.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

9.2 Test Procedures

- a. Peak power is measured using the wideband power meter.
- b. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.
- c. The Peak Output Power was measured and recorded.

9.3 Test Setup Layout





9.4 Test Result and Data

Test Date: Feb. 28, 2018

Temperature: 20°C

Atmospheric pressure: 1000 pha

Humidity: 55%

Modulation Standard	Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
GFSK	0	2402	2.73	1.87
	19	2440	2.20	1.66
	39	2480	1.57	1.44



10. Power Spectral Density


10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm

10.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

10.3 Test Setup Layout





10.4 Test Result and Data

Test Date: Feb. 28, 2018

Temperature: 20°C


Atmospheric pressure: 1000 pha

Humidity: 55%

Modulation Standard	Channel	Frequency (MHz)	Measured Power Density (dBm)
GFSK	0	2402	-12.78
	19	2440	-13.28
	39	2480	-13.84

Modulation Standard: GFSK


Channel: 0

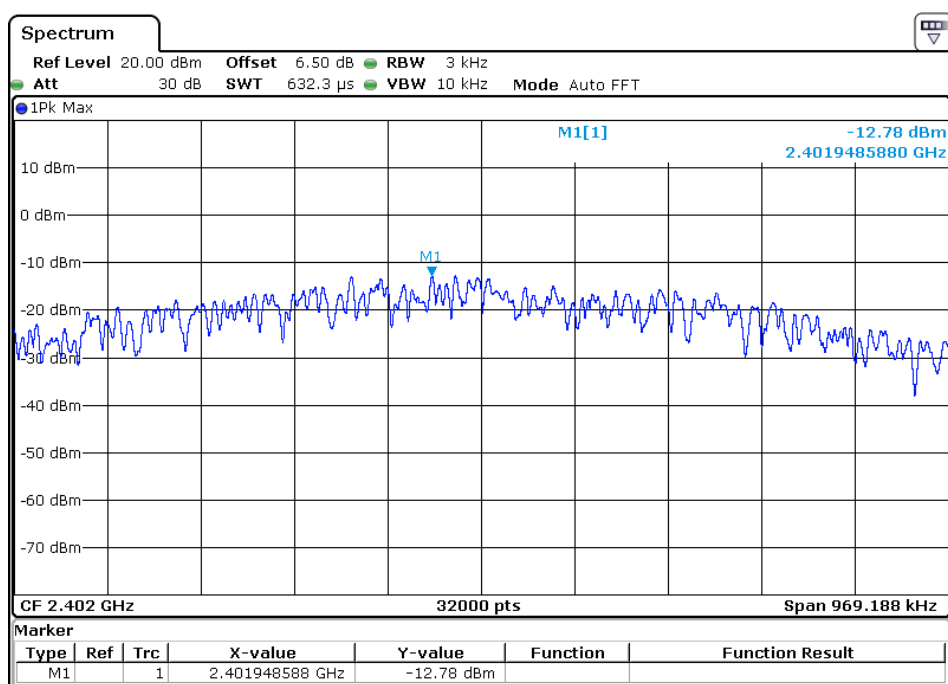




Modulation Standard: GFSK

Channel: 19

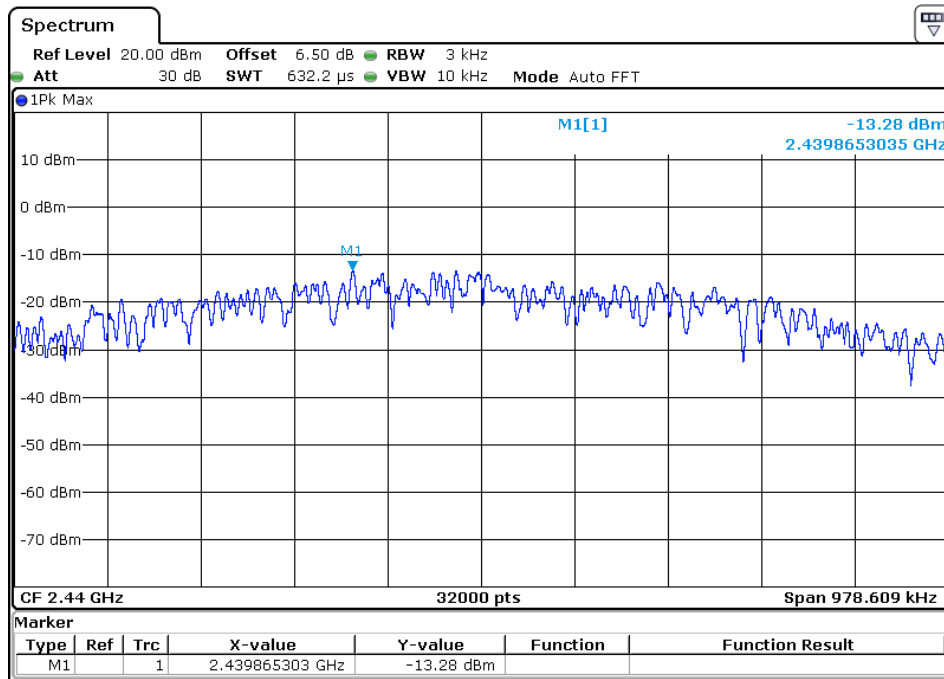

Modulation Standard: GFSK

Channel: 39

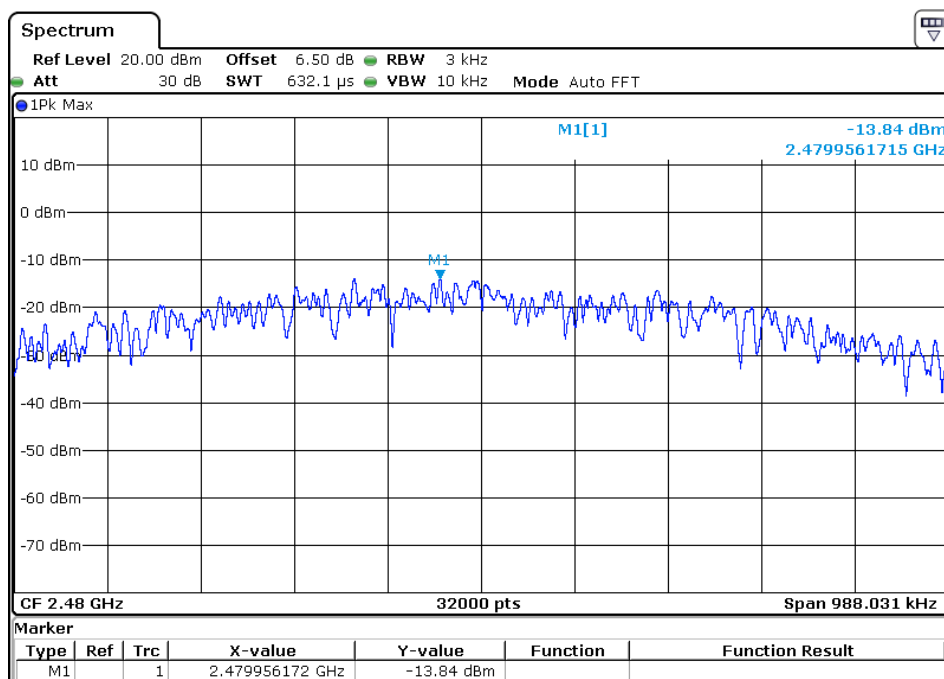



11. Band Edges Measurement


11.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

11.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

11.3 Test Setup Layout





11.4 Test Result and Data

Test Date: Jan. 18, 2018

Temperature: 20°C

Atmospheric pressure: 1000 pha


Humidity: 55%

Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value (dBm)
GFSK	0	2402	2400	-43.24
	39	2480	2483.500	-53.77




Modulation Standard: GFSK

Channel: 0

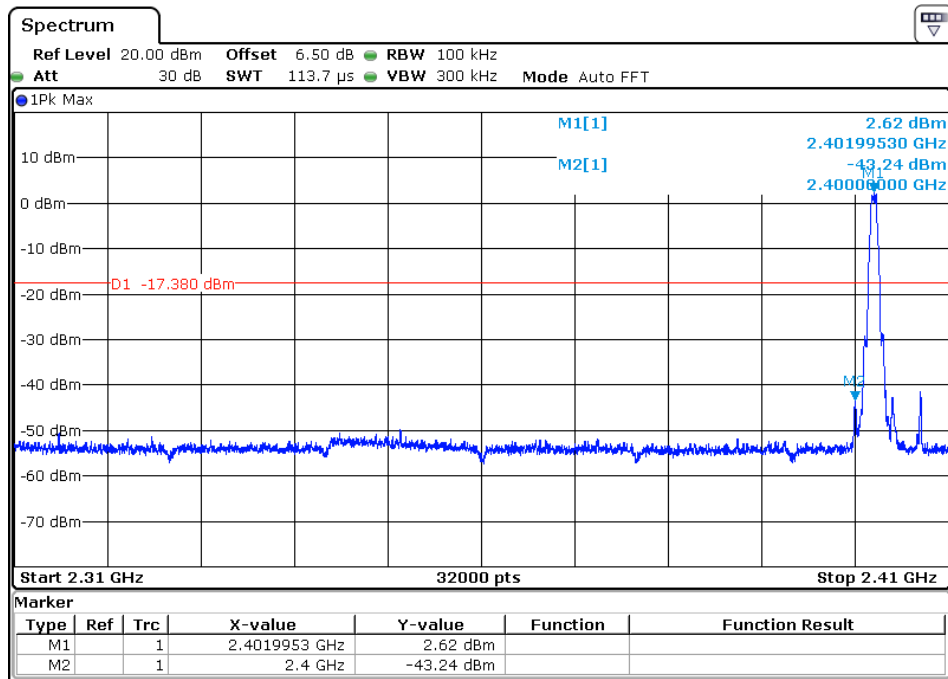

Modulation Standard: GFSK

Channel: 39

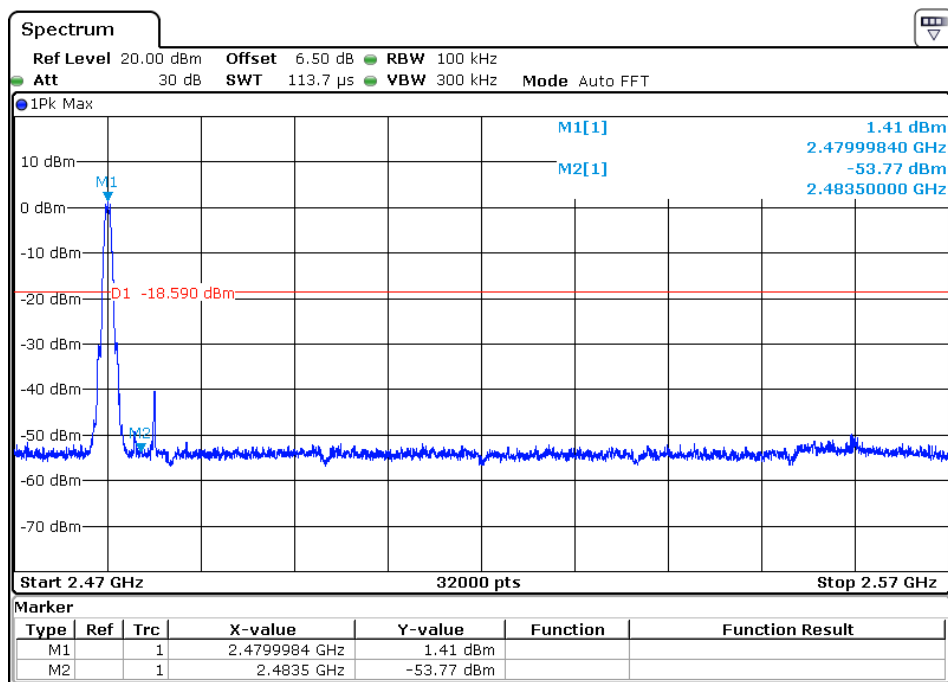



Restrict Band Emission Measurement Data

Power	:	AC 120V/60Hz	Pol/Phase	:	H/V
Test Mode 1	:	GFSK	Temperature	:	26 °C
Test Date	:	Jan. 18, 2018	Humidity	:	55 %

Channel 0						Fundamental Frequency:				
2402 MHz										
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2385.40	H	42.86	-5.81	37.05	Peak	74	54	-36.95	360	1.5
---	H	---	---	----	Ave	74	54	----	----	---
2384.93	V	41.99	-5.81	36.18	Peak	74	54	-37.82	181	1.5
---	V	---	----	----	Ave	74	54	----	----	---
Channel 39						Fundamental Frequency: 2480 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result (dBuV/m)	Remark	Limit (dBuV/m)		Margin (dB)	Table Deg.	Ant High (m)
						Peak	Ave			
2490.11	H	40.18	-4.92	35.26	Peak	74	54	-38.74	360	1.5
---	H	---	----	----	Ave	74	54	----	----	---
2490.17	V	40.90	-4.92	35.98	Peak	74	54	-38.02	182	1.5
---	V	---	----	----	Ave	74	54	----	----	---

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting:
1 MHz RBW with 1 MHz VBW (Peak Detector).
5. Measurements above 1000 MHz, Average detector setting:
1 MHz RBW with 10Hz VBW (PK Detector).
6. Peak detector measurement data will represent the worst case results.
7. Where limits are specified for both average and peak detector functions, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.



12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.