


FCC RADIO TEST REPORT

FCC ID : 2AOAG-3668
Equipment : Digital Media Receiver
Model Name : D9N29T
Applicant : Moxham L.L.C.
1320 Main Street Suite 300 Columbia, South Carolina, 29201
Standard : FCC Part 15 Subpart C §15.247

The test was completed on Jul. 05, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	5
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 Test Result.....	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement.....	26
3.3 Power Spectral Density Measurement	27
3.4 Conducted Band Edges and Spurious Emission Measurement	40
3.5 Radiated Band Edges and Spurious Emission Measurement	57
3.6 AC Conducted Emission Measurement.....	61
3.7 Antenna Requirements.....	63
4 List of Measuring Equipment	64
5 Uncertainty of Evaluation.....	66
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR831509-01B	01	Initial issue of report	Jul. 13, 2018

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.247(a)(2)	6dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.247(b)(3)	Peak Output Power	Pass
3.3	15.247(e)	Power Spectral Density	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass
3.6	15.207	AC Conducted Emission	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass

Reviewed by: Joseph Lin

Report Producer: Maggie Chiang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	D9N29T
FCC ID	2AOAG-3668
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<Ant. 1> 6.34 dBm (0.0043 W) <Ant. 2> 6.89 dBm (0.0049 W)
99% Occupied Bandwidth	2.072MHz
Antenna Type / Gain	<Ant. 1> Fixed Internal Antenna type with gain 3.30 dBi <Ant. 2> Fixed Internal Antenna type with gain 3.30 dBi
Type of Modulation	Bluetooth LE : GFSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH05-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

The RF output power was recorded in the following table:

<For Antenna 1>

Channel	Frequency	Bluetooth – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	5.17 dBm
Ch19	2440MHz	5.91 dBm
Ch39	2480MHz	6.26 dBm

Channel	Frequency	Bluetooth – LE RF Output Power
		Data Rate / Modulation
		GFSK
		2Mbps
Ch00	2402MHz	5.21 dBm
Ch19	2440MHz	5.86 dBm
Ch39	2480MHz	6.34 dBm

<For Antenna 2>

Channel	Frequency	Bluetooth – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	6.46 dBm
Ch19	2440MHz	6.85 dBm
Ch39	2480MHz	6.89 dBm

Channel	Frequency	Bluetooth – LE RF Output Power
		Data Rate / Modulation
		GFSK
		2Mbps
Ch00	2402MHz	6.60 dBm
Ch19	2440MHz	6.82 dBm
Ch39	2480MHz	6.88 dBm


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Play News + Charging from Adapter
	Mode 2: Bluetooth Link + Play MP3 + Charging from Adapter
Remark: The worst case of conducted emission is mode 2; only the test data of it was reported.	


2.3 Connection Diagram of Test System

<Bluetooth – LE Tx Mode>

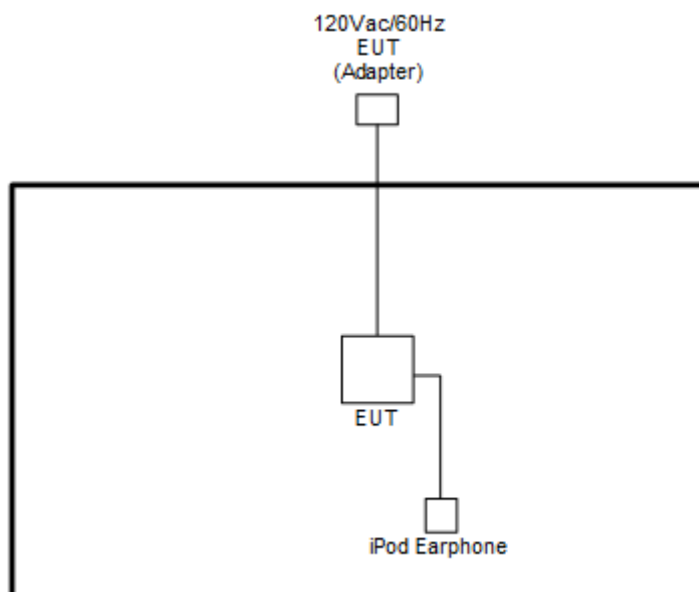

<AC Conducted Emission Mode for Notebook Playing News>

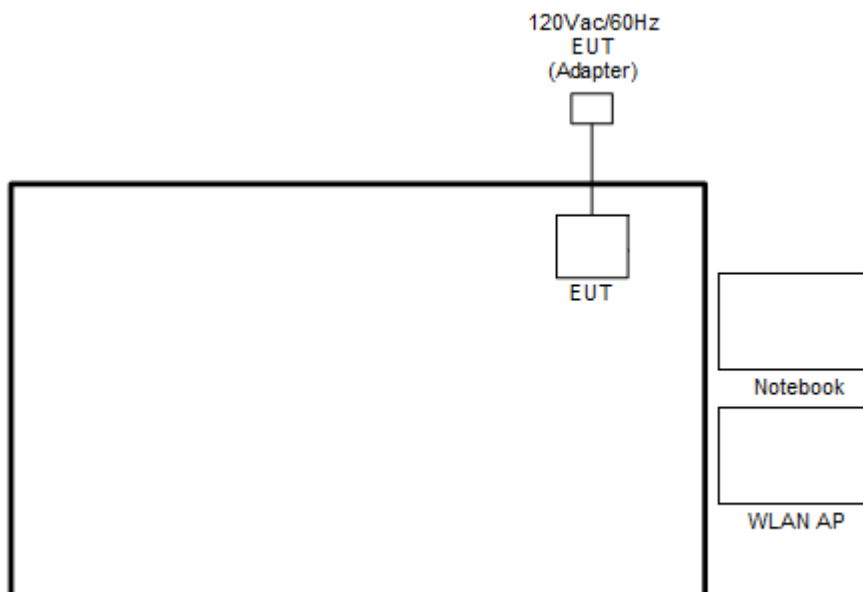
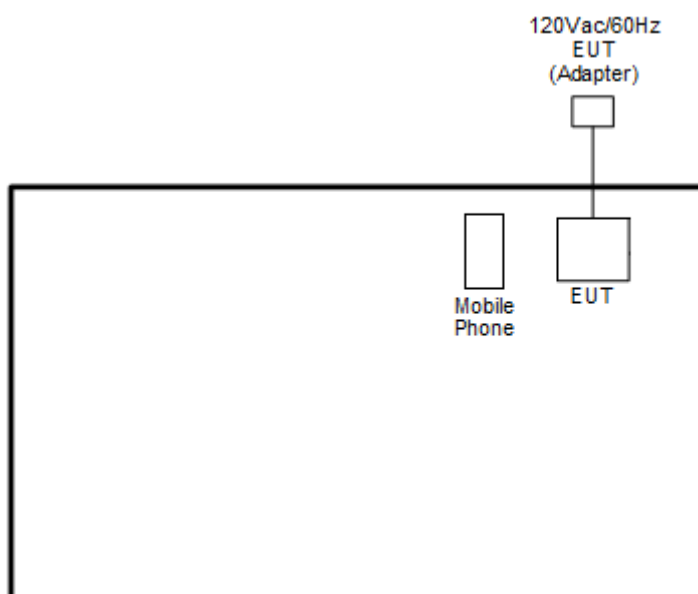
<AC Conducted Emission Mode for Mobile Phone Playing MP3>

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Smart Phone	Acer	Z530	HLZDMZ530	N/A	N/A
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tool” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

<Antenna 1>


<1Mbps>

6 dB Bandwidth Plot on Channel 00

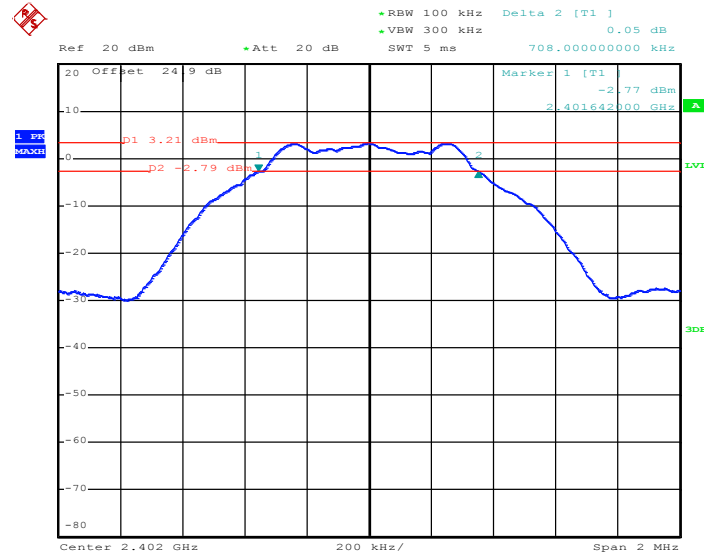

Date: 29.JUN.2018 01:41:52


6 dB Bandwidth Plot on Channel 19

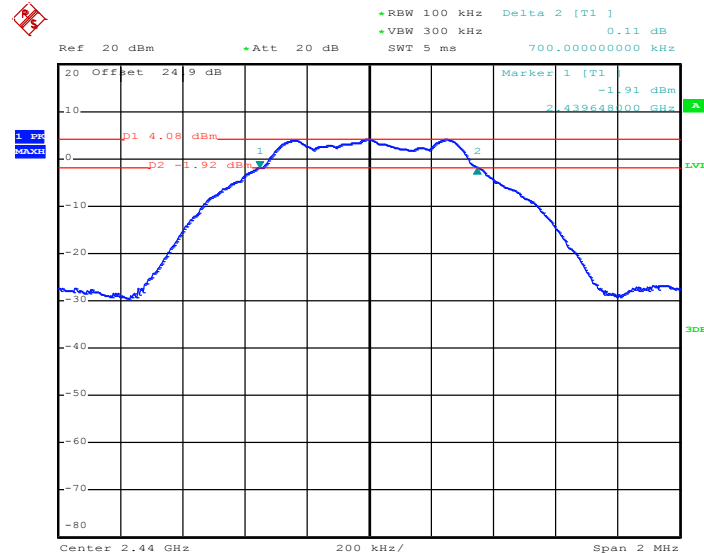

Date: 29.JUN.2018 01:47:08




6 dB Bandwidth Plot on Channel 39

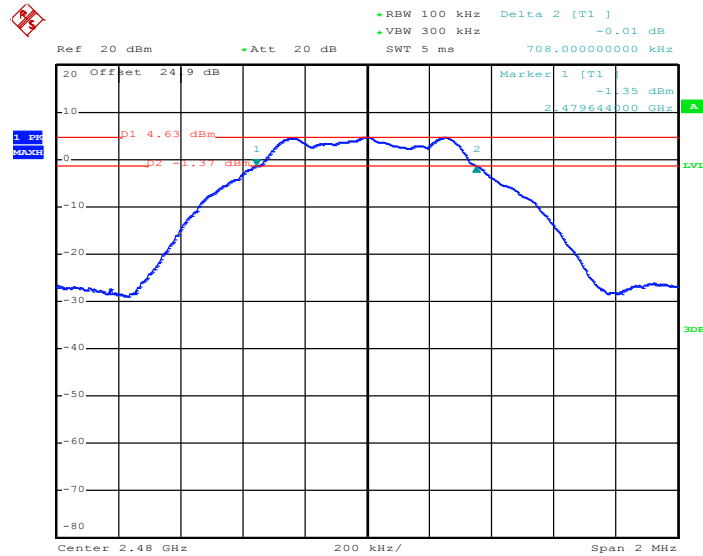

Date: 29.JUN.2018 01:57:24

<2Mbps>


6 dB Bandwidth Plot on Channel 00

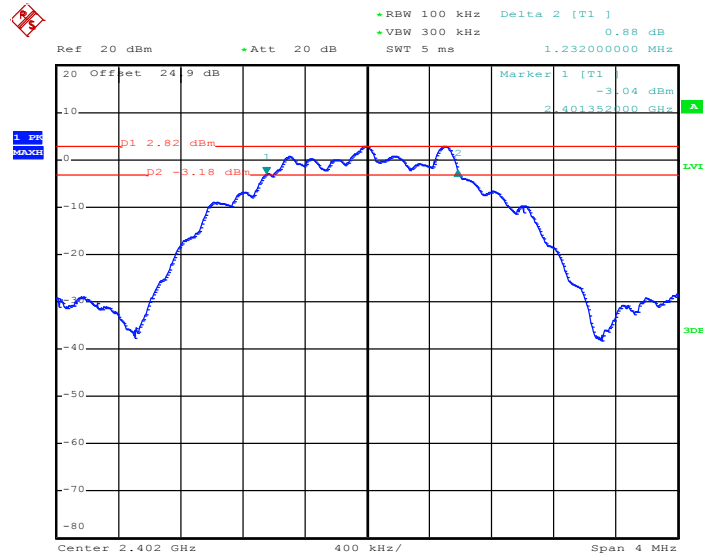

Date: 29.JUN.2018 02:04:18




6 dB Bandwidth Plot on Channel 19

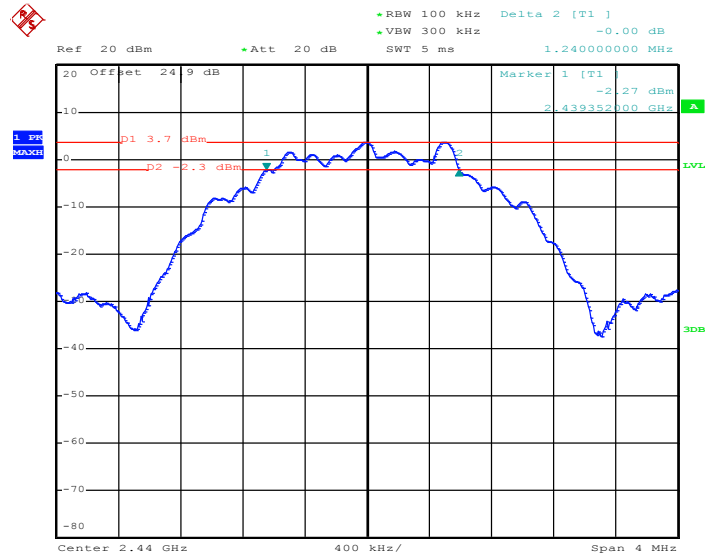

Date: 29.JUN.2018 02:11:47

6 dB Bandwidth Plot on Channel 39

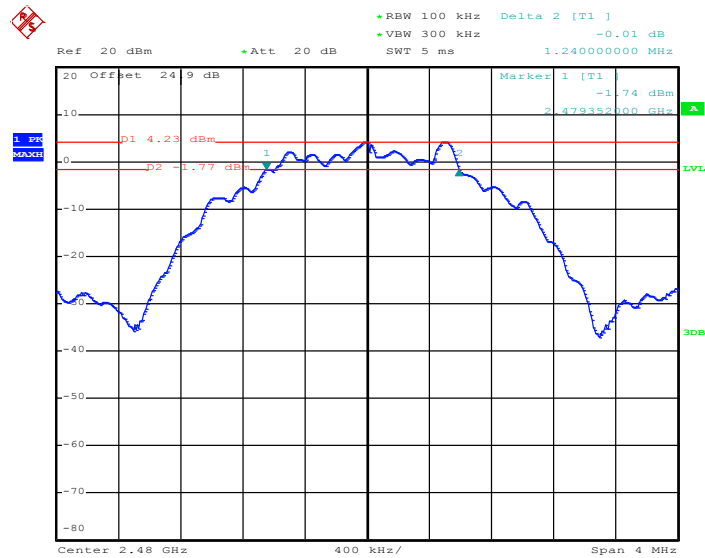


Date: 29.JUN.2018 02:17:04



<Antenna 2>


<1Mbps>

6 dB Bandwidth Plot on Channel 00

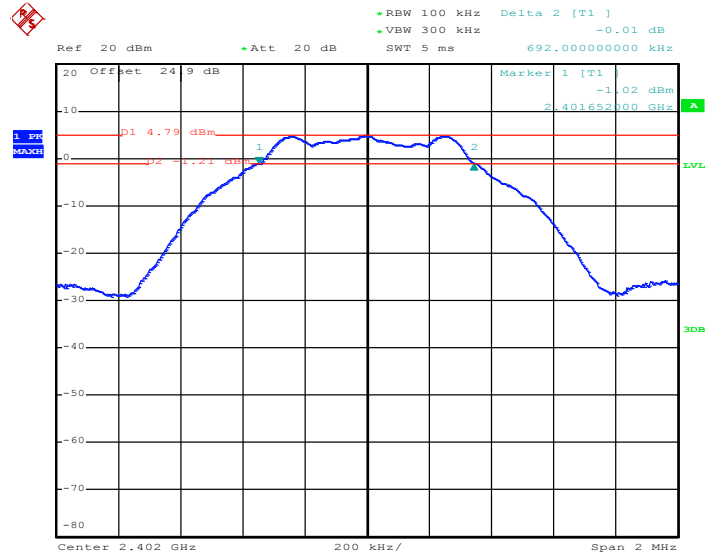

Date: 4.JUL.2018 05:53:23


6 dB Bandwidth Plot on Channel 19

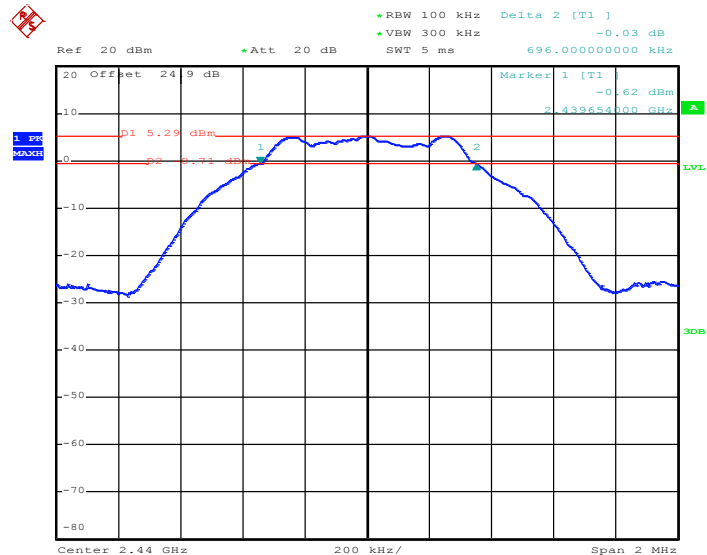

Date: 29.JUN.2018 02:49:18




6 dB Bandwidth Plot on Channel 39

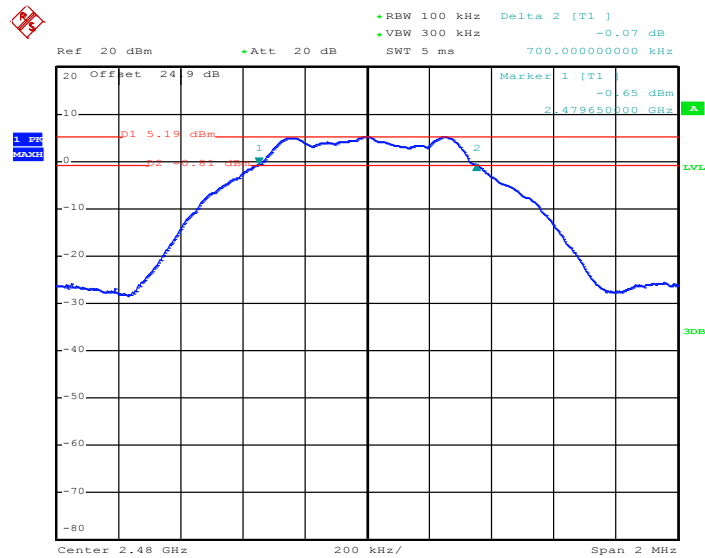

Date: 29.JUN.2018 02:54:46

<2Mbps>


6 dB Bandwidth Plot on Channel 00

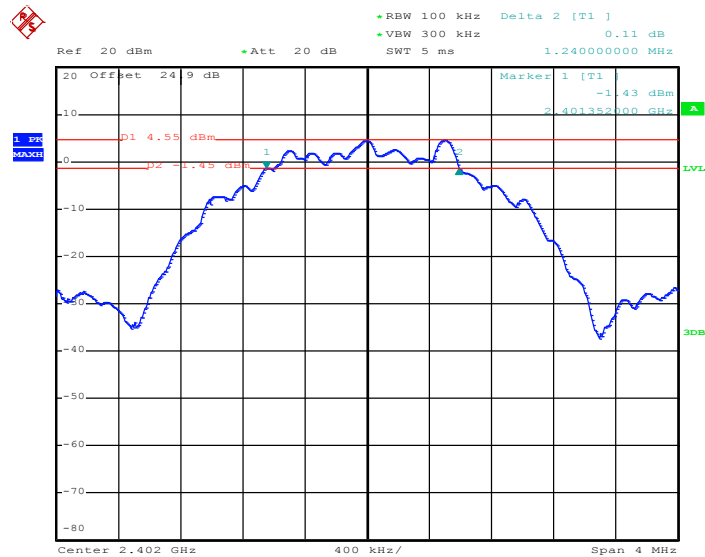

Date: 29.JUN.2018 02:59:52




6 dB Bandwidth Plot on Channel 19

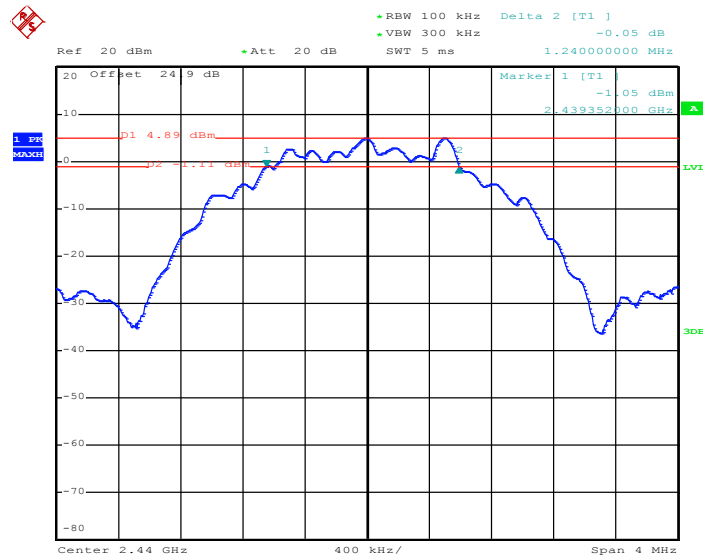

Date: 29.JUN.2018 03:07:50

6 dB Bandwidth Plot on Channel 39

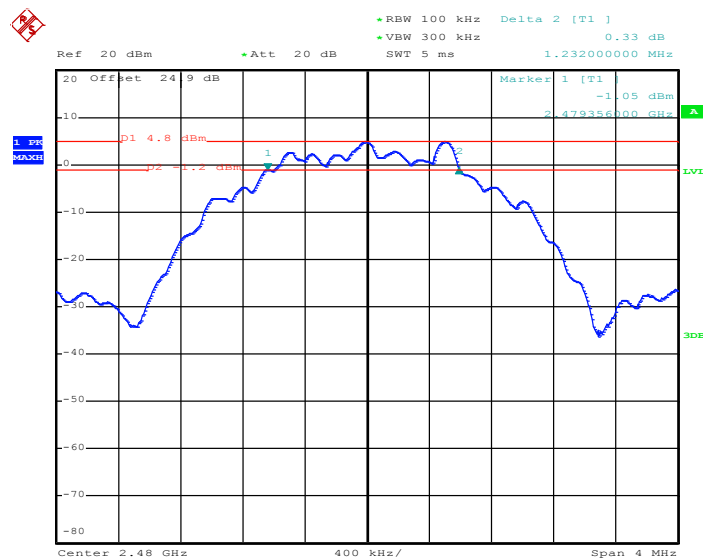

Date: 29.JUN.2018 03:21:00




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<Antenna 1>


<1Mbps>

99% Bandwidth Plot on Channel 00

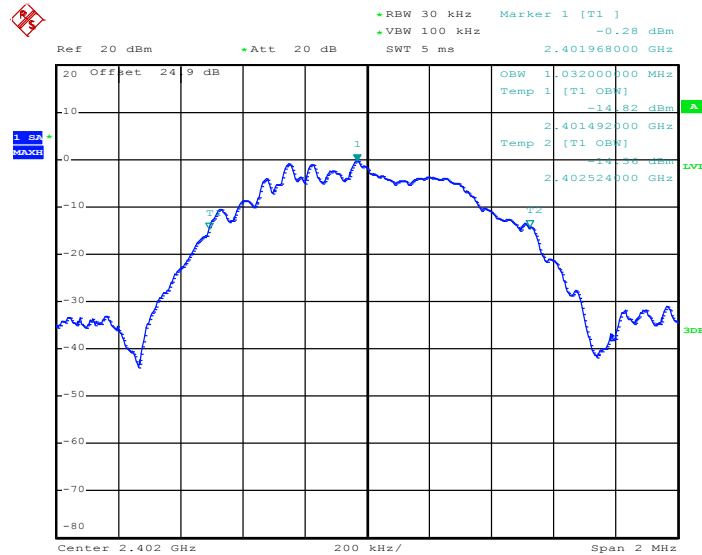

Date: 29.JUN.2018 01:44:01


99% Occupied Bandwidth Plot on Channel 19

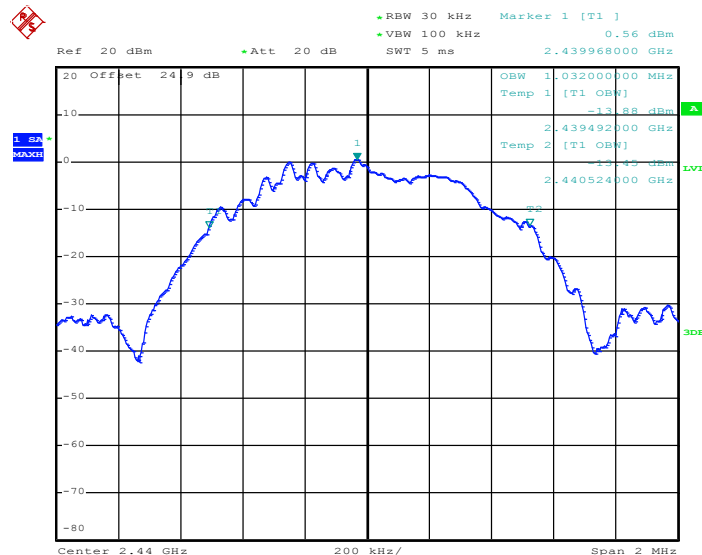

Date: 29.JUN.2018 01:53:44




99% Occupied Bandwidth Plot on Channel 39

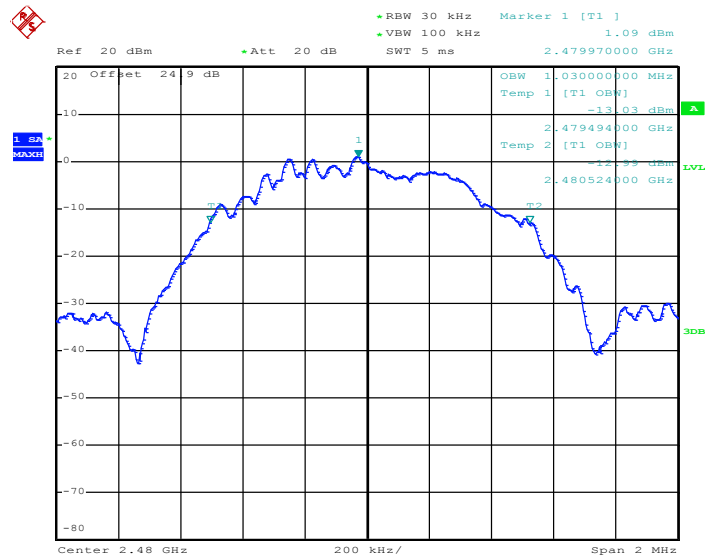

Date: 29.JUN.2018 01:59:36

<2Mbps>


99% Bandwidth Plot on Channel 00

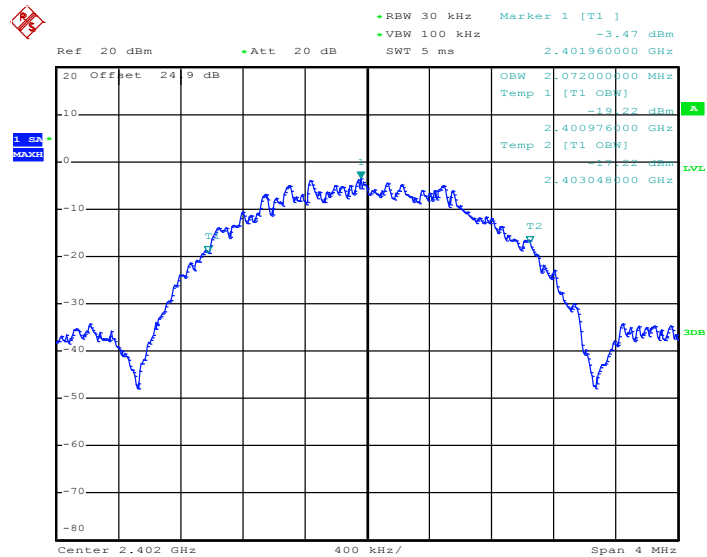

Date: 29.JUN.2018 02:07:48




99% Occupied Bandwidth Plot on Channel 19

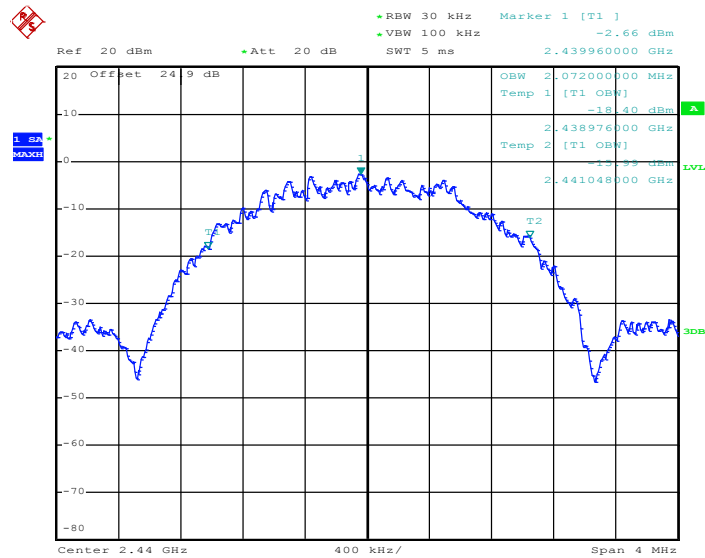

Date: 29.JUN.2018 02:14:11

99% Occupied Bandwidth Plot on Channel 39

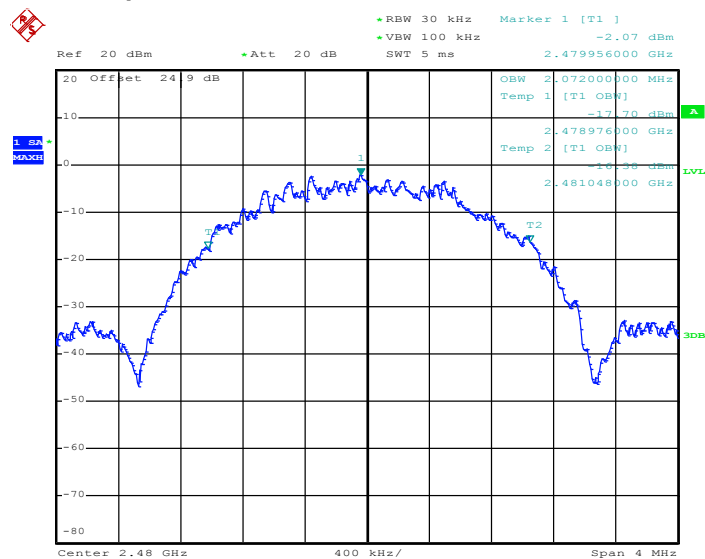


Date: 29.JUN.2018 02:20:06

<Antenna 2>


<1Mbps>

99% Bandwidth Plot on Channel 00

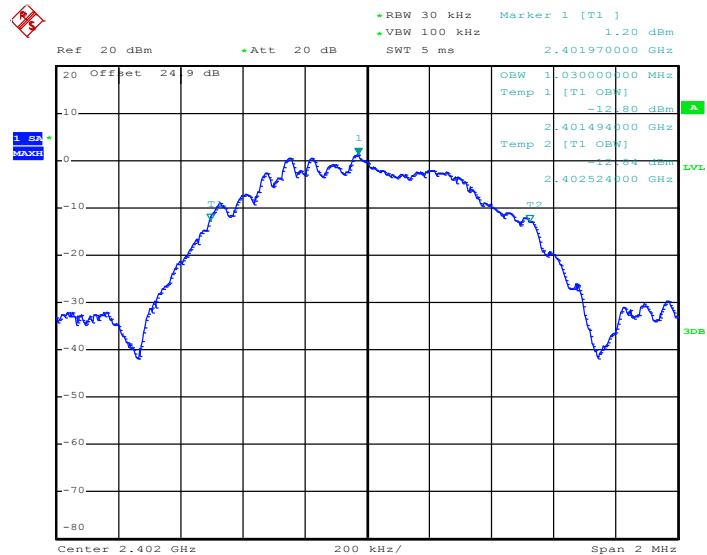

Date: 4.JUL.2018 05:57:27


99% Occupied Bandwidth Plot on Channel 19

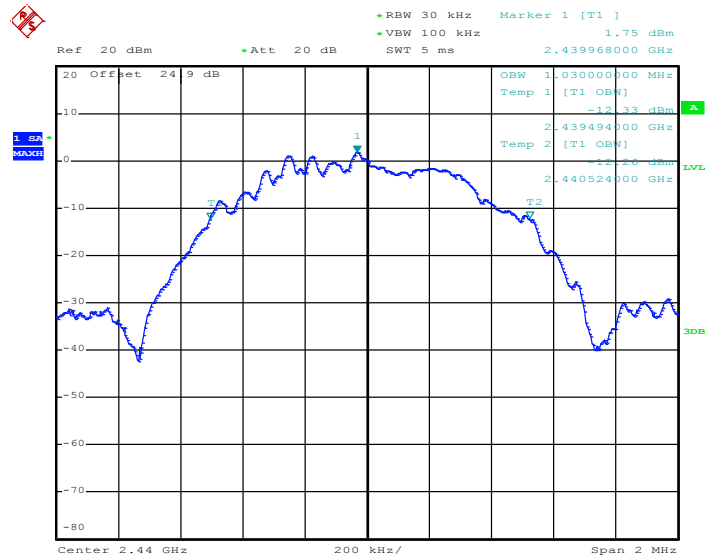

Date: 29.JUN.2018 02:51:29




99% Occupied Bandwidth Plot on Channel 39

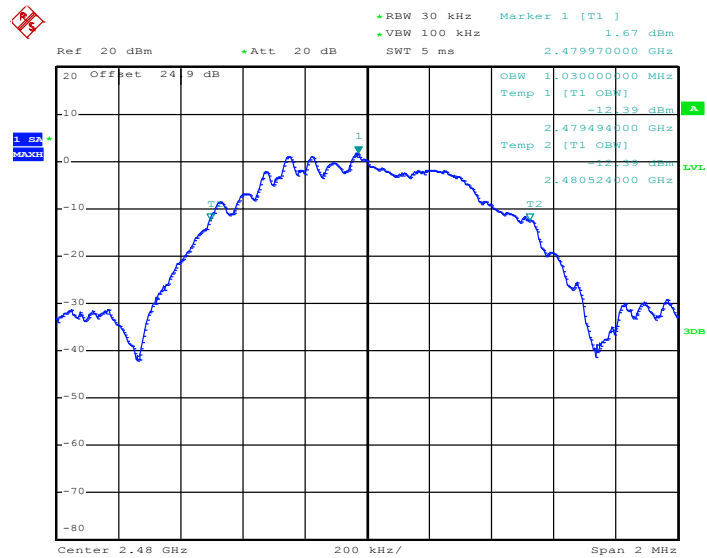

Date: 29.JUN.2018 02:56:24

<2Mbps>


99% Bandwidth Plot on Channel 00

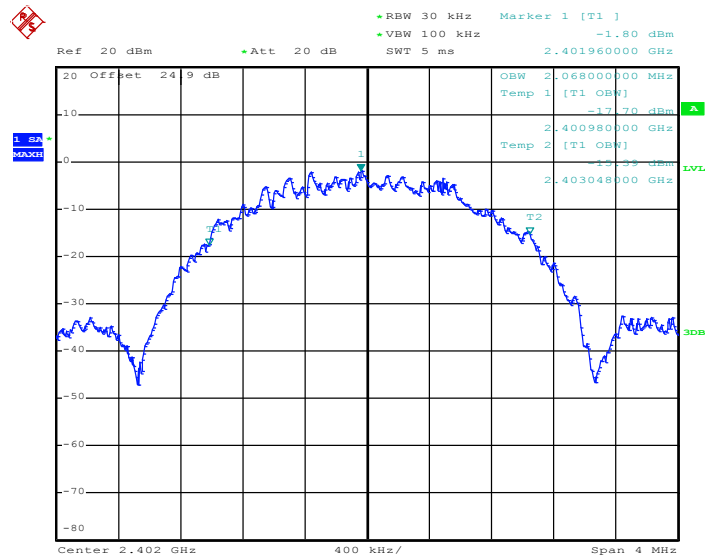

Date: 29.JUN.2018 03:03:54




99% Occupied Bandwidth Plot on Channel 19

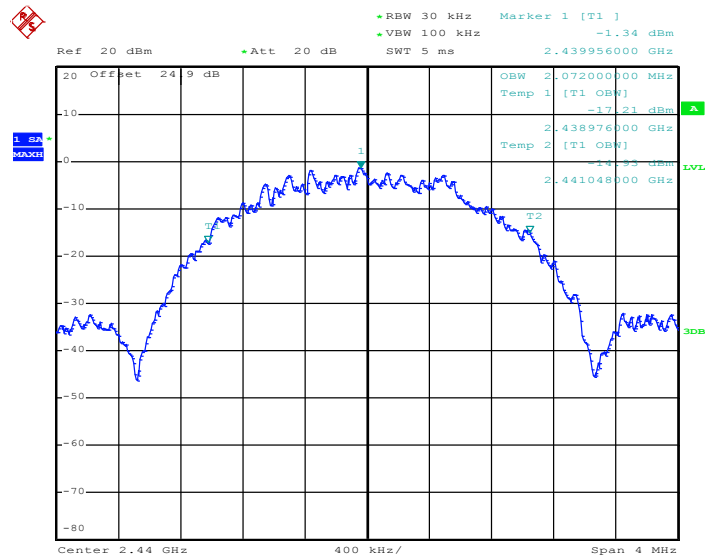

Date: 29.JUN.2018 03:11:26

99% Occupied Bandwidth Plot on Channel 39

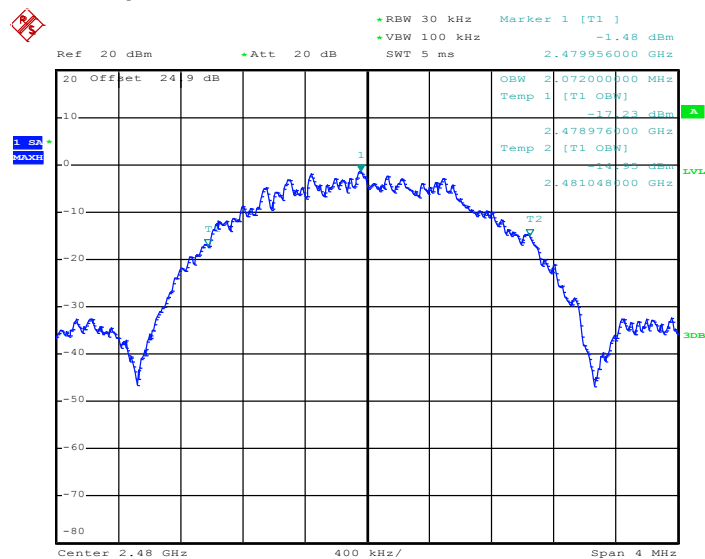

Date: 29.JUN.2018 03:27:46

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. For Average Power, the testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.2.3.2 Method AVGPM-G.
3. The RF output of EUT was connected to the power meter by RF cable and attenuator.
4. The path loss was compensated to the results for each measurement.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

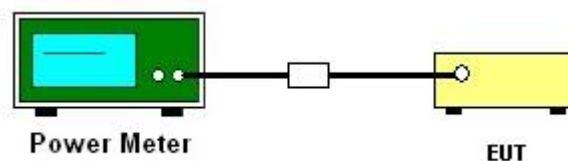

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

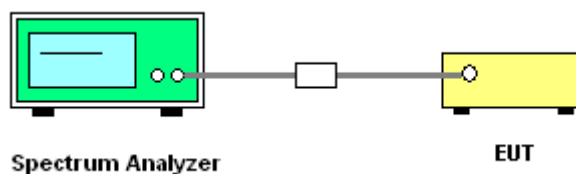

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<Antenna 1>


<1Mbps>

PSD 100kHz Plot on Channel 00

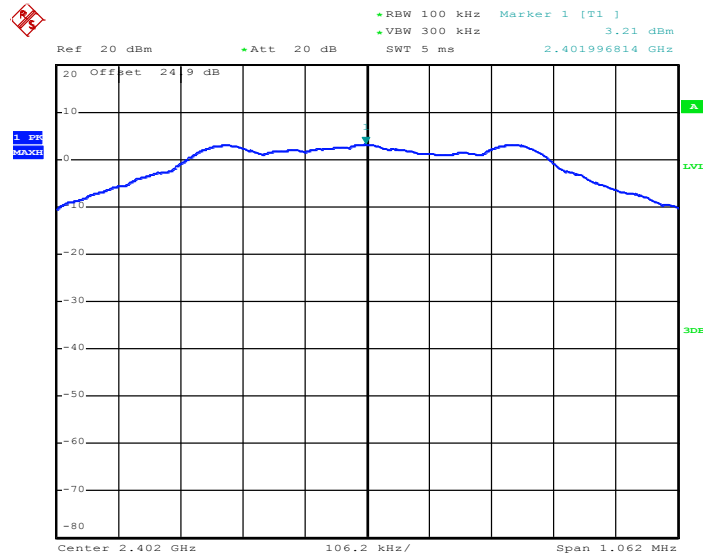

Date: 29.JUN.2018 01:42:33


PSD 100kHz Plot on Channel 19

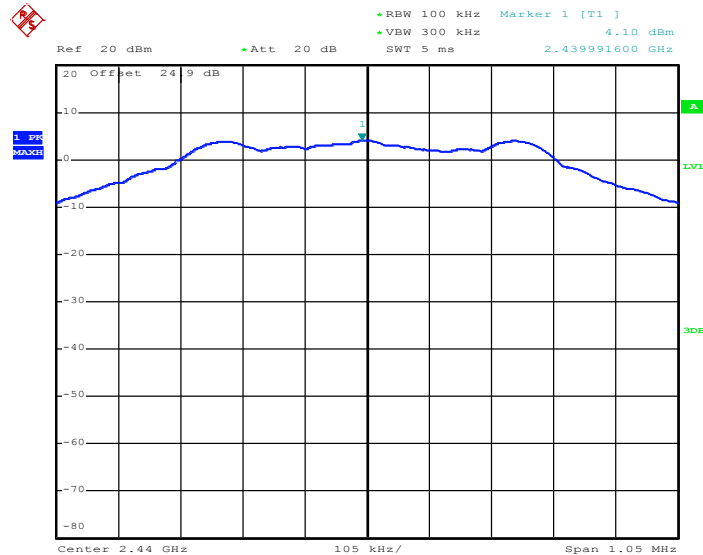

Date: 29.JUN.2018 01:51:16




PSD 100kHz Plot on Channel 39

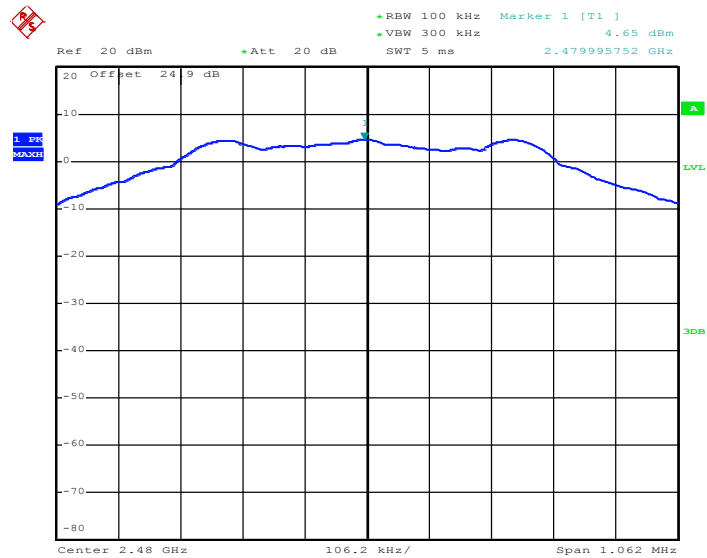

Date: 29.JUN.2018 01:58:16

<2Mbps>


PSD 100kHz Plot on Channel 00

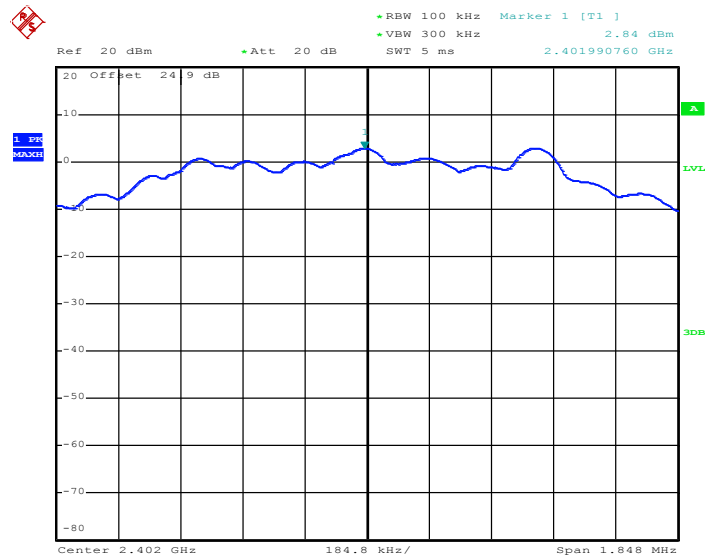

Date: 29.JUN.2018 02:06:11




PSD 100kHz Plot on Channel 19

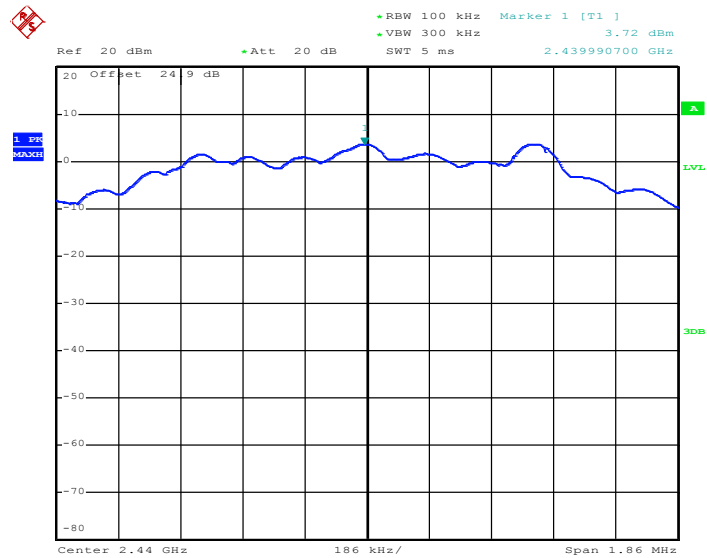

Date: 29.JUN.2018 02:12:56

PSD 100kHz Plot on Channel 39

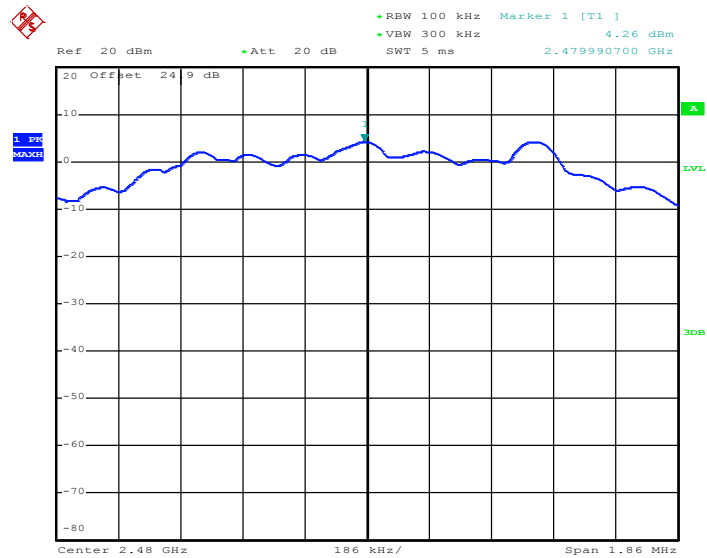


Date: 29.JUN.2018 02:18:24



<Antenna 2>


<1Mbps>

PSD 100kHz Plot on Channel 00

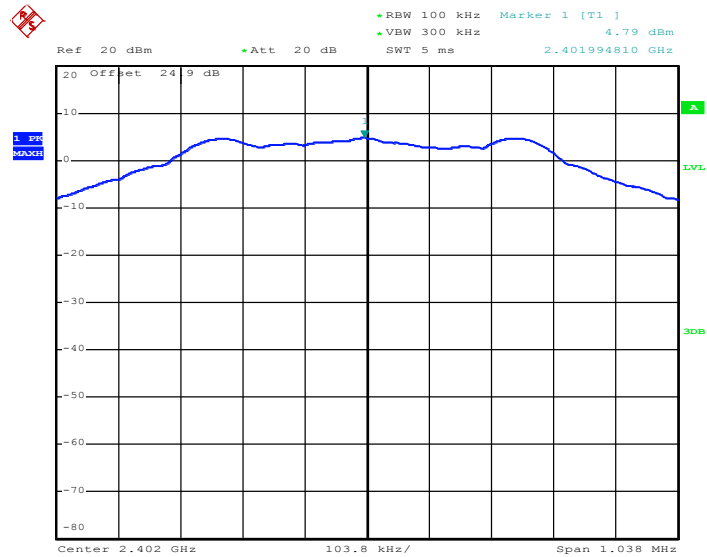

Date: 4.JUL.2018 05:54:59


PSD 100kHz Plot on Channel 19

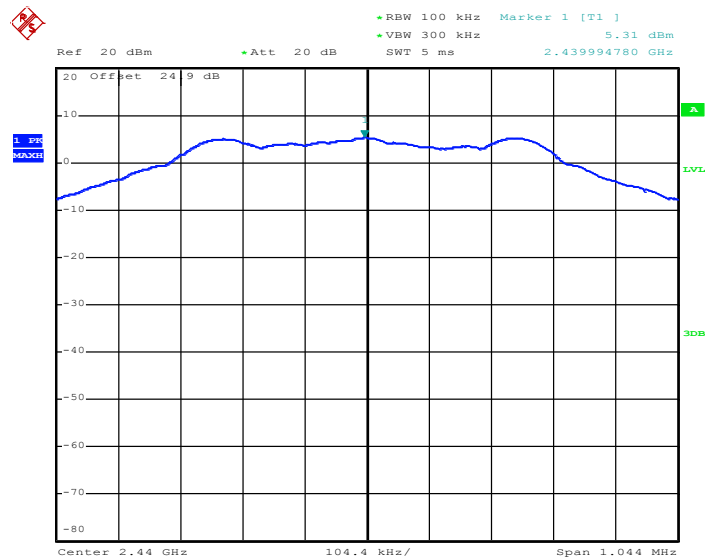

Date: 29.JUN.2018 02:50:14




PSD 100kHz Plot on Channel 39

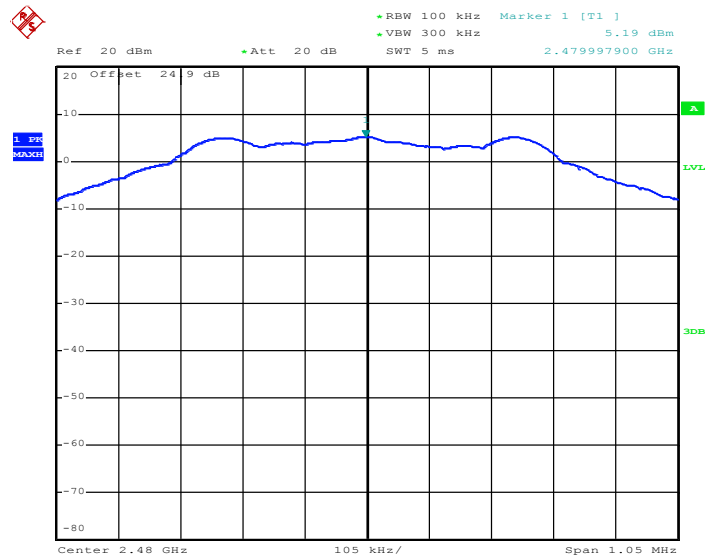

Date: 29.JUN.2018 02:55:23

<2Mbps>


PSD 100kHz Plot on Channel 00

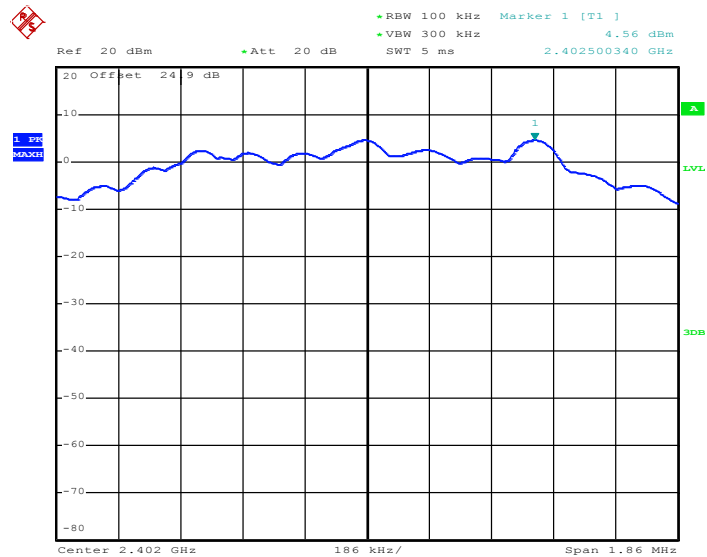

Date: 29.JUN.2018 03:02:10




PSD 100kHz Plot on Channel 19

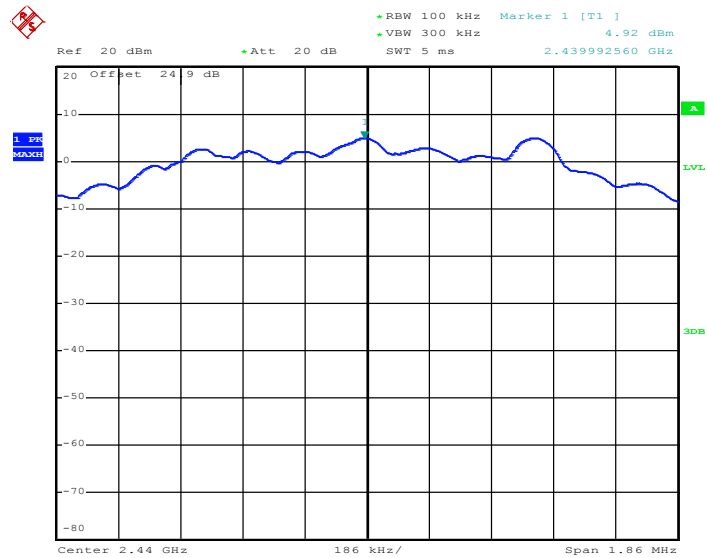

Date: 29.JUN.2018 03:08:59

PSD 100kHz Plot on Channel 39

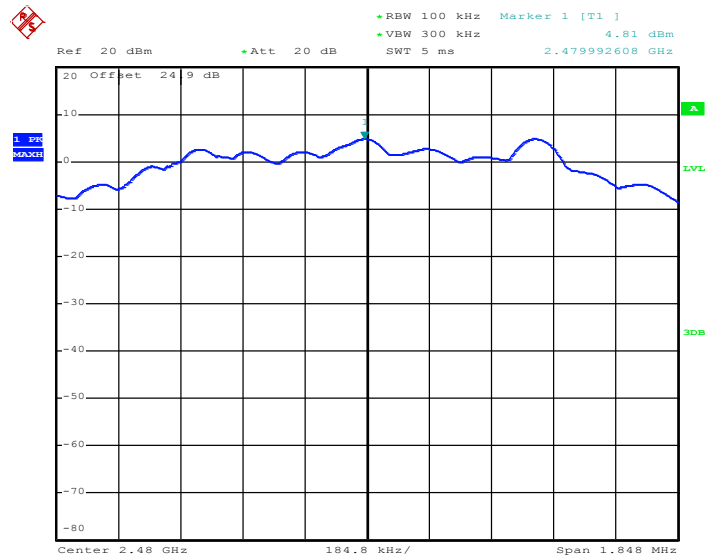

Date: 29.JUN.2018 03:24:31




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<Antenna 1>


<1Mbps>

PSD 3kHz Plot on Channel 00

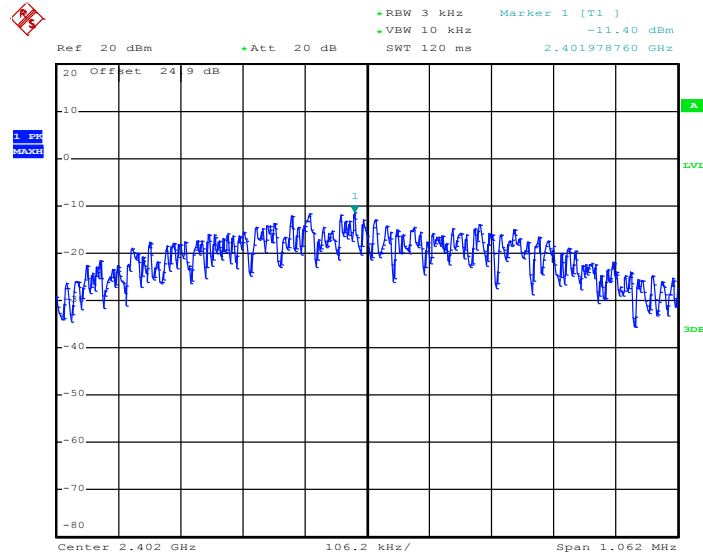

Date: 29.JUN.2018 01:42:10


PSD 3kHz Plot on Channel 19

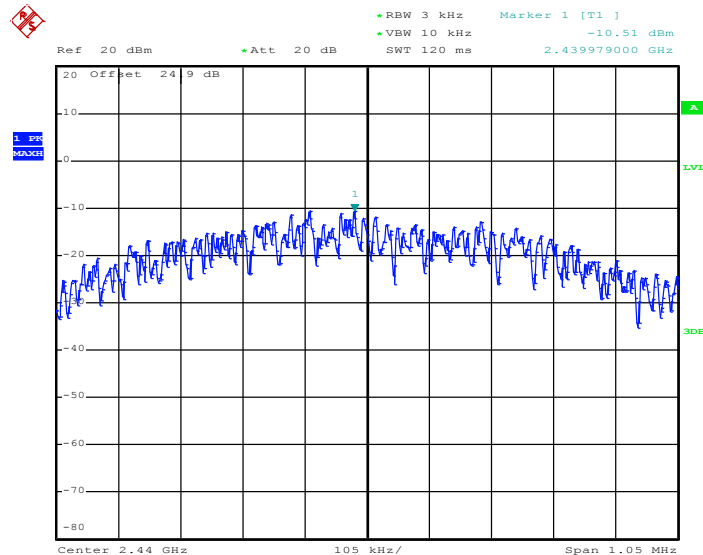

Date: 29.JUN.2018 01:50:57




PSD 3kHz Plot on Channel 39

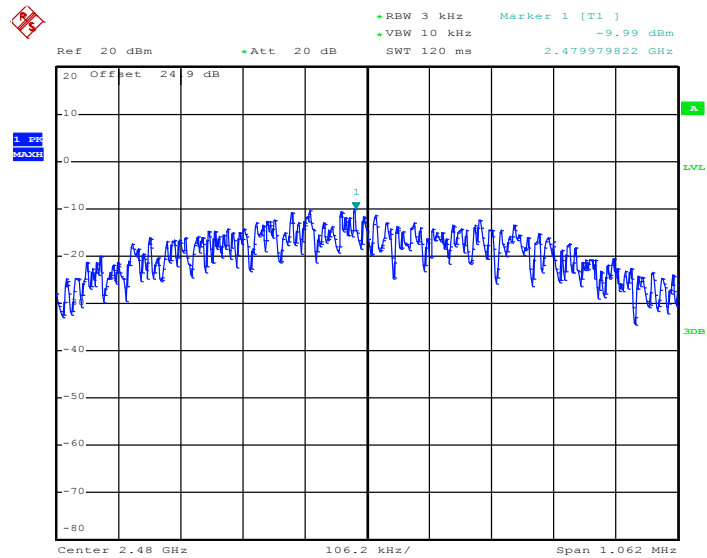

Date: 29.JUN.2018 01:57:45

<2Mbps>


PSD 3kHz Plot on Channel 00

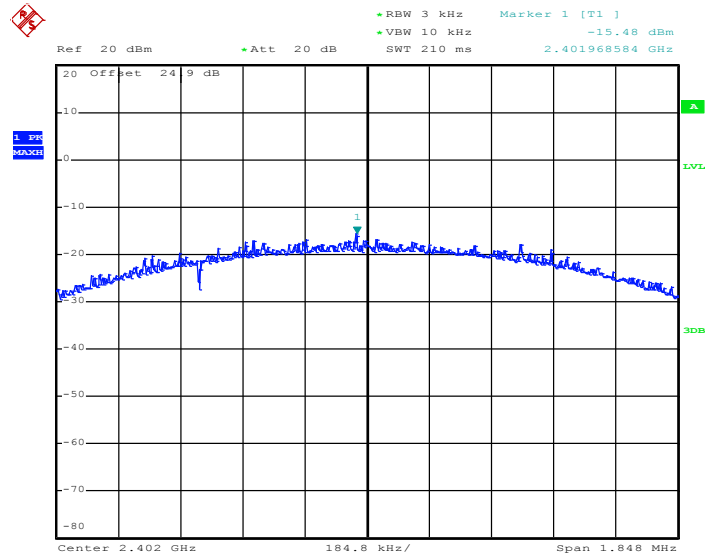

Date: 29.JUN.2018 02:05:29




PSD 3kHz Plot on Channel 19

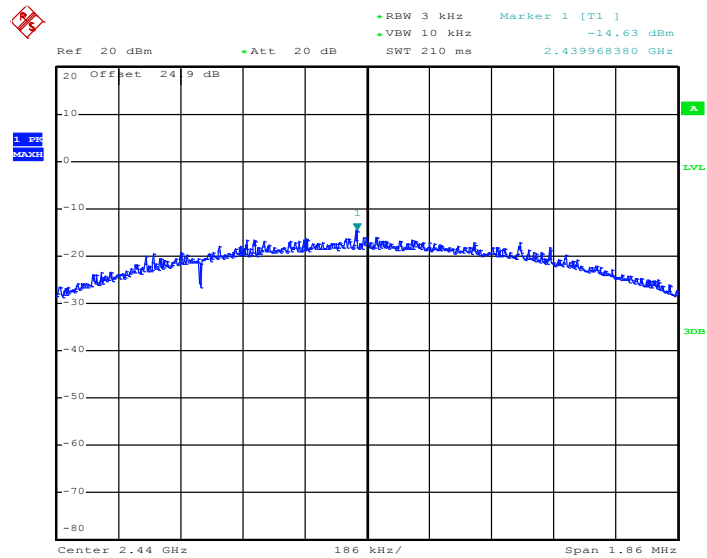

Date: 29.JUN.2018 02:12:15

PSD 3kHz Plot on Channel 39

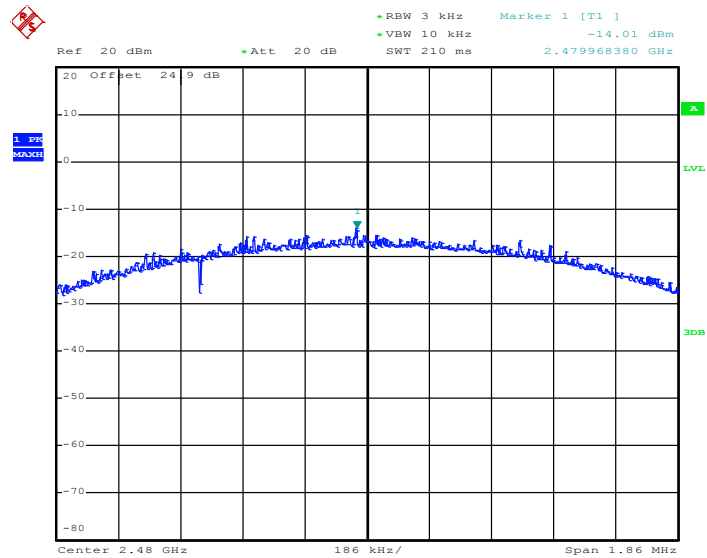


Date: 29.JUN.2018 02:17:30



<Antenna 2>


<1Mbps>

PSD 3kHz Plot on Channel 00

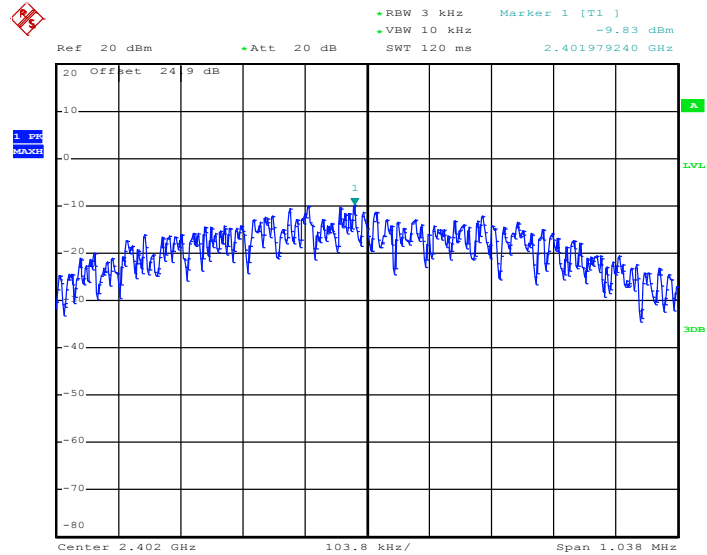

Date: 4.JUL.2018 05:54:29


PSD 3kHz Plot on Channel 19

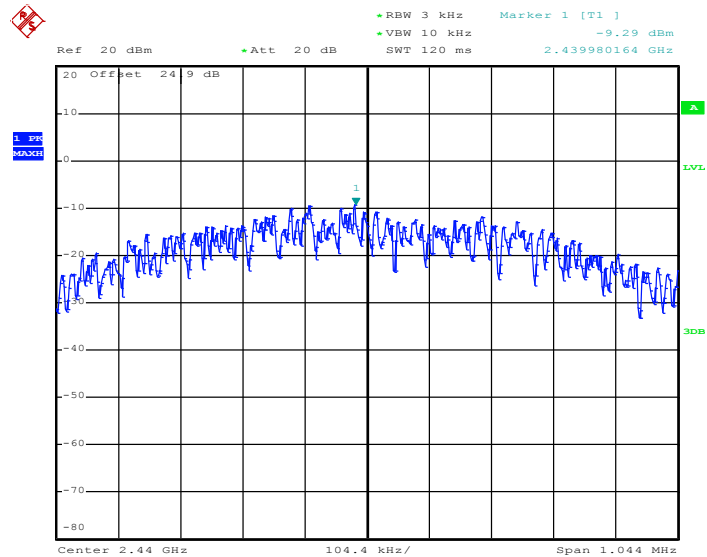

Date: 29.JUN.2018 02:49:51




PSD 3kHz Plot on Channel 39

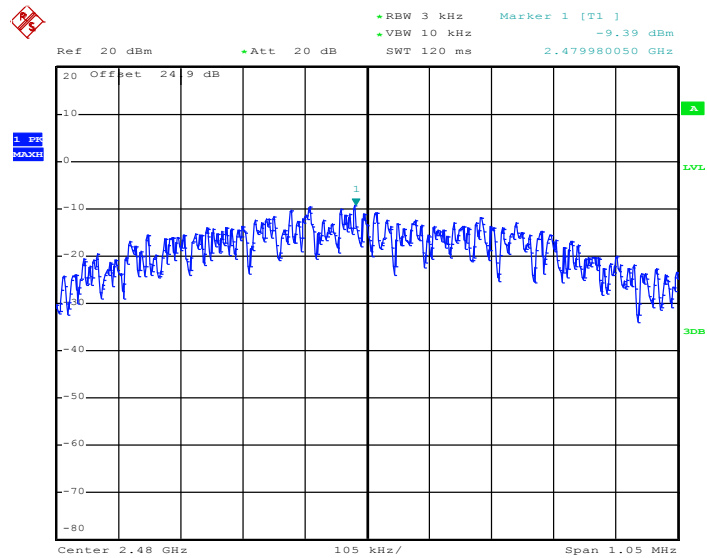

Date: 29.JUN.2018 02:55:07

<2Mbps>


PSD 3kHz Plot on Channel 00

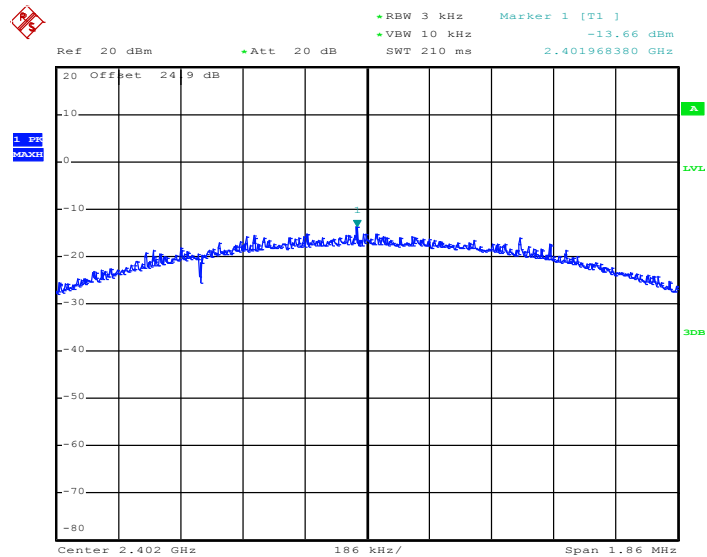

Date: 29.JUN.2018 03:00:13




PSD 3kHz Plot on Channel 19

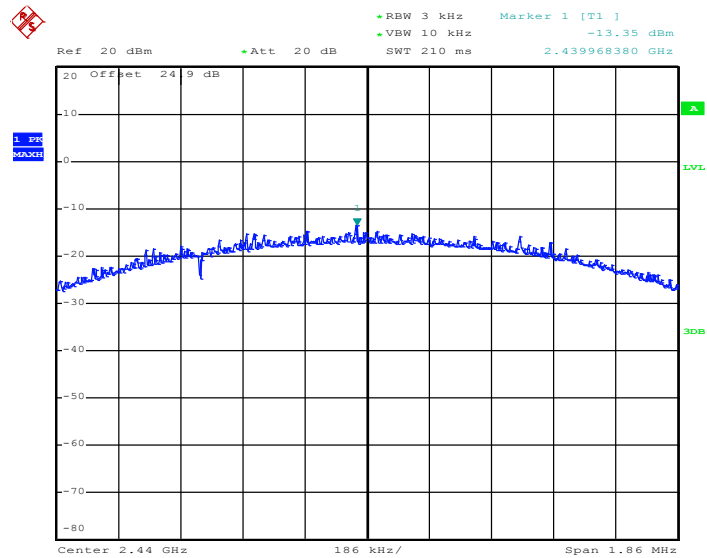

Date: 29.JUN.2018 03:08:16

PSD 3kHz Plot on Channel 39

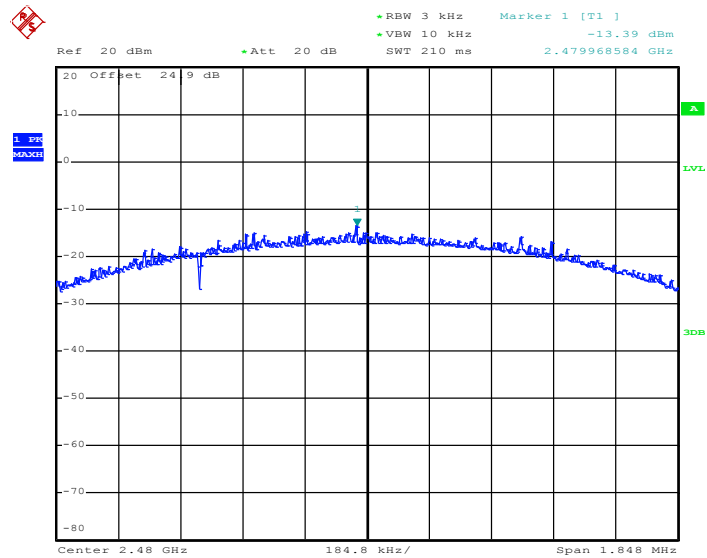

Date: 29.JUN.2018 03:22:58

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

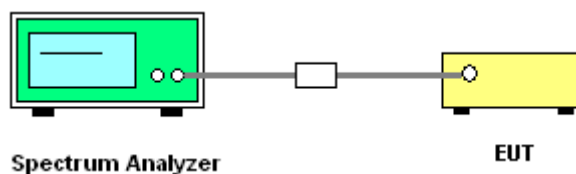


3.4.5 Test Result of Conducted Band Edges Plots

<Antenna 1>


<1Mbps>

Low Band Edge Plot on Channel 00

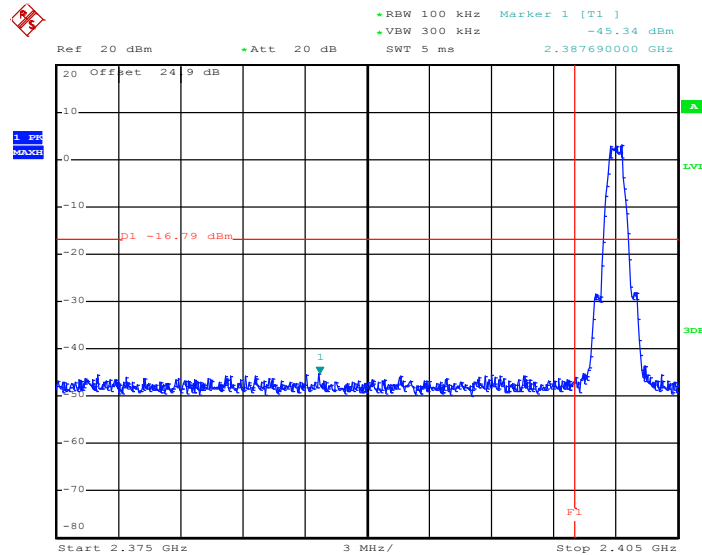

Date: 29.JUN.2018 01:42:51

High Band Edge Plot on Channel 39

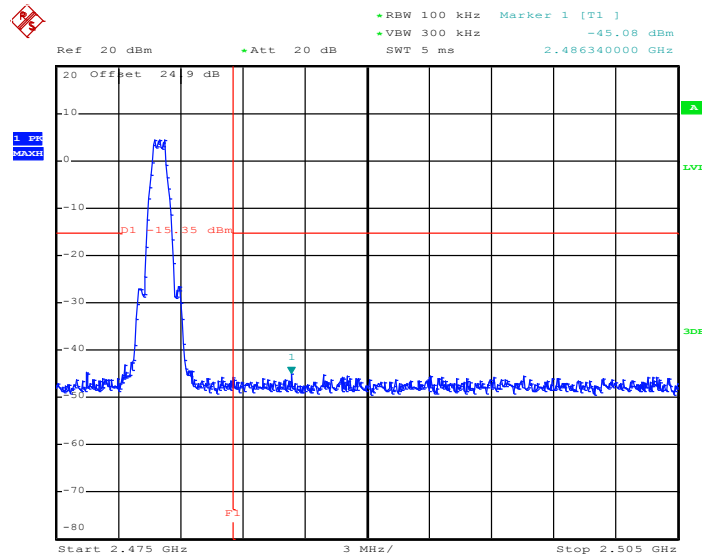


Date: 29.JUN.2018 01:58:35




<2Mbps>

Low Band Edge Plot on Channel 00

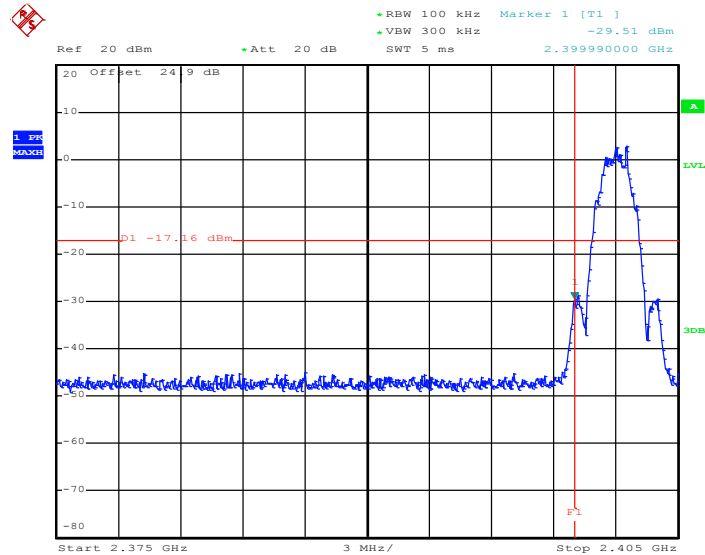

Date: 29.JUN.2018 02:06:35

High Band Edge Plot on Channel 39

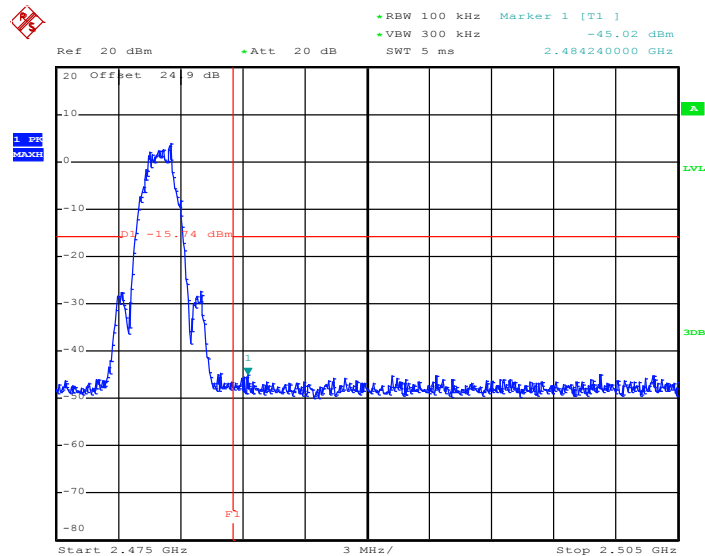


Date: 29.JUN.2018 02:19:12



<Antenna 2>


<1Mbps>

Low Band Edge Plot on Channel 00

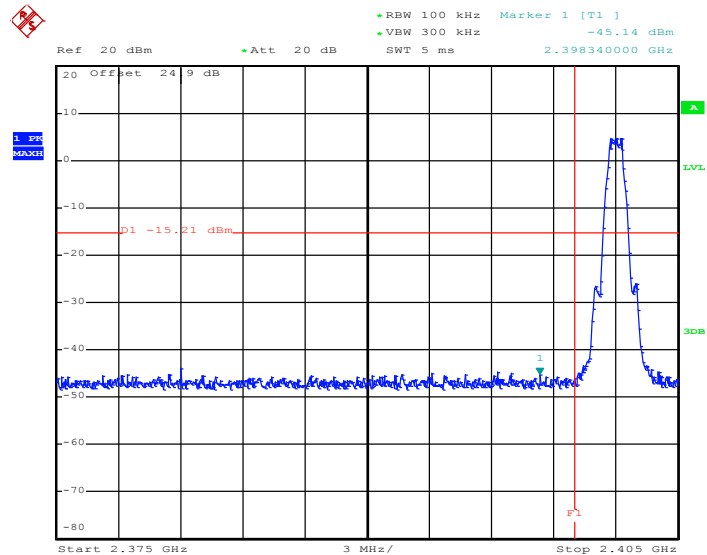

Date: 4.JUL.2018 05:55:41

High Band Edge Plot on Channel 39

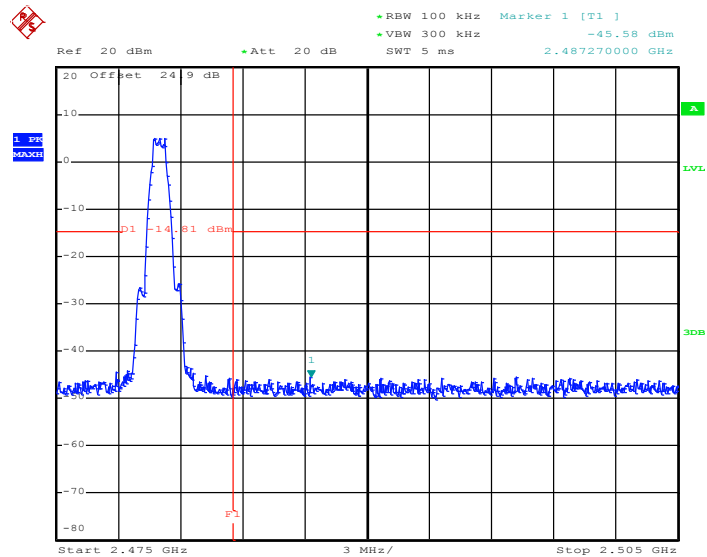


Date: 29.JUN.2018 02:55:36




<2Mbps>

Low Band Edge Plot on Channel 00

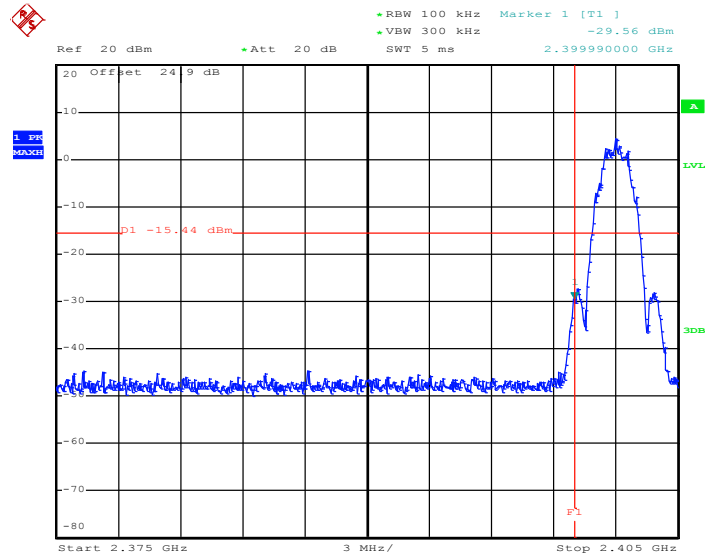

Date: 29.JUN.2018 03:02:24

High Band Edge Plot on Channel 39

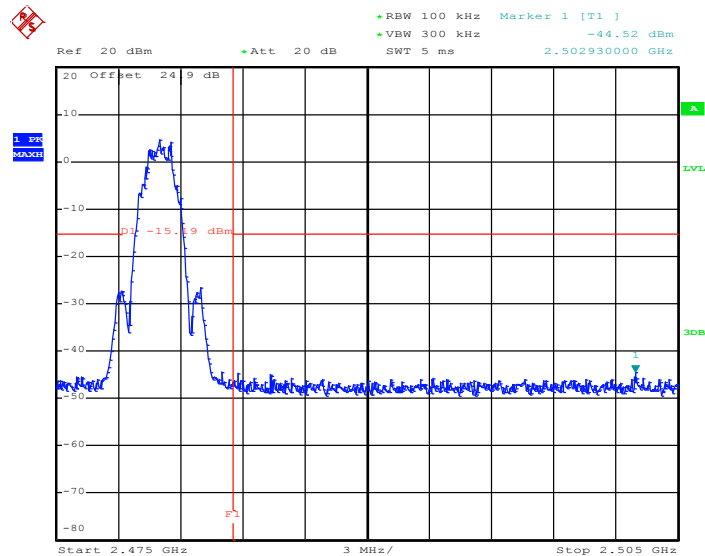

Date: 29.JUN.2018 03:26:10




3.4.6 Test Result of Conducted Spurious Emission Plots

<Antenna 1>

<1Mbps>

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

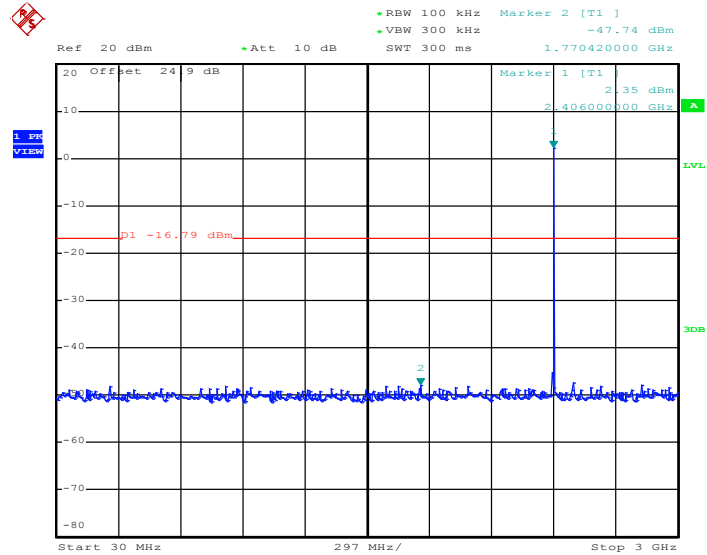


Date: 29.JUN.2018 01:43:10

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

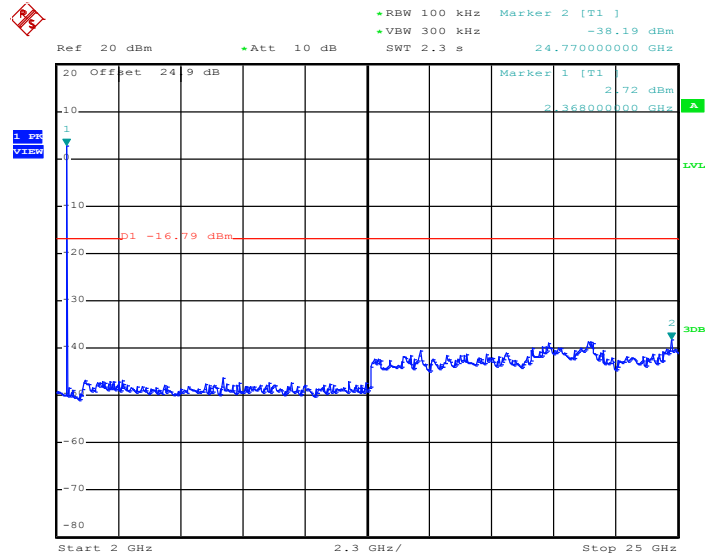


Date: 29.JUN.2018 01:43:27

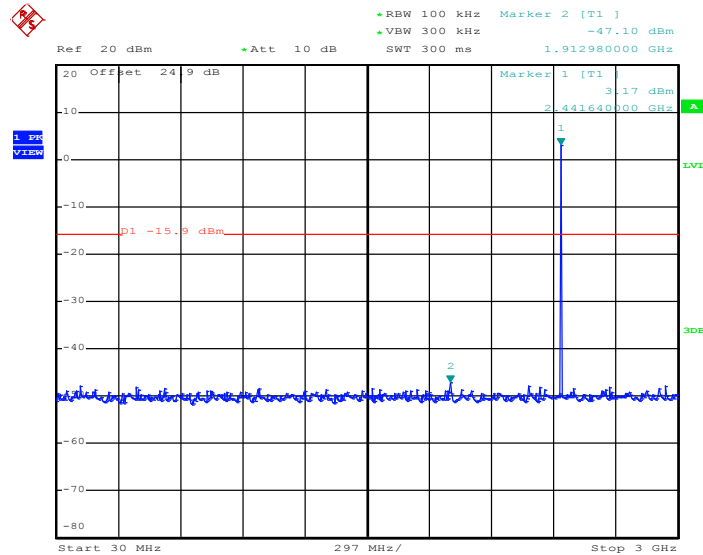**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19**


Date: 29.JUN.2018 01:52:34

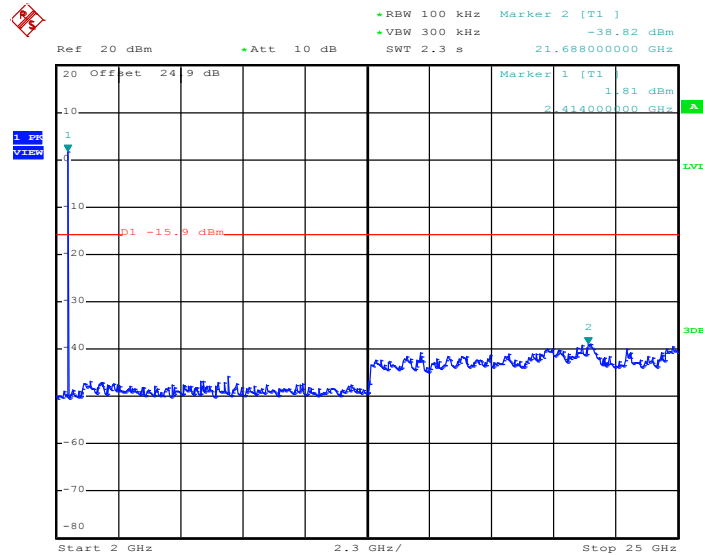**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19**

Date: 29.JUN.2018 01:52:57

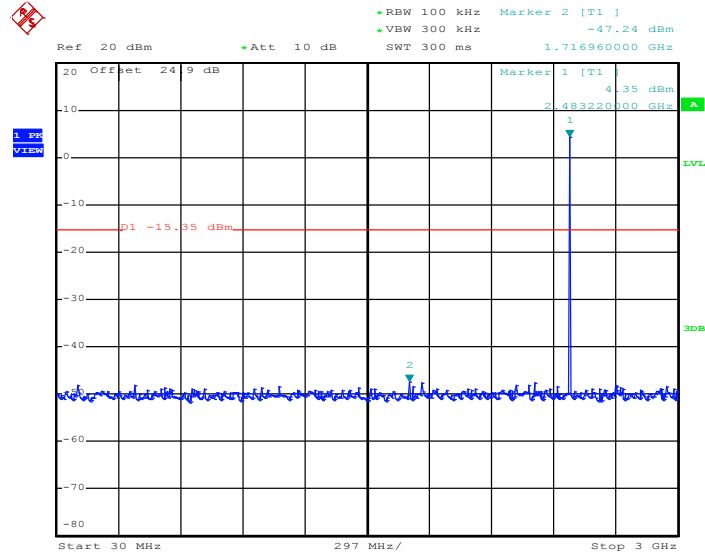**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps****GFSK Channel 39**

Date: 29.JUN.2018 01:58:57

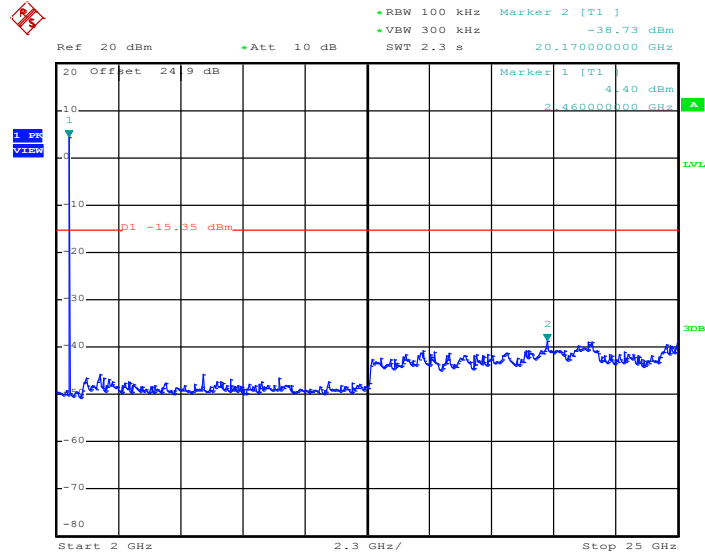Conducted Spurious Emission Plot on Bluetooth LE 1Mbps**GFSK Channel 39**


Date: 29.JUN.2018 01:59:14



<2Mbps>

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

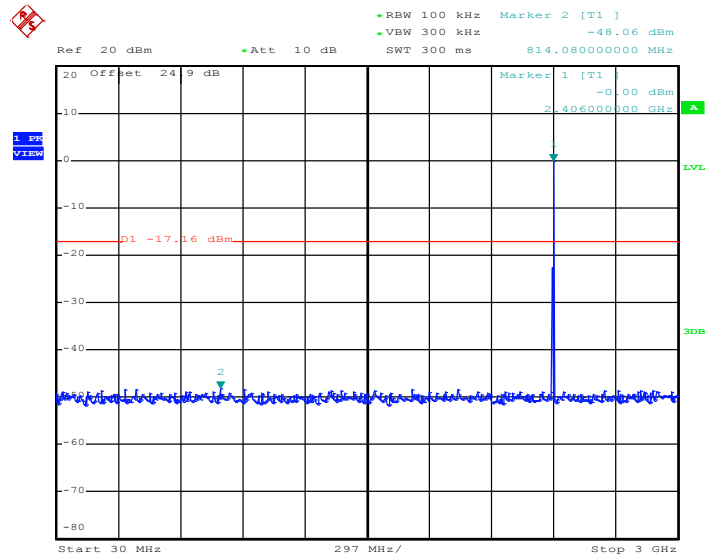

Date: 29.JUN.2018 02:06:52

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

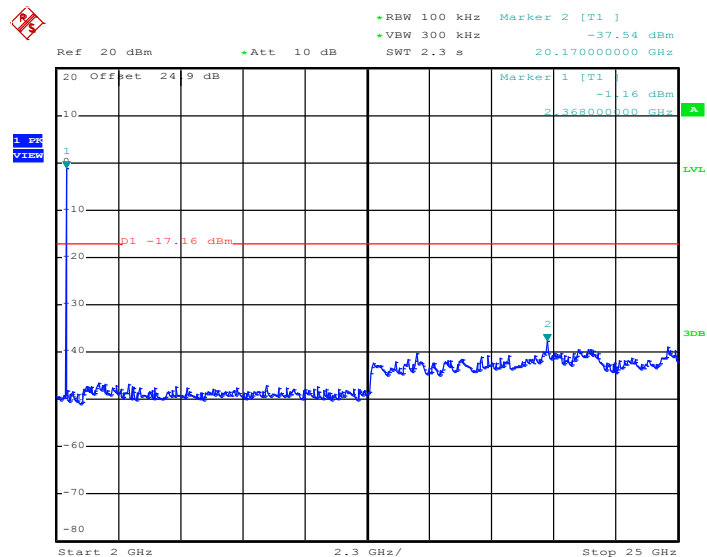

Date: 29.JUN.2018 02:07:11




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

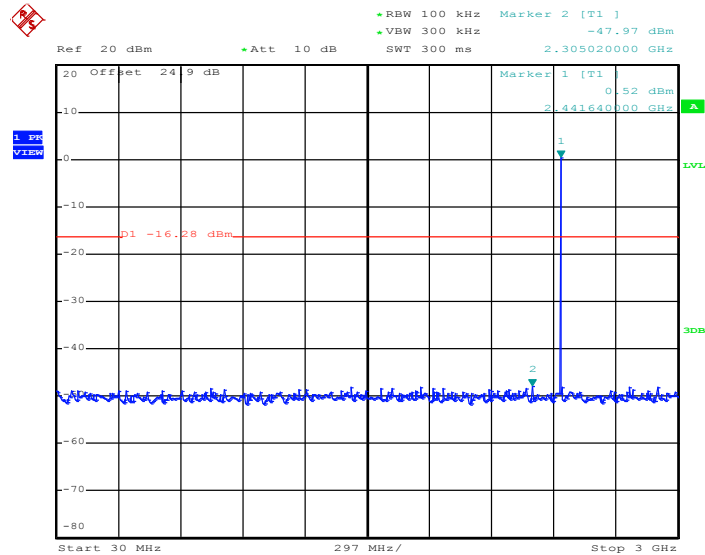

Date: 29.JUN.2018 02:13:14


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

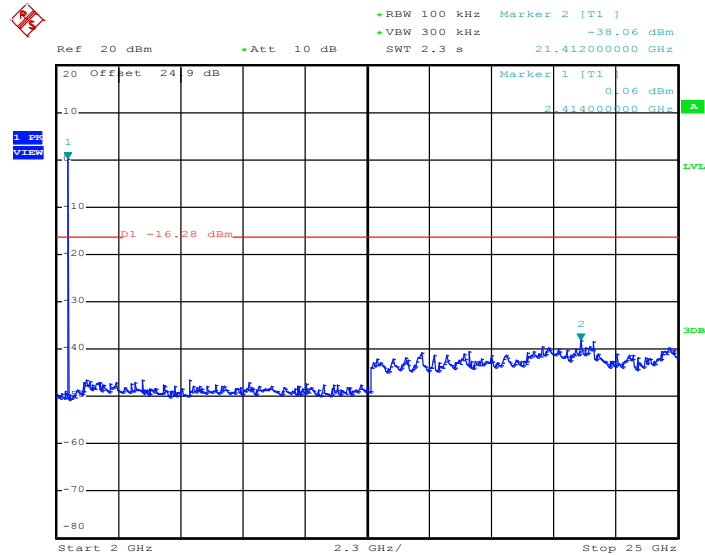

Date: 29.JUN.2018 02:13:28




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

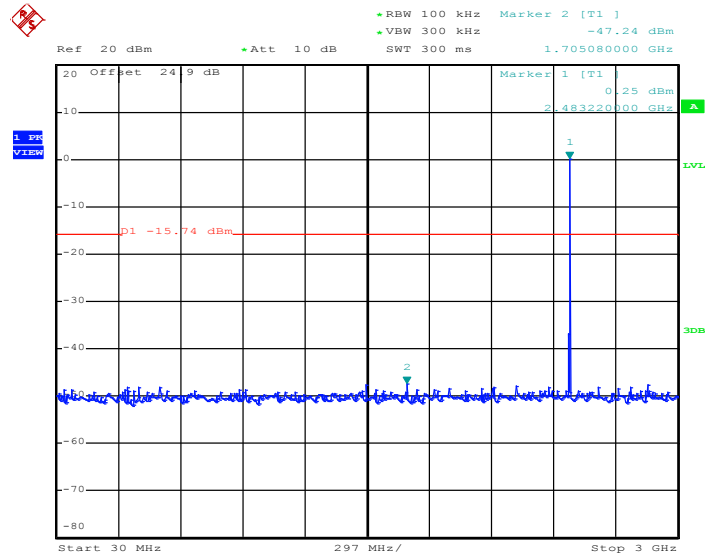

Date: 29.JUN.2018 02:19:26

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

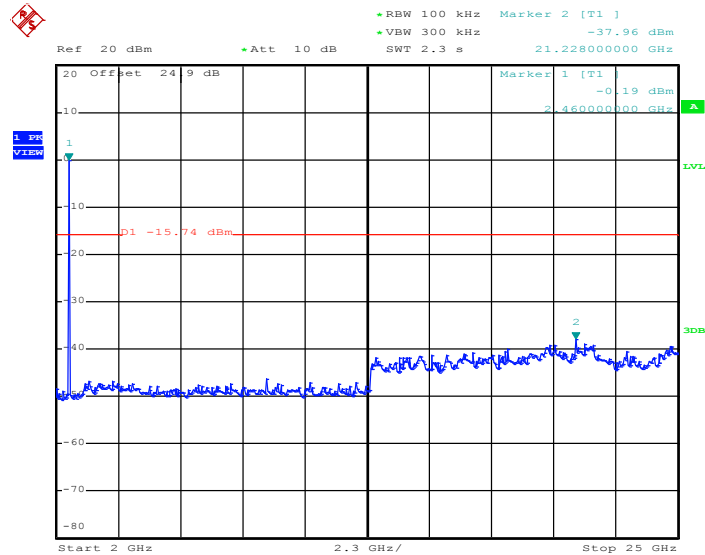


Date: 29.JUN.2018 02:19:44

<Antenna 2>

<1Mbps>

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

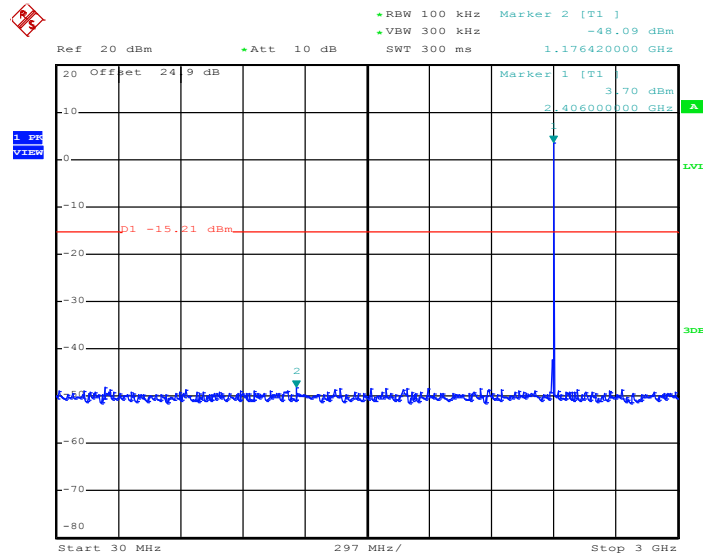

Date: 4.JUL.2018 05:56:29

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

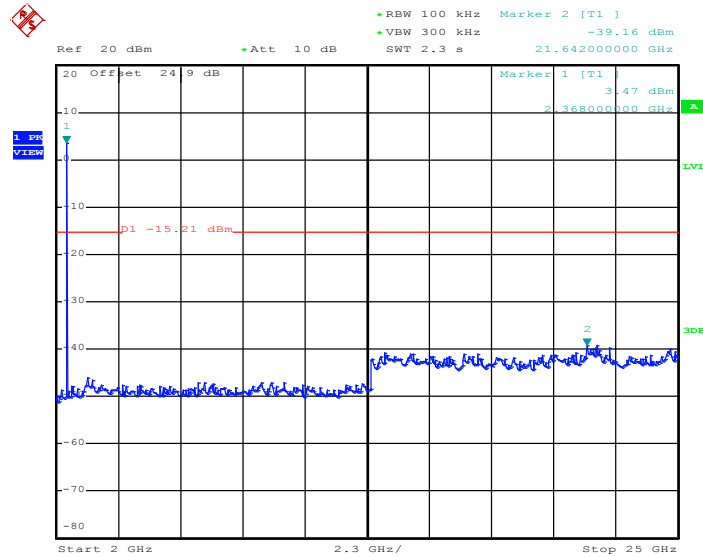

Date: 4.JUL.2018 05:57:04




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

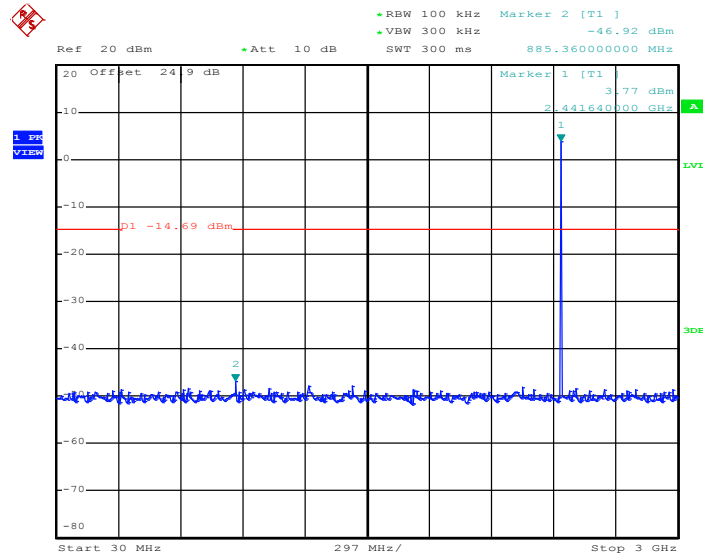

Date: 29.JUN.2018 02:50:42

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

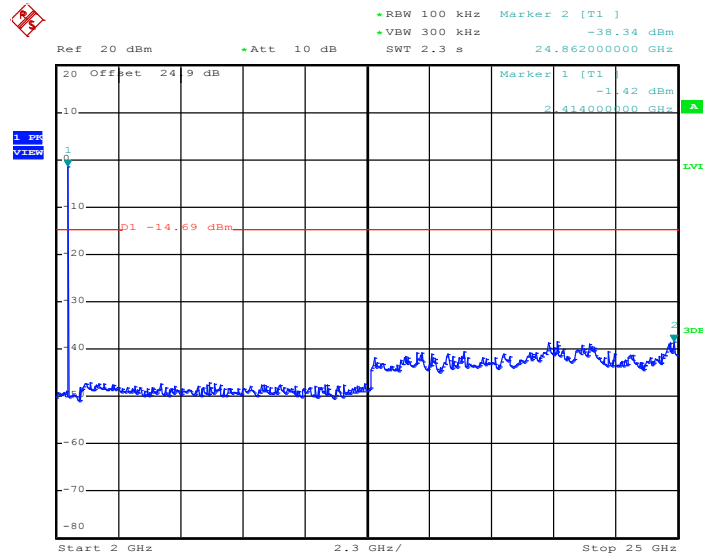


Date: 29.JUN.2018 02:51:08



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 39

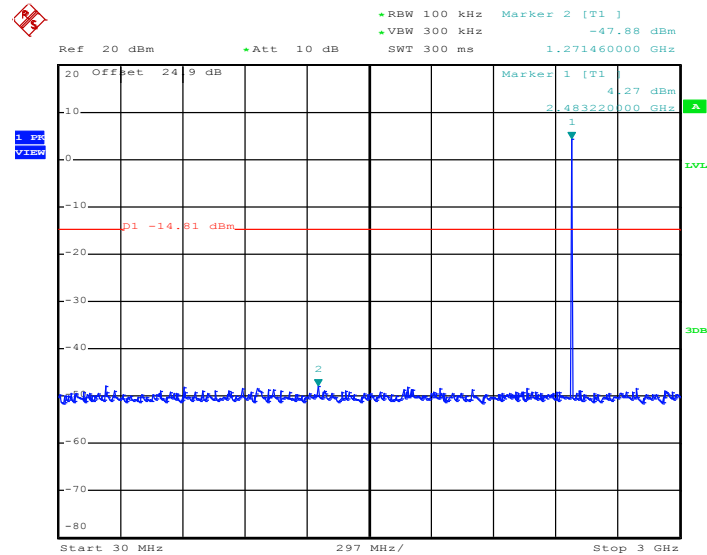

Date: 29.JUN.2018 02:55:52

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

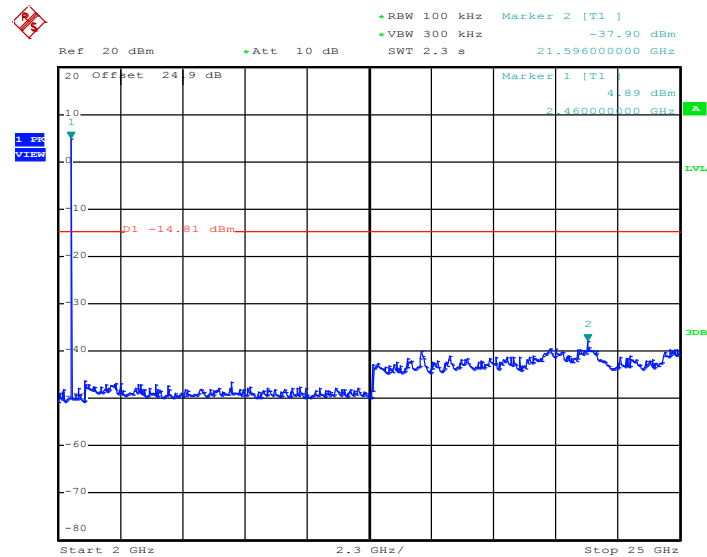


Date: 29.JUN.2018 02:56:07



<2Mbps>

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

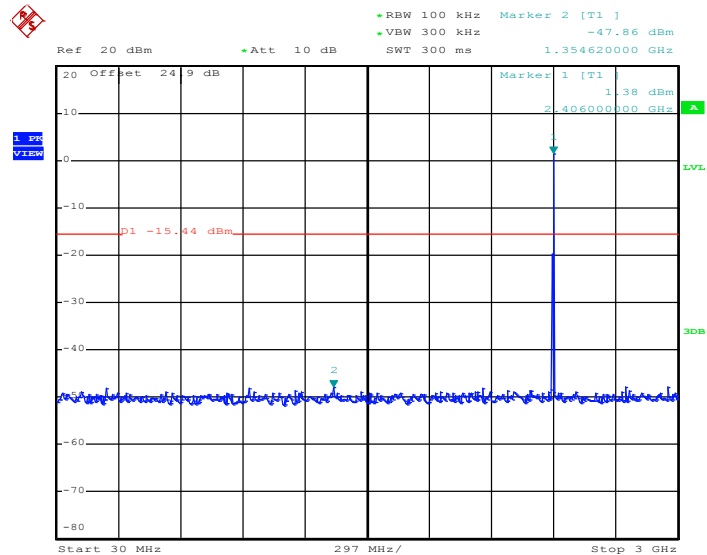

Date: 29.JUN.2018 03:03:23

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

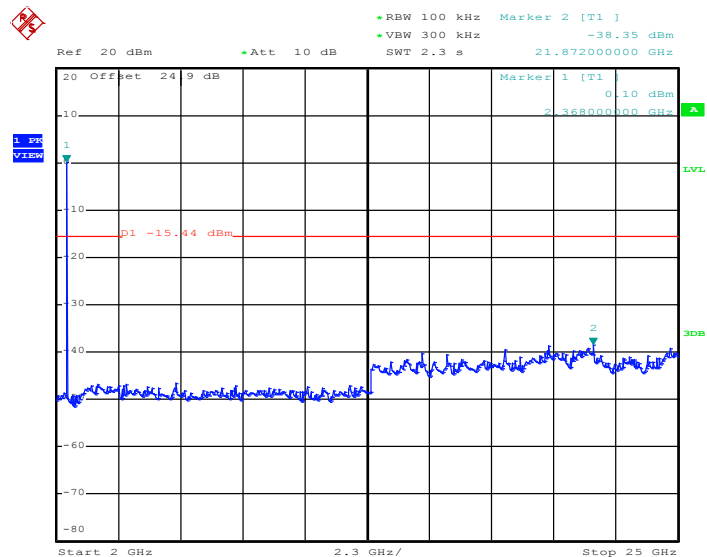

Date: 29.JUN.2018 03:03:37




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

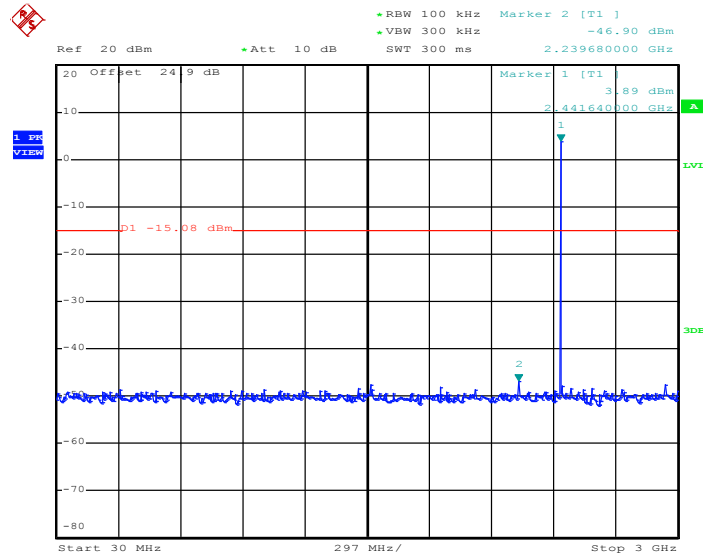

Date: 29.JUN.2018 03:10:03

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

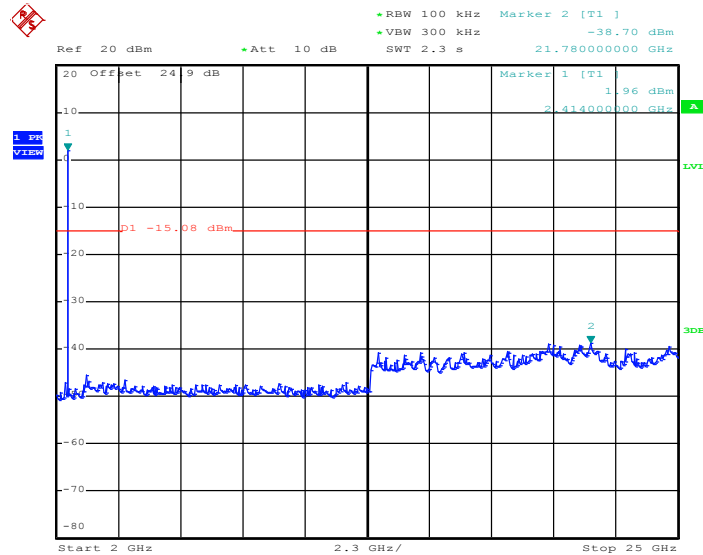


Date: 29.JUN.2018 03:10:21



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 39

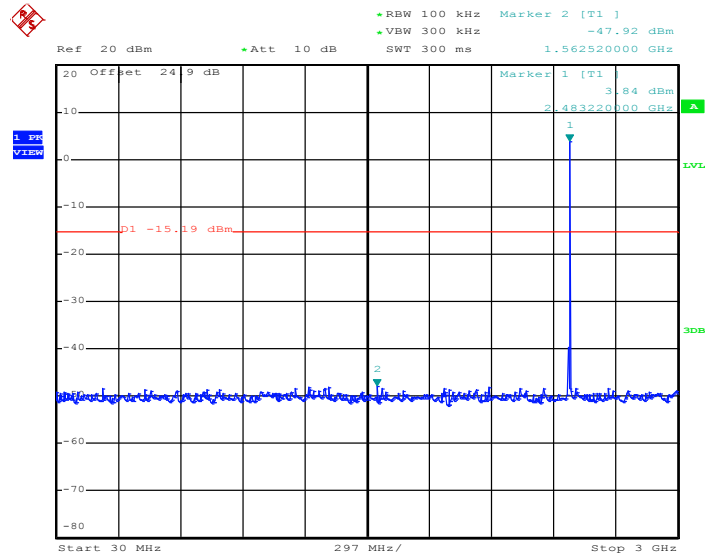

Date: 29.JUN.2018 03:27:00

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

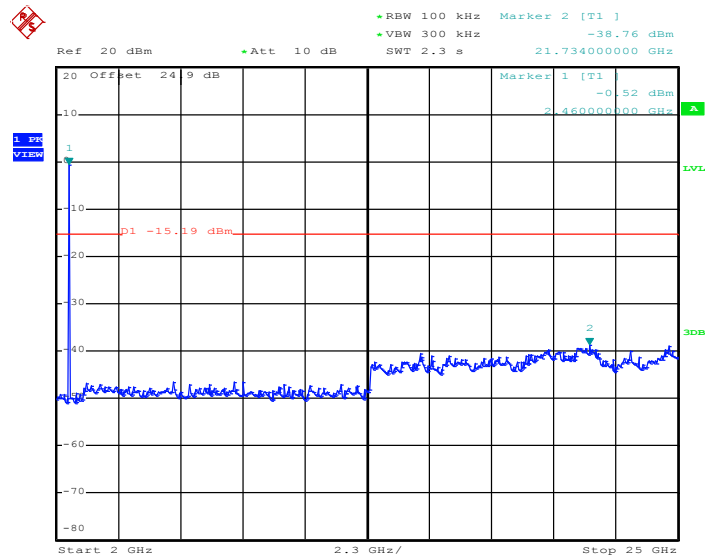

Date: 29.JUN.2018 03:27:18



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

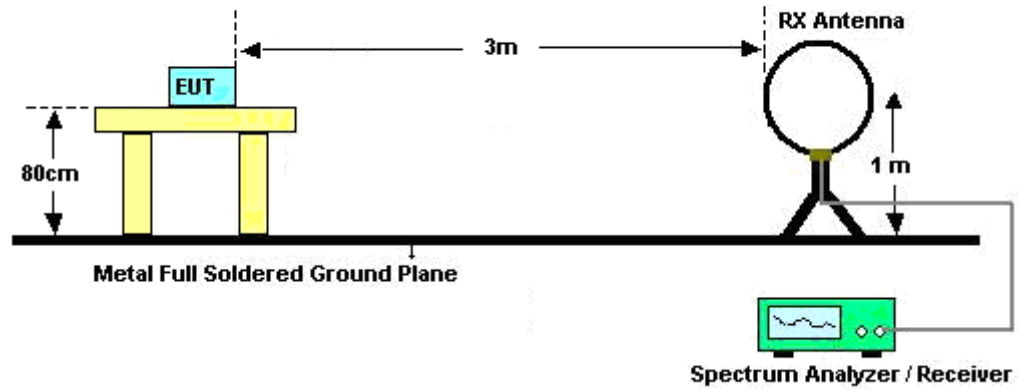

For radiated emissions from 30MHz to 1GHz

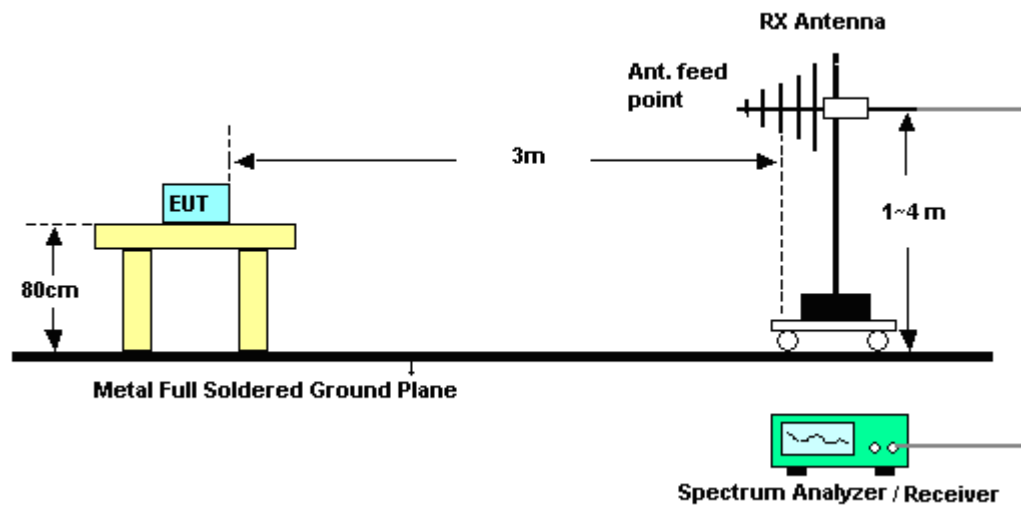

For radiated emissions above 1GHz

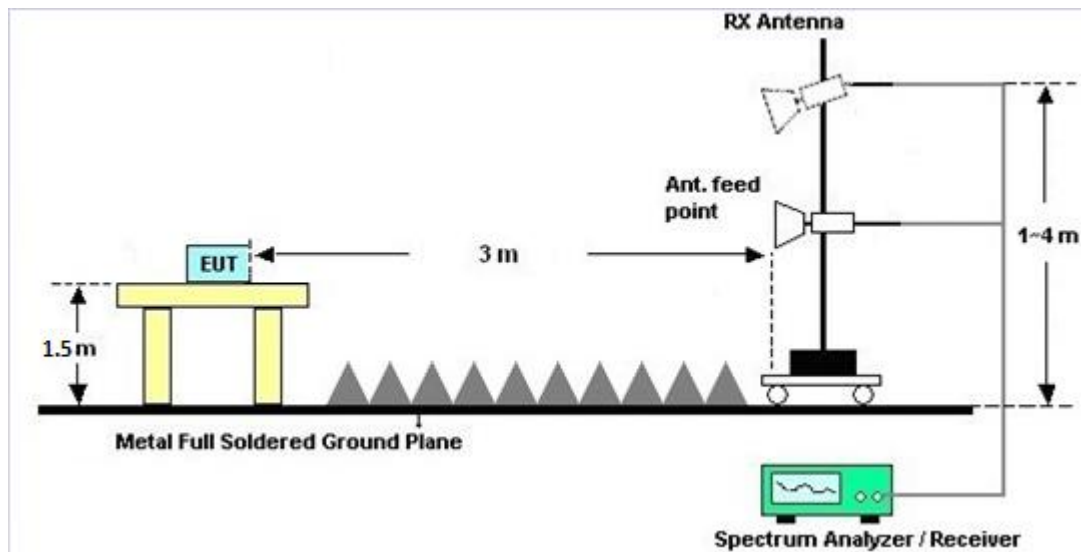

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

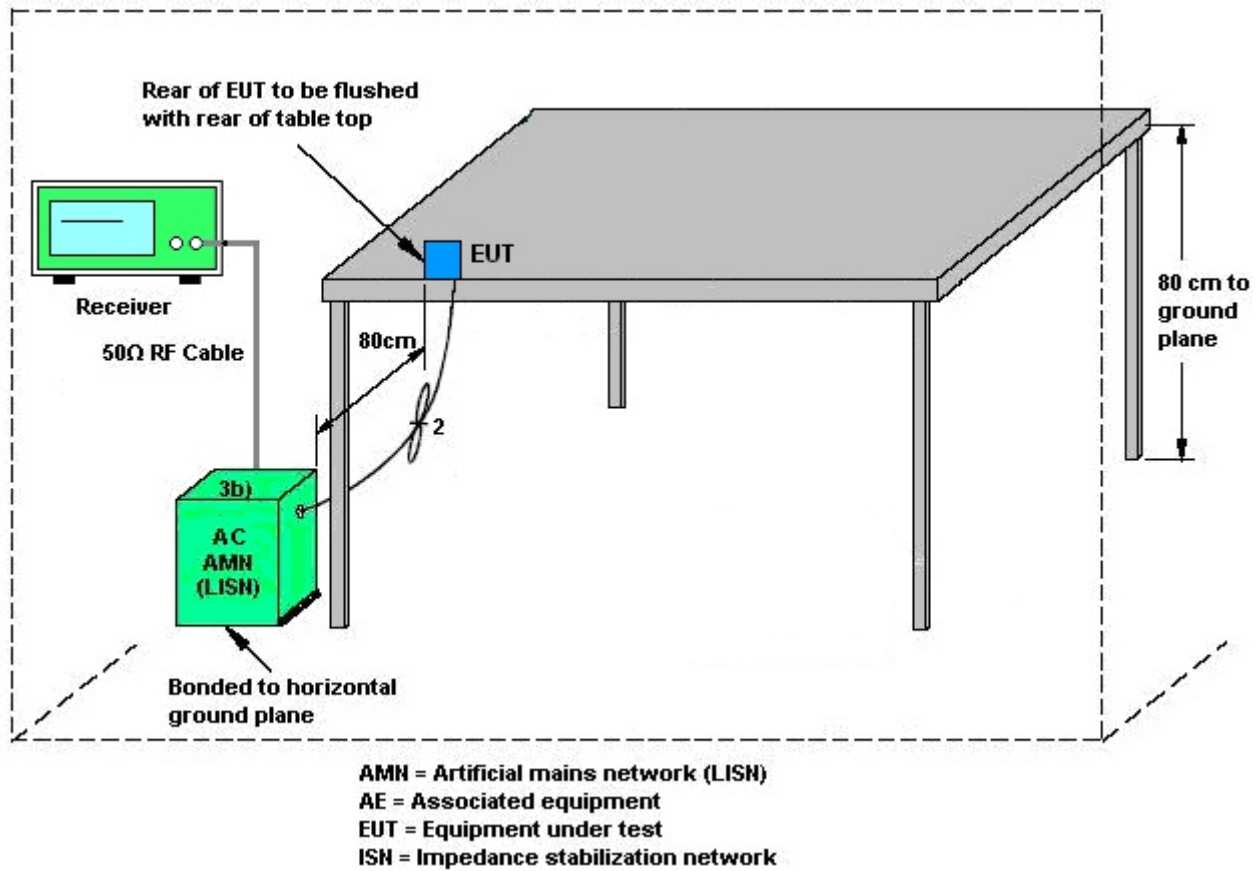

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 20, 2017	Jun. 27, 2018~ Jul. 04, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	Jun. 27, 2018~ Jul. 04, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 13, 2017	Jun. 27, 2018~ Jul. 04, 2018	Nov. 12, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	Jun. 27, 2018~ Jul. 04, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 25, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jun. 25, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jun. 25, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 25, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jun. 25, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jun. 25, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Jun. 13, 2018~ Jul. 05, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	Jun. 13, 2018~ Jul. 05, 2018	Aug. 22, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 25, 2018	Jun. 13, 2018~ Jul. 05, 2018	Apr. 24, 2019	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	May 21, 2018	Jun. 13, 2018~ Jul. 05, 2018	May 20, 2019	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 30, 2017	Jun. 13, 2018~ Jul. 05, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 17, 2018	Jun. 13, 2018~ Jul. 05, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jun. 13, 2018~ Jul. 05, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 13, 2018~ Jul. 05, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 13, 2018~ Jul. 05, 2018	Jul. 17, 2018	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917025 1	18GHz- 40GHz	Nov. 10, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Jun. 13, 2018~ Jul. 05, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	8050400465 6H	N/A	N/A	Jun. 13, 2018~ Jul. 05, 2018	N/A	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9KHz~30MHz	Jan. 02, 2018	Jun. 13, 2018~ Jul. 05, 2018	Jan. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 27, 2018	Jun. 13, 2018~ Jul. 05, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 27, 2018	Jun. 13, 2018~ Jul. 05, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SF102/2*11SK 252	MY4278/2	9kHz~40GHz	May 17, 2018	Jun. 13, 2018~ Jul. 05, 2018	May 16, 2019	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Dec. 07, 2017	Jun. 13, 2018~ Jul. 05, 2018	Dec. 06, 2018	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 21, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 20, 2018	Radiation (03CH07-HY)
Filter	Microwave	WHKX7.0/26.5 G-6SS	SN4	7G High Pass	Nov. 21, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 20, 2018	Radiation (03CH07-HY)
Filter	Wainwright	WLKS1200-8S S	SN3	1.2G Low Pass	Nov. 21, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 20, 2018	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2018/6/27~2018/07/04	Relative Humidity:	51~54	%

<1Mbps for Antenna 1>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.032	0.708	0.50	Pass
BLE	1Mbps	1	19	2440	1.032	0.700	0.50	Pass
BLE	1Mbps	1	39	2480	1.030	0.708	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	5.17	30.00	3.30	8.47	36.00	Pass
BLE	1Mbps	1	19	2440	5.91	30.00	3.30	9.21	36.00	Pass
BLE	1Mbps	1	39	2480	6.26	30.00	3.30	9.56	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.25	3.89
BLE	1Mbps	1	19	2440	2.25	4.75
BLE	1Mbps	1	39	2480	2.25	5.42

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	3.21	-11.40	3.30	8.00	Pass
BLE	1Mbps	1	19	2440	4.10	-10.51	3.30	8.00	Pass
BLE	1Mbps	1	39	2480	4.65	-9.99	3.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

<2Mbps for Antenna 1>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	2.072	1.232	0.50	Pass
BLE5.0	2Mbps	1	19	2440	2.072	1.240	0.50	Pass
BLE5.0	2Mbps	1	39	2480	2.072	1.240	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.0	2Mbps	1	0	2402	5.21	30.00	3.30	8.51	36.00	Pass
BLE5.0	2Mbps	1	19	2440	5.86	30.00	3.30	9.16	36.00	Pass
BLE5.0	2Mbps	1	39	2480	6.34	30.00	3.30	9.64	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE5.0	2Mbps	1	0	2402	2.57	3.96
BLE5.0	2Mbps	1	19	2440	2.57	4.80
BLE5.0	2Mbps	1	39	2480	2.57	5.48

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	2.84	-15.48	3.30	8.00	Pass
BLE5.0	2Mbps	1	19	2440	3.72	-14.63	3.30	8.00	Pass
BLE5.0	2Mbps	1	39	2480	4.26	-14.01	3.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

<1Mbps for Antenna 2>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.030	0.692	0.50	Pass
BLE	1Mbps	1	19	2440	1.030	0.696	0.50	Pass
BLE	1Mbps	1	39	2480	1.030	0.700	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.46	30.00	3.30	9.76	36.00	Pass
BLE	1Mbps	1	19	2440	6.85	30.00	3.30	10.15	36.00	Pass
BLE	1Mbps	1	39	2480	6.89	30.00	3.30	10.19	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.25	5.59
BLE	1Mbps	1	19	2440	2.25	5.94
BLE	1Mbps	1	39	2480	2.25	5.97

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.79	-9.83	3.30	8.00	Pass
BLE	1Mbps	1	19	2440	5.31	-9.29	3.30	8.00	Pass
BLE	1Mbps	1	39	2480	5.19	-9.39	3.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

<2Mbps for Antenna 2>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	2.068	1.240	0.50	Pass
BLE5.0	2Mbps	1	19	2440	2.072	1.240	0.50	Pass
BLE5.0	2Mbps	1	39	2480	2.072	1.232	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.0	2Mbps	1	0	2402	6.60	30.00	3.00	9.60	36.00	Pass
BLE5.0	2Mbps	1	19	2440	6.82	30.00	3.00	9.82	36.00	Pass
BLE5.0	2Mbps	1	39	2480	6.88	30.00	3.00	9.88	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE5.0	2Mbps	1	0	2402	2.57	5.68
BLE5.0	2Mbps	1	19	2440	2.57	6.00
BLE5.0	2Mbps	1	39	2480	2.57	6.04

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	4.56	-13.66	3.00	8.00	Pass
BLE5.0	2Mbps	1	19	2440	4.92	-13.35	3.00	8.00	Pass
BLE5.0	2Mbps	1	39	2480	4.81	-13.39	3.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Arthur Hsieh	Temperature :	21~25℃
		Relative Humidity :	51~55%

EUT Information

Report NO : 831509-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

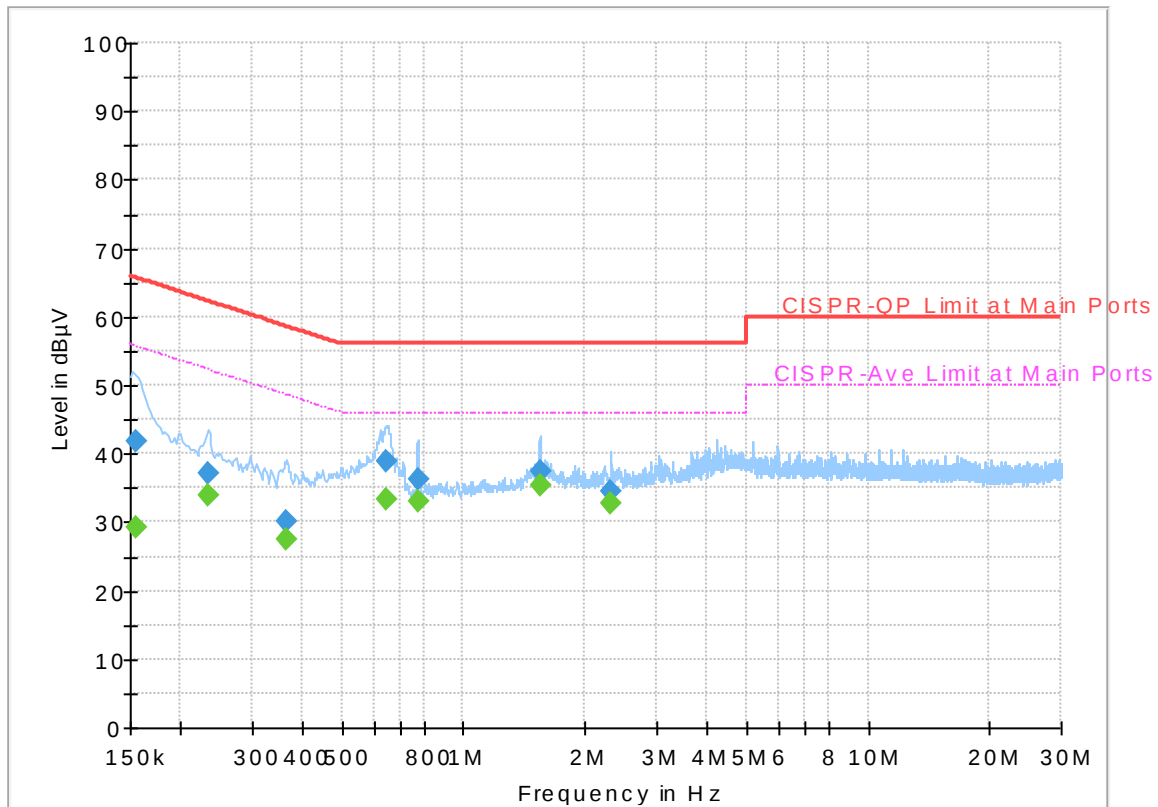


Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	29.17	55.75	26.58	L1	OFF	19.5
0.154500	41.83	---	65.75	23.92	L1	OFF	19.5
0.233250	---	33.78	52.33	18.55	L1	OFF	19.5
0.233250	37.04	---	62.33	25.29	L1	OFF	19.5
0.366000	---	27.38	48.59	21.21	L1	OFF	19.5
0.366000	30.10	---	58.59	28.49	L1	OFF	19.5
0.642750	---	33.38	46.00	12.62	L1	OFF	19.6
0.642750	38.84	---	56.00	17.16	L1	OFF	19.6
0.771000	---	33.17	46.00	12.83	L1	OFF	19.6
0.771000	36.19	---	56.00	19.81	L1	OFF	19.6
1.542750	---	35.35	46.00	10.65	L1	OFF	19.6
1.542750	37.46	---	56.00	18.54	L1	OFF	19.6
2.312250	---	32.82	46.00	13.18	L1	OFF	19.5
2.312250	34.52	---	56.00	21.48	L1	OFF	19.5

EUT Information

Report NO : 831509-01
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

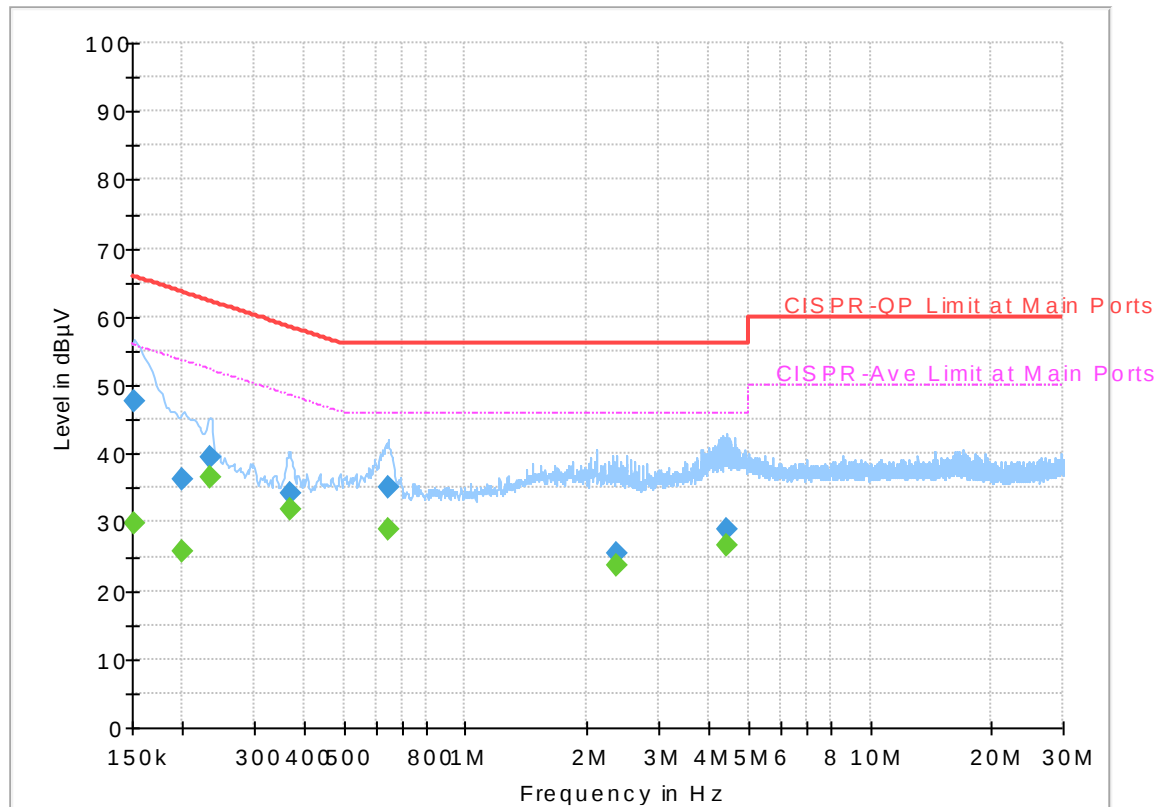

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.94	55.88	25.94	N	OFF	19.5
0.152250	47.65	---	65.88	18.23	N	OFF	19.5
0.199500	---	25.84	53.63	27.79	N	OFF	19.5
0.199500	36.17	---	63.63	27.46	N	OFF	19.5
0.233250	---	36.67	52.33	15.66	N	OFF	19.5
0.233250	39.50	---	62.33	22.83	N	OFF	19.5
0.368250	---	32.01	48.54	16.53	N	OFF	19.5
0.368250	34.15	---	58.54	24.39	N	OFF	19.5
0.645000	---	28.90	46.00	17.10	N	OFF	19.6
0.645000	35.03	---	56.00	20.97	N	OFF	19.6
2.366250	---	23.63	46.00	22.37	N	OFF	19.5
2.366250	25.39	---	56.00	30.61	N	OFF	19.5
4.445250	---	26.58	46.00	19.42	N	OFF	19.7
4.445250	29.09	---	56.00	26.91	N	OFF	19.7



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh, and Nick Yu	Temperature :	24~26°C
		Relative Humidity :	51~53%

<For Ant. 1>

2.4GHz 2400~2483.5MHz

BLE (1Mbps) (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2376.57	55.57	-18.43	74	41.33	31.91	17.37	35.04	293	296	P	H
		2388.96	45.51	-8.49	54	31.17	31.95	17.43	35.04	293	296	A	H
	*	2402	99.98	-	-	85.65	31.95	17.43	35.05	293	296	P	H
	*	2402	99.62	-	-	85.29	31.95	17.43	35.05	293	296	A	H
		2323.23	54.71	-19.29	74	40.63	31.79	17.31	35.02	259	334	P	V
		2389.695	45.8	-8.2	54	31.46	31.95	17.43	35.04	259	334	A	V
	*	2402	98.14	-	-	83.81	31.95	17.43	35.05	259	334	P	V
	*	2402	97.65	-	-	83.32	31.95	17.43	35.05	259	334	A	V
BLE CH 19 2440MHz		2356.48	55.1	-18.9	74	40.89	31.87	17.37	35.03	290	281	P	H
		2343.88	45.5	-8.5	54	31.33	31.83	17.37	35.03	290	281	A	H
	*	2440	100.98	-	-	86.47	32.08	17.49	35.06	290	281	P	H
	*	2440	100.62	-	-	86.11	32.08	17.49	35.06	290	281	A	H
		2484.18	54.55	-19.45	74	39.91	32.16	17.55	35.07	290	281	P	H
		2486.98	45.74	-8.26	54	31.1	32.16	17.55	35.07	290	281	A	H
		2310.84	55.66	-18.34	74	41.63	31.74	17.31	35.02	330	337	P	V
		2386.58	45.63	-8.37	54	31.29	31.95	17.43	35.04	330	337	A	V
	*	2440	99.6	-	-	85.09	32.08	17.49	35.06	330	337	P	V
	*	2440	99.18	-	-	84.67	32.08	17.49	35.06	330	337	A	V
		2486.07	55.44	-18.56	74	40.8	32.16	17.55	35.07	330	337	P	V
		2490.41	46.01	-7.99	54	31.33	32.2	17.55	35.07	330	337	A	V



BLE CH 39 2480MHz	*	2480	101.54	-	-	86.9	32.16	17.55	35.07	395	276	P	H
	*	2480	101.15	-	-	86.51	32.16	17.55	35.07	395	276	A	H
		2485.68	55.22	-18.78	74	40.58	32.16	17.55	35.07	395	276	P	H
		2493.6	46	-8	54	31.33	32.2	17.55	35.08	395	276	A	H
	*	2480	100.08	-	-	85.44	32.16	17.55	35.07	356	339	P	V
	*	2480	99.69	-	-	85.05	32.16	17.55	35.07	356	339	A	V
		2485.36	55.93	-18.07	74	41.29	32.16	17.55	35.07	356	339	P	V
		2486	46.19	-7.81	54	31.55	32.16	17.55	35.07	356	339	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (1Mbps) (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.08	-31.92	74	56.14	34.24	11.08	59.38	100	0	P	H
		4804	42.81	-31.19	74	56.87	34.24	11.08	59.38	100	0	P	V
BLE CH 19 2440MHz		4880	41.67	-32.33	74	55.53	34.22	11.16	59.24	100	0	P	H
		7320	41.93	-32.07	74	50.78	35.7	13.61	58.16	100	0	P	H
		4880	42.43	-31.57	74	56.29	34.22	11.16	59.24	100	0	P	V
		7320	41.86	-32.14	74	50.71	35.7	13.61	58.16	100	0	P	V
BLE CH 39 2480MHz		4960	41.63	-32.37	74	55.23	34.21	11.26	59.07	100	0	P	H
		7440	43.14	-30.86	74	52.13	35.63	13.71	58.33	100	0	P	H
		4960	42.25	-31.75	74	55.85	34.21	11.26	59.07	100	0	P	V
		7440	43.48	-30.52	74	52.47	35.63	13.71	58.33	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (2Mbps) (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2338.56	54.6	-19.4	74	40.48	31.83	17.31	35.02	294	296	P	H
		2386.44	44.88	-9.12	54	30.54	31.95	17.43	35.04	294	296	A	H
	*	2402	99.92	-	-	85.59	31.95	17.43	35.05	294	296	P	H
	*	2402	99.1	-	-	84.77	31.95	17.43	35.05	294	296	A	H
		2377.725	56.03	-17.97	74	41.79	31.91	17.37	35.04	259	333	P	V
		2387.28	44.88	-9.12	54	30.54	31.95	17.43	35.04	259	333	A	V
	*	2402	97.78	-	-	83.45	31.95	17.43	35.05	259	333	P	V
	*	2402	97.26	-	-	82.93	31.95	17.43	35.05	259	333	A	V
BLE CH 19 2440MHz		2362.22	54.38	-19.62	74	40.17	31.87	17.37	35.03	290	281	P	H
		2377.9	44.92	-9.08	54	30.68	31.91	17.37	35.04	290	281	A	H
	*	2440	100.89	-	-	86.38	32.08	17.49	35.06	290	281	P	H
	*	2440	99.51	-	-	85	32.08	17.49	35.06	290	281	A	H
		2498.95	54.94	-19.06	74	40.27	32.2	17.55	35.08	290	281	P	H
		2491.18	45.13	-8.87	54	30.45	32.2	17.55	35.07	290	281	A	H
		2369.36	54.99	-19.01	74	40.75	31.91	17.37	35.04	332	336	P	V
		2379.16	44.97	-9.03	54	30.73	31.91	17.37	35.04	332	336	A	V
	*	2440	99.63	-	-	85.12	32.08	17.49	35.06	332	336	P	V
	*	2440	98.83	-	-	84.32	32.08	17.49	35.06	332	336	A	V
		2496.92	54.15	-19.85	74	39.48	32.2	17.55	35.08	332	336	P	V
		2487.33	45.4	-8.6	54	30.76	32.16	17.55	35.07	332	336	A	V



BLE CH 39 2480MHz	*	2480	101.4	-	-	86.76	32.16	17.55	35.07	396	276	P	H
	*	2480	100.3	-	-	85.66	32.16	17.55	35.07	396	276	A	H
		2484	55.86	-18.14	74	41.22	32.16	17.55	35.07	396	276	P	H
		2484.04	47.85	-6.15	54	33.21	32.16	17.55	35.07	396	276	A	H
	*	2480	100.03	-	-	85.39	32.16	17.55	35.07	357	337	P	V
	*	2480	99.43	-	-	84.79	32.16	17.55	35.07	357	337	A	V
		2483.96	54.94	-19.06	74	40.3	32.16	17.55	35.07	357	337	P	V
		2484.04	47.05	-6.95	54	32.41	32.16	17.55	35.07	357	337	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (2Mbps) (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.03	-31.97	74	56.09	34.24	11.08	59.38	100	0	P	H
		4804	42.6	-31.4	74	56.66	34.24	11.08	59.38	100	0	P	V
BLE CH 19 2440MHz		4880	41.61	-32.39	74	55.47	34.22	11.16	59.24	100	0	P	H
		7320	42.78	-31.22	74	51.63	35.7	13.61	58.16	100	0	P	H
		4880	41.94	-32.06	74	55.8	34.22	11.16	59.24	100	0	P	V
		7320	42.78	-31.22	74	51.63	35.7	13.61	58.16	100	0	P	V
BLE CH 39 2480MHz		4960	41.98	-32.02	74	55.58	34.21	11.26	59.07	100	0	P	H
		7440	43.52	-30.48	74	52.51	35.63	13.71	58.33	100	0	P	H
		4960	42.22	-31.78	74	55.82	34.21	11.26	59.07	100	0	P	V
		7440	43.77	-30.23	74	52.76	35.63	13.71	58.33	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (2Mbps) (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	29.83	-10.17	40	35.38	24.6	1.2	31.35	100	0	P	H
		129.9	25.34	-18.16	43.5	37.49	17.43	1.95	31.53	-	-	P	H
		207.93	32.58	-10.92	43.5	46.7	15.07	2.25	31.44	-	-	P	H
		416.2	29.51	-16.49	46	34.93	22.4	3.29	31.11	-	-	P	H
		624.1	29.74	-16.26	46	30.84	25.64	4.05	30.79	-	-	P	H
		971.3	32.6	-21.4	54	27.21	30.86	5.04	30.51	-	-	P	H
		30	28.77	-11.23	40	34.32	24.6	1.2	31.35	100	0	P	V
		207.93	27.82	-15.68	43.5	41.94	15.07	2.25	31.44	-	-	P	V
		283.53	19.19	-26.81	46	28.98	18.8	2.74	31.33	-	-	P	V
		519.1	29.48	-16.52	46	32.84	23.94	3.65	30.95	-	-	P	V
		624.1	32.83	-13.17	46	33.93	25.64	4.05	30.79	-	-	P	V
		989.5	33.03	-20.97	54	27.89	30.56	5.09	30.51	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<For Ant. 2>

2.4GHz 2400~2483.5MHz**BLE (1Mbps) (Band Edge @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2379.825	54.91	-19.09	74	40.67	31.91	17.37	35.04	300	188	P	H
		2390	45.8	-8.2	54	31.47	31.95	17.43	35.05	300	188	A	H
	*	2402	100.97	-	-	86.64	31.95	17.43	35.05	300	188	P	H
	*	2402	100.57	-	-	86.24	31.95	17.43	35.05	300	188	A	H
		2389.17	54.78	-19.22	74	40.44	31.95	17.43	35.04	210	351	P	V
		2384.865	45.88	-8.12	54	31.58	31.91	17.43	35.04	210	351	A	V
	*	2402	102.35	-	-	88.02	31.95	17.43	35.05	210	351	P	V
	*	2402	101.93	-	-	87.6	31.95	17.43	35.05	210	351	A	V
BLE CH 19 2440MHz		2358.02	54.89	-19.11	74	40.68	31.87	17.37	35.03	253	149	P	H
		2379.72	45.52	-8.48	54	31.28	31.91	17.37	35.04	253	149	A	H
	*	2440	99.62	-	-	85.11	32.08	17.49	35.06	253	149	P	H
	*	2440	99.18	-	-	84.67	32.08	17.49	35.06	253	149	A	H
		2483.97	54.76	-19.24	74	40.12	32.16	17.55	35.07	253	149	P	H
		2494.4	45.77	-8.23	54	31.1	32.2	17.55	35.08	253	149	A	H
		2355.08	54.93	-19.07	74	40.72	31.87	17.37	35.03	130	8	P	V
		2371.18	45.79	-8.21	54	31.55	31.91	17.37	35.04	130	8	A	V
	*	2440	100.5	-	-	85.99	32.08	17.49	35.06	130	8	P	V
	*	2440	100.1	-	-	85.59	32.08	17.49	35.06	130	8	A	V
		2495.45	54.58	-19.42	74	39.91	32.2	17.55	35.08	130	8	P	V
		2484.11	45.98	-8.02	54	31.34	32.16	17.55	35.07	130	8	A	V



BLE CH 39 2480MHz	*	2480	99.05	-	-	84.41	32.16	17.55	35.07	308	140	P	H
	*	2480	98.66	-	-	84.02	32.16	17.55	35.07	308	140	A	H
		2493.32	54.91	-19.09	74	40.24	32.2	17.55	35.08	308	140	P	H
		2487	45.9	-8.1	54	31.26	32.16	17.55	35.07	308	140	A	H
	*	2480	99.57	-	-	84.93	32.16	17.55	35.07	399	239	P	V
	*	2480	99.14	-	-	84.5	32.16	17.55	35.07	399	239	A	V
		2485.36	54.6	-19.4	74	39.96	32.16	17.55	35.07	399	239	P	V
		2493.4	46.34	-7.66	54	31.67	32.2	17.55	35.08	399	239	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (1Mbps) (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	43.26	-30.74	74	57.32	34.24	11.08	59.38	100	0	P	H
		4804	43.12	-30.88	74	57.18	34.24	11.08	59.38	100	0	P	V
BLE CH 19 2440MHz		4880	41.91	-32.09	74	55.77	34.22	11.16	59.24	100	0	P	H
		7320	43.54	-30.46	74	52.39	35.7	13.61	58.16	100	0	P	H
		4880	41.49	-32.51	74	55.35	34.22	11.16	59.24	100	0	P	V
		7320	43.4	-30.6	74	52.25	35.7	13.61	58.16	100	0	P	V
BLE CH 39 2480MHz		4960	42.88	-31.12	74	56.48	34.21	11.26	59.07	100	0	P	H
		7440	44.37	-29.63	74	53.36	35.63	13.71	58.33	100	0	P	H
		4960	42.46	-31.54	74	56.06	34.21	11.26	59.07	100	0	P	V
		7440	43.7	-30.3	74	52.69	35.63	13.71	58.33	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (2Mbps) (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2380.56	54.96	-19.04	74	40.66	31.91	17.43	35.04	300	189	P	H
		2390	44.84	-9.16	54	30.51	31.95	17.43	35.05	300	189	A	H
	*	2402	100.85	-	-	86.52	31.95	17.43	35.05	300	189	P	H
	*	2402	100.37	-	-	86.04	31.95	17.43	35.05	300	189	A	H
		2312.94	54.68	-19.32	74	40.65	31.74	17.31	35.02	213	352	P	V
		2337.195	44.87	-9.13	54	30.75	31.83	17.31	35.02	213	352	A	V
	*	2402	101.54	-	-	87.21	31.95	17.43	35.05	213	352	P	V
	*	2402	101.01	-	-	86.68	31.95	17.43	35.05	213	352	A	V
BLE CH 19 2440MHz		2334.92	54.99	-19.01	74	40.87	31.83	17.31	35.02	255	149	P	H
		2386.72	44.88	-9.12	54	30.54	31.95	17.43	35.04	255	149	A	H
	*	2440	99.54	-	-	85.03	32.08	17.49	35.06	255	149	P	H
	*	2440	98.25	-	-	83.74	32.08	17.49	35.06	255	149	A	H
		2499.09	55.45	-18.55	74	40.78	32.2	17.55	35.08	255	149	P	H
		2492.93	45	-9	54	30.33	32.2	17.55	35.08	255	149	A	H
		2355.5	54.89	-19.11	74	40.68	31.87	17.37	35.03	126	8	P	V
		2387.14	44.9	-9.1	54	30.56	31.95	17.43	35.04	126	8	A	V
	*	2440	100.45	-	-	85.94	32.08	17.49	35.06	126	8	P	V
	*	2440	99.95	-	-	85.44	32.08	17.49	35.06	126	8	A	V
		2492.37	54.92	-19.08	74	40.25	32.2	17.55	35.08	126	8	P	V
		2495.24	45.07	-8.93	54	30.4	32.2	17.55	35.08	126	8	A	V



BLE CH 39 2480MHz	*	2480	98.96	-	-	84.32	32.16	17.55	35.07	265	140	P	H
	*	2480	98.45	-	-	83.81	32.16	17.55	35.07	265	140	A	H
		2491.8	55.89	-18.11	74	41.22	32.2	17.55	35.08	265	140	P	H
		2483.92	46.7	-7.3	54	32.06	32.16	17.55	35.07	265	140	A	H
	*	2480	99.77	-	-	85.13	32.16	17.55	35.07	359	235	P	V
	*	2480	99.24	-	-	84.6	32.16	17.55	35.07	359	235	A	V
		2484.52	55.59	-18.41	74	40.95	32.16	17.55	35.07	359	235	P	V
		2484	47.12	-6.88	54	32.48	32.16	17.55	35.07	359	235	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (2Mbps) (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.91	-31.09	74	56.97	34.24	11.08	59.38	100	0	P	H
		4804	42.25	-31.75	74	56.31	34.24	11.08	59.38	100	0	P	V
BLE CH 19 2440MHz		4880	41.57	-32.43	74	55.43	34.22	11.16	59.24	100	0	P	H
		7320	43.8	-30.2	74	52.65	35.7	13.61	58.16	100	0	P	H
		4880	42.51	-31.49	74	56.37	34.22	11.16	59.24	100	0	P	V
		7320	43.9	-30.1	74	52.75	35.7	13.61	58.16	100	0	P	V
BLE CH 39 2480MHz		4960	42.78	-31.22	74	56.38	34.21	11.26	59.07	100	0	P	H
		7440	43.7	-30.3	74	52.69	35.63	13.71	58.33	100	0	P	H
		4960	42.87	-31.13	74	56.47	34.21	11.26	59.07	100	0	P	V
		7440	44.07	-29.93	74	53.06	35.63	13.71	58.33	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (2Mbps) (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	29.7	-10.3	40	35.25	24.6	1.2	31.35	100	0	P	H
		160.14	25.04	-18.46	43.5	37.71	16.57	2.25	31.49	-	-	P	H
		207.93	32.99	-10.51	43.5	47.11	15.07	2.25	31.44	-	-	P	H
		416.2	29.28	-16.72	46	34.7	22.4	3.29	31.11	-	-	P	H
		624.1	29.3	-16.7	46	30.4	25.64	4.05	30.79	-	-	P	H
		964.3	32.86	-21.14	54	27.45	30.88	5.04	30.51	-	-	P	H
		30	28.79	-11.21	40	34.34	24.6	1.2	31.35	100	0	P	V
		82.65	18.19	-21.81	40	34.58	13.52	1.67	31.58	-	-	P	V
		207.93	27.38	-16.12	43.5	41.5	15.07	2.25	31.44	-	-	P	V
		514.2	28.97	-17.03	46	32.35	23.92	3.66	30.96	-	-	P	V
		624.1	33.3	-12.7	46	34.4	25.64	4.05	30.79	-	-	P	V
		960.1	33.67	-20.33	54	28.24	30.9	5.04	30.51	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh, and Nick Yu	Temperature :	24~26°C
		Relative Humidity :	51~53%

Note symbol





-L	Low channel location
-R	High channel location



<For Antenna 1>

2.4GHz 2400~2483.5MHz





BLE (1Mbps) (Band Edge @ 3m)

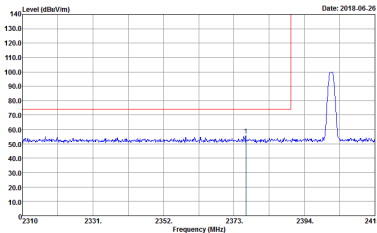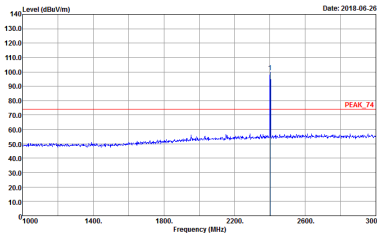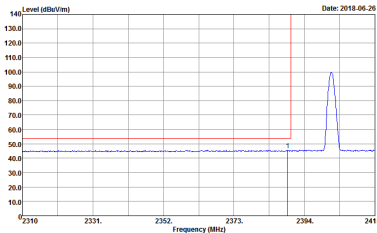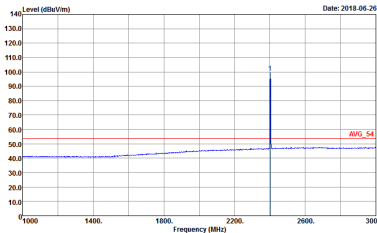BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 4	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 4
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 4	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 4





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26
Avg	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26

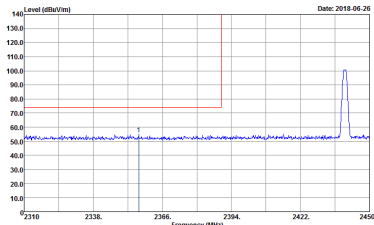
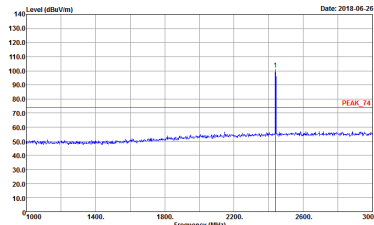
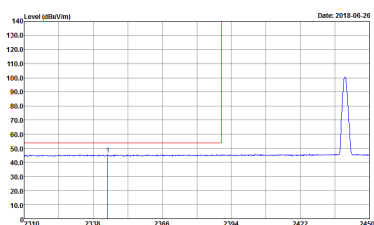
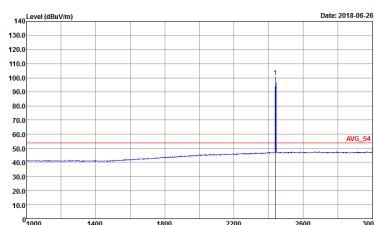


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Peak : Peak Project : 831509-01 Node : 5	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Peak : Peak Project : 831509-01 Node : 5
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3.000kHz SMT:Auto Peak : Peak Project : 831509-01 Node : 5	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3.000kHz SMT:Auto Peak : Peak Project : 831509-01 Node : 5

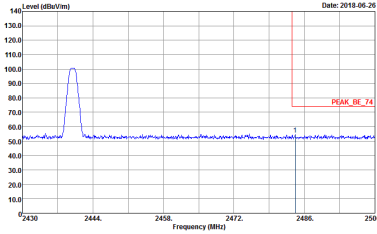
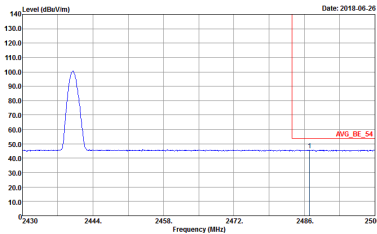


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : 831509-01 Mode : 5	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3.000kHz SMT:Auto Project : 831509-01 Mode : 5	Left blank

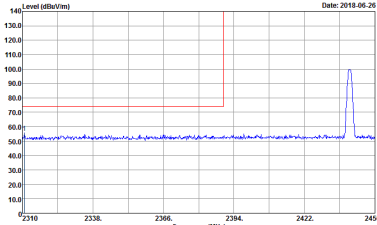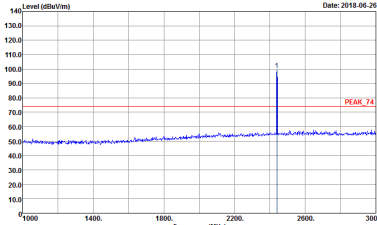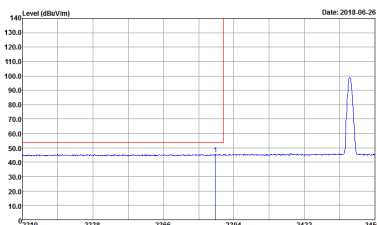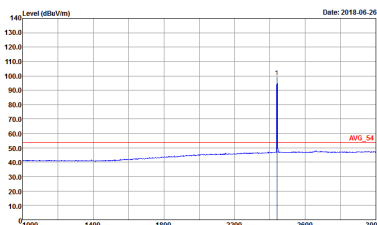

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26

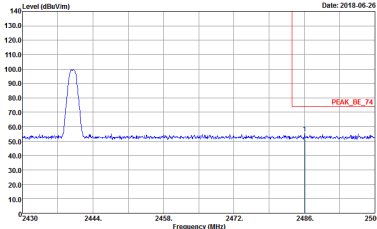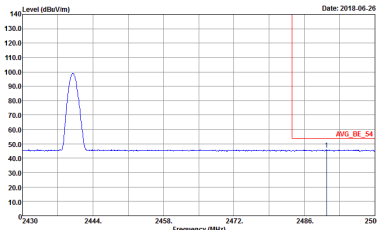

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 5	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 5	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 6	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 6
Avg.	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 6	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 6





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26
Avg.	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26



2.4GHz 2400~2483.5MHz



BLE (1Mbps) (Harmonic @ 3m)

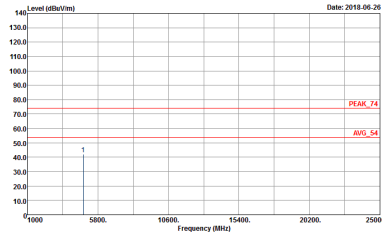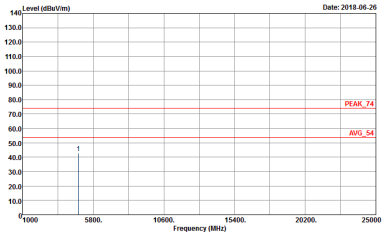BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 4	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 4



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2018-06-26 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 5	Level (dBuV/m) Date: 2018-06-26 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 5



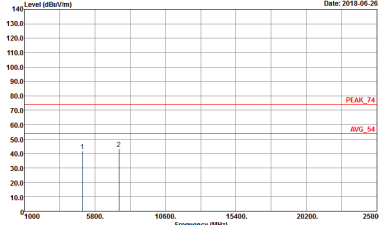
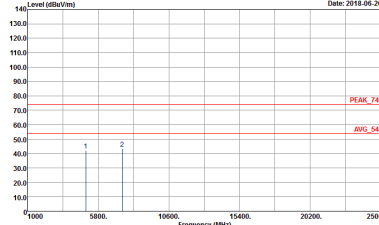


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 6	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 6



2.4GHz 2400~2483.5MHz





BLE (2Mbps) (Band Edge @ 3m)

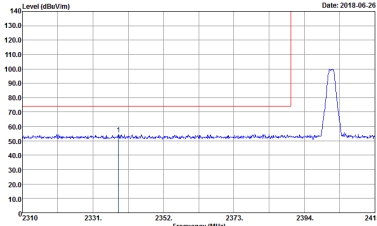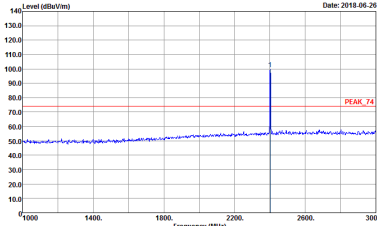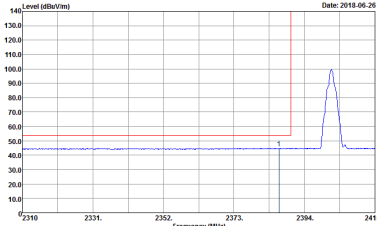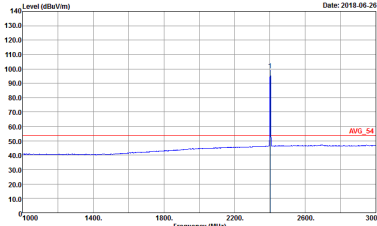BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 7	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 7
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 7	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 7





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26
Avg	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date: 2018-06-26

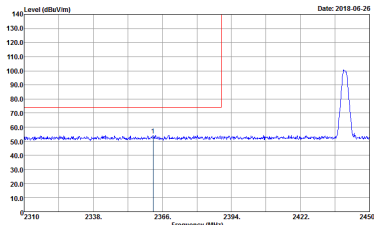
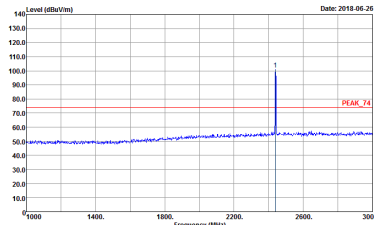
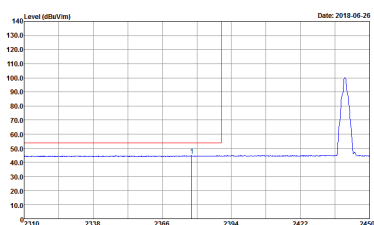
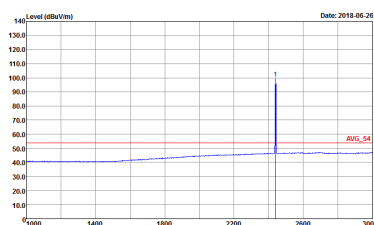


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Peak Project : 831509-01 Node : 8	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Peak Project : 831509-01 Node : 8
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:1.000kHz SMT:Auto Peak Project : 831509-01 Node : 8	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:1.000kHz SMT:Auto Peak Project : 831509-01 Node : 8

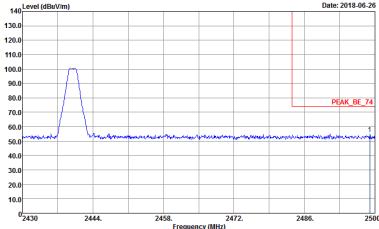
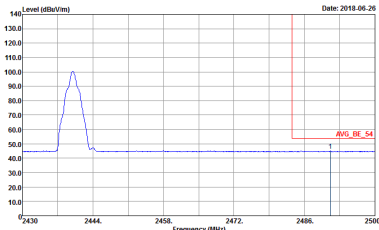


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : B	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : B	Left blank

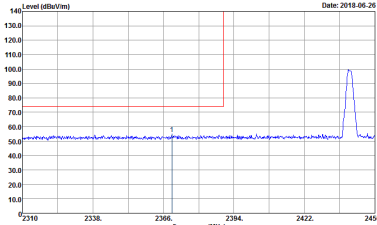
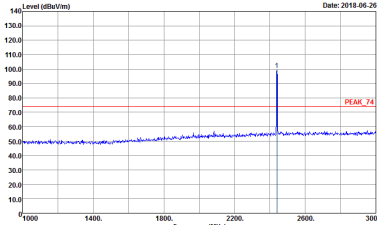
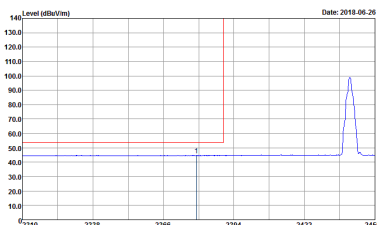
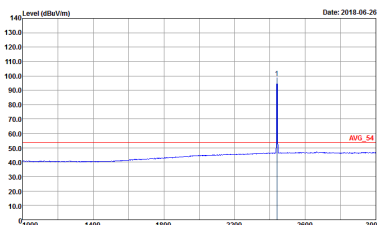


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 8	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 8
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 8	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 8

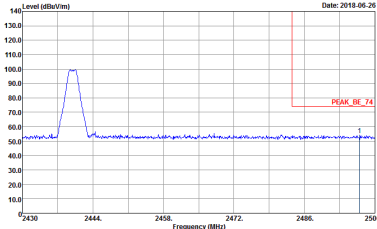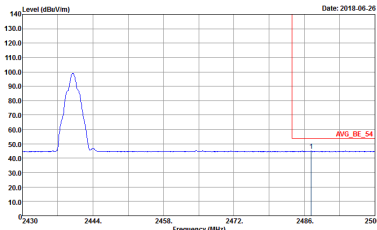

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : B	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : B	Left blank

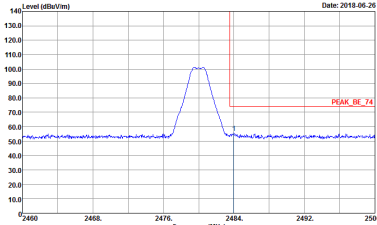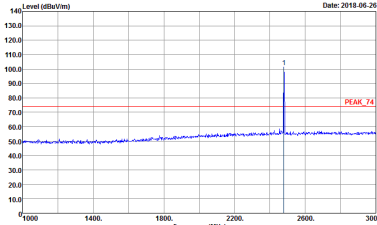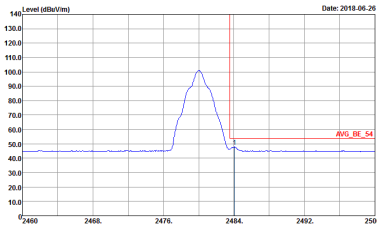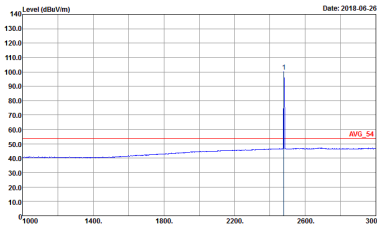

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 9	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 9
	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 9	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 9
Avg.		





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 9	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 9
Avg.	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 9	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 9



2.4GHz 2400~2483.5MHz



BLE (2Mbps) (Harmonic @ 3m)

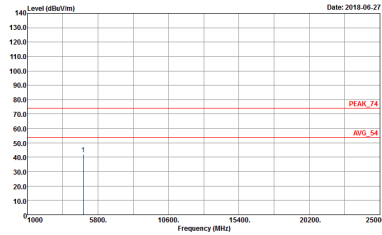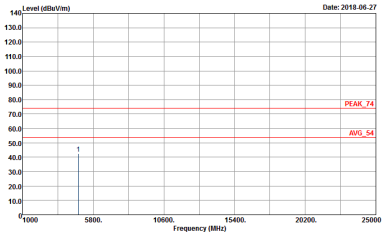BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 7	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 7





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2018.06.27 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 8	Level (dBuV/m) Date: 2018.06.27 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 8

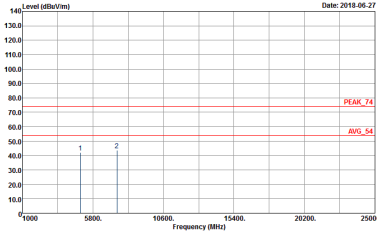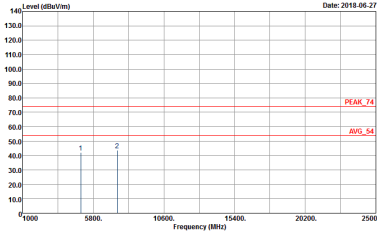

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 9	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 9



Emission below 1GHz
2.4GHz BLE (2Mbps) (LF)



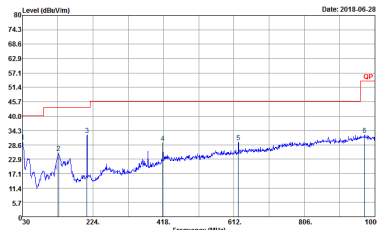
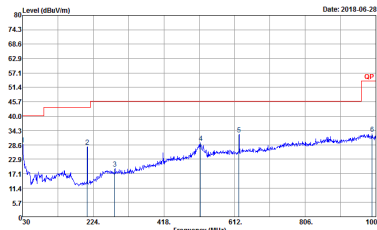
BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 831509-01 Mode : 50	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 831509-01 Mode : 50



<For Antenna 2>

2.4GHz 2400~2483.5MHz





BLE (1Mbps) (Band Edge @ 3m)

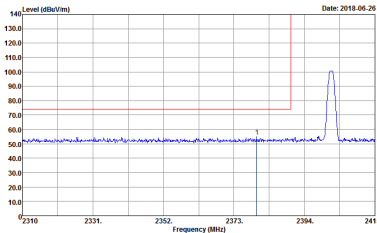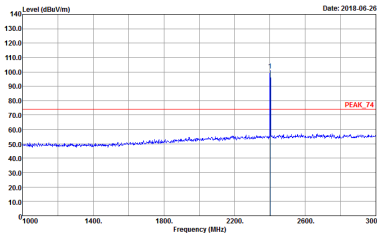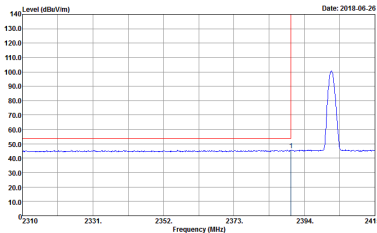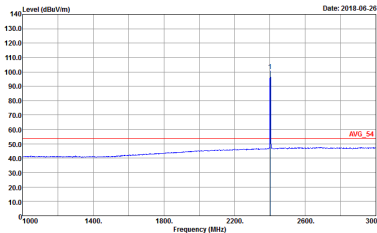BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 13	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 13
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 13	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 13





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
2	Vertical	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 13	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 13
Avg	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 13	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 13

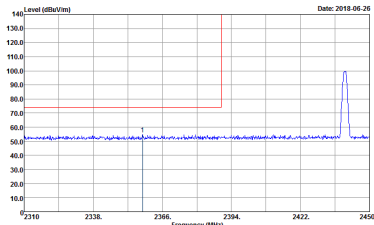
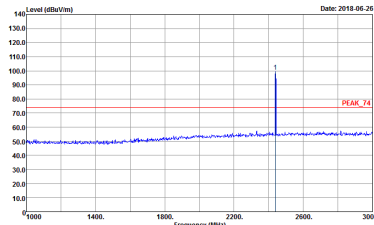
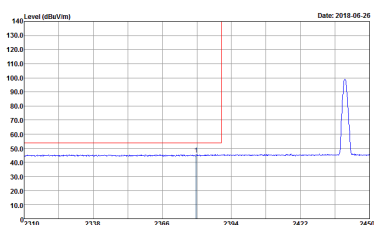
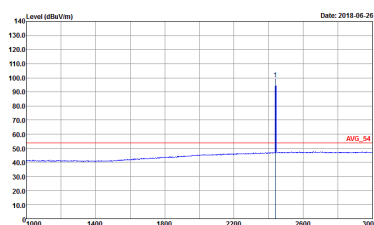


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Peak : Project : 831509-01 Node : 14	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Peak : Project : 831509-01 Node : 14
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3.000kHz SMT:Auto Peak : Project : 831509-01 Node : 14	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBN:3.000kHz SMT:Auto Peak : Project : 831509-01 Node : 14

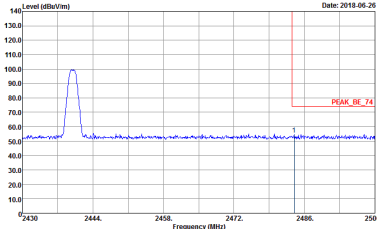
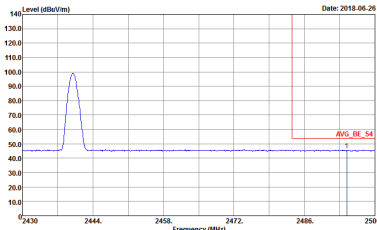


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 14	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 14	Left blank

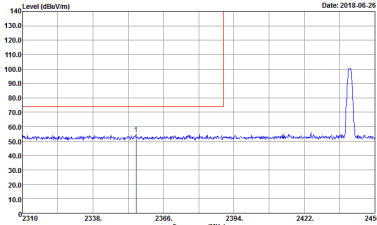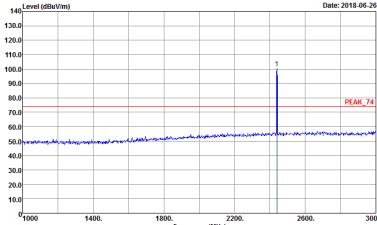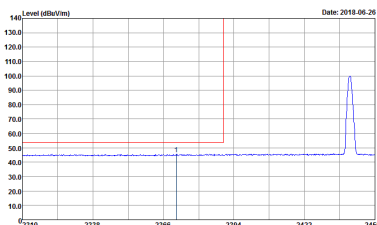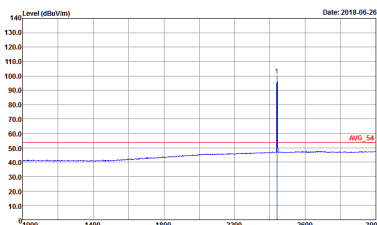

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 14	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 14
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 14	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 14



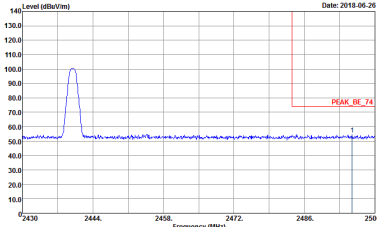
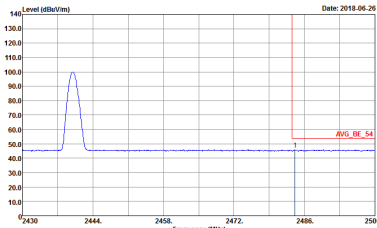


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 14	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 14	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
2	Horizontal	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 15	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 15
Avg.	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 15	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 15

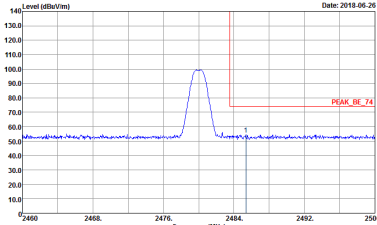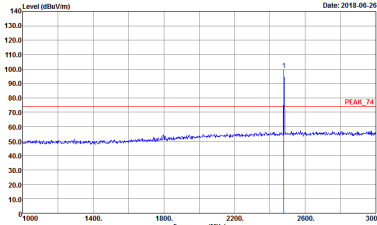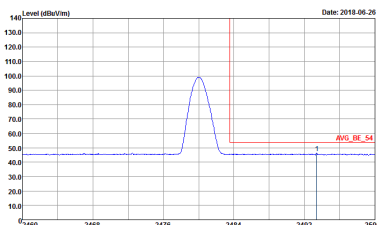
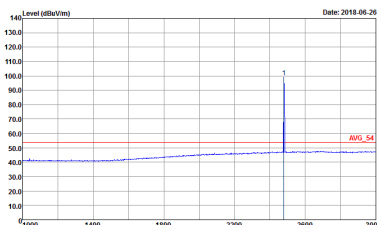


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 15	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 15
	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 15	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 15



2.4GHz 2400~2483.5MHz

BLE (1Mbps) (Harmonic @ 3m)

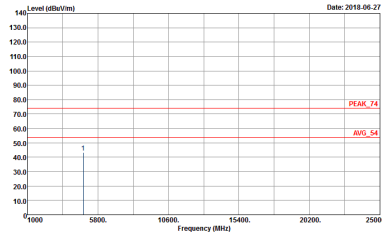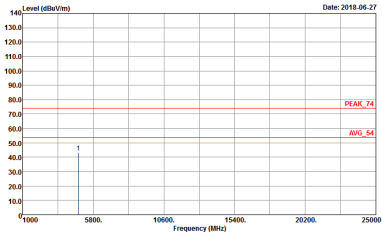BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
2	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 13	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 13







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
2	Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 14	Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 14



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
2	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2018.06.27 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 15	Level (dBuV/m) Date: 2018.06.27 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 15





2.4GHz 2400~2483.5MHz
BLE (2Mbps) (Band Edge @ 3m)

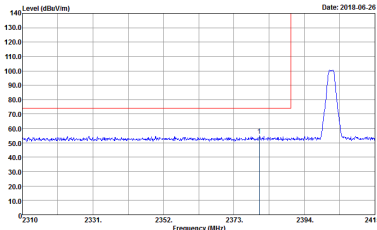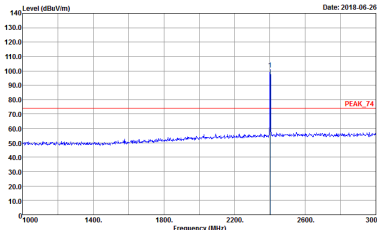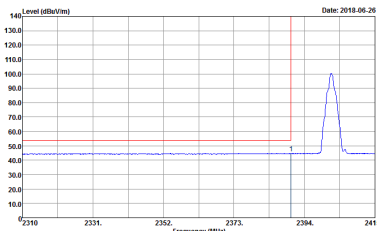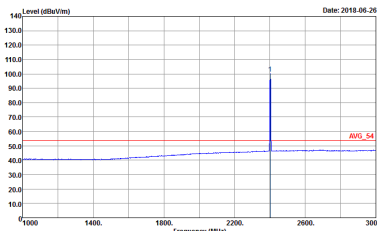BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 16	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 16
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 16	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 16





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
2	Vertical	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 16	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 16
Avg	Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 16	Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 16

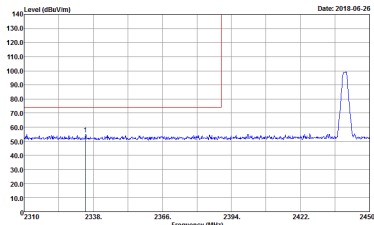
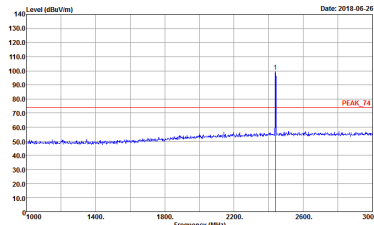
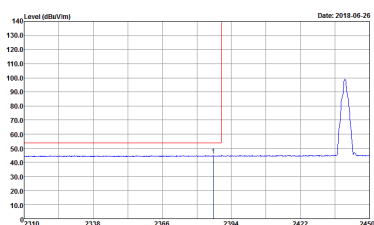
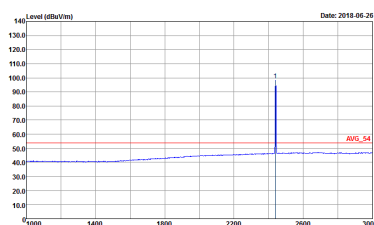


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000KHz VBN:3000.000KHz SMT:Auto Peak : Project : 831509-01 Node : 17	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000KHz VBN:3000.000KHz SMT:Auto Peak : Project : 831509-01 Node : 17
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000KHz VBN:1.000KHz SMT:Auto Peak : Project : 831509-01 Node : 17	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000KHz VBN:1.000KHz SMT:Auto Peak : Project : 831509-01 Node : 17

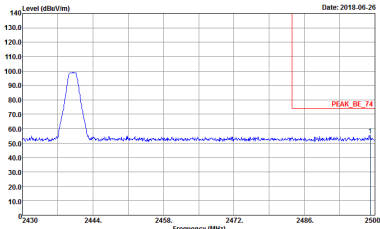
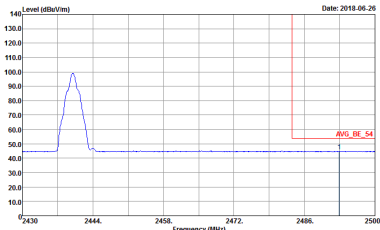


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 17	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 17	Left blank

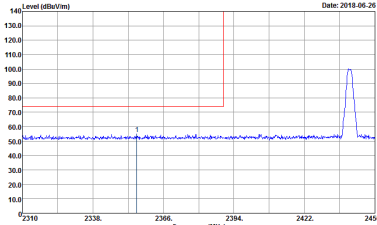
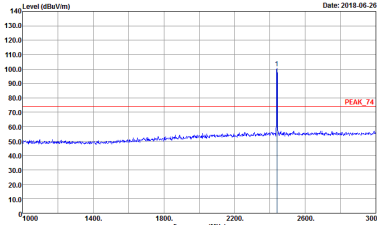
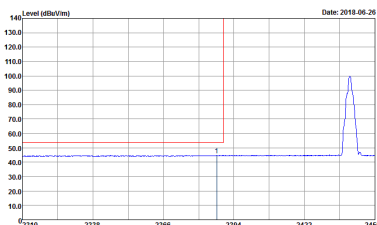
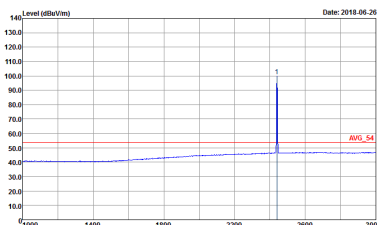


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date : 2018-06-26	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date : 2018-06-26
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date : 2018-06-26	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:1.000kHz SMT:Auto Project : Peak Mode : 831509-01 Date : 2018-06-26



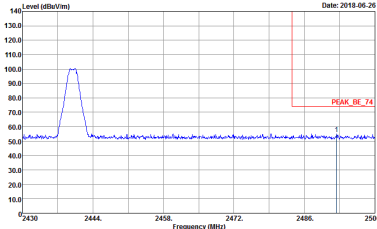
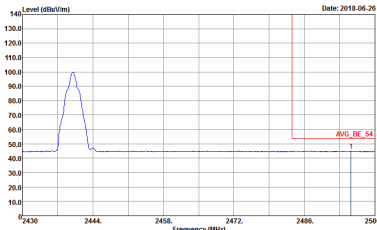


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 17	Left blank
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 17	Left blank

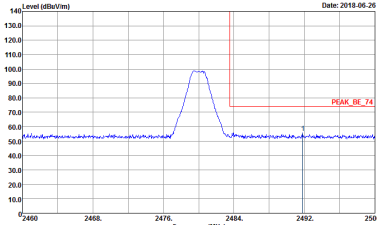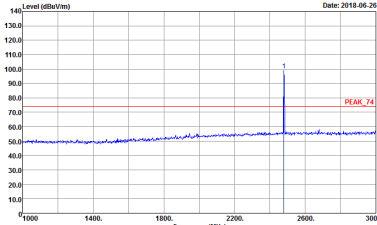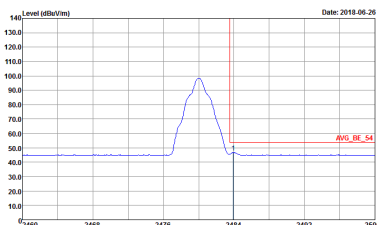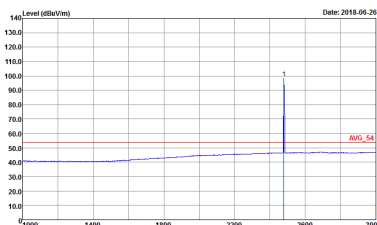

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 18	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 18
Avg.	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 18	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 18

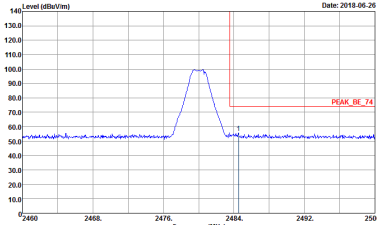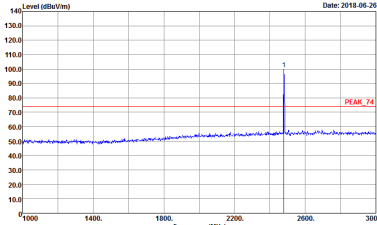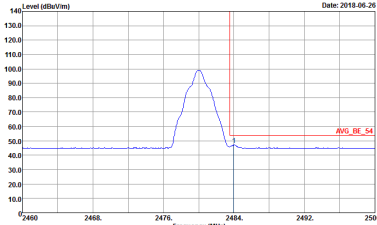
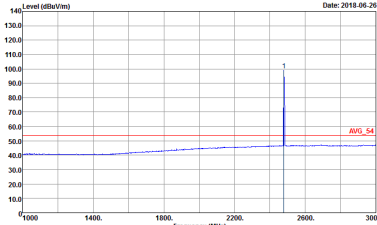


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 18	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 18
	 Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 18	 Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 18





2.4GHz 2400~2483.5MHz

BLE (2Mbps) (Harmonic @ 3m)

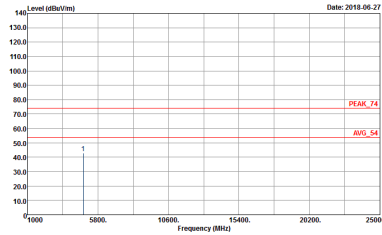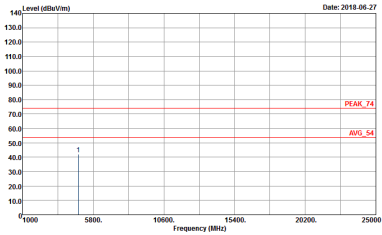BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
2	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 16	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 16

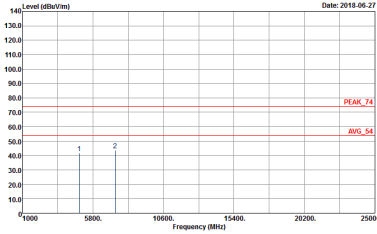
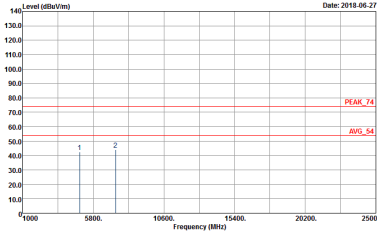


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
2	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 17	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 17



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
2	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2018.06.27 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 18	Level (dBuV/m) Date: 2018.06.27 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 18

Emission below 1GHz
2.4GHz BLE (2Mbps) (LF)

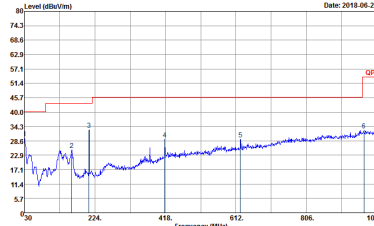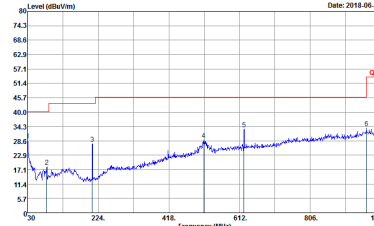
BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
2	Horizontal	Vertical
QP / Peak	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 831509-01 Mode : S2	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 831509-01 Mode : S2

Appendix E. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1	Bluetooth – LE for 1Mbps	59.62	372.00	2.69	3kHz	2.25
1	Bluetooth - LE for 2Mbps	55.32	1040.00	0.96	1kHz	2.57
2	Bluetooth - LE for 1Mbps	59.62	372.00	2.69	3kHz	2.25
2	Bluetooth - LE for 2Mbps	55.32	1040.00	0.96	1kHz	2.57

<Antenna 1>


Bluetooth – LE for 1Mbps

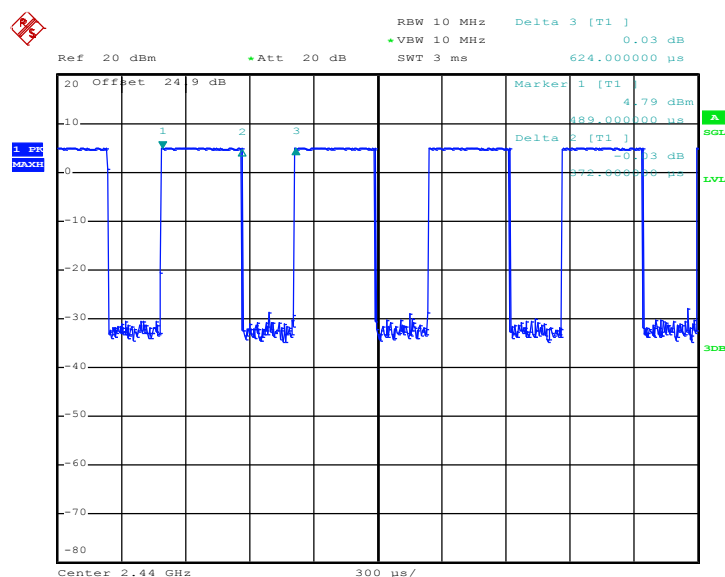

Date: 29.JUN.2018 01:45:26

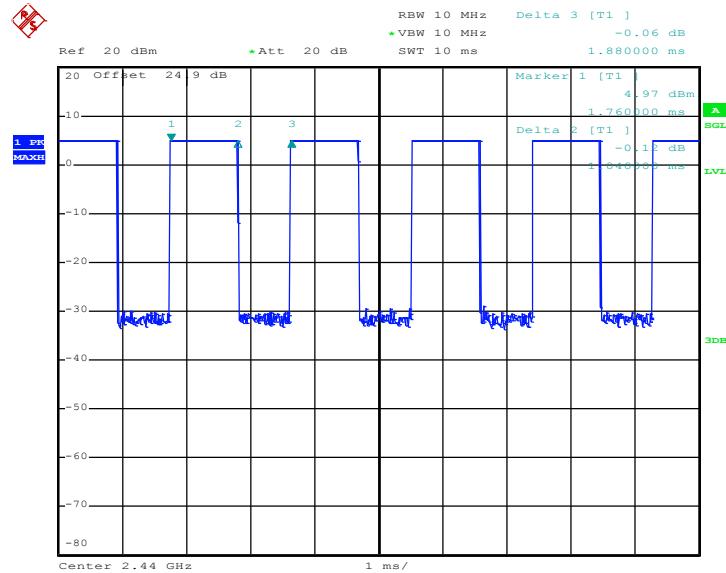Bluetooth – LE for 2Mbps


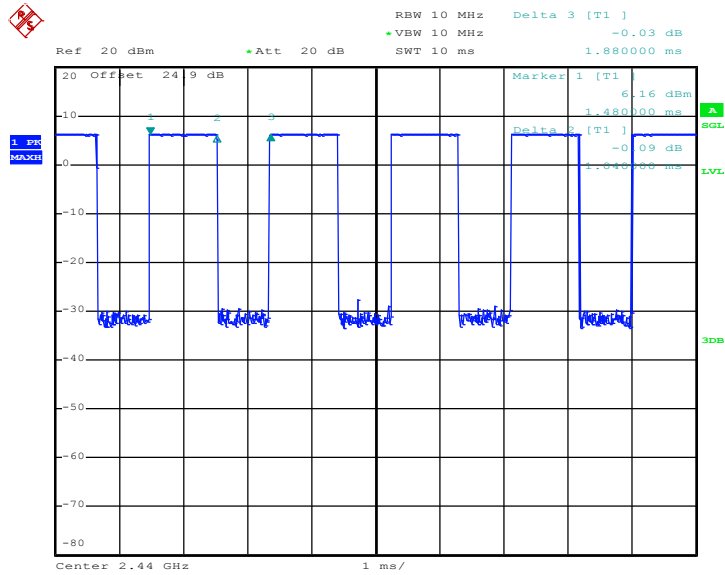
Date: 29.JUN.2018 02:09:41
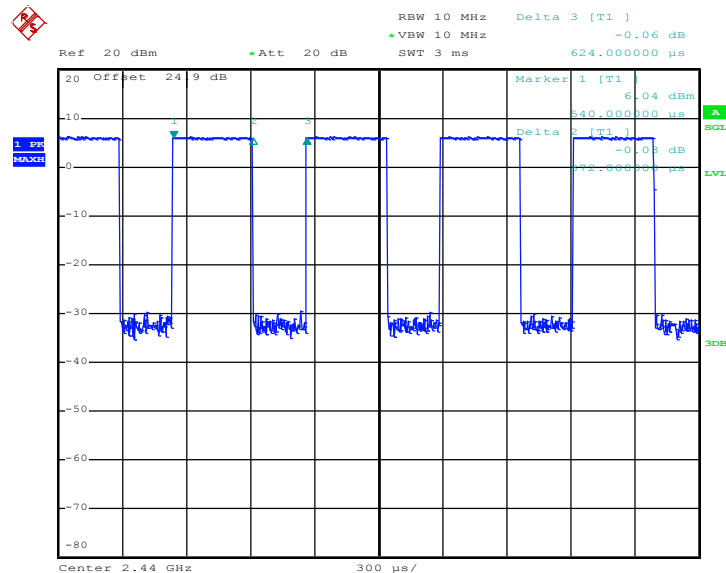
<Antenna 2>
Bluetooth – LE for 1Mbps


Date: 29.JUN.2018 02:47:25



Bluetooth – LE for 2Mbps



Date: 29.JUN.2018 03:06:02

————THE END————