



FCC RADIO TEST REPORT

FCC ID : 2AOAI-5432
Equipment : Digital Media Receiver
Model Name : L9D29R
Applicant : Reny7 LLC
6701 Democracy Blvd. Suite 300
Bethesda, Maryland, 20817
Standard : FCC Part 15 Subpart C §15.247

The testing was completed on Jul. 06, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	21
3.3 Power Spectral Density Measurement	22
3.4 Conducted Band Edges and Spurious Emission Measurement	31
3.5 Radiated Band Edges and Spurious Emission Measurement	40
3.6 AC Conducted Emission Measurement.....	44
3.7 Antenna Requirements.....	46
4 List of Measuring Equipment	47
5 Uncertainty of Evaluation.....	49
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR830922-01B	01	Initial issue of report	Jul. 17, 2018

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.247(a)(2)	6dB Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.247(b)(3)	Peak Output Power	Pass
3.3	15.247(e)	Power Spectral Density	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass
3.6	15.207	AC Conducted Emission	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass

Reviewed by: Joseph Lin

Report Producer: Polly Tsai

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	L9D29R
FCC ID	2AOAI-5432
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE Zigbee

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	2.78 dBm (0.0019 W) for 1Mbps 2.80 dBm (0.0019 W) for 2Mbps
99% Occupied Bandwidth	1.036MHz for 1Mbps 2.092MHz for 2Mbps
Antenna Type / Gain	Fixed Internal Antenna type with gain 4.30 dBi
Type of Modulation	Bluetooth LE : GFSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Play News + Adapter
	Mode 2 :Bluetooth Link + Play MP3 + Adapter
Remark: The worst case of conducted emission is mode 2; only the test data of it was reported.	


2.3 Connection Diagram of Test System

<Bluetooth – LE Tx Mode>

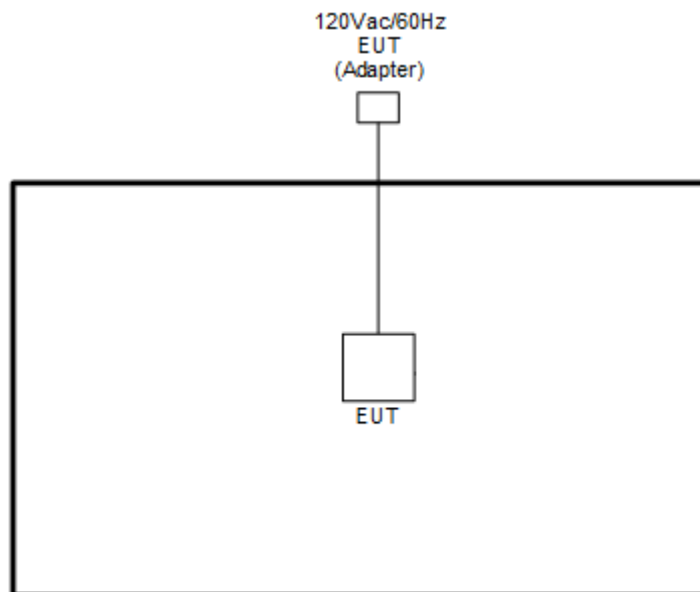

<AC Conducted Emission Mode for Playing News>

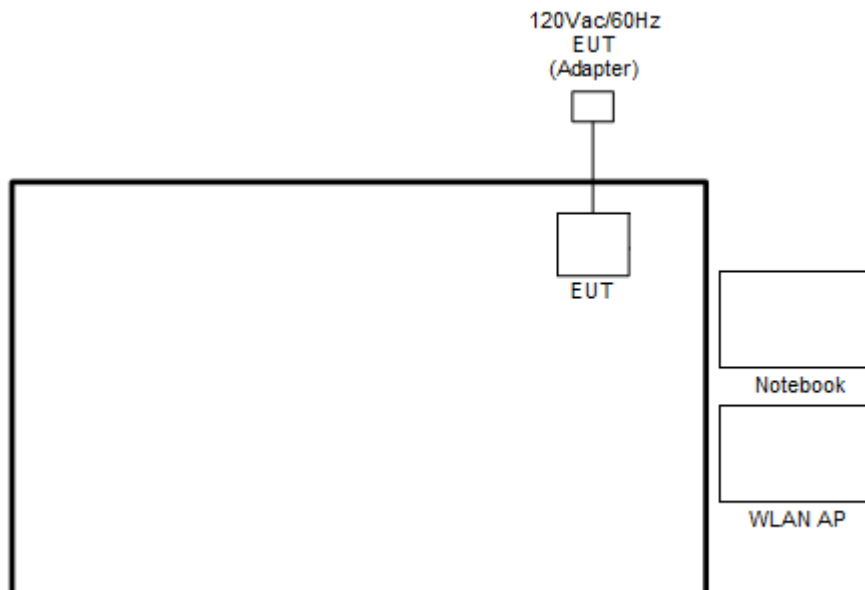
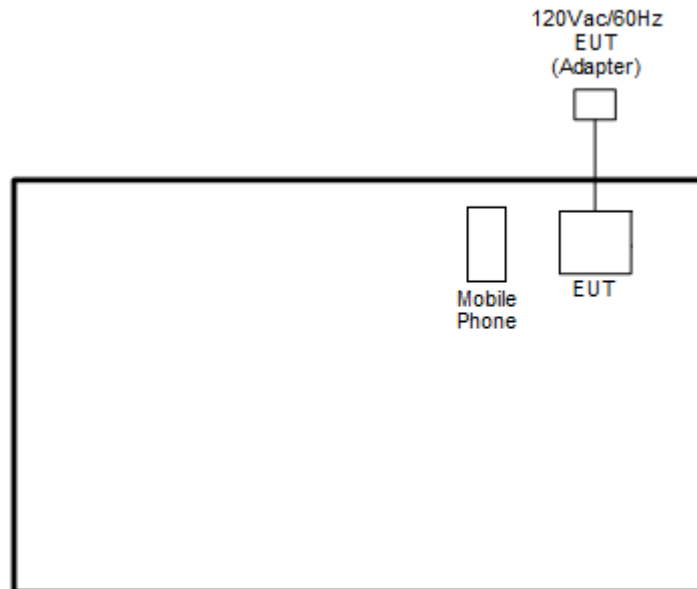
<AC Conducted Emission Mode for Playing MP3>

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Smart Phone	Acer	Z530	HLZDMZ530	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “Compliance Tool” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

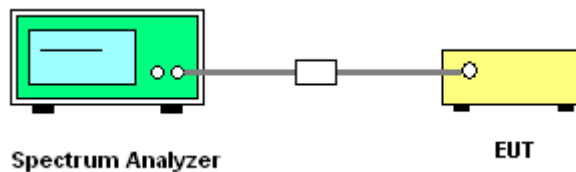


3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

<1Mbps>


6 dB Bandwidth Plot on Channel 00

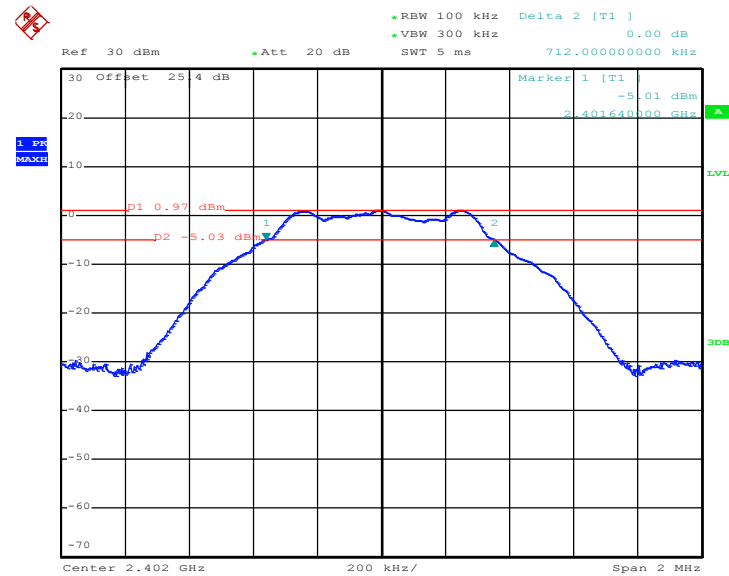

Date: 6.JUL.2018 06:35:25




6 dB Bandwidth Plot on Channel 19

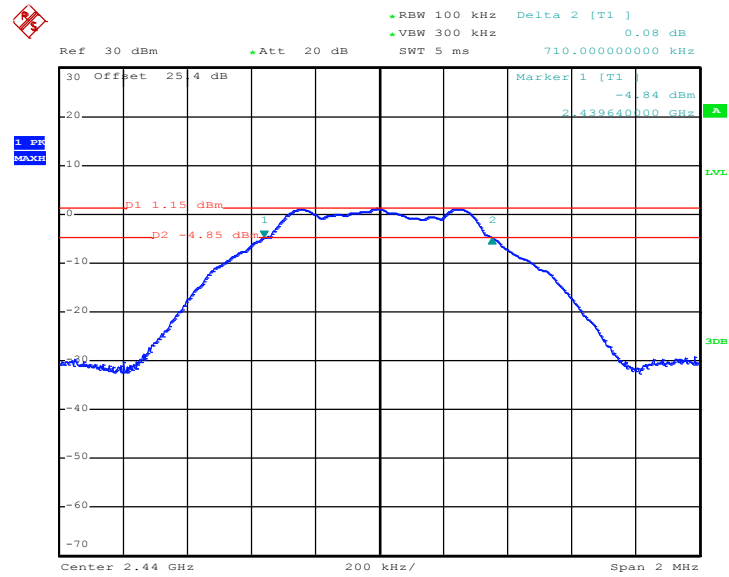

Date: 6.JUL.2018 06:48:10

6 dB Bandwidth Plot on Channel 39

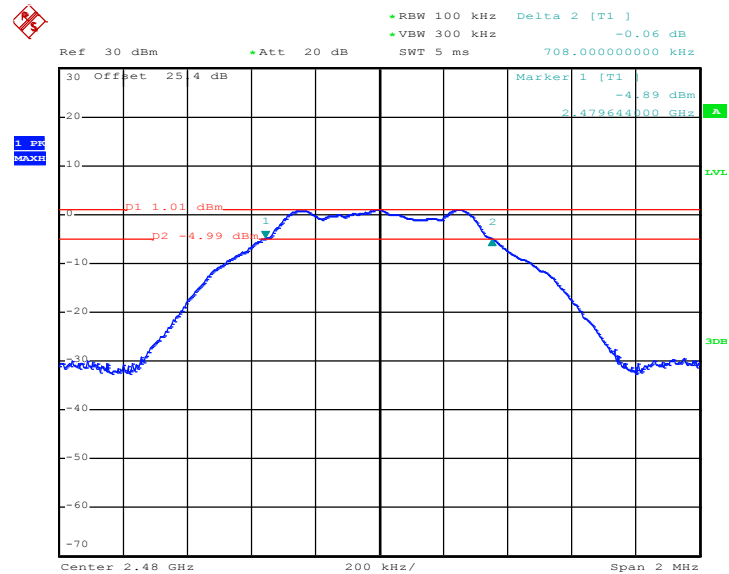


Date: 6.JUL.2018 06:53:40



<2Mbps>


6 dB Bandwidth Plot on Channel 00

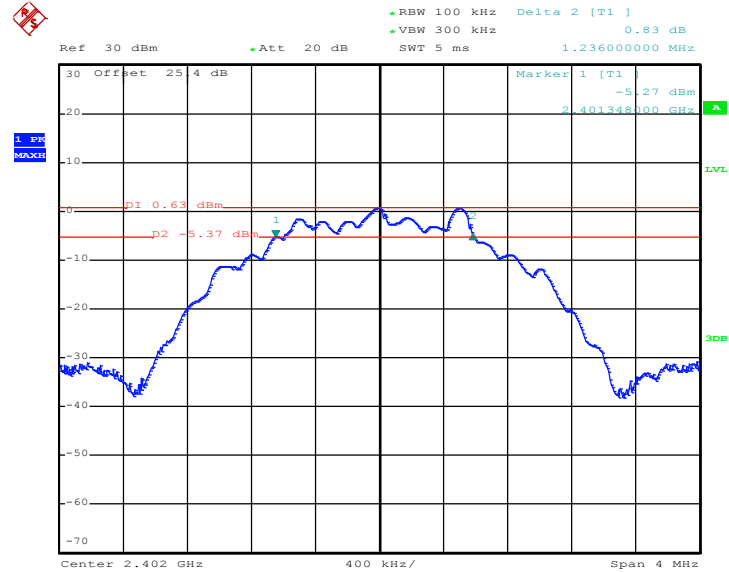

Date: 6.JUL.2018 07:01:56




6 dB Bandwidth Plot on Channel 19

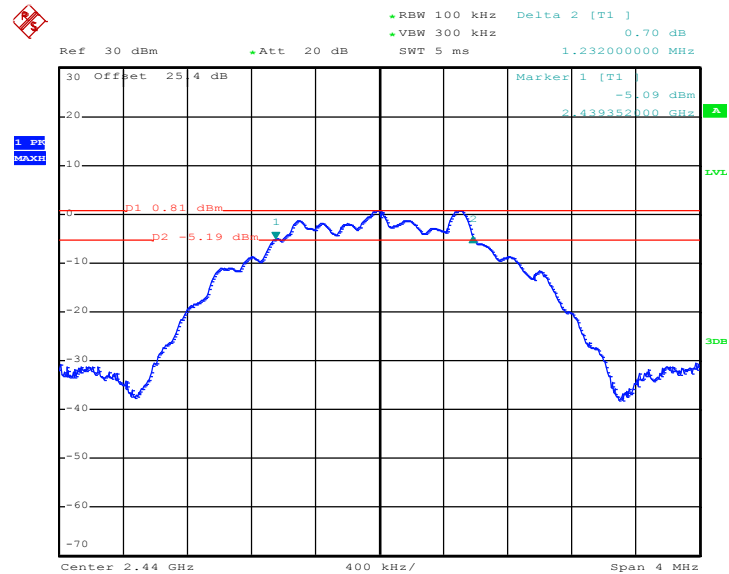

Date: 6.JUL.2018 07:09:54

6 dB Bandwidth Plot on Channel 39

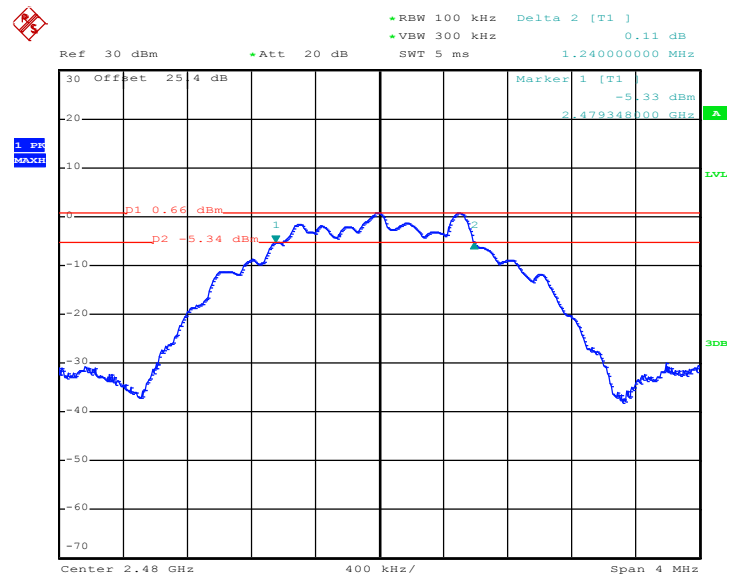

Date: 6.JUL.2018 07:15:03




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

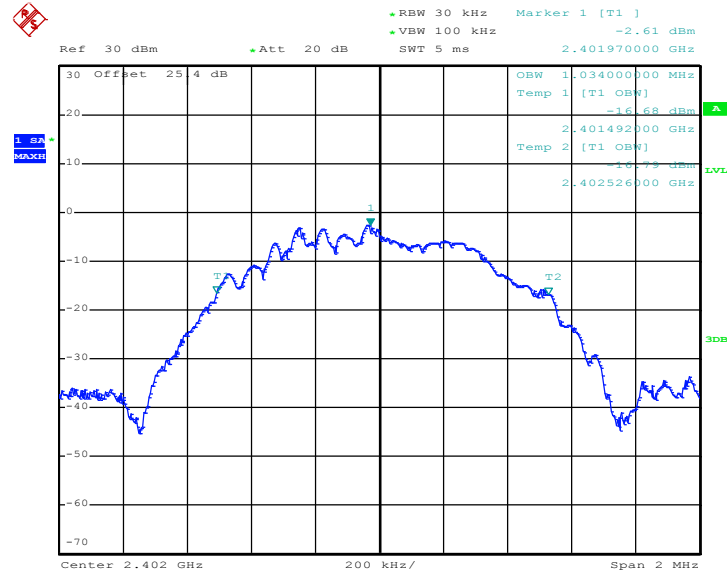

Date: 6.JUL.2018 06:45:10




99% Occupied Bandwidth Plot on Channel 19

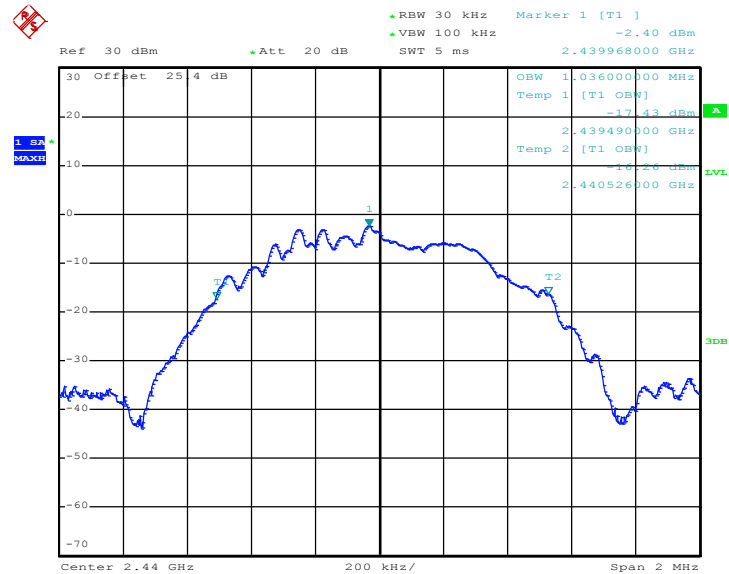

Date: 6.JUL.2018 06:51:02

99% Occupied Bandwidth Plot on Channel 39

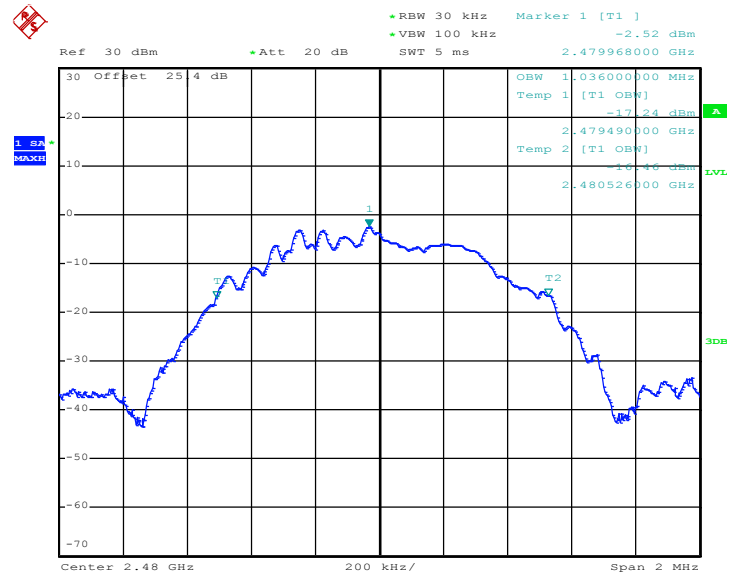


Date: 6.JUL.2018 06:58:46



<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

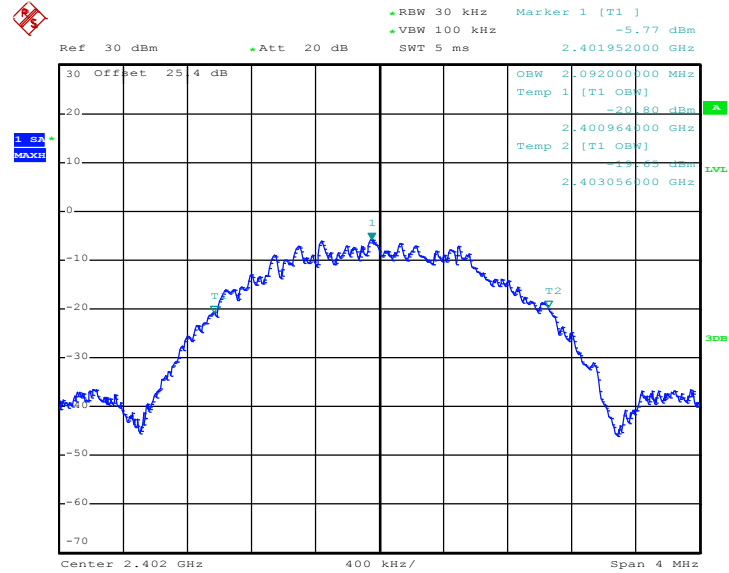

Date: 6.JUL.2018 07:08:00




99% Occupied Bandwidth Plot on Channel 19

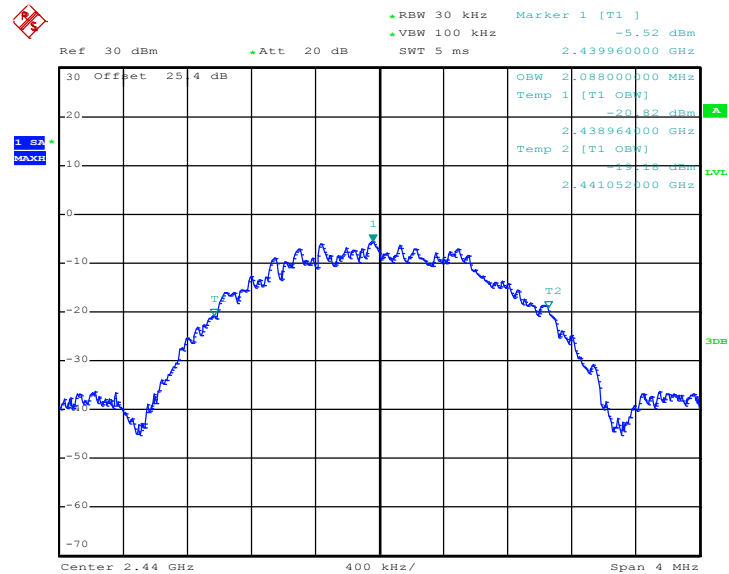

Date: 6.JUL.2018 07:13:00

99% Occupied Bandwidth Plot on Channel 39

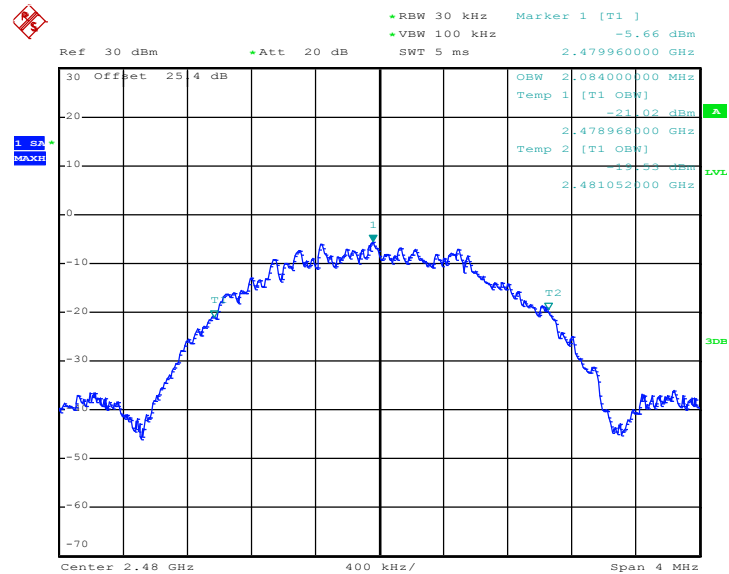

Date: 6.JUL.2018 07:19:28

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. For Average Power, the testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.2.3.1 Method AVGPM.
3. The RF output of EUT was connected to the power meter by RF cable and attenuator.
4. The path loss was compensated to the results for each measurement.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

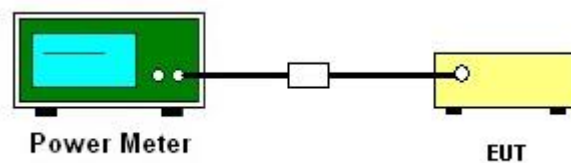

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

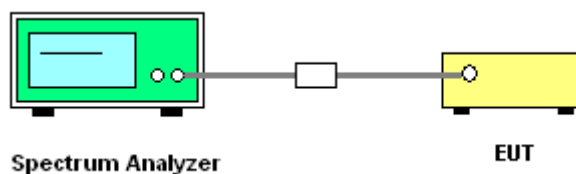

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<1Mbps>

PSD 100kHz Plot on Channel 00

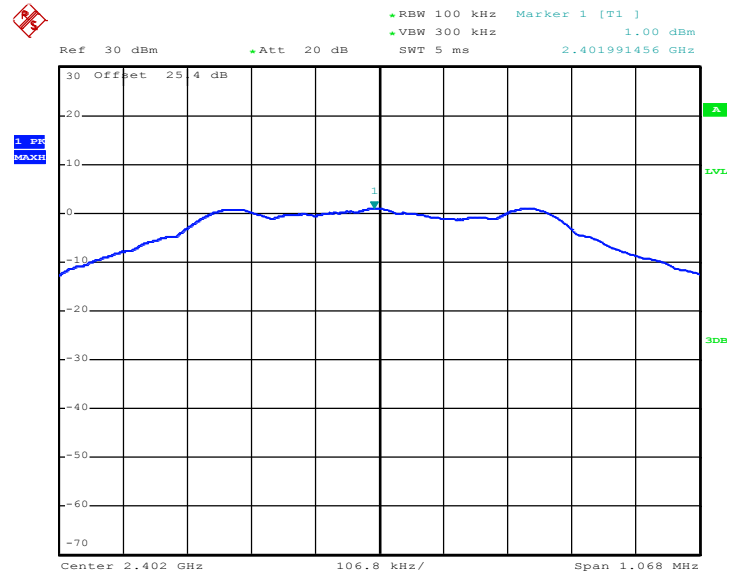

Date: 6.JUL.2018 06:40:19


PSD 100kHz Plot on Channel 19

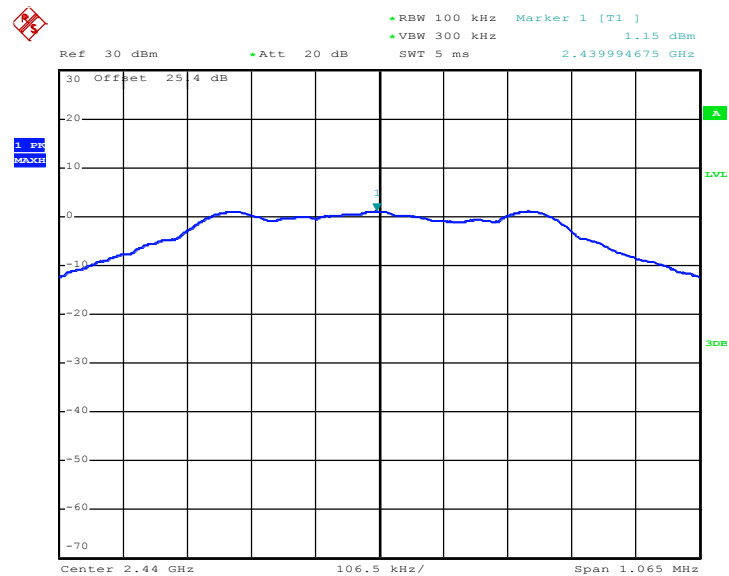

Date: 6.JUL.2018 06:49:07



PSD 100kHz Plot on Channel 39

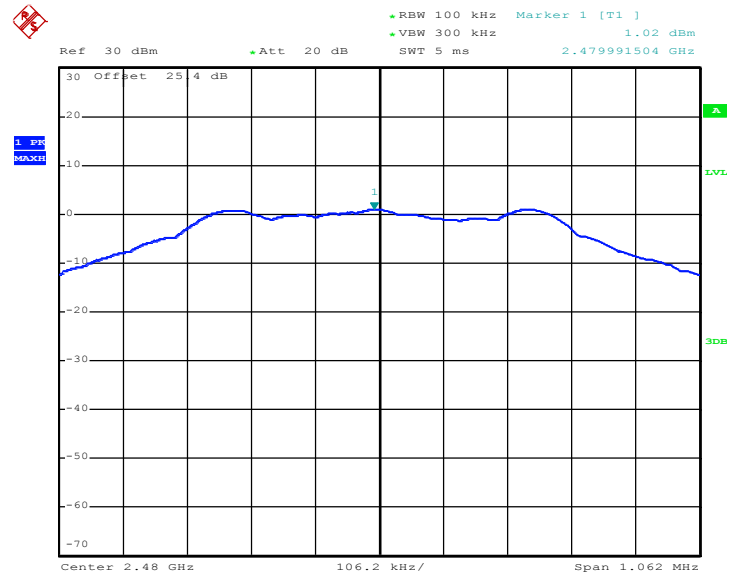


Date: 6.JUL.2018 06:55:02




<2Mbps>

PSD 100kHz Plot on Channel 00

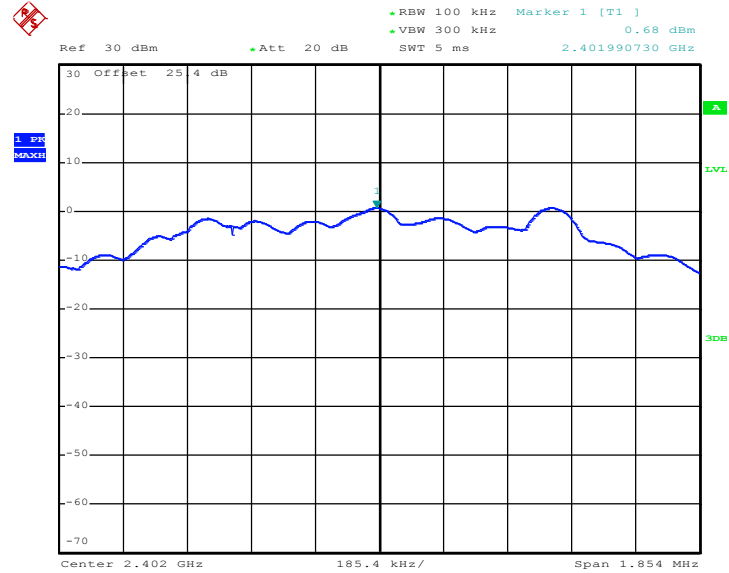

Date: 6.JUL.2018 07:05:21


PSD 100kHz Plot on Channel 19

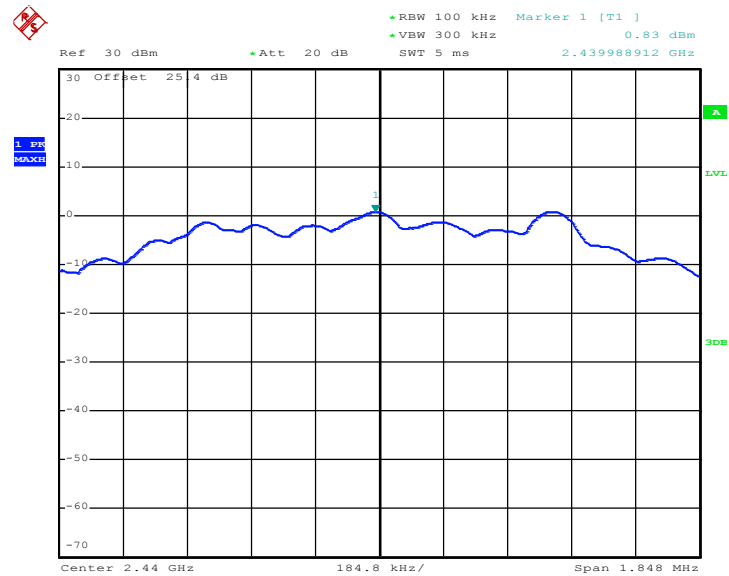

Date: 6.JUL.2018 07:11:14



PSD 100kHz Plot on Channel 39

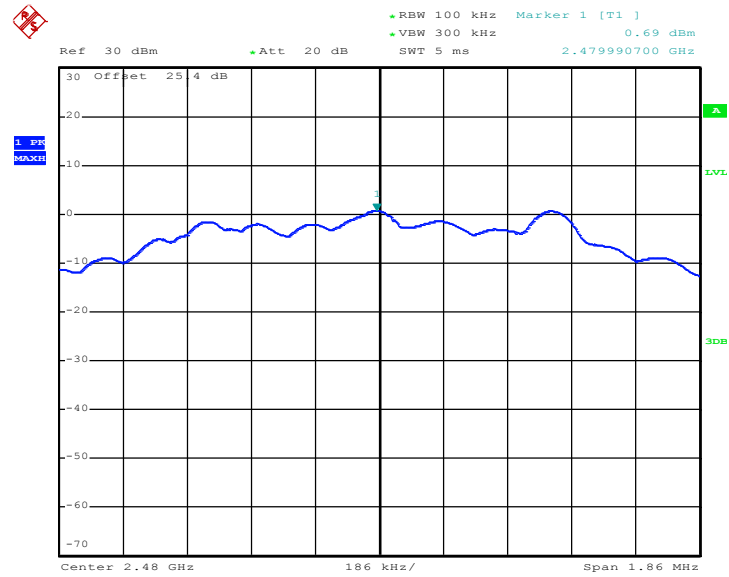


Date: 6.JUL.2018 07:16:54



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<1Mbps>

PSD 3kHz Plot on Channel 00

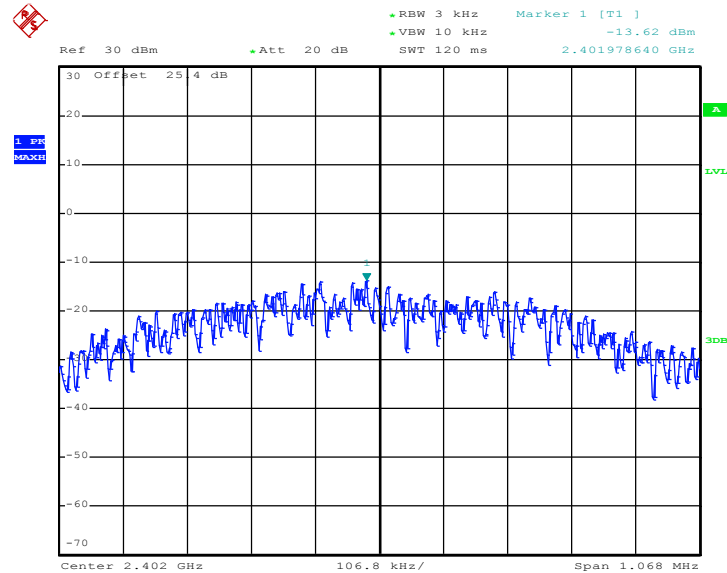

Date: 6.JUL.2018 06:39:48


PSD 3kHz Plot on Channel 19

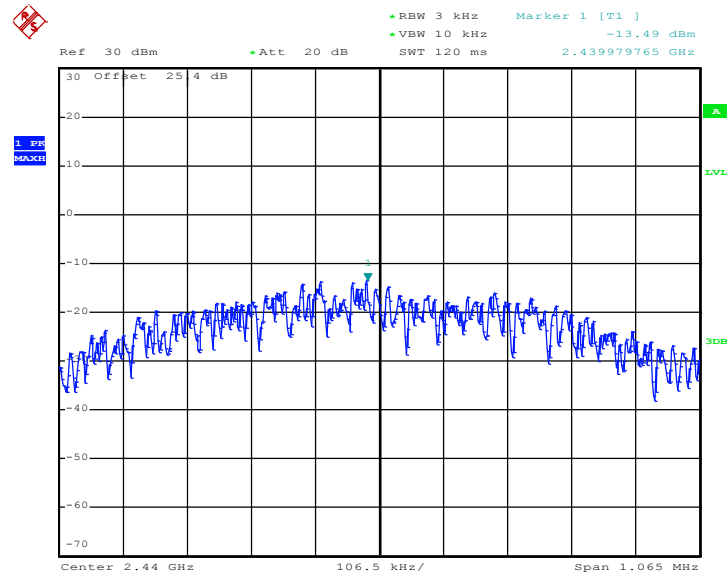

Date: 6.JUL.2018 06:48:52



PSD 3kHz Plot on Channel 39

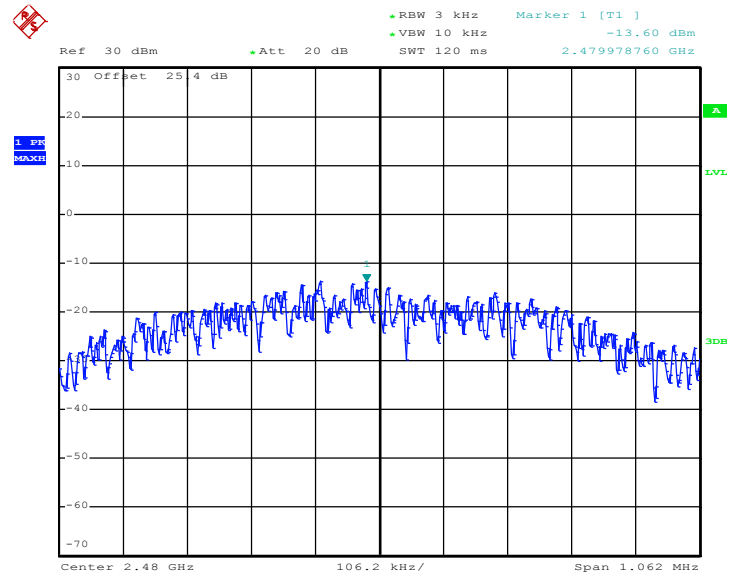


Date: 6.JUL.2018 06:54:34




<2Mbps>

PSD 3kHz Plot on Channel 00

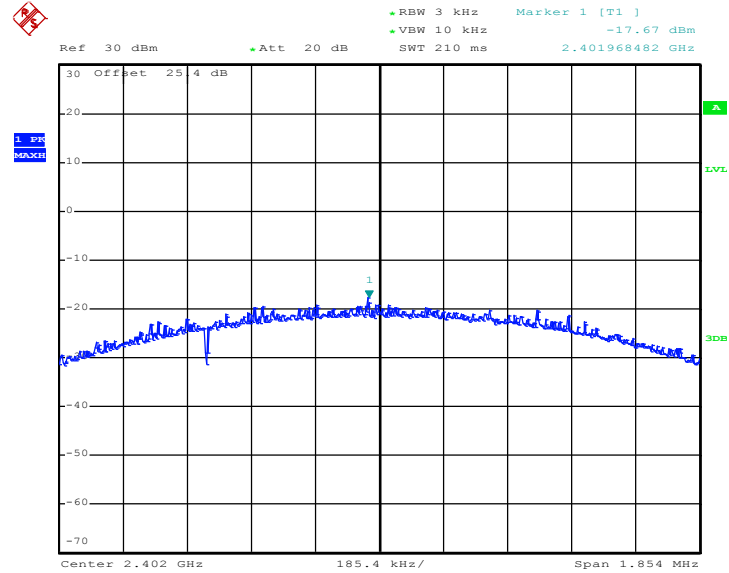

Date: 6.JUL.2018 07:03:47


PSD 3kHz Plot on Channel 19

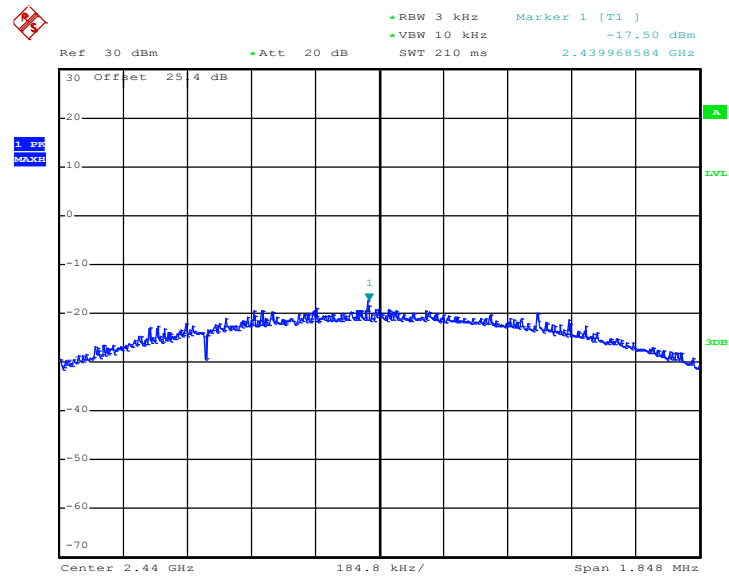

Date: 6.JUL.2018 07:10:29



PSD 3kHz Plot on Channel 39

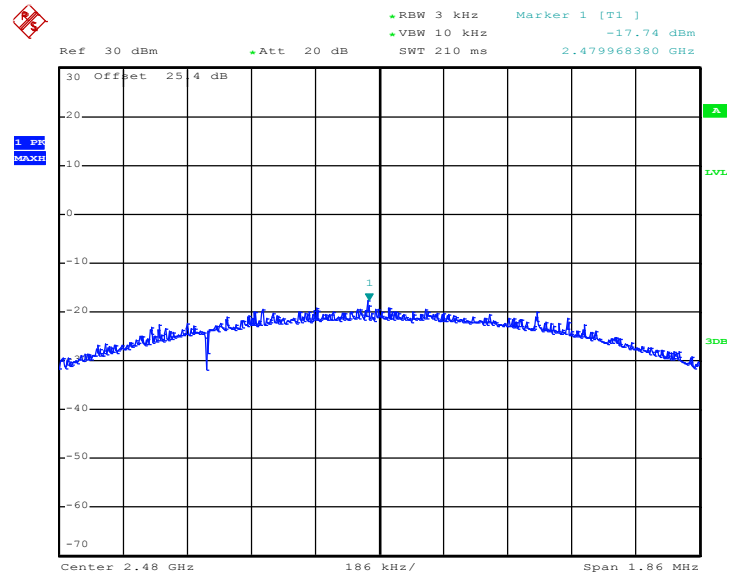

Date: 6.JUL.2018 07:16:21

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

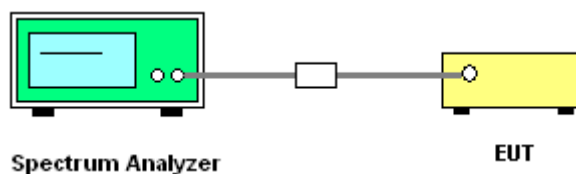







<2Mbps>

Low Band Edge Plot on Channel 00

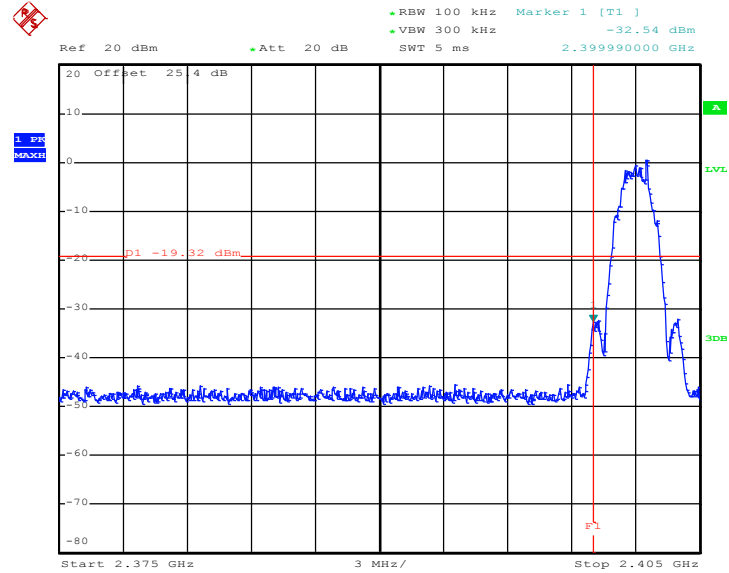

Date: 6.JUL.2018 07:05:51

High Band Edge Plot on Channel 39

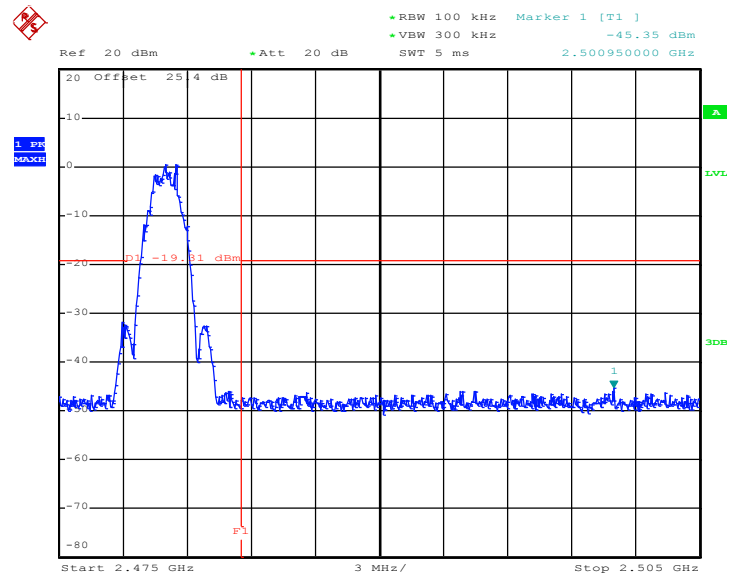


Date: 6.JUL.2018 07:17:16




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

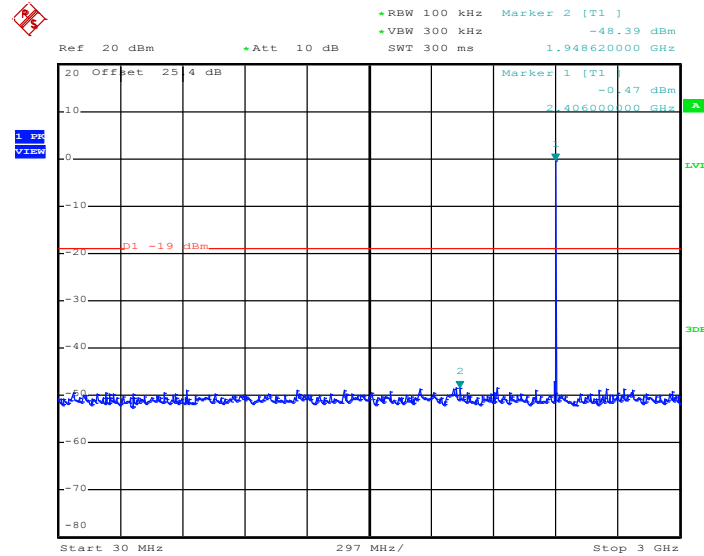

Date: 6.JUL.2018 06:43:35


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

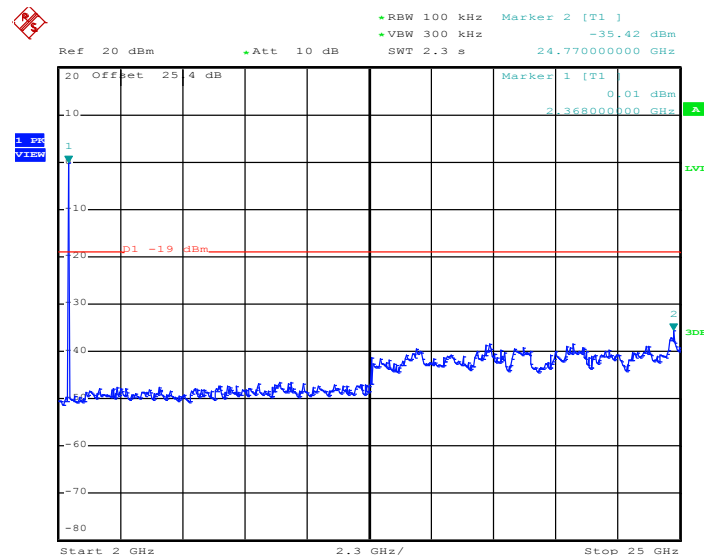

Date: 6.JUL.2018 06:43:59




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

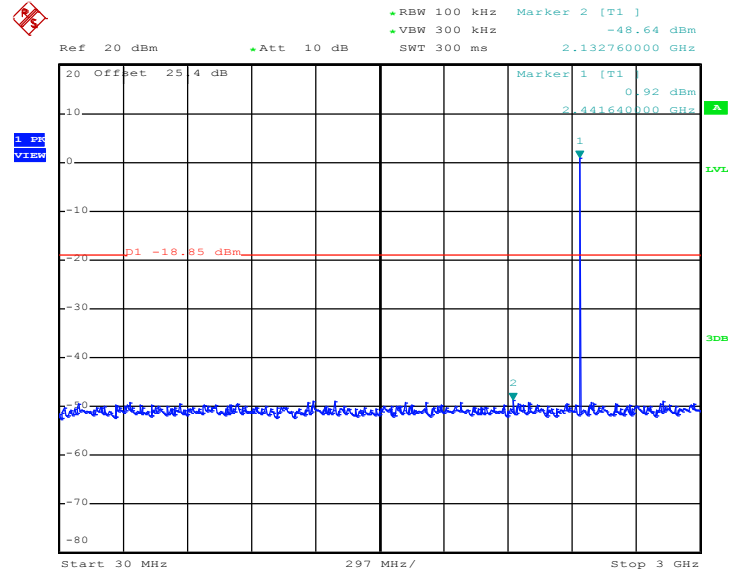

Date: 6.JUL.2018 06:49:57


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

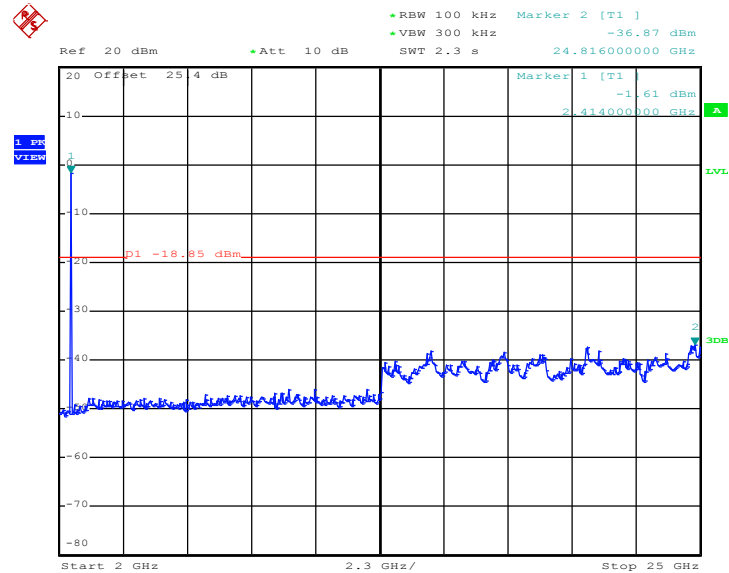

Date: 6.JUL.2018 06:50:17




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

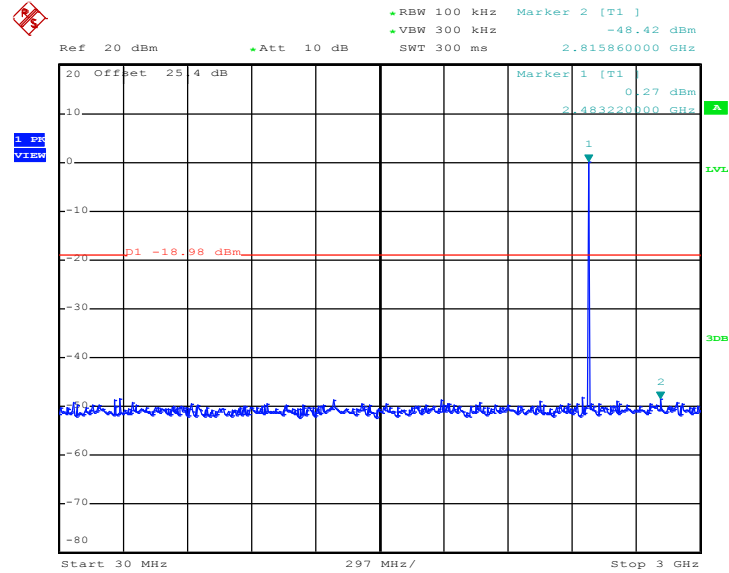


Date: 6.JUL.2018 06:57:49


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

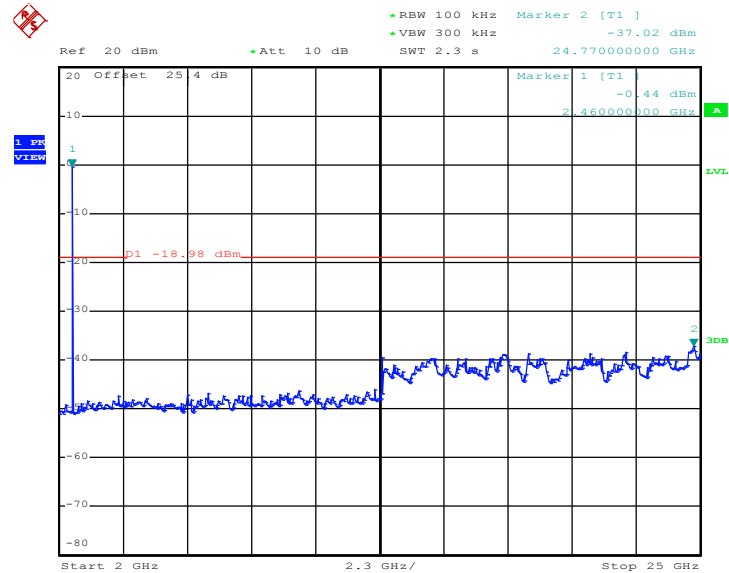

Date: 6.JUL.2018 06:58:06

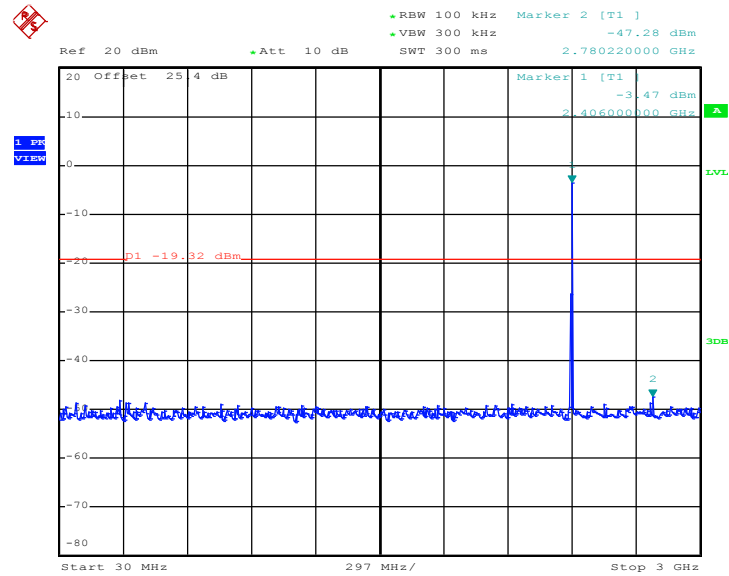**Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00**


Date: 6.JUL.2018 07:07:02

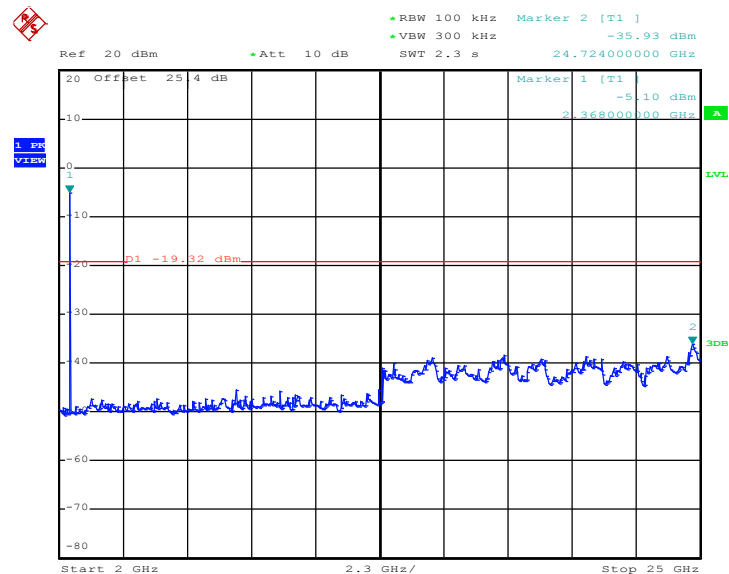**Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00**

Date: 6.JUL.2018 07:07:17




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

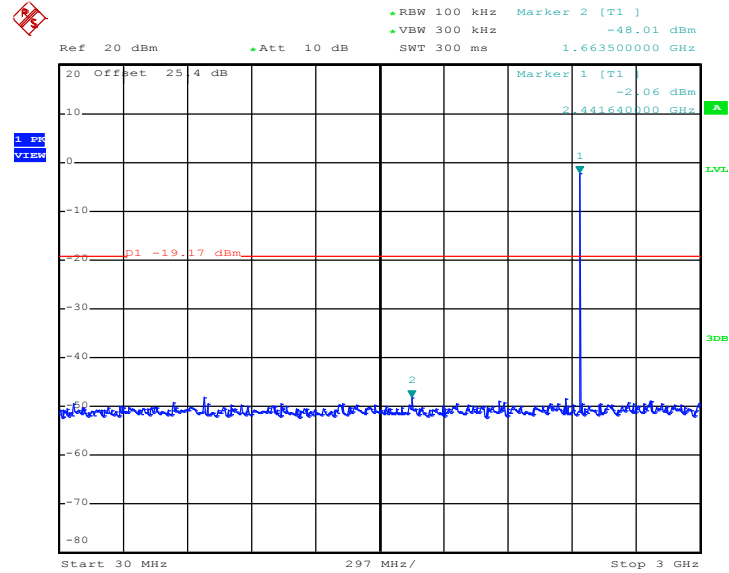


Date: 6.JUL.2018 07:11:49

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

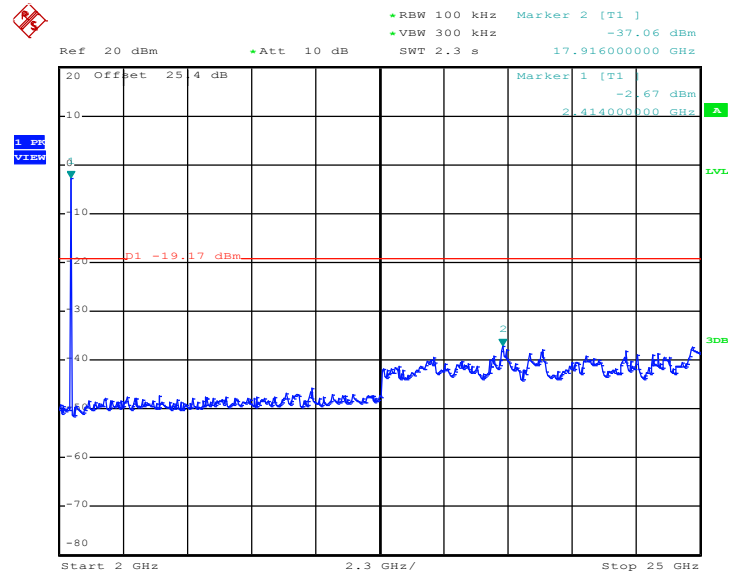


Date: 6.JUL.2018 07:12:20

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

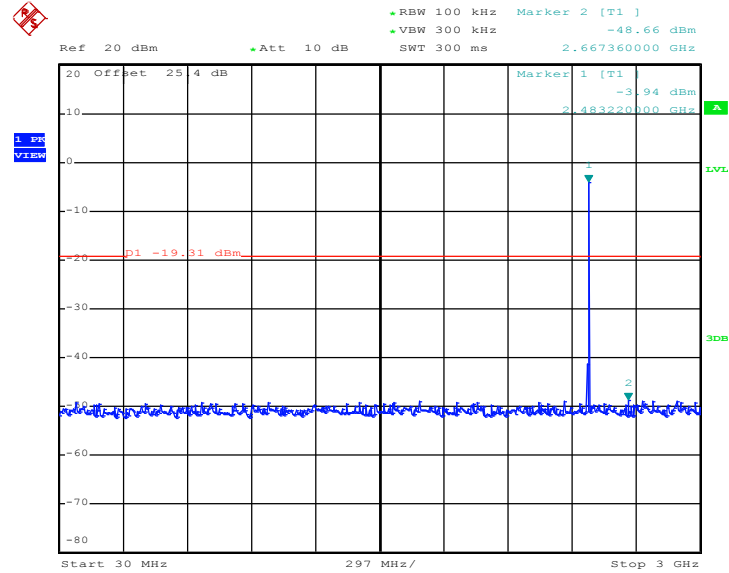

Date: 6.JUL.2018 07:18:39

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

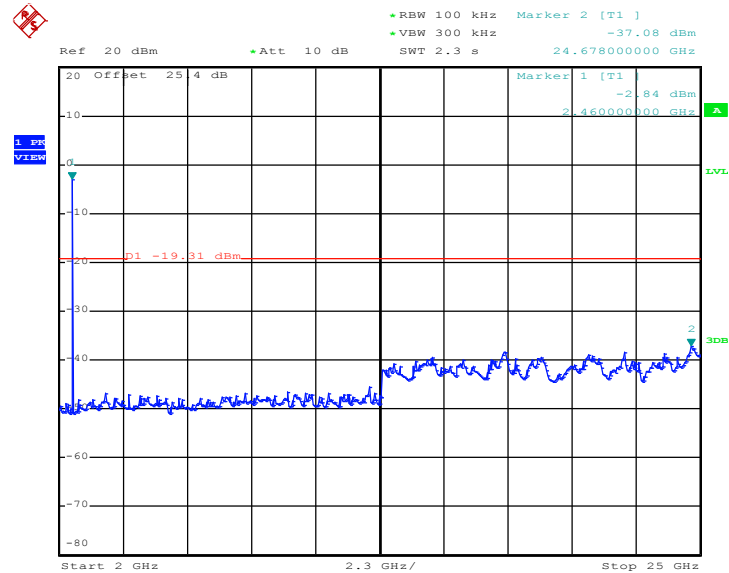

Date: 6.JUL.2018 07:18:54



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


See list of measuring equipment of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

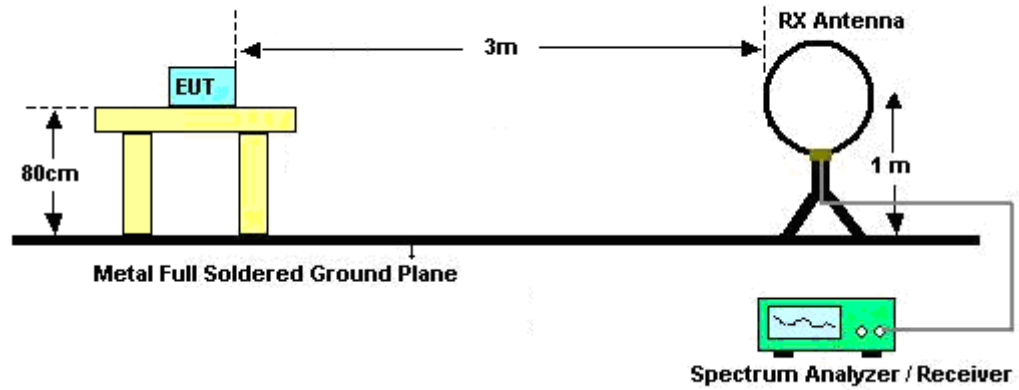

For radiated emissions from 30MHz to 1GHz

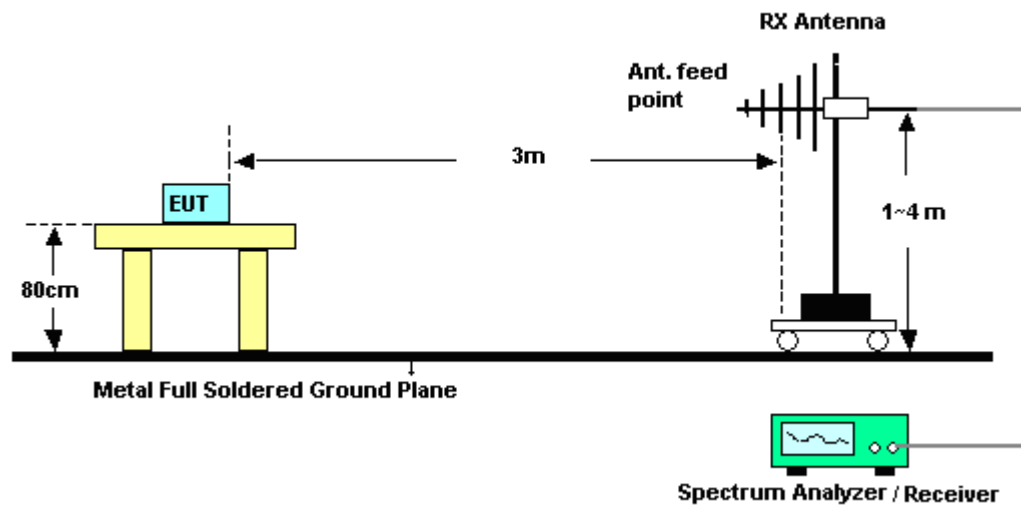

For radiated emissions above 1GHz

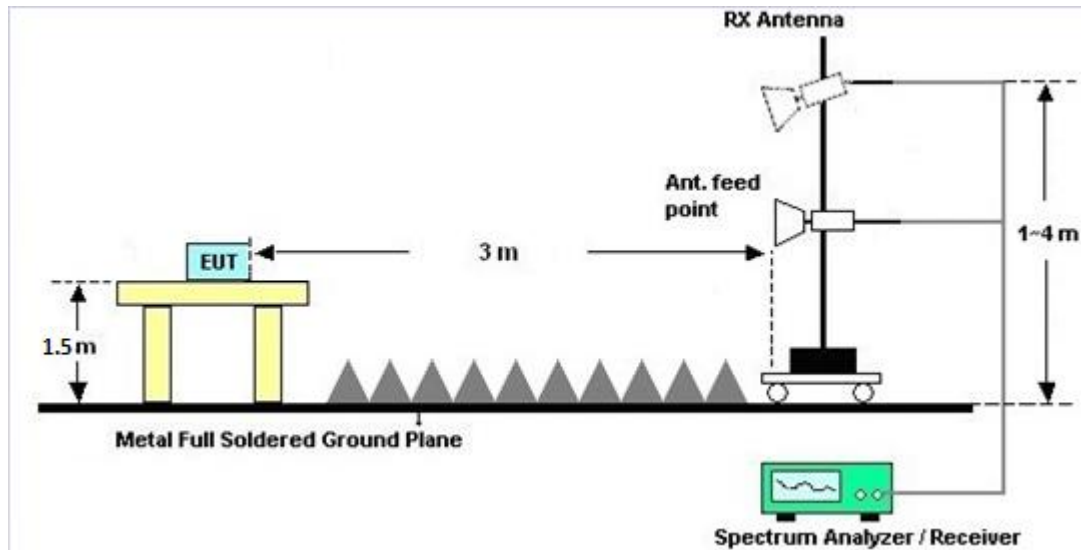

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

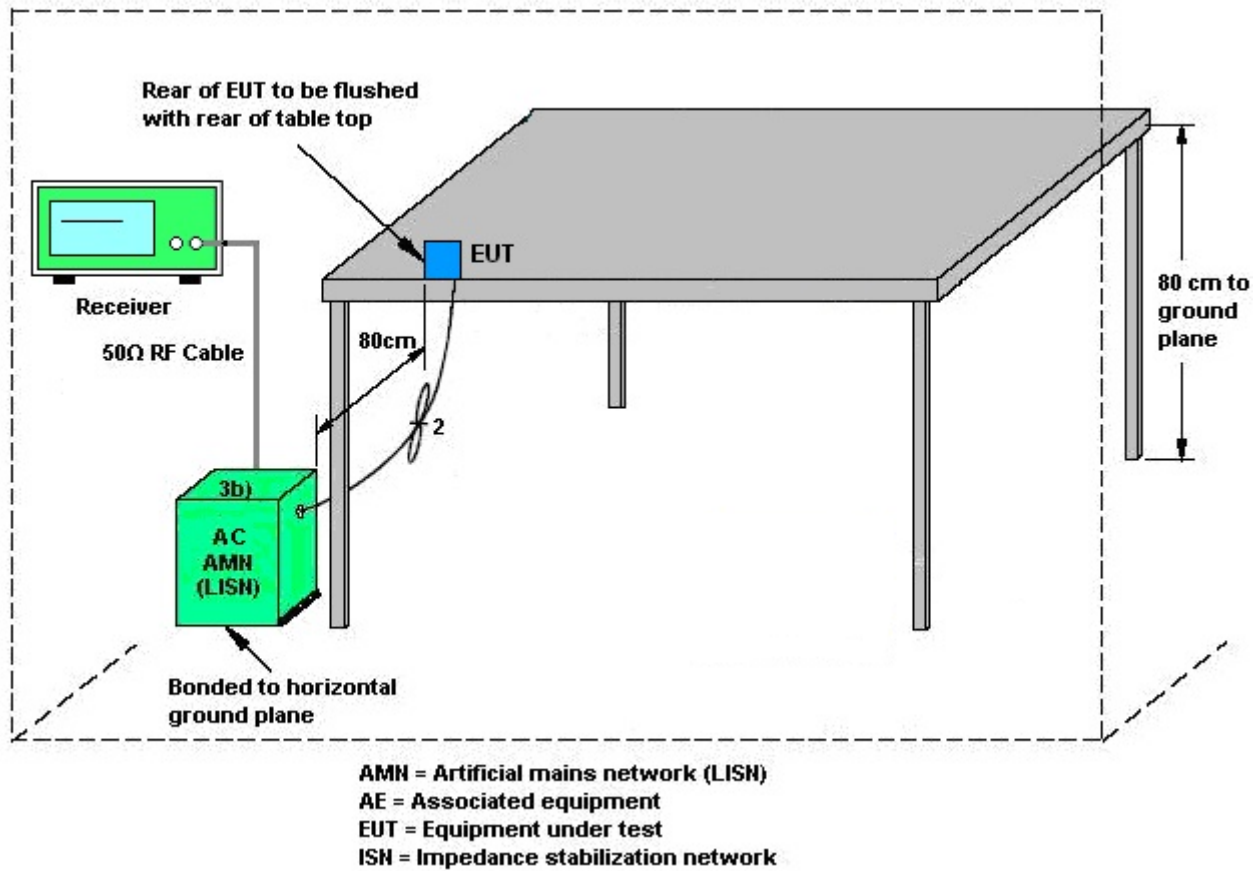

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 20, 2017	Jun. 14, 2018~ Jul. 06, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	Jun. 14, 2018~ Jul. 06, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 13, 2017	Jun. 14, 2018~ Jul. 06, 2018	Nov. 12, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	Jun. 14, 2018~ Jul. 06, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 24, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jun. 24, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jun. 24, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 24, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jun. 24, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jun. 24, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun.16, 2018~ Jul. 03, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Jan. 16, 2018	Jun.16, 2018~ Jul. 03, 2018	Jan. 15, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0602	30MHz~1GHz	Oct. 14, 2017	Jun.16, 2018~ Jul. 03, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 16, 2017	Jun.16, 2018~ Jul. 03, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Jun.16, 2018~ Jul. 03, 2018	Nov. 22, 2018	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Jan. 16, 2018	Jun.16, 2018~ Jul. 03, 2018	Jan. 15, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 19, 2017	Jun.16, 2018~ Jul. 03, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun.16, 2018~ Jul. 03, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun.16, 2018~ Jul. 03, 2018	N/A	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Jun.16, 2018~ Jul. 03, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303K	1710001800054002	1GHz~18GHz	Apr. 17, 2018	Jun.16, 2018~ Jul. 03, 2018	Apr. 16, 2019	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	9K-30M	Mar. 20, 2018	Jun.16, 2018~ Jul. 03, 2018	Mar. 19, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4	30M-18G	Mar. 15, 2018	Jun.16, 2018~ Jul. 03, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2589/2	30M-18G	Mar. 15, 2018	Jun.16, 2018~ Jul. 03, 2018	Mar. 14, 2019	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN3	2.7G High Pass	Sep. 18, 2017	Jun.16, 2018~ Jul. 03, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1G Low Pass	Sep. 18, 2017	Jun.16, 2018~ Jul. 03, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Jun.16, 2018~ Jul. 03, 2018	N/A	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Rebecca Li/Shiming Liu	Temperature:	21~25	°C
Test Date:	2018/6/14~2018/7/6	Relative Humidity:	51~54	%

<1Mbps>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.034	0.712	0.50	Pass
BLE	1Mbps	1	19	2440	1.036	0.710	0.50	Pass
BLE	1Mbps	1	39	2480	1.036	0.708	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.78	30.00	4.30	7.08	36.00	Pass
BLE	1Mbps	1	19	2440	2.76	30.00	4.30	7.06	36.00	Pass
BLE	1Mbps	1	39	2480	2.68	30.00	4.30	6.98	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.23	2.18
BLE	1Mbps	1	19	2440	2.23	2.12
BLE	1Mbps	1	39	2480	2.23	2.10

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.00	-13.62	4.30	8.00	Pass
BLE	1Mbps	1	19	2440	1.15	-13.49	4.30	8.00	Pass
BLE	1Mbps	1	39	2480	1.02	-13.60	4.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

<2Mbps>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	2.092	1.236	0.50	Pass
BLE5.0	2Mbps	1	19	2440	2.088	1.232	0.50	Pass
BLE5.0	2Mbps	1	39	2480	2.084	1.240	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.0	2Mbps	1	0	2402	2.80	30.00	4.30	7.10	36.00	Pass
BLE5.0	2Mbps	1	19	2440	2.78	30.00	4.30	7.08	36.00	Pass
BLE5.0	2Mbps	1	39	2480	2.72	30.00	4.30	7.02	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE5.0	2Mbps	1	0	2402	2.47	2.19
BLE5.0	2Mbps	1	19	2440	2.47	2.13
BLE5.0	2Mbps	1	39	2480	2.47	2.11

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE5.0	2Mbps	1	0	2402	0.68	-17.67	4.30	8.00	Pass
BLE5.0	2Mbps	1	19	2440	0.83	-17.50	4.30	8.00	Pass
BLE5.0	2Mbps	1	39	2480	0.69	-17.74	4.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Kai-Chun Chu	Temperature :	25~27°C
		Relative Humidity :	50~52%

EUT Information

Report NO : 830922-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

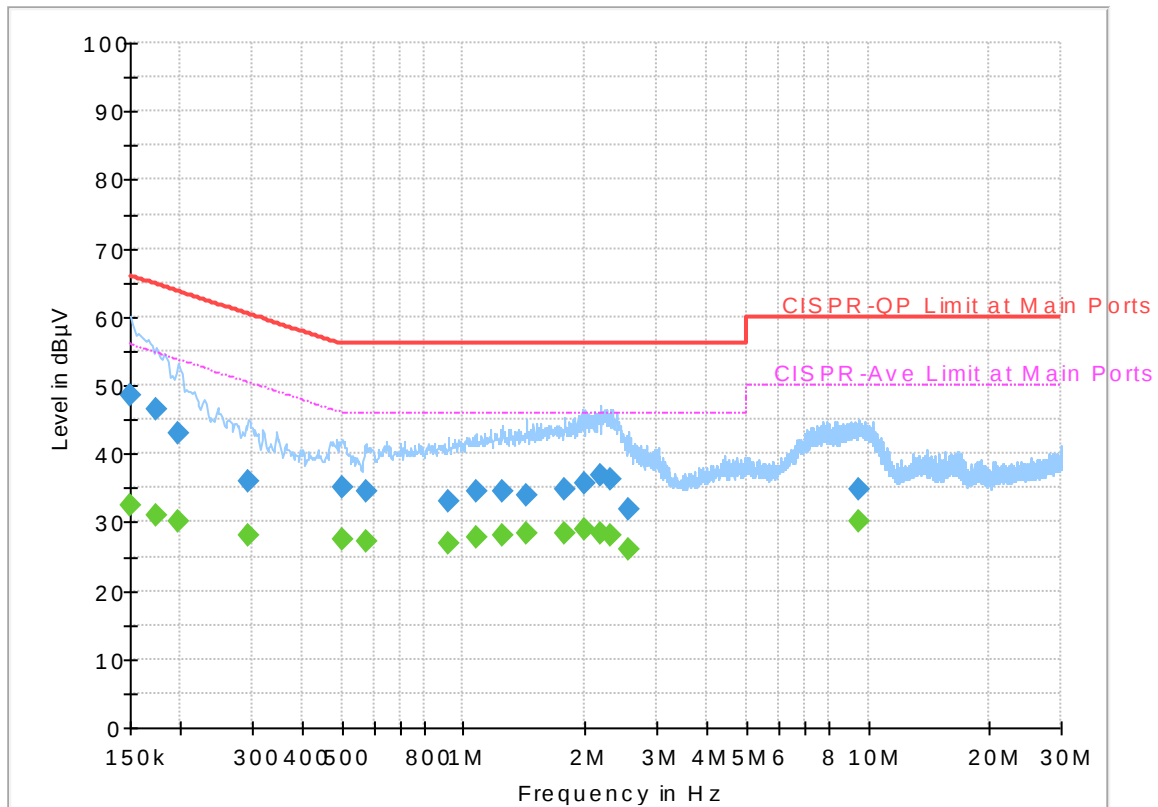

Final_Result


Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	32.58	56.00	23.42	L1	OFF	19.5
0.150000	48.64	---	66.00	17.36	L1	OFF	19.5
0.174750	---	31.04	54.73	23.69	L1	OFF	19.5
0.174750	46.35	---	64.73	18.38	L1	OFF	19.5
0.197250	---	30.07	53.73	23.66	L1	OFF	19.5
0.197250	42.92	---	63.73	20.81	L1	OFF	19.5
0.294000	---	28.05	50.41	22.36	L1	OFF	19.5
0.294000	36.00	---	60.41	24.41	L1	OFF	19.5
0.503250	---	27.53	46.00	18.47	L1	OFF	19.5
0.503250	35.12	---	56.00	20.88	L1	OFF	19.5
0.573000	---	27.06	46.00	18.94	L1	OFF	19.5
0.573000	34.58	---	56.00	21.42	L1	OFF	19.5
0.917250	---	26.91	46.00	19.09	L1	OFF	19.6
0.917250	33.02	---	56.00	22.98	L1	OFF	19.6
1.072500	---	27.91	46.00	18.09	L1	OFF	19.6
1.072500	34.46	---	56.00	21.54	L1	OFF	19.6
1.250250	---	28.04	46.00	17.96	L1	OFF	19.6
1.250250	34.64	---	56.00	21.36	L1	OFF	19.6
1.428000	---	28.35	46.00	17.65	L1	OFF	19.6
1.428000	33.92	---	56.00	22.08	L1	OFF	19.6
1.783500	---	28.40	46.00	17.60	L1	OFF	19.6

1.783500	34.89	---	56.00	21.11	L1	OFF	19.6
2.001750	---	28.85	46.00	17.15	L1	OFF	19.6
2.001750	35.73	---	56.00	20.27	L1	OFF	19.6
2.175000	---	28.43	46.00	17.57	L1	OFF	19.5
2.175000	36.87	---	56.00	19.13	L1	OFF	19.5
2.319000	---	28.01	46.00	17.99	L1	OFF	19.5
2.319000	36.35	---	56.00	19.65	L1	OFF	19.5
2.566500	---	26.10	46.00	19.90	L1	OFF	19.6
2.566500	31.86	---	56.00	24.14	L1	OFF	19.6
9.465000	---	30.24	50.00	19.76	L1	OFF	19.9
9.465000	34.76	---	60.00	25.24	L1	OFF	19.9

EUT Information

Report NO : 830922-01
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

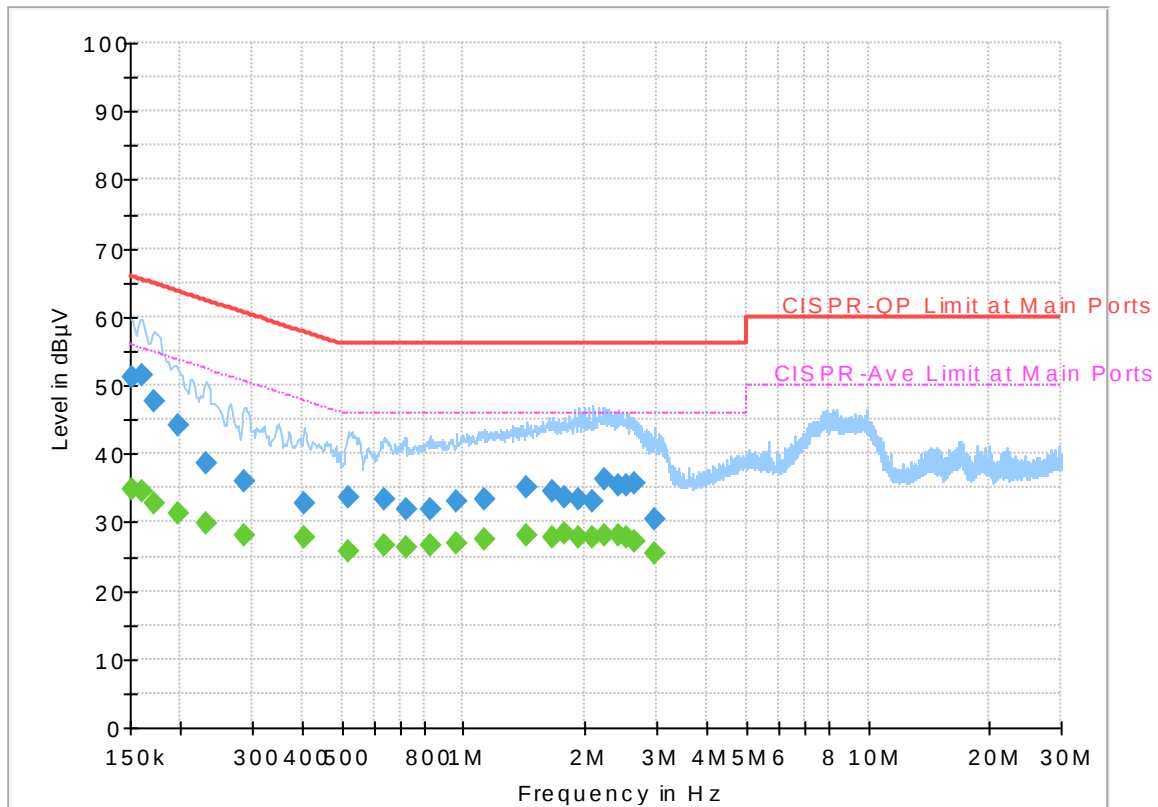

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	34.79	55.88	21.09	N	OFF	19.5
0.152250	51.26	---	65.88	14.62	N	OFF	19.5
0.161250	---	34.37	55.40	21.03	N	OFF	19.5
0.161250	51.37	---	65.40	14.03	N	OFF	19.5
0.172500	---	32.70	54.84	22.14	N	OFF	19.5
0.172500	47.74	---	64.84	17.10	N	OFF	19.5
0.197250	---	31.37	53.73	22.36	N	OFF	19.5
0.197250	44.07	---	63.73	19.66	N	OFF	19.5
0.231000	---	29.94	52.41	22.47	N	OFF	19.5
0.231000	38.51	---	62.41	23.90	N	OFF	19.5
0.287250	---	28.11	50.60	22.49	N	OFF	19.5
0.287250	35.90	---	60.60	24.70	N	OFF	19.5
0.402000	---	27.73	47.81	20.08	N	OFF	19.5
0.402000	32.70	---	57.81	25.11	N	OFF	19.5
0.521250	---	25.86	46.00	20.14	N	OFF	19.5
0.521250	33.75	---	56.00	22.25	N	OFF	19.5
0.636000	---	26.64	46.00	19.36	N	OFF	19.6
0.636000	33.24	---	56.00	22.76	N	OFF	19.6
0.719250	---	26.24	46.00	19.76	N	OFF	19.6
0.719250	31.81	---	56.00	24.19	N	OFF	19.6
0.825000	---	26.55	46.00	19.45	N	OFF	19.6

0.825000	31.82	---	56.00	24.18	N	OFF	19.6
0.960000	---	27.03	46.00	18.97	N	OFF	19.6
0.960000	33.14	---	56.00	22.86	N	OFF	19.6
1.126500	---	27.58	46.00	18.42	N	OFF	19.6
1.126500	33.34	---	56.00	22.66	N	OFF	19.6
1.439250	---	28.17	46.00	17.83	N	OFF	19.6
1.439250	35.00	---	56.00	21.00	N	OFF	19.6
1.666500	---	27.76	46.00	18.24	N	OFF	19.6
1.666500	34.64	---	56.00	21.36	N	OFF	19.6
1.774500	---	28.29	46.00	17.71	N	OFF	19.6
1.774500	33.67	---	56.00	22.33	N	OFF	19.6
1.934250	---	27.72	46.00	18.28	N	OFF	19.6
1.934250	33.26	---	56.00	22.74	N	OFF	19.6
2.094000	---	27.82	46.00	18.18	N	OFF	19.4
2.094000	33.15	---	56.00	22.85	N	OFF	19.4
2.222250	---	28.20	46.00	17.80	N	OFF	19.5
2.222250	36.14	---	56.00	19.86	N	OFF	19.5
2.406750	---	27.95	46.00	18.05	N	OFF	19.6
2.406750	35.41	---	56.00	20.59	N	OFF	19.6
2.530500	---	27.70	46.00	18.30	N	OFF	19.6
2.530500	35.40	---	56.00	20.60	N	OFF	19.6
2.661000	---	27.05	46.00	18.95	N	OFF	19.6
2.661000	35.80	---	56.00	20.20	N	OFF	19.6
2.969250	---	25.36	46.00	20.64	N	OFF	19.6
2.969250	30.39	---	56.00	25.61	N	OFF	19.6



Appendix C. Radiated Spurious Emission

Test Engineer :	Chuan Zhu and Ken Wu	Temperature :	22~25°C
		Relative Humidity :	52~57%

2.4GHz 2400~2483.5MHz

BLE 1Mbps (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2360.4	51.95	-22.05	74	42.29	27.04	16.22	33.6	400	275	P	H
		2367.225	42.75	-11.25	54	33.09	27.04	16.22	33.6	400	275	A	H
	*	2402	97.41	-	-	87.58	27.13	16.29	33.59	400	275	P	H
	*	2402	96.8	-	-	86.97	27.13	16.29	33.59	400	275	A	H
		2322.915	52.16	-21.84	74	42.74	26.95	16.08	33.61	100	299	P	V
		2388.645	42.77	-11.23	54	32.95	27.13	16.29	33.6	100	299	A	V
	*	2402	92.29	-	-	82.46	27.13	16.29	33.59	100	299	P	V
	*	2402	91.71	-	-	81.88	27.13	16.29	33.59	100	299	A	V
BLE CH 19 2440MHz		2377.5	51.43	-22.57	74	41.72	27.09	16.22	33.6	100	299	P	H
		2389.5	42.94	-11.06	54	33.12	27.13	16.29	33.6	100	299	A	H
	*	2440	96.79	-	-	86.8	27.27	16.31	33.59	100	299	P	H
	*	2440	96.2	-	-	86.21	27.27	16.31	33.59	100	299	A	H
		2494.56	52.13	-21.87	74	41.98	27.4	16.32	33.57	100	299	P	H
		2487.6	42.94	-11.06	54	32.8	27.4	16.32	33.58	100	299	A	H
		2379.6	52.5	-21.5	74	42.79	27.09	16.22	33.6	127	308	P	V
		2387.25	42.72	-11.28	54	32.9	27.13	16.29	33.6	127	308	A	V
	*	2440	92.51	-	-	82.52	27.27	16.31	33.59	127	308	P	V
	*	2440	91.84	-	-	81.85	27.27	16.31	33.59	127	308	A	V
		2494.48	51.73	-22.27	74	41.58	27.4	16.32	33.57	127	308	P	V
		2490.72	43.06	-10.94	54	32.92	27.4	16.32	33.58	127	308	A	V



BLE CH 39 2480MHz	*	2480	97.83	-	-	87.74	27.36	16.31	33.58	100	290	P	H
	*	2480	97.11	-	-	87.02	27.36	16.31	33.58	100	290	A	H
		2488.8	52.87	-21.13	74	42.73	27.4	16.32	33.58	100	290	P	H
		2492.68	43.11	-10.89	54	32.96	27.4	16.32	33.57	100	290	A	H
	*	2480	94.12	-	-	84.03	27.36	16.31	33.58	100	315	P	V
	*	2480	93.47	-	-	83.38	27.36	16.31	33.58	100	315	A	V
		2491.88	52.76	-21.24	74	42.61	27.4	16.32	33.57	100	315	P	V
		2485.96	43.14	-10.86	54	33.04	27.36	16.32	33.58	100	315	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE 1Mbps (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.3	-32.7	74	56.59	31.26	10.03	56.58	100	0	P	H
		4804	37.41	-36.59	74	52.7	31.26	10.03	56.58	100	0	P	V
BLE CH 19 2440MHz		4880	38.64	-35.36	74	53.82	31.38	9.99	56.55	100	0	P	H
		7320	41.13	-32.87	74	49.25	36.32	11.77	56.21	100	0	P	H
		4880	37.96	-36.04	74	53.14	31.38	9.99	56.55	100	0	P	V
		7320	42.1	-31.9	74	50.22	36.32	11.77	56.21	100	0	P	V
BLE CH 39 2480MHz		4960	38.07	-35.93	74	53.07	31.54	9.97	56.51	100	0	P	H
		7440	41.16	-32.84	74	48.91	36.59	11.72	56.06	100	0	P	H
		4960	38.55	-35.45	74	53.55	31.54	9.97	56.51	100	0	P	V
		7440	41.62	-32.38	74	49.37	36.59	11.72	56.06	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE 1Mbps (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		49.98	22.29	-17.71	40	39.68	14.07	1.03	32.49	-	-	P	H
		57.54	21.49	-18.51	40	41	11.95	1.03	32.49	-	-	P	H
		63.48	25.02	-14.98	40	44.79	11.69	1.03	32.49	-	-	P	H
		394.5	25.61	-20.39	46	33.83	21.49	2.62	32.33	-	-	P	H
		624.1	28.13	-17.87	46	31.63	25.72	3.24	32.46	-	-	P	H
		951.7	33.14	-12.86	46	29.67	30.66	3.99	31.18	100	0	P	H
		31.89	30.38	-9.62	40	38.79	23.24	0.84	32.49	100	50	P	V
		48.9	29.04	-10.96	40	45.6	14.9	1.03	32.49	-	-	P	V
		57.81	29.65	-10.35	40	49.3	11.8	1.04	32.49	-	-	P	V
		563.2	29.27	-16.73	46	32.63	25.95	3.12	32.43	-	-	P	V
		624.1	33.52	-12.48	46	37.02	25.72	3.24	32.46	-	-	P	V
		948.9	33.32	-12.68	46	30.03	30.51	3.99	31.21	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



2.4GHz 2400~2483.5MHz

BLE 2Mbps (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2380.245	51.57	-22.43	74	41.86	27.09	16.22	33.6	100	273	P	H
		2386.44	42	-12	54	32.18	27.13	16.29	33.6	100	273	A	H
	*	2402	96.28	-	-	86.45	27.13	16.29	33.59	100	273	P	H
	*	2402	94.62	-	-	84.79	27.13	16.29	33.59	100	273	A	H
		2363.025	53.48	-20.52	74	43.82	27.04	16.22	33.6	100	302	P	V
		2371.425	41.83	-12.17	54	32.12	27.09	16.22	33.6	100	302	A	V
	*	2402	92.69	-	-	82.86	27.13	16.29	33.59	100	302	P	V
	*	2402	91.07	-	-	81.24	27.13	16.29	33.59	100	302	A	V
BLE CH 19 2440MHz		2378	52.11	-21.89	74	42.4	27.09	16.22	33.6	100	273	P	H
		2386.16	41.91	-12.09	54	32.09	27.13	16.29	33.6	100	273	A	H
	*	2440	96.96	-	-	86.97	27.27	16.31	33.59	100	273	P	H
	*	2440	95.34	-	-	85.35	27.27	16.31	33.59	100	273	A	H
		2497.92	52.23	-21.77	74	42.08	27.4	16.32	33.57	100	273	P	H
		2485.28	42.24	-11.76	54	32.14	27.36	16.32	33.58	100	273	A	H
		2315.76	51.86	-22.14	74	42.48	26.91	16.08	33.61	127	303	P	V
		2374	41.93	-12.07	54	32.22	27.09	16.22	33.6	127	303	A	V
	*	2440	93.72	-	-	83.73	27.27	16.31	33.59	127	303	P	V
	*	2440	91.98	-	-	81.99	27.27	16.31	33.59	127	303	A	V
		2498.96	52.15	-21.85	74	42	27.4	16.32	33.57	127	303	P	V
		2492.16	42.25	-11.75	54	32.1	27.4	16.32	33.57	127	303	A	V



BLE CH 39 2480MHz	*	2480	97.47	-	-	87.38	27.36	16.31	33.58	100	291	P	H
	*	2480	95.74	-	-	85.65	27.36	16.31	33.58	100	291	A	H
		2495.68	52.67	-21.33	74	42.52	27.4	16.32	33.57	100	291	P	H
		2483.52	42.74	-11.26	54	32.65	27.36	16.31	33.58	100	291	A	H
	*	2480	93.43	-	-	83.34	27.36	16.31	33.58	100	328	P	V
	*	2480	91.88	-	-	81.79	27.36	16.31	33.58	100	328	A	V
		2496.6	52.35	-21.65	74	42.2	27.4	16.32	33.57	100	328	P	V
		2485.16	42.65	-11.35	54	32.55	27.36	16.32	33.58	100	328	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE 2Mbps (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	40.49	-33.51	74	55.78	31.26	10.03	56.58	100	0	P	H
		4804	38.75	-35.25	74	54.04	31.26	10.03	56.58	100	0	P	V
BLE CH 19 2440MHz		4880	39.04	-34.96	74	54.22	31.38	9.99	56.55	100	0	P	H
		7320	42.16	-31.84	74	50.28	36.32	11.77	56.21	100	0	P	H
		4880	39.26	-34.74	74	54.44	31.38	9.99	56.55	100	0	P	V
		7320	41.36	-32.64	74	49.48	36.32	11.77	56.21	100	0	P	V
BLE CH 39 2480MHz		4960	38.2	-35.8	74	53.2	31.54	9.97	56.51	100	0	P	H
		7440	41.33	-32.67	74	49.08	36.59	11.72	56.06	100	0	P	H
		4960	38.5	-35.5	74	53.5	31.54	9.97	56.51	100	0	P	V
		7440	41.53	-32.47	74	49.28	36.59	11.72	56.06	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE 2Mbps (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30.27	22.52	-17.48	40	30	24.17	0.85	32.5	-	-	P	H
		56.73	22.8	-17.2	40	42.31	11.95	1.03	32.49	-	-	P	H
		63.21	25.5	-14.5	40	45.32	11.64	1.03	32.49	-	-	P	H
		388.9	24.59	-21.41	46	33.05	21.25	2.62	32.33	-	-	P	H
		624.1	28.73	-17.27	46	32.23	25.72	3.24	32.46	-	-	P	H
		958	33.45	-12.55	46	29.48	31.02	4.08	31.13	100	0	P	H
		30.27	28.72	-11.28	40	36.2	24.17	0.85	32.5	-	-	P	V
		45.12	30.84	-9.16	40	46.17	16.14	1.02	32.49	100	63	P	V
		58.35	29.42	-10.58	40	49.07	11.8	1.04	32.49	-	-	P	V
		564.6	29.63	-16.37	46	33.02	25.92	3.12	32.43	-	-	P	V
		624.1	33.24	-12.76	46	36.74	25.72	3.24	32.46	-	-	P	V
		957.3	34.03	-11.97	46	30.13	30.97	4.07	31.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots





Test Engineer :	Chuan Zhu and Ken Wu	Temperature :	22~25°C
		Relative Humidity :	52~57%





Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz
BLE 1Mbps (Band Edge @ 3m)

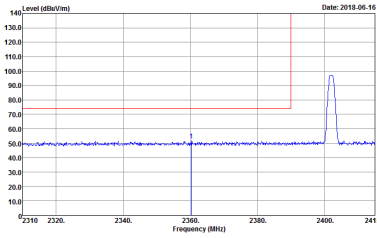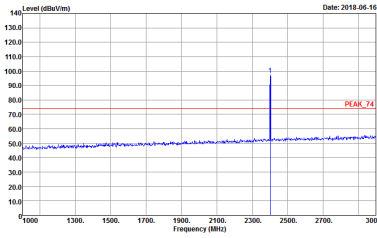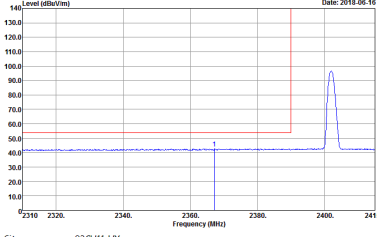
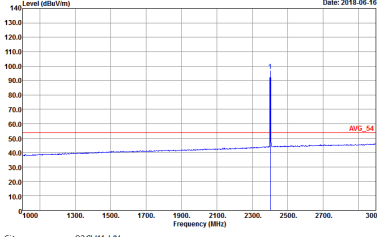
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

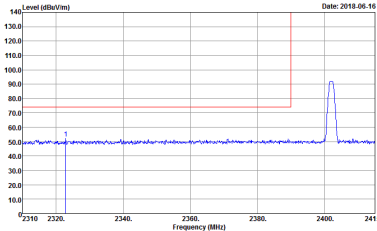
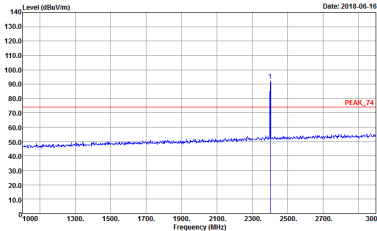
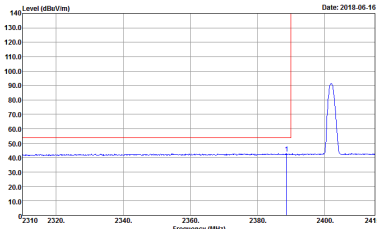
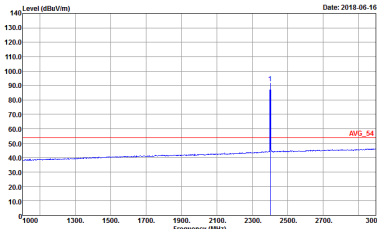
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH11-HY Condition : AV6_BE_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CH11-HY Condition : AV6_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

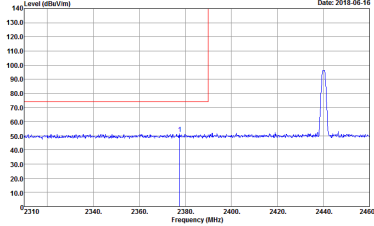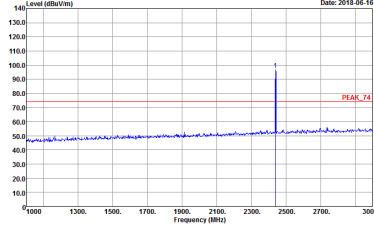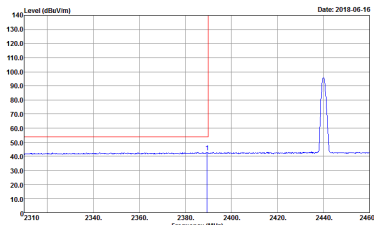
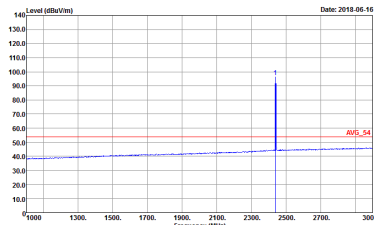






BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	 Level (dBm/100Hz) vs Frequency (MHz) plot for Peak Horizontal. The plot shows a sharp peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100Hz, and the x-axis ranges from 2310 to 2460 MHz. A red line indicates the peak level at approximately 135 dBm/100Hz. Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Level (dBm/100Hz) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a sharp peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100Hz, and the x-axis ranges from 2310 to 2460 MHz. A red line indicates the peak level at approximately 135 dBm/100Hz. Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Level (dBm/100Hz) vs Frequency (MHz) plot for Avg Horizontal. The plot shows a sharp peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100Hz, and the x-axis ranges from 2310 to 2460 MHz. A red line indicates the peak level at approximately 135 dBm/100Hz. Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Level (dBm/100Hz) vs Frequency (MHz) plot for Avg Fundamental. The plot shows a sharp peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100Hz, and the x-axis ranges from 2310 to 2460 MHz. A red line indicates the peak level at approximately 135 dBm/100Hz. Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto



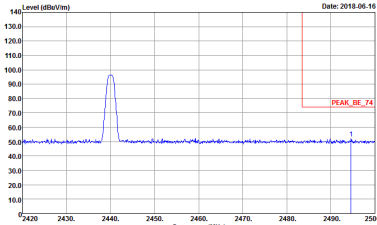
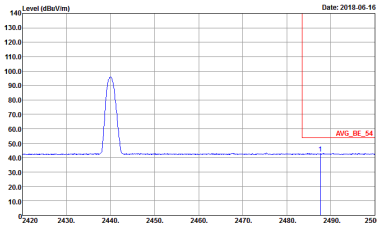


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-I-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH11-I-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	Left blank

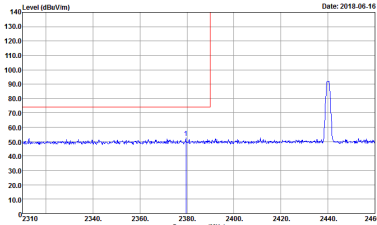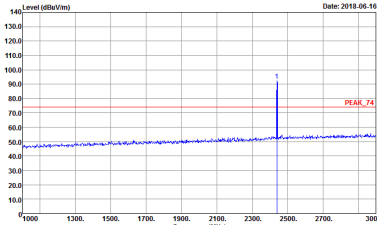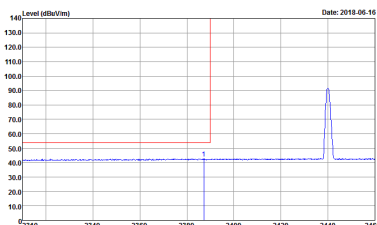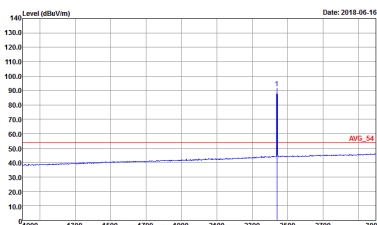BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH11-HY : PEAK_BE_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH11-HY : PEAK_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site Condition : 03CH11-HY : AV6_BE_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site Condition : 03CH11-HY : AV6_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

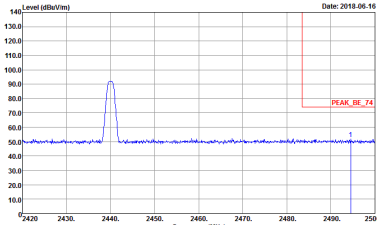
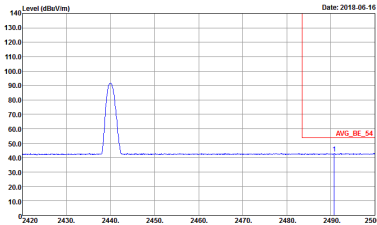
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	Left blank

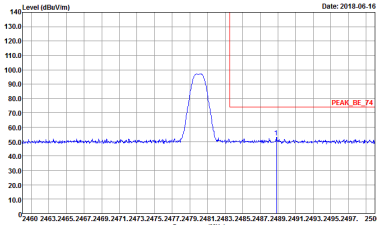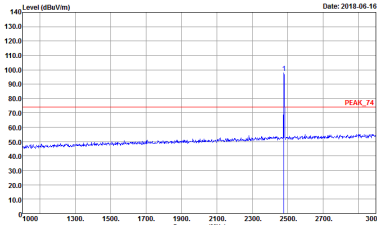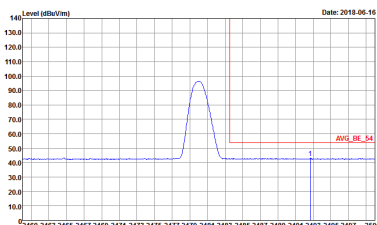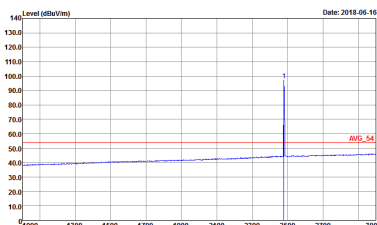BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CHI1-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CHI1-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CHI1-HY Condition : AV6_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CHI1-HY Condition : AV6_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

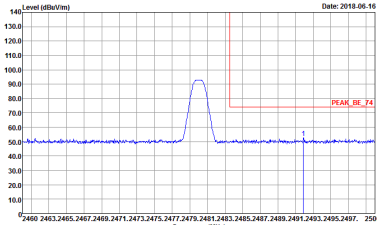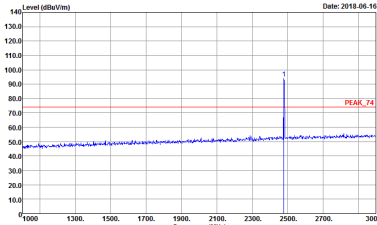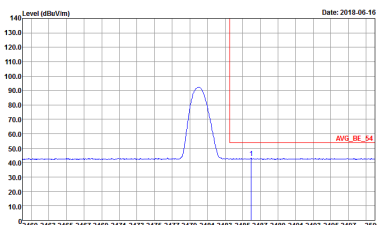
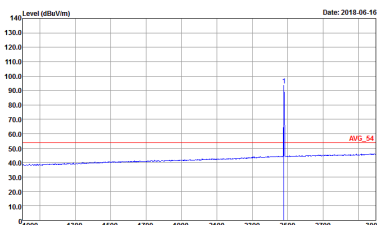
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto





2.4GHz 2400~2483.5MHz
BLE 1Mbps (Harmonic @ 3m)

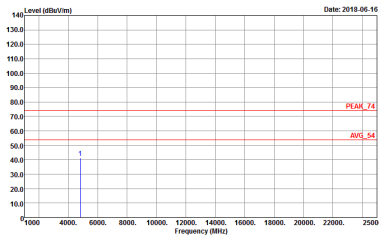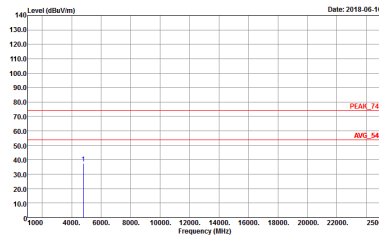BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH11-14Y Condition : PEAK 74 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-14Y Condition : PEAK 74 3m HORN 9120D-HF VERTICAL

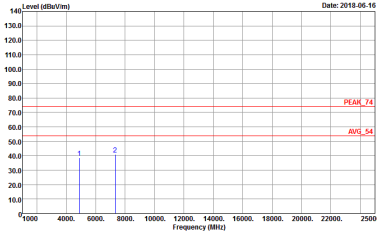
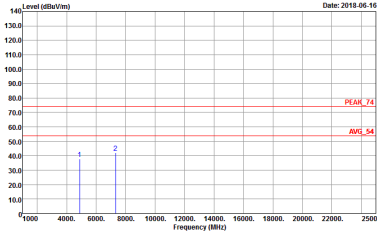


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 9120D-HF VERTICAL

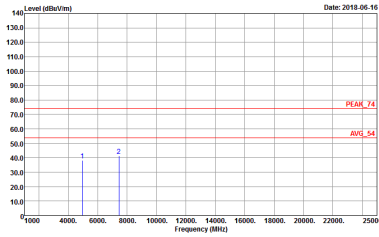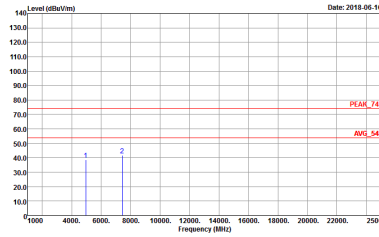





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 91200-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 91200-HF VERTICAL

Emission below 1GHz
2.4GHz BLE 1Mbps (LF)



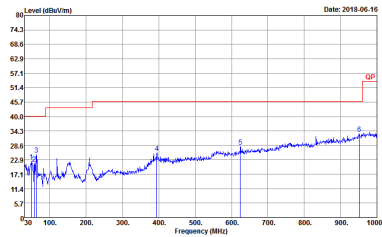
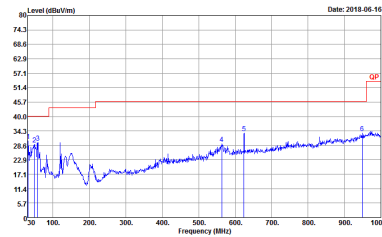
BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH11-14Y Condition : QP 3m BLE-LOG 6111D-LF ETC HORIZONTAL	 Site : 03CH11-14Y Condition : QP 3m BLE-LOG 6111D-LF ETC VERTICAL







2.4GHz 2400~2483.5MHz
BLE 2Mbps (Band Edge @ 3m)

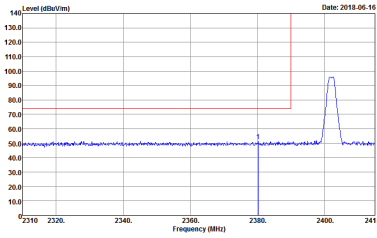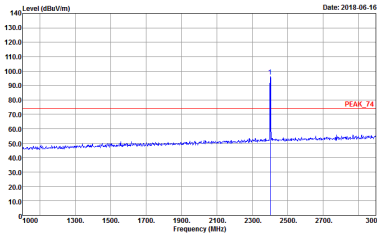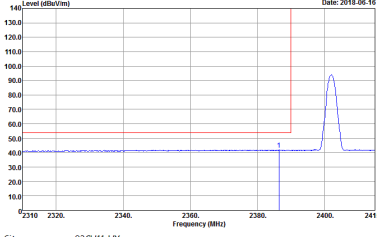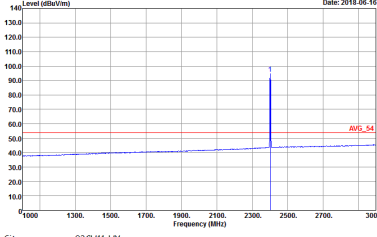BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto	 Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto

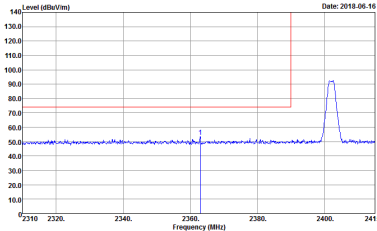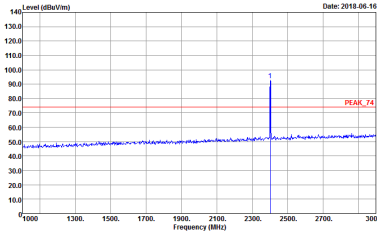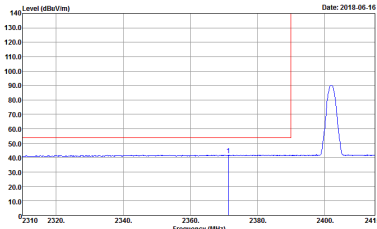
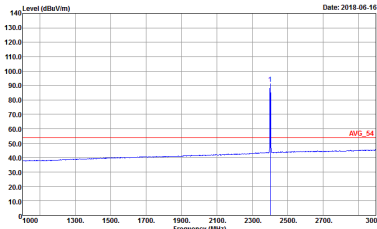






BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg	 Site : 03CH11-HY Condition : AV6_BE_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto	 Site : 03CH11-HY Condition : AV6_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto

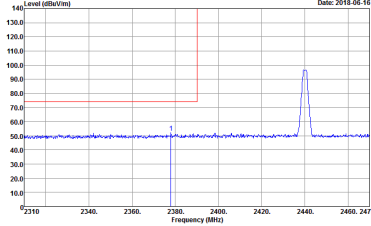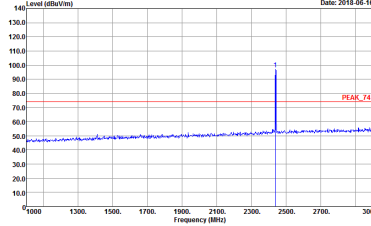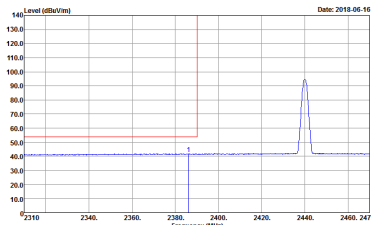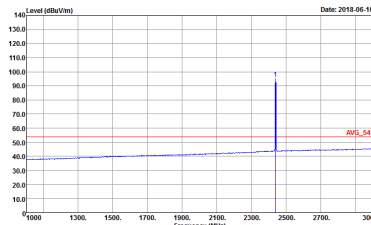



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto	 Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto



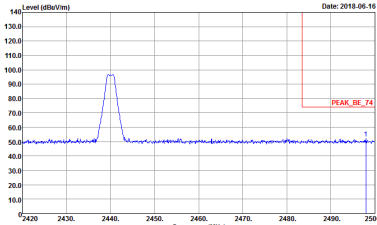
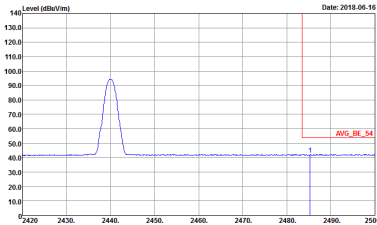






BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH11-I-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH11-I-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto	Left blank

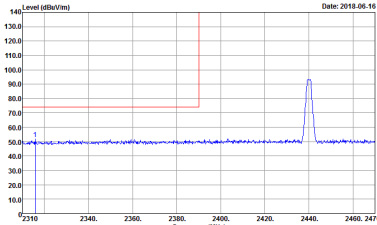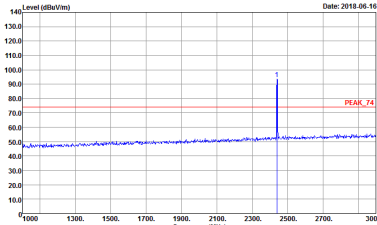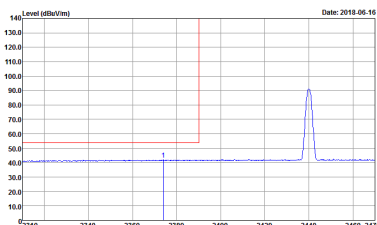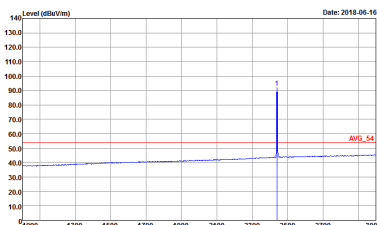BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Vertical	Fundamental
Peak	 Site Condition : 03CH11-HY : PEAK_BE_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site Condition : 03CH11-HY : PEAK_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site Condition : 03CH11-HY : AVG_BE_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto	 Site Condition : 03CH11-HY : AVG_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto

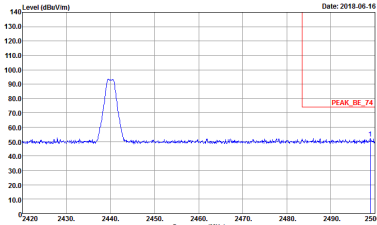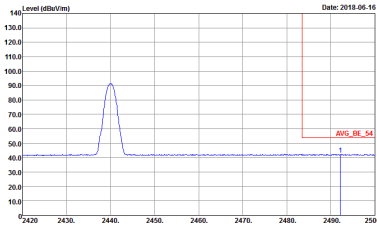



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH11-I-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH11-I-HY Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto	Left blank

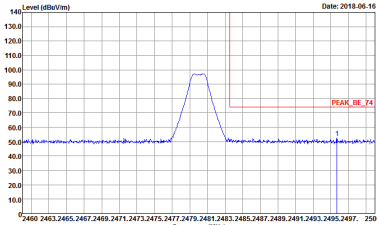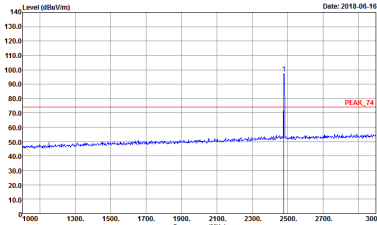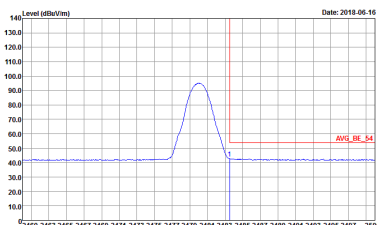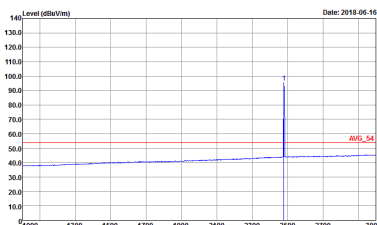BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CHI1-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CHI1-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CHI1-HY Condition : AV6_BE_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto	 Site : 03CHI1-HY Condition : AV6_54 3m HORN 9120D-HF HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto

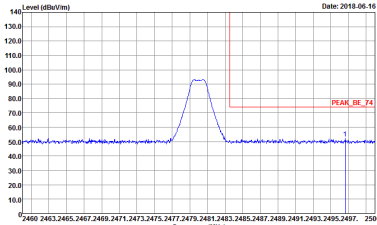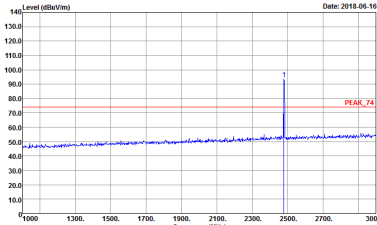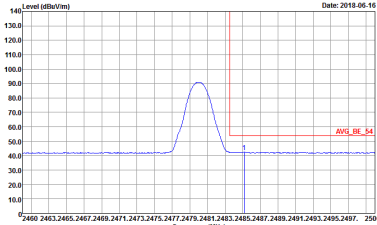
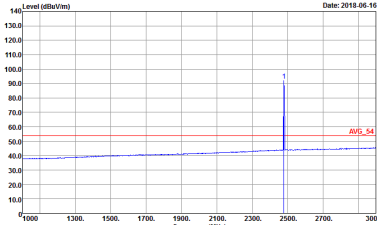
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH11-HY Condition : AV6_BE_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto	 Site : 03CH11-HY Condition : AV6_54 3m HORN 9120D-HF VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto





2.4GHz 2400~2483.5MHz
BLE 2Mbps (Harmonic @ 3m)

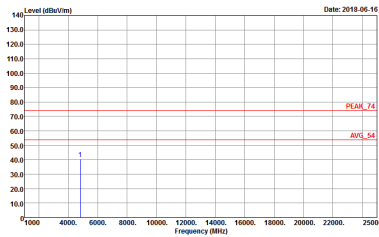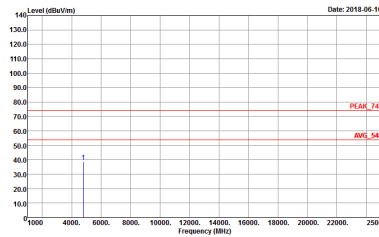BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH11-14Y Condition : PEAK 74 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-14Y Condition : PEAK 74 3m HORN 9120D-HF VERTICAL

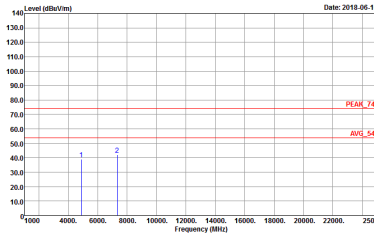
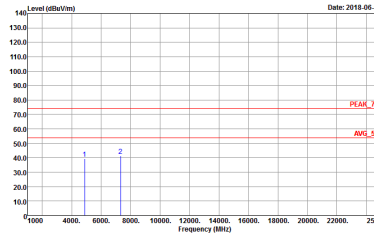


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL

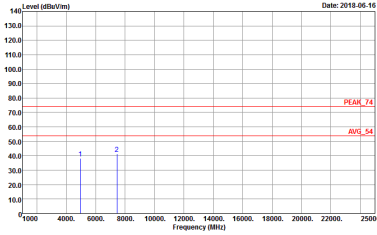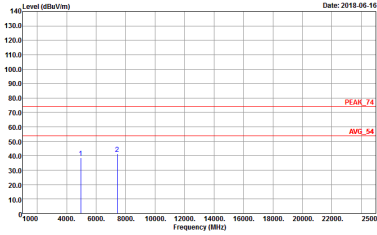

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 91200-HF HORIZONTAL	 Site : 03CH11-HY Condition : PEAK 74 3m HORN 91200-HF VERTICAL


Emission below 1GHz
2.4GHz BLE 2Mbps (LF)

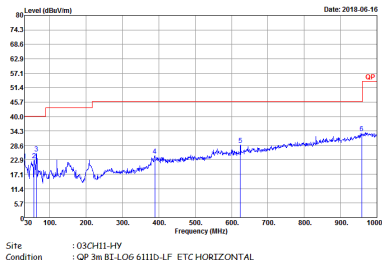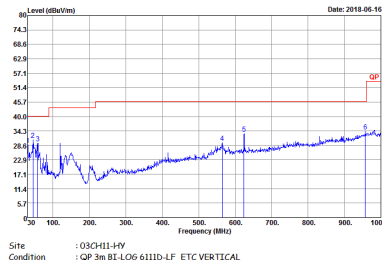BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
QP / Peak		

Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Bluetooth – LE for 1Mbps	59.87	376.00	2.66	3kHz	2.23
Bluetooth – LE for 2Mbps	56.65	1065.00	0.94	1kHz	2.47


Bluetooth – LE for 1Mbps

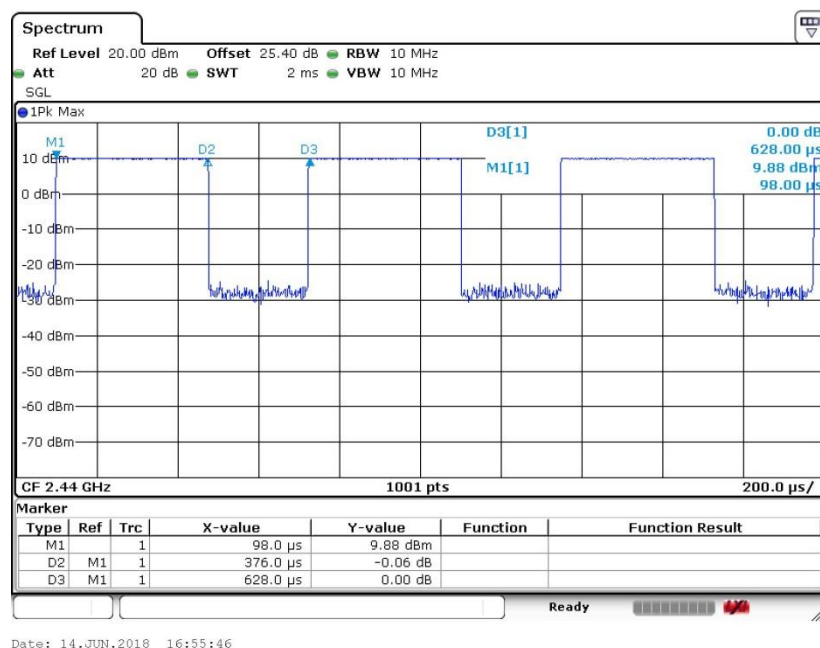

Date: 14.JUN.2018 16:55:46



Bluetooth – LE for 2Mbps

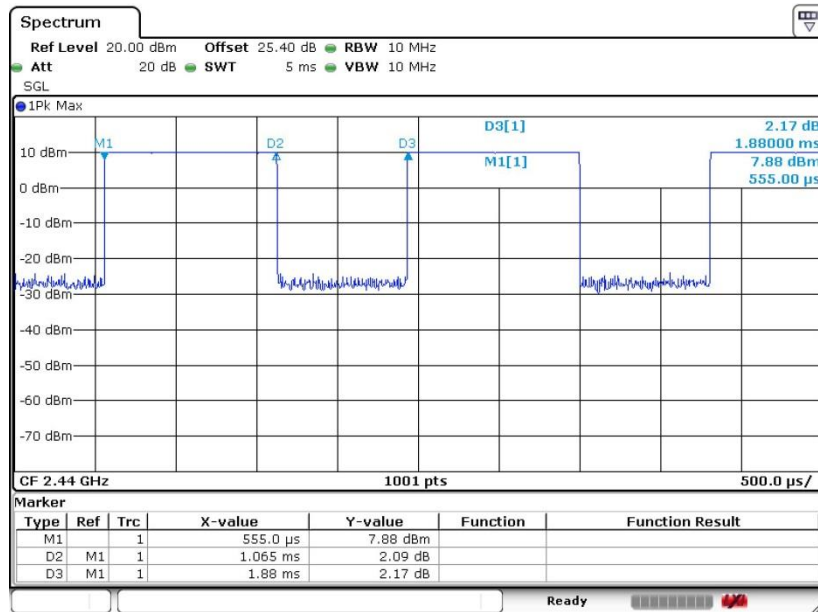

Date: 14.JUN.2018 16:57:34

THE END