



# TEST REPORT

No. I18Z61597-WMD03

for

Palm Ventures Group

HSUPA/HSDPA/UMTS Quad Band/GSM Quad Band/LTE 5 Bands

mobile phone

Model Name: PVG100E/PVG100EU

FCC ID: 2AOETPVG100E

with

Hardware Version:03

Software Version: 3B1K-1

Issued Date: 2018-10-26



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT  
No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.  
Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504  
Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I18Z61597-WMD03	Rev.0	1 <sup>st</sup> edition	2018-10-26

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>4</b>
<b>1.1. TESTING LOCATION.....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT.....</b>	<b>4</b>
<b>1.3. PROJECT DATA.....</b>	<b>4</b>
<b>1.4. SIGNATURE .....</b>	<b>4</b>
<b>2. CLIENT INFORMATION.....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT .....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. GENERAL DESCRIPTION .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>6.1. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>6.2. STATEMENTS .....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
<b>    A.1 OUTPUT POWER.....</b>	<b>12</b>
<b>    A.2 EMISSION LIMIT .....</b>	<b>18</b>
<b>    A.3 FREQUENCY STABILITY.....</b>	<b>22</b>
<b>    A.4 OCCUPIED BANDWIDTH .....</b>	<b>24</b>
<b>    A.5 EMISSION BANDWIDTH.....</b>	<b>29</b>
<b>    A.6 BAND EDGE COMPLIANCE .....</b>	<b>34</b>
<b>    A.7 CONDUCTED SPURIOUS EMISSION .....</b>	<b>41</b>
<b>    A.8 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>43</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE .....</b>	<b>44</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China 100191

### **1.2. Testing Environment**

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: 2018-09-27

Testing End Date: 2018-10-22

### **1.4. Signature**



Dong Yuan

(Prepared this test report)



Zhou Yu

(Reviewed this test report)



Zhao Hui Lin

Deputy Director of the laboratory

(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Palm Ventures Group  
Address /Post: 461 2nd Street - #C337-San Francisco - CA 94107  
Contact: Francois CHAMBON  
Email: francois@palmventuresgroup.com  
Telephone: +8618675503761  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Palm Ventures Group  
Address /Post: 461 2nd Street - #C337-San Francisco - CA 94107  
Contact: Francois CHAMBON  
Email: francois@palmventuresgroup.com  
Telephone: +8618675503761  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	HSUPA/HSDPA/UMTS Quad Band/GSM Quad Band/LTE 5 Bands mobile phone
Model Name	PVG100E/PVG100EU
FCC ID	2AOETPVG100E
Antenna	Embedded
Output power	25.52dBm maximum EIRP measured for Band 7
Extreme vol. Limits	3.6VDC to 4.4VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT19a	352506100002898	03	3B1K-1	2018-09-25
UT20a	352506100003250	03	3B1K-1	2018-09-25

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description
AE1	Battery

AE1

Model	CAC0770000C1
Manufacturer	BYD
Capacitance	770mAh

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

The Equipment Under Test (EUT) is a model of HSUPA/HSDPA/UMTS Quad Band/GSM Quad Band/LTE 5 Bands mobile phone with embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-17 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI/TIA-102.CAAA -E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

## 5. LABORATORY ENVIRONMENT

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber 2** (8.6 meters × 6.1 meters × 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

**Semi-anechoic chamber 2 / Fully-anechoic chamber 3** (10 meters × 6.7 meters × 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	<±3.5 dB, 3 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

#### LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	27.53(m), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

## 6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1.

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the LTE functions among the features described in section 3.

## 7. Test Equipments Utilized

NO.	DESCRIPTION	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	Test Receiver	ESU26	100235	R&S	2019-03-31	1 year
2	Test Receiver	ESU26	100376	R&S	2018-12-27	1 year
3	EMI Antenna	3117	00058889	ETS-Lindgren	2020-05-27	3 year
4	Universal Radio Communication Tester	CMU200	108646	R&S	2019-01-05	1 year
5	Universal Radio Communication Tester	CMW500	159082	R&S	2019-01-05	1 year
6	Spectrum Analyzer	FSU26	200030	R&S	2019-06-04	1 year
7	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-05-10	3 year
8	Signal Generator	SMF100A	101295	R&S	2018-12-23	1 year
9	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 year
10	Loop Antenna	HFH2-Z2	829324/007	R&S	2018-12-14	3 year

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement result**

###### **LTE band 7**

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2567.5	20.23	19.92
		2535	20.26	20.18
		2502.5	19.78	19.76
	1 RB low	2567.5	20.23	20.22
		2535	20.23	19.84
		2502.5	19.83	20.24
	50% RB mid	2567.5	20.41	20.53
		2535	20.30	20.17
		2502.5	20.31	20.29
	100% RB	2567.5	20.43	20.48
		2535	20.29	20.48
		2502.5	20.26	20.41
10MHz	1 RB high	2565	20.49	20.21
		2535	20.32	20.14
		2505	20.15	20.04
	1 RB low	2565	20.53	20.38
		2535	20.38	20.27
		2505	20.14	20.39
	50% RB mid	2565	20.43	20.53
		2535	20.33	20.43
		2505	20.44	20.34

	100% RB	2565	20.46	20.42
		2535	20.34	20.26
		2505	20.30	20.27
15MHz	1 RB high	2562.5	20.41	20.27
		2535	20.26	20.11
		2507.5	20.19	20.38
	1 RB low	2562.5	20.44	20.31
		2535	20.32	20.12
		2507.5	20.27	20.26
	50% RB mid	2562.5	20.46	20.49
		2535	20.30	20.35
		2507.5	20.26	20.19
	100% RB	2562.5	20.44	20.46
		2535	20.33	20.28
		2507.5	20.24	20.25
20MHz	1 RB high	2560	20.37	20.11
		2535	20.22	20.12
		2510	19.97	19.81
	1 RB low	2560	20.23	20.21
		2535	19.96	20.06
		2510	19.72	19.74
	50% RB mid	2560	20.49	20.53
		2535	20.28	20.10
		2510	20.25	20.37
	100% RB	2560	20.39	20.42
		2535	20.30	20.30
		2510	20.22	20.19

### A.1.3 Radiated

#### A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 27.50(h)(2) specifies “Mobile stations are limited to 2.0 watts EIRP.”.

Rule Part 27.50(a)(3) specifies “For mobile and portable stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth.”


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

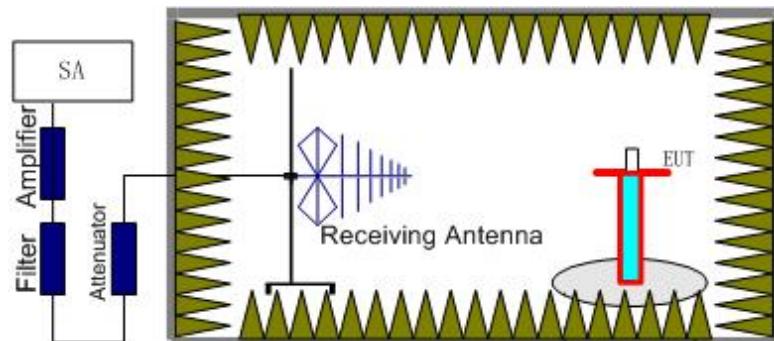

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

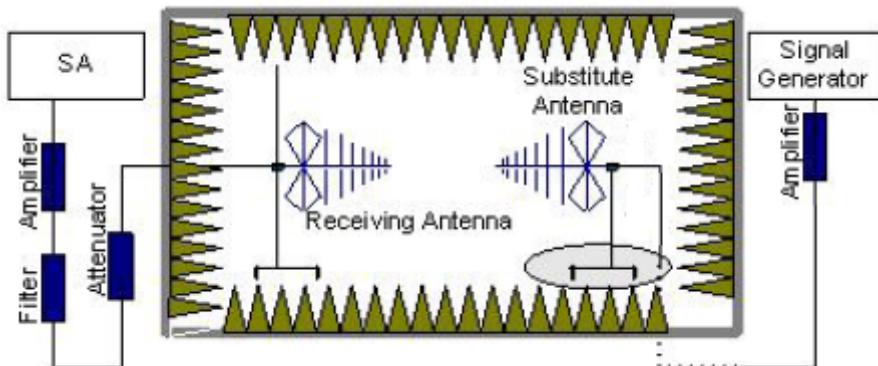

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss ( $P_{cl}$ ), the substitution antenna Gain ( $G_a$ ) and the amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15$ .

**A.1.3.3 Measurement result**
**LTE Band 7- EIRP 27.50(h)(2)**

Limits: ≤33 dBm (2W)

**LTE Band 7\_5MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>c</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-28.98	3.58	45.68	6.10	19.22	33.00	13.78	H
2535.00	-28.82	3.63	44.82	6.16	18.53	33.00	14.47	H
2567.50	-30.04	3.65	44.92	6.22	17.45	33.00	15.55	H

**LTE Band 7\_10MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>c</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-29.19	3.59	45.64	6.11	18.97	33.00	14.03	H
2535.00	-27.93	3.63	44.82	6.16	19.42	33.00	13.58	H
2565.00	-28.92	3.65	44.97	6.22	18.62	33.00	14.38	H

**LTE Band 7\_15MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>c</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-27.81	3.59	44.92	6.11	19.63	33.00	13.37	H
2535.00	-28.23	3.63	44.82	6.16	19.12	33.00	13.88	H
2562.50	-30.20	3.65	45.67	6.21	18.03	33.00	14.97	H

**LTE Band 7\_20MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>c</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-28.55	3.58	45.36	6.12	19.35	33.00	13.65	H
2535.00	-27.83	3.63	44.82	6.16	19.52	33.00	13.48	H
2560.00	-31.15	3.64	45.98	6.21	17.40	33.00	15.60	H

**LTE Band 7\_5MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-29.06	3.58	45.68	6.10	19.14	33.00	13.86	H
2535.00	-28.95	3.63	44.82	6.16	18.40	33.00	14.60	H
2567.50	-30.09	3.65	44.92	6.22	17.40	33.00	15.60	H

**LTE Band 7\_10MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-27.55	3.59	45.64	6.11	20.61	33.00	12.39	H
2535.00	-28.67	3.63	44.82	6.16	18.68	33.00	14.32	H
2565.00	-29.18	3.65	44.97	6.22	18.36	33.00	14.64	H

**LTE Band 7\_15MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-27.46	3.59	44.92	6.11	19.98	33.00	13.02	H
2535.00	-28.65	3.63	44.82	6.16	18.70	33.00	14.30	H
2562.50	-29.78	3.65	45.67	6.21	18.45	33.00	14.55	H

**LTE Band 7\_20MHz\_16QAM**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-27.31	3.58	45.36	6.12	20.59	33.00	12.41	H
2535.00	-27.57	3.63	44.82	6.16	19.78	33.00	13.22	H
2560.00	-30.53	3.64	45.98	6.21	18.02	33.00	14.98	H

Peak EIRP(dBm) = P<sub>Mea</sub>(-27.55dBm) - G<sub>a</sub> (-6.11dBi) - P<sub>Ag</sub> (-45.64dB) - P<sub>cl</sub> (3.59dB) = 20.61dBm

**ANALYZER SETTINGS:**

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is  $U = 0.96$  dB,  $k = 2$ .

## A.2 EMISSION LIMIT


### A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 7.

**The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

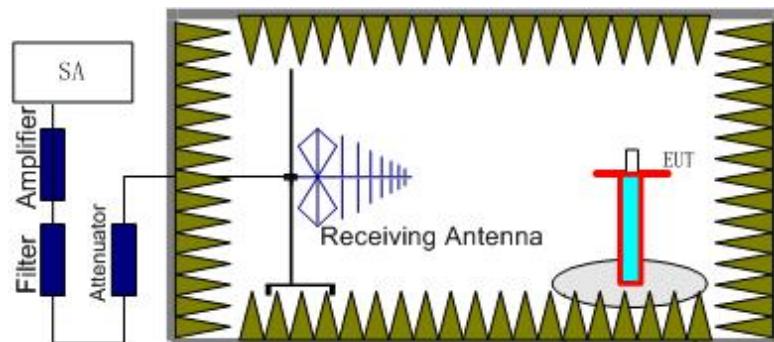

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

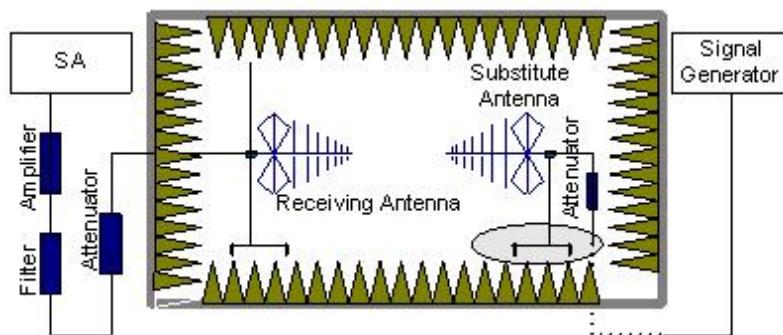

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dB) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15dB$ .

#### **A.2.2 Measurement Limit**

Part 27.53(a) states for mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz; By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz; By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz.

#### **A.2.3 Measurement Results**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 7. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 7 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

**LTE Band 7, 5 MHz, QPSK, Channel 20775**

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Margin(dB )	Polarizatio n
5004.02	-56.82	6.60	9.91	-53.51	-13.00	40.51	H
7510.01	-54.68	8.35	12.21	-50.82	-13.00	37.82	H
10005.01	-53.02	9.20	12.90	-49.32	-13.00	36.32	V
12523.01	-48.56	10.24	13.21	-45.59	-13.00	32.59	V
15026.00	-44.94	11.25	13.98	-42.21	-13.00	29.21	V
17525.00	-43.13	12.82	14.94	-41.01	-13.00	28.01	H

**LTE Band 7, 5 MHz, QPSK, Channel 21100**

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Margin(dB )	Polarizatio n
5072.02	-57.57	6.69	10.00	-54.26	-13.00	41.26	H
7617.01	-54.45	8.05	12.29	-50.21	-13.00	37.21	H
10121.01	-51.52	9.43	12.95	-48.00	-13.00	35.00	V
12663.01	-49.30	10.36	13.30	-46.36	-13.00	33.36	V
15228.00	-45.62	11.37	13.86	-43.13	-13.00	30.13	V
17757.00	-43.22	12.50	15.26	-40.46	-13.00	27.46	H

**LTE Band 7, 5 MHz, QPSK, Channel 21425**

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm )	Limit (dBm)	Margin(dB )	Polarizatio n
5133.02	-53.43	6.86	10.09	-50.20	-13.00	37.20	V
7737.01	-53.80	8.38	12.39	-49.79	-13.00	36.79	H
10311.01	-50.70	9.66	13.02	-47.34	-13.00	34.34	V
12877.01	-48.52	10.57	13.43	-45.66	-13.00	32.66	H
15418.00	-44.94	11.42	13.75	-42.61	-13.00	29.61	V
17961.00	-42.46	12.89	15.55	-39.80	-13.00	26.80	H

**LTE Band 7, 5 MHz, 16QAM, Channel 20775**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5015.02	-57.63	6.58	9.92	-54.29	-13.00	41.29	H
7524.01	-54.60	8.29	12.22	-50.67	-13.00	37.67	V
10010.01	-52.91	9.21	12.90	-49.22	-13.00	36.22	H
12502.01	-49.29	10.18	13.20	-46.27	-13.00	33.27	V
15031.00	-44.76	11.26	13.98	-42.04	-13.00	29.04	H
17520.00	-42.35	12.80	14.93	-40.22	-13.00	27.22	V

**LTE Band 7, 5 MHz, 16QAM, Channel 21100**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarizatio n
5061.02	-57.30	6.66	9.99	-53.97	-13.00	40.97	H
7599.01	-54.60	7.98	12.28	-50.30	-13.00	37.30	H
10151.01	-51.28	9.38	12.96	-47.70	-13.00	34.70	V
12660.01	-48.61	10.37	13.30	-45.68	-13.00	32.68	V
15193.00	-45.29	11.40	13.88	-42.81	-13.00	29.81	V
17728.00	-43.47	12.34	15.22	-40.59	-13.00	27.59	H

**LTE Band 7, 5 MHz, 16QAM, Channel 21425**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenn a Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarizatio n
5138.02	-56.85	6.86	10.09	-53.62	-13.00	40.62	V
7713.01	-54.22	8.41	12.37	-50.26	-13.00	37.26	V
10288.01	-52.49	9.60	13.02	-49.07	-13.00	36.07	V
12821.01	-49.09	10.71	13.39	-46.41	-13.00	33.41	V
15408.00	-45.74	11.40	13.76	-43.38	-13.00	30.38	V
17963.00	-43.59	12.89	15.55	-40.93	-13.00	27.93	V

Note: The maximum value of expanded measurement uncertainty for this test item is  $U = 4.2 \text{ dB}$ ,  $k = 2$ .

## **A.3 FREQUENCY STABILITY**

### **A.3.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 7, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.3.2 Measurement Limit**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.4VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

### A.3.3 Measurement results

#### LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)

##### Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.6	-7.44	-11.16	0.0029	0.0044
3.8	-5.97	-11.22	0.0024	0.0044
4.4	-8.63	-13.22	0.0034	0.0052

##### Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-7.77	-11.54	0.0031	0.0046
40	-11.10	-11.66	0.0044	0.0046
30	-7.00	-12.66	0.0028	0.0050
20	-11.36	-14.02	0.0045	0.0055
10	-7.78	-11.30	0.0031	0.0045
0	-10.41	-12.12	0.0041	0.0048
-10	-8.07	-12.60	0.0032	0.0050

Expanded measurement uncertainty for this test item is 10 Hz,  $k = 2$ .

## **A.4 OCCUPIED BANDWIDTH**

### **A.4.1 Occupied Bandwidth Results**


Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 4.2:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

**LTE band 7, 5MHz (99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
2535.0	QPSK	16QAM
	4495.19	4519.23

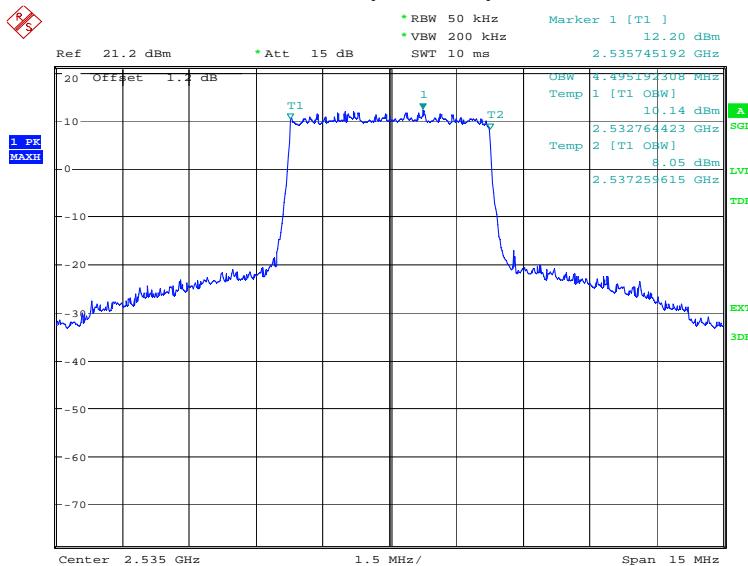**LTE band 7, 5MHz Bandwidth, QPSK (99% BW)**


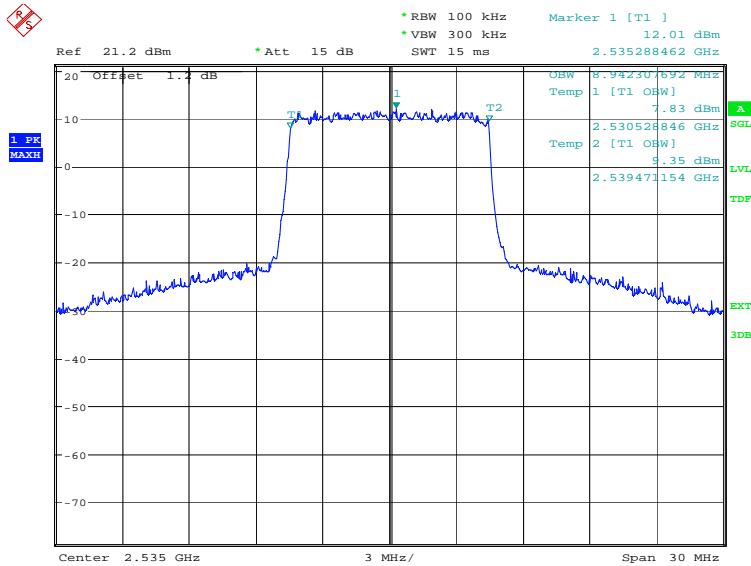
Date: 17.OCT.2018 12:22:14

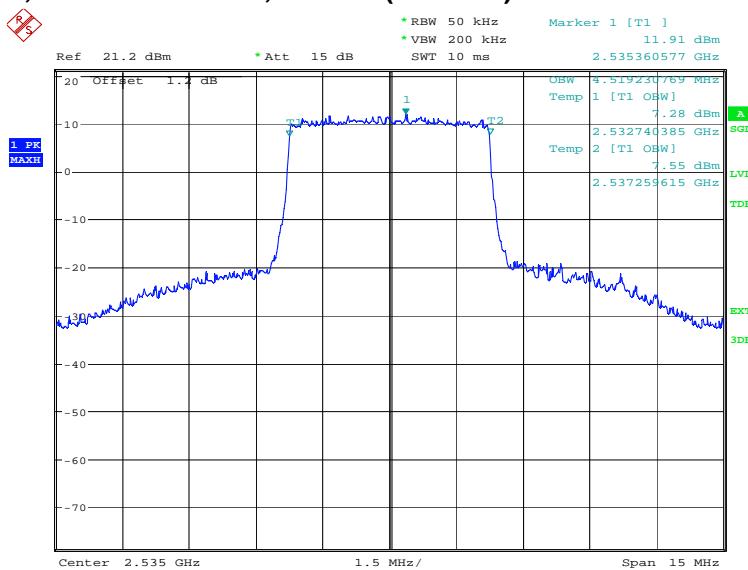**LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)**


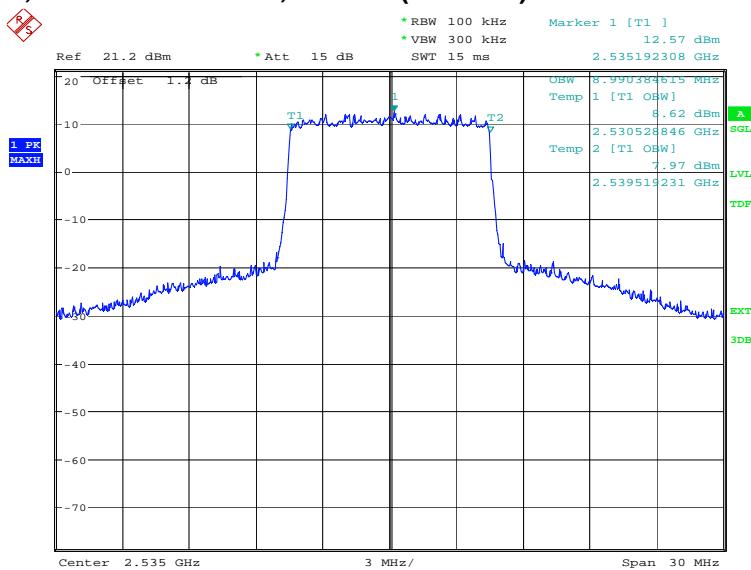
Date: 17.OCT.2018 12:23:37

**LTE band 7, 10MHz (99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
2535.0	QPSK	16QAM
	8942.31	8990.38

**LTE band 7, 10MHz Bandwidth, QPSK (99% BW)**


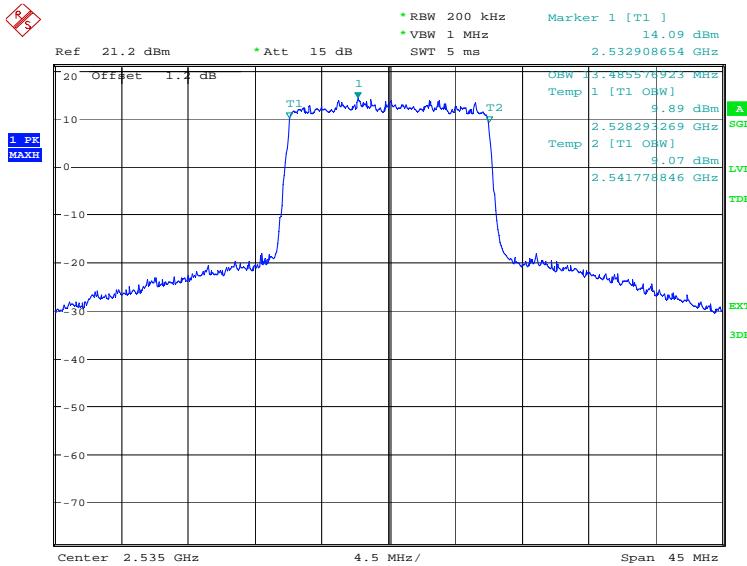
Date: 17.OCT.2018 12:25:02

**LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)**


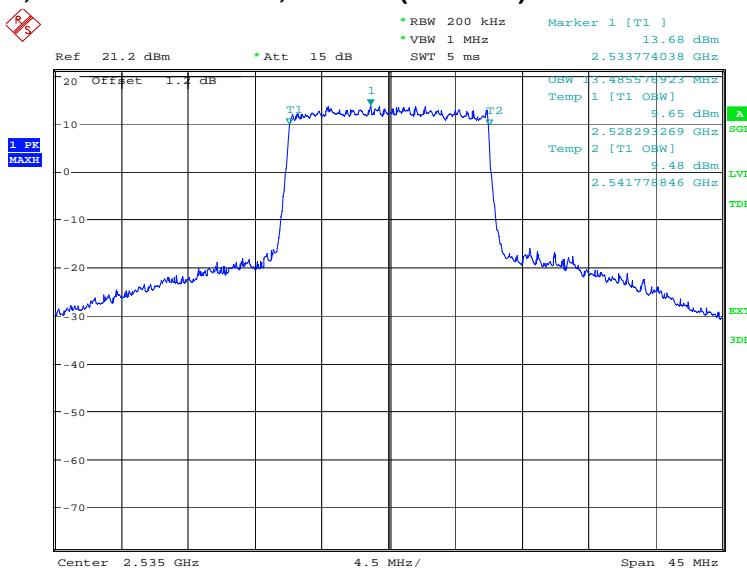
Date: 17.OCT.2018 12:26:26

**LTE band 7, 15MHz (99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
2535.0	QPSK	16QAM
	13485.58	13485.58

**LTE band 7, 15MHz Bandwidth, QPSK (99% BW)**


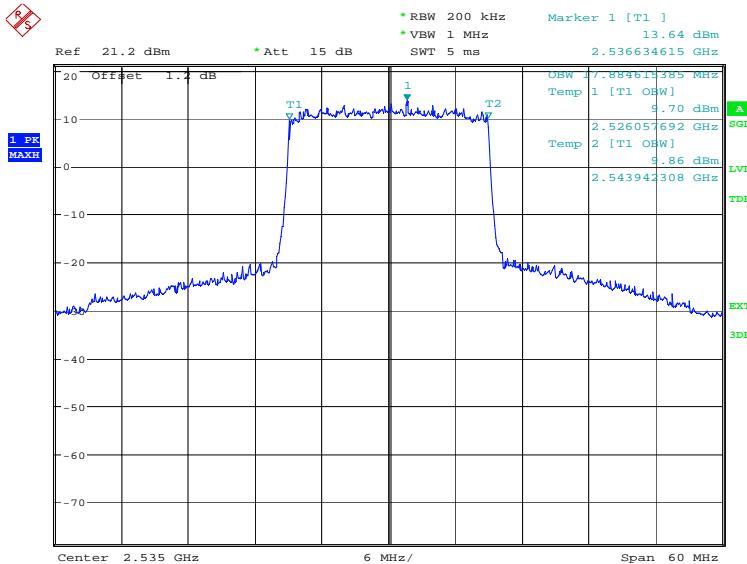
Date: 17.OCT.2018 12:27:51

**LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)**


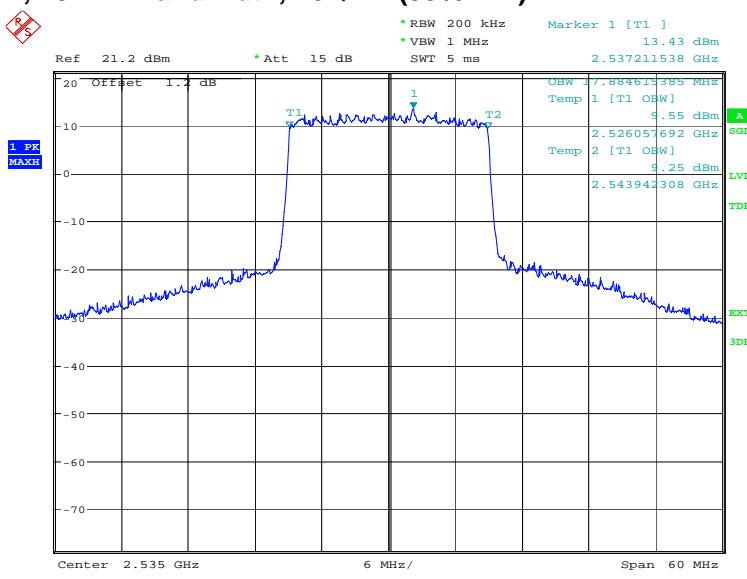
Date: 17.OCT.2018 12:29:14

**LTE band 7, 20MHz (99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)	
2535.0	QPSK	16QAM
	17884.62	17884.62

**LTE band 7, 20MHz Bandwidth, QPSK (99% BW)**


Date: 17.OCT.2018 12:30:39

**LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)**


Date: 17.OCT.2018 12:32:02


## **A.5 EMISSION BANDWIDTH**

### **A.5.1 Emission Bandwidth Results**


The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

**LTE band 7, 5MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)	
2535.0	QPSK	16QAM
	4951.92	4879.81

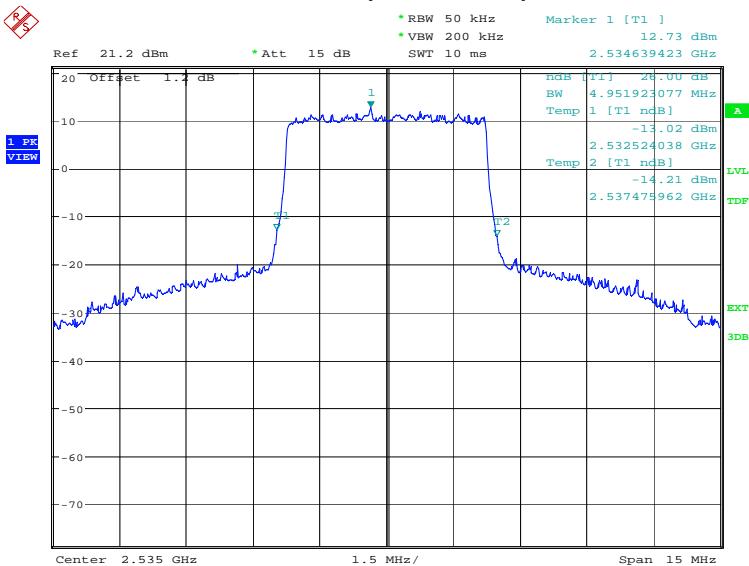**LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)**


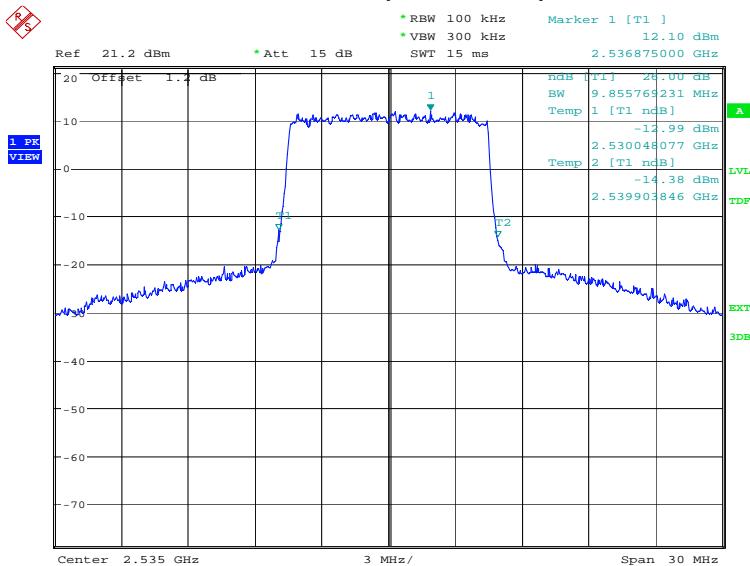
Date: 17.OCT.2018 12:35:44

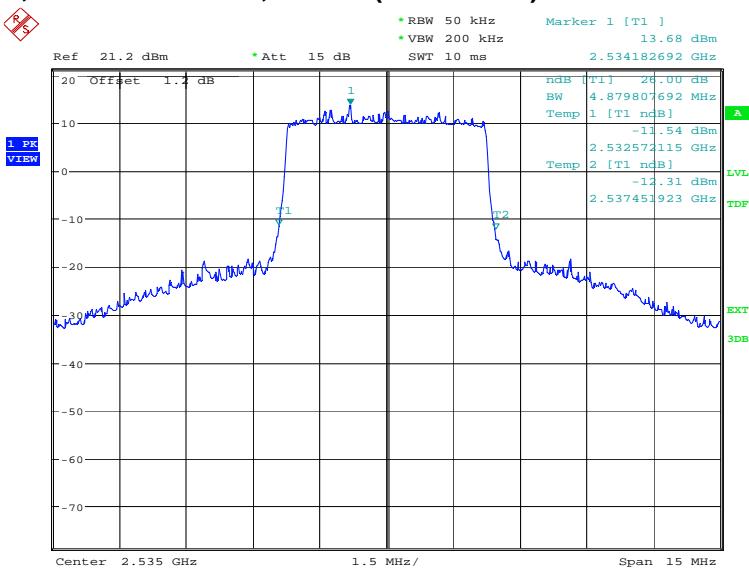**LTE band 7, 5MHz Bandwidth,16QAM (-26dBc BW)**


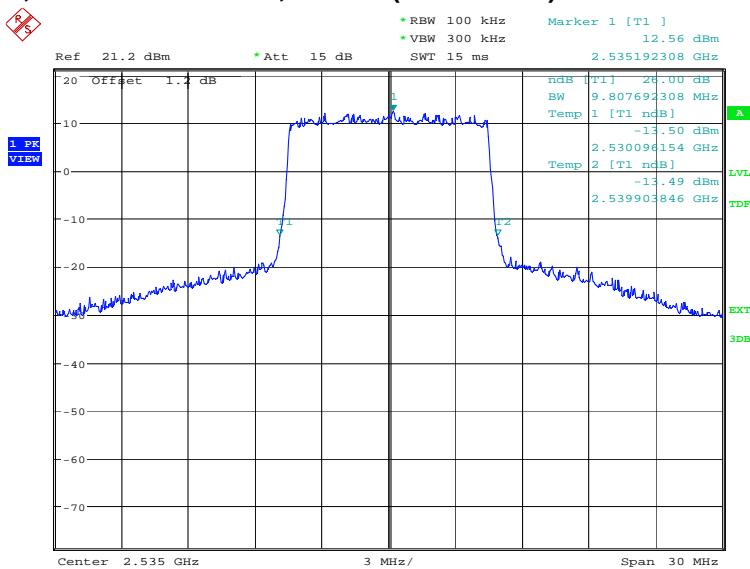
Date: 17.OCT.2018 12:37:08

**LTE band 7, 10MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)	
2535.0	QPSK	16QAM
	9855.77	9807.69

**LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)**


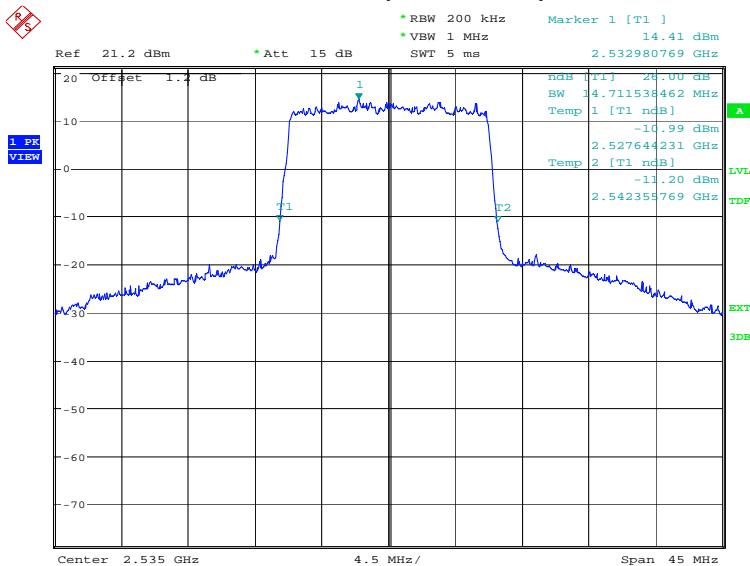
Date: 17.OCT.2018 12:38:33

**LTE band 7, 10MHz Bandwidth,16QAM (-26dBc BW)**


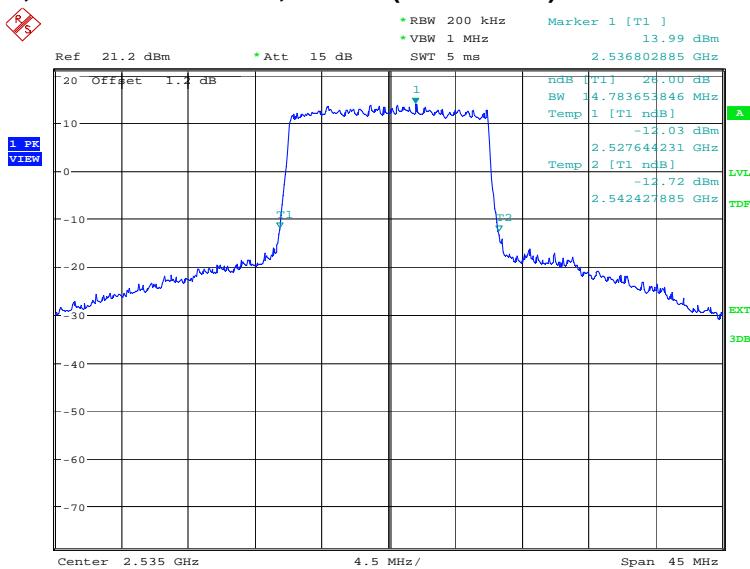
Date: 17.OCT.2018 12:39:57

**LTE band 7, 15MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)	
2535.0	QPSK	16QAM
	14711.54	14783.65

**LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)**


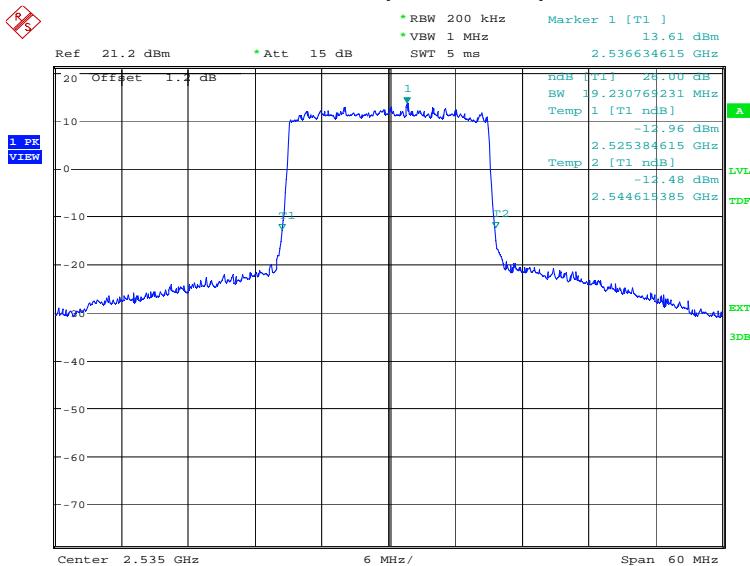
Date: 17.OCT.2018 12:41:22

**LTE band 7, 15MHz Bandwidth,16QAM (-26dBc BW)**


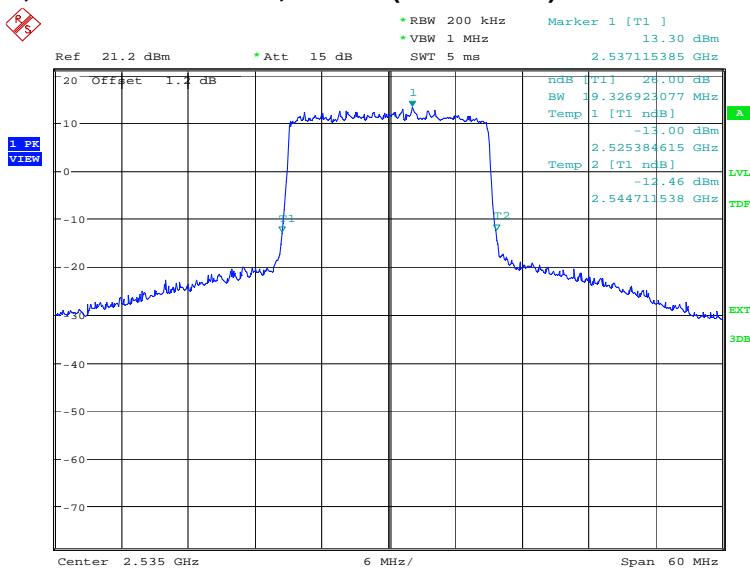
Date: 17.OCT.2018 12:42:46

**LTE band 7, 20MHz (-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)	
2535.0	QPSK	16QAM
	19230.77	19326.92

**LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)**


Date: 17.OCT.2018 12:44:11

**LTE band 7, 20MHz Bandwidth,16QAM (-26dBc BW)**


Date: 17.OCT.2018 12:45:35

## **A.6 BAND EDGE COMPLIANCE**

### **A.6.1 Measurement limit**

According to KDB 971168 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.


Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### A.6.2 Measurement result

Only worst case result is given below


LTE band 7

OBW: 1RB-low\_offset

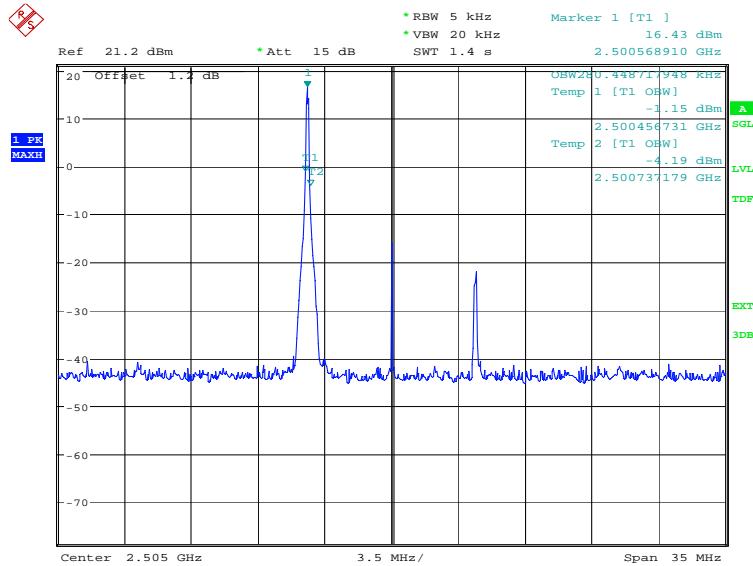


Date: 19.OCT.2018 09:36:24


LOW BAND EDGE BLOCK-1RB-low\_offset

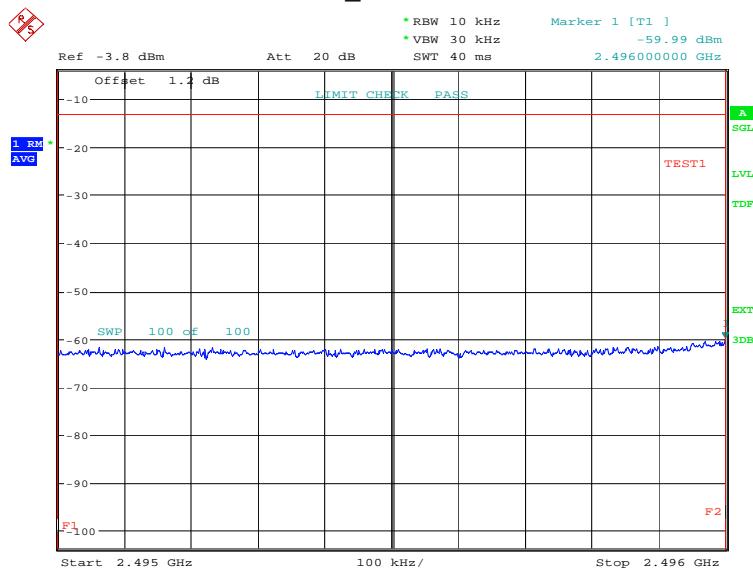


Date: 19.OCT.2018 09:36:44

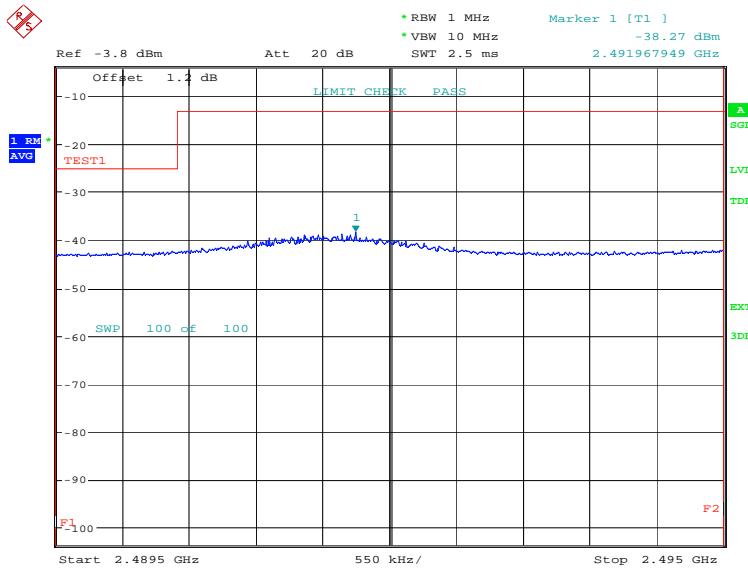


Date: 19.OCT.2018 09:36:59

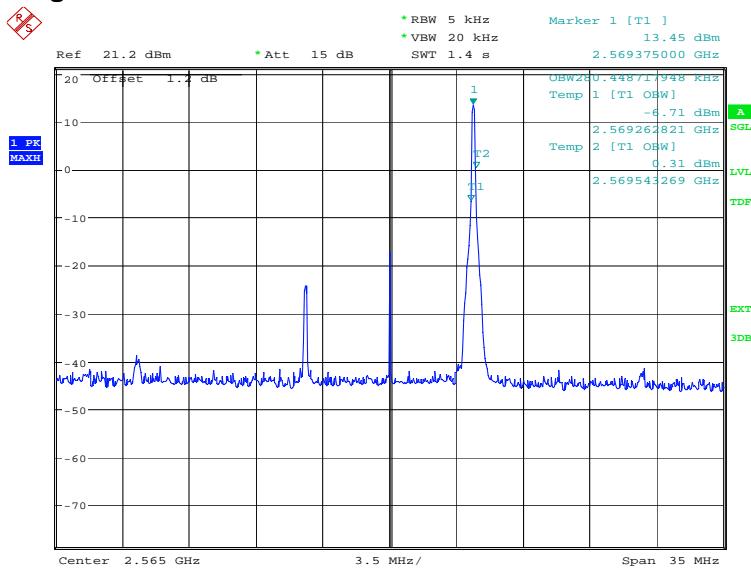**OBW: 1RB-high\_offset**


Date: 19.OCT.2018 10:45:55

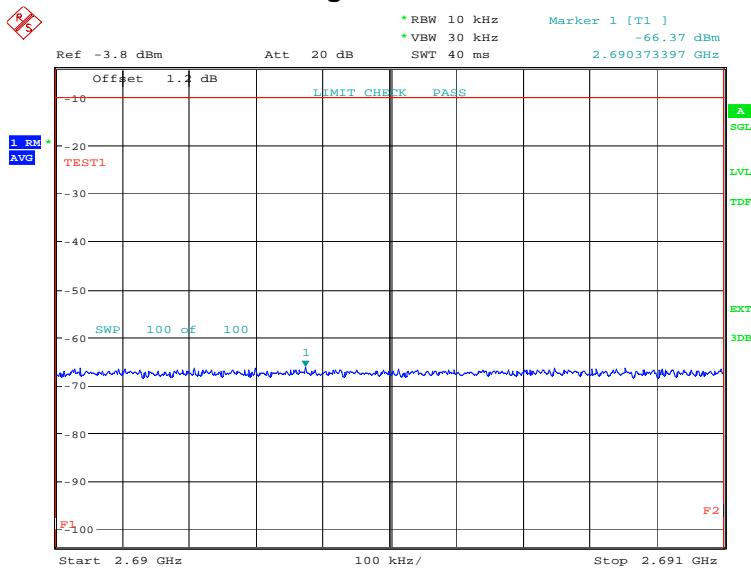
**HIGH BAND EDGE BLOCK-1RB-high\_offset**


Date: 19.OCT.2018 10:46:15

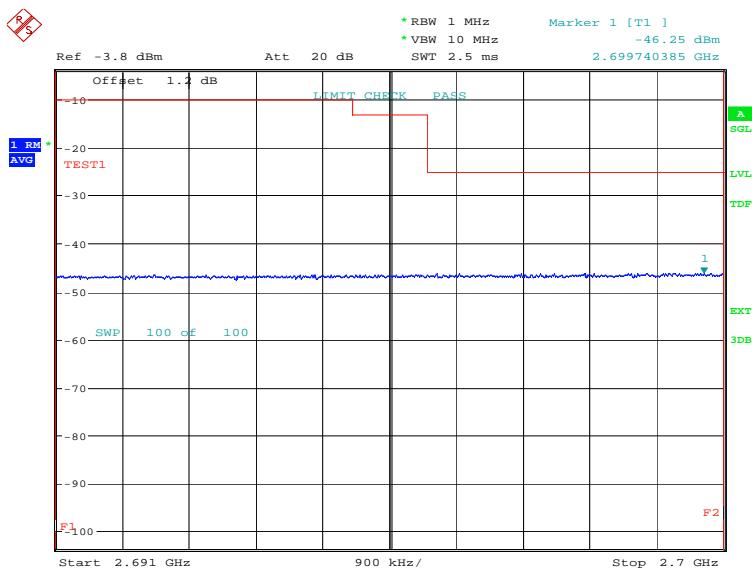


Date: 19.OCT.2018 10:46:30

### LOW BAND EDGE BLOCK-20MHz-100%RB

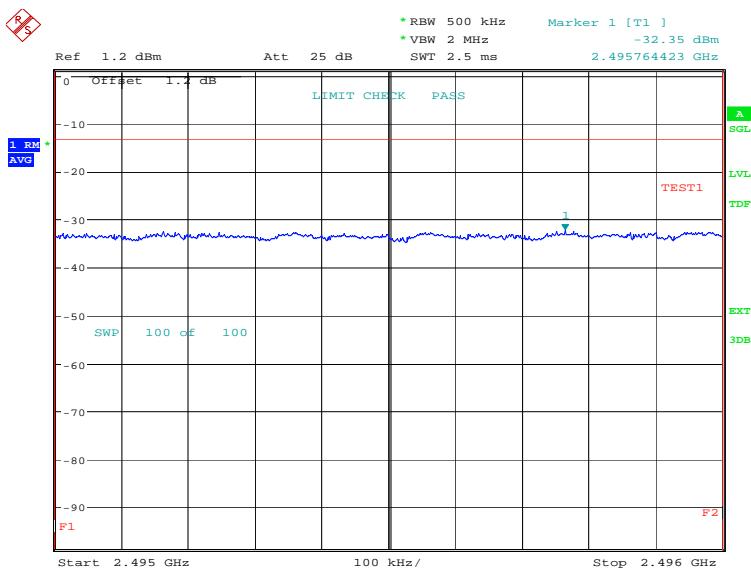


Date: 19.OCT.2018 09:42:43

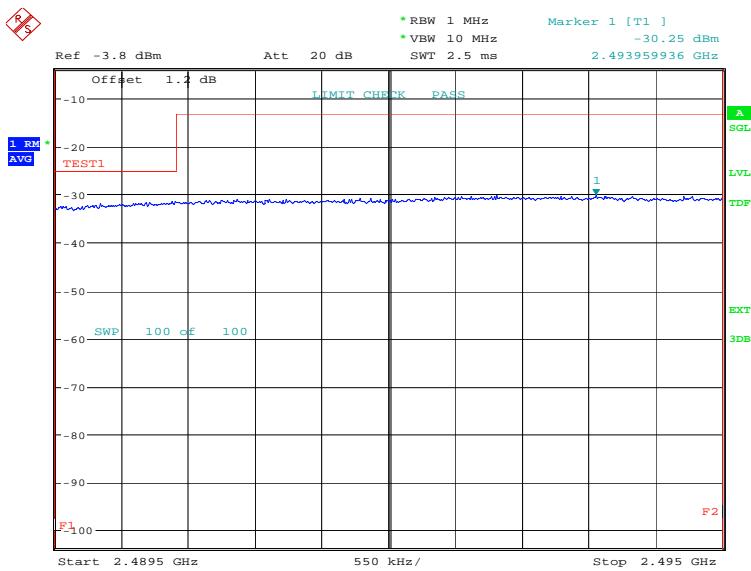


Date: 19.OCT.2018 09:42:58

### HIGH BAND EDGE BLOCK-20MHz-100%RB

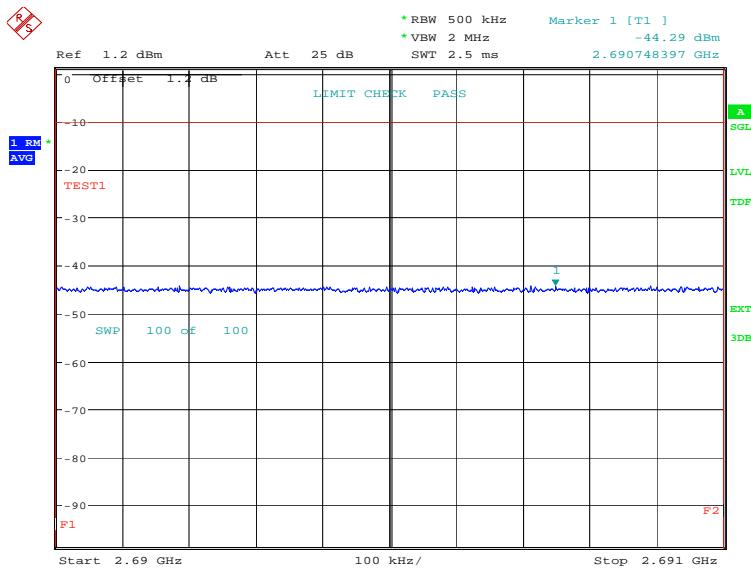

Date: 19.OCT.2018 09:43:31

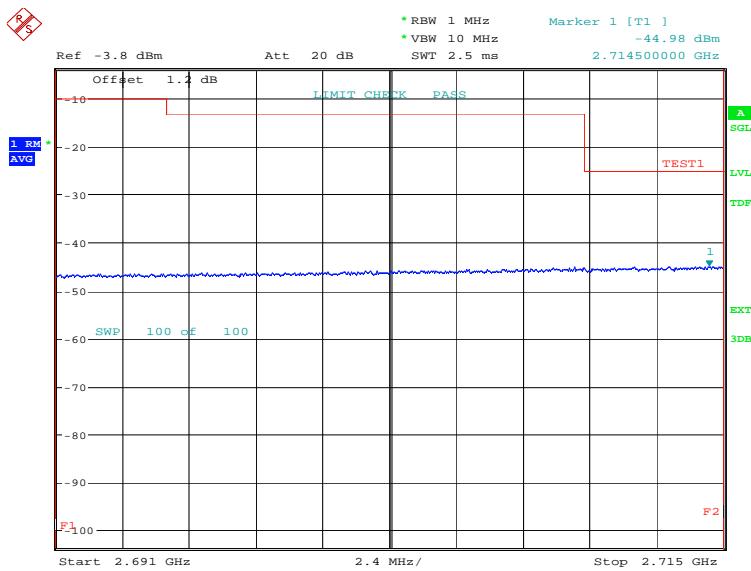

Date: 19.OCT.2018 09:43:46

## **A.7 CONDUCTED SPURIOUS EMISSION**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.


1. From RSS-GEN 6.13: The measurement method shall be described in the test report. When the applicable unwanted emissions limits are defined in relative terms, the same parameter, peak power or average power, used for the transmitter's output power measurement shall also be used for the unwanted emission measurements. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

### A. 7.2 Measurement result

Only worst case result is given below

#### LTE band 7: 30MHz – 26.5GHz

Spurious emission limit –13dBm.

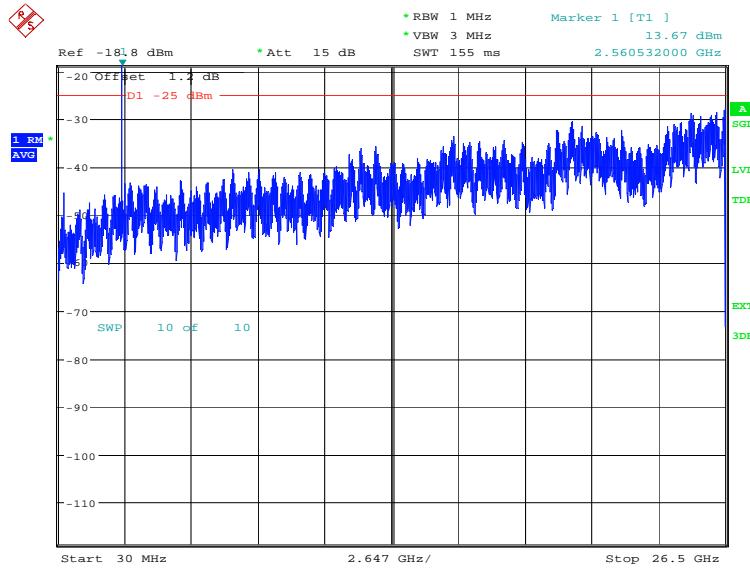

Date: 19.OCT.2018 10:42:16

## **A.8 PEAK-TO-AVERAGE POWER RATIO**

### **Reference**

FCC: CFR Part 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

### **A.8.1 Measurement limit**

not exceed 13 dB

### **A.8.2 Measurement results**

#### **LTE band 7, 20MHz**

Frequency(MHz)	PAPR(dB)	
	QPSK	16QAM
2510.0	6.96	7.44

## ANNEX B: Accreditation Certificate



**\*\*\*END OF REPORT\*\*\***