

TEST REPORT

Part 15 Subpart C 15.247

Equipment under test Wireless Barcode Scanner

Model name TSK-4500Plus

Derivative model TSK-5500Plus

FCC ID 2AOHVTSK-4500PLUS

Applicant Techscan Korea Co.,Ltd.

Manufacturer Techscan Korea Co.,Ltd.

Date of test(s) 2017.12.14 ~ 2017.12.20

Date of issue 2017.12.21

Issued to

Techscan Korea Co.,Ltd.

Guro-Dong-410, Woorim e-biz Center II, 12, Digital-ro 33-gil,

Guro-gu, Seoul, Korea

Tel: + 82-2-890-5440 / Fax: + 82-2-890-5443

Issued by

KES Co., Ltd.

C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,

Gyeonggi-do, Korea

473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Hyeon-su, Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



Revision history

Revision	Date of issue	Test report No.	Description
-	2017.12.21	KES-RF-17T0132	Initial

TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration	5
1.3.	Device modifications.....	5
1.4.	Information about derivative model	5
1.5.	Frequency/channel operations.....	5
1.6.	Accessory information	5
2.	Summary of tests	6
3.	Test results.....	7
3.1.	20 dB bandwidth	7
3.2.	Output power.....	9
3.3.	Carrier frequency separation	11
3.4.	Number of hopping frequency	13
3.5.	Time of occupancy	15
3.6.	Radiated restricted band and emissions.....	17
3.7.	Conducted band edge and out of band emissions.....	31
Appendix A.	Measurement equipment	34
Appendix B.	Test setup photo.....	35

1. General information

Applicant: Techscan Korea Co.,Ltd.
Applicant address: Guro-Dong-410, Woorim e-biz Center II, 12, Digital-ro 33-gil,
Guro-gu, Seoul, Korea
Test site: KES Co., Ltd.
Test site address: C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Test Facility: FCC Accreditation Designation No.: KR0100, Registration No.: 444148
FCC rule part(s): 15.247
FCC ID: 2AOHVTSK-4500PLUS
Test device serial No.: ☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test: Wireless Barcode Scanner
Frequency range: BT : 2402 Mhz ~ 2480 Mhz (BDR)
Model: TSK-4500Plus
Derivative model: TSK-5500Plus
Modulation technique: BT : FHSS, GFSK
Number of channels: BT : 79ch (Hopping mode), 20ch(AFH mode)
Antenna specification: Type : PCB Antenna, Peak gain : 2.12 dBi
Power source: DC 2.4 V (Rechargeable Battery)

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

Equal hopping frequency use

The channels of this system will be used equally over the long-term distribution of the hopsets.

System receiver input bandwidth

Each channel bandwidth is 1 Mhz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.2. Test configuration

The **Techscan Korea Co.,Ltd. Wireless Barcode Scanner FCC ID: 2AOHVTSK-4500PLUS** was tested per the guidance of ANSI C63.10-2013 and DA 00-705. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

1.3. Device modifications

N/A

1.4. Information about derivative model

The derivative model different from the basic model in engine and Engine's board to scan. The RF module's circuit diagram and hardware are fundamentally same. It is for model management purpose.

1.5. Frequency/channel operations

Ch.	Frequency (MHz)	Rate(Mbps)
00	2402	1
.	.	.
39	2441	1
.	.	.
78	2480	1

1.6. Accessory information

Applicant	Equipment	Manufacturer	Model	Power source
-	-	-	-	-

2. Summary of tests

Reference	Test description	Test results
15.247(a)(1)(iii)	20 dB bandwidth	Pass
15.247(b)(1)	Output power	Pass
15.247(a)(1)	Channel separation	Pass
15.247(a)(1)(iii)	Number of channels	Pass
15.247(a)(1)(iii)	Time of occupancy	Pass
15.205, 15.209	Radiated restricted band and emission	Pass
15.207(d)	Conducted band edge and out of band emissions	Pass
15.207(a)	AC conducted emissions	N/A ^{Note.1}

Note.


1. This device doesn't required AC conducted emission test because only battery is used in actual use condition.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3. Test results

3.1. 20 dB bandwidth

Test setup



Test procedure

DA 00-705

Test setting

1. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
2. RBW $\geq$ 1% of the 20 dB bandwidth
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Sweep = auto couple
7. Trace mode = max hold



Limit

Not applicable

Test results

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured bandwidth(MHz)
2 402	00	1	0.808
2 441	39		0.808
2 480	78		0.821


BDR(1Mbps)

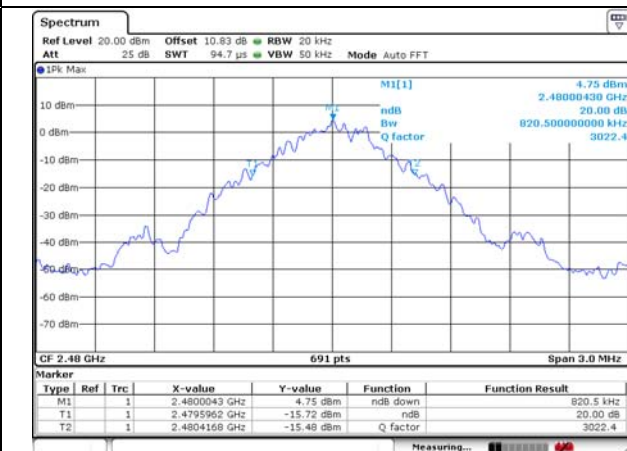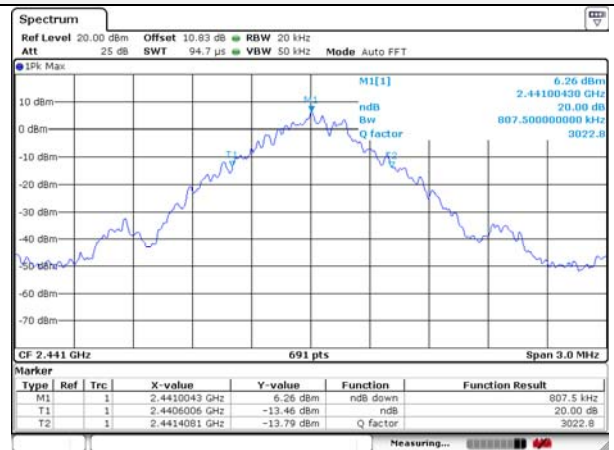

Blank

3.2. Output power

Test setup



Test procedure

DA 00-705

Test setting

1. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
2. RBW > the 20 dB bandwidth of the emission being measured
3. VBW $\geq$ RBW
4. Sweep = Auto
5. Detector function = Peak
6. Trace = Max hold

Limit




According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.

Test results

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured power (dBm)	Peak Power Limit (dBm)
2 402	00	1	9.12	20.97
2 441	39		8.21	20.97
2 480	78		6.95	20.97

BDR(1Mbps)

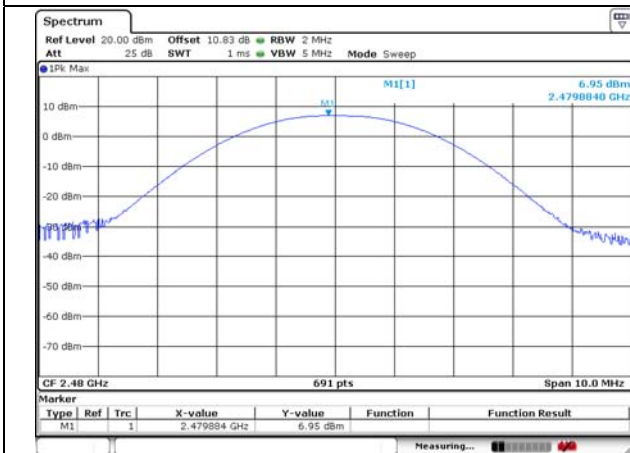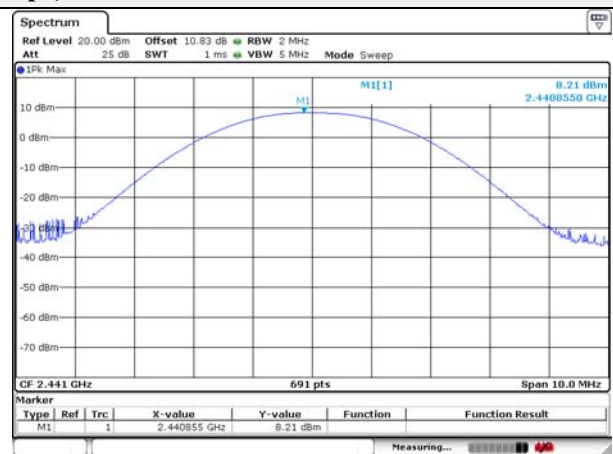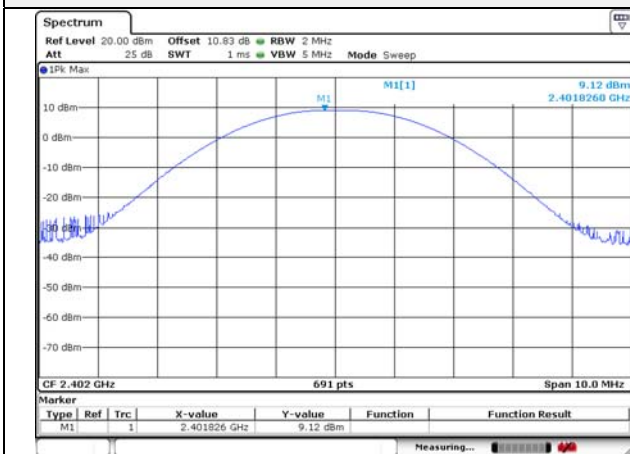


Blank

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.3. Carrier frequency separation

Test setup



Test procedure

DA 00-705

Test setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
4. Video (or Average) Bandwidth (VBW) $\geq$ RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Limit


According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test results

Frequency(MHz)	Channel no.	Data rate(Mbps)	Channel Separation (MHz)
2 441	39	1	1 003


Note:

Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.

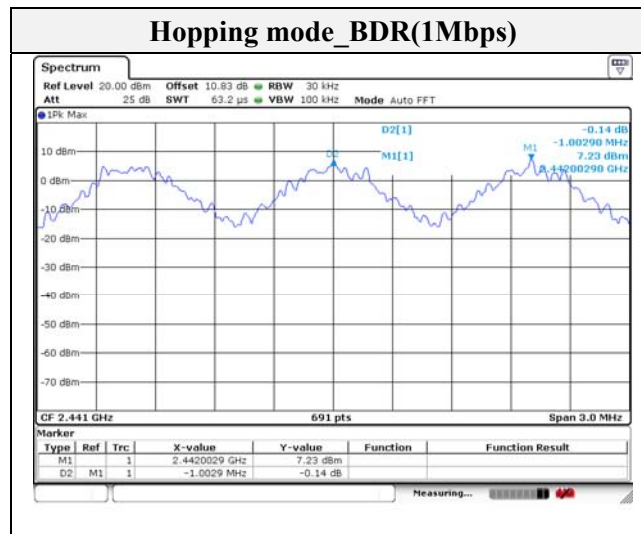

3.4. Number of hopping frequency

Test setup



Test procedure

DA 00-705

Test setting


1. The EUT must have its hopping function enabled.
2. Frequency range: 2 400 MHz ~ 2 441.5 MHz, 2 441.5 MHz ~ 2 483.5 MHz
3. Span = the frequency band of operation
4. RBW = 300 kHz ($\geq 1\%$ of the span)
5. VBW = 1 MHz ($\geq$ RBW)
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold

All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

Test results

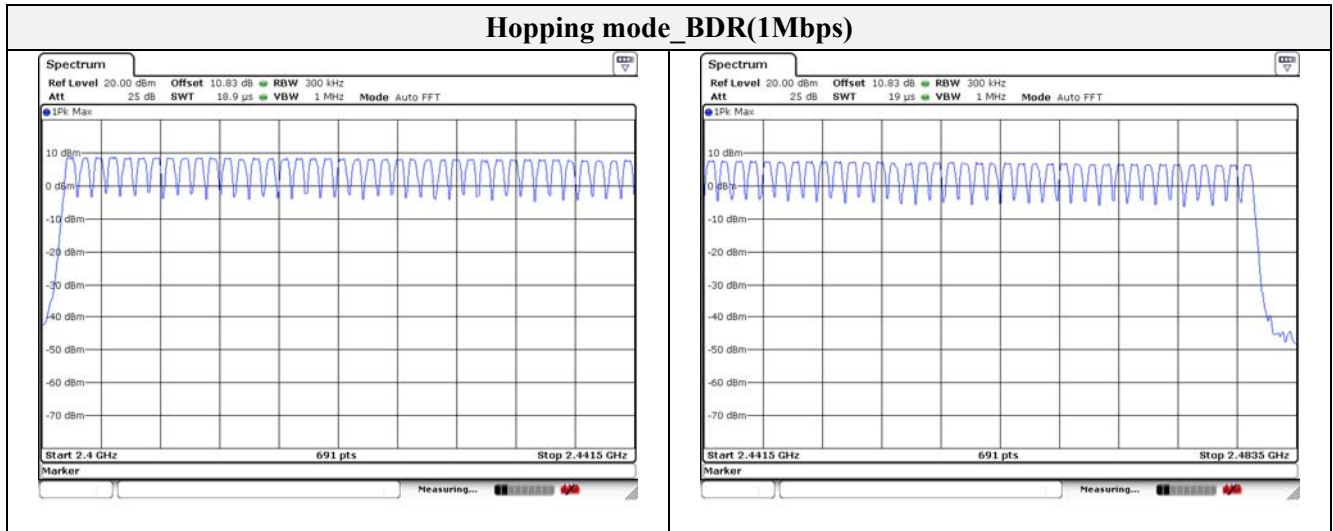


Note:

In case of AFH mode, minimum number of hopping channels is 20.

3.5. Time of occupancy

Test setup



Test procedure

DA 00-705

Test setting

1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
4. RBW = 1 MHz
5. VBW = 1 MHz ($\geq$ RBW)
6. Sweep = as necessary to capture the entire dwell time per hopping channel
7. Detector function = peak
8. Trace = max hold

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

$$\text{A period time} = 0.4(\text{s}) \times 79 = 31.6(\text{s})$$

$$\begin{aligned} &\text{Time of occupancy on the TX channel in 31.6 sec} \\ &= \text{time domain slot length} \times (\text{hop rate} \div \text{number of hop per channel}) \times 31.6 \end{aligned}$$

• Adaptive Frequency Hopping

$$\text{A period time} = 0.4(\text{s}) \times 20 = 8.0(\text{s})$$

$$\begin{aligned} &\text{Time of occupancy on the TX channel in 8.0 sec} \\ &= \text{time domain slot length} \times (\text{hop rate} \div \text{number of hop per channel}) \times 8.0 \end{aligned}$$

Test results

Operation mode: GFSK

Packet type	Frequency (MHz)	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
DH1	2 441	0.506	164.48	400
DH3	2 441	1.756	282.88	400
DH5	2 441	2.951	322.13	400


Note:

Normal Mode

DH1: Dwell time (ms) $\times [(1\ 600 \div 2) \div 79] \times 31.6(s) = 164.48\ (ms)$

DH3: Dwell time (ms) $\times [(1\ 600 \div 4) \div 79] \times 31.6(s) = 282.88\ (ms)$

DH5: Dwell time (ms) $\times [(1\ 600 \div 6) \div 79] \times 31.6(s) = 322.13\ (ms)$

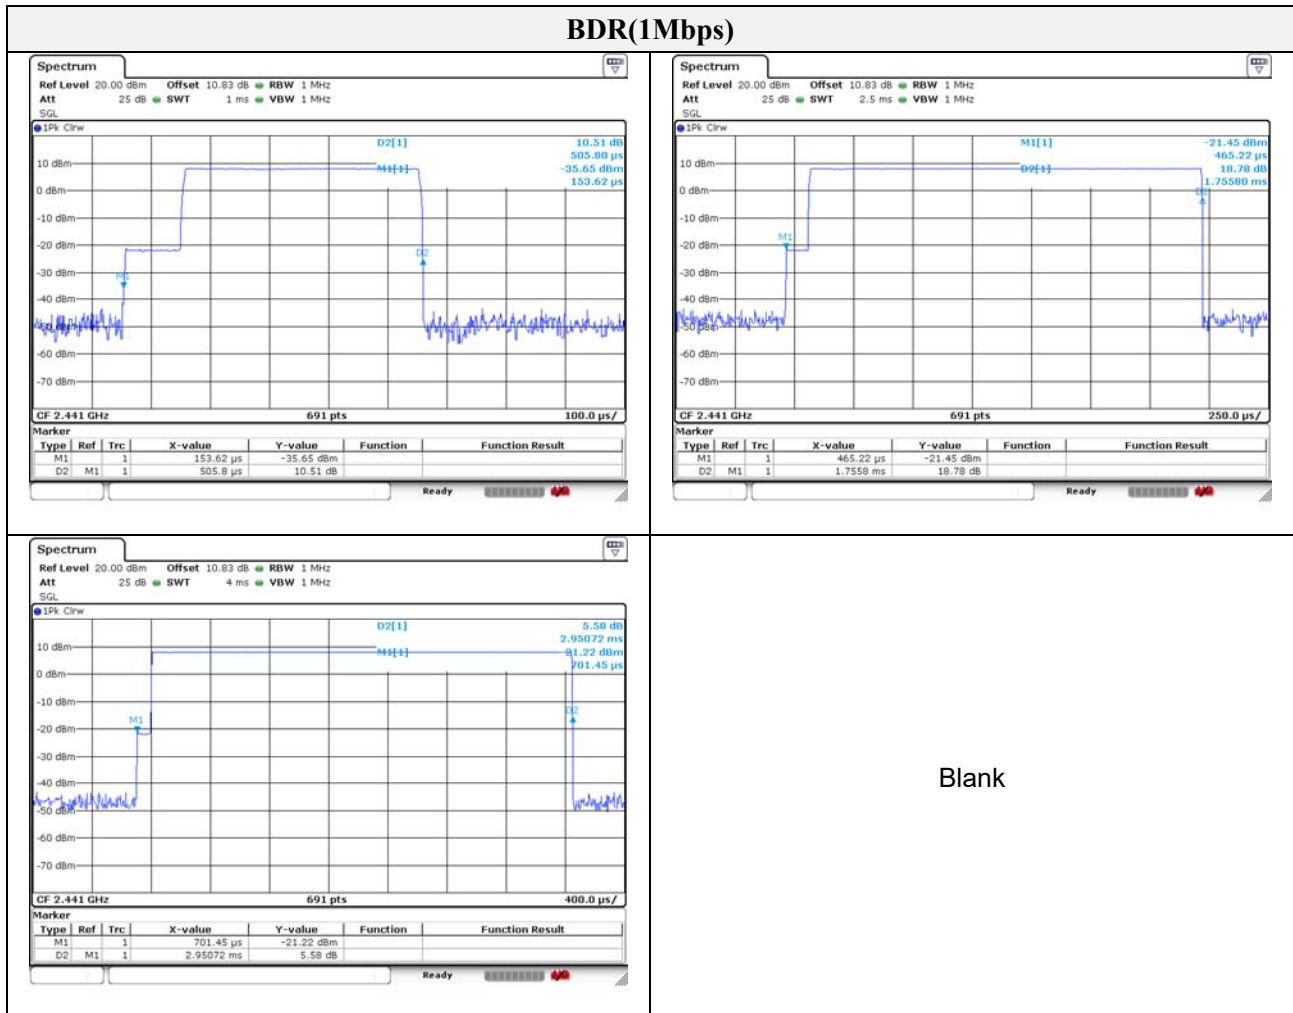


Blank


3.6. Radiated restricted band and emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

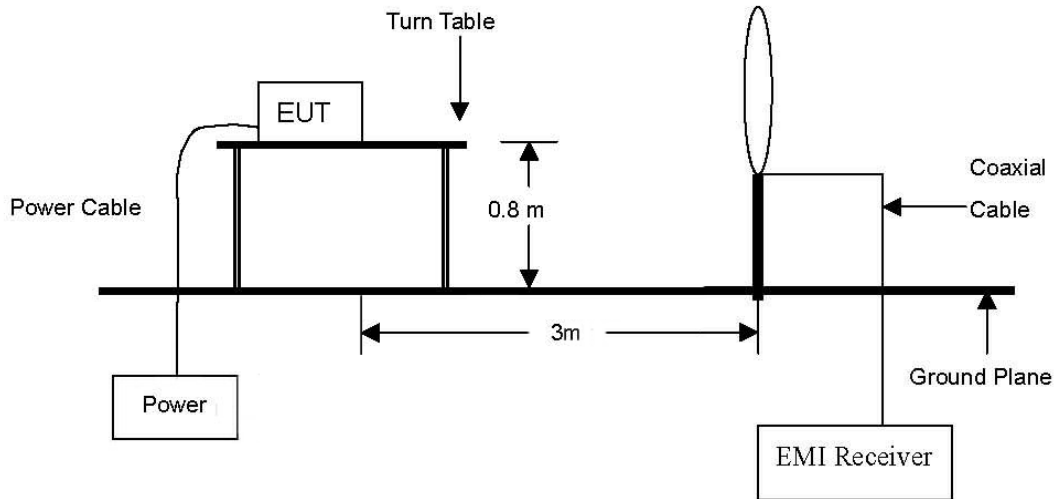

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

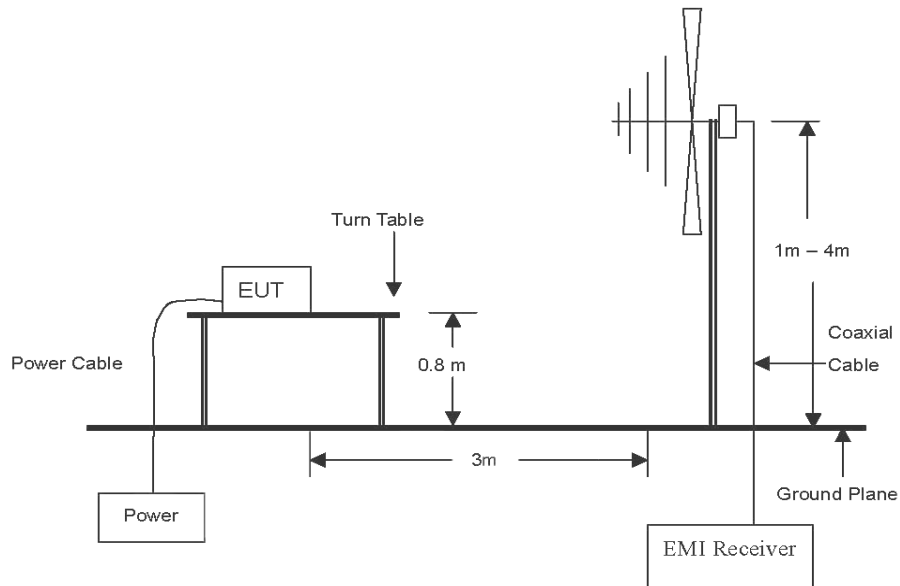

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

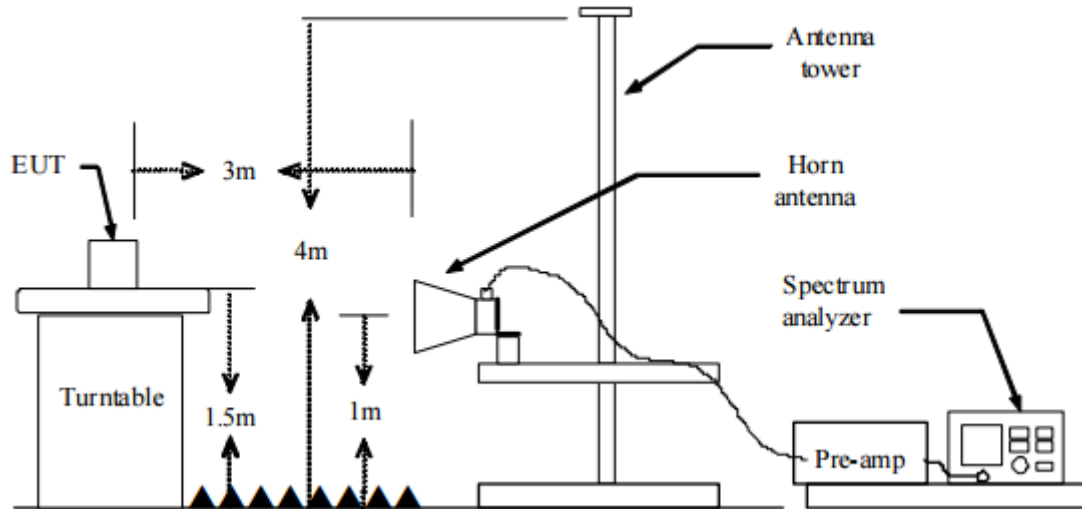

Test procedure

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum analyzer settings for $f < 1 \text{ GHz}$:
 - Span = wide enough to fully capture the emission being measured
 - RBW = 100 kHz
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = quasi peak
 - Trace = max hold
8. Spectrum analyzer settings for $f \geq 1 \text{ GHz}$: Peak
 - Span = wide enough to fully capture the emission being measured
 - RBW = 1 MHz
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
9. Spectrum analyzer settings for $f \geq 1 \text{ GHz}$: Average
 - Span = wide enough to fully capture the emission being measured
 - RBW = 1 MHz
 - VBW $\geq 1/T \text{ Hz}$, where T= pulse width in seconds
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
10. Duty Cycle Correction Factor (79 channel hopping)
 - a. Time to cycle through all channels = $\Delta t = \tau[\text{ms}] \times 79 \text{ channels} = 233.129 \text{ ms}$, where τ = pulse width
 - b. $100 \text{ ms} / \Delta t[\text{ms}] = H \rightarrow$ Round up to next highest integer, $H' = 1$
 - c. Worst Case Dwell Time = $\tau[\text{ms}] \times H' = 2.951 \text{ ms}$
 - d. Duty Cycle Correction = $20 \log (\text{Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = -30.60 \text{ dB}$

Note:

1. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
2. When Average result is different from peak result over 20 dB (over-averaging), according to 15.35 (c), as a “duty cycle correction factor”, pulse averaging with 20 log(duty cycle) has to be used.
Duty cycle correction factor = $20\log(\text{dwell time}/100 \text{ ms})$
3. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.
5. Field strength(dBμV/m) = Level(dBμV) + Correction factors(dB/m) + Cable loss(dB) + or $F_d(\text{dB})$
6. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
7. Margin(dB) = Limit(dBμV/m) - Field strength(dBμV/m)
8. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
9. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
10. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
11. $f < 30 \text{ MHz}$, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m / D_s)$
 $f \geq 30 \text{ MHz}$, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m / D_s)$

Where:

- F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ($\mu V/m$)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test results (Below 30 MHz)


Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 00(Worst case)

Frequency (MHz)	Level (dB μ V)	Ant. Pol. (H/V)	CF (dB)	F _d (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
No spurious emissions were detected within 20dB of the limit							

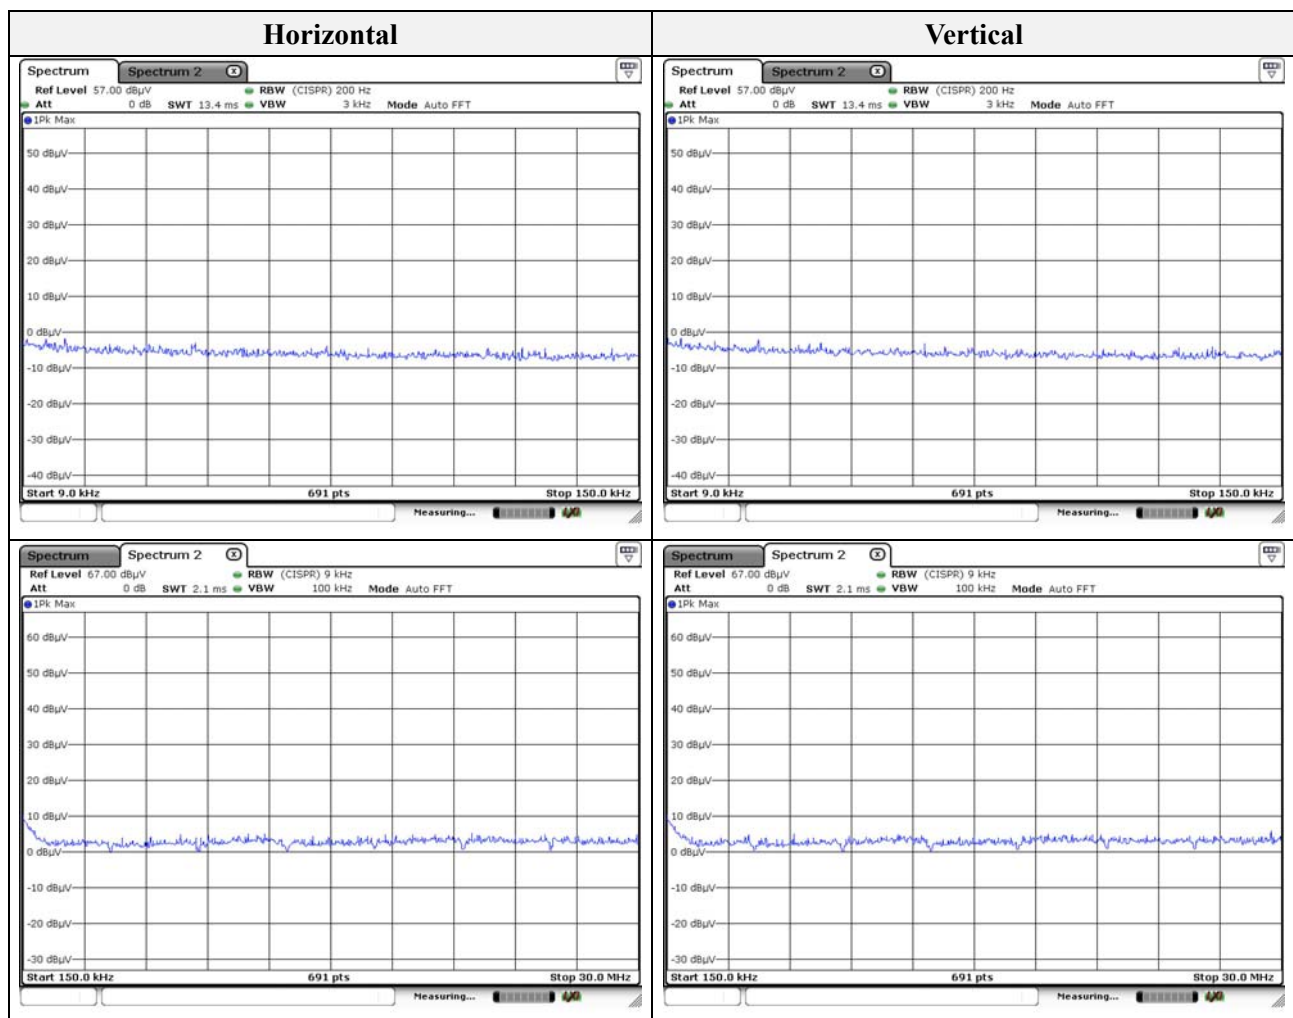

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Test results (Below 1 000 MHz) – Worst case

Mode: BDR

Transfer rate: 3 Mbps

Distance of measurement: 3 meter

Channel: 00(Worst case)

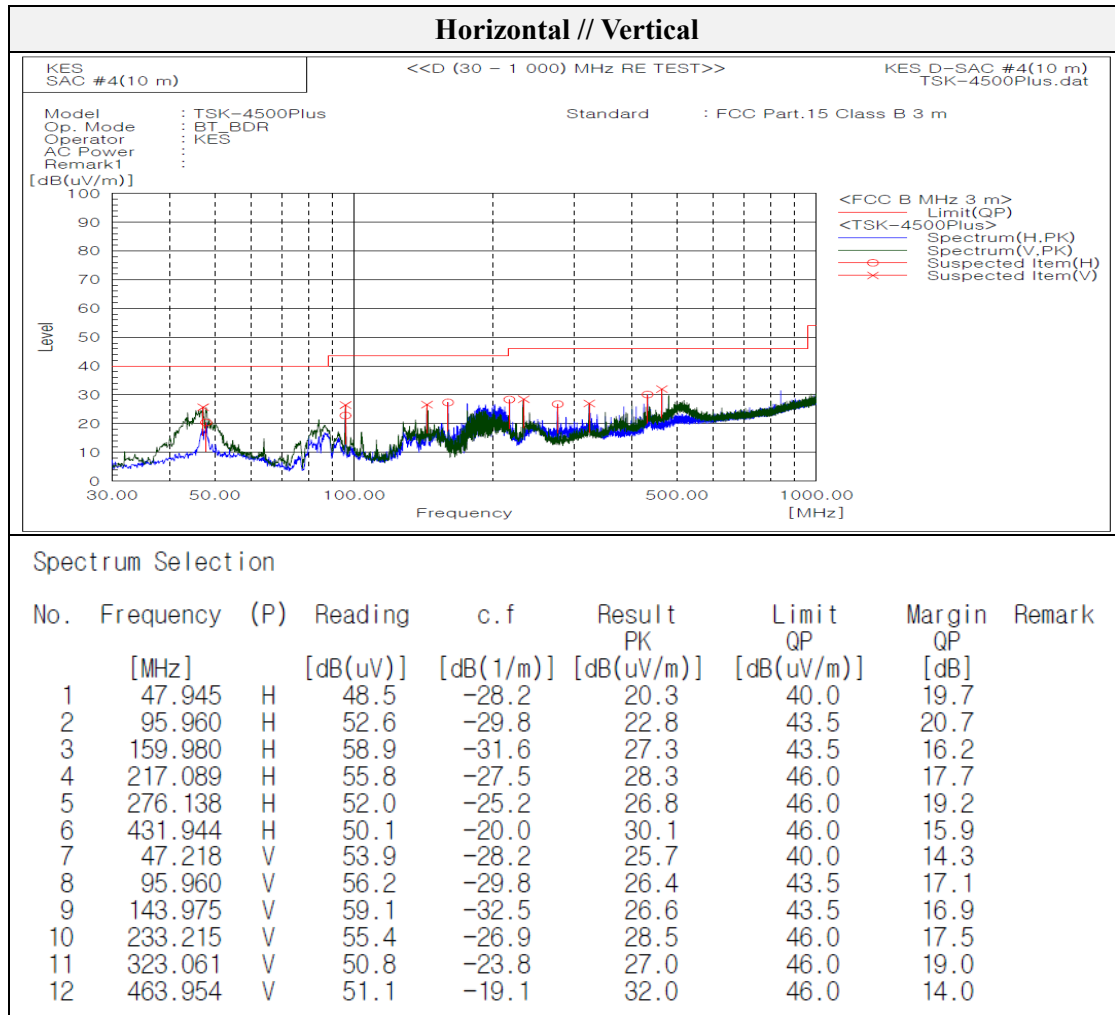

Test results (Above 1 000 MHz)

Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 00


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1600.60	51.98	Peak	H	-4.98	-	47.00	74.00	27.00
1730.80	48.28	Peak	H	-3.74	-	44.54	74.00	29.46
4814.00	52.56	Peak	H	7.67	-	60.23	74.00	13.77
4814.00	52.56	Average	H	7.67	-30.06	30.17	54.00	23.83
1600.60	52.18	Peak	V	-4.98	-	47.20	74.00	26.80
1840.80	48.27	Peak	V	-2.65	-	45.62	74.00	28.38
4813.00	50.36	Peak	V	7.66	-	58.02	74.00	15.98
4813.00	50.36	Average	V	7.66	-30.06	27.96	54.00	26.04

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2386.08	51.56	Peak	H	-0.23	-	51.33	74.00	22.67
2341.41	50.36	Peak	V	-0.31	-	50.05	74.00	23.95

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

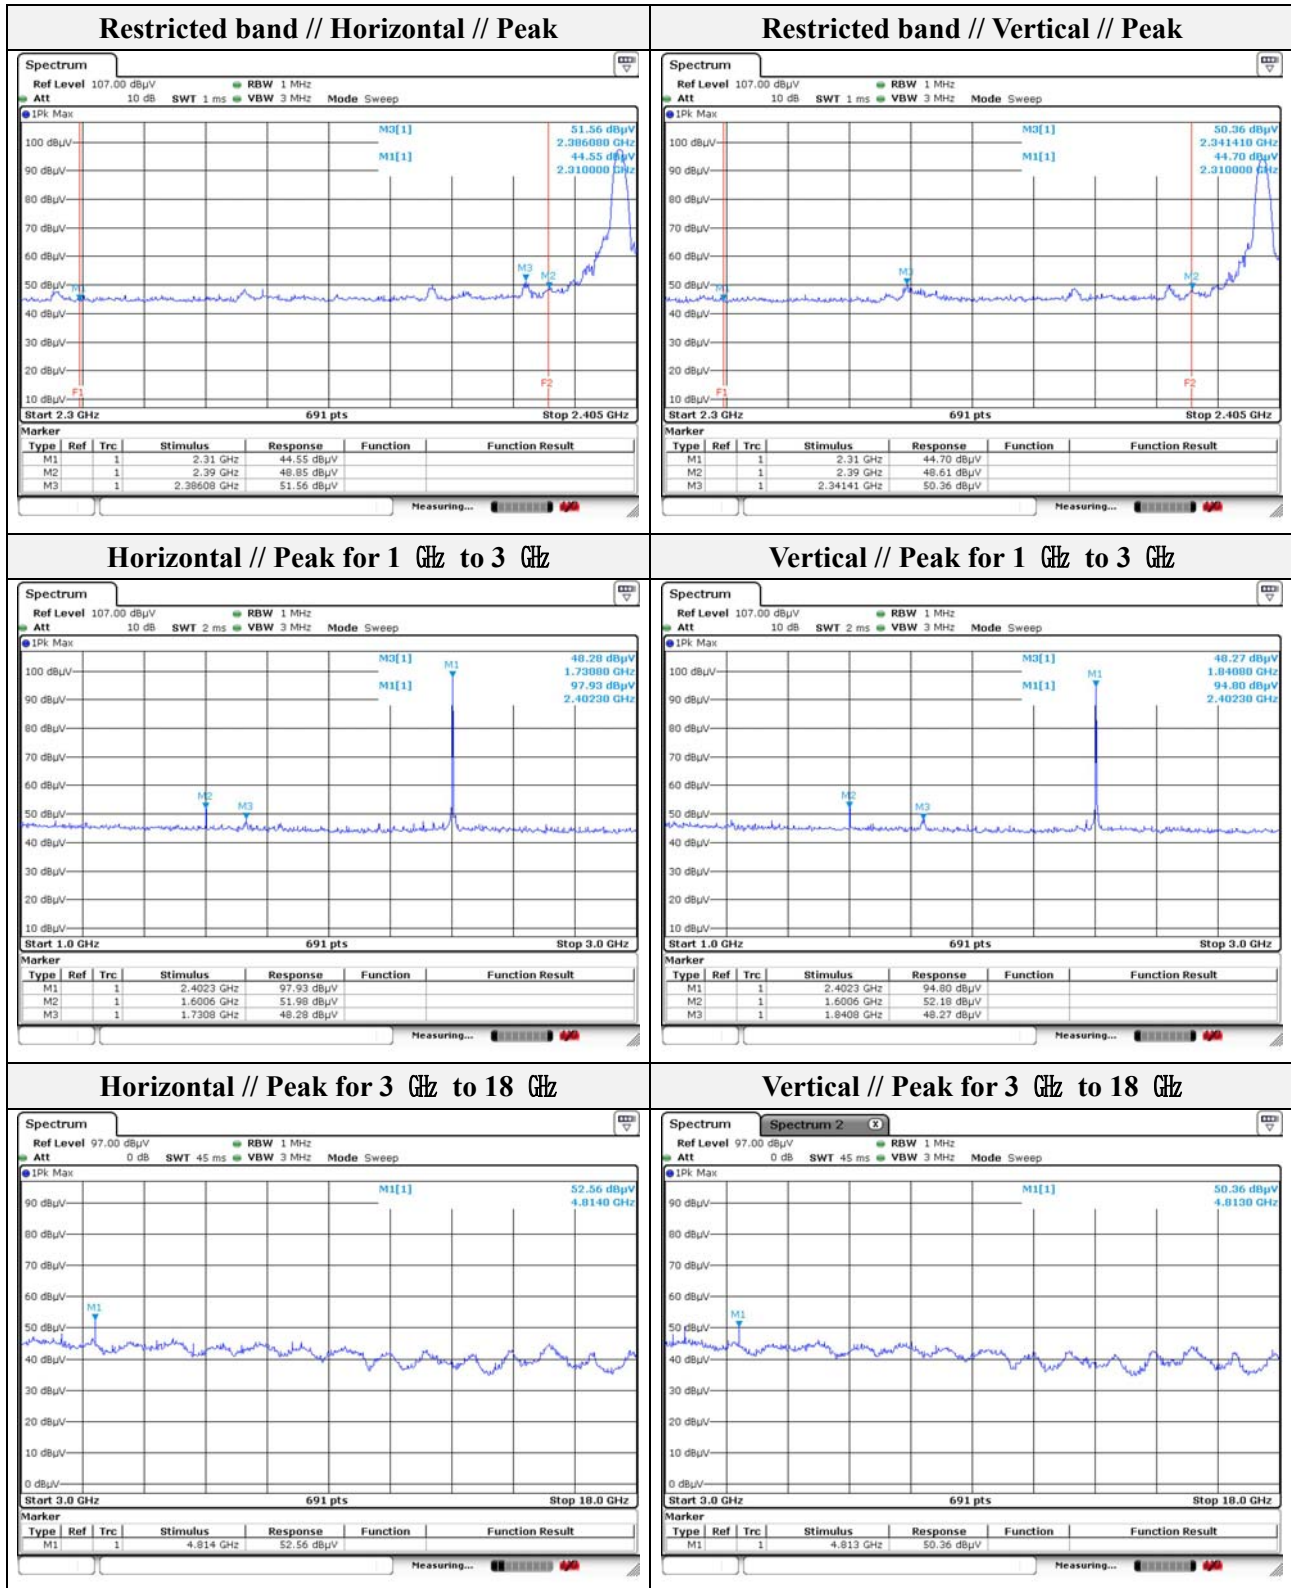


Note.

1. Average test would be performed if the peak result were greater than the average limit.



Mode: BDR
Transfer rate: 1 Mbps
Distance of measurement: 3 meter
Channel: 39

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1629.50	54.03	Peak	H	-4.70	-	49.33	74.00	24.67
2162.10	47.29	Peak	H	-0.65	-	46.64	74.00	27.36
4878.00	48.44	Peak	H	8.17	-	56.61	74.00	17.39
4878.00	48.44	Average	H	8.17	-30.06	26.55	54.00	27.45
1629.50	54.50	Peak	V	-4.70	-	49.80	74.00	24.20
1843.70	48.11	Peak	V	-2.62	-	45.49	74.00	28.51
4878.00	50.06	Peak	V	8.17	-	58.23	74.00	15.77
4878.00	50.06	Average	V	8.17	-30.06	28.17	54.00	25.83

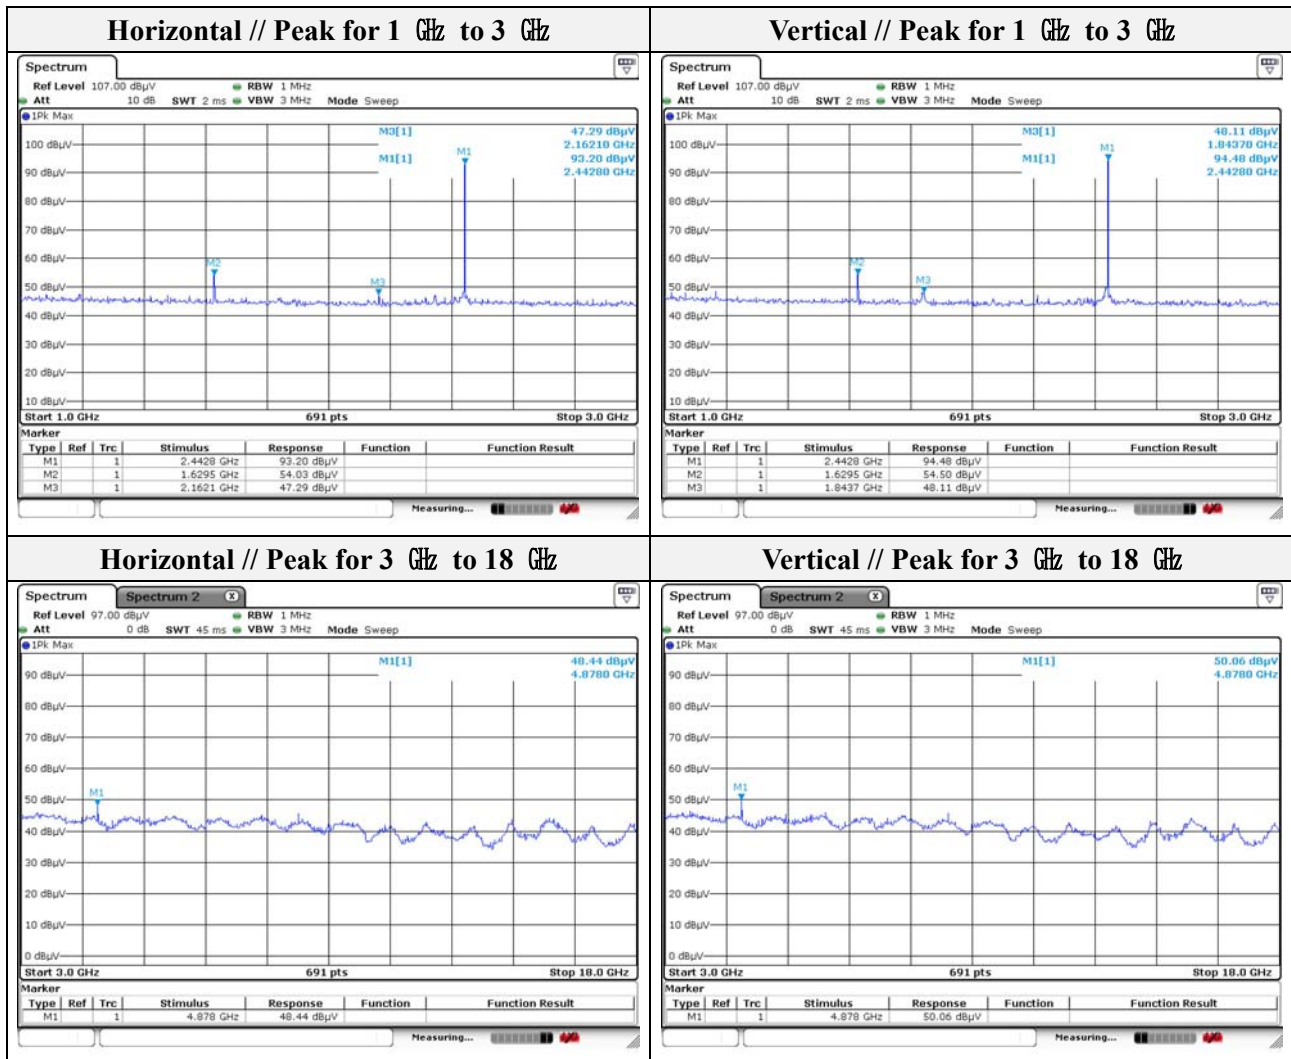

Note.

1. Average test would be performed if the peak result were greater than the average limit.

Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 78


- Spurious

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1652.70	54.65	Peak	H	-4.48	-	50.17	74.00	23.83
2162.10	46.73	Peak	H	-0.65	-	46.08	74.00	27.92
4965.00	47.09	Peak	H	8.85	-	55.94	74.00	18.06
4965.00	47.09	Average	H	8.85	-30.06	25.88	54.00	28.12
9913.90	48.59	Peak	H	15.27	-	63.86	74.00	10.14
9913.90	48.59	Average	H	15.27	-30.06	33.80	54.00	20.20
1652.70	55.36	Peak	V	-4.48	-	50.88	74.00	23.12
1843.70	48.28	Peak	V	-2.62	-	45.66	74.00	28.34
4965.00	49.41	Peak	V	8.85	-	58.26	74.00	15.74
4965.00	49.41	Average	V	8.85	-30.06	28.20	54.00	25.80

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2486.41	49.85	Peak	H	-0.04	-	49.81	74.00	24.19
2488.03	49.46	Peak	V	-0.04	-	49.42	74.00	24.58

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

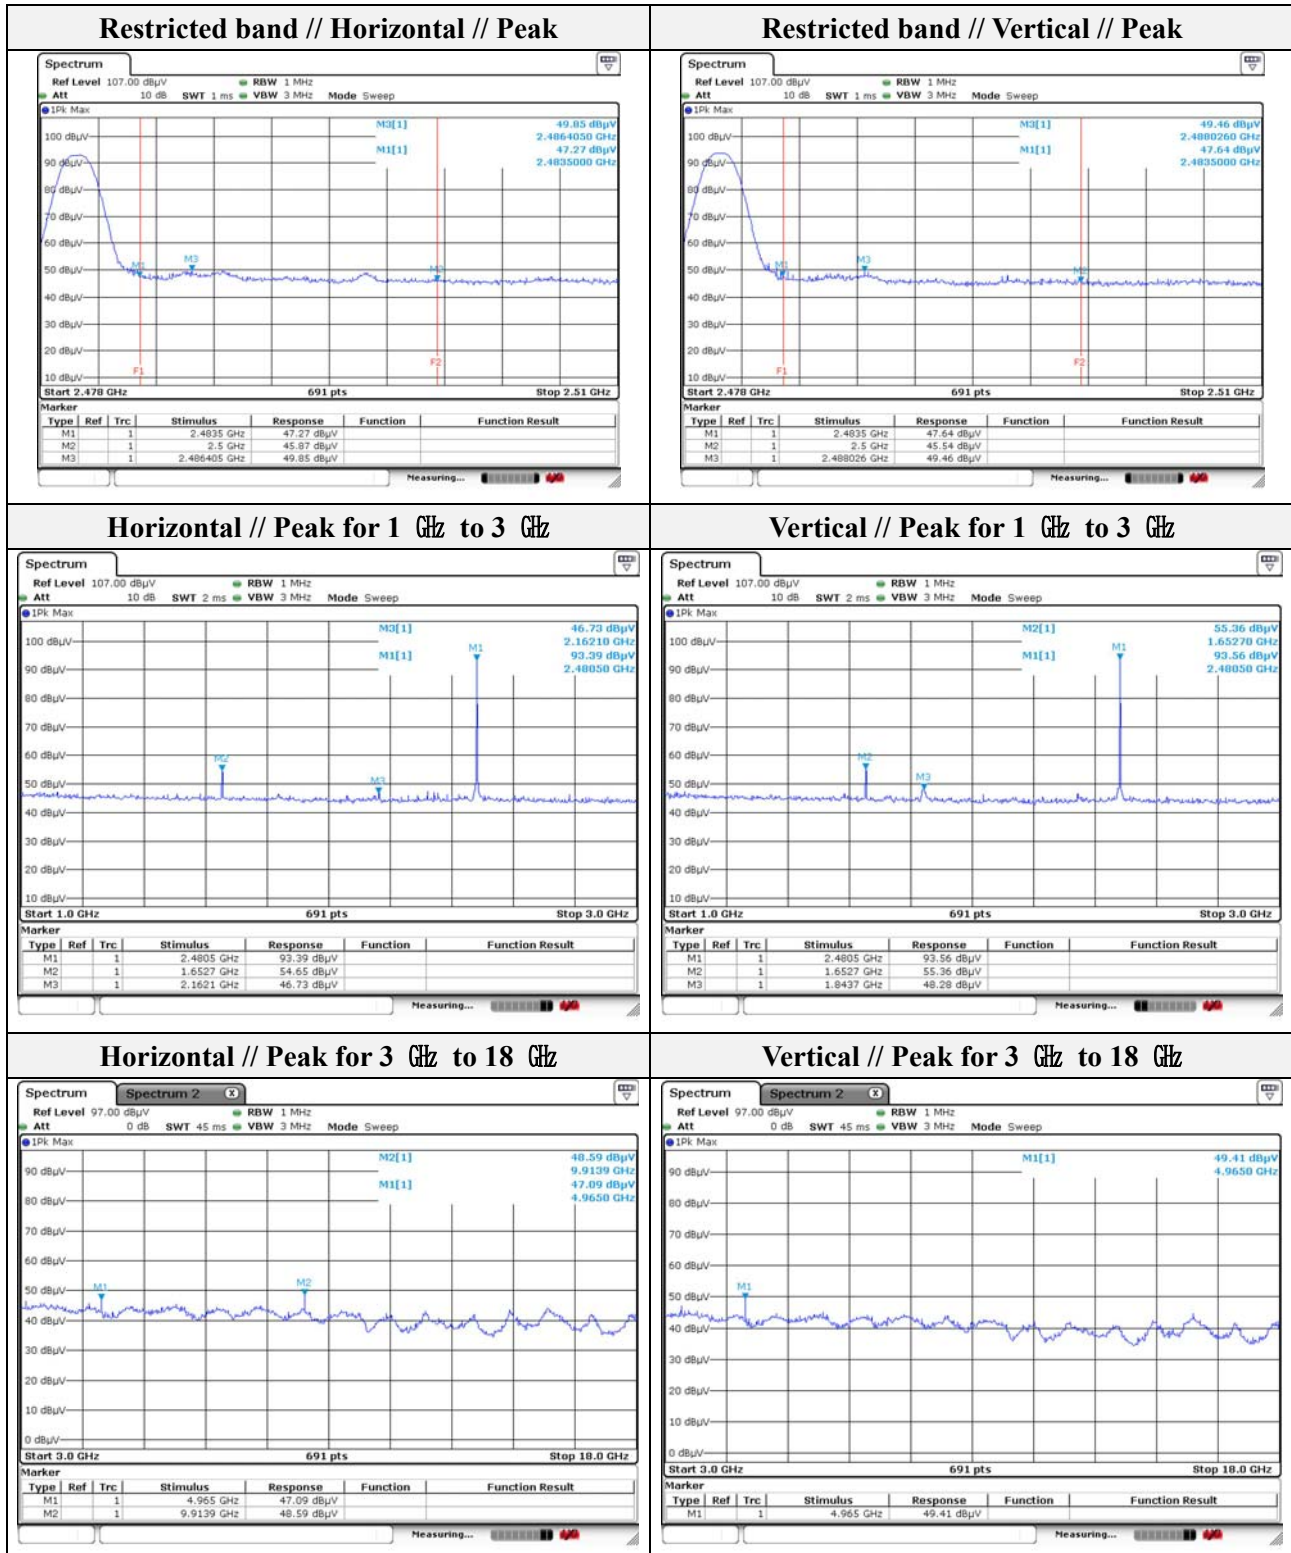


Note.

1. Average test would be performed if the peak result were greater than the average limit.

Test results (18 GHz to 30 GHz) – Worst case

Mode: BDR
Transfer rate: 1 Mbps
Distance of measurement: 3 meter
Channel: 00(Worst case)

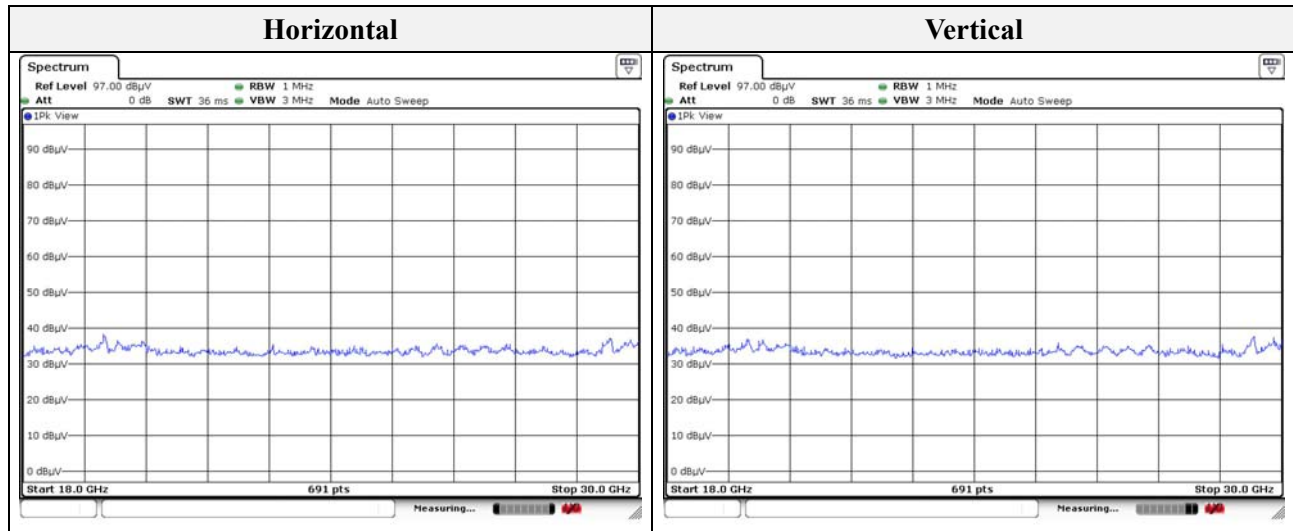


Note.

1. No spurious emission were detected above 18 GHz.

3.7. Conducted band edge and out of band emissions

Test setup



Test procedure

DA 00-705

Test setting


1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW $\geq$ 300 kHz
4. Detector = Peak
5. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))




Test results

BDR(1Mbps)

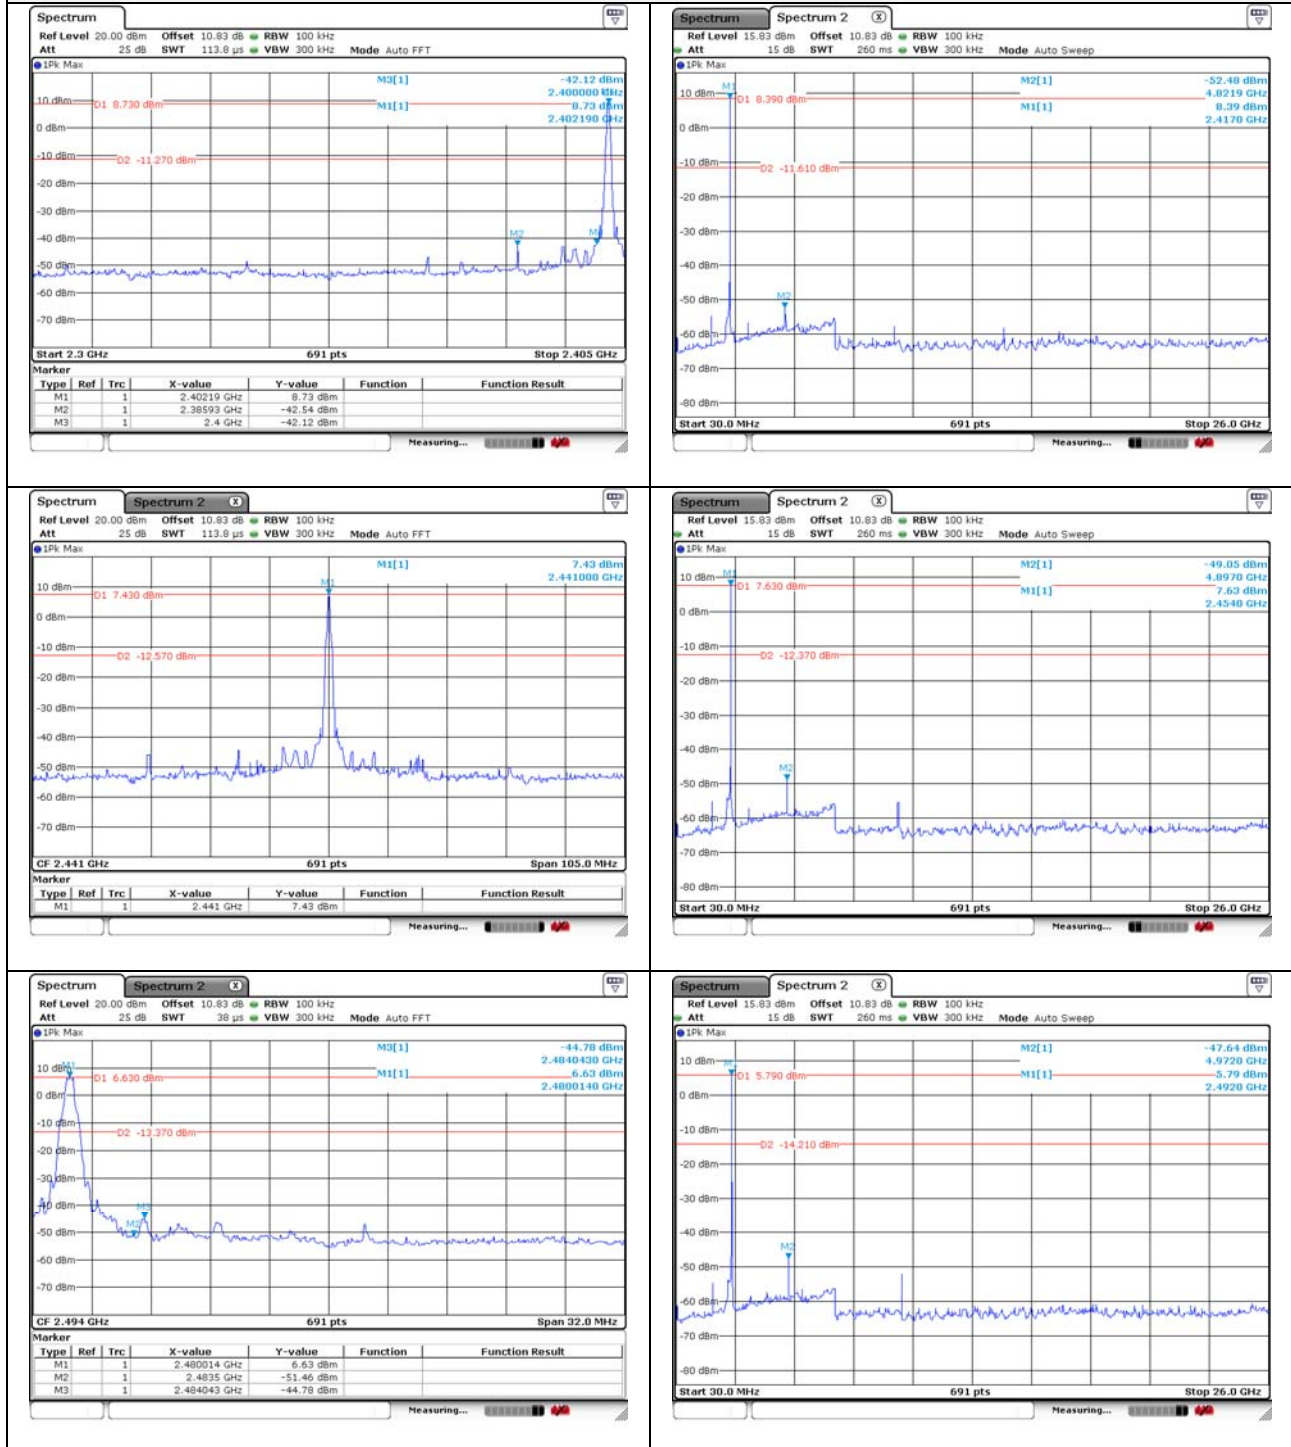

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Hopping mode_BDR(1Mbps)

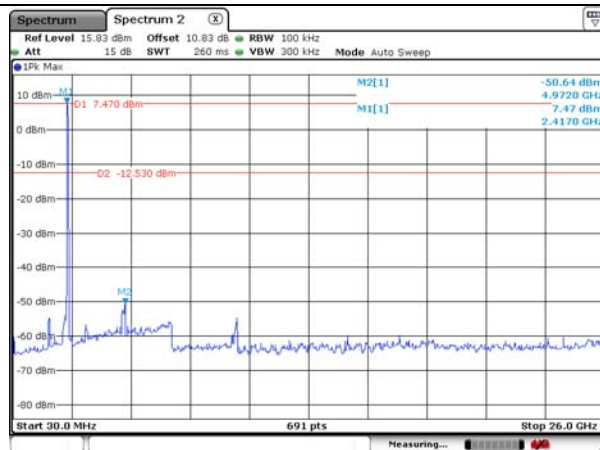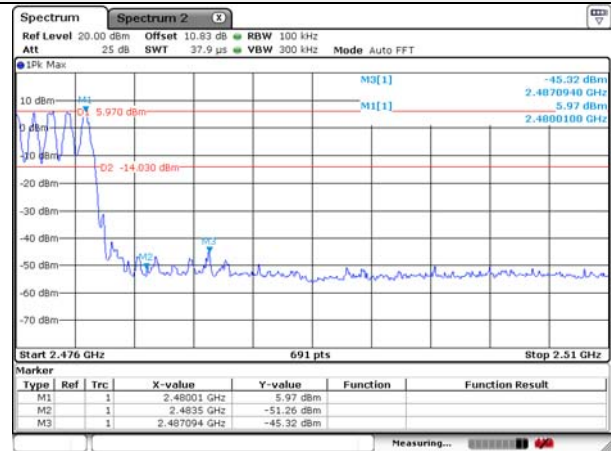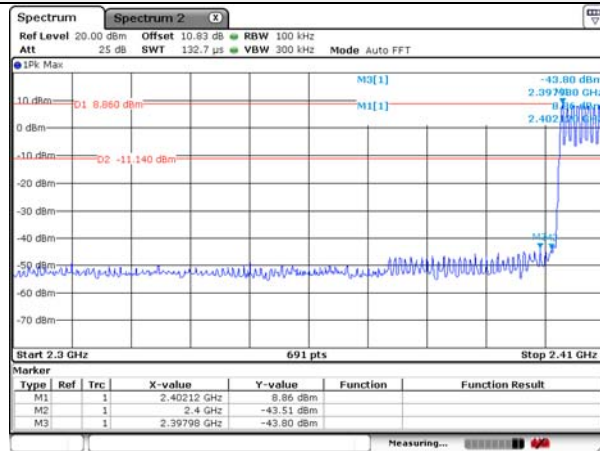

Blank

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV40	101002	1 year	2018.07.04
Spectrum Analyzer	R&S	FSV30	101389	1 year	2018.01.23
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2018.01.23
Power Meter	Anritsu	ML2495A	1438001	1 year	2018.01.23
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2018.01.23
Attenuator	Agilent	8493C	51401	1 year	2018.07.04
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2019.05.10
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-714	2 years	2018.11.28
Horn Antenna	A.H	SAS-571	414	2 years	2019.02.15
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170550	2 years	2019.02.15
High Pass Filter	Wainwright Instrument Gmbh	WHJS3000-10TT	1	1 year	2018.07.03
Low Pass Filter	Wainwright Instrument Gmbh	WLK1.0/18G-10TT	1	1 year	2018.07.03
Preamplifier	HP	8449B	3008A00538	1 year	2018.01.19
Preamplifier	AGILENT	8449B	3008A01729	1 year	2018.05.31
EMI Test Receiver	R&S	ESR3	101781	1 year	2018.04.27
EMI Test Receiver	R&S	ESU26	100552	1 year	2018.04.19
Pulse Limiter	R&S	ESH3-Z2	101915	1 year	2018.11.27

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	LG Electronics Inc.,	LG15N53	311QCFT567147
Test Board	N/A	N/A	N/A