



FCC PART 15C TEST REPORT FOR CERTIFICATION On Behalf of

ANKER INNOVATIONS LIMITED

Anker Zolo Power Bank (10K, Magnetic, Built-In USB-C Cable)

Model Number: A1685

FCC ID: 2AOKB-A1685

| | |
|--------------------------|--|
| Applicant: | ANKER INNOVATIONS LIMITED |
| Address: | Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong |
| Prepared By: | EST Technology Co., Ltd. Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China |
| Tel: 86-769-83081888-808 | |

| | |
|-----------------|------------------------------|
| Report Number: | ESTE-R2407214 |
| Date of Test: | Jul. 15, 2024~ Jul. 22, 2024 |
| Date of Report: | Jul. 25, 2024 |

TABLE OF CONTENTS

| Description | Page |
|--|------|
| TEST REPORT VERIFICATION..... | 3 |
| 1. GENERAL INFORMATION | 4 |
| 1.1. Description of Device (EUT)..... | 4 |
| 2. SUMMARY OF TEST | 5 |
| 2.1. Summary of test result | 5 |
| 2.2. Test Facilities..... | 6 |
| 2.3. Measurement uncertainty | 7 |
| 2.4. Assistant equipment used for test | 7 |
| 2.5. Block Diagram | 7 |
| 2.6. Test Mode | 8 |
| 2.7. Test Equipment List..... | 9 |
| 3. RADIATED EMISSION | 10 |
| 3.1. Limit..... | 10 |
| 3.2. Test Setup..... | 11 |
| 3.3. Spectrum Analyzer Setting..... | 12 |
| 3.4. Test Procedure..... | 12 |
| 3.5. Test Result..... | 14 |
| 4. AC POWER LINE CONDUCTED EMISSIONS | 28 |
| 4.1. Limit..... | 28 |
| 4.2. Test Setup..... | 28 |
| 4.3. Spectrum Analyzer Setting..... | 28 |
| 4.4. Test Procedure..... | 28 |
| 4.5. Test Result..... | 29 |
| 5. ANTENNA REQUIREMENTS | 31 |
| 5.1. Limit..... | 31 |
| 5.2. Test Result..... | 31 |
| 6. TEST SETUP PHOTO..... | 32 |
| 7. EUT PHOTO | 33 |

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

| | | |
|-----------------------------------|---|---|
| Product Name | : | Anker Zolo Power Bank (10K, Magnetic, Built-In USB-C Cable) |
| Model Number | : | A1685 |
| Operation Frequency | : | 111-205 KHz |
| Max Wireless Charge Power | : | 7.5W |
| Max Field Strength of Fundamental | : | 68.21 dB μ V/m |
| Modulation Type | : | FSK |
| Antenna Type | : | Induction coil |
| Sample Type | : | Prototype production |

Note: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



2. SUMMARY OF TEST

2.1. Summary of test result

| No. | Description of Test Item | FCC Standard Section | Results |
|-----|-----------------------------------|----------------------|---------|
| 1 | Radiated Emission | 15.205 15.209 | PASS |
| 2 | AC Power Line Conducted Emissions | 15.207 | PASS |
| 3 | Antenna Requirement | 15.203 | PASS |

Note: "N/A" denotes test is not applicable in this test report.

2.2. Test Facilities

EMC Lab : Accredited by CNAS, CHINA
Registration No.: L5288
This Accreditation is valid until: November 12, 2029

Recognized by FCC, USA
Designation Number: CN1215
This Recognition is valid until: January 31, 2026

Accredited by A2LA, USA
Registration No.: 4366.01
This Accreditation is valid until: January 31, 2026

Recognized by Industry Canada
CAB identifier No.: CN0035
This Recognition is valid until: January 31, 2026

Recognized by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Recognition is valid until: Apr. 19, 2026

Recognized by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Recognized by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3. Measurement uncertainty

| Test Item | Uncertainty |
|---|-----------------------|
| Uncertainty for Conduction emission test | ±3.48dB |
| Uncertainty for spurious emissions test (9KHz-30MHz) | ±1.62dB |
| Uncertainty for spurious emissions test (30MHz-1GHz) | ±4.60 dB(Polarize: H) |
| | ±4.68 dB(Polarize: V) |
| Uncertainty for spurious emissions test (1GHz to 18GHz) | ±4.96dB |
| Uncertainty for radio frequency | 7×10 ⁻⁸ |
| Uncertainty for conducted RF Power | 1.08dB |
| Uncertainty for Power density test | 0.26dB |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

| Item | Equipment | Brand | Model Name/Type No. | FCC ID | Series No. |
|------|-----------|-------|---------------------|--------|------------|
| A | Load | - | - | N/A | N/A |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| - | - | - | - | - |

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground.



(EUT: Anker Zolo Power Bank (10K, Magnetic, Built-In USB-C Cable))

2.6. Test Mode

The test mode was selected for the final test as listed below.

| Test Item | Test Mode | |
|-----------------------------------|--------------------|-----------|
| Radiated Emission | AC Mains: 5W/ 7.5W | Full load |
| | | Half load |
| | | No load |
| | DC Mains: 5W/ 7.5W | Full load |
| | | Half load |
| | | No load |
| AC Power Line Conducted Emissions | AC Mains: 5W/ 7.5W | Full load |
| | | Half load |
| | | No load |
| | DC Mains: 5W/ 7.5W | Full load |
| | | Half load |
| | | No load |

Note: Output 5W, 7.5W mode Full load, Half load, No load, AC and DC power supply all have been tested. The report shows the worst state data.

2.7. Test Equipment List

| For AC Power Line Conducted Emissions Test | | | | | | |
|--|-----------------|--------------|------------|------------------|------------|------------|
| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
| EMI Test Receiver | Rohde & Schwarz | ESRP3 | EST-E070 | LISAI | June 11,24 | June 10,25 |
| Artificial Mains Network | Rohde & Schwarz | ENV216 | EST-E002 | LISAI | June 11,24 | June 10,25 |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | EST-E078 | LISAI | June 11,24 | June 10,25 |
| Test Software | Audix | e3-6.111221a | N/A | N/A | N/A | N/A |

| For Radiated Emission Test(9kHz-30MHz) | | | | | | |
|--|-----------------|--------------|------------|------------------|------------|------------|
| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
| EMI Test Receiver | Rohde & Schwarz | ESR7 | EST-E047 | LISAI | June 11,24 | June 10,25 |
| Active Loop Antenna | SCHWAREBECK | FMZB 1519B | EST-E054 | LISAI | June 11,24 | June 10,25 |
| Test Software | Audix | e3-6.111221a | N/A | N/A | N/A | N/A |
| 9kHz-30MHz Cable | N/A | EST-001 | N/A | N/A | N/A | N/A |

| For Radiated Emission Test (30MHz-1000MHz) | | | | | | |
|--|-----------------|--------------|------------|------------------|------------|------------|
| Equipment | Manufacturer | Model No. | Serial No. | Calibration Body | Last Cal. | Next Cal. |
| EMI Test Receiver | Rohde & Schwarz | ESR7 | EST-E047 | LISAI | June 11,24 | June 10,25 |
| Bilog Antenna | Teseq | CBL 6111D | EST-E034 | LISAI | June 11,24 | June 10,25 |
| Test Software | Audix | e3-6.111221a | N/A | N/A | N/A | N/A |
| 30-1000MHz Cable | N/A | EST-002 | N/A | N/A | N/A | N/A |

3. RADIATED EMISSION

3.1. Limit

15.209 Radiated emission limits

| Frequency (MHz) | Field Strength($\mu\text{V/m}$) | Distance(m) |
|-----------------|-----------------------------------|-------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:


1. Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$.
2. The smaller limit shall apply at the cross point between two frequency bands.
3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system

15.205 Restricted frequency band


| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |

3.2. Test Setup

9kHz~30MHz

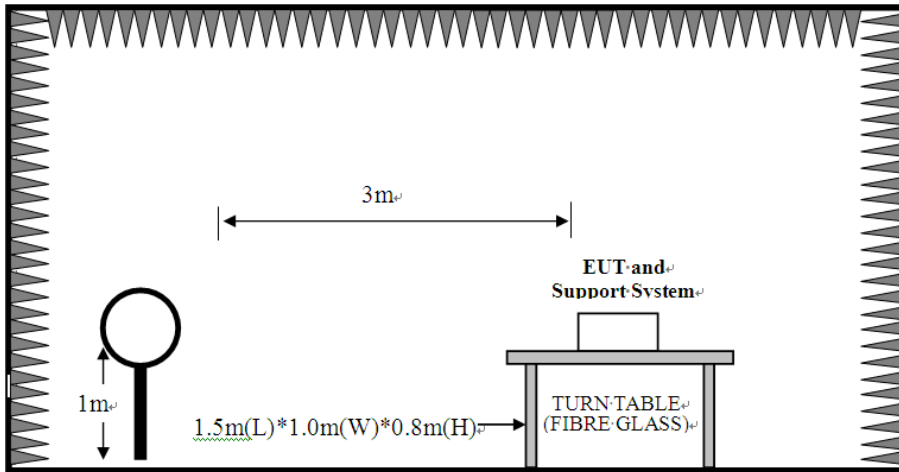

30~1000MHz

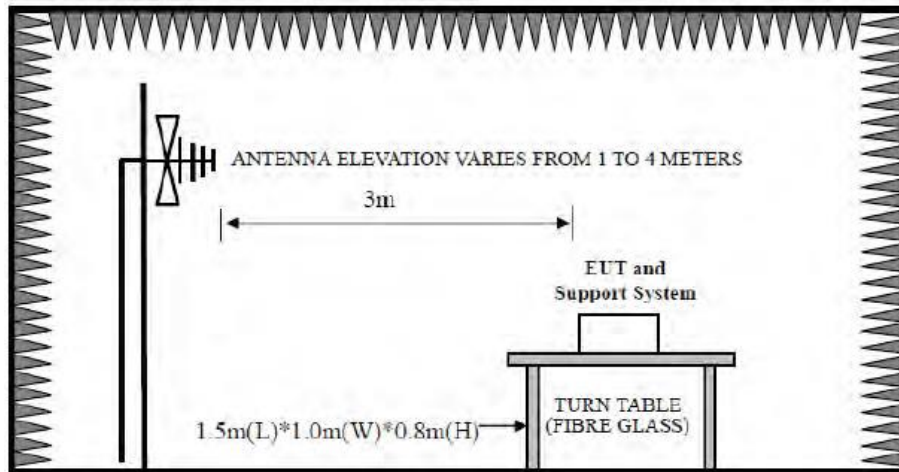

3.3. Spectrum Analyzer Setting

For 9KHz-150KHz

| Spectrum Parameters | Setting |
|---------------------|---|
| RBW | 300Hz(for Peak&AVG)/CISPR 200Hz(for QP) |
| VBW | 300Hz(for Peak&AVG)/CISPR 200Hz(for QP) |
| Start frequency | 9KHz |
| Stop frequency | 150KHz |
| Sweep Time | Auto |
| Detector | PEAK/QP/AVG |
| Trace Mode | Max Hold |

For 150KHz-30MHz

| Spectrum Parameters | Setting |
|---------------------|----------|
| RBW | 9KHz |
| VBW | 9KHz |
| Start frequency | 150KHz |
| Stop frequency | 30MHz |
| Sweep Time | Auto |
| Detector | QP |
| Trace Mode | Max Hold |

For 30MHz-1000MHz

| Spectrum Parameters | Setting |
|---------------------|----------|
| RBW | 120KHz |
| VBW | 300KHz |
| Start frequency | 30MHz |
| Stop frequency | 1000MHz |
| Sweep Time | Auto |
| Detector | QP |
| Trace Mode | Max Hold |

3.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. Spectrum analyzer setting parameters in accordance with section 3.3.
- e. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- f. For below 30MHz test, the center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates both coaxial and coplanar polarization to find out the maximum emission level.
- g. For above 30MHz test, the antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both coaxial and coplanar polarization of the antenna are set on test.
- h. Record the results in the test report.

Note:


1. For emissions below 30MHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. For emissions below 30MHz, if peak level comply with QP limit, then the QP level is deemed to comply with QP limit.

3.5. Test Result

Radiated Emission Below 30MHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

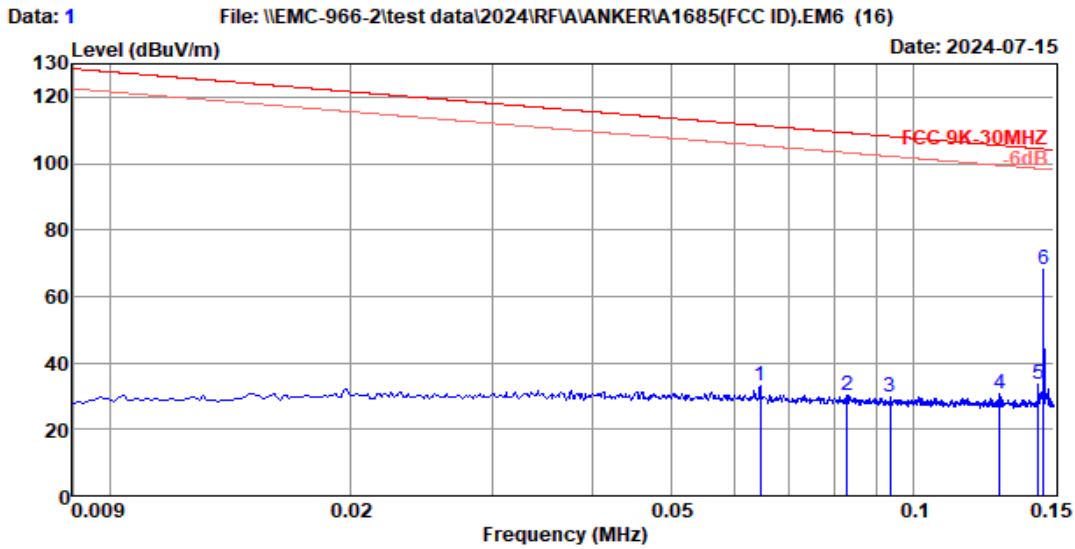


Site no. : 2# 966 chamber Data no. : 1
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.06455 | 20.90 | 0.10 | 12.02 | 33.02 | 111.41 | 78.39 | Peak |
| 2 | 0.08288 | 20.90 | 0.10 | 9.17 | 30.17 | 109.23 | 79.06 | Peak |
| 3 | 0.09374 | 20.10 | 0.10 | 9.71 | 29.91 | 108.17 | 78.26 | Peak |
| 4 | 0.12815 | 19.80 | 0.10 | 10.58 | 30.48 | 105.45 | 74.97 | Peak |
| 5 | 0.14337 | 19.80 | 0.10 | 13.53 | 33.43 | 104.47 | 71.04 | Peak |
| 6 | 0.14535 | 19.90 | 0.10 | 48.21 | 68.21 | 104.36 | 36.15 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

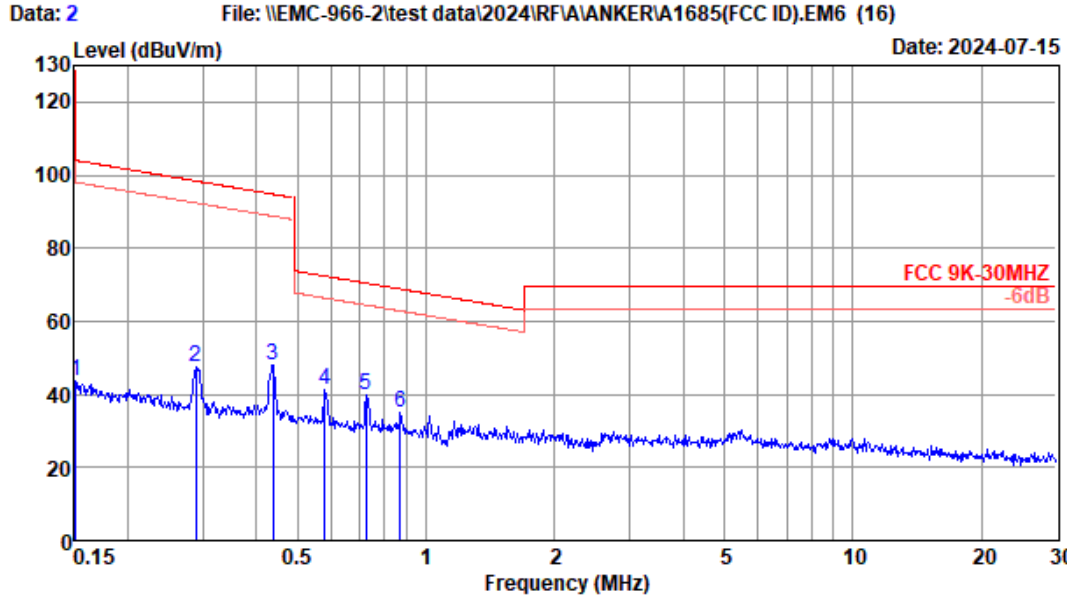

Site no. : 2# 966 chamber Data no. : 2
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.15080 | 19.90 | 0.10 | 23.59 | 43.59 | 104.04 | 60.45 | Peak |
| 2 | 0.28935 | 20.26 | 0.10 | 27.17 | 47.53 | 98.38 | 50.85 | Peak |
| 3 | 0.43742 | 20.72 | 0.10 | 27.14 | 47.96 | 94.79 | 46.83 | Peak |
| 4 | 0.57923 | 20.85 | 0.10 | 20.36 | 41.31 | 72.35 | 31.04 | Peak |
| 5 | 0.72360 | 20.76 | 0.10 | 18.76 | 39.62 | 70.41 | 30.79 | Peak |
| 6 | 0.87103 | 20.67 | 0.10 | 14.23 | 35.00 | 68.80 | 33.80 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 3

File: \\EMC-966-2\test data\2024\RF\ANKER\A1685(FCC ID).EM6 (16)

Date: 2024-07-15

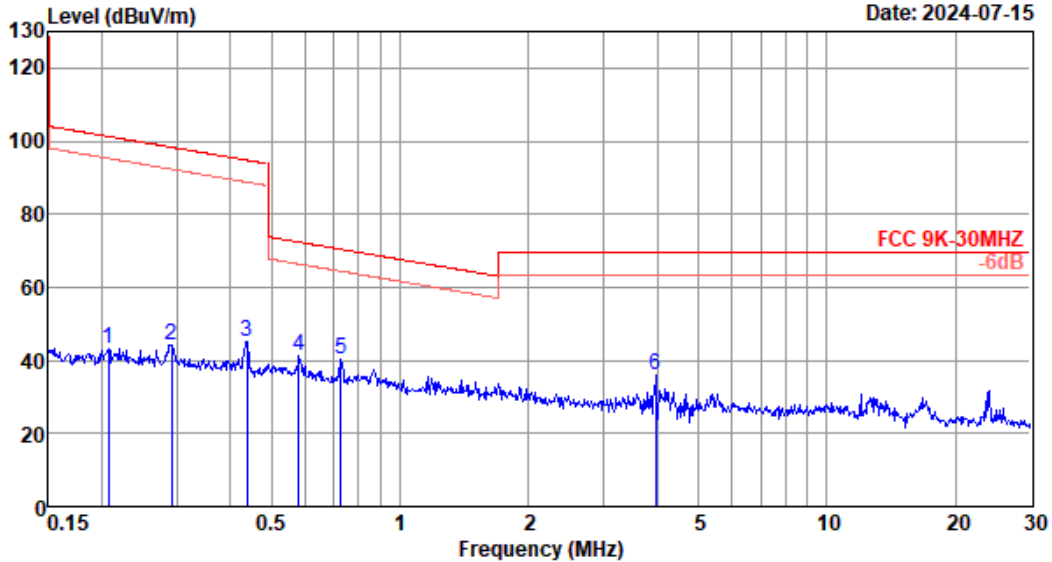


Site no. : 2# 966 chamber Data no. : 3
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.20723 | 20.08 | 0.10 | 22.88 | 43.06 | 101.28 | 58.22 | Peak |
| 2 | 0.29088 | 20.26 | 0.10 | 23.81 | 44.17 | 98.33 | 54.16 | Peak |
| 3 | 0.43742 | 20.72 | 0.10 | 24.13 | 44.95 | 94.79 | 49.84 | Peak |
| 4 | 0.57923 | 20.85 | 0.10 | 20.50 | 41.45 | 72.35 | 30.90 | Peak |
| 5 | 0.72744 | 20.76 | 0.10 | 19.28 | 40.14 | 70.37 | 30.23 | Peak |
| 6 | 3.96395 | 20.45 | 0.11 | 15.41 | 35.97 | 69.54 | 33.57 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

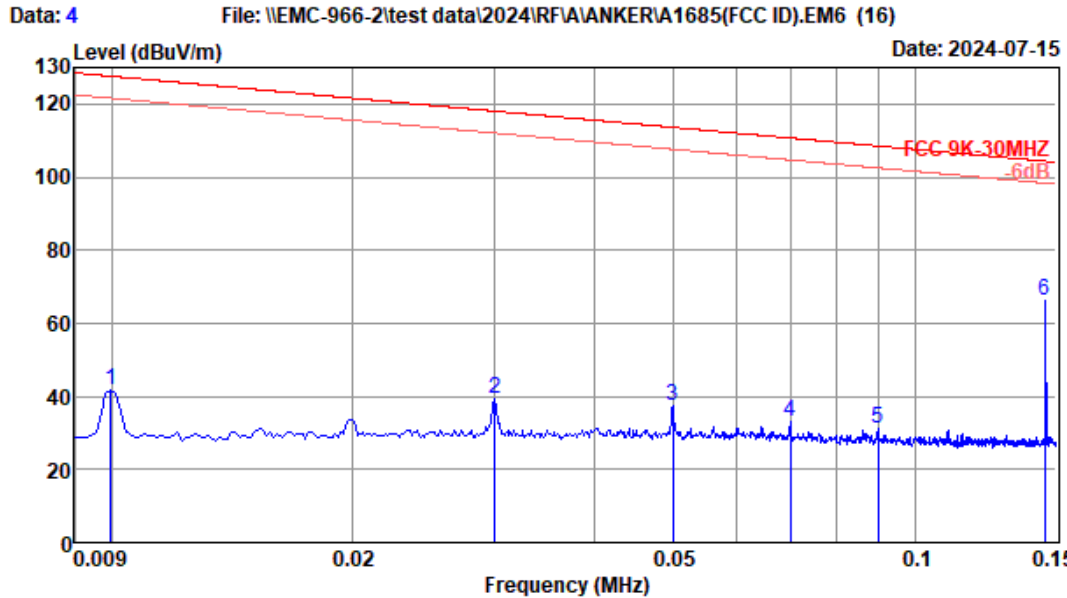


Site no. : 2# 966 chamber Data no. : 4
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.00999 | 20.10 | 0.10 | 21.55 | 41.75 | 127.62 | 85.87 | Peak |
| 2 | 0.03001 | 20.60 | 0.10 | 18.54 | 39.24 | 118.06 | 78.82 | Peak |
| 3 | 0.05003 | 20.60 | 0.10 | 16.71 | 37.41 | 113.62 | 76.21 | Peak |
| 4 | 0.06991 | 20.90 | 0.10 | 11.90 | 32.90 | 110.71 | 77.81 | Peak |
| 5 | 0.09008 | 20.10 | 0.10 | 10.75 | 30.95 | 108.51 | 77.56 | Peak |
| 6 | 0.14521 | 19.90 | 0.10 | 46.28 | 66.28 | 104.36 | 38.08 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

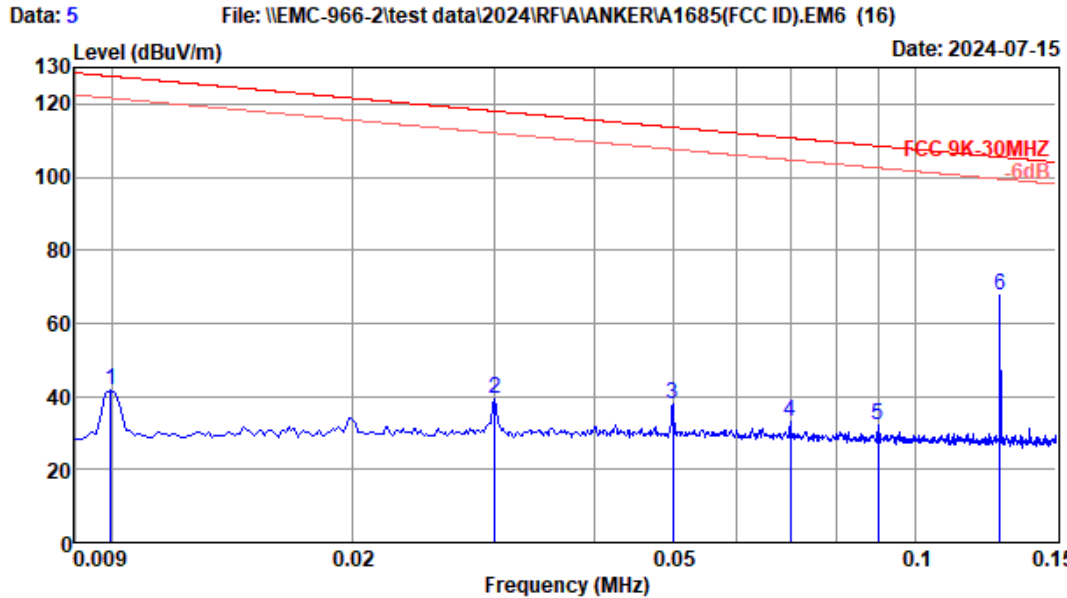


Site no. : 2# 966 chamber Data no. : 5
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 7.5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.00999 | 20.10 | 0.10 | 21.49 | 41.69 | 127.62 | 85.93 | Peak |
| 2 | 0.03001 | 20.60 | 0.10 | 18.57 | 39.27 | 118.06 | 78.79 | Peak |
| 3 | 0.05003 | 20.60 | 0.10 | 17.34 | 38.04 | 113.62 | 75.58 | Peak |
| 4 | 0.07005 | 20.90 | 0.10 | 11.91 | 32.91 | 110.70 | 77.79 | Peak |
| 5 | 0.08993 | 20.10 | 0.10 | 11.74 | 31.94 | 108.53 | 76.59 | Peak |
| 6 | 0.12772 | 19.80 | 0.10 | 47.68 | 67.58 | 105.48 | 37.90 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

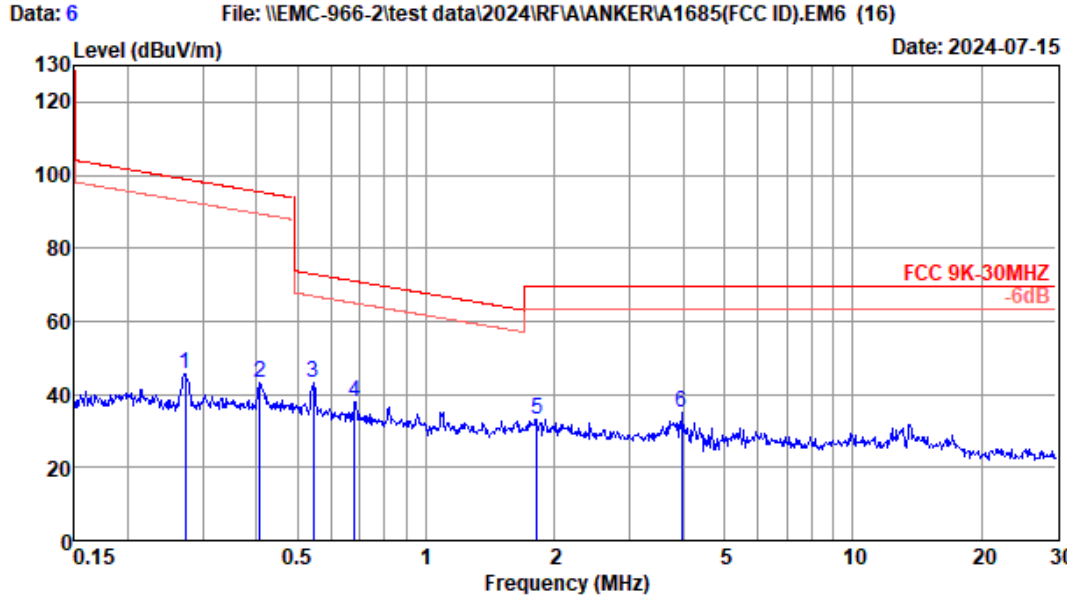

Site no. : 2# 966 chamber Data no. : 6
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 7.5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.27297 | 20.26 | 0.10 | 25.31 | 45.67 | 98.88 | 53.21 | Peak |
| 2 | 0.40831 | 20.63 | 0.10 | 22.66 | 43.39 | 95.38 | 51.99 | Peak |
| 3 | 0.54355 | 20.86 | 0.10 | 22.43 | 43.39 | 72.90 | 29.51 | Peak |
| 4 | 0.67902 | 20.79 | 0.10 | 17.04 | 37.93 | 70.97 | 33.04 | Peak |
| 5 | 1.81918 | 20.60 | 0.11 | 12.46 | 33.17 | 69.54 | 36.37 | Peak |
| 6 | 3.96395 | 20.45 | 0.11 | 14.47 | 35.03 | 69.54 | 34.51 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 7

File: \\EMC-966-2\test data\2024\RF\ANKER\A1685(FCC ID).EM6 (16)

Date: 2024-07-15

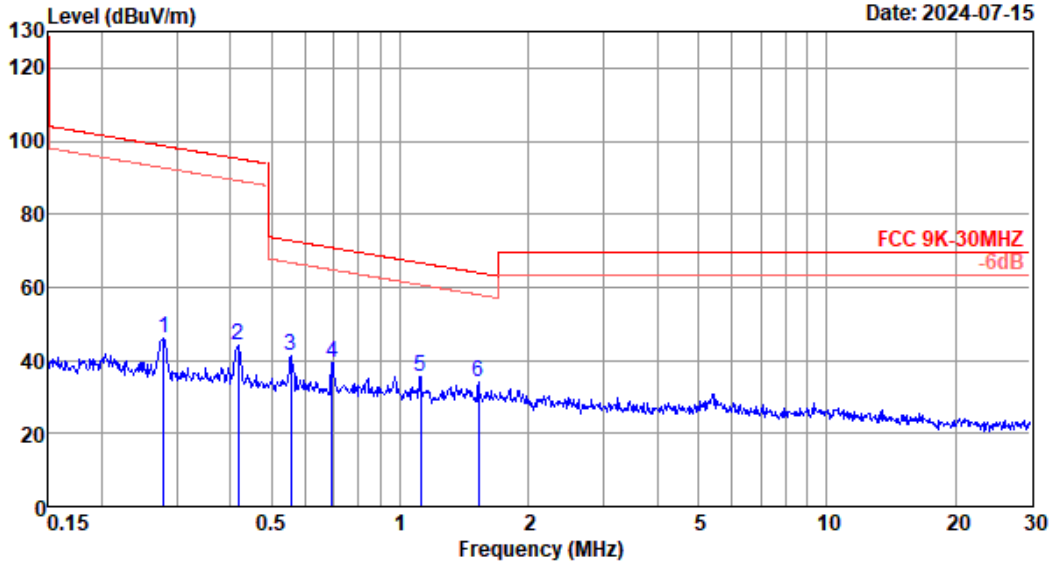


Site no. : 2# 966 chamber Data no. : 7
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 7.5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.27881 | 20.26 | 0.10 | 25.52 | 45.88 | 98.70 | 52.82 | Peak |
| 2 | 0.41705 | 20.72 | 0.10 | 23.15 | 43.97 | 95.20 | 51.23 | Peak |
| 3 | 0.55520 | 20.86 | 0.10 | 20.36 | 41.32 | 72.72 | 31.40 | Peak |
| 4 | 0.69357 | 20.78 | 0.10 | 18.25 | 39.13 | 70.78 | 31.65 | Peak |
| 5 | 1.11733 | 20.60 | 0.10 | 14.80 | 35.50 | 66.64 | 31.14 | Peak |
| 6 | 1.52736 | 20.60 | 0.11 | 13.42 | 34.13 | 63.93 | 29.80 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

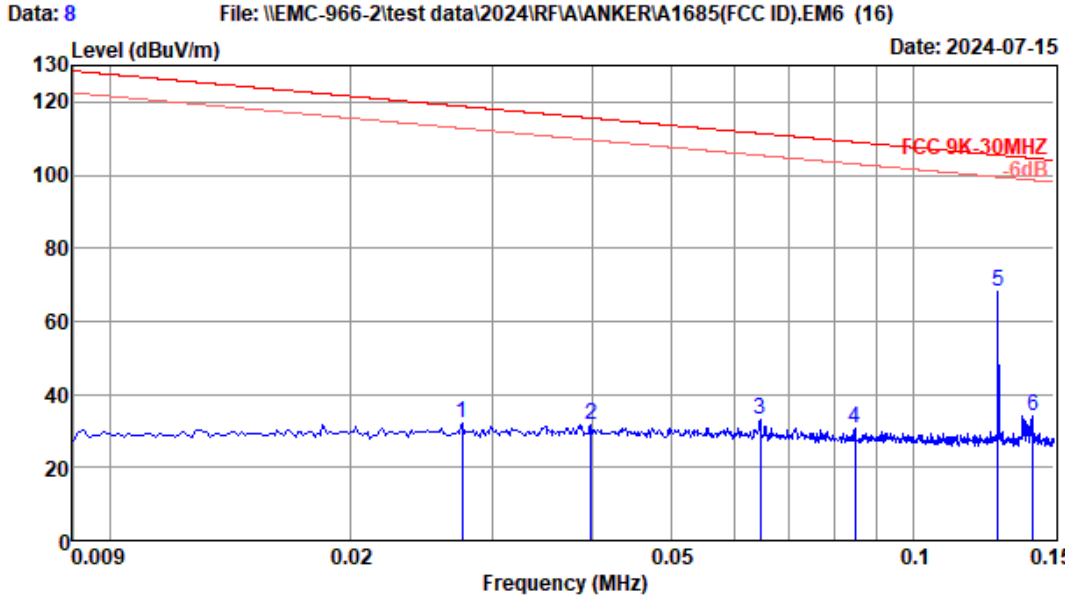


Site no. : 2# 966 chamber Data no. : 8
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 7.5W

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.02747 | 20.60 | 0.10 | 11.52 | 32.22 | 118.83 | 86.61 | Peak |
| 2 | 0.03974 | 20.60 | 0.10 | 10.81 | 31.51 | 115.62 | 84.11 | Peak |
| 3 | 0.06455 | 20.90 | 0.10 | 11.93 | 32.93 | 111.41 | 78.48 | Peak |
| 4 | 0.08472 | 20.10 | 0.10 | 10.65 | 30.85 | 109.04 | 78.19 | Peak |
| 5 | 0.12772 | 19.80 | 0.10 | 48.18 | 68.08 | 105.48 | 37.40 | Peak |
| 6 | 0.14098 | 19.80 | 0.10 | 14.05 | 33.95 | 104.62 | 70.67 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

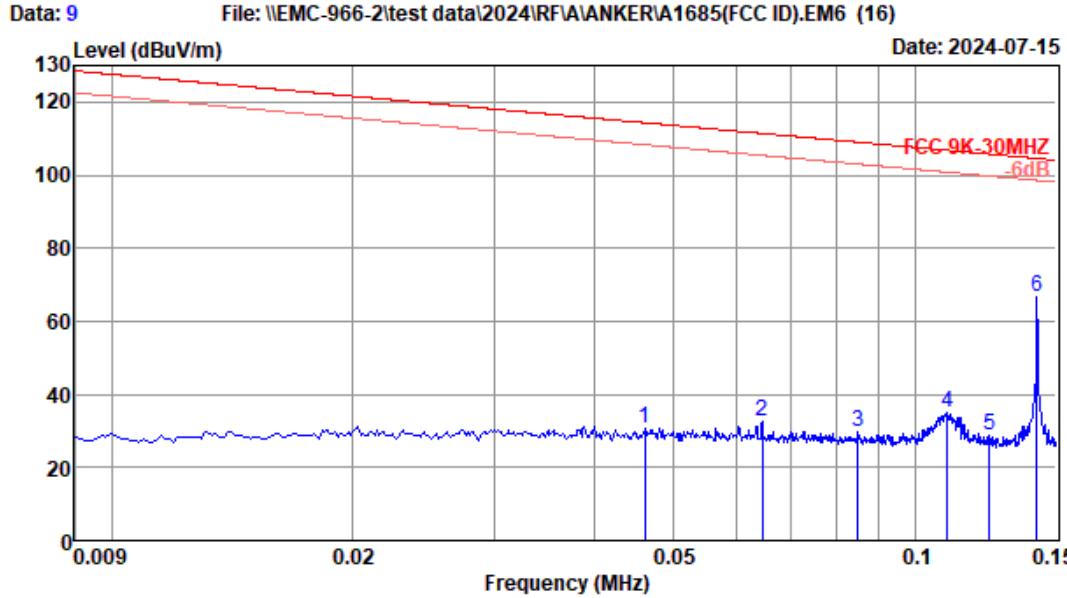


Site no. : 2# 966 chamber Data no. : 9
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 No Load

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.04608 | 20.60 | 0.10 | 10.03 | 30.73 | 114.33 | 83.60 | Peak |
| 2 | 0.06455 | 20.90 | 0.10 | 11.46 | 32.46 | 111.41 | 78.95 | Peak |
| 3 | 0.08486 | 20.10 | 0.10 | 9.67 | 29.87 | 109.03 | 79.16 | Peak |
| 4 | 0.10967 | 20.10 | 0.10 | 14.86 | 35.06 | 106.80 | 71.74 | Peak |
| 5 | 0.12377 | 19.80 | 0.10 | 8.99 | 28.89 | 105.75 | 76.86 | Peak |
| 6 | 0.14196 | 19.80 | 0.10 | 46.85 | 66.75 | 104.56 | 37.81 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

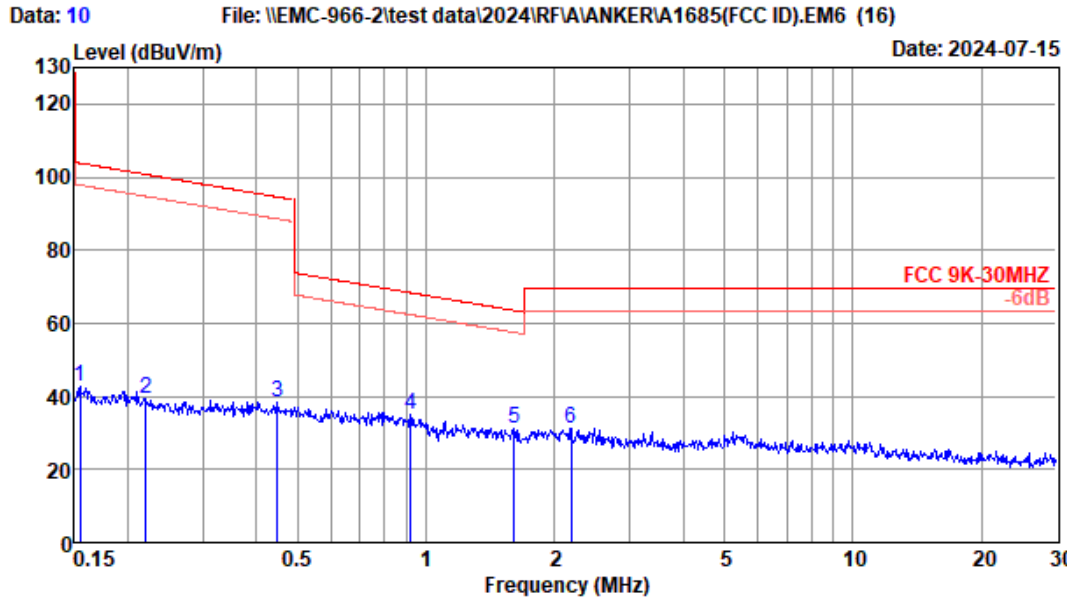

Site no. : 2# 966 chamber Data no. : 10
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COAXIAL
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 No Load

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.15485 | 19.90 | 0.10 | 22.68 | 42.68 | 103.81 | 61.13 | Peak |
| 2 | 0.22083 | 20.08 | 0.10 | 19.25 | 39.43 | 100.72 | 61.29 | Peak |
| 3 | 0.44916 | 20.81 | 0.10 | 17.36 | 38.27 | 94.56 | 56.29 | Peak |
| 4 | 0.91842 | 20.65 | 0.10 | 14.23 | 34.98 | 68.34 | 33.36 | Peak |
| 5 | 1.61047 | 20.60 | 0.11 | 10.51 | 31.22 | 63.47 | 32.25 | Peak |
| 6 | 2.18984 | 20.60 | 0.11 | 10.41 | 31.12 | 69.54 | 38.42 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 11

File: \\EMC-966-2\test data\2024\RF\ANKER\A1685(FCC ID).EM6 (16)

Date: 2024-07-15

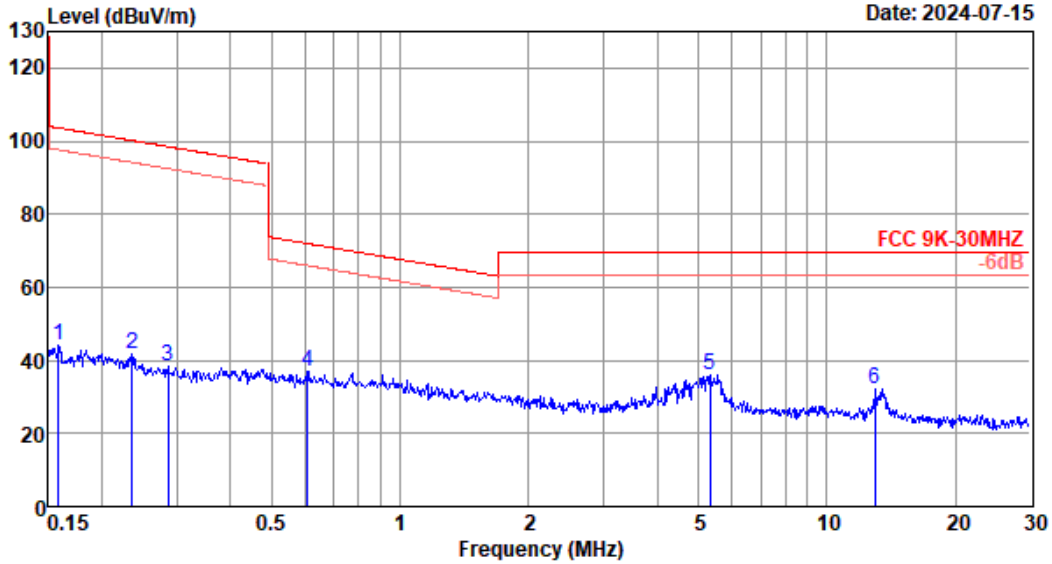


Site no. : 2# 966 chamber Data no. : 11
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 No Load

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.15816 | 19.90 | 0.10 | 23.92 | 43.92 | 103.62 | 59.70 | Peak |
| 2 | 0.23533 | 20.17 | 0.10 | 21.25 | 41.52 | 100.17 | 58.65 | Peak |
| 3 | 0.28630 | 20.26 | 0.10 | 17.80 | 38.16 | 98.47 | 60.31 | Peak |
| 4 | 0.60752 | 20.83 | 0.10 | 16.02 | 36.95 | 71.93 | 34.98 | Peak |
| 5 | 5.33317 | 20.34 | 0.12 | 15.32 | 35.78 | 69.54 | 33.76 | Peak |
| 6 | 12.98849 | 20.20 | 0.14 | 11.92 | 32.26 | 69.54 | 37.28 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

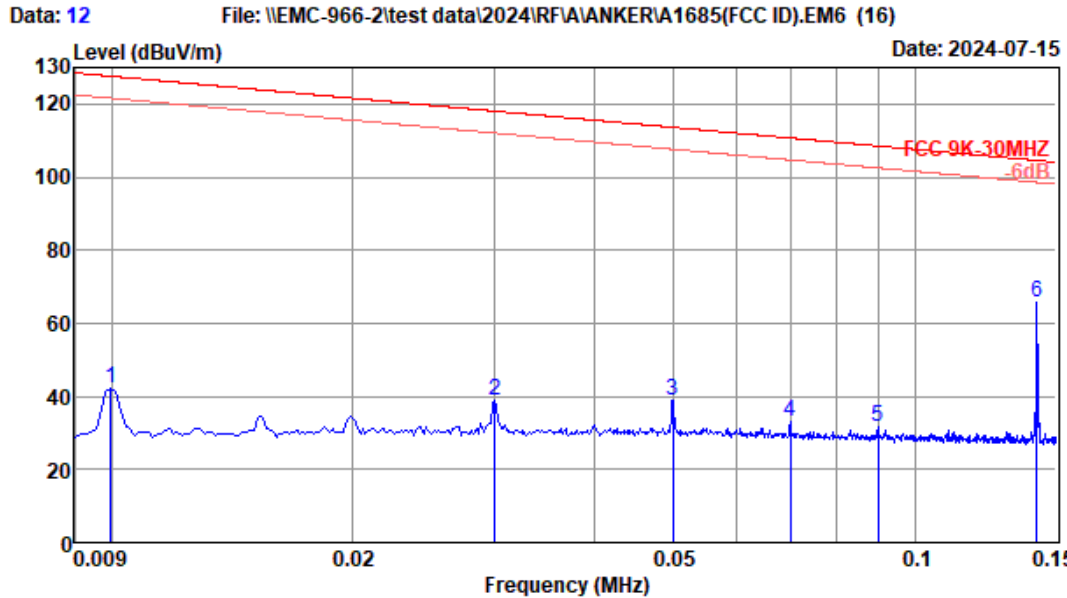

Site no. : 2# 966 chamber Data no. : 12
 Dis. / Ant. : 3m FMZB 1519B Ant. pol. : COPLANAR
 Limit : FCC 9K-30MHZ
 Env. / Ins. : Temp:20.6°C;Humi:48%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode
 No Load

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 0.00999 | 20.10 | 0.10 | 21.93 | 42.13 | 127.62 | 85.49 | Peak |
| 2 | 0.03001 | 20.60 | 0.10 | 18.30 | 39.00 | 118.06 | 79.06 | Peak |
| 3 | 0.05003 | 20.60 | 0.10 | 18.18 | 38.88 | 113.62 | 74.74 | Peak |
| 4 | 0.07005 | 20.90 | 0.10 | 12.17 | 33.17 | 110.70 | 77.53 | Peak |
| 5 | 0.08993 | 20.10 | 0.10 | 11.36 | 31.56 | 108.53 | 76.97 | Peak |
| 6 | 0.14182 | 19.80 | 0.10 | 45.91 | 65.81 | 104.57 | 38.76 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Radiated Emission Above 30MHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 13 File: \\EMC-966-2\test data\2024\RF\ANKERIA1685(FCC ID).EM6 (16) Date: 2024-07-15

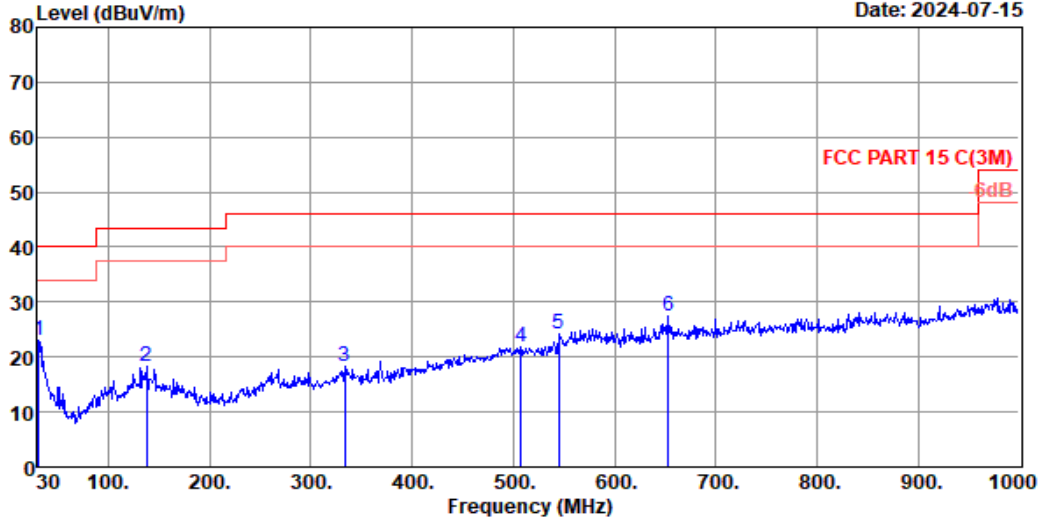

Site no. : 2# 966 chamber Data no. : 13
 Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C(3M)
 Env. / Ins. : Temp:24.6°C;Humi:51%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode


| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 30.97 | 17.95 | 0.59 | 4.58 | 23.12 | 40.00 | 16.88 | QP |
| 2 | 137.67 | 12.60 | 1.57 | 4.00 | 18.17 | 43.50 | 25.33 | QP |
| 3 | 333.61 | 14.94 | 2.38 | 0.88 | 18.20 | 46.00 | 27.80 | QP |
| 4 | 507.24 | 18.71 | 2.95 | 0.08 | 21.74 | 46.00 | 24.26 | QP |
| 5 | 545.07 | 19.70 | 3.09 | 1.27 | 24.06 | 46.00 | 21.94 | QP |
| 6 | 652.74 | 21.53 | 3.46 | 2.39 | 27.38 | 46.00 | 18.62 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 14 File: \\EMC-966-2\test data\2024\RF\ANKER\A1685(FCC ID).EM6 (16)

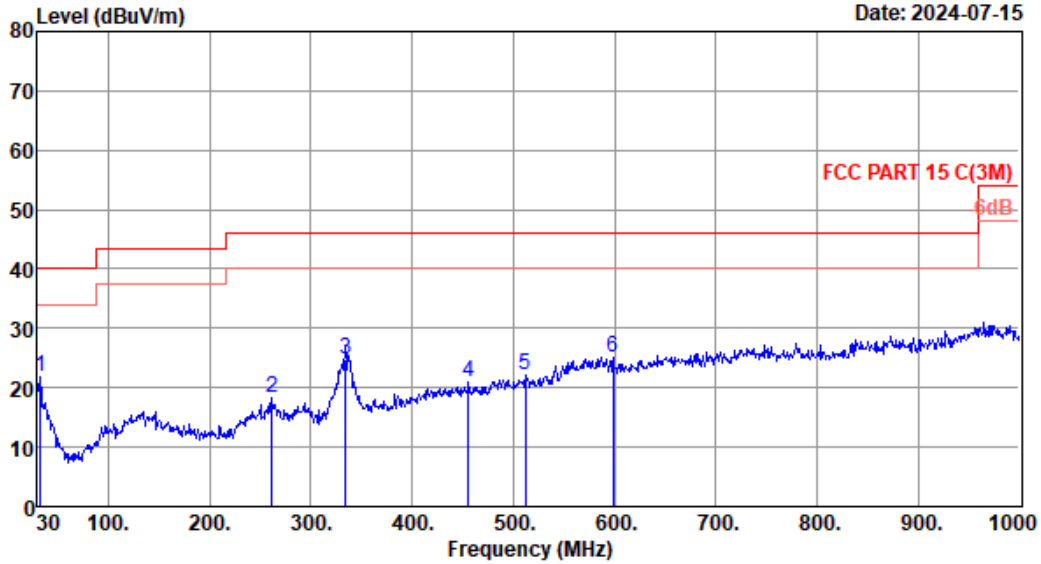

Site no. : 2# 966 chamber Data no. : 14
 Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C(3M)
 Env. / Ins. : Temp:24.6°C;Humi:51%;Press:101.52kPa
 Engineer : LST
 EUT : Anker Zolo Power Bank(10K,Magnetic,Built
 -In USB-C Cable)
 Power : DC 7.4V From Battery
 M/N : A1685
 Test Mode : TX Mode

| | Freq. (MHz) | ANT Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|---|----------------|-------------------------|-----------------------|-------------------|-------------------------------|-------------------|----------------|--------|
| 1 | 32.91 | 16.45 | 0.60 | 4.68 | 21.73 | 40.00 | 18.27 | QP |
| 2 | 261.83 | 14.02 | 2.01 | 2.22 | 18.25 | 46.00 | 27.75 | QP |
| 3 | 334.58 | 14.95 | 2.39 | 7.39 | 24.73 | 46.00 | 21.27 | QP |
| 4 | 455.83 | 17.48 | 2.77 | 0.59 | 20.84 | 46.00 | 25.16 | QP |
| 5 | 512.09 | 18.82 | 2.96 | 0.45 | 22.23 | 46.00 | 23.77 | QP |
| 6 | 598.42 | 20.38 | 3.29 | 1.32 | 24.99 | 46.00 | 21.01 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

4. AC POWER LINE CONDUCTED EMISSIONS


4.1. Limit

| Frequency | | | Maximum RF Line Voltage | |
|-----------|---|--------|----------------------------------|-------------------------------|
| | | | Quasi-Peak Level dB(μ V) | Average Level dB(μ V) |
| 150kHz | ~ | 500kHz | 66 ~ 56* | 56 ~ 46* |
| 500kHz | ~ | 5MHz | 56 | 46 |
| 5MHz | ~ | 30MHz | 60 | 50 |

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

4.2. Test Setup

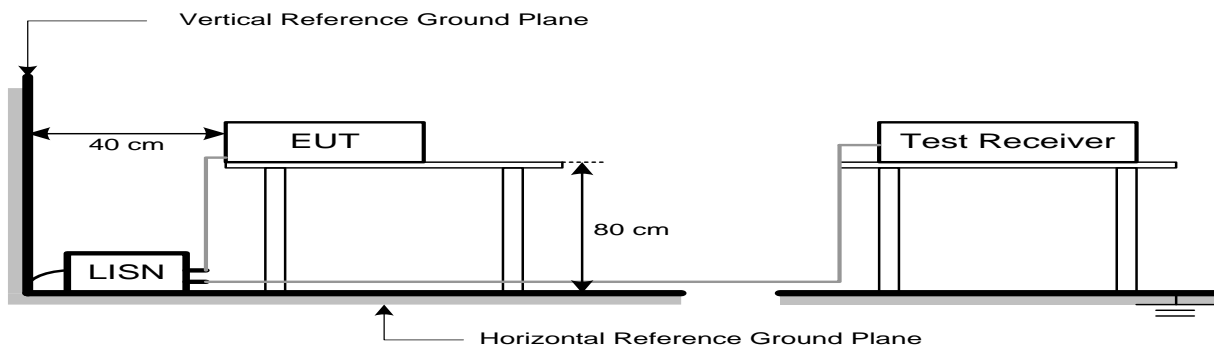

4.3. Spectrum Analyzer Setting

| Spectrum Parameters | Setting |
|---------------------|----------|
| RBW | 9KHz |
| VBW | 9KHz |
| Start frequency | 150KHz |
| Stop frequency | 30MHz |
| Sweep Time | Auto |
| Detector | QP/AVG |
| Trace Mode | Max Hold |

4.4. Test Procedure


- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 4.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

4.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 38 File: \\EMC-ce-2\Test Data\2024\RF\A\Anker.EM6 (40) Date: 2024-07-17

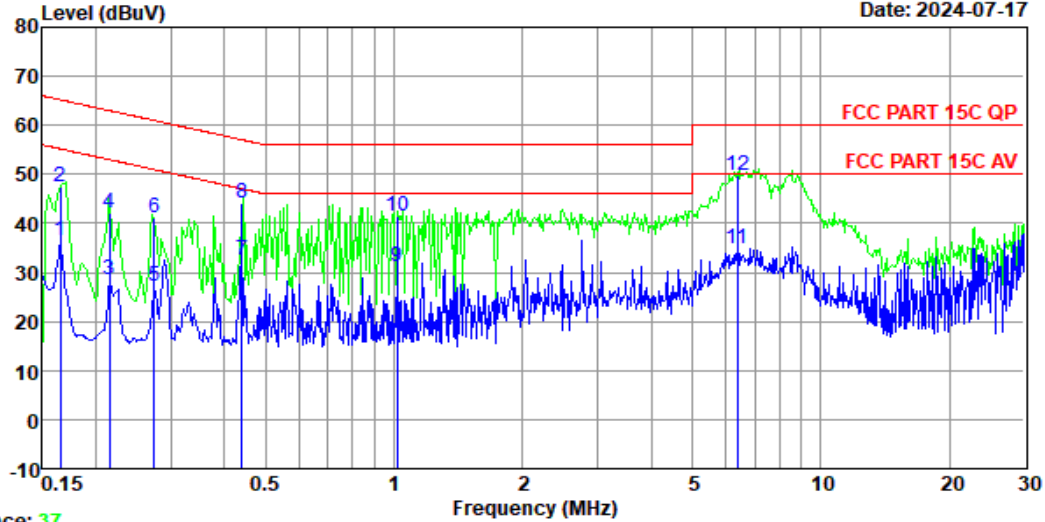

Trace: 37
 Site no : 2#CE Shield Room Data no. : 38
 Env. / Ins. : Temp:26.4°C;Humi:74%; Press:101.20kPa LINE Phase : LINE
 Limit : FCC PART 15C QP
 Engineer : Marker
 EUT : Anker Zolo Power Bank(10K,Magnetic,
 Built-In USB-C Cable)
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : A1685
 Test Mode : Charging


| | Freq. (MHz) | LISN Factor (db) | Cable Loss (db) | Reading dBuV) | Emission Level (dBuv) | Limits (dBuv) | Margin (dB) | Remark |
|----|----------------|------------------------|-----------------------|------------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.165 | 10.12 | 9.89 | 16.51 | 36.52 | 55.21 | 18.69 | Average |
| 2 | 0.165 | 10.12 | 9.89 | 27.33 | 47.34 | 65.21 | 17.87 | QP |
| 3 | 0.215 | 10.16 | 9.94 | 8.58 | 28.68 | 53.01 | 24.33 | Average |
| 4 | 0.215 | 10.16 | 9.94 | 22.12 | 42.22 | 63.01 | 20.79 | QP |
| 5 | 0.274 | 10.15 | 9.91 | 7.22 | 27.28 | 50.98 | 23.70 | Average |
| 6 | 0.274 | 10.15 | 9.91 | 21.23 | 41.29 | 60.98 | 19.69 | QP |
| 7 | 0.440 | 10.09 | 9.92 | 12.39 | 32.40 | 47.07 | 14.67 | Average |
| 8 | 0.440 | 10.09 | 9.92 | 24.11 | 44.12 | 57.07 | 12.95 | QP |
| 9 | 1.016 | 9.97 | 10.05 | 11.16 | 31.18 | 46.00 | 14.82 | Average |
| 10 | 1.016 | 9.97 | 10.05 | 21.36 | 41.38 | 56.00 | 14.62 | QP |
| 11 | 6.386 | 10.09 | 9.99 | 14.68 | 34.76 | 50.00 | 15.24 | Average |
| 12 | 6.386 | 10.09 | 9.99 | 29.55 | 49.63 | 60.00 | 10.37 | QP |

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 40 File: \\EMC-ce-2\Test Data\2024\RFIA\Anker.EM6 (40) Date: 2024-07-17

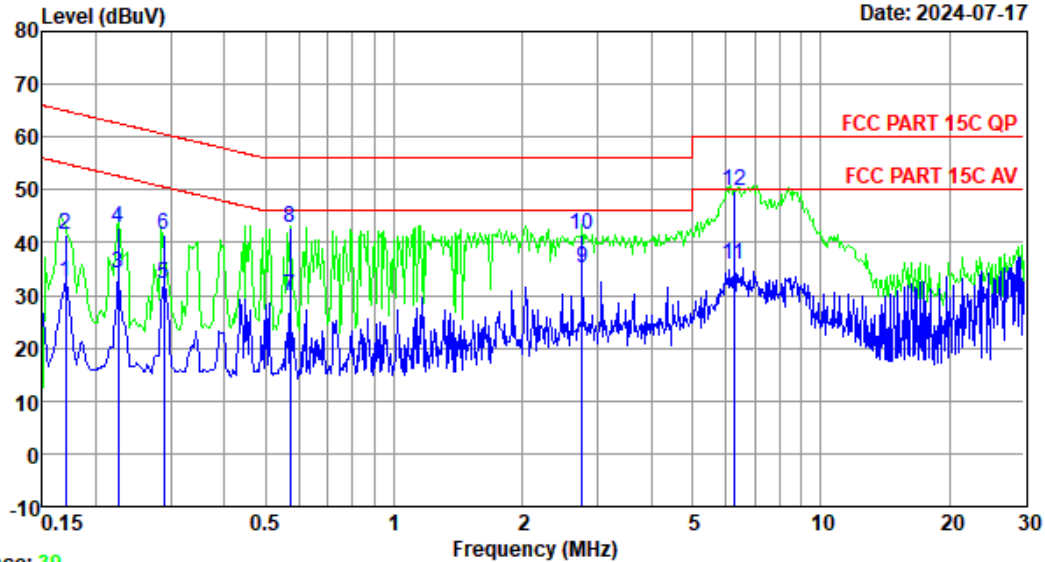

Trace: 39
 Site no : 2#CE Shield Room Data no. : 40
 Env. / Ins. : Temp:26.4°C;Humi:74%; Press:101.20kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15C QP
 Engineer : Marker
 EUT : Anker Zolo Power Bank(10K,Magnetic,
 Built-In USB-C Cable)
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : A1685
 Test Mode : Charging

| | Freq. (MHz) | LISN Factor (db) | Cable Loss (db) | Reading dBuV | Emission Level (dBuv) | Limits (dBuv) | Margin (dB) | Remark |
|----|----------------|------------------------|-----------------------|-----------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.170 | 10.22 | 9.89 | 12.53 | 32.64 | 54.94 | 22.30 | Average |
| 2 | 0.170 | 10.22 | 9.89 | 21.33 | 41.44 | 64.94 | 23.50 | QP |
| 3 | 0.226 | 10.15 | 9.94 | 13.97 | 34.06 | 52.61 | 18.55 | Average |
| 4 | 0.226 | 10.15 | 9.94 | 22.85 | 42.94 | 62.61 | 19.67 | QP |
| 5 | 0.289 | 10.16 | 9.91 | 12.26 | 32.33 | 50.54 | 18.21 | Average |
| 6 | 0.289 | 10.16 | 9.91 | 21.33 | 41.40 | 60.54 | 19.14 | QP |
| 7 | 0.570 | 10.00 | 9.96 | 9.84 | 29.80 | 46.00 | 16.20 | Average |
| 8 | 0.570 | 10.00 | 9.96 | 23.00 | 42.96 | 56.00 | 13.04 | QP |
| 9 | 2.765 | 10.01 | 10.00 | 15.32 | 35.33 | 46.00 | 10.67 | Average |
| 10 | 2.765 | 10.01 | 10.00 | 21.33 | 41.34 | 56.00 | 14.66 | QP |
| 11 | 6.252 | 10.06 | 9.99 | 15.72 | 35.77 | 50.00 | 14.23 | Average |
| 12 | 6.252 | 10.06 | 9.99 | 29.65 | 49.70 | 60.00 | 10.30 | QP |

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

5. ANTENNA REQUIREMENTS

5.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.2. Test Result

The antennas used for this product is Coil antenna,so compliance with antenna requirements. (Please refer to the EUT photo for details)

6. TEST SETUP PHOTO

Refer to report no. ESTE-R2407215 (Appendix A)



7. EUT PHOTO

Refer to report no. ESTE-R2407216 (Appendix A)

End of Test Report