

RF EXPOSURE REPORT FOR CERTIFICATION  
On Behalf of

Anker Innovations Limited

Anker 313 Wireless Charger(stand)

Model Number: A2524

FCC ID: 2AOKB-A2524A



Applicant:	Anker Innovations Limited
Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok,
	Kowloon, Hong Kong
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2205040
Date of Test:	Apr. 16~May. 07, 2022
Date of Report:	May. 09, 2022

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
TEST REPORT VERIFICATION.....	3
1. SUMMARY OF TEST .....	4
1.1. Summary of test result.....	4
1.2. Test Mode.....	4
1.3. Test Equipment List .....	4
2. MAXIMUM PERMISSIBLE EXPOSURE .....	5
2.1. Limit .....	5
2.2. Test Setup .....	5
2.3. Test Procedure .....	6
2.4. Equipment Approval Considerations .....	7
2.5. Test Result:.....	8

## EST Technology Co., Ltd.

<b>Applicant:</b>	Anker Innovations Limited		
<b>Address:</b>	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong		
<b>Manufacturer:</b>	Anker Innovations Limited		
<b>Address:</b>	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong		
<b>E.U.T:</b>	Anker 313 Wireless Charger(stand)		
<b>Model Number:</b>	A2524		
<b>Power Supply:</b>	DC 5V/2A, DC 9V/2A		
<b>Trade Name:</b>	Anker	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Apr. 16, 2022	<b>Date of Test:</b>	Apr. 16~May. 07, 2022
<b>Test Specification:</b>	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01		
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&amp;1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
		<b>Date:</b> May. 09, 2022	
<b>Prepared by:</b>	<b>Reviewed by:</b>	<b>Approved by:</b>	
 <hr/> Emily Cai / Assistant	 <hr/> Seven Wang / Engineer	 <hr/> Iceman Hu / Manager	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

## 1. SUMMARY OF TEST

### 1.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

### 1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Wireless Charging with Empty Load
	Wireless Charging with Half Load
	Wireless Charging with Full Load
Note: The worst Full Load status is recorded in the report	

### 1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electric and Magnetic Field Probe-Analyzer	Narda S.T.S./PMM	EHP-200A	EST-E106	June 13,21	1 Year
Simulated load(Full)	/	/	EST-306	N/A	N/A
Simulated load(Half)	/	/	EST-307	N/A	N/A
Test Software	Narda	EHP200-TS	Rel 1.92	N/A	N/A

## 2. MAXIMUM PERMISSIBLE EXPOSURE

### 2.1. Limit

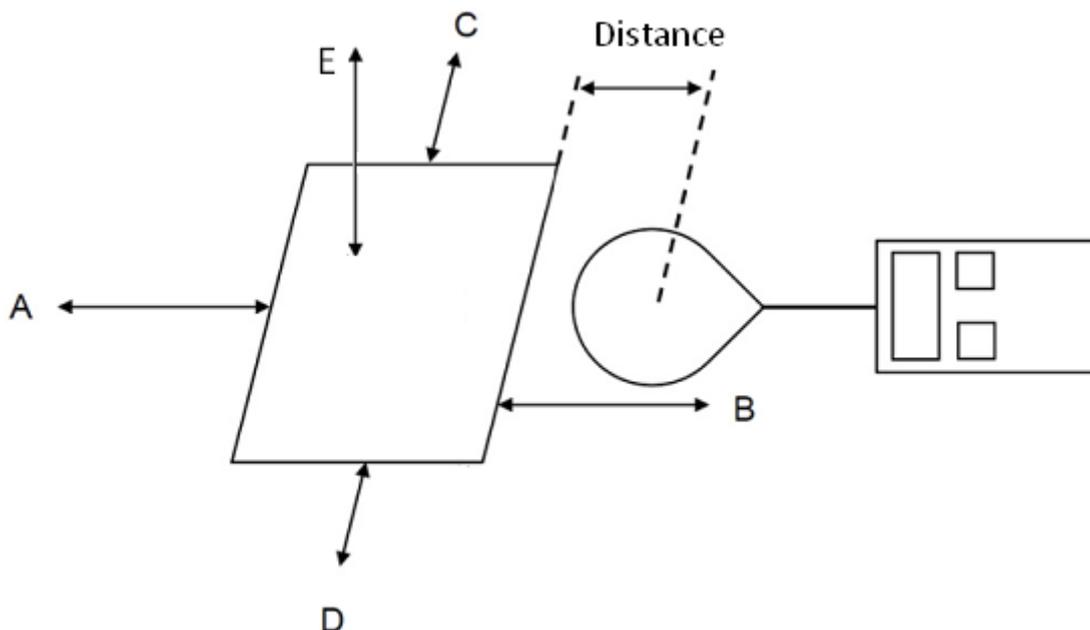
**Limits for Maximum Permissible Exposure (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

Note:

1. f = frequency in MHz \* = Plane-wave equivalent power density.
2. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

### 2.2. Test Setup



## 2.3. Test Procedure

- a. The test was performed on table in anechoic chamber.
- b. The probe was placed at 15 cm surrounding the device and 20 cm above the top of the charger and the geometric centre of the probe.
- c. The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.

## 2.4. Equipment Approval Considerations

Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance.

<b>1</b>	Power transfer frequency is less than 1 MHz
	YES; the device operated in the frequency range from 111-205KHz.
<b>2</b>	Output power from each primary coil is less than or equal to 15 watts.
	YES; the maximum output power of the primary coil is 10W.
<b>3</b>	The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.
	YES.
<b>4</b>	Client device is placed directly in contact with the transmitter.
	YES; Client device is placed directly in contact with the transmitter.
<b>5</b>	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
	YES.
<b>6</b>	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
	YES; The EUT field strength levels are 50% x MPE limits.

2.5. Test Result:

<b>E-field strength</b>			
Frequency range (KHz)	111 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(V/m)	3.892	3.572	3.367
Position B(V/m)	3.963	3.654	3.429
Position C(V/m)	3.815	3.501	3.322
Position D(V/m)	3.887	3.586	3.404
Position E(V/m)	7.603	7.251	7.026
Limits (V/m)	614		
50% Limits(V/m)	307		

<b>H-field strength</b>			
Frequency range (KHz)	111 to 205		
Test Mode	Full Load	Half Load	Empty Load
Position A(A/m)	0.128	0.115	0.092
Position B(A/m)	0.132	0.109	0.086
Position C(A/m)	0.120	0.107	0.081
Position D(A/m)	0.127	0.114	0.090
Position E(A/m)	0.297	0.258	0.203
Limits (A/m)	1.630		
50% Limits (A/m)	0.815		

**End of Test Report**