

# FCC TEST REPORT

Client Name : Anker Innovations Limited  
Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road,  
Mongkok, Kowloon, Hong Kong  
Product Name : PowerWave 10 Dual Pad  
Date : May 09, 2019

**Shenzhen Anbotek Compliance Laboratory Limited**

# Contents

- 1. General Information..... 4
  - 1.1. Client Information..... 4
  - 1.2. Description of Device (EUT)..... 4
  - 1.3. Auxiliary Equipment Used During Test..... 4
  - 1.4. Description of Test Modes..... 5
  - 1.5. Description Of Test Setup..... 6
  - 1.6. Test Equipment List..... 7
  - 1.7. Measurement Uncertainty..... 8
  - 1.8. Description of Test Facility..... 8
- 2. Summary of Test Results..... 9
- 3. Conducted Emission Test..... 10
  - 3.1. Test Standard and Limit..... 10
  - 3.2. Test Setup..... 10
  - 3.3. Test Procedure..... 10
  - 3.4. Test Data..... 10
- 4. Radiation Spurious Emission and Band Edge..... 15
  - 4.1. Test Standard and Limit..... 15
  - 4.2. Test Setup..... 15
  - 4.3. Test Procedure..... 16
  - 4.4. Test Data..... 17
- 5. Antenna Requirement..... 23
  - 5.1. Test Standard and Requirement..... 23
  - 5.2. Antenna Connected Construction..... 23

# TEST REPORT

Applicant : Anker Innovations Limited  
Manufacturer : Anker Innovations Limited  
Product Name : PowerWave 10 Dual Pad  
Model No. : A2571  
Trade Mark : ANKER  
Rating(s) : Input: DC 12V, 3A  
Output: 10W x 2

Test Standard(s) : **FCC Part15 Subpart C 2018, Paragraph 15.209**  
Test Method(s) : **ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt  
Date of Test

Apr. 25, 2019  
Apr. 25~May 06, 2019

Prepared By



*Oliay Yang*  
(Engineer / Oliay Yang)

Reviewer

*Snowy Meng*  
(Supervisor / Snowy Meng)

Approved & Authorized Signer

*Sally Zhang*  
(Manager / Sally Zhang)

## 1. General Information

### 1.1. Client Information

Applicant	:	Anker Innovations Limited
Address	:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer	:	Anker Innovations Limited
Address	:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Factory	:	SHENZHEN RUIJING INDUSTRIAL CO., LTD
Address	:	Building C1, Hengli Industrial Park, Xiakeng 1st Road No.168, Longgang Street, Longgang District, Shenzhen, Guangdong, China

### 1.2. Description of Device (EUT)

Product Name	:	PowerWave 10 Dual Pad
Model No.	:	A2571
Trade Mark	:	ANKER
Test Power Supply	:	AC 240V, 60Hz for adapter/ AC 120V, 60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	110.1-205KHz
	Modulation Type:	MSK
	Antenna Type:	Inductive loop coil Antenna
	Antenna Gain(Peak):	0 dBi

**Remark:** 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 1.3. Auxiliary Equipment Used During Test

Adapter	:	MODEL: ASSA79A-120300 INPUT: 100-240V~ 50/60Hz, 1.2A OUTPUT: 12.0V--- 3.0A
---------	---	--

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Full load, Dual wireless charger module



For Conducted Emission	
Final Test Mode	Description
Mode 1	Full load, Dual wireless charger module

For Radiated Emission	
Final Test Mode	Description
Mode 1	Full load, Dual wireless charger module

Note: (1)Test channel is 0.1354MHz.

(2)All the situation(full load, half load and empty load) has been tested,only the worst situation (full load) was recorded in the report.

### 1.5. Description Of Test Setup

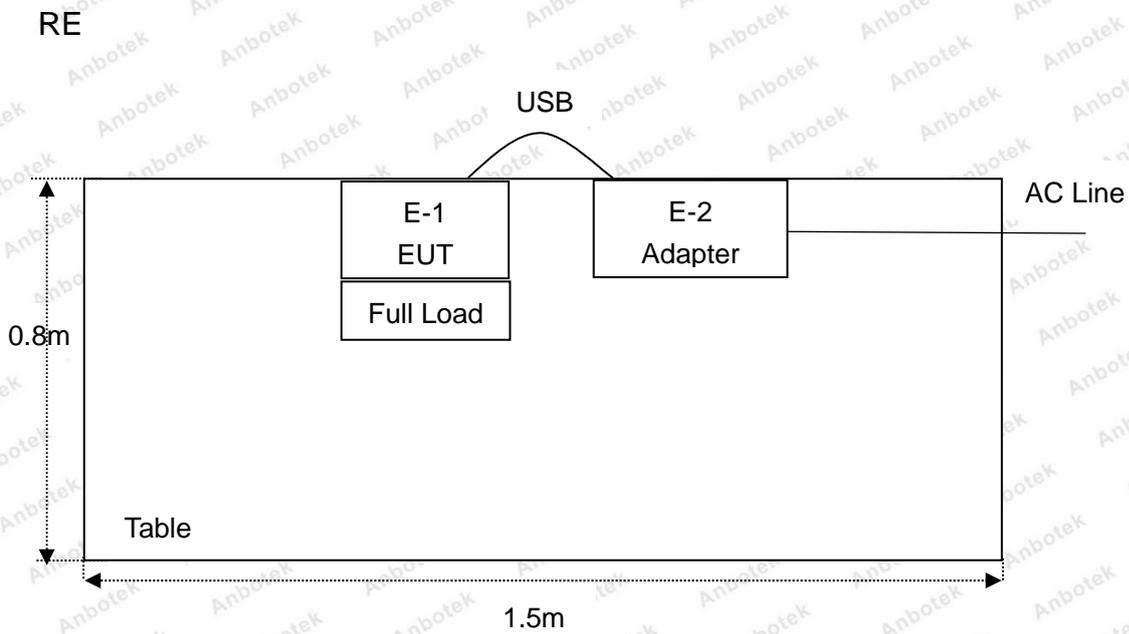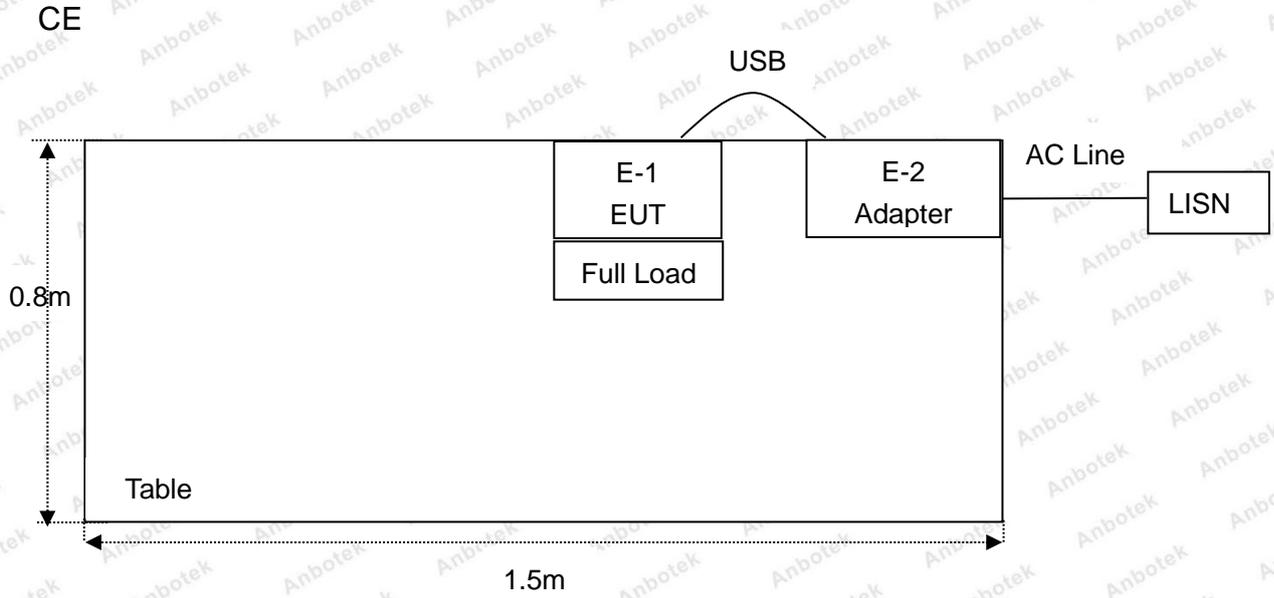

## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 05, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 05, 2018	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 20, 2018	1 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 20, 2018	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 05, 2018	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 05, 2018	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 05, 2018	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 05, 2018	1 Year
19.	DC Power Supply	LW	TPR-6420D	374470	Oct. 31, 2018	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 01, 2018	1 Year

**1.7. Measurement Uncertainty**

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

**1.8. Description of Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 184111**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

**ISED-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

**Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

## 2. Summary of Test Results


Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS

### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
<b>Remark:</b> (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

#### 3.2. Test Setup

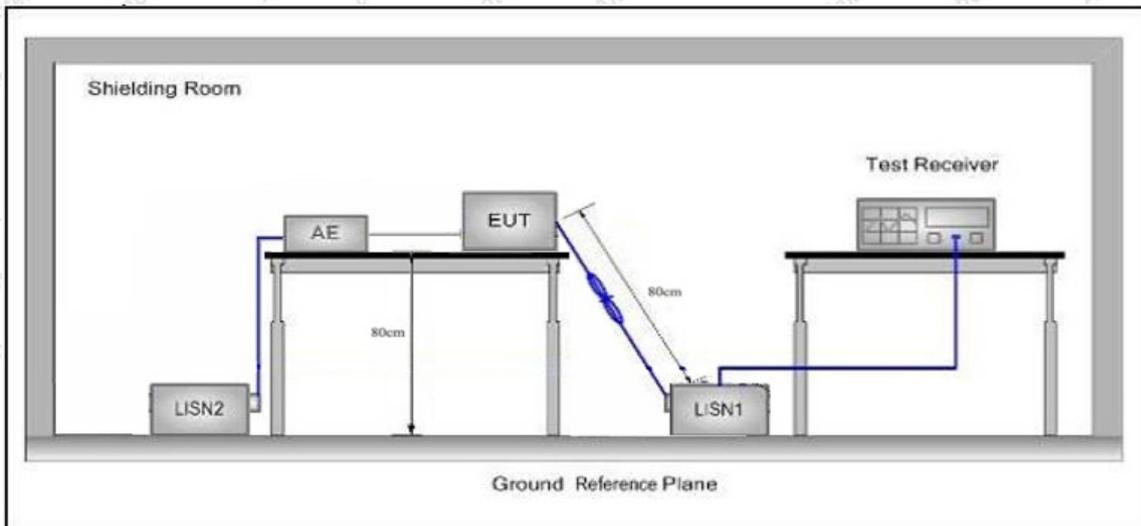

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

Please to see the following pages

**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 22.6°C Hum.: 53%

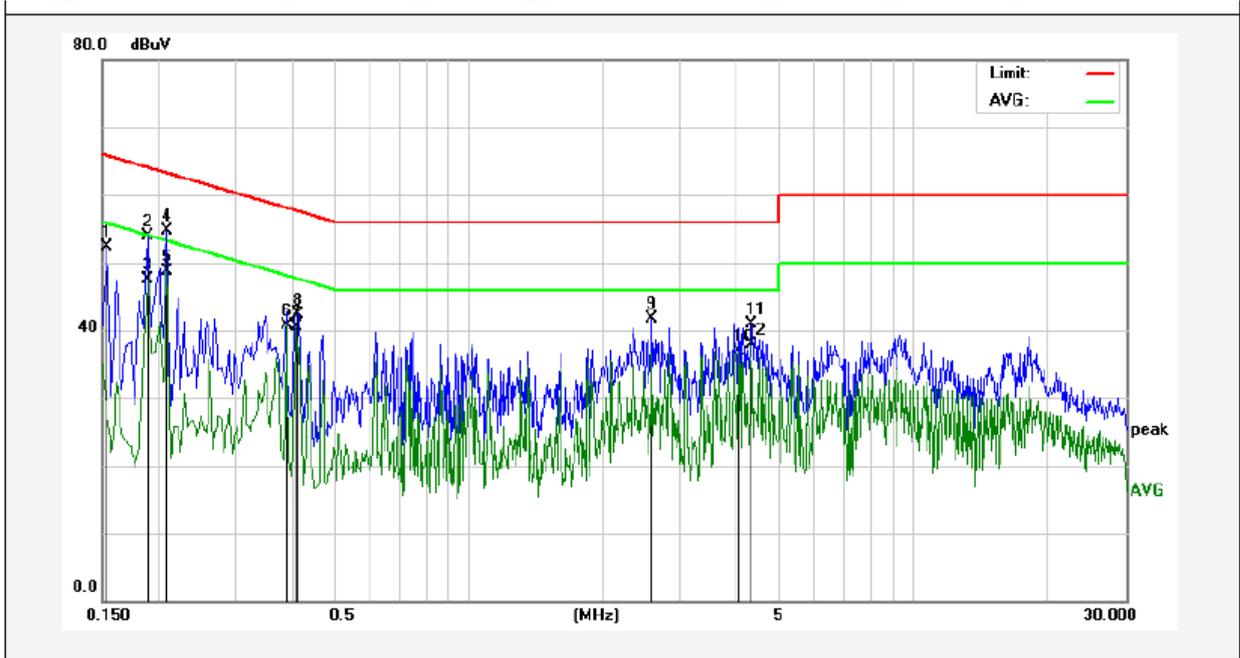

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1539	32.40	19.90	52.30	65.78	-13.48	QP	
2	0.1900	34.05	19.90	53.95	64.03	-10.08	QP	
3	0.1900	27.69	19.90	47.59	54.03	-6.44	AVG	
4	0.2100	34.77	19.90	54.67	63.20	-8.53	QP	
5	0.2100	28.81	19.90	48.71	53.20	-4.49	AVG	
6	0.3899	20.80	19.93	40.73	48.06	-7.33	AVG	
7	0.4100	20.64	19.94	40.58	47.65	-7.07	AVG	
8	0.4140	22.46	19.94	42.40	57.57	-15.17	QP	
9	2.5900	21.47	20.15	41.62	56.00	-14.38	QP	
10	4.0700	16.79	20.18	36.97	46.00	-9.03	AVG	
11	4.3180	20.79	20.19	40.98	56.00	-15.02	QP	
12	4.3180	17.72	20.19	37.91	46.00	-8.09	AVG	

**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 22.6°C Hum.: 53%

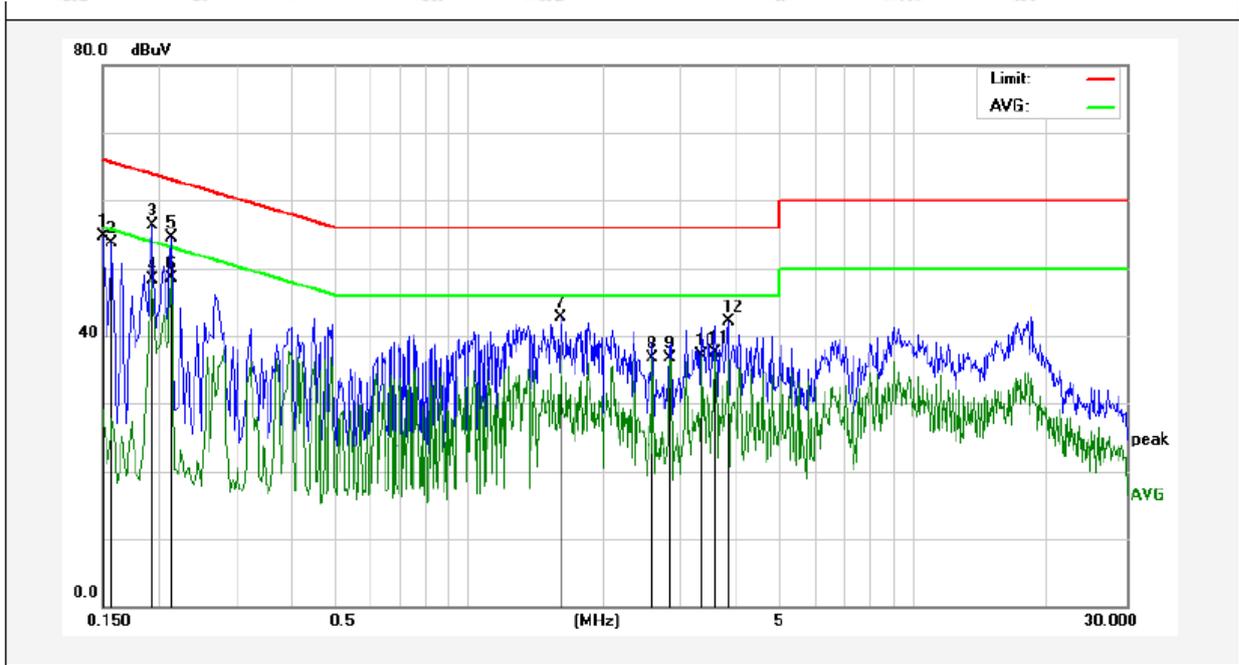

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	34.81	19.90	54.71	65.99	-11.28	QP	
2	0.1580	33.72	19.90	53.62	65.56	-11.94	QP	
3	0.1940	36.38	19.90	56.28	63.86	-7.58	QP	
4	0.1940	28.40	19.90	48.30	53.86	-5.56	AVG	
5	0.2140	34.66	19.90	54.56	63.04	-8.48	QP	
6	0.2140	28.66	19.90	48.56	53.04	-4.48	AVG	
7	1.6019	22.65	20.13	42.78	56.00	-13.22	QP	
8	2.5900	16.58	20.15	36.73	46.00	-9.27	AVG	
9	2.8380	16.64	20.16	36.80	46.00	-9.20	AVG	
10	3.3340	17.00	20.17	37.17	46.00	-8.83	AVG	
11	3.5780	17.24	20.17	37.41	46.00	-8.59	AVG	
12	3.8260	21.94	20.18	42.12	56.00	-13.88	QP	

**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 22.6°C Hum.: 53%

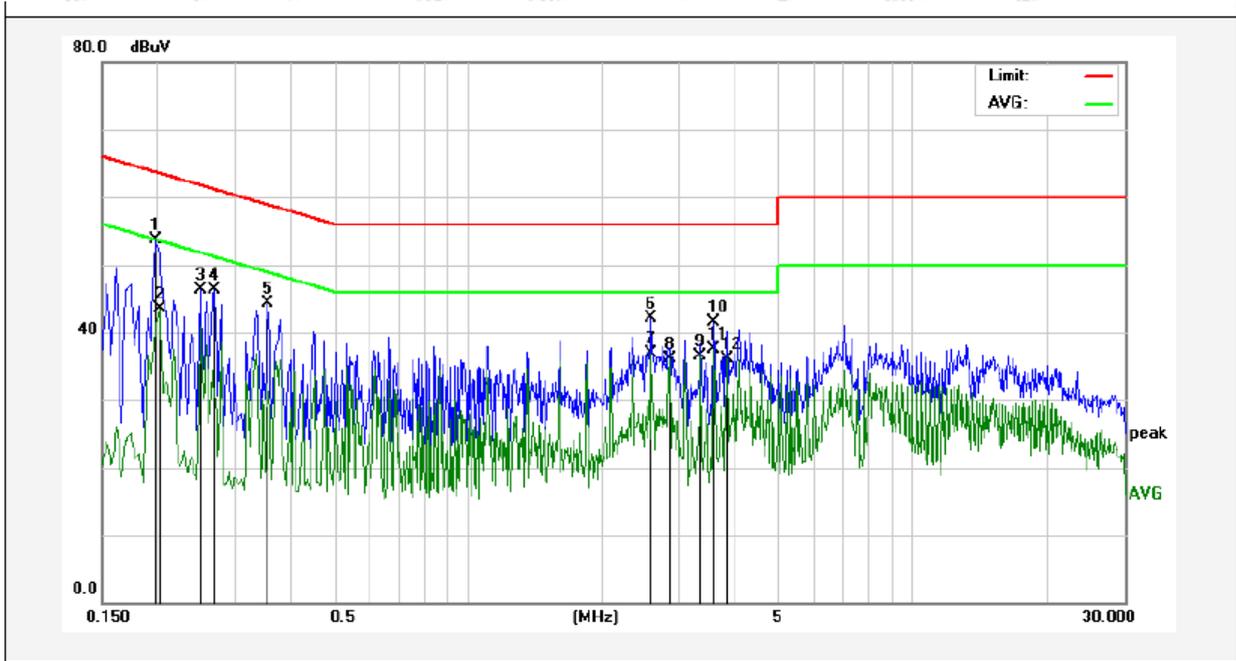

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1980	33.89	19.90	53.79	63.69	-9.90	QP	
2	0.2020	23.66	19.90	43.56	53.52	-9.96	AVG	
3	0.2500	26.51	19.89	46.40	61.75	-15.35	QP	
4	0.2700	26.48	19.89	46.37	61.12	-14.75	QP	
5	0.3540	24.32	19.91	44.23	58.87	-14.64	QP	
6	2.5940	21.99	20.15	42.14	56.00	-13.86	QP	
7	2.5940	16.85	20.15	37.00	46.00	-9.00	AVG	
8	2.8420	15.89	20.16	36.05	46.00	-9.95	AVG	
9	3.3340	16.27	20.17	36.44	46.00	-9.56	AVG	
10	3.5820	21.39	20.17	41.56	56.00	-14.44	QP	
11	3.5820	17.25	20.17	37.42	46.00	-8.58	AVG	
12	3.8300	15.85	20.18	36.03	46.00	-9.97	AVG	

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 22.6°C Hum.: 53%

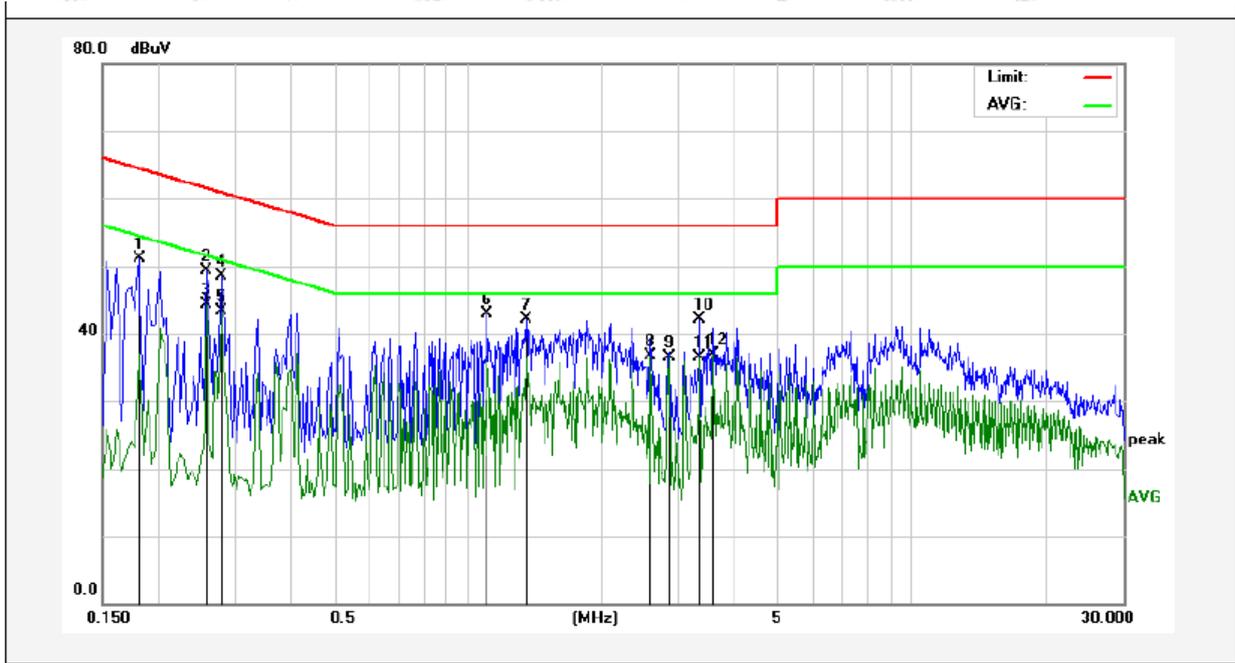

No.	Freq. (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit dBUV	Over Limit (dB)	Detector	Remark
1	0.1819	31.29	19.90	51.19	64.39	-13.20	QP	
2	0.2580	29.48	19.89	49.37	61.49	-12.12	QP	
3	0.2580	24.48	19.89	44.37	51.49	-7.12	AVG	
4	0.2779	28.66	19.89	48.55	60.88	-12.33	QP	
5	0.2779	23.34	19.89	43.23	50.88	-7.65	AVG	
6	1.1100	22.75	20.12	42.87	56.00	-13.13	QP	
7	1.3580	21.99	20.13	42.12	56.00	-13.88	QP	
8	2.5940	16.62	20.15	36.77	46.00	-9.23	AVG	
9	2.8420	16.30	20.16	36.46	46.00	-9.54	AVG	
10	3.3300	21.87	20.17	42.04	56.00	-13.96	QP	
11	3.3300	16.33	20.17	36.50	46.00	-9.50	AVG	
12	3.5780	16.79	20.17	36.96	46.00	-9.04	AVG	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

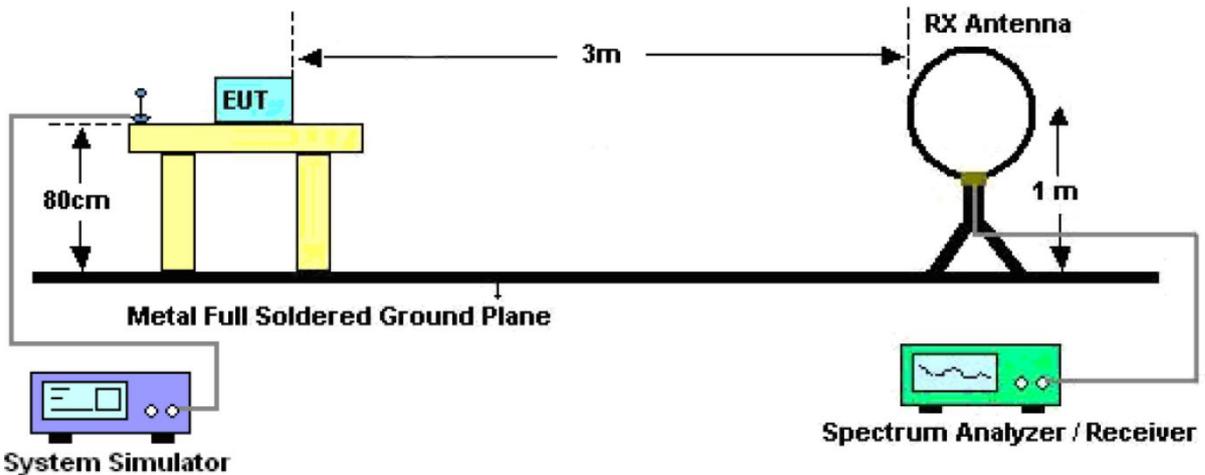


Figure 1. Below 30MHz

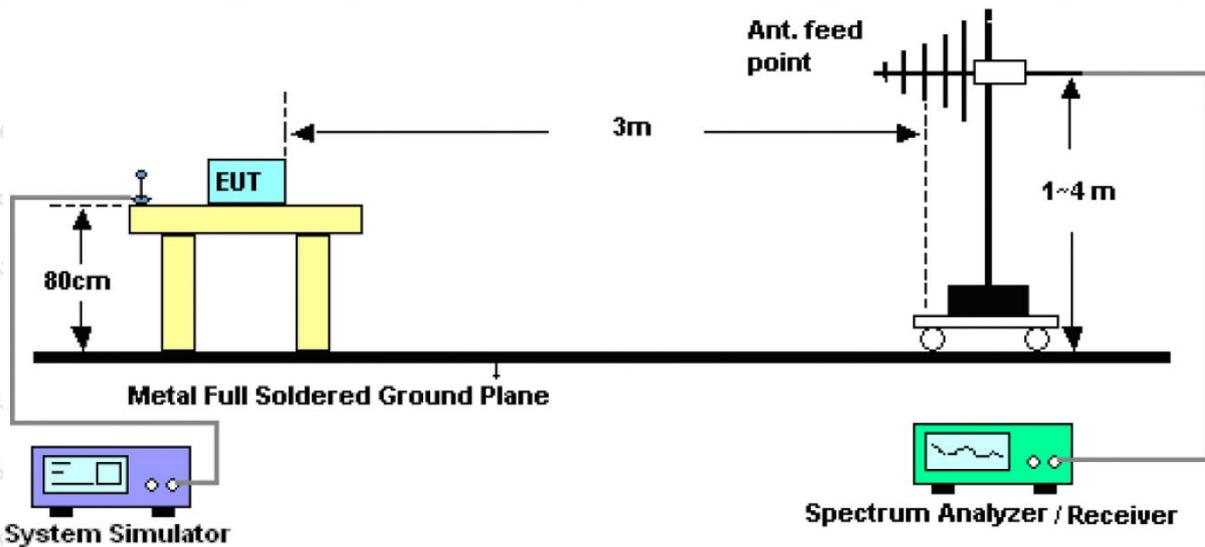


Figure 2. 30MHz to 1GHz

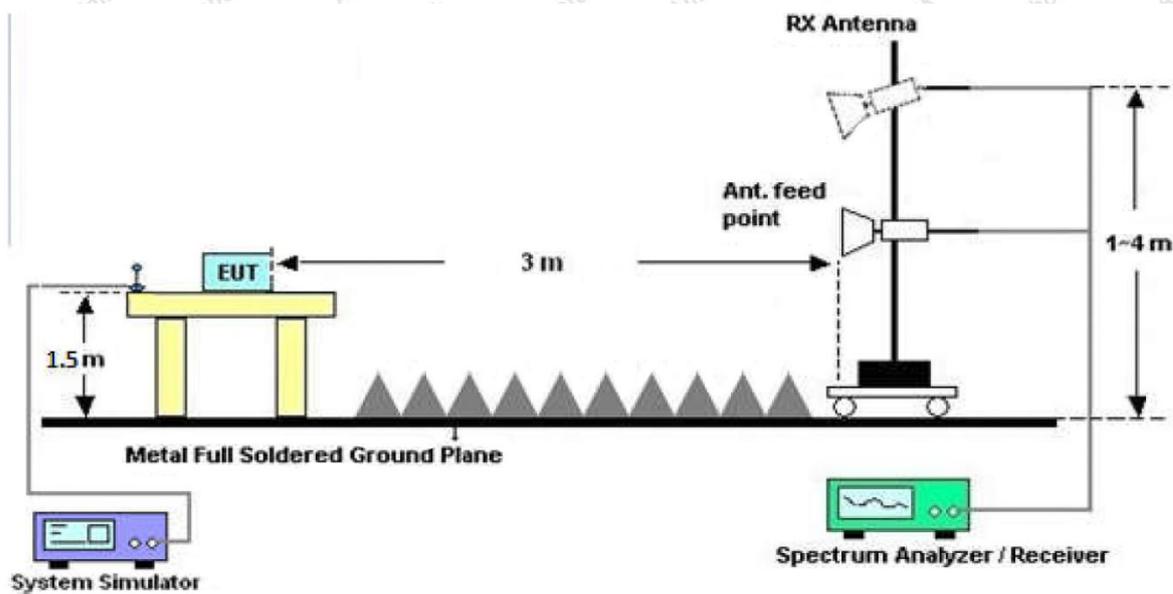


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data


**PASS**

Note: The data is in TX mode, and this is the worst mode.

**Test Results**

(Between 9KHz – 30MHz)

**Job No.:** SZAWW190425006-01  
**Standard:** FCC PART15 C\_3m    **Power Source:** AC 120V, 60Hz for adapter  
**Test item:** Radiation Test    **Temp.(C)/Hum.(%RH):** 24.7°C/51%RH  
**Test Mode:** Mode 1    **Distance:** 3m

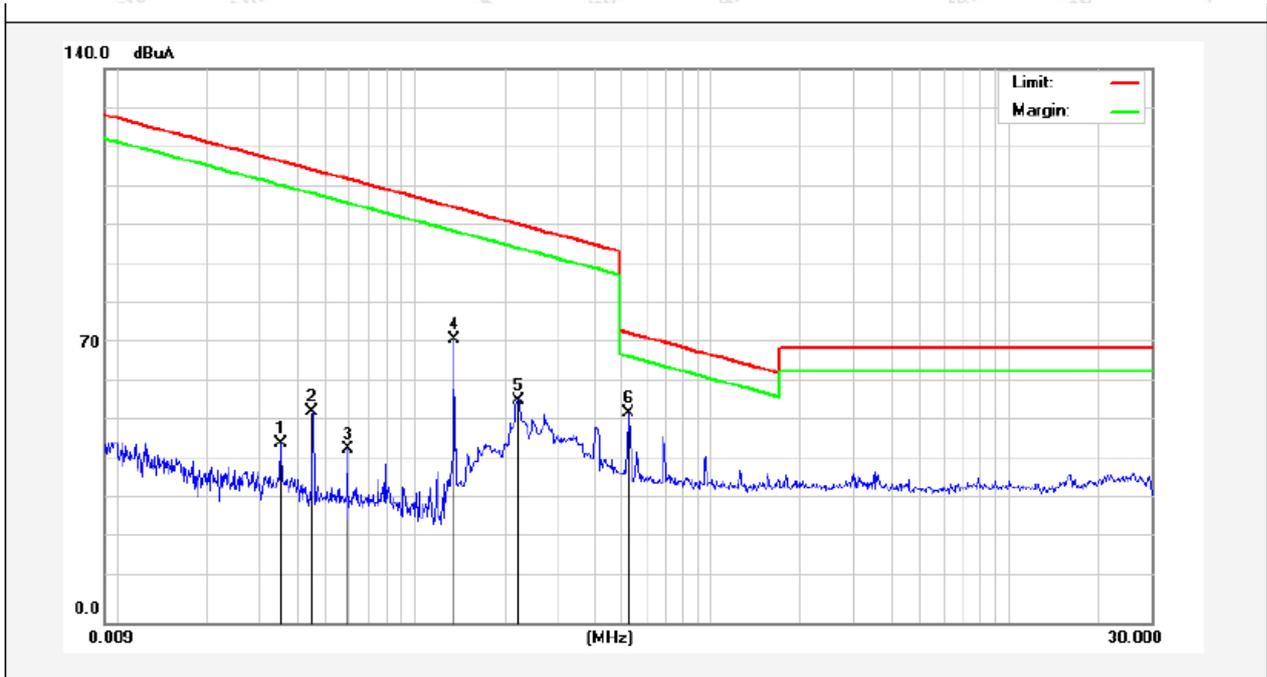


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree
									(dge)
0.0352	44.03	19.28	2.53	0	65.84	136.55	-70.71	Peak	41
0.0352	23.64	19.28	2.53	0	45.45	116.55	-71.10	AV	41
0.0451	48.27	19.32	2.53	0	70.12	134.40	-64.28	Peak	63
0.0451	31.64	19.32	2.53	0	53.49	114.40	-60.91	AV	63
0.0592	38.60	19.36	2.55	0	60.51	132.05	-71.54	Peak	141
0.0592	21.87	19.36	2.55	0	43.78	112.05	-68.27	AV	141
0.1360	58.62	19.38	2.55	0	80.55	124.87	-44.32	Peak	200
0.1360	49.61	19.38	2.55	0	71.54	104.87	-33.33	AV	200
0.2220	44.26	19.40	2.57	0	66.23	120.64	-54.41	Peak	12
0.2220	34.02	19.50	2.57	0	56.09	100.64	-44.55	AV	12
0.5260	31.04	19.40	2.64	0	53.08	73.18	-20.10	QP	0

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.


(Between 30MHz –1000 MHz)

<b>Job No.:</b>	<b>SZAWW190425006-01</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>AC 120V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>23.7°C/51%RH</b>
<b>Test Mode:</b>	<b>Mode 1</b>	<b>Distance:</b>	<b>3m</b>

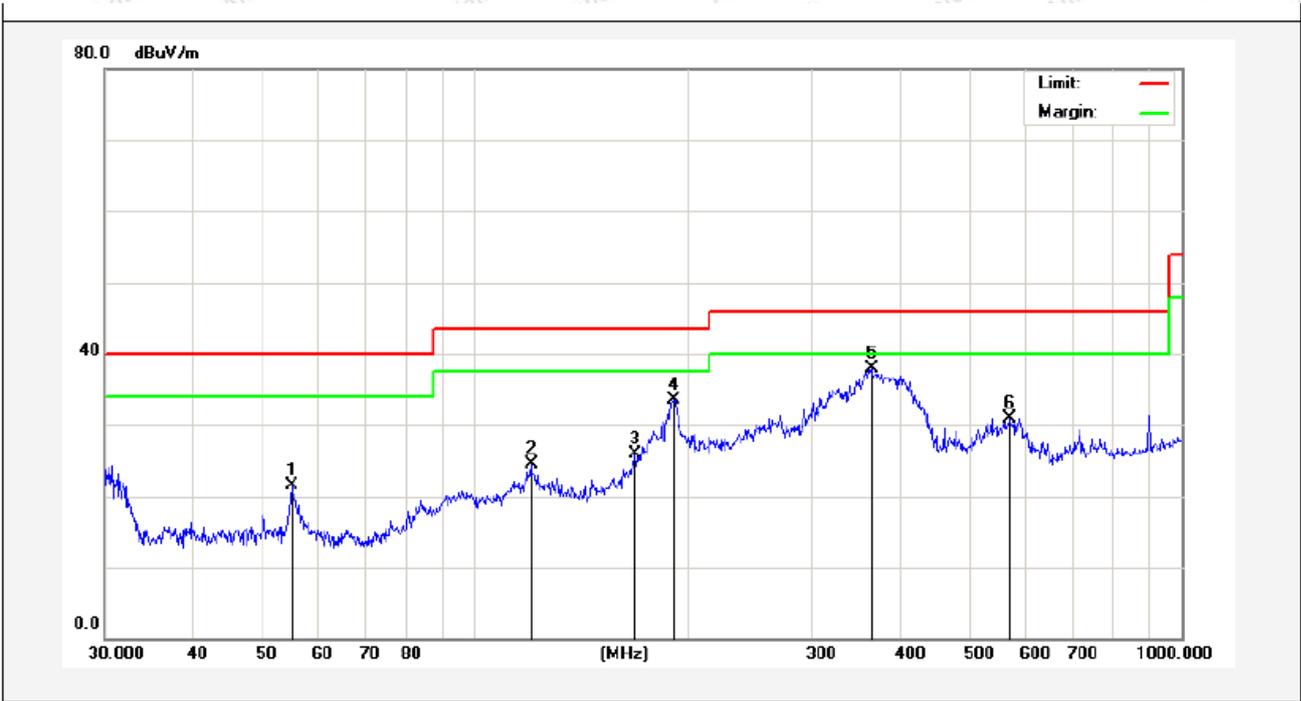


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	55.2207	39.59	-18.05	21.54	40.00	-18.46	QP	300	0	
2	120.2766	47.90	-23.41	24.49	43.50	-19.01	QP	300	360	
3	169.0054	47.53	-21.64	25.89	43.50	-17.61	QP	300	0	
4	191.7450	55.17	-21.62	33.55	43.50	-9.95	QP	300	360	
5	364.2595	52.65	-14.70	37.95	46.00	-8.05	QP	300	0	
6	570.6100	43.18	-12.19	30.99	46.00	-15.01	QP	300	360	

**Job No.:** SZAWW190425006-01      **Polarization:** Vertical  
**Standard:** FCC PART15 C\_3m      **Power Source:** AC 120V, 60Hz for adapter  
**Test item:** Radiation Test      **Temp.(C)/Hum.(%RH):** 23.7°C/51%RH  
**Test Mode:** Mode 1      **Distance:** 3m

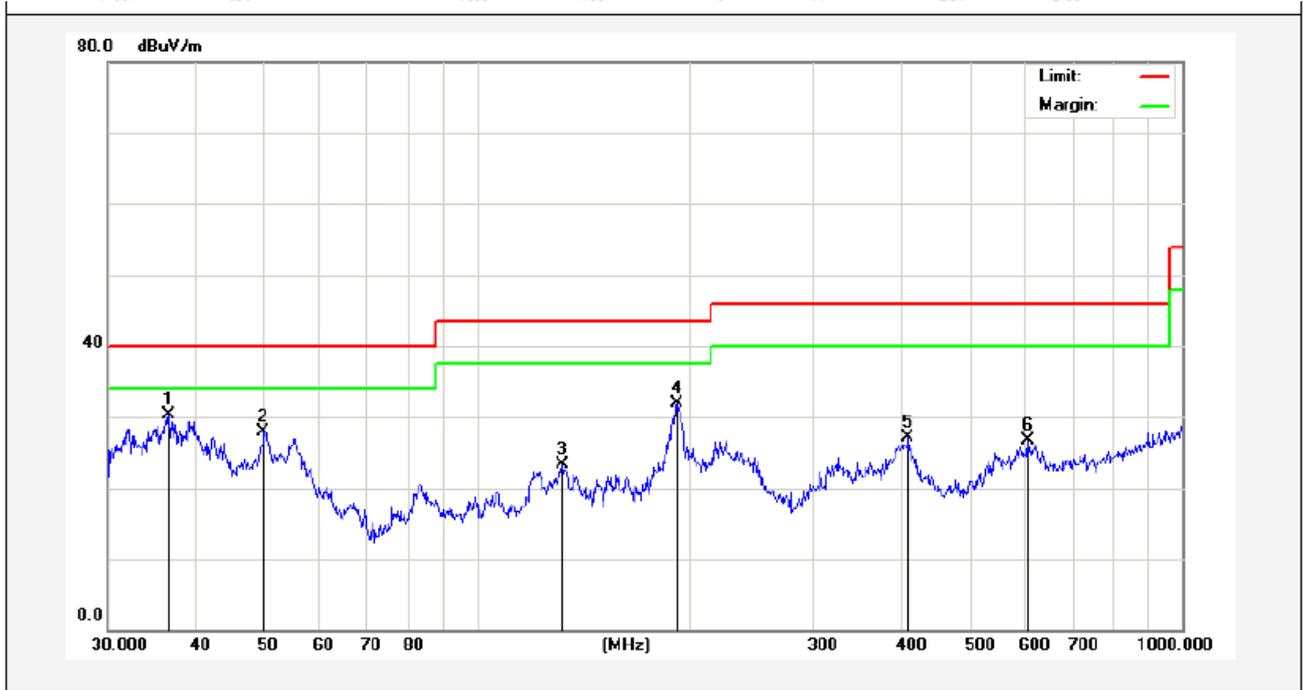


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.6375	47.71	-17.46	30.25	40.00	-9.75	QP	300	0	
2	49.8813	44.74	-16.76	27.98	40.00	-12.02	QP	300	360	
3	132.2205	42.32	-18.99	23.33	43.50	-20.17	QP	300	0	
4	192.4185	48.65	-16.79	31.86	43.50	-11.64	QP	300	360	
5	408.9460	40.08	-12.88	27.20	46.00	-18.80	QP	300	0	
6	603.5392	36.80	-10.08	26.72	46.00	-19.28	QP	300	360	

<b>Job No.:</b>	<b>SZAWW190425006-01</b>	<b>Polarization:</b>	<b>Horizontal</b>
<b>Standard:</b>	<b>FCC PART15 C_3m</b>	<b>Power Source:</b>	<b>AC 240V, 60Hz for adapter</b>
<b>Test item:</b>	<b>Radiation Test</b>	<b>Temp.(C)/Hum.(%RH):</b>	<b>23.7°C/51%RH</b>
<b>Test Mode:</b>	<b>Mode 1</b>	<b>Distance:</b>	<b>3m</b>

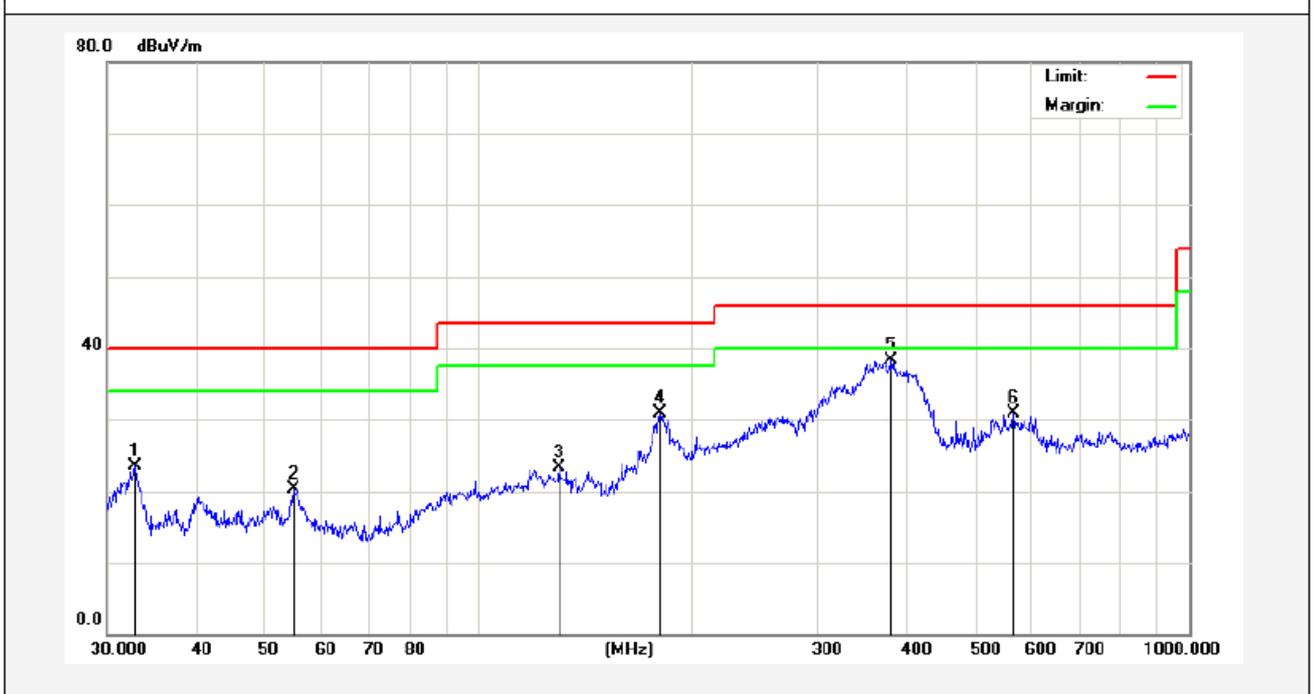

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.8637	42.47	-18.92	23.55	40.00	-16.45	QP	300	0	
2	54.8348	38.34	-18.02	20.32	40.00	-19.68	QP	300	360	
3	129.9226	47.15	-23.76	23.39	43.50	-20.11	QP	300	0	
4	180.0165	52.66	-21.76	30.90	43.50	-12.60	QP	300	360	
5	381.2487	52.70	-14.44	38.26	46.00	-7.74	QP	300	0	
6	566.6223	43.19	-12.20	30.99	46.00	-15.01	QP	300	360	

**Job No.:** SZAWW190425006-01      **Polarization:** Vertical  
**Standard:** FCC PART15 C\_3m      **Power Source:** AC 240V, 60Hz for adapter  
**Test item:** Radiation Test      **Temp.(C)/Hum.(%RH):** 23.7°C/51%RH  
**Test Mode:** Mode 1      **Distance:** 3m

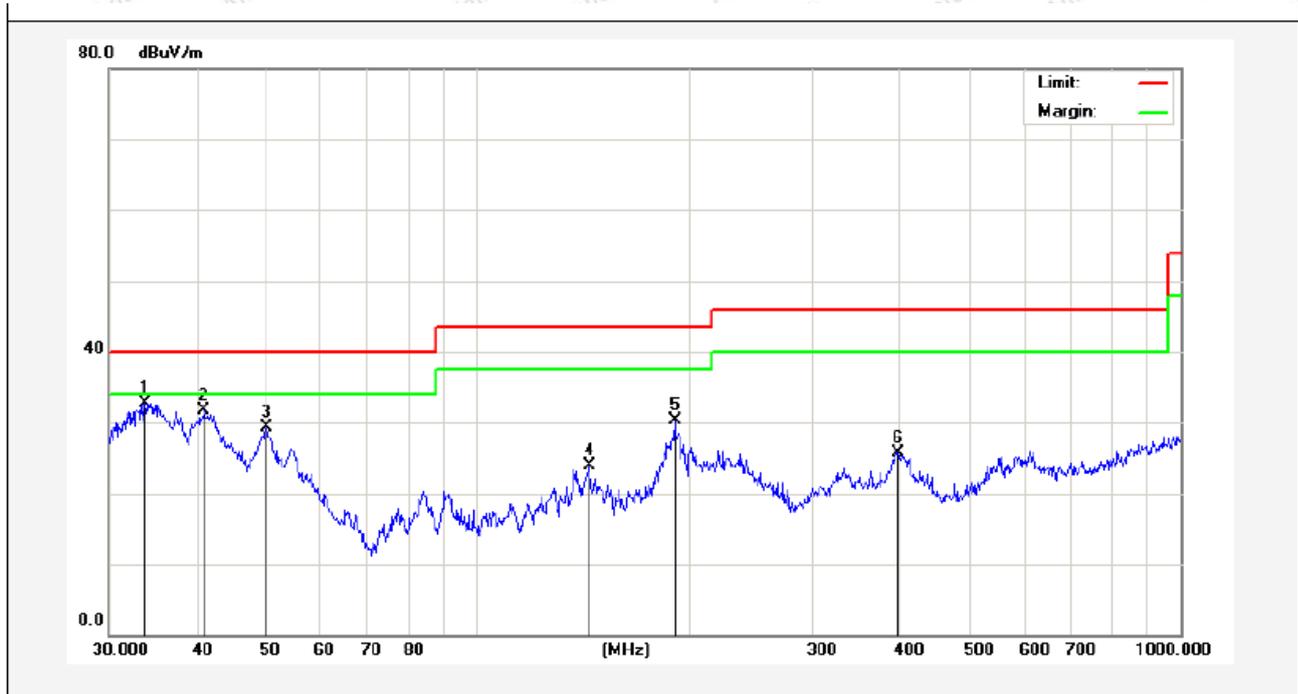

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.7986	50.70	-17.90	32.80	40.00	-7.20	QP	300	0	
2	40.9881	48.30	-16.57	31.73	40.00	-8.27	QP	300	360	
3	50.2324	46.07	-16.78	29.29	40.00	-10.71	QP	300	0	
4	144.3348	43.41	-19.43	23.98	43.50	-19.52	QP	300	360	
5	191.0738	47.06	-16.80	30.26	43.50	-13.24	QP	300	0	
6	396.2414	38.95	-13.20	25.75	46.00	-20.25	QP	300	360	


## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

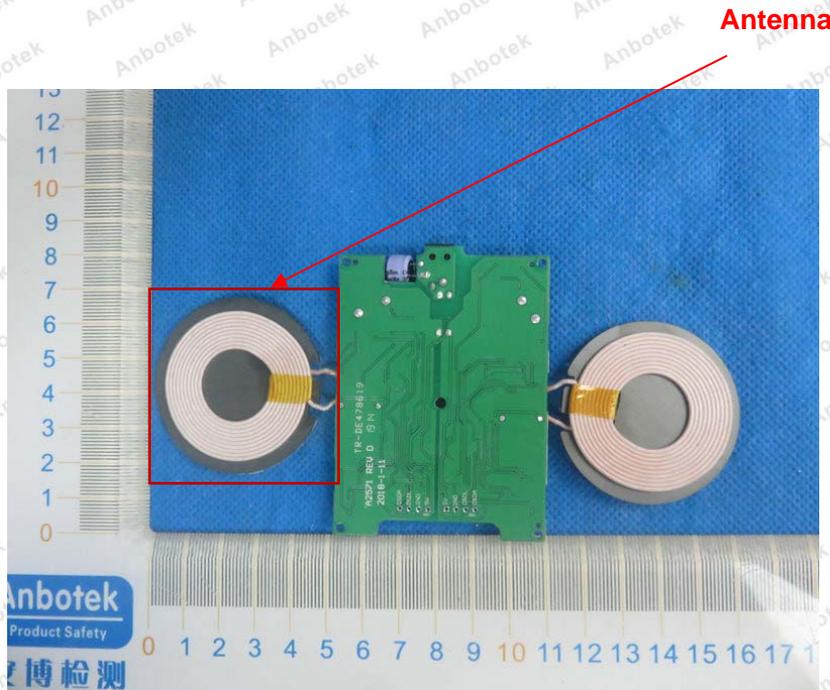

----- End of Report -----