



TEST REPORT

FCC PART 15 SUBPART C

Test report
On Behalf of
Anker Innovations Limited
For
Soundcore Wakey

Model No.: A3300

FCC ID: 2AOKB-A3300

Prepared for : Anker Innovations Limited
Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon,
Hongkong

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping
Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong,
China

Date of Test: Dec, 29, 2018 to Jan. 05, 2019

Date of Report: Jan. 05, 2019

Report Number: HK1901140087EF



TEST RESULT CERTIFICATION

Applicant's name: Anker Innovations Limited
Address.....: Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Manufacture's Name.....: Anker Innovations Limited
Address.....: Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Factory's Name: Shenzhen Fenda Technology Co., Ltd.
Address.....: Fenda Hi-Tech Park, Zhoushi Road, Shiyan Town, Baoan District, SHENZHEN, Guangdong, China

Product description
Trade Mark: Soundcore
Product name: Soundcore Wakey
Model and/or type reference .: A3300
FCC Rules and Regulations Part 15 Subpart C Section 15.207,
Standards.....: 15.209, 15.203
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:
Date (s) of performance of tests.....: Dec. 29, 2018 to Jan. 05, 2019
Date of Issue.....: Jan. 05, 2019
Test Result.....: **Pass**

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 MEASUREMENT INSTRUMENTS LIST	7
3. RADIATED EMISSION	8
3.1TEST LIMIT	8
3.2. MEASUREMENT PROCEDURE	9
3.3. TEST SETUP	10
3.4. TEST RESULT	11
4. BANDWIDTH	14
4.1. MEASUREMENT PROCEDURE	14
4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.3. MEASUREMENT RESULTS	15
5. LINE CONDUCTED EMISSION TEST	16
5.1. LIMITS OF LINE CONDUCTED EMISSION TEST	16
5.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	16
5.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	17
5.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	17
5.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	18
6. PHOTOGRAPH OF TEST	20



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

RULES	DESCRIPTION OF TEST	RESULT
FCC §15.203	Antenna Requirement	Compliant
FCC §15.209	Radiated Emission	Compliant
FCC §15.215	Bandwidth	Compliant
FCC §15.207	Conducted Emission	Compliant

1.2 TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address : 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road,
Heping Community, Fuhai Street, Bao'an District, Shenzhen,
Guangdong, China

IC Registration No.: 21210

FCC Registration No.: CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Operation Frequency	110-205kHz
Test Frequency for the worst case	118.7kHz
Maximum field strength	52.96dBuV/m(Peak)@3m
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Hardware Version	A3300-01-A0D-T3
Software Version	V1.0
Power Supply	DC 15V by adapter
Max. power of the primary coil	10W




2.2 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Wireless charging Mode(Full load)
2	Wireless charging Mode(half load)
3	Wireless charging Mode(Null load)
Note: 1. The mode 1 was the worst case and only the data of the worst case record in this report.	

2.3 DESCRIPTION OF TEST SETUP

Configure :

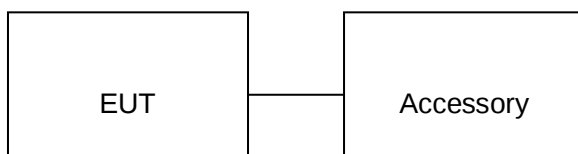

Item	Equipment	Model No.	ID or Specification	Remark
1	Adapter	DST451-150300W-K	DC 15V3A	Accessory
2	USB Load	N/A	2.5Ω*2	Support
3	Wireless Load	N/A	10W	Support

**2.4 MEASUREMENT INSTRUMENTS LIST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 27, 2018	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
3.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	1 Year
4.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 27, 2018	1 Year
5.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 27, 2018	1 Year
6.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 27, 2018	1 Year
7.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 27, 2018	1 Year
8.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 27, 2018	N/A
9.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 27, 2018	3 Year



3. RADIATED EMISSION

3.1 TEST LIMIT

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$	---
0.490 ~ 1.705	30	$24000/F(\text{kHz})$	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



3.2. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




3.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

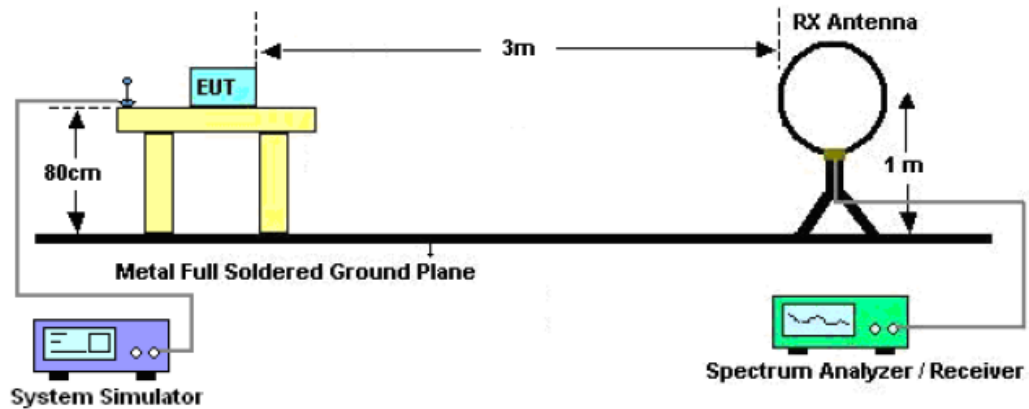

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

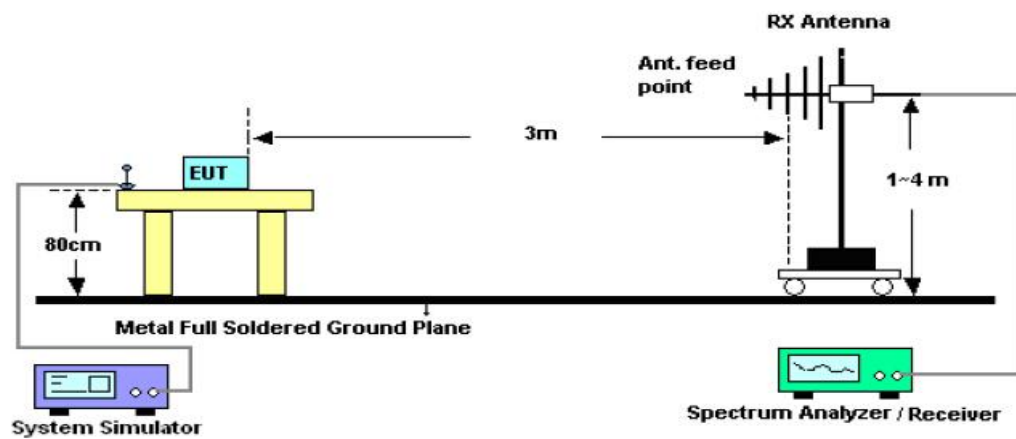

**3.4. TEST RESULT****RADIATED EMISSION BELOW 30MHZ**

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) Peak	Limit dB(uV/m) Average	Margin dB	Pass/Fail
0.1187	Face	42.56	10.4	52.96	106.12	53.16	Pass
0.1187	Side	35.69	10.4	46.09	106.12	60.03	Pass

Note: No other emissions found between lowest internal used/generated frequencies to 30MHz. The peak level of the emission is less than the average limit, so the average level shall be less than the limit without test.

**RADIATED EMISSION 30MHz- 1GHZ**

EUT :	Soundcore Wakey	Model Name. :	A3300
Temperature :	20 °C	Relative Humidity:	48%
Pressure :	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization :	Horizontal

66.9 dBuV/m




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		39.7000	11.20	21.51	32.71	40.00	-7.29	peak			
2		99.5167	16.06	19.71	35.77	43.50	-7.73	peak			
3		156.0999	17.01	20.30	37.31	43.50	-6.19	peak			
4		207.8333	18.80	17.86	36.66	43.50	-6.84	peak			
5		259.5667	16.89	19.76	36.65	46.00	-9.35	peak			
6	*	333.9332	21.35	22.38	43.73	46.00	-2.27	peak			

RESULT: PASS



EUT :	Soundcore Wakey	Model Name. :	A3300
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	Normal
Test Mode :	Mode 1	Polarization :	Vertical

66.9 dBuV/m

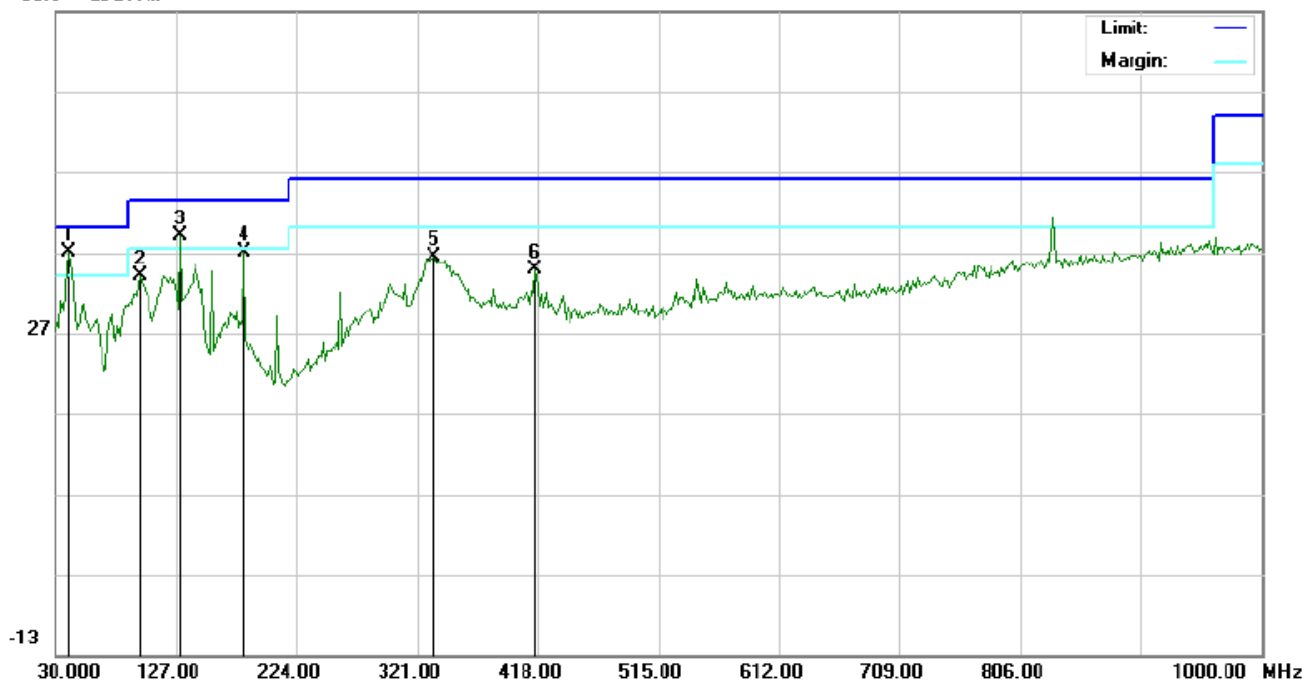

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	15.45	21.60	37.05	40.00	-2.95	peak			
2		97.9000	14.90	19.05	33.95	43.50	-9.55	peak			
3	!	130.2332	20.42	18.64	39.06	43.50	-4.44	peak			
4		181.9667	18.88	18.22	37.10	43.50	-6.40	peak			
5		333.9333	13.97	22.38	36.35	46.00	-9.65	peak			
6		416.3833	9.54	25.22	34.76	46.00	-11.24	peak			

RESULT: PASS**Note:**

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 which operate with maximum output power was the worst case and only the data of the worst case record in this report.




4. BANDWIDTH

4.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Set the EUT Work on operation frequency.
3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a channel
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.


4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

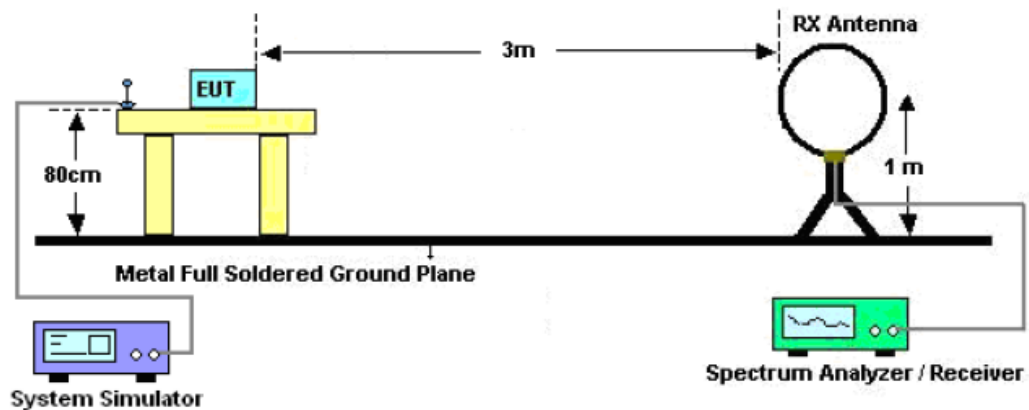

**4.3. MEASUREMENT RESULTS**

TEST ITEM	BANDWIDTH
TEST MODULATION	FSK

Frequency (KHz)	Test Data (Hz) -20dB Bandwidth	Criteria
118.7	817	PASS

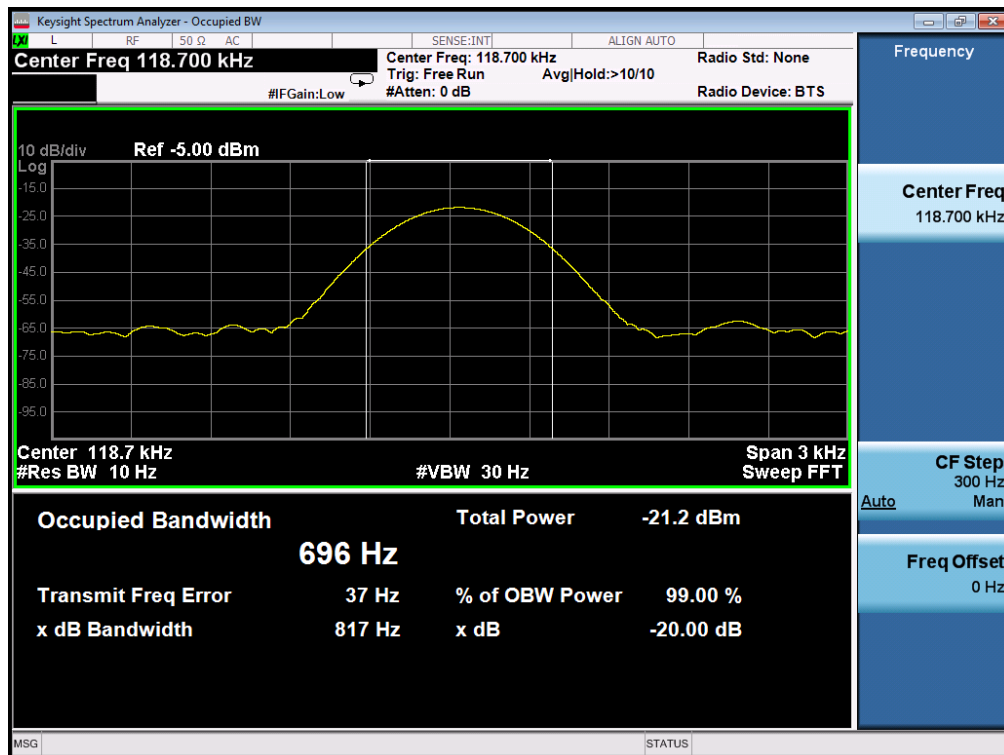TEST PLOT OF BANDWIDTH



5. LINE CONDUCTED EMISSION TEST


5.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

5.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

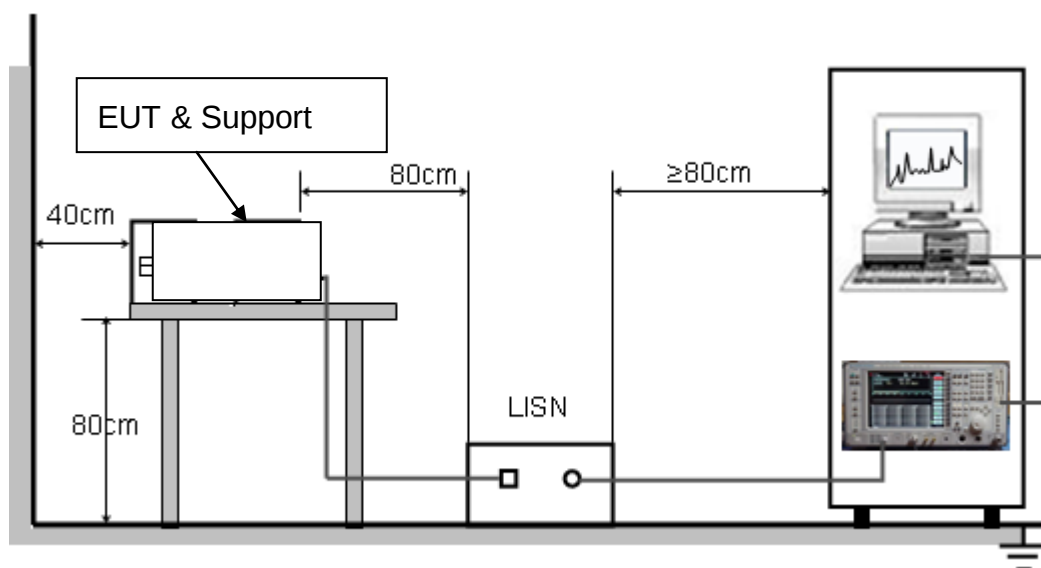




5.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

5.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

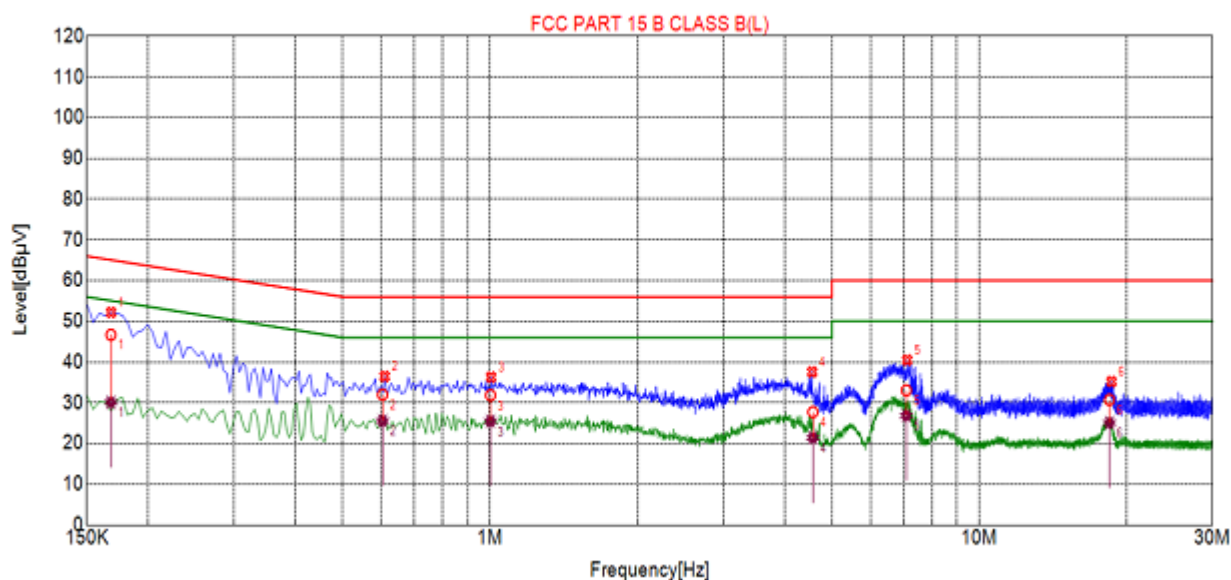**5.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST****LINE CONDUCTED EMISSION TEST-L****Suspected List**

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.1680	52.18	10.01	65.06	12.88	PK
2	0.6090	36.49	10.05	56.00	19.51	PK
3	1.0050	36.28	10.06	56.00	19.72	PK
4	4.5555	37.58	10.25	56.00	18.42	PK
5	7.1250	40.49	10.19	60.00	19.51	PK
6	18.6450	35.19	10.05	60.00	24.81	PK


Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1678	10.01	46.69	65.07	18.38	30.12	55.07	24.95
2	0.6029	10.05	32.00	56.00	24.00	25.57	46.00	20.43
3	1.0021	10.06	31.86	56.00	24.14	25.50	46.00	20.50
4	4.5709	10.25	27.74	56.00	28.26	21.43	46.00	24.57
5	7.0965	10.19	33.06	60.00	26.94	26.87	50.00	23.13
6	18.4669	10.05	30.73	60.00	29.27	25.10	50.00	24.90

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

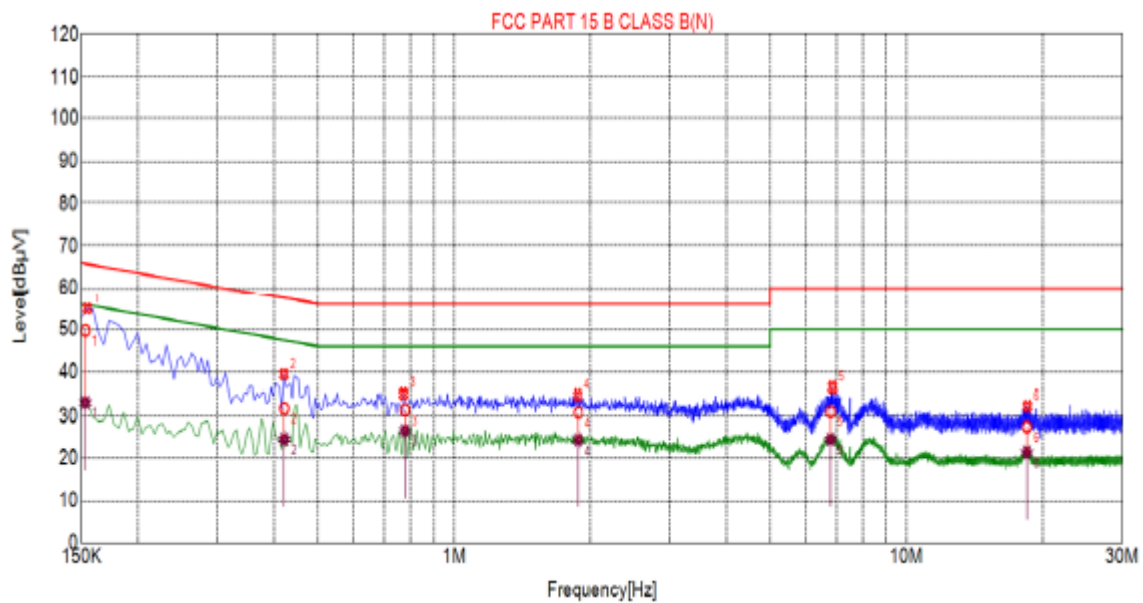

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Detector
1	0.1545	54.93	10.03	65.75	10.82	PK
2	0.4200	39.43	10.04	57.45	18.02	PK
3	0.7710	35.07	10.05	56.00	20.93	PK
4	1.8735	34.78	10.14	56.00	21.22	PK
5	6.8685	36.60	10.20	60.00	23.40	PK
6	18.4965	32.33	10.05	60.00	27.67	PK

Final Data List



NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.1530	10.03	49.67	65.84	16.17	33.21	55.84	22.63
2	0.4206	10.04	31.89	57.44	25.55	24.57	47.44	22.87
3	0.7769	10.05	31.52	56.00	24.48	26.57	46.00	19.43
4	1.8792	10.14	30.88	56.00	25.12	24.37	46.00	21.63
5	6.8011	10.21	31.07	60.00	28.93	24.51	50.00	25.49
6	18.4499	10.05	27.47	60.00	32.53	21.46	50.00	28.54

RESULT: PASS

Note: The mode 1 which operate with maximum output power was the worst case and only the data of the worst case record in this report.

6. PHOTOGRAPH OF TEST

Radiated Emission

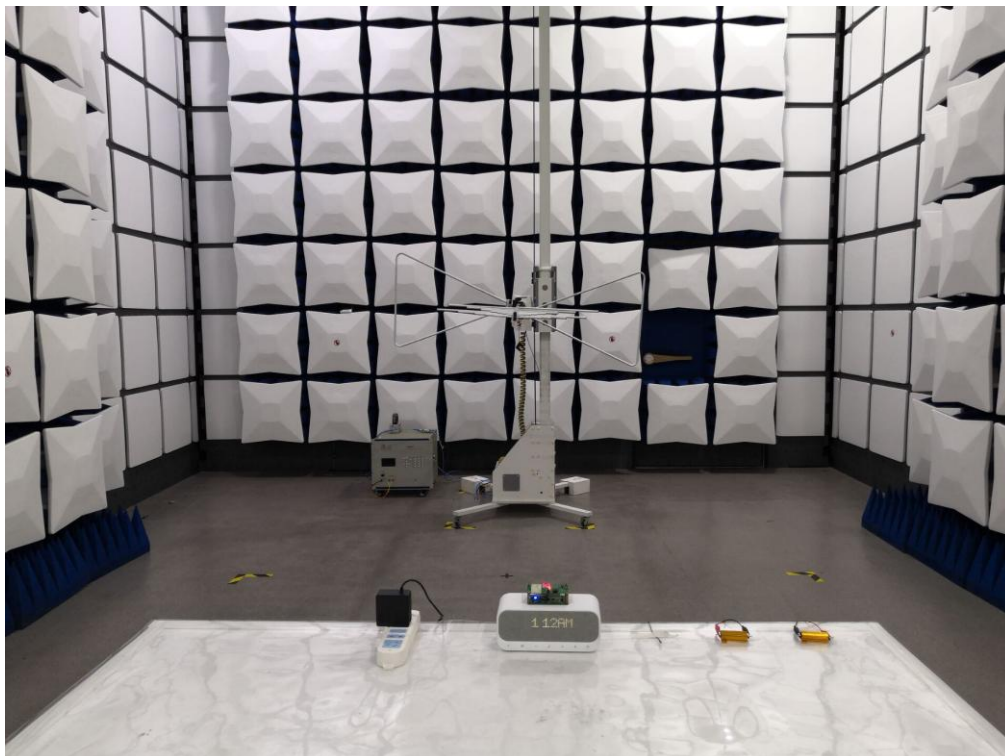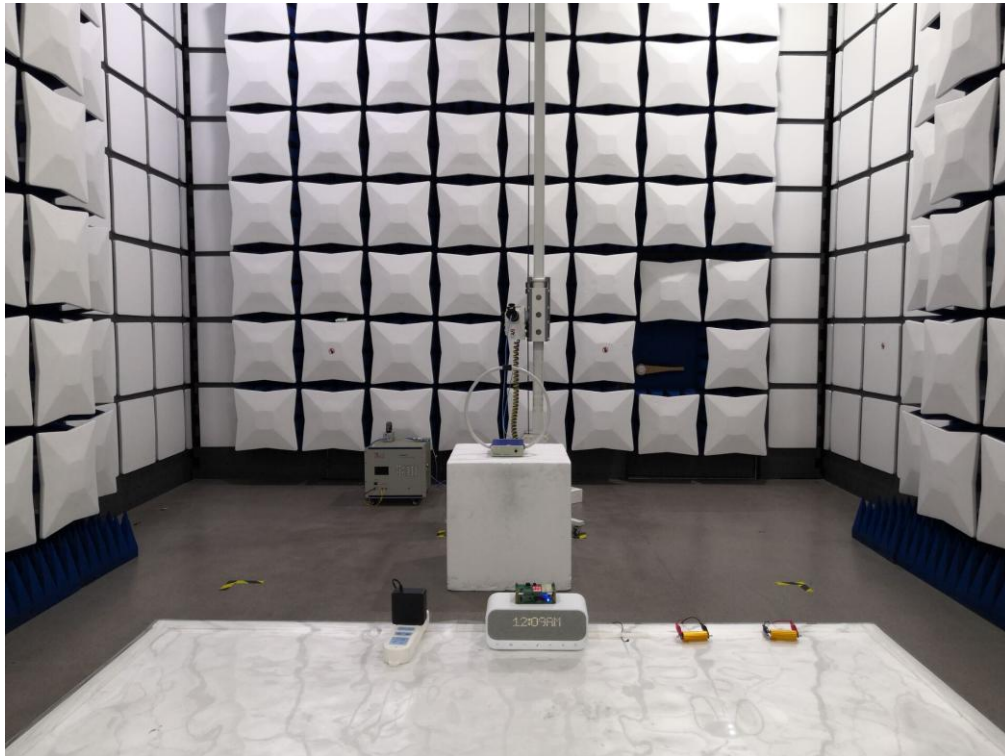



Conducted Emission



----END OF REPORT----