



TEST REPORT

APPLICANT : Anker Innovations Limited
PRODUCT NAME : eufy Security SpaceView
MODEL NAME : T8300-C
BRAND NAME : eufy Security
FCC ID : 2AOKB-T8300C
STANDARD(S) : 47 CFR Part 15 Subpart C
TEST DATE : 2018-07-30 to 2018-08-13
ISSUE DATE : 2018-08-13

Tested by: Tu Ya'nan
Tu Ya'nan (Test Engineer)
Approved by: Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 4
 - 1.1. Applicant and Manufacturer Information 4
 - 1.2. Equipment Under Test (EUT) Description 4
 - 1.3. The channel number and frequency of EUT 5
 - 1.4. Test Standards and Results 6
 - 1.5. Environmental Conditions 6
- 2. 47 CFR Part 15C Requirements 7
 - 2.1. Antenna requirement 7
 - 2.2. Number of Hopping Frequency 7
 - 2.3. Peak Output Power 9
 - 2.4. 20dB Bandwidth 10
 - 2.5. Carried Frequency Separation 13
 - 2.6. Time of Occupancy (Dwell time) 15
 - 2.7. Conducted Spurious Emissions 18
 - 2.8. Conducted Emission 23
 - 2.9. Restricted Frequency Bands 27
 - 2.10. Radiated Emission 32
- Annex A Test Uncertainty 40
- Annex B Testing Laboratory Information 41



Change History		
Issue	Date	Reason for change
1.0	2018-08-13	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Anker Innovations Limited
Applicant Address:	Room 1318-19,Hollywood Plaza,610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer:	Anker Innovations Limited
Manufacturer Address:	Room 1318-19,Hollywood Plaza,610 Nathan Road, Mongkok, Kowloon, Hong Kong

1.2. Equipment Under Test (EUT) Description

Product Name:	eufy Security SpaceView
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	V1.0
Software Version:	V1.0
Modulation Type:	FHSS (GFSK)
Operating Frequency Range:	2410MHz – 2477MHz
Channel Number:	23
Antenna Type:	FPCB Antenna
Antenna Gain:	0 dBi

Note 1: The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2410MHz), 11 (2441MHz) and 23 (2477MHz)..

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. The channel number and frequency of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410	11	2441	21	2471
2	2414	12	2444	22	2474
3	2417	13	2447	23	2477
4	2420	14	2450		
5	2423	15	2453		
6	2426	13	2456		
7	2429	17	2459		
8	2432	18	2462		
9	2435	19	2465		
10	2438	20	2468		



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Jul 30, 2018	Tu Ya'nan	PASS
3	15.247(b)	Peak Output Power	Jul 30, 2018	Tu Ya'nan	PASS
4	15.247(a)	20dB Bandwidth	Jul 30, 2018	Tu Ya'nan	PASS
5	15.247(a)	Carrier Frequency Separation	Jul 30, 2018	Tu Ya'nan	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Jul 30, 2018	Tu Ya'nan	PASS
7	15.247(d)	Conducted Spurious Emission	Jul 30, 2018	Tu Ya'nan	PASS
8	15.207	Conducted Emission	Aug 02, 2018	Zheng Fengjian	PASS
9	15.247(d)	Restricted Frequency Bands	Aug 01&13, 2018	Zheng Fengjian	PASS
10	15.209, 15.247(d)	Radiated Emission	Aug 08, 2018	Zheng Fengjian	PASS

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

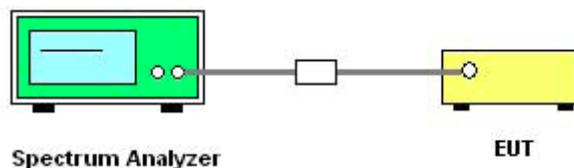

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please reference ANNEX A(1.5).



2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize

2.2.4. Test Result

A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	23	15	PASS

B. Test Plots:

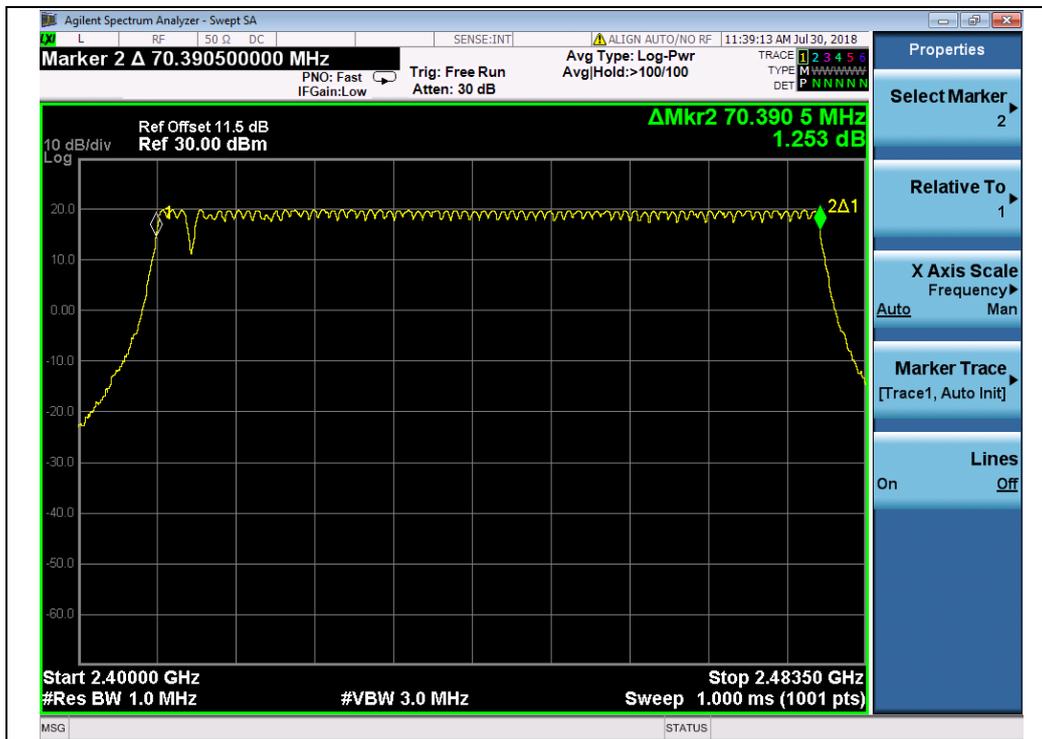

(GFSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

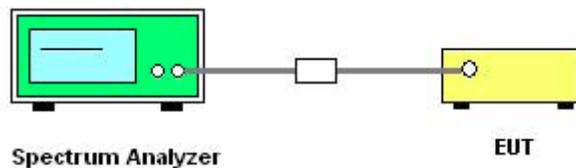

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX A(1.5).

2.3.3. Test Result

GFSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2410	19.52	0.090	20.97	0.125	PASS
11	2441	19.50	0.089			PASS
23	2477	19.29	0.085			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2410	16.80	0.048	20.97	0.125	PASS
11	2441	16.83	0.048			PASS
23	2477	16.60	0.046			PASS


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

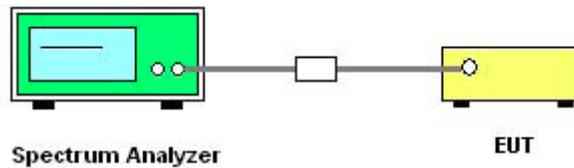

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX A(1.5).

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold




2.4.4. Test Result

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
1	2410	5.003	PASS
11	2441	5.020	PASS
23	2477	5.021	PASS


B. Test Plots:

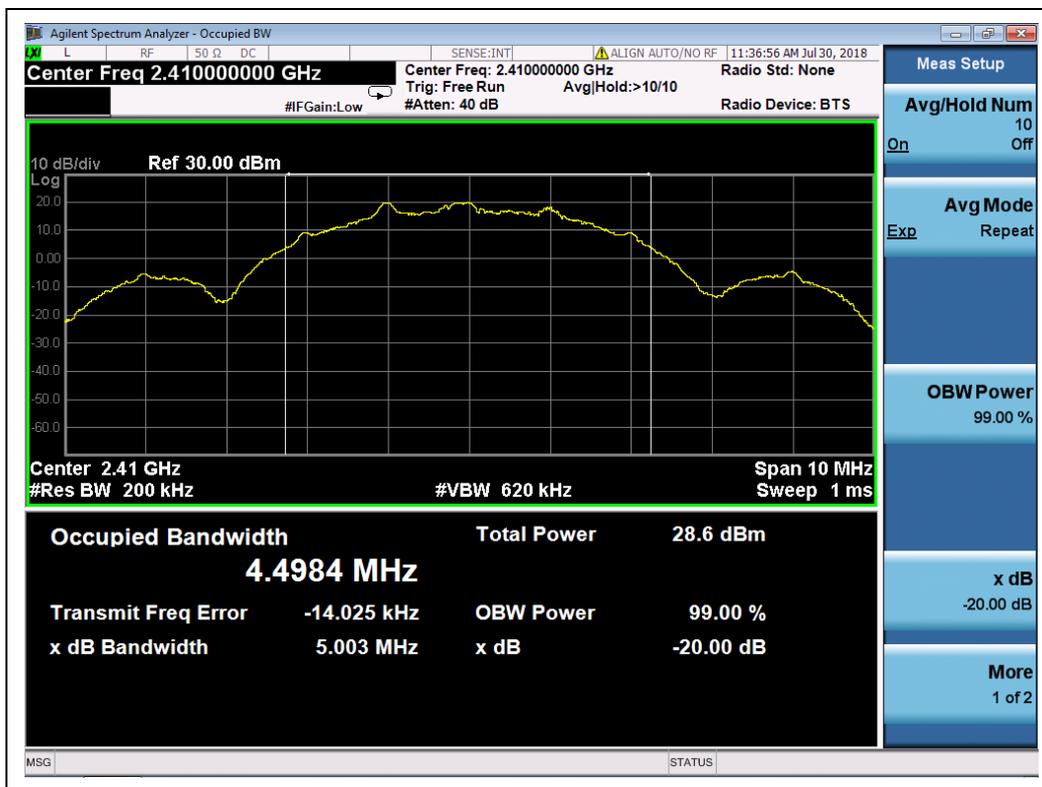

(GFSK, Channel 1, 2410MHz)

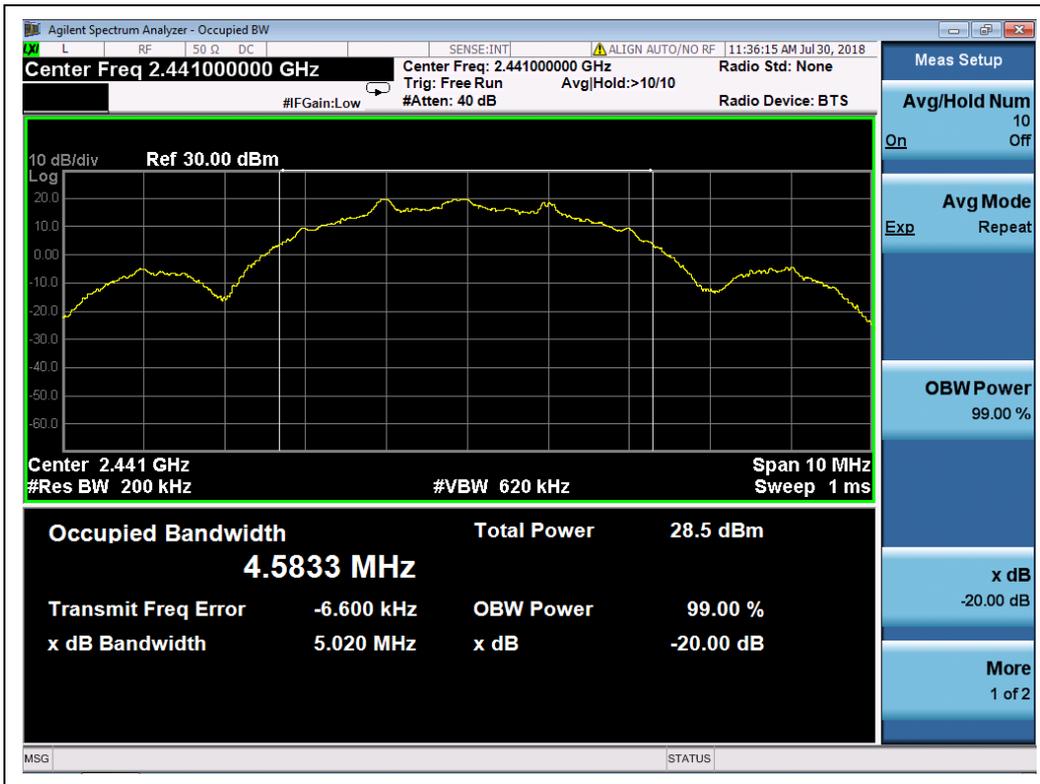

(GFSK, Channel 11, 2441MHz)

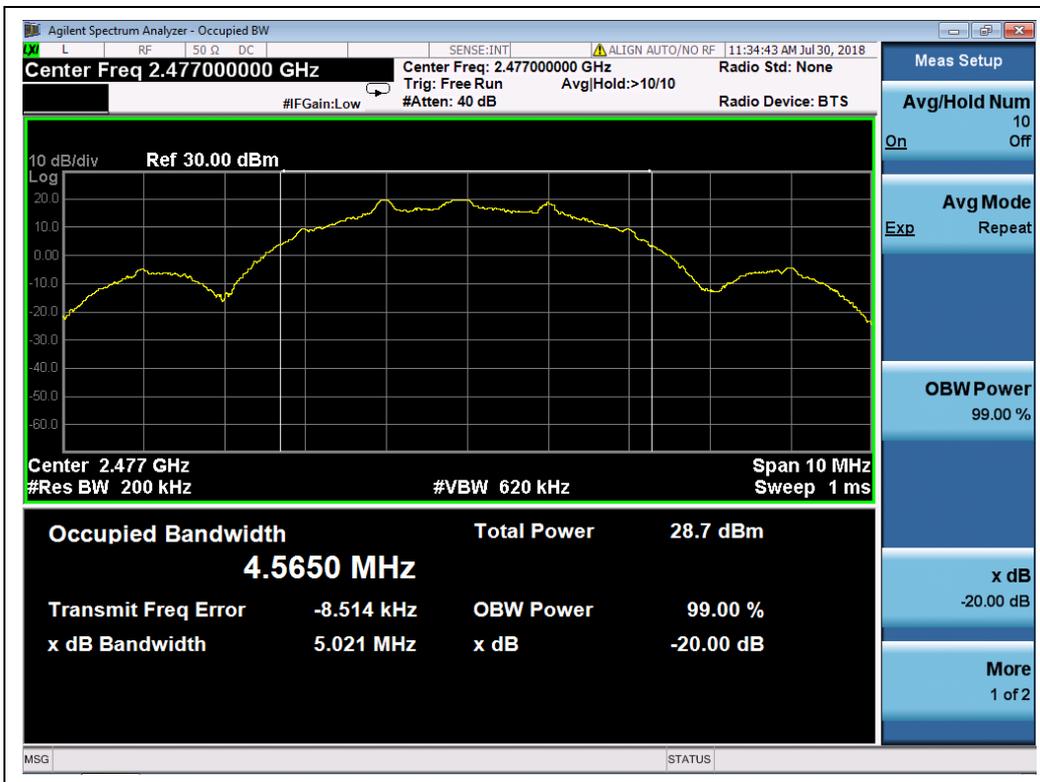

(GFSK, Channel 23, 2477MHz)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

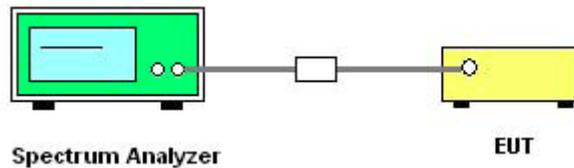

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX A(1.5).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4. Test Result

The EUT operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.

Test Mode	Measured Channel Numbers	Carried Frequency Separation(MHz)	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	11 and 12	3.00	5.003	two-thirds of the 20dB bandwidth	PASS

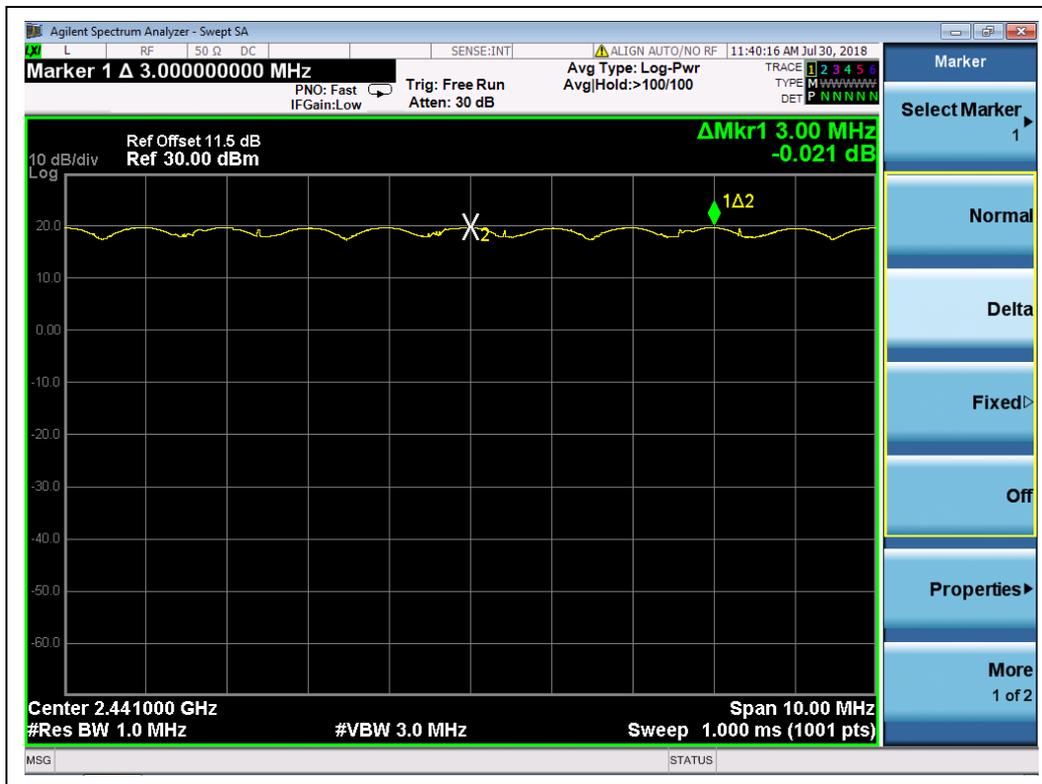

(GFSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

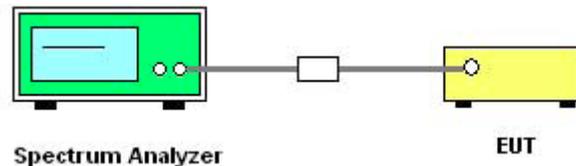

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX A(1.5).

2.6.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 9.2 second scan, to enable resolution of each occurrence. The average time of occupancy in the specified 9.2 second period (23 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 0.92 \text{ s}) * \text{ pulse width}$.




2.6.4. Test Result

2.6.4.1 GFSK Mode

A. Test Verdict:

Pulse Width (seconds)	Number of pulse in 0.92 seconds	Number of pulse in 9.2 seconds	Dwell Time in 9.2 seconds (sec)	Limit (sec)	Verdict
0.00324	9	90	0.2916	0.4	PASS

B. Test Plots:

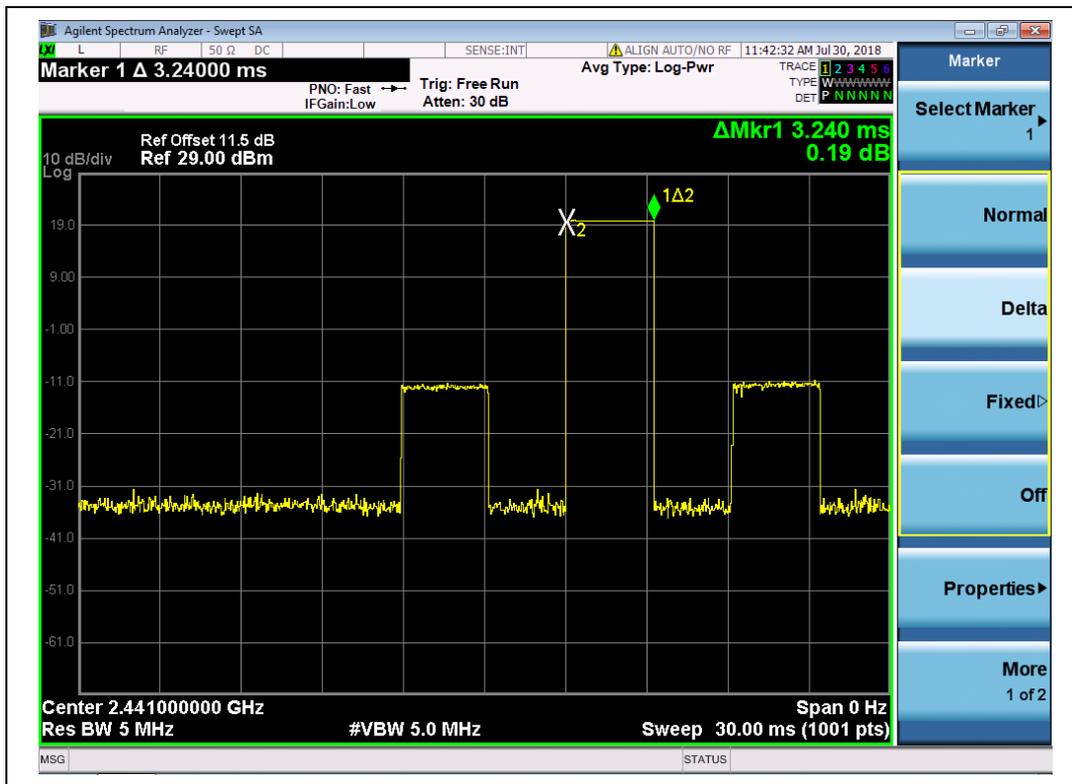


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

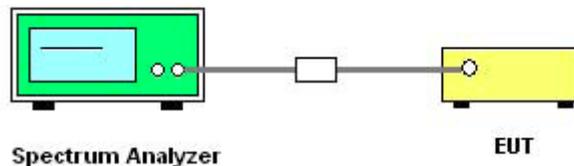

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Please refer ANNEX A(1.5).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4. Test Result

The EUT operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2410	-33.42	19.36	-0.64	PASS
11	2441	-40.47	17.46	-2.54	PASS
23	2477	-37.33	14.25	-5.75	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

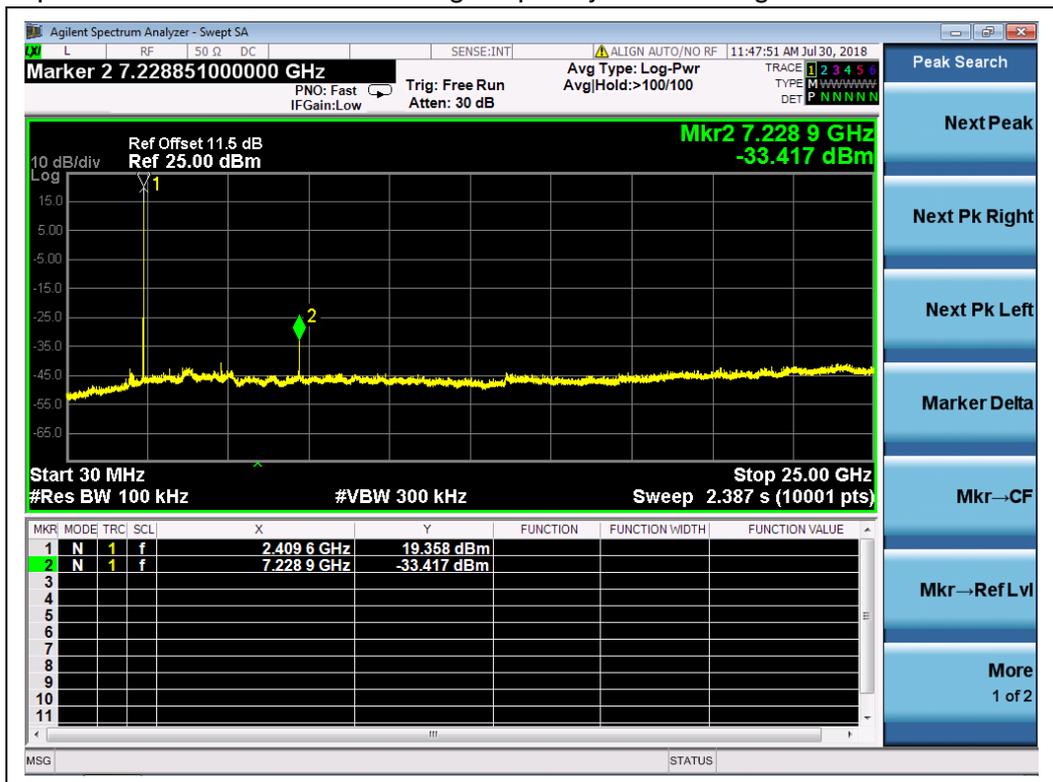


(Channel = 1, 30MHz to 25GHz, GFSK Mode)

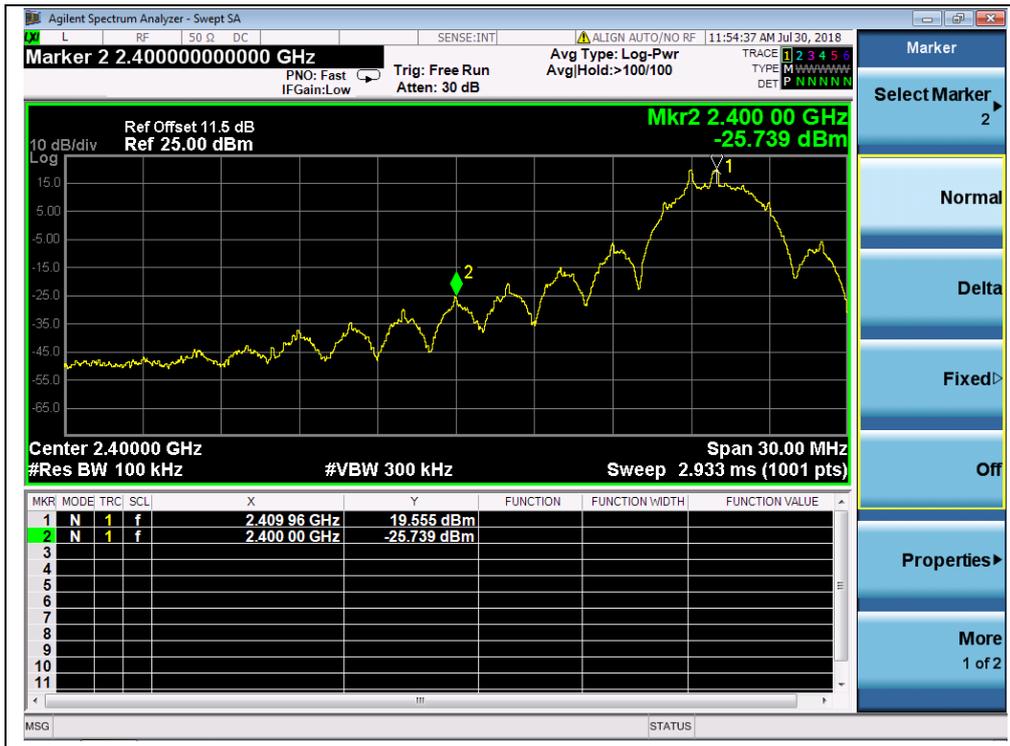


(Channel = 1, Band edge, GFSK Mode)

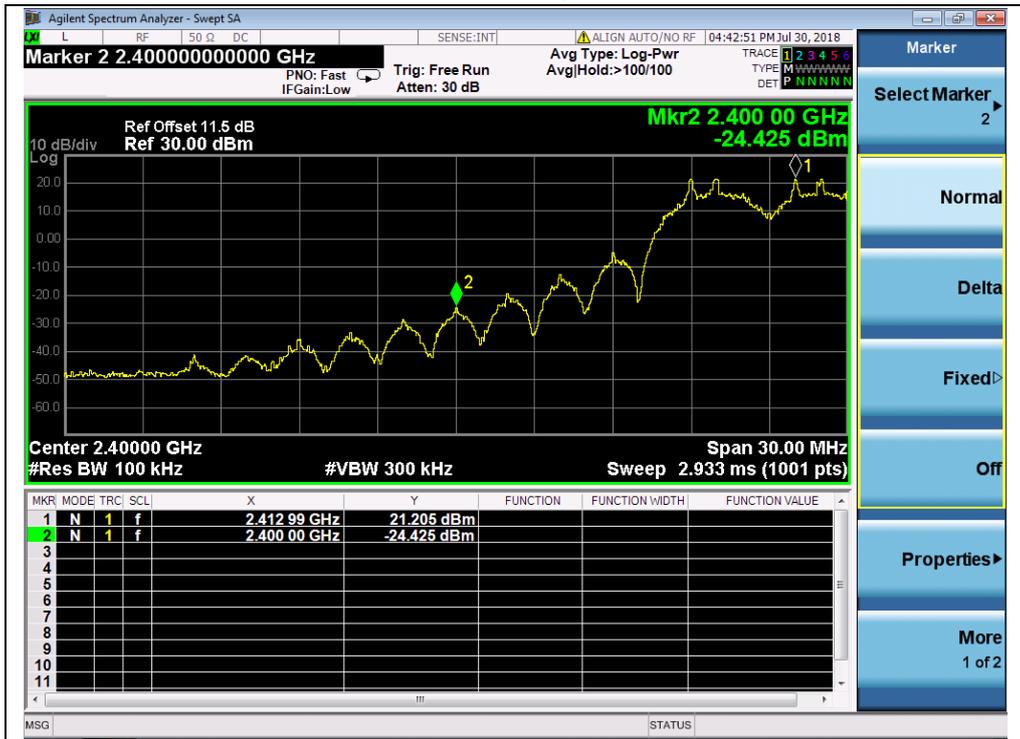


(Channel = 1, Band edge with hopping on, GFSK Mode)

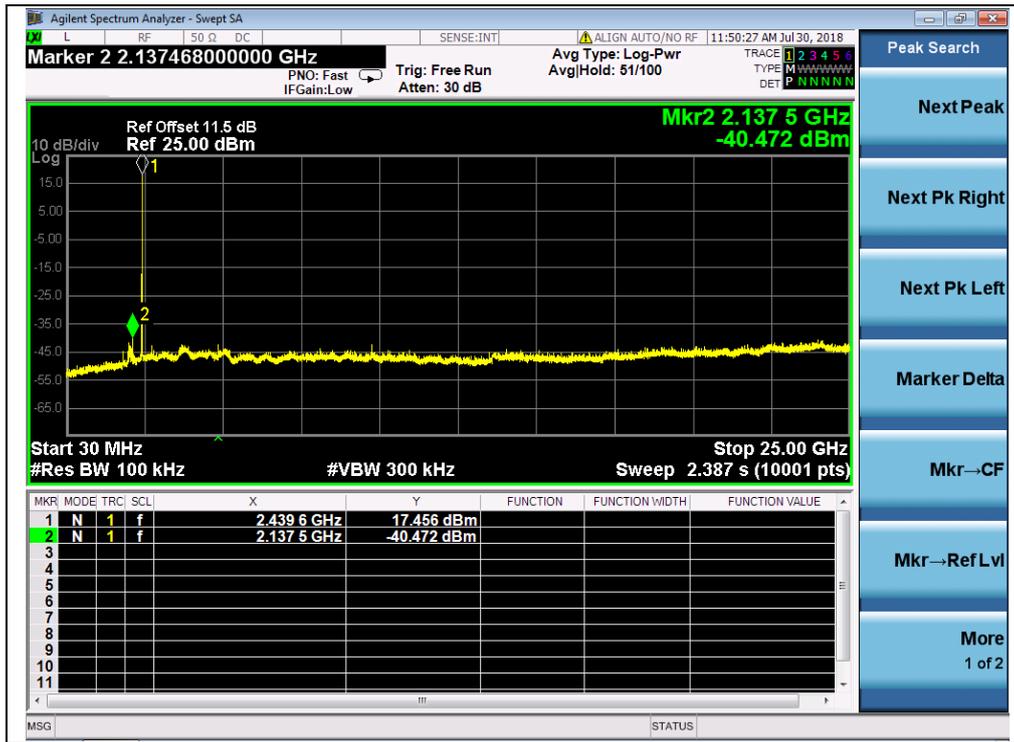

(Channel = 11, 30MHz to 25GHz, GFSK Mode)

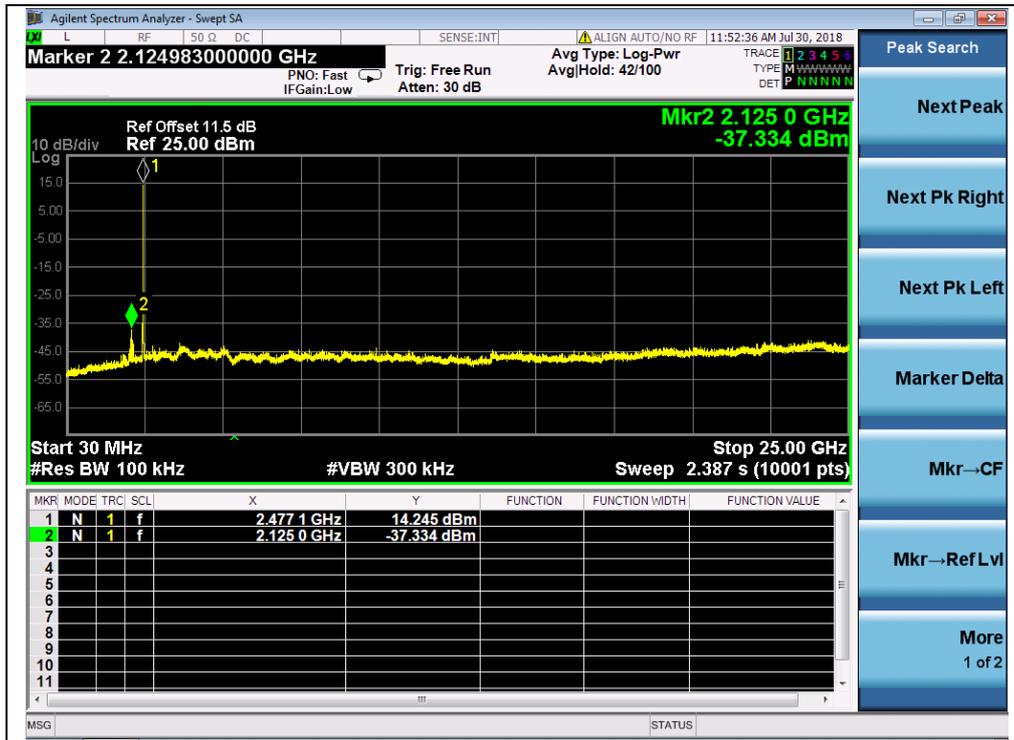

(Channel = 23, 30MHz to 25GHz, GFSK Mode)

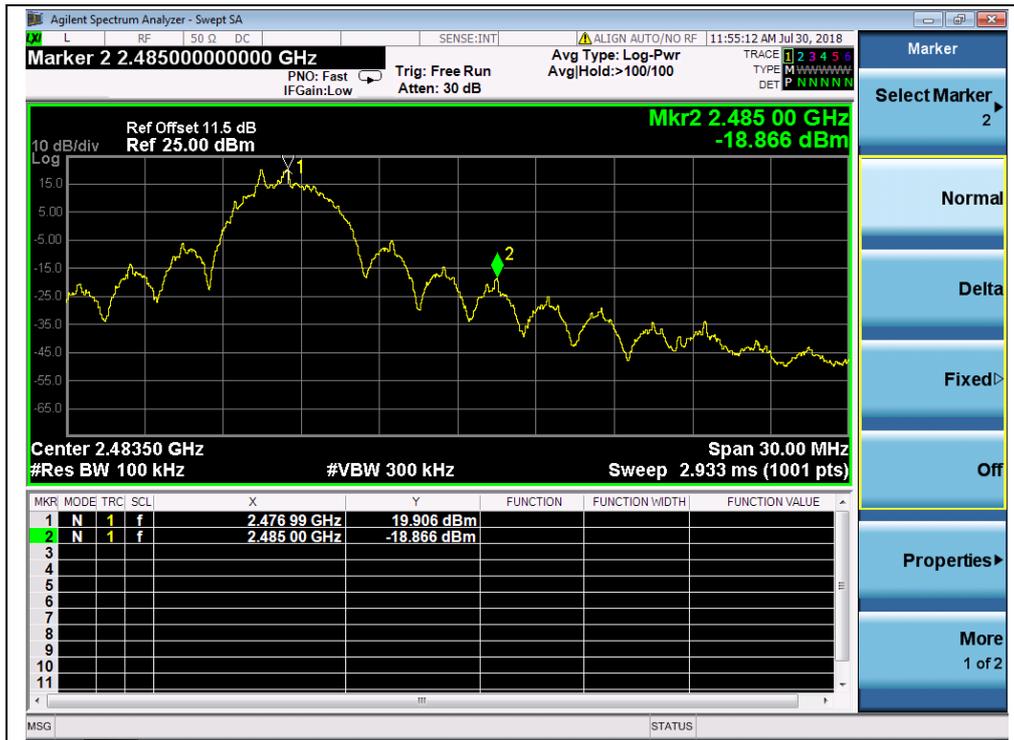

(Channel = 23, Band edge, GFSK Mode)



(Channel = 23, Band edge with hopping on, GFSK Mode)

2.8. Conducted Emission

2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:

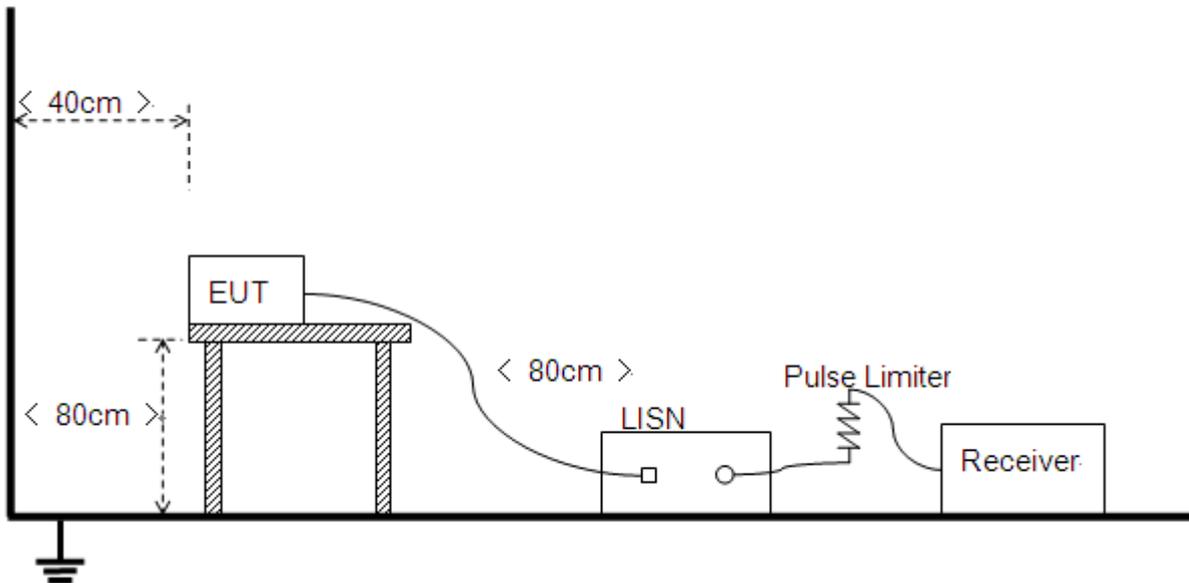

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

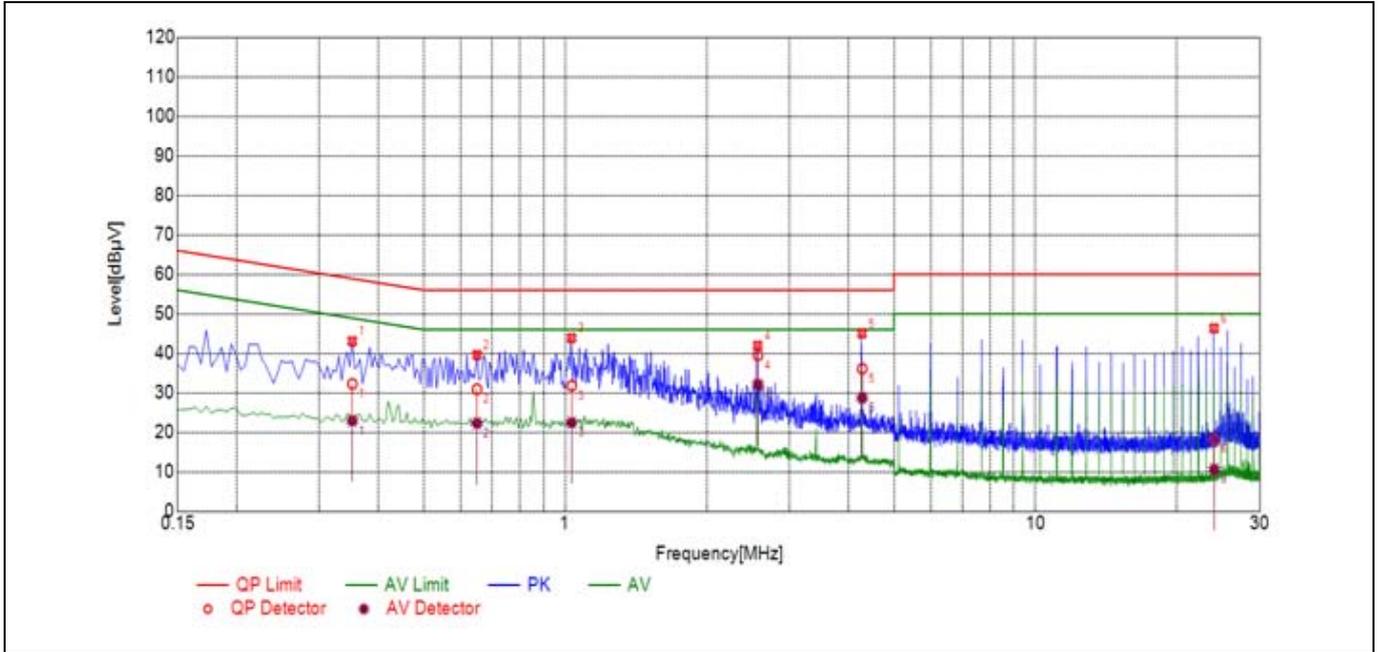

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.3526	32.26	22.91	8.90	48.90	Line	PASS
2	0.6492	30.92	22.30	56.00	46.00		PASS
3	1.0321	31.82	22.46	56.00	46.00		PASS
4	2.5685	39.48	32.14	56.00	46.00		PASS
5	4.2804	36.10	28.70	56.00	46.00		PASS
6	23.9925	18.35	10.65	60.00	50.00		PASS

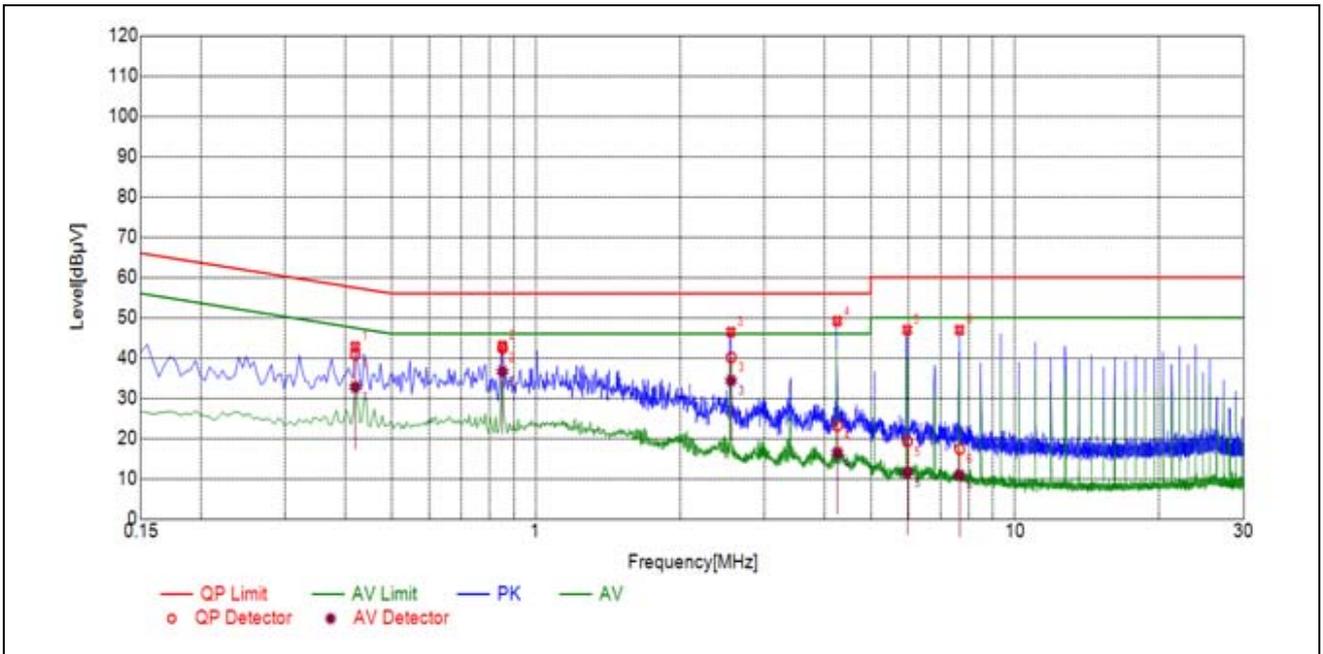

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.4201	40.89	32.79	57.45	47.45	Neutral	PASS
2	0.8521	42.41	36.61	56.00	46.00		PASS
3	2.5555	40.13	34.37	56.00	46.00		PASS
4	4.2579	23.18	16.50	56.00	46.00		PASS
5	5.9601	19.25	11.52	60.00	50.00		PASS
6	7.6637	17.37	10.88	60.00	50.00		PASS


2.9. Restricted Frequency Bands

2.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.9.2. Test Description

A. Test Setup:

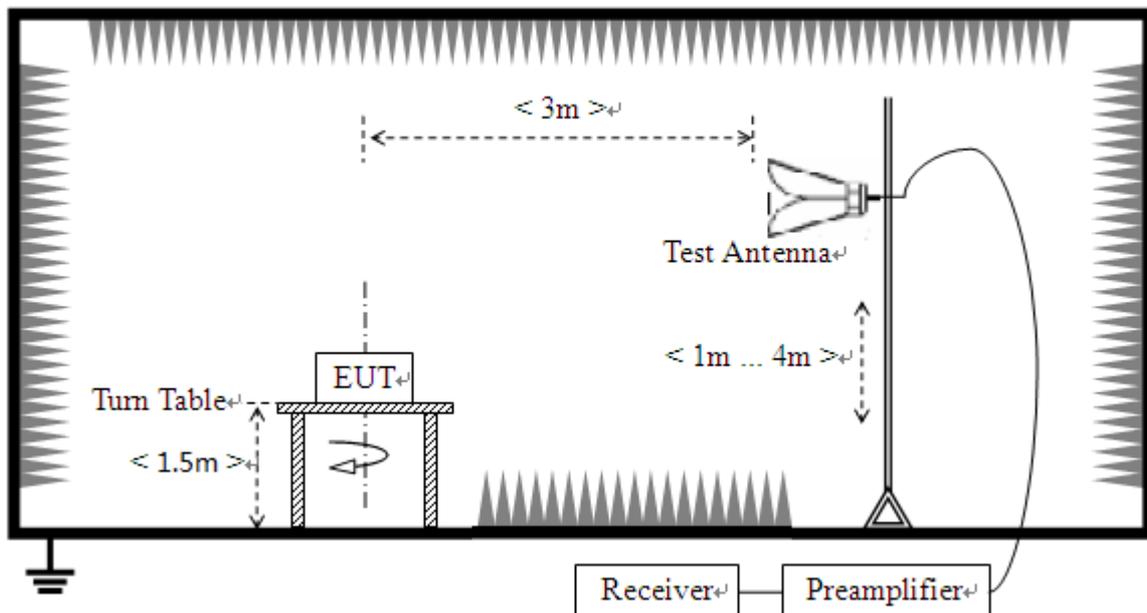

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please refer ANNEX A(1.5).



2.9.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.9.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; AT = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

For average measurement: Use duty cycle correction factor method per 15.35(c)

Duty cycle = On Time/100ms

$$\text{On Time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{N-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

The average levels were calculated from the peak level corrected with duty cycle correction factor (-29.74dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.




GFSK Mode

A. Test Verdict:


Peak Measurement Value							
Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)
		PK/ AV					
1	2366.42	PK	30.45	-11.73	32.56	51.28	74
23	2483.58	PK	38.09	-11.73	32.56	58.92	74

Average Measurement Value						
Channel	Frequency (MHz)	Detector	Peak Value (dBuV/m)	AV Factor (dB)	Max. Emission E (dBuV/m)	Limit (dBuV/m)
		PK/ AV				
1	2366.42	PK	51.28	-29.74	21.54	54
23	2483.58	PK	58.92	-29.74	29.18	54


B. Test Plots:

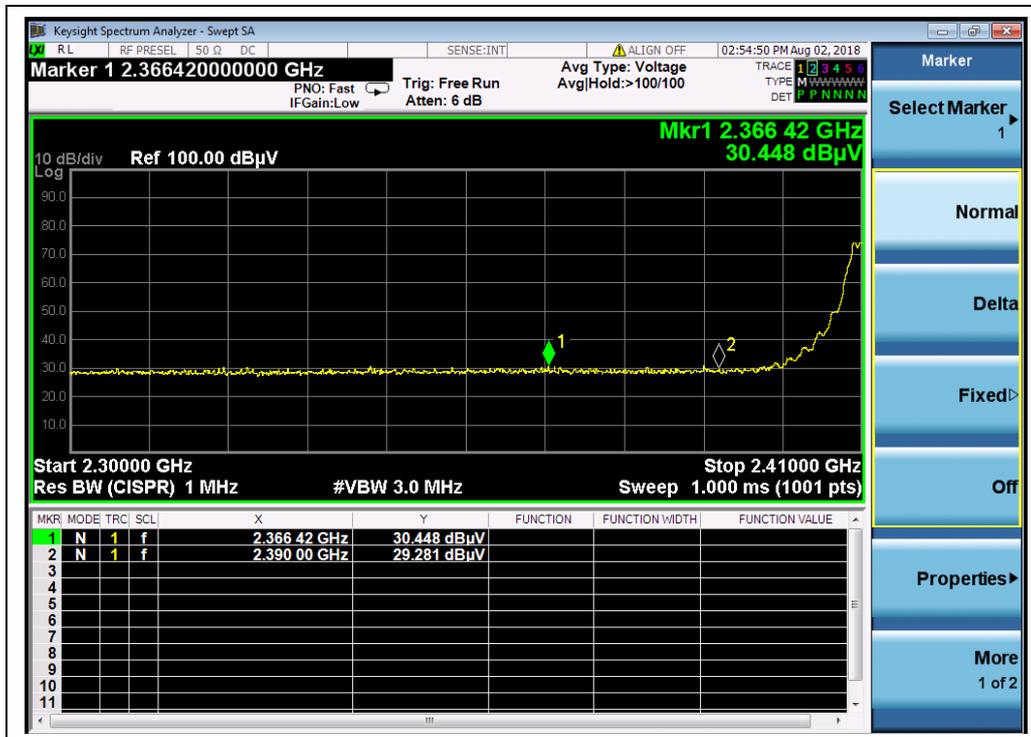


(Channel = 1, PEAK, GFSK)

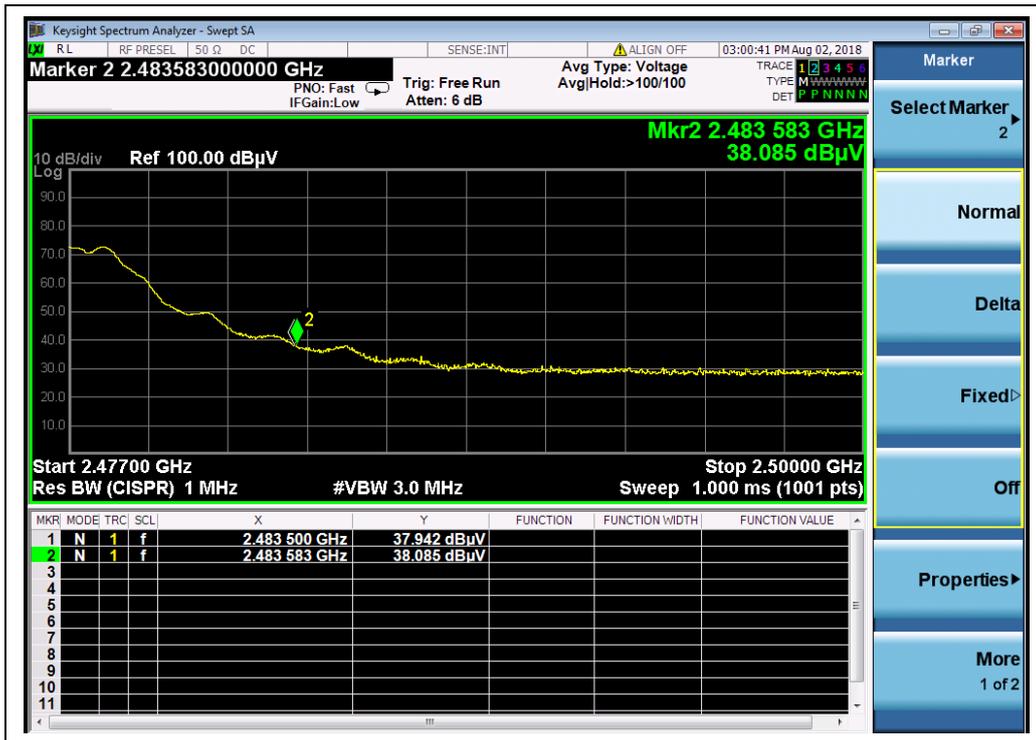

(Channel = 23, PEAK, GFSK)

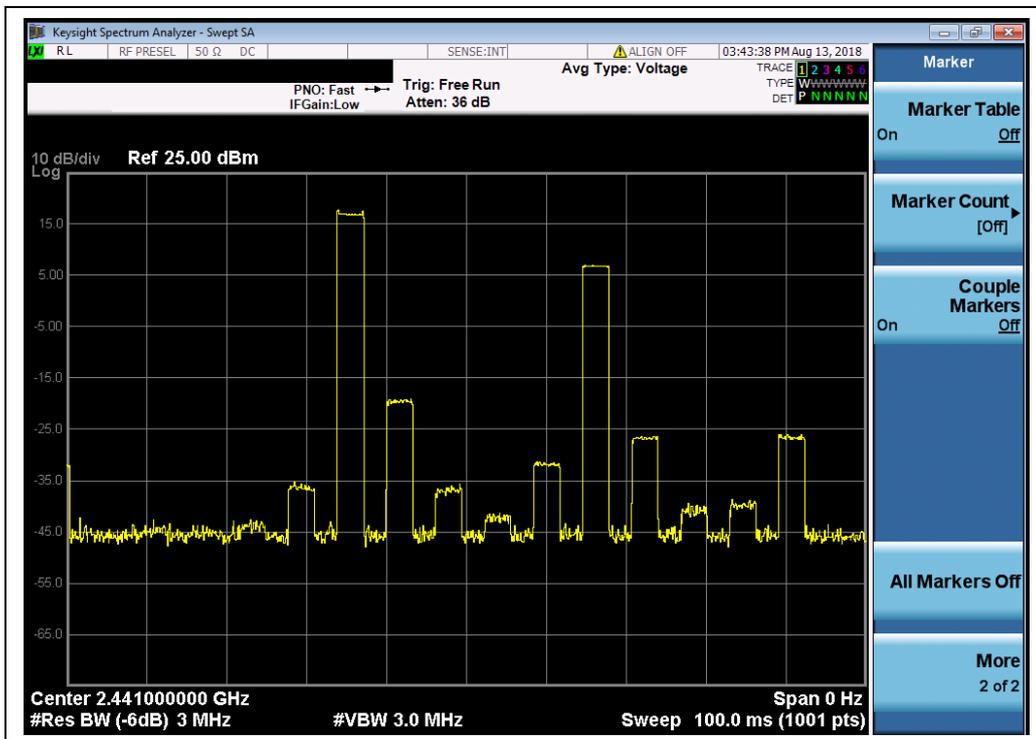

(Number of pulses in 100ms)

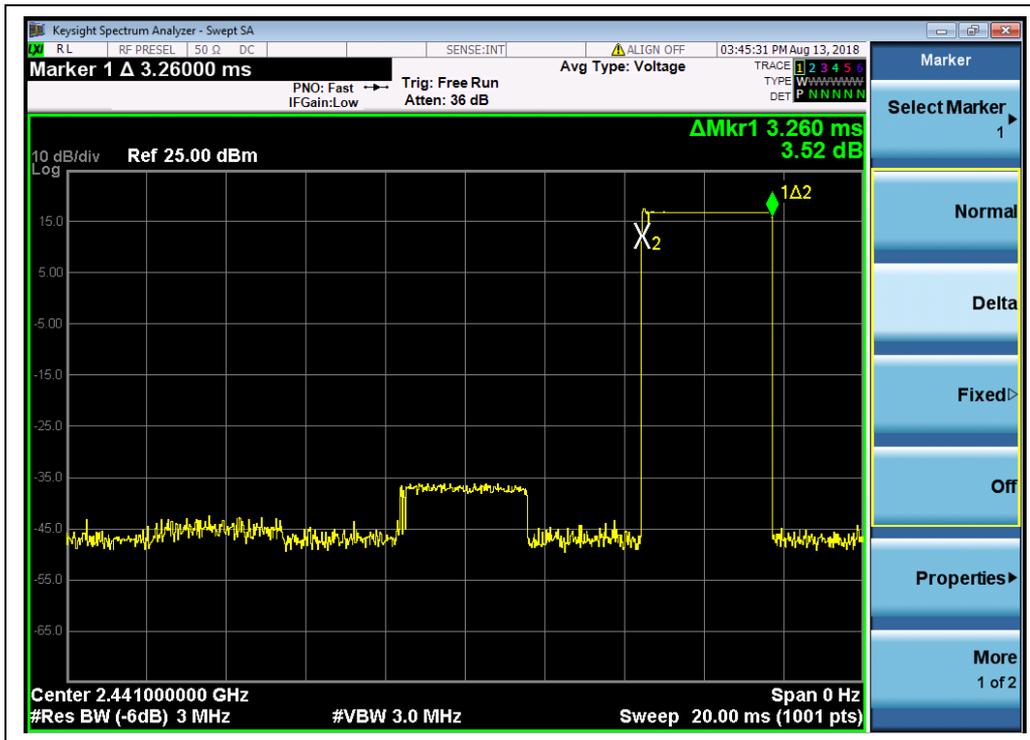

(Length of one pulse)

Note 1: Worst case Duty cycle = on time/100ms = $1 \times 3.26 / 100 = 0.0326$

Note 2: Worst case Duty cycle correction factor = $20 \times \log(\text{Duty cycle}) = -29.74$



2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

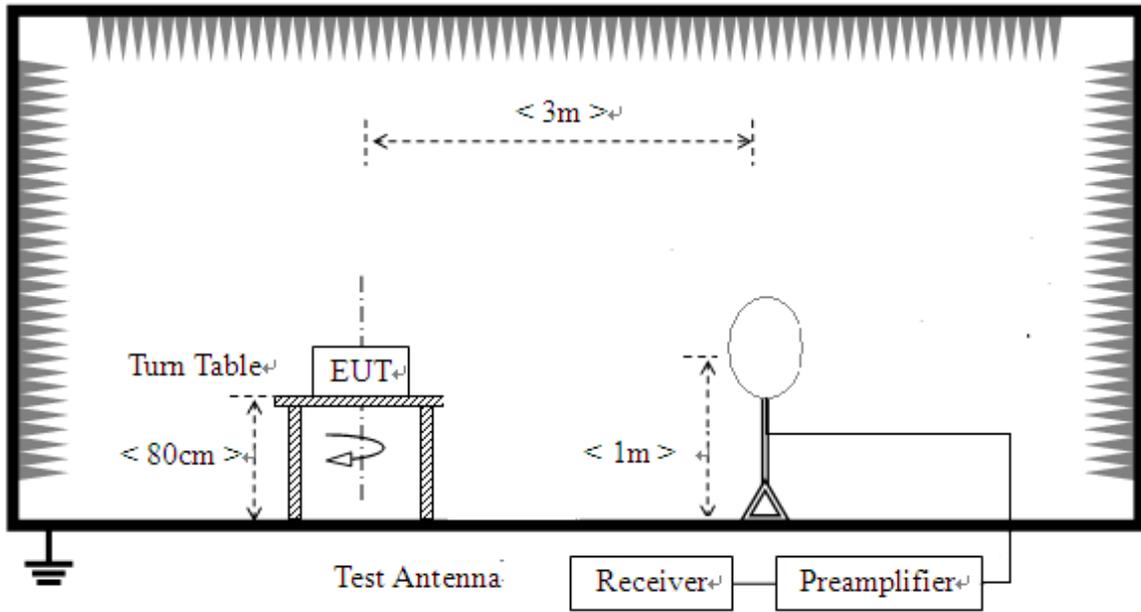

- 2) For radiated emissions from 30MHz to 1GHz

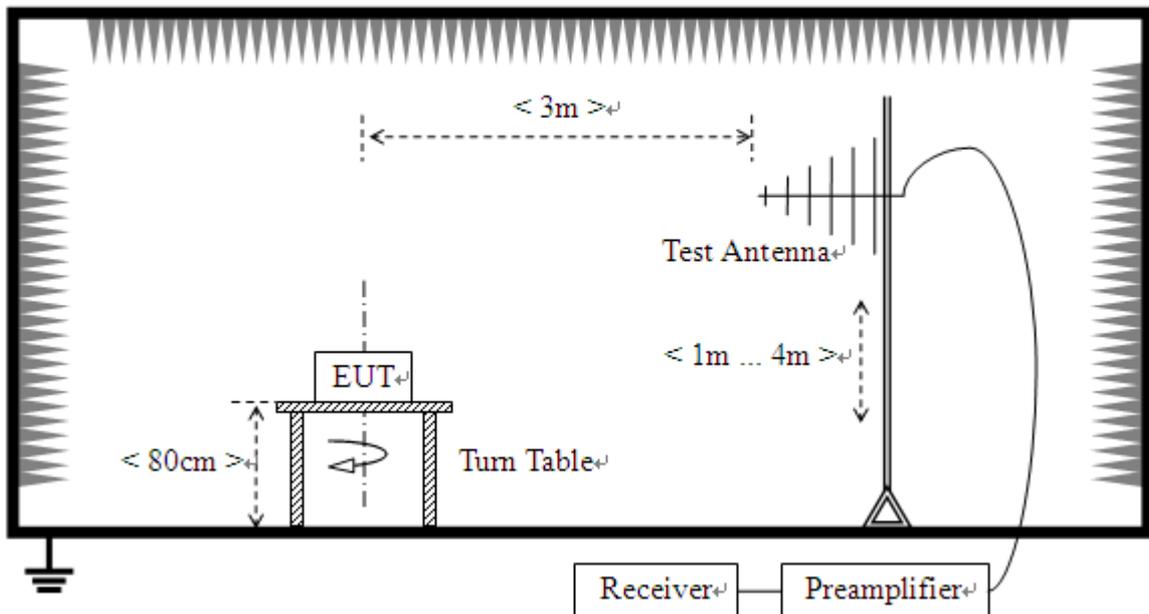

3) For radiated emissions above 1GHz

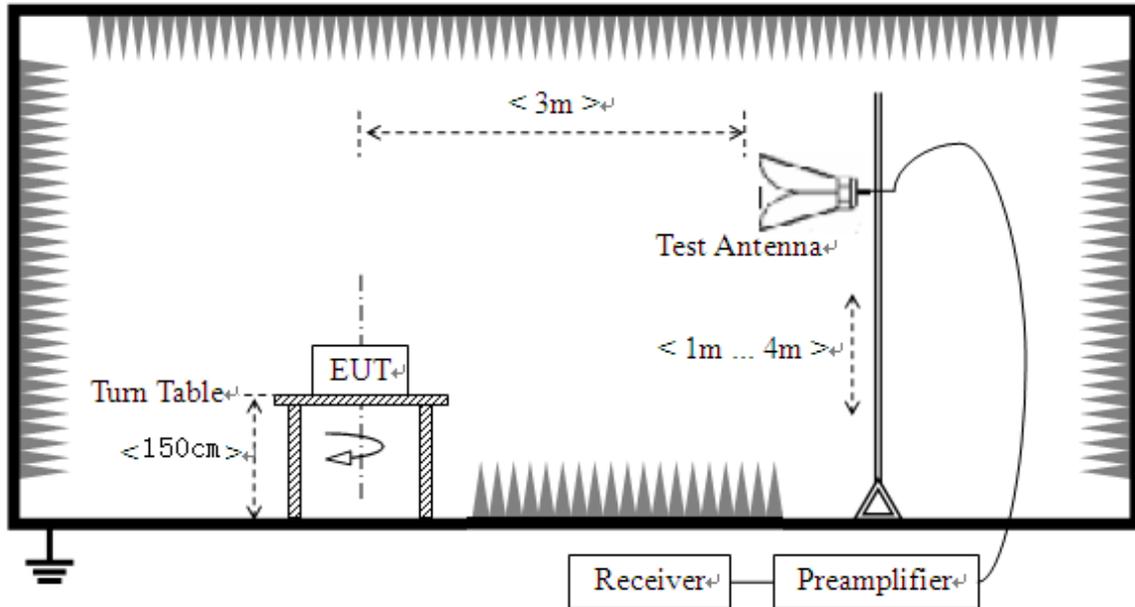

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed



at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

For average measurement: Use duty cycle correction factor method per 15.35(c)

Duty cycle = On Time/100ms

$$\text{On Time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.

The average levels were calculated from the peak level corrected with duty cycle correction factor (-29.74dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




GFSK Mode

Plots for Channel = 1

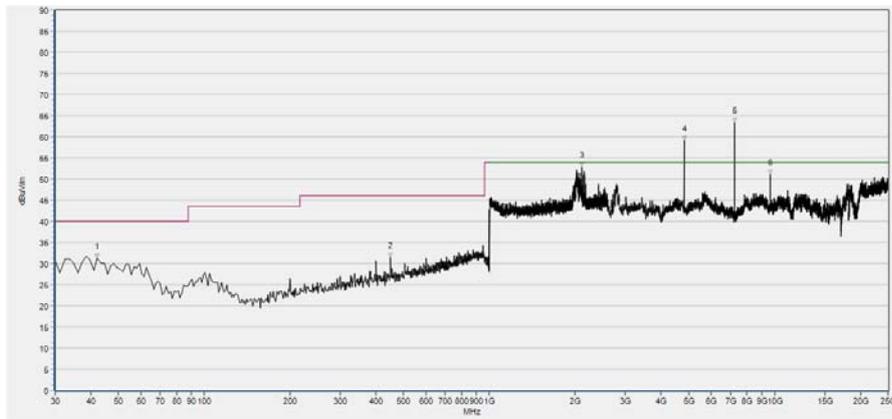

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
42.140	31.31	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
450.050	31.48	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2105.722	52.89	N/A	38.21	74.00	N/A	54.00	Horizontal	PASS
4815.967	59.06	N/A	29.33	74.00	N/A	54.00	Horizontal	PASS
7231.533	63.47	N/A	33.74	74.00	N/A	54.00	Horizontal	PASS
9638.953	51.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 1)

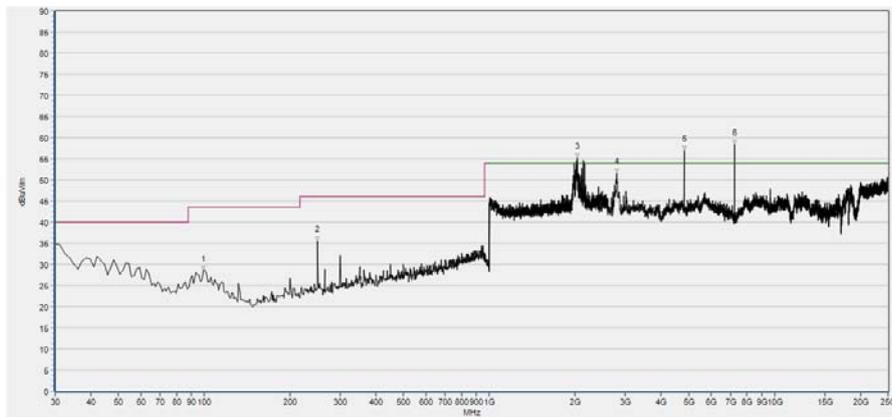

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
99.199	28.49	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
249.737	35.53	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2034.014	55.15	N/A	34.92	74.00	N/A	54.00	Vertical	PASS
2791.453	51.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4815.967	56.93	N/A	27.20	74.00	N/A	54.00	Vertical	PASS
7227.460	58.40	N/A	28.67	74.00	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 1)

Plot for Channel = 11

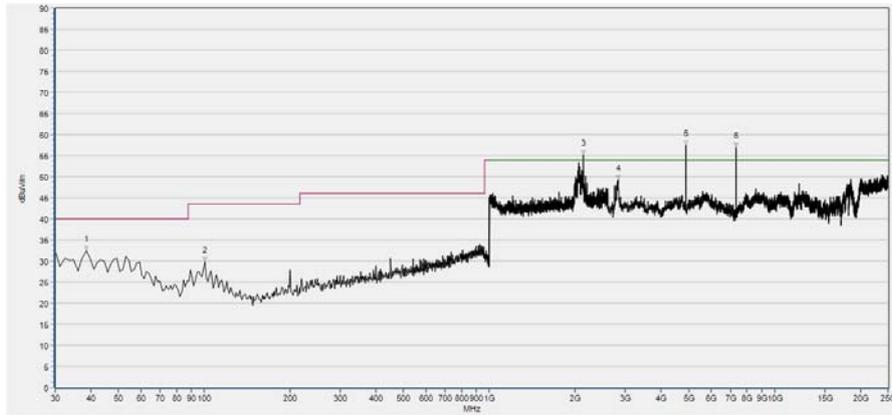

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
38.498	32.45	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
100.413	29.80	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2137.095	55.11	N/A	35.28	74.00	N/A	54.00	Horizontal	PASS
2824.041	49.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4881.142	57.55	N/A	27.82	74.00	N/A	54.00	Horizontal	PASS
7321.149	56.89	N/A	27.16	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 11)

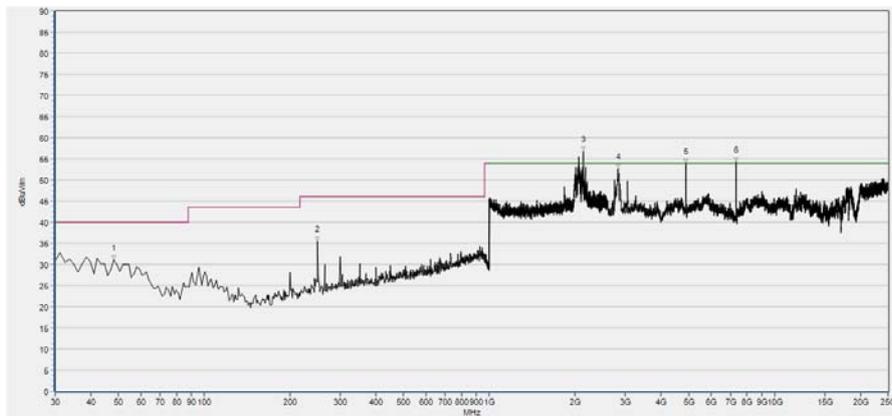


Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.210	31.13	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
249.737	35.48	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2136.455	56.74	N/A	38.99	74.00	N/A	54.00	Vertical	PASS
2828.114	52.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4885.215	53.85	N/A	24.12	74.00	N/A	54.00	Vertical	PASS
7325.223	54.25	N/A	24.52	74.00	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 11)

Plot for Channel = 23

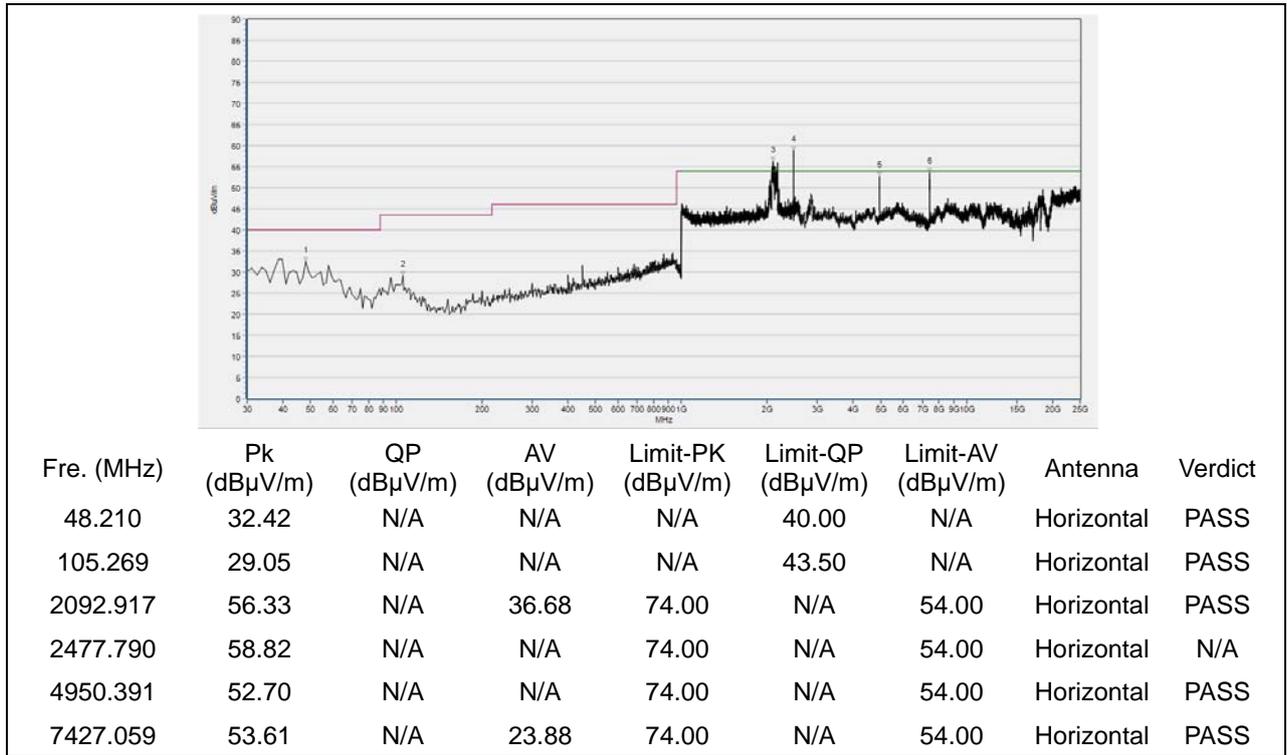

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 23)

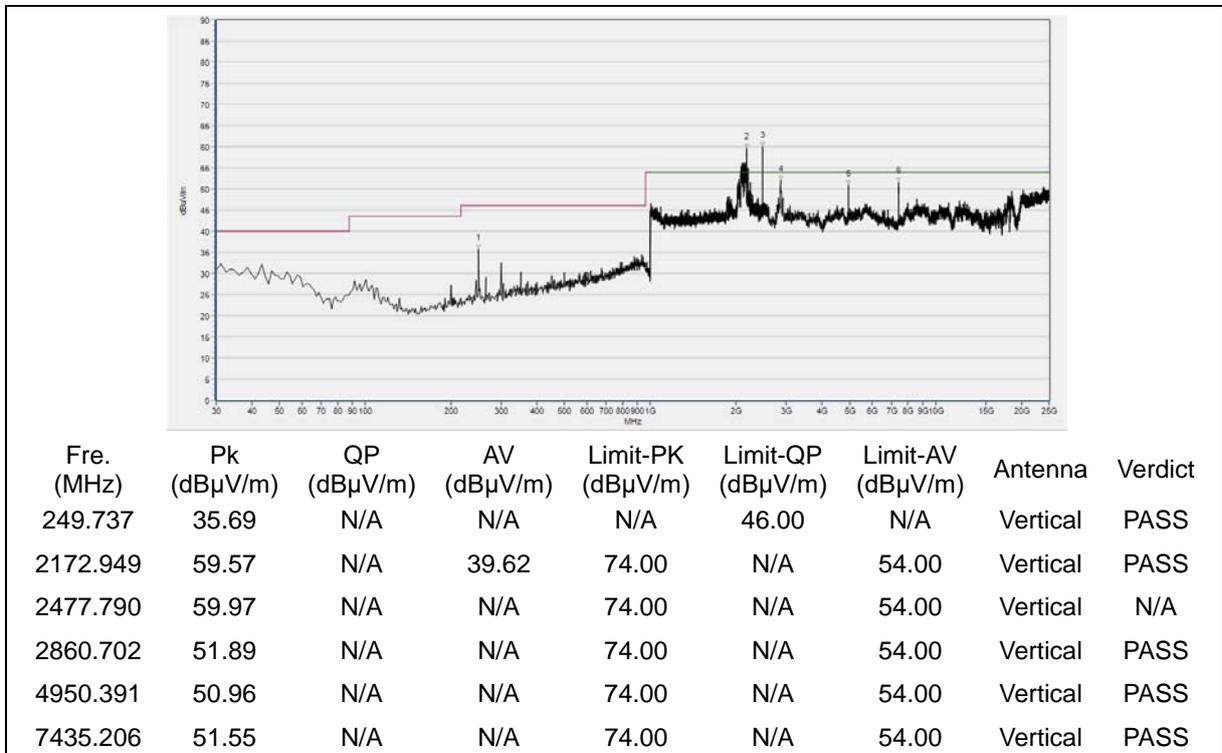

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 23)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2018.04.17	2019.04.16
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analyser	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal. Due
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.5 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2018.05.08	2019.05.07
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.08	2019.05.07
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

————— END OF REPORT —————