

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Shenzhen Meichi Electronics Co.,Ltd.
Address	:	Room B312 B313, 3/F, Huafeng Business Mansion, Xingye Commercial and Trade Subzone, Qianjin 1st Road, Xin'an 25 Area, Baoan District, Shenzhen City.
Equipment under Test	:	Smart Security Light
Model No.	:	HSC600184
Trade Mark	:	HOMSCAM
FCC ID	:	2AOMTHSC600184
Manufacturer	:	Shenzhen Gospell Smarthome Electronic Co.,Ltd
Address	:	East of 01st-04st Floor, Block A, No.1 Industrial park, Fenghuanggang, South of No.1 Baotian Road, Xixiang street, Bao'an District, Shenzhen City, Guangdong Province 518126, P.R.China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,
Guangdong Province, China, 523808

Tel: +86-0769-89201699 **E-mail:** ddt@dgddt.com <http://www.dgddt.com>

REPORT

TABLE OF CONTENTS

	Test report declares.....	4
1.	Summary of test results	5
2.	General test information.....	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	6
2.3.	Assistant equipment used for test	6
2.4.	Block diagram of EUT configuration for test	7
2.5.	Deviations of test standard	7
2.6.	Test environment conditions	7
2.7.	Test laboratory.....	7
2.8.	Measurement uncertainty	8
3.	Equipment used during test.....	9
4.	6dB Bandwidth and 99% Bandwidth.....	11
4.1.	Block diagram of test setup	11
4.2.	Limits.....	11
4.3.	Test Procedure	11
4.4.	Test Result	11
4.5.	original test data	13
5.	Conducted peak Output Power.....	37
5.1.	Block diagram of test setup	37
5.2.	Limits.....	37
5.3.	Test Procedure	37
5.4.	Test Result	37
6.	Power Spectral Density.....	39
6.1.	Block diagram of test setup	39
6.2.	Limits.....	39
6.3.	Test Procedure	39
6.4.	Test Result	39
6.5.	Original test data	41
6.6.	Band Edge and Spurious Emissions (Conducted).....	53
6.7.	Block diagram of test setup	53
6.8.	Limits.....	53
6.9.	Test Procedure	53
6.10.	Test Result	54
6.11.	original test data	54
7.	Radiated Spurious Emissions	86
7.1.	Block diagram of test setup	86

7.2.	Limit.....	88
7.3.	Test Procedure	89
7.4.	Test result.....	90
8.	Radiated Band Edge Compliance	94
8.1.	Block diagram of test setup	94
8.2.	Limit.....	94
8.3.	Test Procedure	94
8.4.	Test result.....	94
9.	Power Line Conducted Emission.....	111
9.1.	Block diagram of test setup	111
9.2.	Power Line Conducted Emission Limits(Class B).....	111
9.3.	Test Procedure	111
9.4.	Test Result	112
10.	Antenna Requirements.....	115
10.1.	Limit.....	115
10.2.	Result.....	115

TEST REPORT DECLARE

Applicant	:	Shenzhen Meichi Electronics Co.,Ltd.
Address	:	Room B312 B313, 3/F, Huafeng Business Mansion, Xingye Commercial and Trade Subzone, Qianjin 1st Road, Xin'an 25 Area, Baoan District, Shenzhen City.
Equipment under Test	:	Smart Security Light
Model No	:	HSC600184
Trade Mark	:	HOMSCAM
Manufacturer	:	Shenzhen Gospell Smarthome Electronic Co.,Ltd
Address	:	East of 01st-04st Floor, Block A, No.1 Industrial park, Fenghuanggang, South of No.1 Baotian Road, Xixiang street, Bao'an District, Shenzhen City, Guangdong Province 518126, P.R.China

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C.

Test procedure used: ANSI C63.10:2013

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	DDT-R17112904-1E2		
Date of Receipt:	Nov. 29, 2017	Date of Test:	Nov. 29, 2017 ~ Jan. 05, 2018

Prepared By:

Ella Gong

Ella Gong/Engineer

Approved By



Kevin Kong/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

1. Summary of test results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2)	PASS
Conducted Output Power	FCC 15.247 (b) (3)	PASS
Power Spectral Density	FCC 15.247 (e)	PASS
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d)	PASS
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205	PASS
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205	PASS
Power Line Conducted Emission	FCC 15.207	PASS
Antenna requirement	FCC 15.203	PASS

2. General test information

2.1. Description of EUT

EUT* Name	: Smart Security Light
Model Number	: HSC600184
EUT function description	: Please reference user manual of this device
Power supply	: AC 100-240V
Radio Technology	: IEEE802.11b/g/n
FCC Operation frequency	: IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40:2422MHz—2452MHz
Modulation	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Transmitter rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 150 Mbps, HT40: up to 300Mbps
Antenna Type	: Integral antenna 1: 2.4G band maximum PK gain2.0dBi Integral antenna 2: 2.4G band maximum PK gain2.0dBi Directional gain of MIMO mode is 5.01dBi
Sample Type	: Series production

Note: IEEE 802.11b/g/11n HT20/11n HT40 modes are all MIMO mode only.

Channle information							
CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency
1	2412	5	2432	9	2452	/	/
2	2417	6	2437	10	2457	/	/
3	2422	7	2442	11	2462	/	/
4	2427	8	2447	/	/	/	/


2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Serial No.	Other
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Description of Assistant equipment	Manufacturer	Model number or Type	EMC Compliance	SN:
Notebook	DELL	Latitude D610	FCC DOC	00045-534-136-300
Network Cable	N/A	N/A	N/A	Length: 1.5m

2.4. Block diagram of EUT configuration for test



EUT was connected to control to provided by manufacturer which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run a special test software “The super terminal” provided by manufacturer to control EUT work in Continuous TX mode (>98% duty cycle), and select test channel, wireless mode and data rate.

Mode	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	11	LCH :CH1	2412
	11	MCH: CH6	2437
	11	HCH: CH11	2462
IEEE 802.11g	54	LCH :CH1	2412
	54	MCH: CH6	2437
	54	HCH: CH11	2462
IEEE 802.11n HT20	MCS 7	LCH :CH1	2412
	MCS 7	MCH: CH6	2437
	MCS 7	HCH: CH11	2462
IEEE 802.11n HT40	MCS 7	LCH :CH3	2422
	MCS 7	MCH: CH6	2437
	MCS 7	HCH: CH9	2452

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25℃
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808 Tel: +86-0769-89201699 <http://www.dgddt.com>

CNAS Accreditation No. L6451; A2LA Accreditation No. 3870.01

Designation Number: CN1182; Test Firm Registration Number: 540522

Industry Canada site registration number: 10288A-1

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power(Conducted)(Spectrum analyzer)	0.86dB(10 MHz ≤ f < 3.6GHz);
	1.38dB(3.6GHz ≤ f < 8GHz)
Peak Output Power(Conducted)(Power Sensor)	0.74dB
Power Spectral Density	0.74dB(10 MHz ≤ f < 3.6GHz);
	1.38dB(3.6GHz ≤ f < 8GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86dB(10 MHz ≤ f < 3.6GHz);
	1.40dB(3.6GHz ≤ f < 8GHz)
	1.66dB(8GHz ≤ f < 26GHz)
Uncertainty for radio frequency (RBW<20KHz)	3×10 ⁻⁸
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (30MHz-1GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1GHz-40GHz)	4.10dB(1-6GHz)
	4.40dB (6GHz-18Gz)
	3.54dB (18GHz-40Gz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment used during test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (Tonscent RF Measurement System)					
Spectrum analyzer	R&S	FSU26	1166.1660.26	Oct. 23, 2017	1 Year
Wideband Radio Communication tester	R&S	CMW500	155523	Oct. 21, 2017	1 Year
Vector Signal Generator	Agilent	E8267D	MY52098743	Oct. 23, 2017	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Oct. 21, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Oct. 21, 2017	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Oct. 21, 2017	1 Year
DC Power Source	MATRIS	MPS-3005 L-3	D813058W	Oct. 21, 2017	1 Year
Attenuator	Mini-Circuits	BW-S10W 2	101109	Oct. 21, 2017	1 Year
RF Cable	Micable	C10-01-01-1	100309	Oct. 21, 2017	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-1 50L	ZX170110-A	Oct. 21, 2017	1Year
Test Software	JS Tonscend	JS1120-2	Ver.2.5	N/A	N/A
USB Data acquisition	Agilent	U2531A	TW55043503	N/A	N/A
Auto control Unit	JS Tonscend	JS0806-2	158060010	N/A	N/A
Radiated Emission Test					
EMI Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 16, 2017	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Oct. 21, 2017	1 Year
Active Loop antenna	Schwarzbeck	FMZB-151 9	1519-038	Oct. 21, 2017	1 Year
Broadband Horn antenna	Schwarzbeck	BBHA 9170	BBHA 9170 #790	Aug. 11, 2017	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Oct. 21, 2017	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Oct. 21, 2017	1 Year
Pre-amplifier	TERA-MW	TRLA-004 0G35	101303	Oct. 21, 2017	1 Year
RF Cable	HUBSER	CP-X2	W11.03	Oct. 21, 2017	1 Year
RF Cable	HUBSER	CP-X1	W12.02	Oct. 21, 2017	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Oct. 21, 2017	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESU8	100316	Oct. 21, 2017	1 Year
LISN 1	R&S	ENV216	101109	Oct. 21, 2017	1 Year
LISN 2	R&S	ESH2-Z5	100309	Oct. 21, 2017	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Oct. 21, 2017	1 Year
CE Cable 1	HUBSER	ESU8/RF2	W10.01	Oct. 21, 2017	1 Year

Test software	Audix	E3	V 6.11111b	N/A	N/A
---------------	-------	----	------------	-----	-----

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

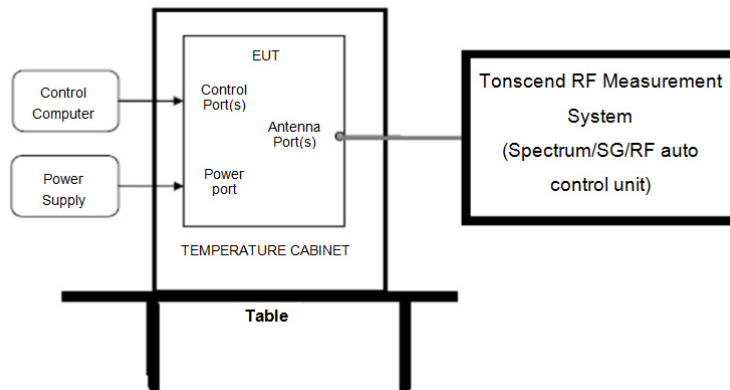

4.2. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 KHz

4.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:

RBW:	100KHz
VBW:	300KHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test Result

6dB Bandwidth:

Test Mode	Test Channel	Ant	EBW[MHz]	Limit	Verdict
11BMIMO	2412	Ant1	10.560	0.5	PASS
11BMIMO	2412	Ant2	10.760	0.5	PASS
11BMIMO	2437	Ant1	10.440	0.5	PASS
11BMIMO	2437	Ant2	10.520	0.5	PASS
11BMIMO	2462	Ant1	10.000	0.5	PASS
11BMIMO	2462	Ant2	10.040	0.5	PASS
11GMIMO	2412	Ant1	16.520	0.5	PASS

11GMIMO	2412	Ant2	16.480	0.5	PASS
11GMIMO	2437	Ant1	16.440	0.5	PASS
11GMIMO	2437	Ant2	16.480	0.5	PASS
11GMIMO	2462	Ant1	16.480	0.5	PASS
11GMIMO	2462	Ant2	16.480	0.5	PASS
11N20MIMO	2412	Ant1	17.320	0.5	PASS
11N20MIMO	2412	Ant2	17.520	0.5	PASS
11N20MIMO	2437	Ant1	17.080	0.5	PASS
11N20MIMO	2437	Ant2	17.320	0.5	PASS
11N20MIMO	2462	Ant1	17.040	0.5	PASS
11N20MIMO	2462	Ant2	17.360	0.5	PASS
11N40MIMO	2422	Ant1	35.520	0.5	PASS
11N40MIMO	2422	Ant2	35.520	0.5	PASS
11N40MIMO	2437	Ant1	35.200	0.5	PASS
11N40MIMO	2437	Ant2	35.360	0.5	PASS
11N40MIMO	2452	Ant1	35.280	0.5	PASS
11N40MIMO	2452	Ant2	35.440	0.5	PASS

99% bandwidth:


2.Occupied Bandwidth


Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
11BMIMO	2412	Ant1	29.880	---	PASS
11BMIMO	2412	Ant2	16.200	---	PASS
11BMIMO	2437	Ant1	30.160	---	PASS
11BMIMO	2437	Ant2	30.680	---	PASS
11BMIMO	2462	Ant1	30.240	---	PASS
11BMIMO	2462	Ant2	16.560	---	PASS
11GMIMO	2412	Ant1	30.040	---	PASS
11GMIMO	2412	Ant2	20.240	---	PASS
11GMIMO	2437	Ant1	30.640	---	PASS
11GMIMO	2437	Ant2	30.680	---	PASS
11GMIMO	2462	Ant1	30.760	---	PASS
11GMIMO	2462	Ant2	23.800	---	PASS
11N20MIMO	2412	Ant1	30.600	---	PASS
11N20MIMO	2412	Ant2	21.320	---	PASS
11N20MIMO	2437	Ant1	31.000	---	PASS
11N20MIMO	2437	Ant2	21.920	---	PASS

11N20MIM O	2462	Ant1	31.680	---	PASS
11N20MIM O	2462	Ant2	24.320	---	PASS
11N40MIM O	2422	Ant1	67.520	---	PASS
11N40MIM O	2422	Ant2	49.440	---	PASS
11N40MIM O	2437	Ant1	66.640	---	PASS
11N40MIM O	2437	Ant2	48.160	---	PASS
11N40MIM O	2452	Ant1	36.640	---	PASS
11N40MIM O	2452	Ant2	36.080	---	PASS

4.5. original test data


6dB Bandwidth:

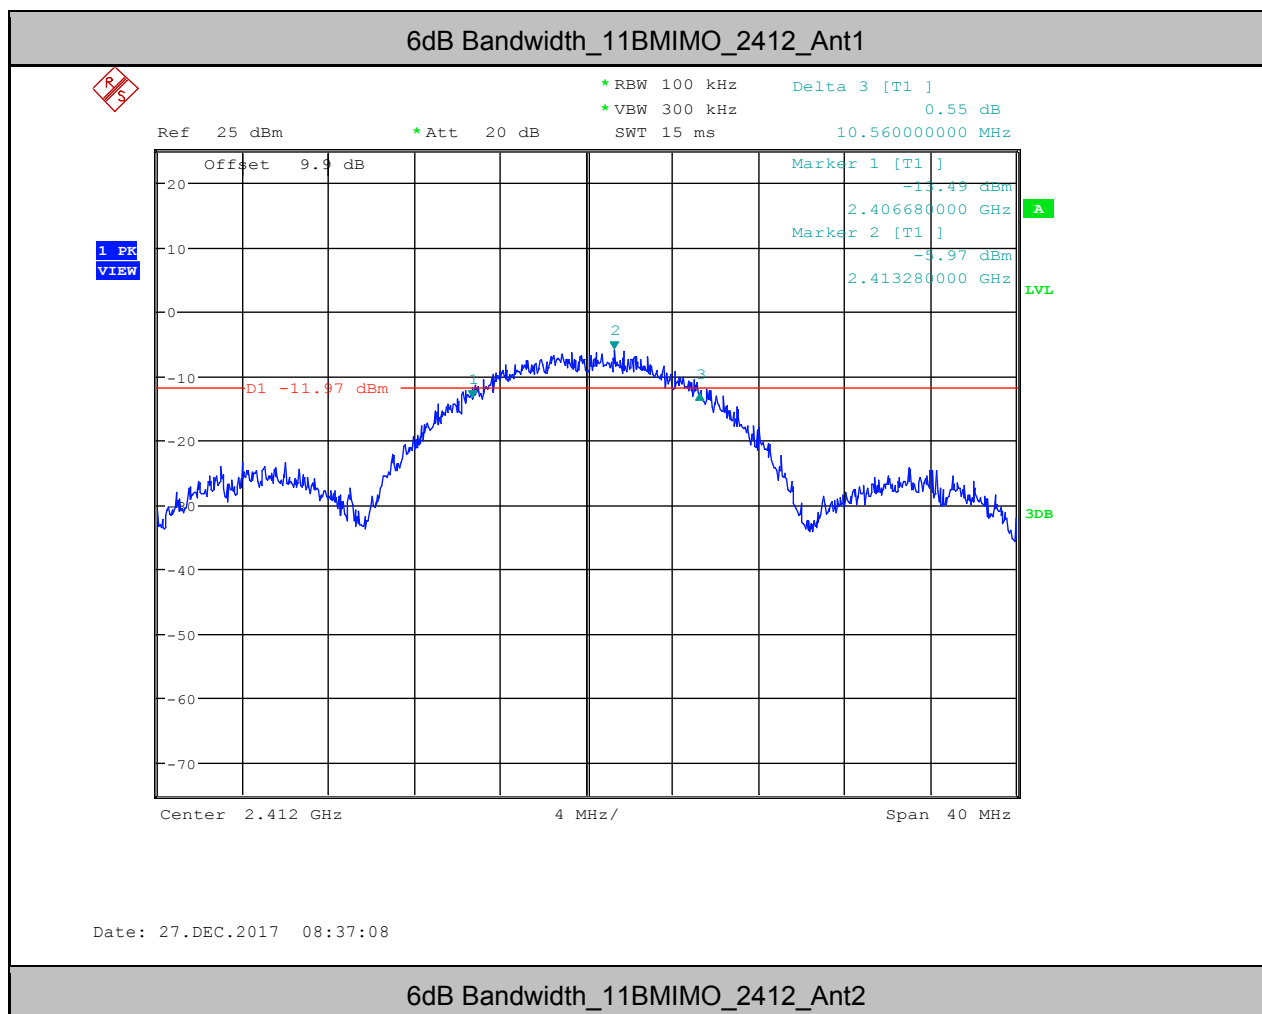

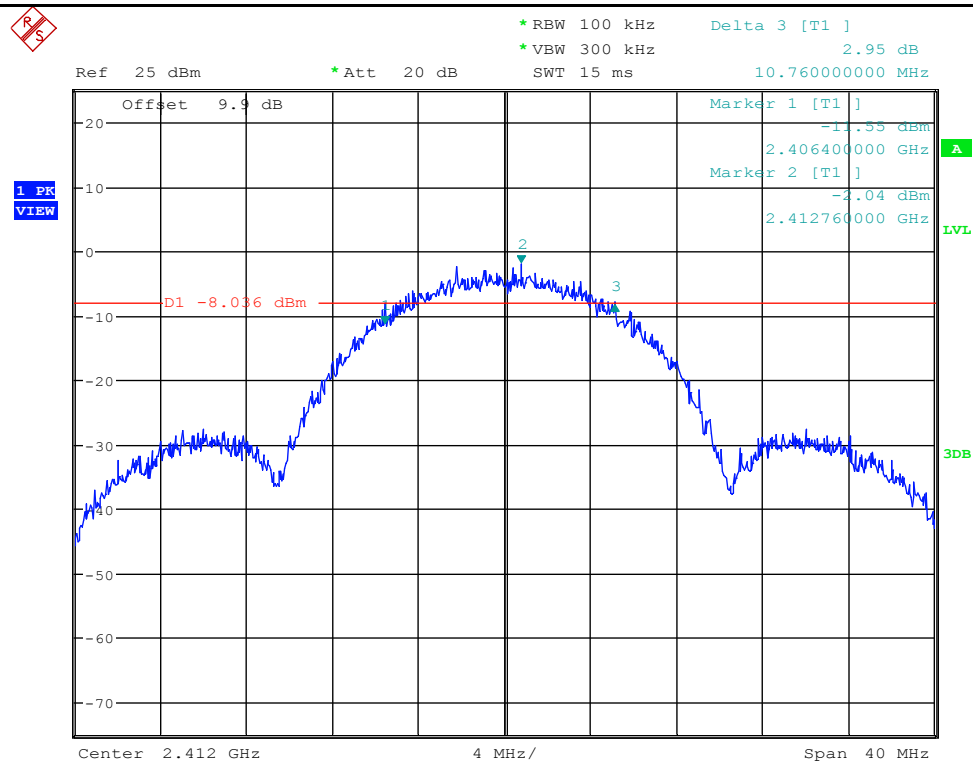


Date: 27.DEC.2017 08:39:39

6dB Bandwidth_11BMIMO_2437_Ant1

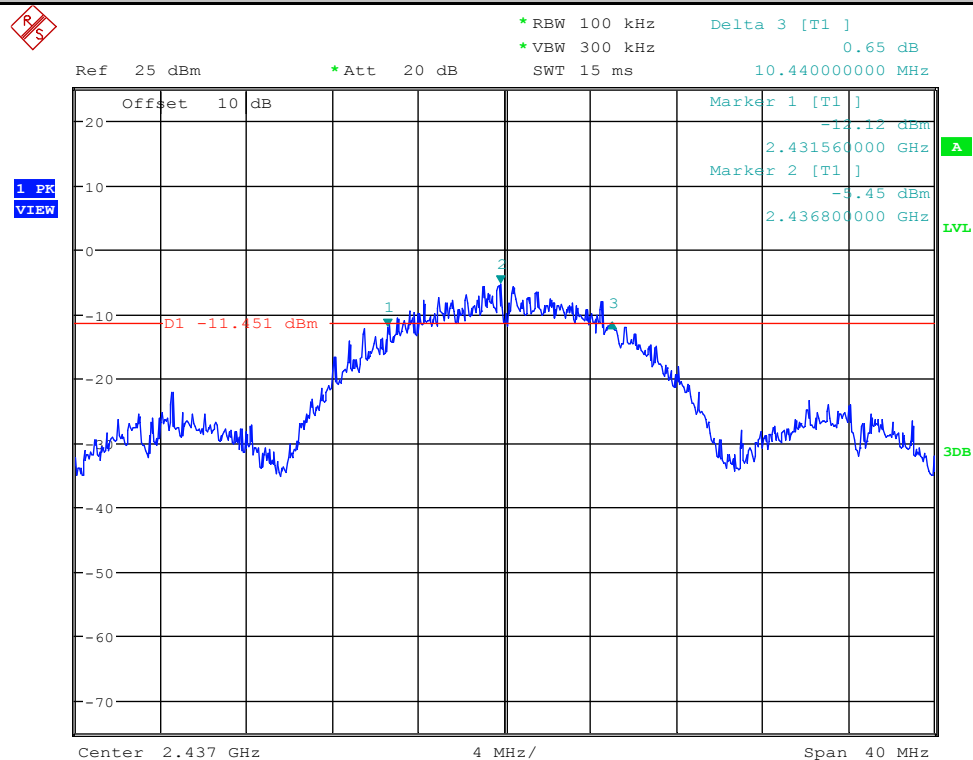


Date: 26.DEC.2017 19:12:41

6dB Bandwidth_11BMIMO_2437_Ant2

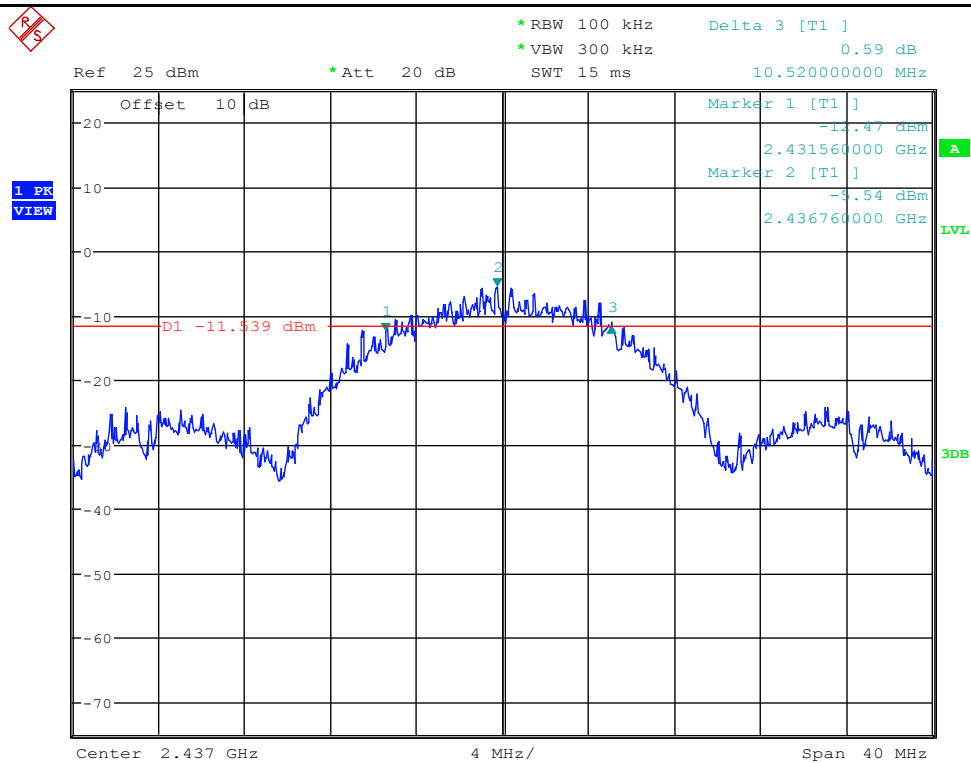


Date: 26.DEC.2017 19:14:13

6dB Bandwidth_11BMIMO_2462_Ant1

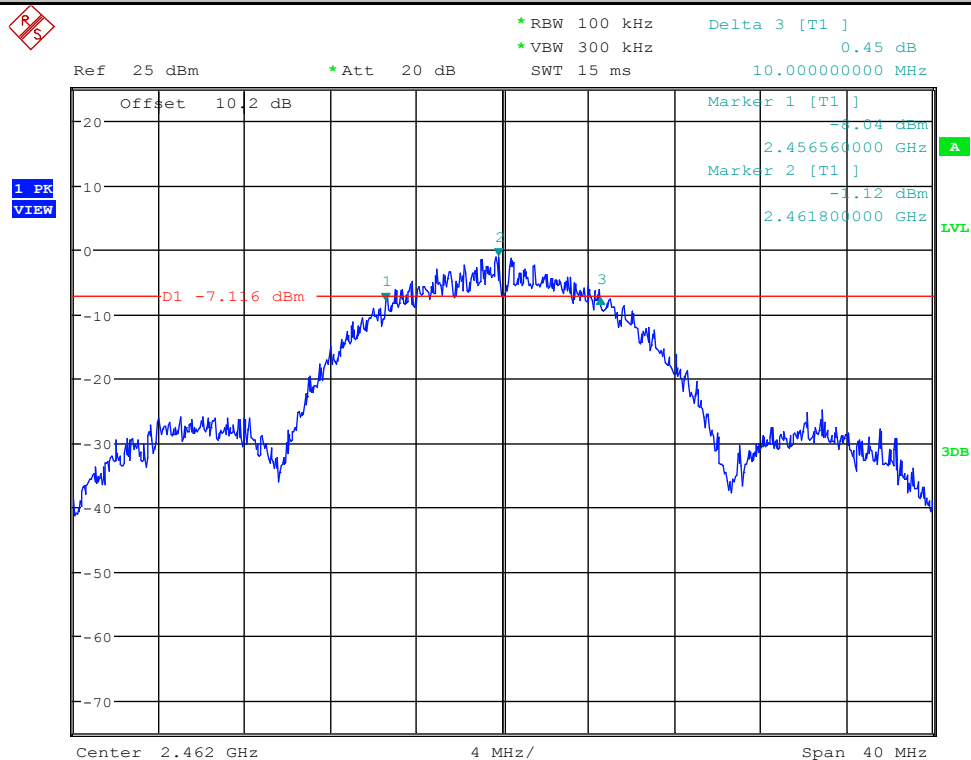


Date: 26.DEC.2017 19:21:41

6dB Bandwidth_11BMIMO_2462_Ant2

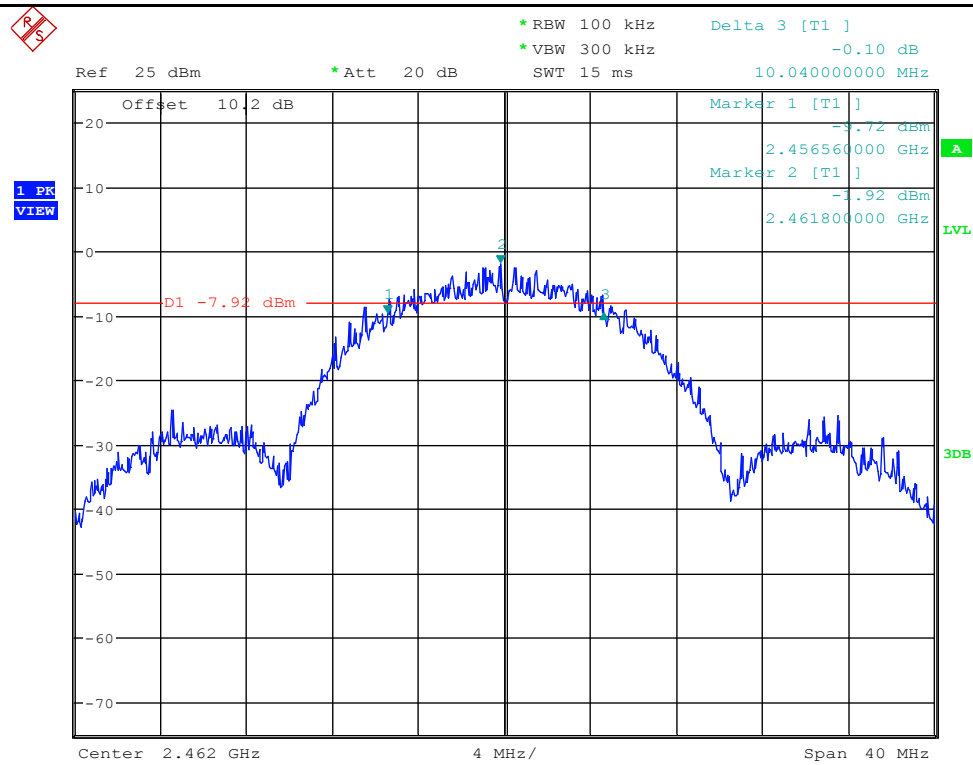


Date: 26.DEC.2017 19:24:10

6dB Bandwidth_11GMIMO_2412_Ant1

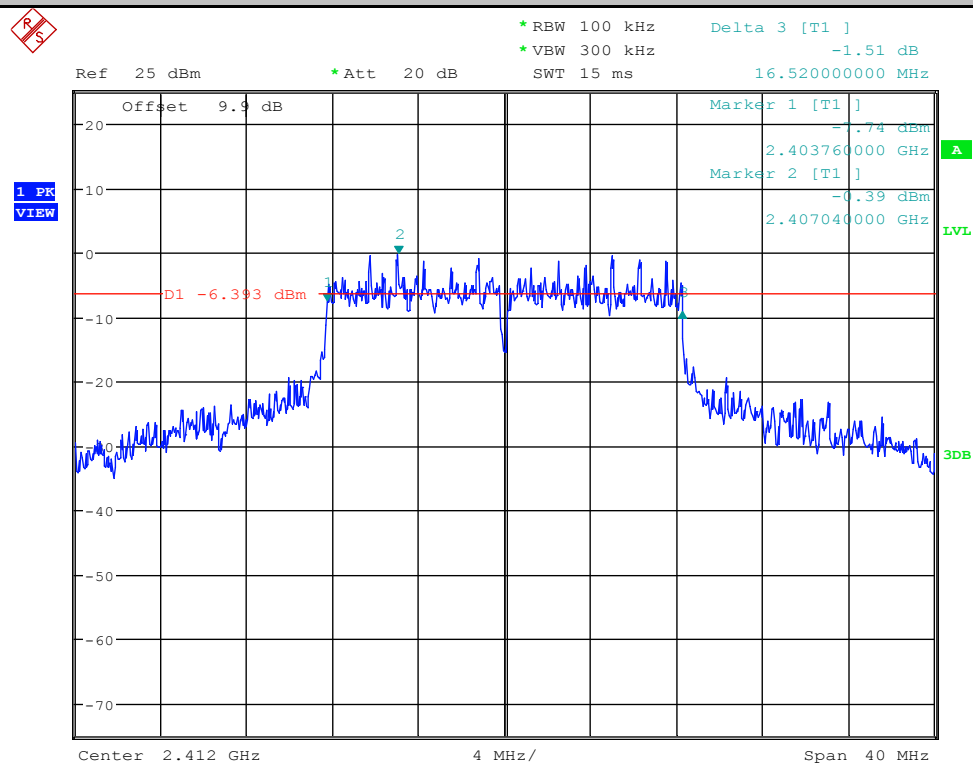


Date: 26.DEC.2017 19:31:28


6dB Bandwidth_11GMIMO_2412_Ant2

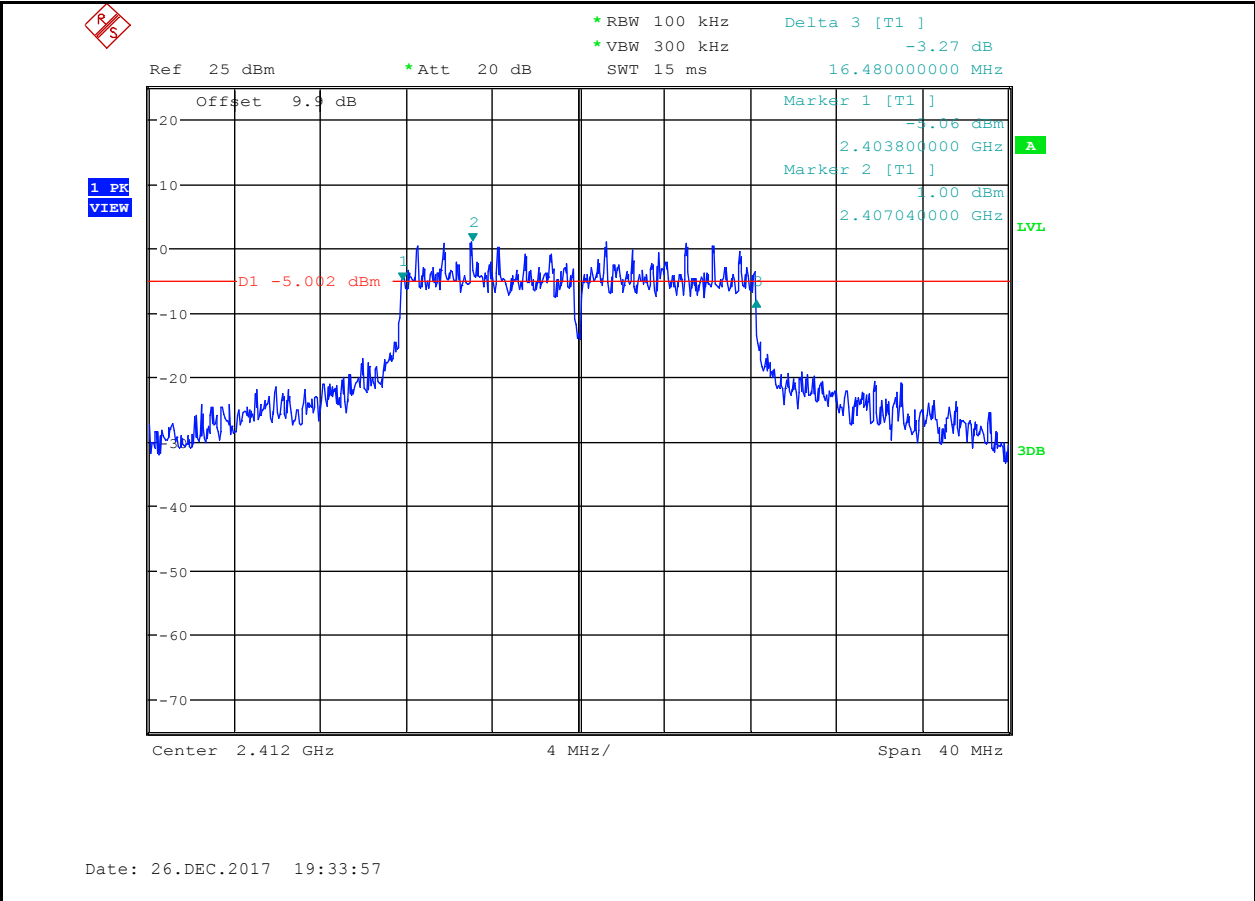

6dB Bandwidth_11GMIMO_2437_Ant1

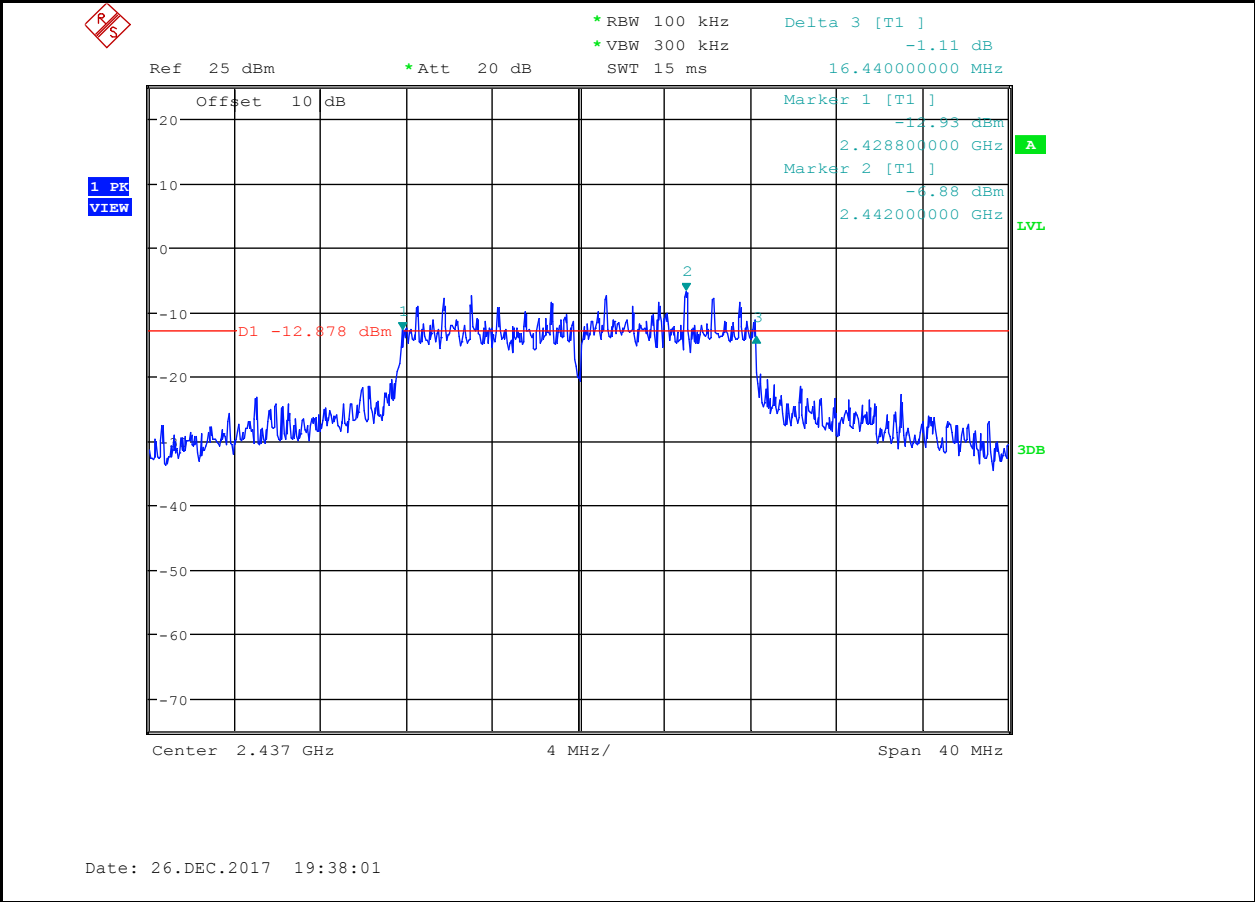


6dB Bandwidth_11GMIMO_2437_Ant2

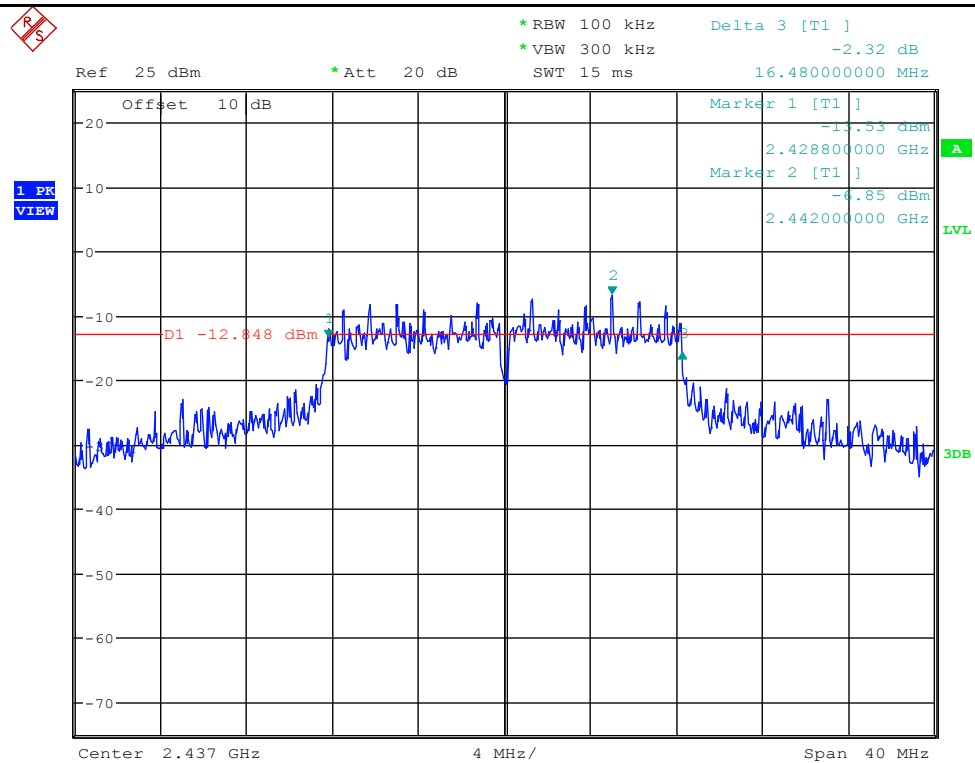


Date: 26.DEC.2017 19:39:34

6dB Bandwidth_11GMIMO_2462_Ant1

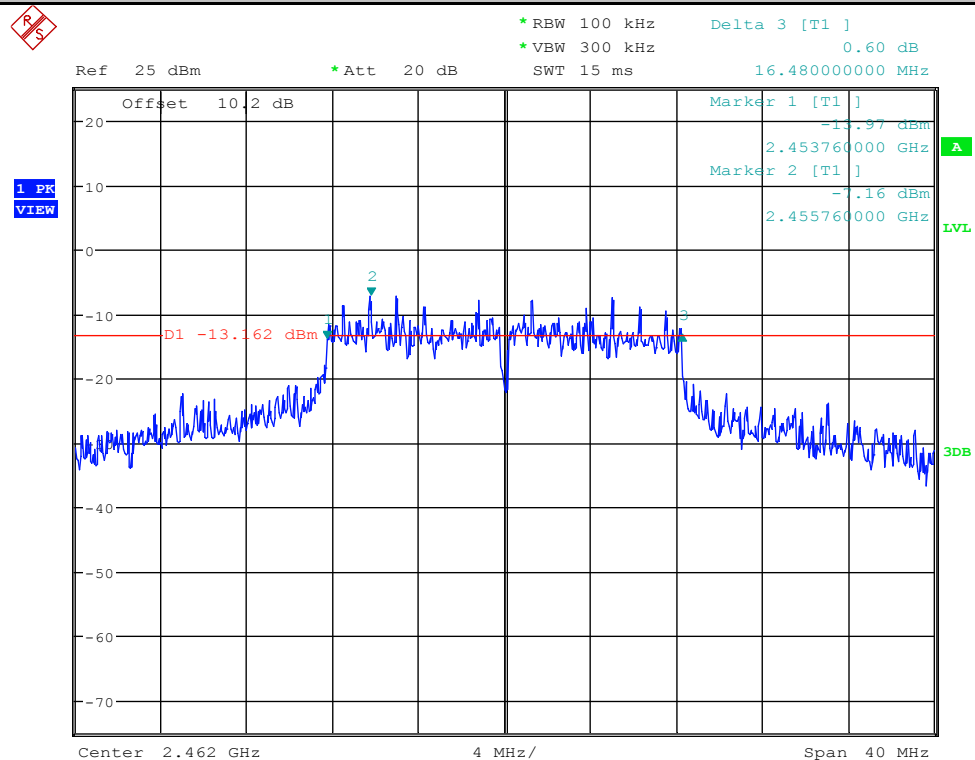


Date: 26.DEC.2017 19:42:17

6dB Bandwidth_11GMIMO_2462_Ant2

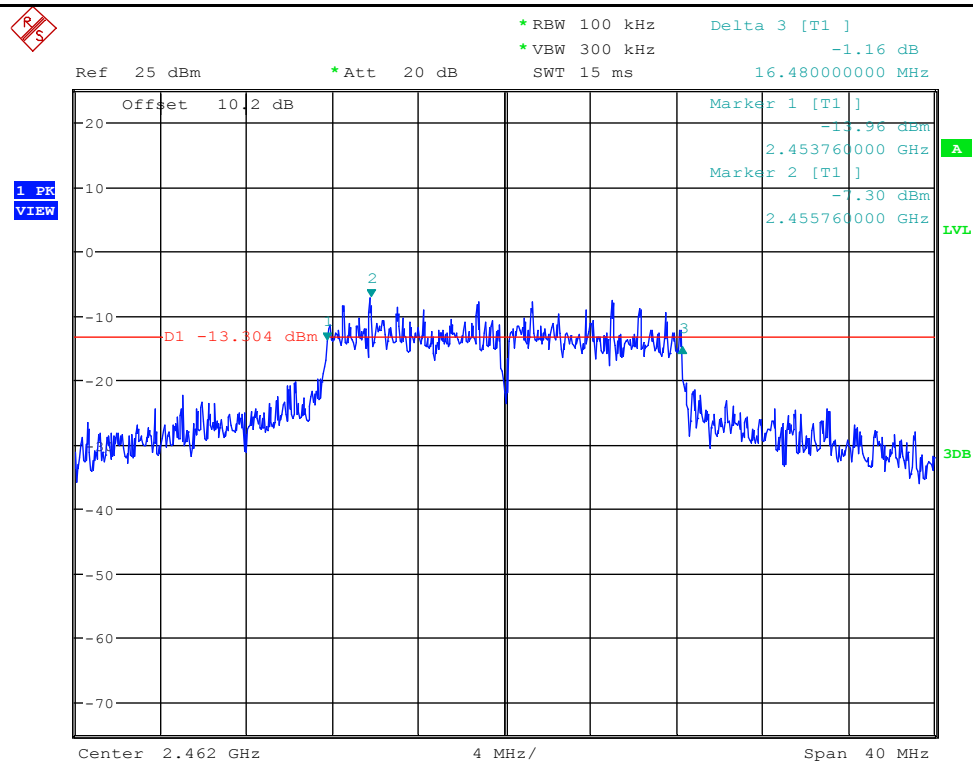


Date: 26.DEC.2017 19:44:46

6dB Bandwidth_11N20MIMO_2412_Ant1

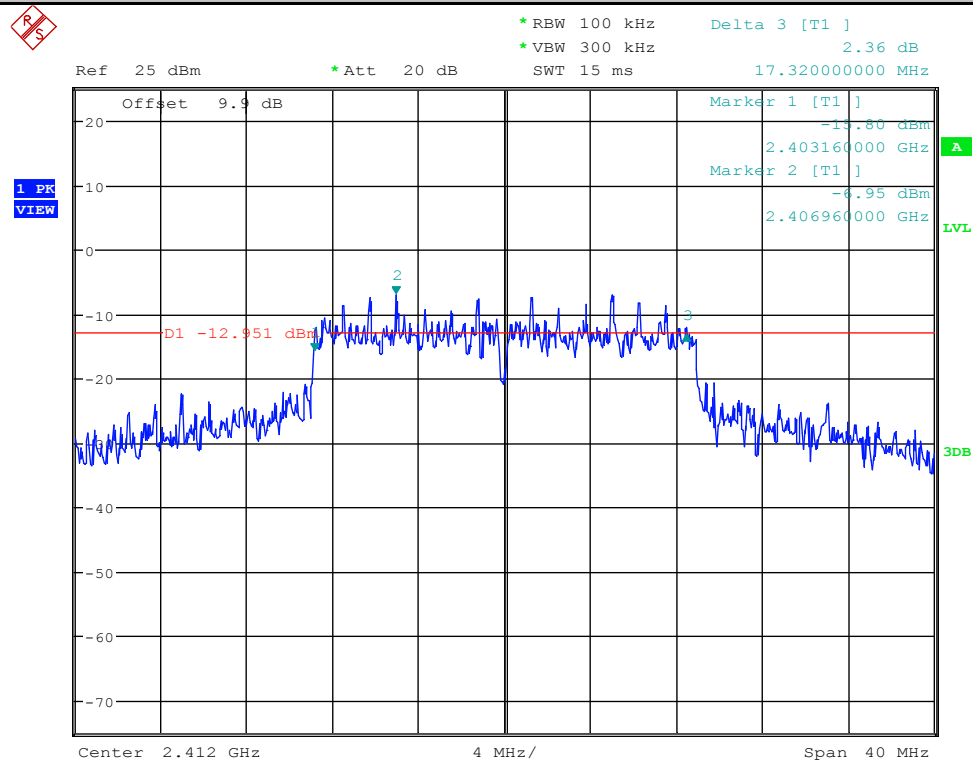


Date: 26.DEC.2017 19:48:46

6dB Bandwidth_11N20MIMO_2412_Ant2

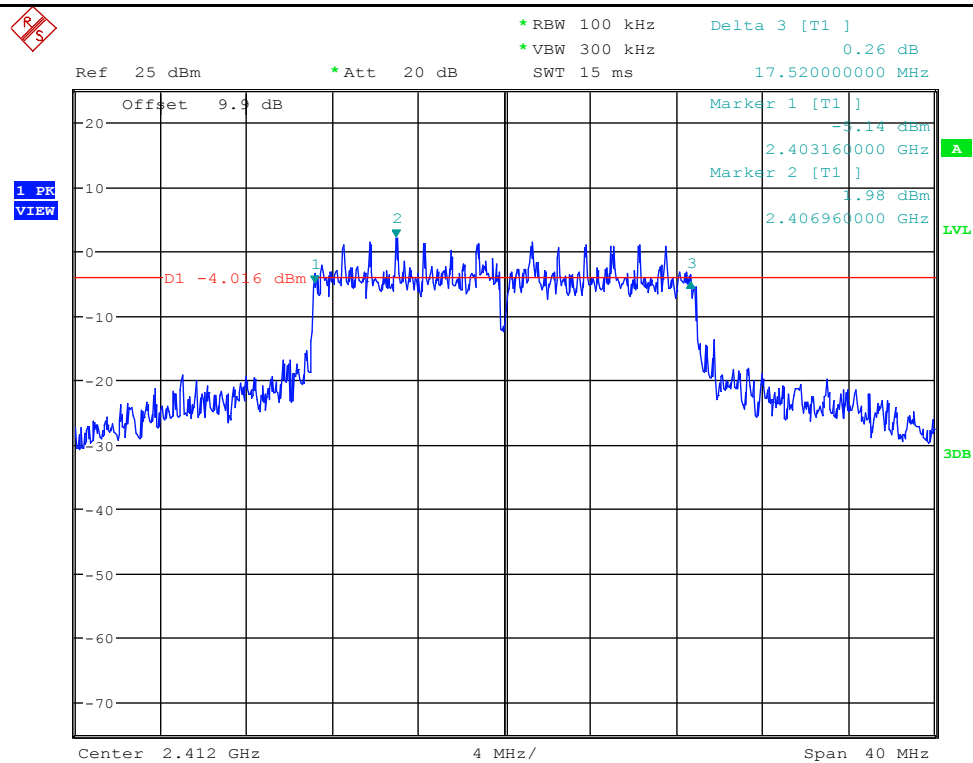


Date: 26.DEC.2017 19:51:15

6dB Bandwidth_11N20MIMO_2437_Ant1

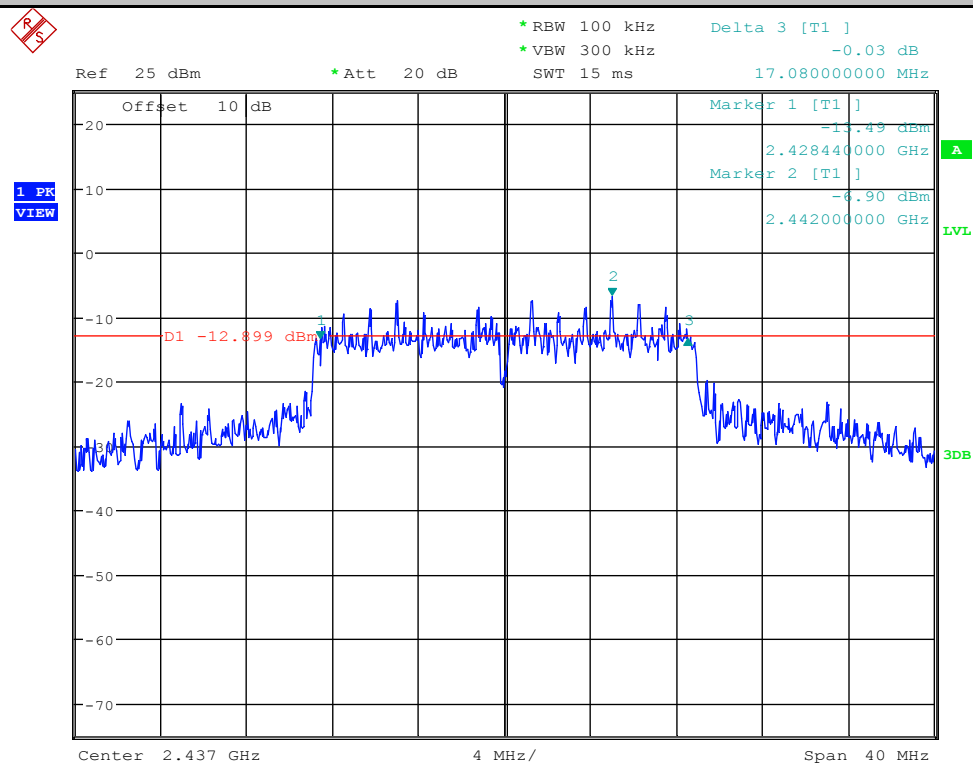


Date: 26.DEC.2017 18:22:15

6dB Bandwidth_11N20MIMO_2437_Ant2

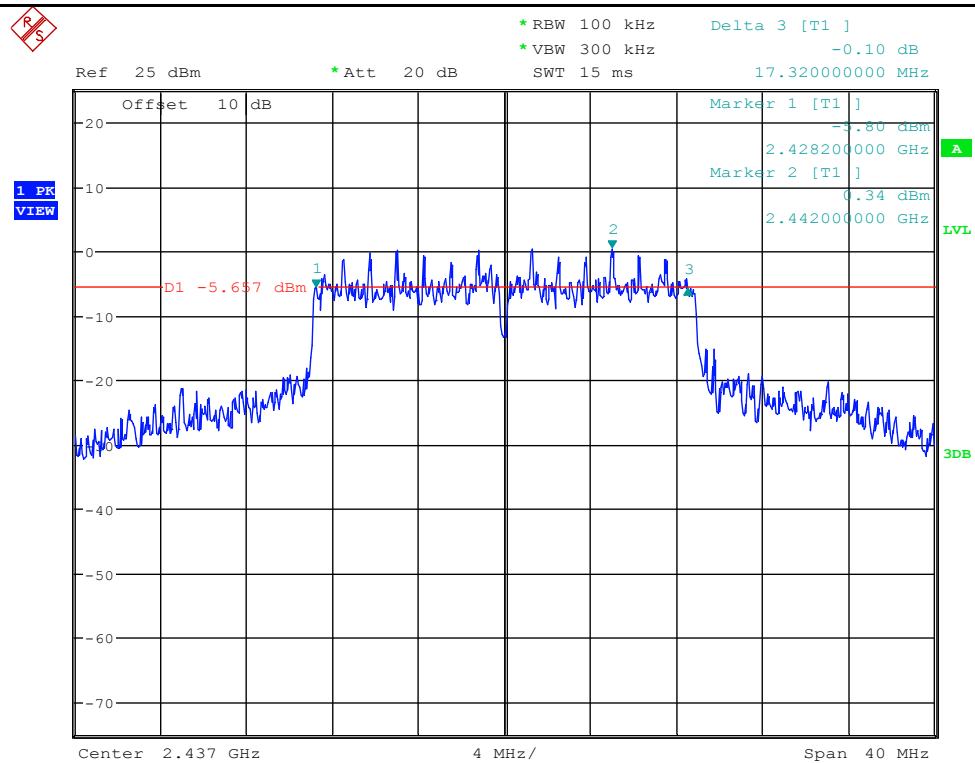


Date: 26.DEC.2017 18:23:47

6dB Bandwidth_11N20MIMO_2462_Ant1

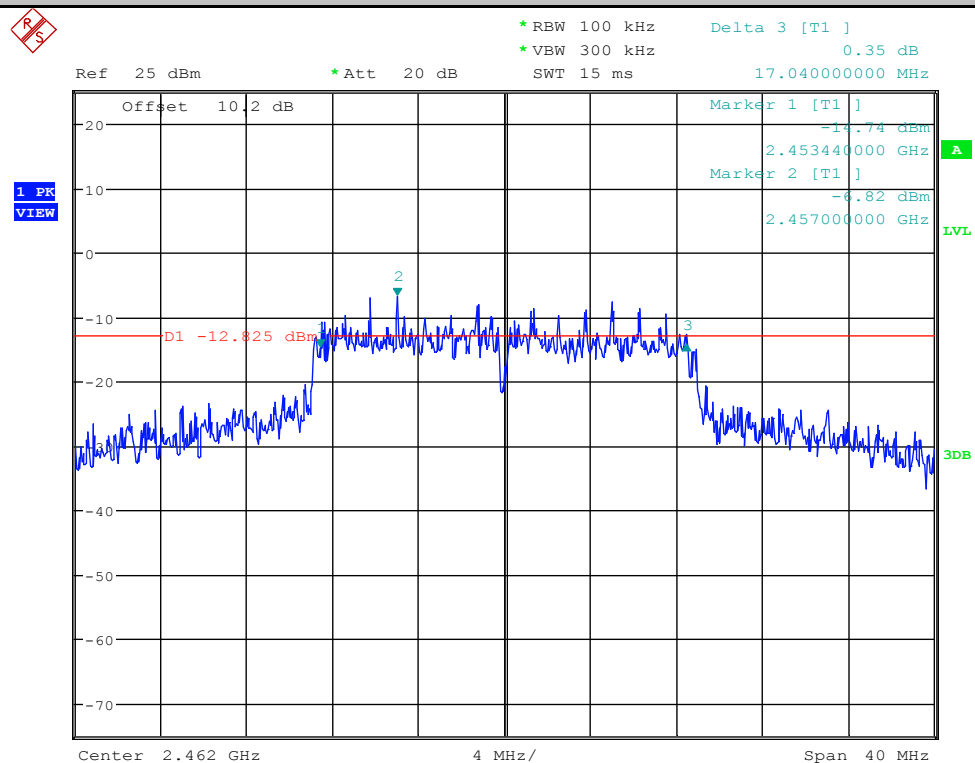


Date: 26.DEC.2017 18:26:21

6dB Bandwidth_11N20MIMO_2462_Ant2

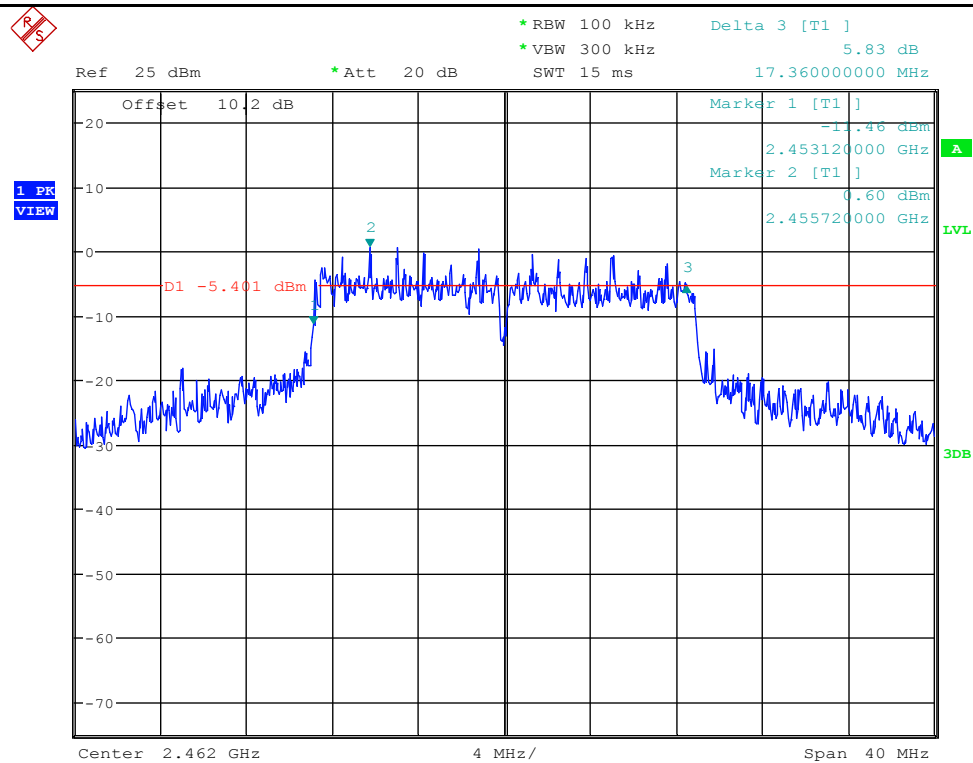


Date: 26.DEC.2017 18:28:51

6dB Bandwidth_11N40MIMO_2422_Ant1

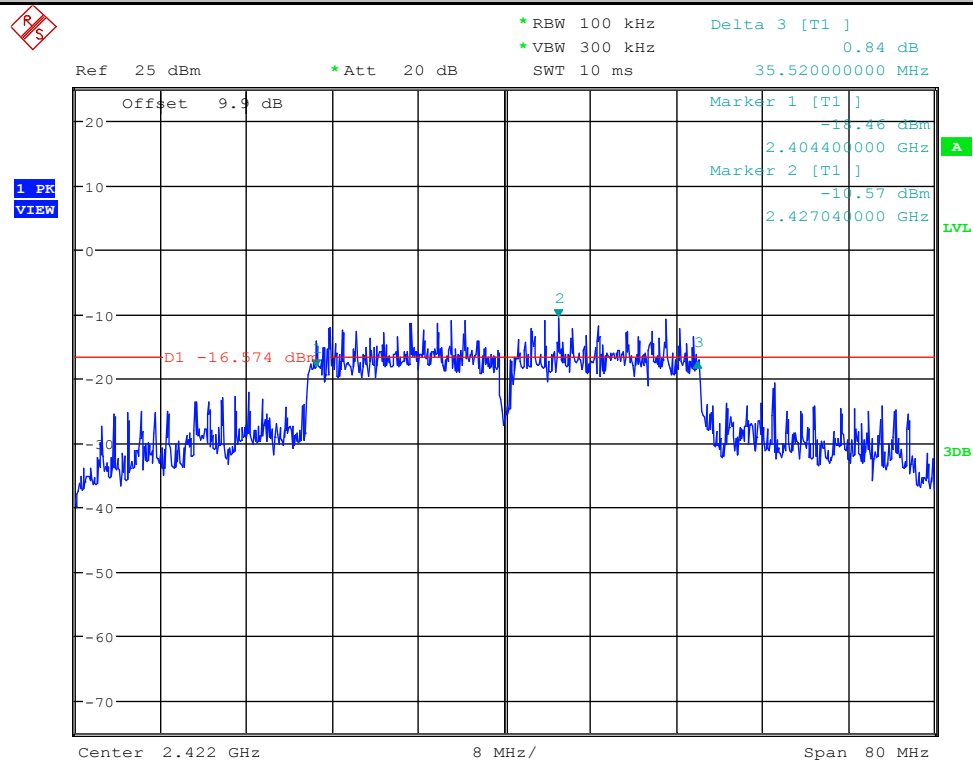


Date: 26.DEC.2017 18:32:38


6dB Bandwidth_11N40MIMO_2422_Ant2



6dB Bandwidth_11N40MIMO_2437_Ant1




6dB Bandwidth_11N40MIMO_2437_Ant2

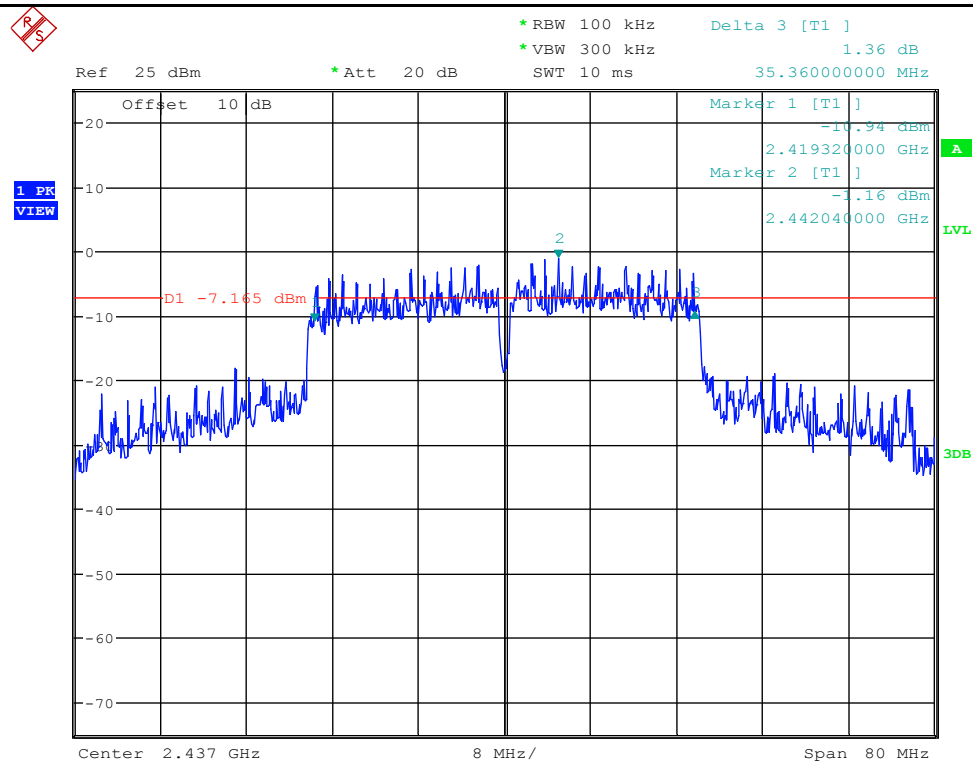

Date: 26.DEC.2017 18:43:32

6dB Bandwidth_11N40MIMO_2452_Ant1

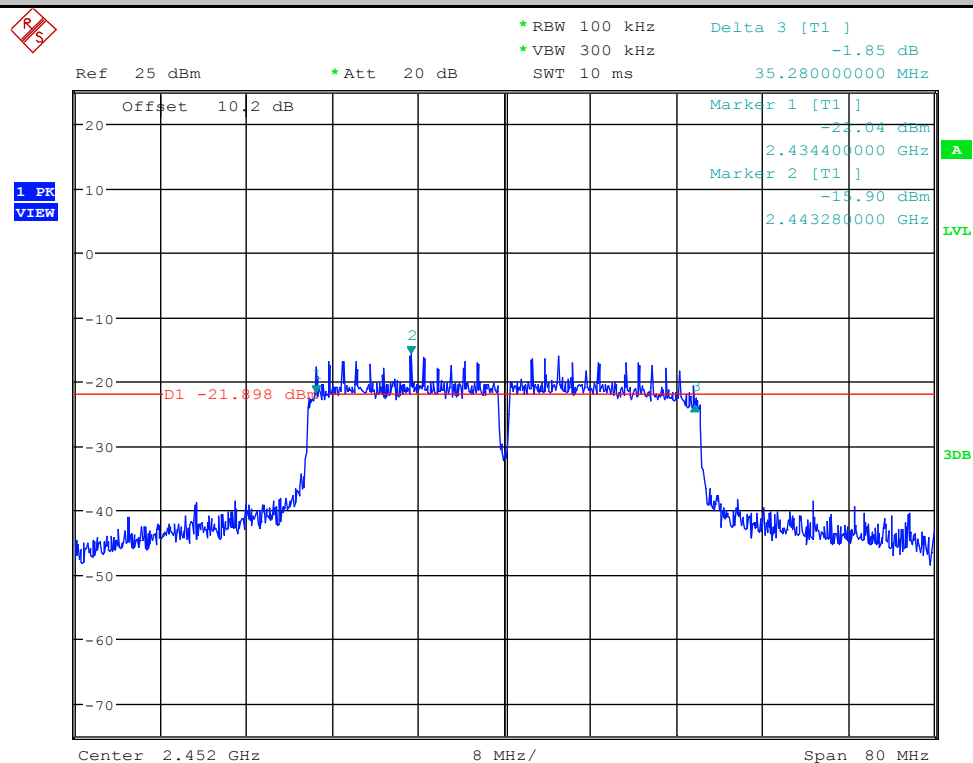


Date: 2.JAN.2018 10:48:29

6dB Bandwidth_11N40MIMO_2452_Ant2




Date: 27.DEC.2017 08:37:26

Occupied Bandwidth_11BMIMO_2412_Ant2

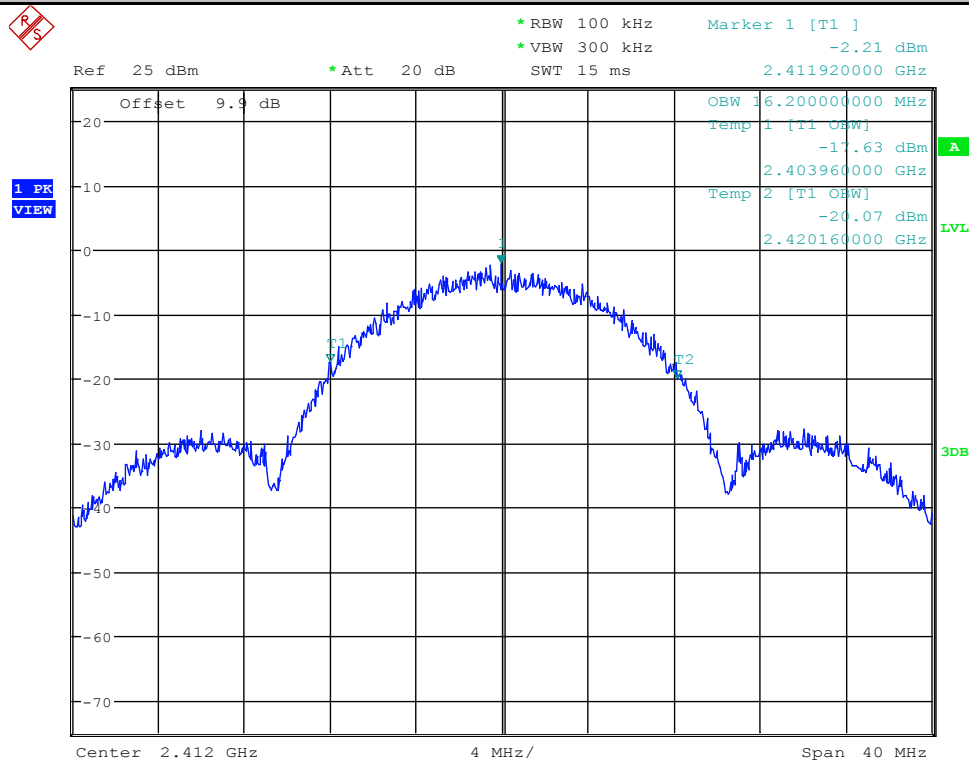


Date: 27.DEC.2017 08:39:57

Occupied Bandwidth_11BMIMO_2437_Ant1

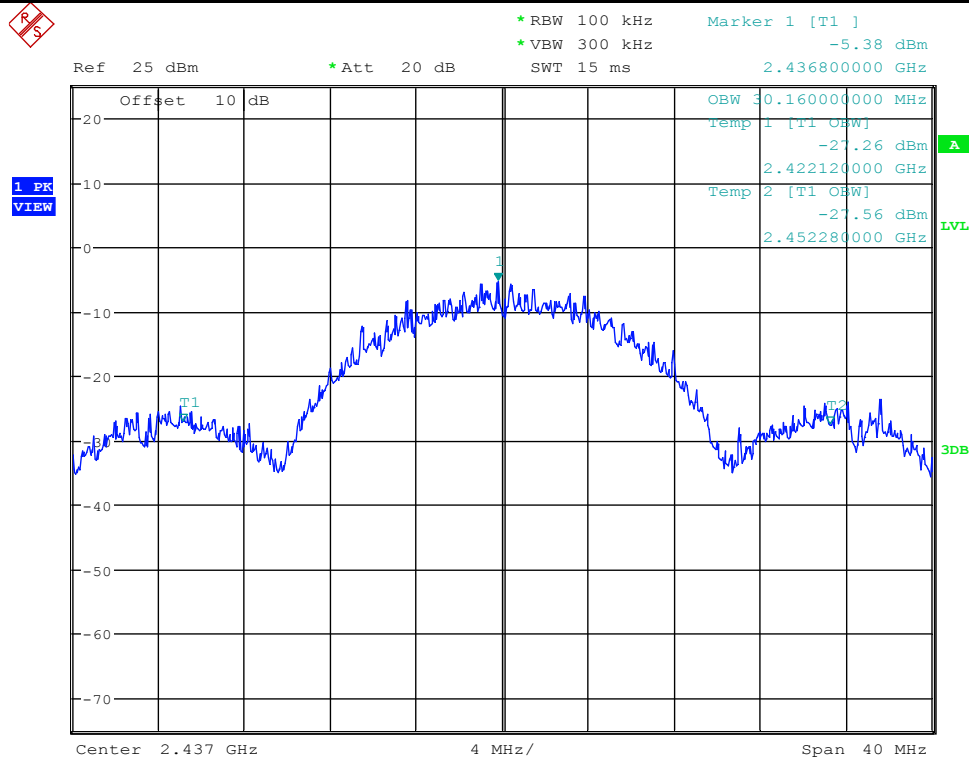


Date: 26.DEC.2017 19:12:59

Occupied Bandwidth_11BMIMO_2437_Ant2

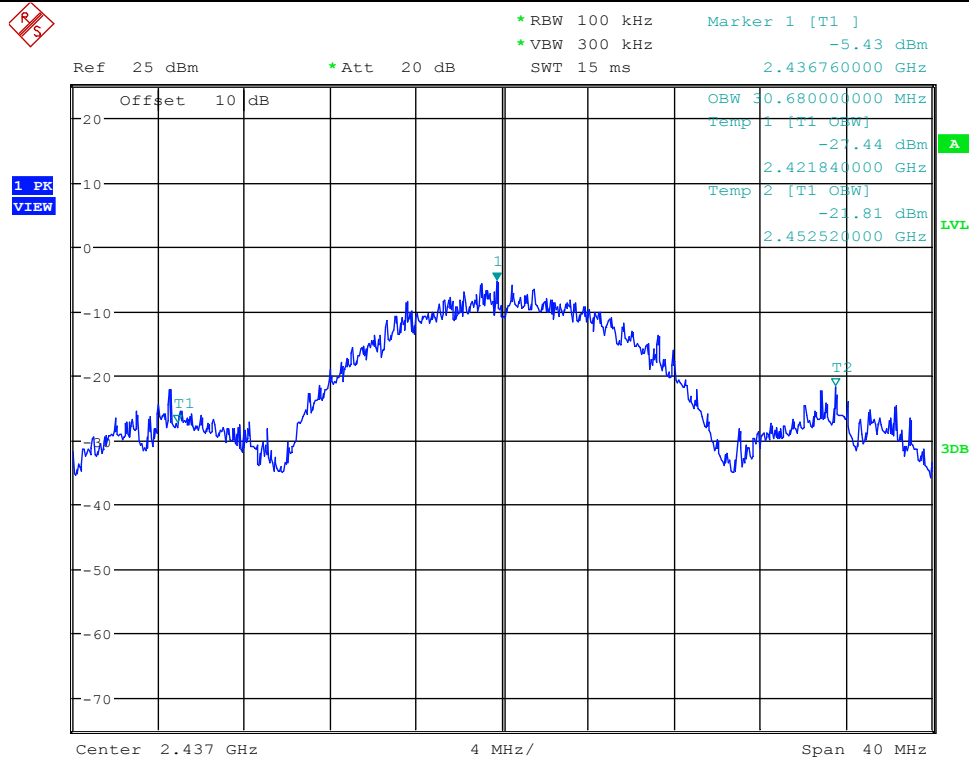


Date: 26.DEC.2017 19:14:31

Occupied Bandwidth_11BMIMO_2462_Ant1

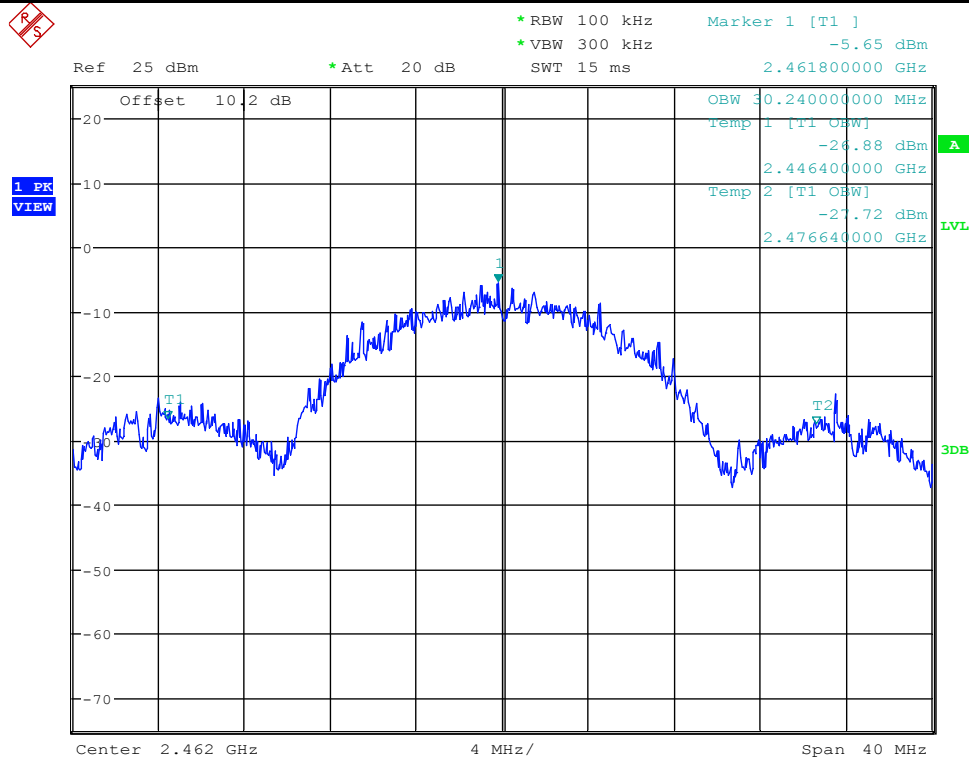


Date: 26.DEC.2017 19:21:59


Occupied Bandwidth_11BMIMO_2462_Ant2

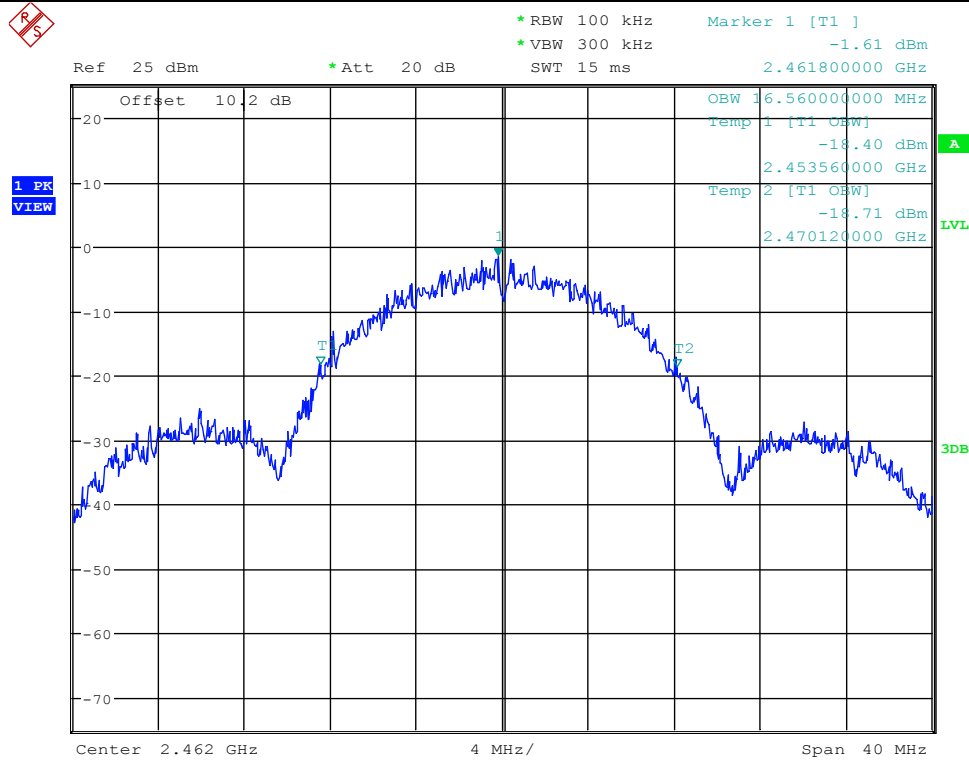

Occupied Bandwidth_11GMIMO_2412_Ant1

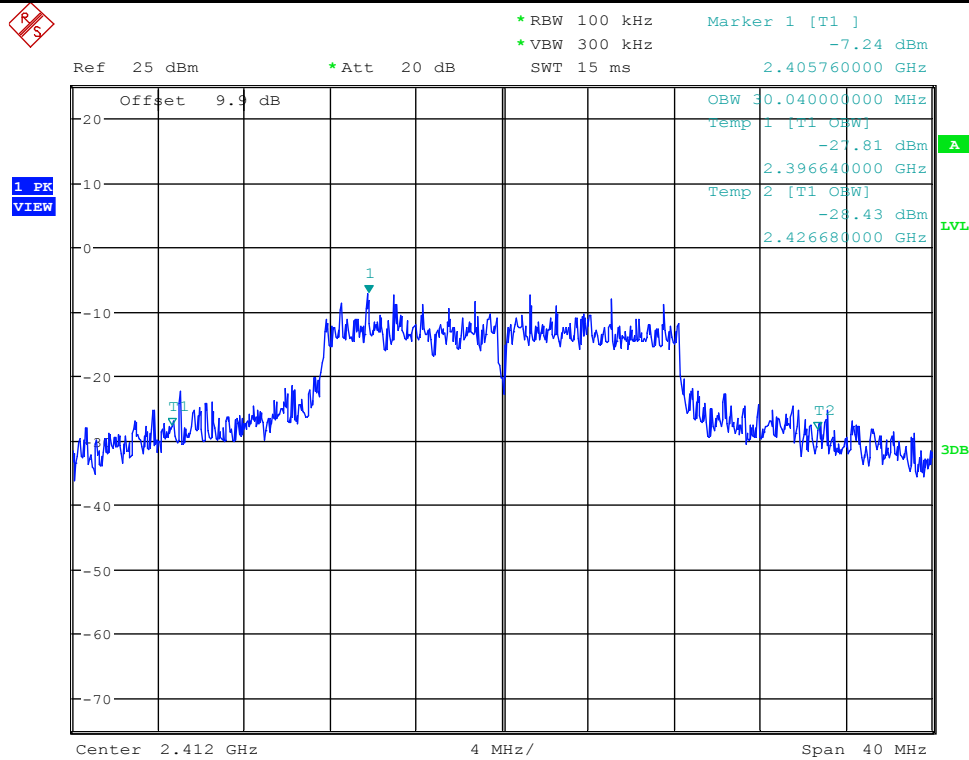


Occupied Bandwidth_11GMIMO_2412_Ant2

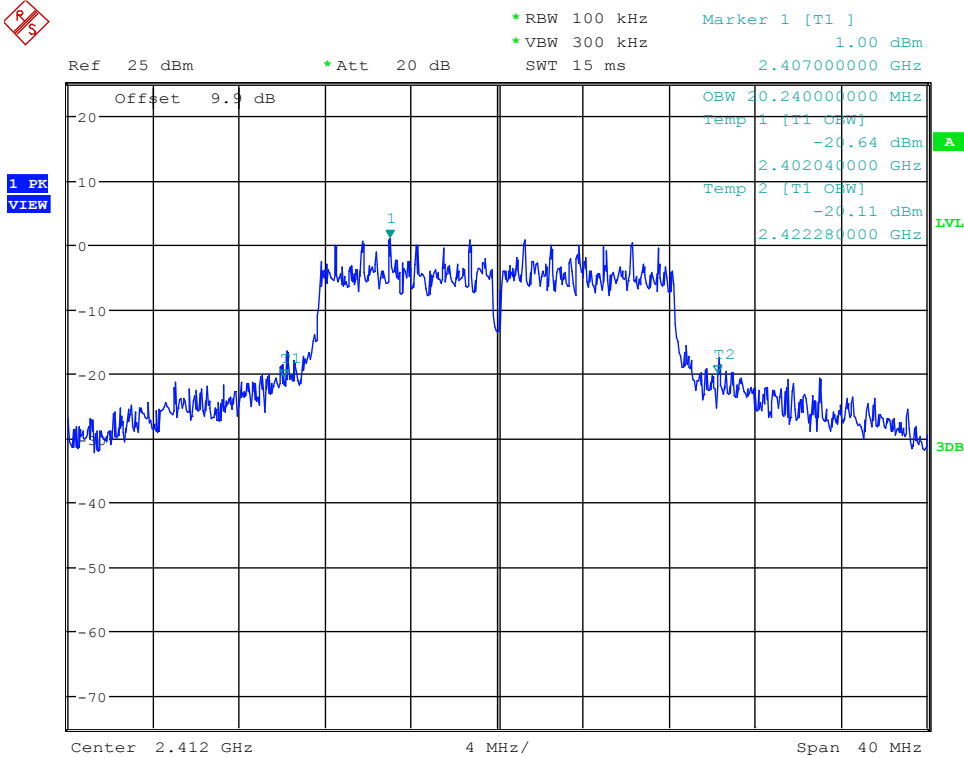


Date: 26.DEC.2017 19:34:15

Occupied Bandwidth_11GMIMO_2437_Ant1

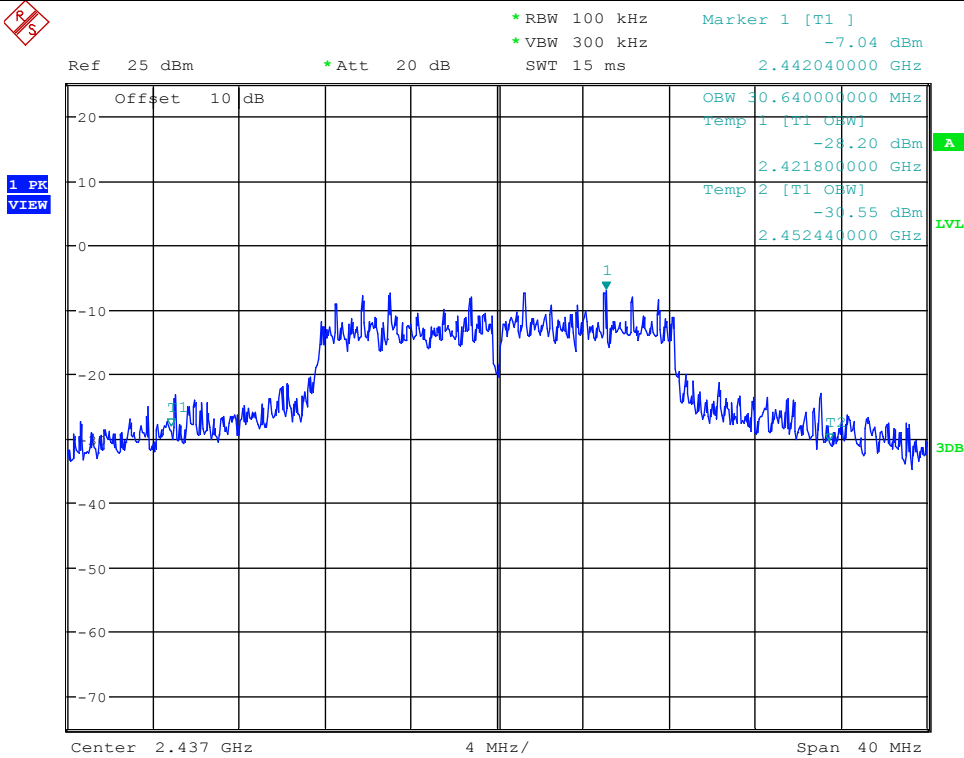


Date: 26.DEC.2017 19:38:20

Occupied Bandwidth_11GMIMO_2437_Ant2

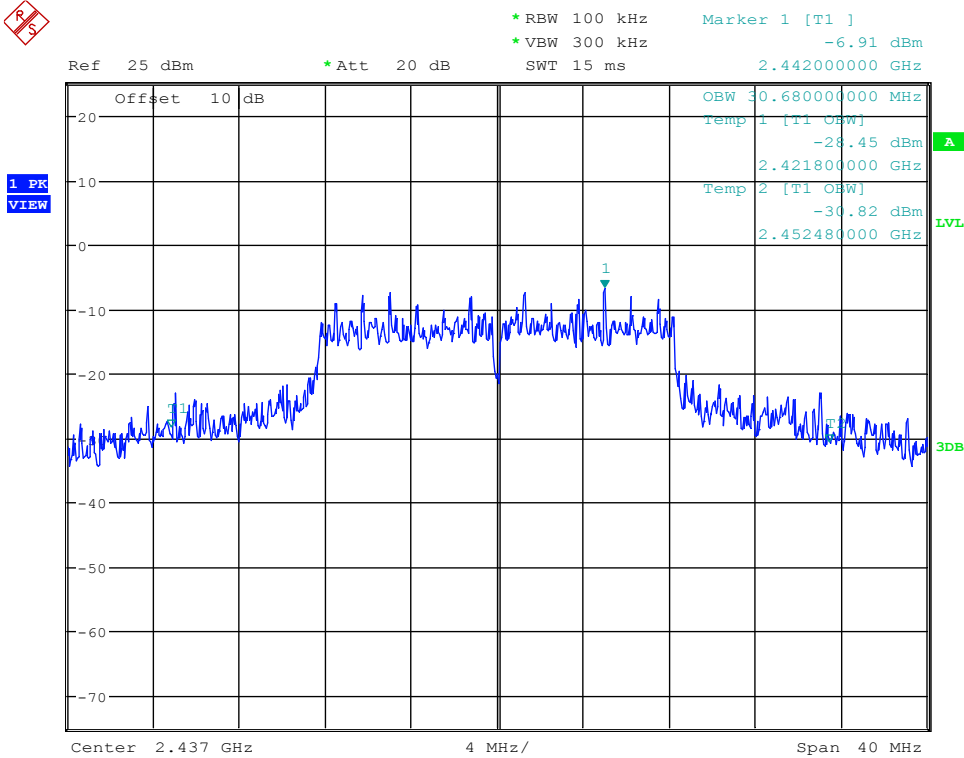


Date: 26.DEC.2017 19:39:52

Occupied Bandwidth_11GMIMO_2462_Ant1

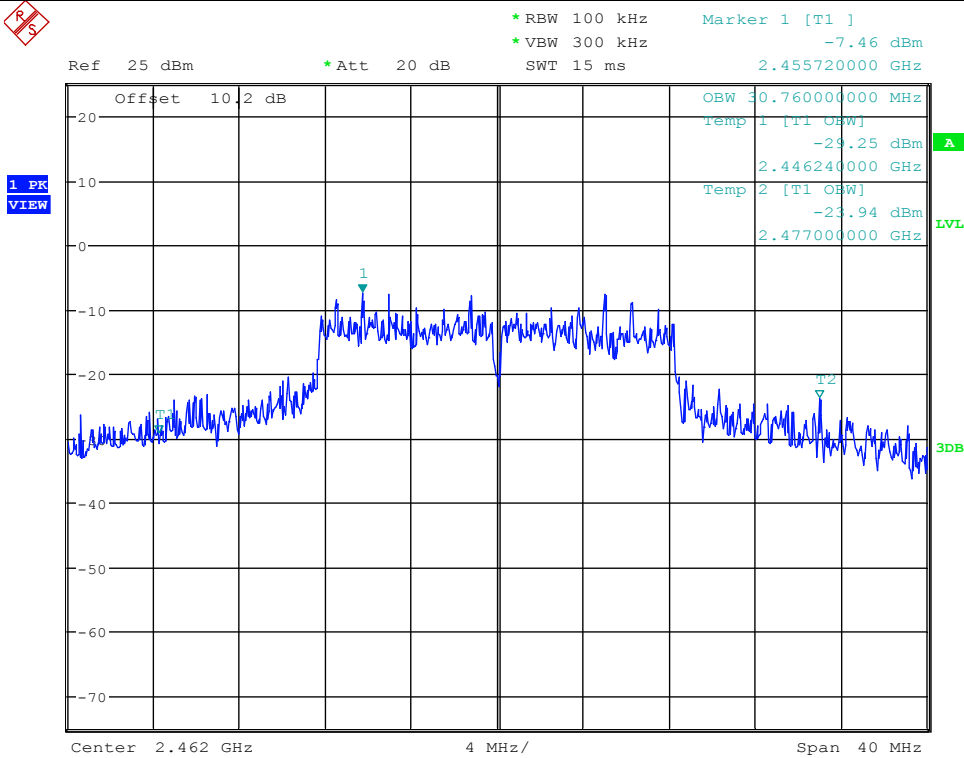


Date: 26.DEC.2017 19:42:36

Occupied Bandwidth_11GMIMO_2462_Ant2

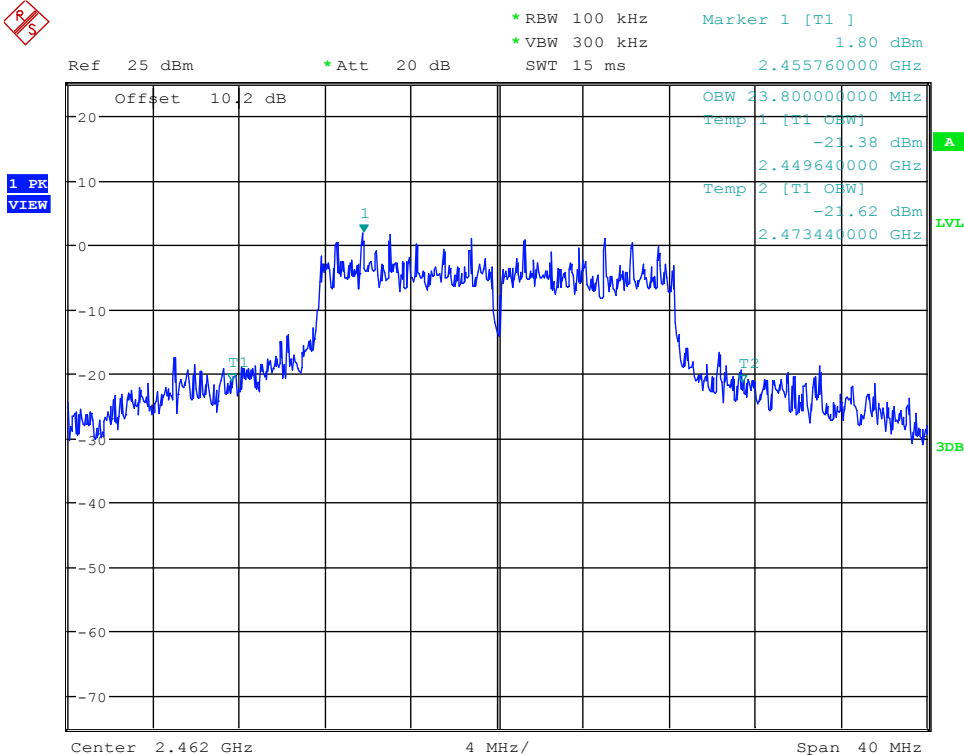


Date: 26.DEC.2017 19:45:04

Occupied Bandwidth_11N20MIMO_2412_Ant1

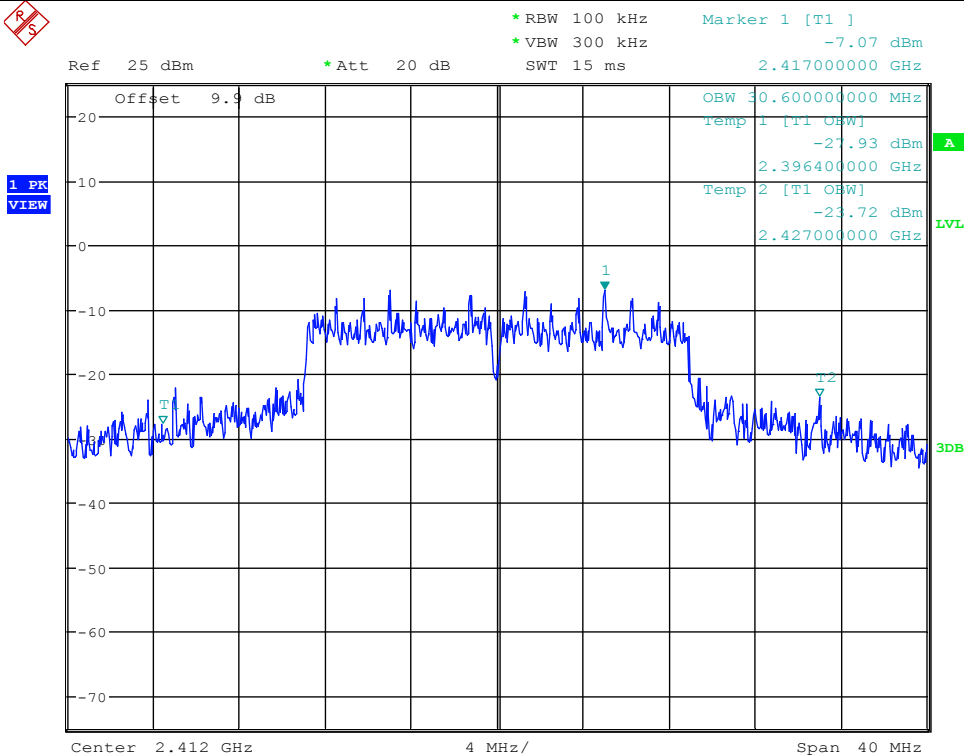


Date: 26.DEC.2017 19:49:04

Occupied Bandwidth_11N20MIMO_2412_Ant2

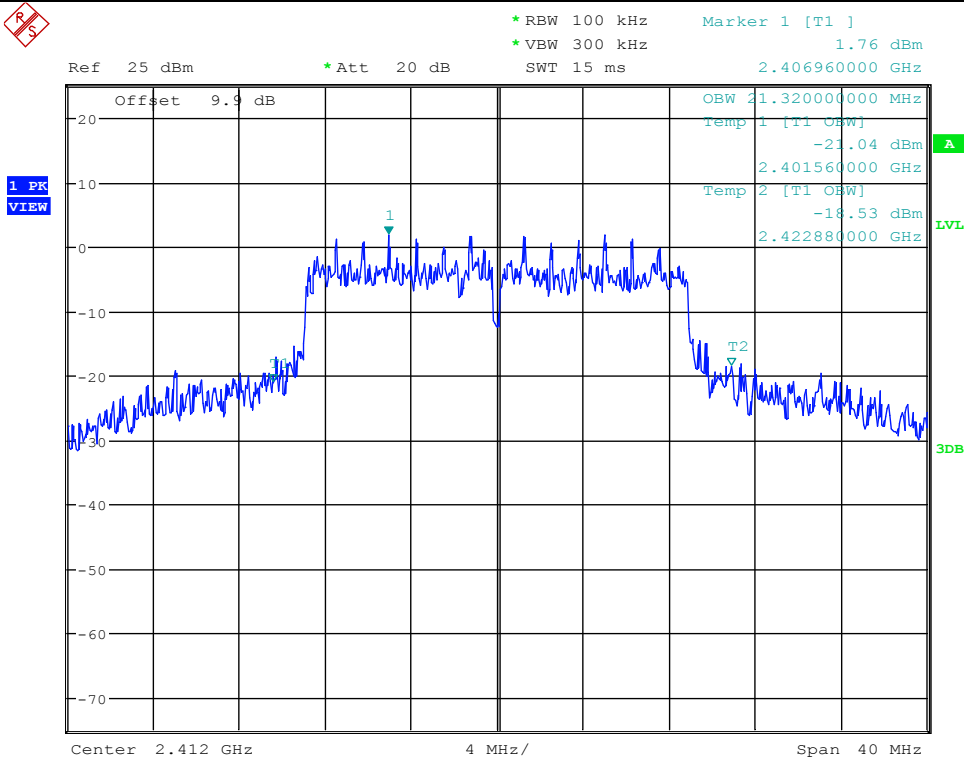

Date: 26.DEC.2017 19:51:33

Occupied Bandwidth_11N20MIMO_2437_Ant1

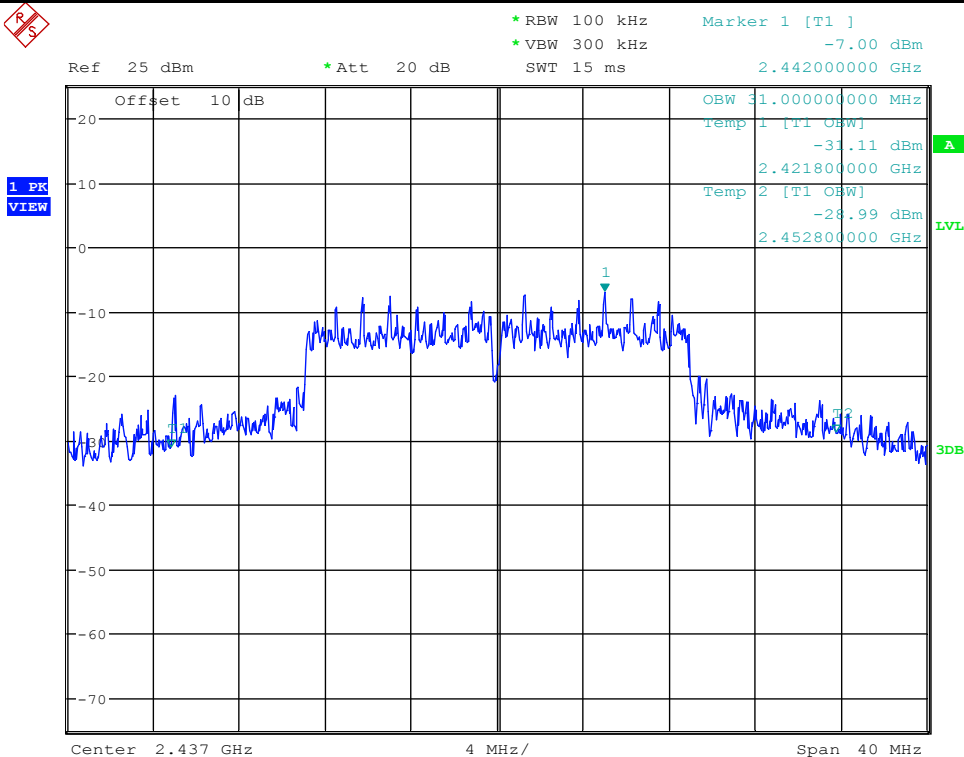

Date: 26.DEC.2017 18:22:33

Ref 25 dBm * Att 20 dB




Date: 26.DEC.2017 18:24:05

Ref 25 dBm * Att 20 dB




Date: 26.DEC.2017 18:26:40

Occupied Bandwidth_11N20MIMO_2462_Ant2

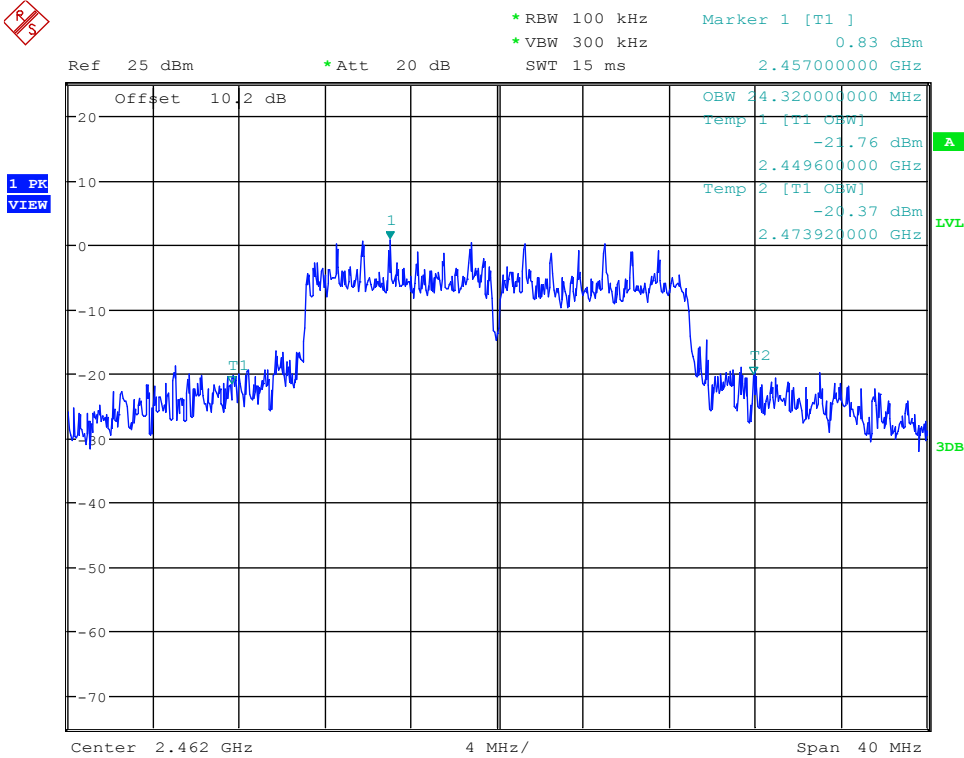


Date: 26.DEC.2017 18:29:09

Occupied Bandwidth_11N40MIMO_2422_Ant1

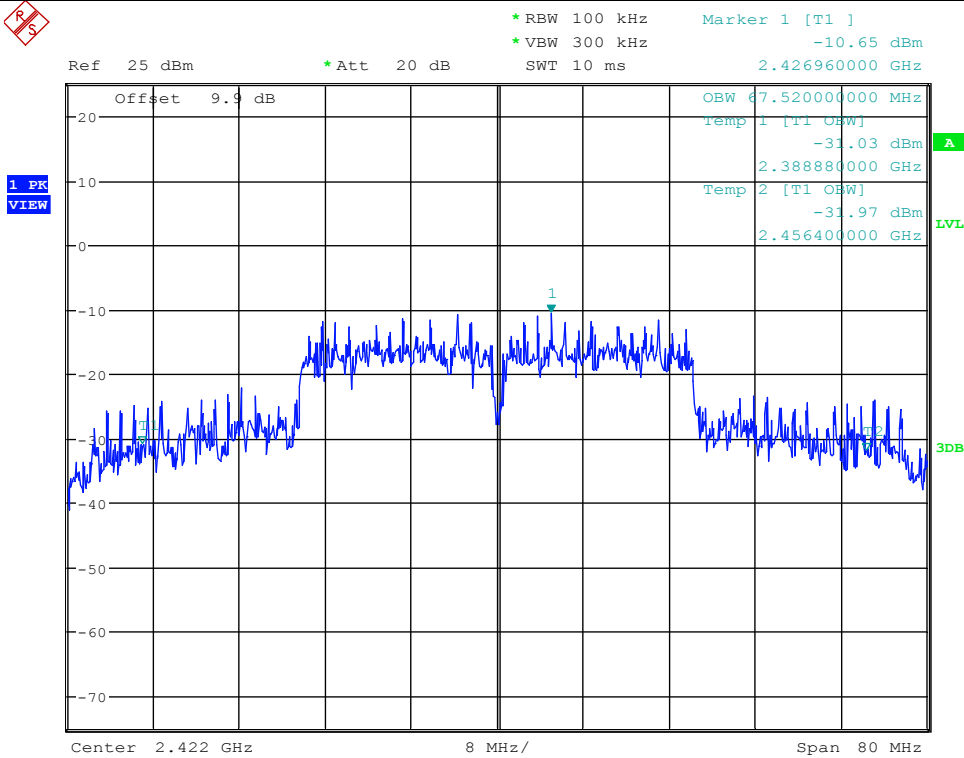


Date: 26.DEC.2017 18:32:56

Occupied Bandwidth_11N40MIMO_2422_Ant2

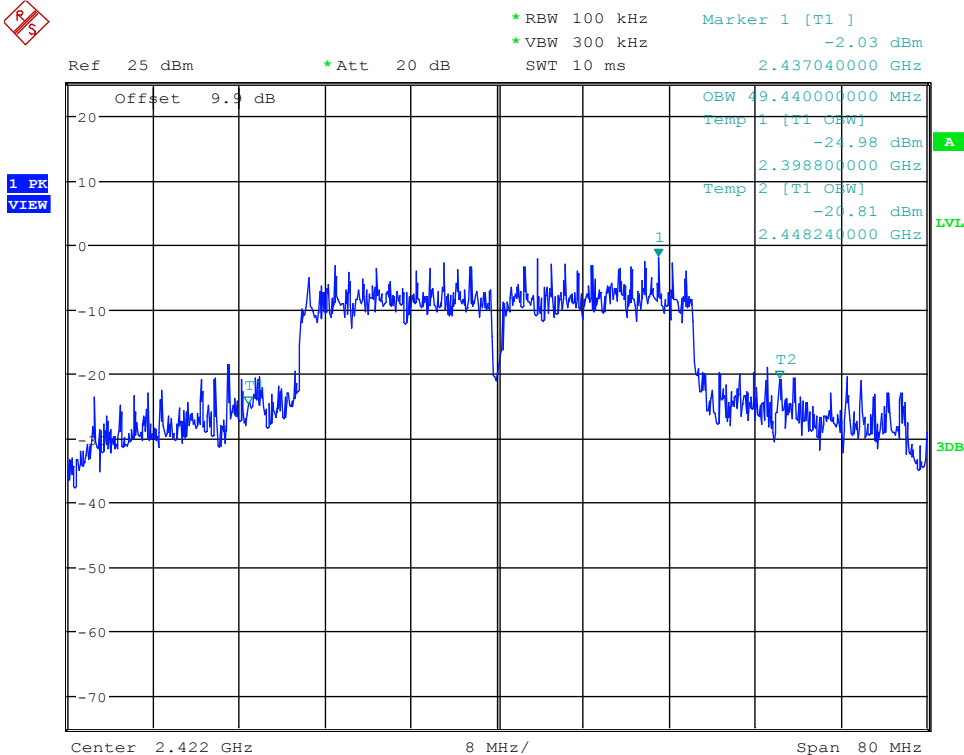


Date: 26.DEC.2017 18:35:24

Occupied Bandwidth_11N40MIMO_2437_Ant1

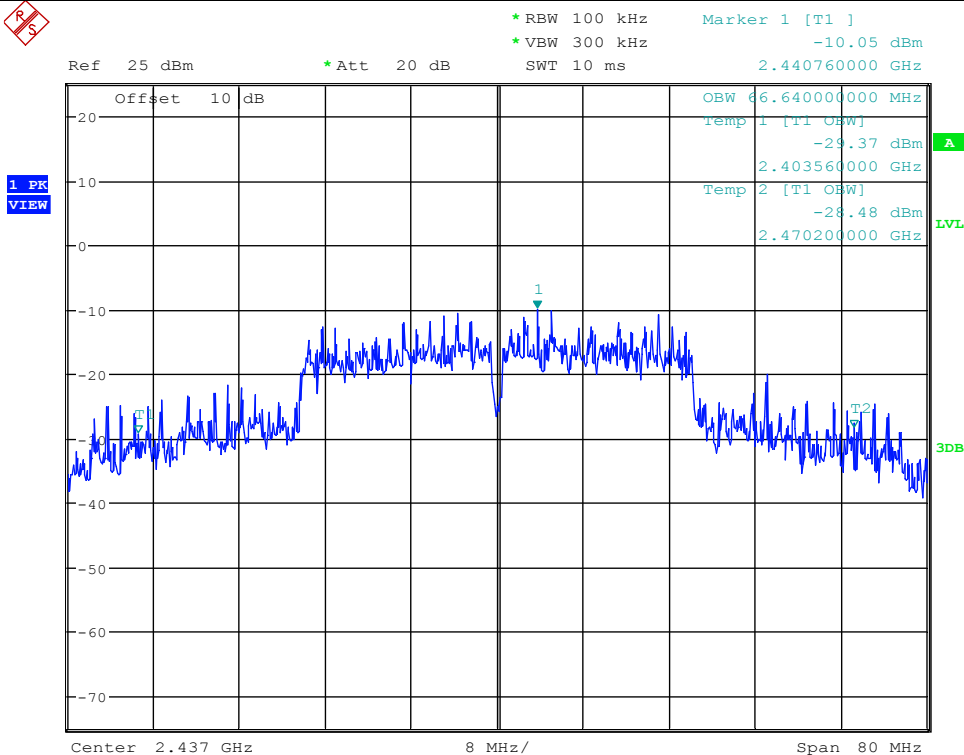


Date: 26.DEC.2017 18:42:17

Occupied Bandwidth_11N40MIMO_2437_Ant2

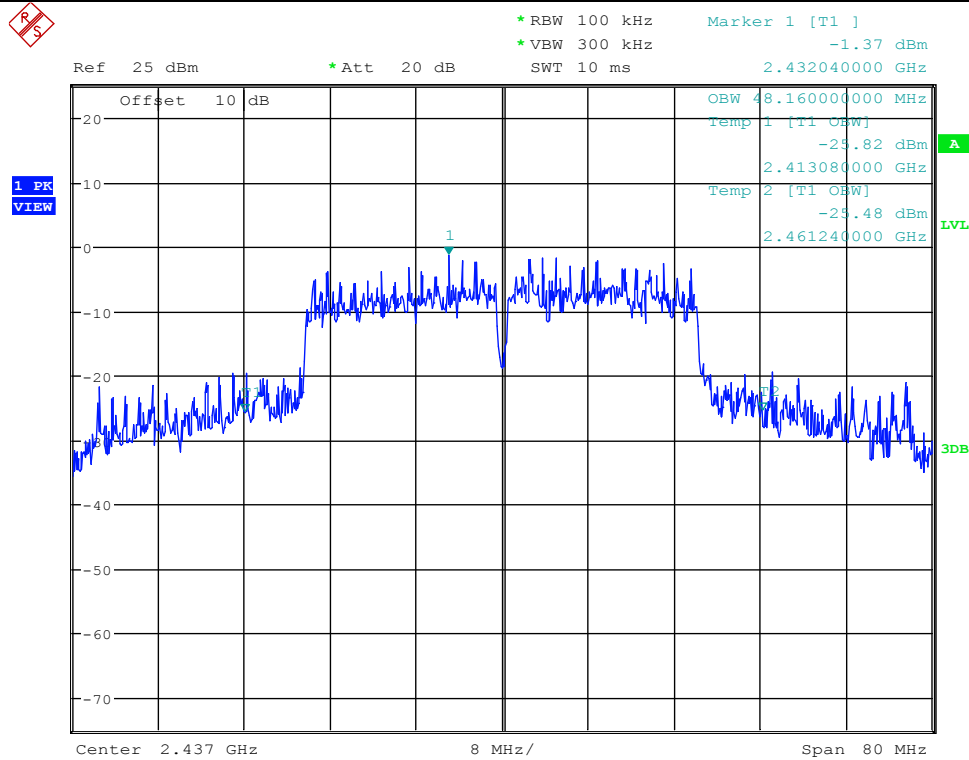


Date: 26.DEC.2017 18:43:50

Occupied Bandwidth_11N40MIMO_2452_Ant1

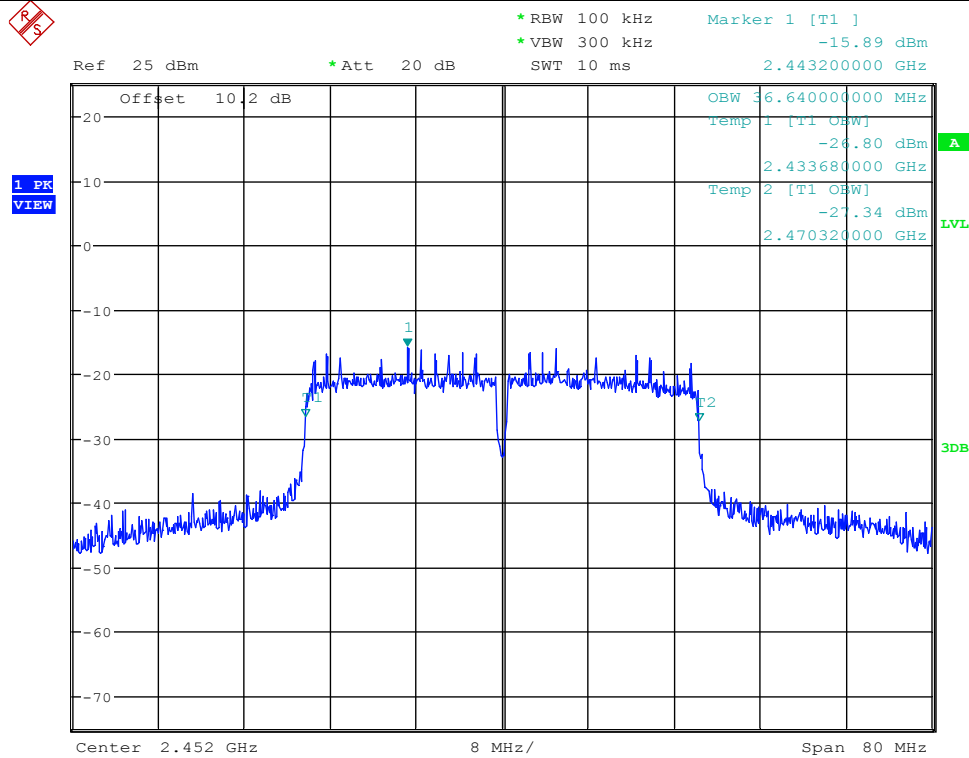

Date: 2.JAN.2018 10:48:47

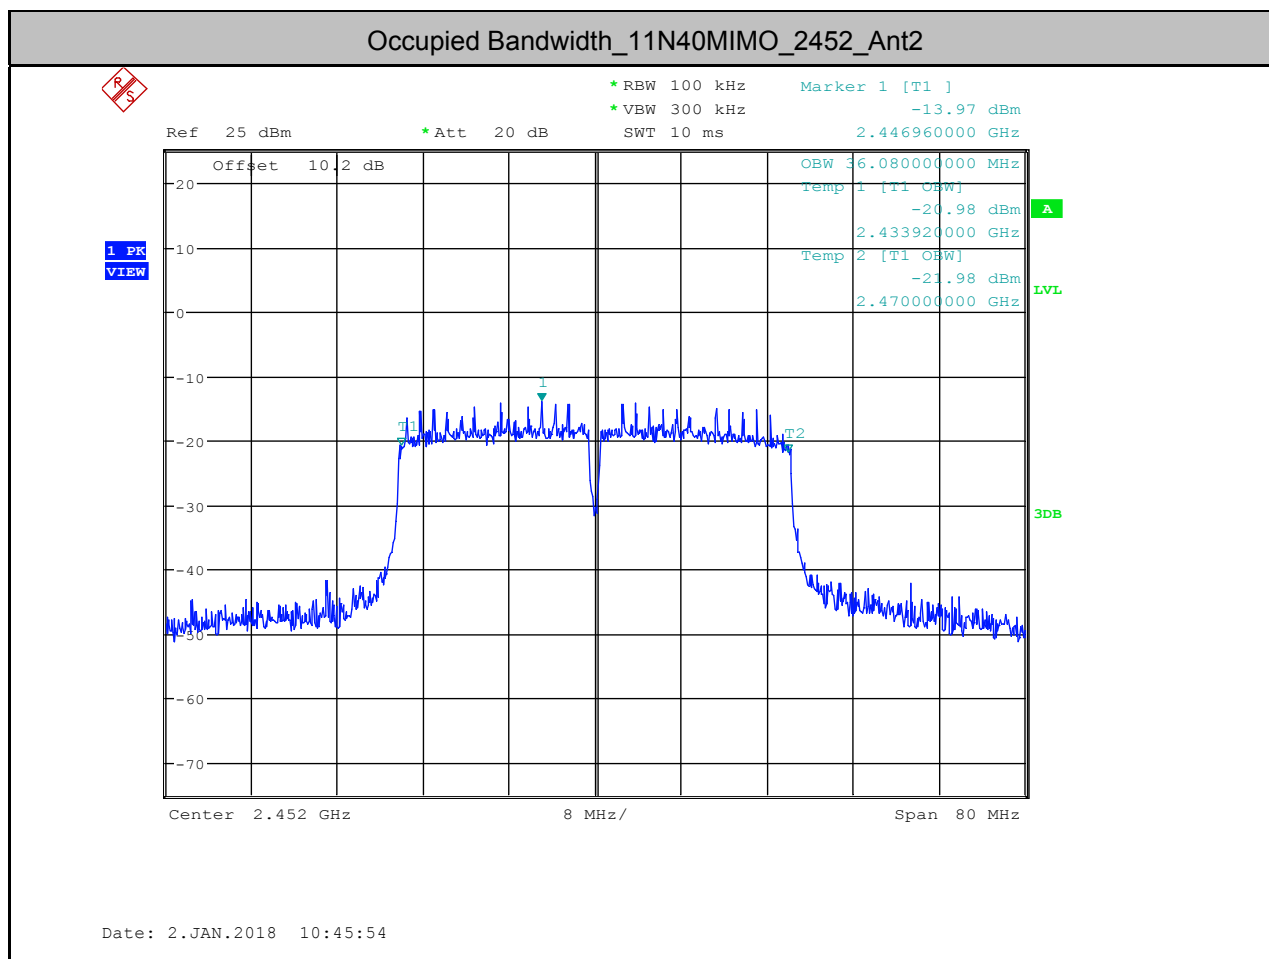

5. Conducted peak Output Power

5.1. Block diagram of test setup

Same as scetion 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power sensor.

5.4. Test Result

Test Mode	Test	Ant	Power[dBm]	Limit[dBm]	Verdict
11BMIMO	2412	Ant1	11.29	30	PASS
11BMIMO	2412	Ant2	14.07	30	PASS

11BMIMO	2412	Ant1+Ant2	15.91	30	PASS
11BMIMO	2437	Ant1	10.16	30	PASS
11BMIMO	2437	Ant2	10.16	30	PASS
11BMIMO	2437	Ant1+Ant2	13.17	30	PASS
11BMIMO	2462	Ant1	9.84	30	PASS
11BMIMO	2462	Ant2	13.77	30	PASS
11BMIMO	2462	Ant1+Ant2	15.25	30	PASS
11GMIMO	2412	Ant1	10.36	30	PASS
11GMIMO	2412	Ant2	18.99	30	PASS
11GMIMO	2412	Ant1+Ant2	19.55	30	PASS
11GMIMO	2437	Ant1	10.34	30	PASS
11GMIMO	2437	Ant2	10.35	30	PASS
11GMIMO	2437	Ant1+Ant2	13.36	30	PASS
11GMIMO	2462	Ant1	10.27	30	PASS
11GMIMO	2462	Ant2	19.16	30	PASS
11GMIMO	2462	Ant1+Ant2	19.69	30	PASS
11N20MIMO	2412	Ant1	10.71	30	PASS
11N20MIMO	2412	Ant2	19.77	30	PASS
11N20MIMO	2412	Ant1+Ant2	20.28	30	PASS
11N20MIMO	2437	Ant1	10.38	30	PASS
11N20MIMO	2437	Ant2	18.29	30	PASS
11N20MIMO	2437	Ant1+Ant2	18.94	30	PASS
11N20MIMO	2462	Ant1	10.36	30	PASS
11N20MIMO	2462	Ant2	18.27	30	PASS
11N20MIMO	2462	Ant1+Ant2	18.92	30	PASS
11N40MIMO	2422	Ant1	10.04	30	PASS
11N40MIMO	2422	Ant2	18.76	30	PASS
11N40MIMO	2422	Ant1+Ant2	19.31	30	PASS
11N40MIMO	2437	Ant1	10.05	30	PASS
11N40MIMO	2437	Ant2	19.26	30	PASS
11N40MIMO	2437	Ant1+Ant2	19.75	30	PASS
11N40MIMO	2452	Ant1	5.62	30	PASS
11N40MIMO	2452	Ant2	7.91	30	PASS
11N40MIMO	2452	Ant1+Ant2	11.44	30	PASS

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:


Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5times the DTS bandwidth
Detector Mode:	PK
Sweep time:	auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test Result

Test Mode	Test Channel	Ant	PSD[dBm/MHz]	Limit[dBm/MHz]	Verdict
11BMIMO	2412	Ant1	-10.21	8.00	PASS
11BMIMO	2412	Ant2	-7.81	8.00	PASS
11BMIMO	2412	Ant1+Ant2	-5.84	8.00	PASS
11BMIMO	2437	Ant1	-7.87	8.00	PASS
11BMIMO	2437	Ant2	-3.28	8.00	PASS
11BMIMO	2437	Ant1+Ant2	-1.98	8.00	PASS
11BMIMO	2462	Ant1	-7.69	8.00	PASS
11BMIMO	2462	Ant2	-5.13	8.00	PASS
11BMIMO	2462	Ant1+Ant2	-3.21	8.00	PASS
11GMIMO	2412	Ant1	-12.9	8.00	PASS
11GMIMO	2412	Ant2	-4.46	8.00	PASS
11GMIMO	2412	Ant1+Ant2	-3.88	8.00	PASS
11GMIMO	2437	Ant1	-13.01	8.00	PASS


11GMIMO	2437	Ant2	-13.01	8.00	PASS
11GMIMO	2437	Ant1+Ant2	-10	8.00	PASS
11GMIMO	2462	Ant1	-13.01	8.00	PASS
11GMIMO	2462	Ant2	-4.02	8.00	PASS
11GMIMO	2462	Ant1+Ant2	-3.5	8.00	PASS
11N20MIMO	2412	Ant1	-11.84	8.00	PASS
11N20MIMO	2412	Ant2	-3.42	8.00	PASS
11N20MIMO	2412	Ant1+Ant2	-2.84	8.00	PASS
11N20MIMO	2437	Ant1	-11.51	8.00	PASS
11N20MIMO	2437	Ant2	-3.91	8.00	PASS
11N20MIMO	2437	Ant1+Ant2	-3.21	8.00	PASS
11N20MIMO	2462	Ant1	-13.03	8.00	PASS
11N20MIMO	2462	Ant2	-4.91	8.00	PASS
11N20MIMO	2462	Ant1+Ant2	-4.29	8.00	PASS
11N40MIMO	2422	Ant1	-15.79	8.00	PASS
11N40MIMO	2422	Ant2	-7.43	8.00	PASS
11N40MIMO	2422	Ant1+Ant2	-6.84	8.00	PASS
11N40MIMO	2437	Ant1	-15.58	8.00	PASS
11N40MIMO	2437	Ant2	-6.65	8.00	PASS
11N40MIMO	2437	Ant1+Ant2	-6.13	8.00	PASS
11N40MIMO	2452	Ant1	-20.77	8.00	PASS
11N40MIMO	2452	Ant2	-18.79	8.00	PASS
11N40MIMO	2452	Ant1+Ant2	-15.38	8.00	PASS

6.5. Original test data

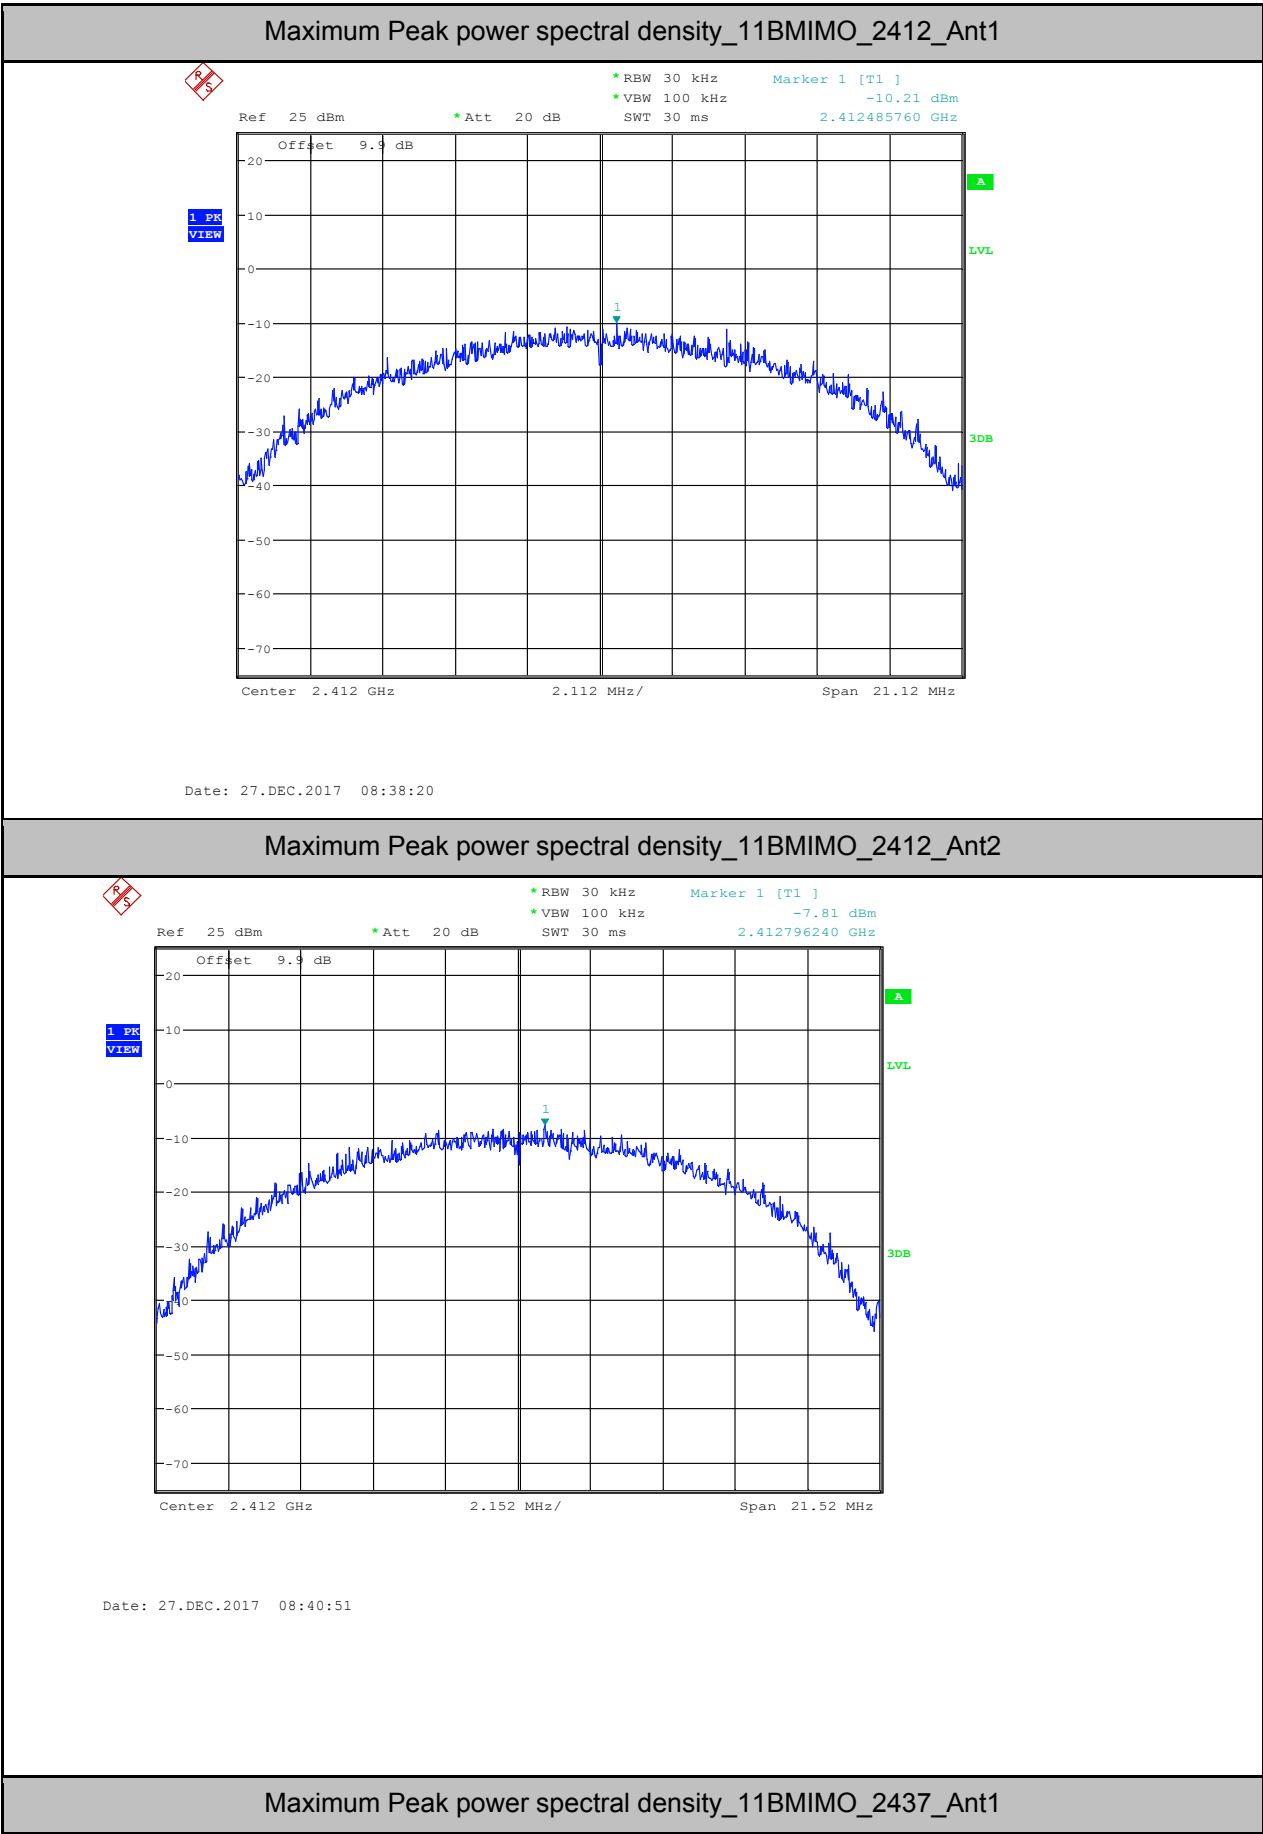



1 PK
VIEW

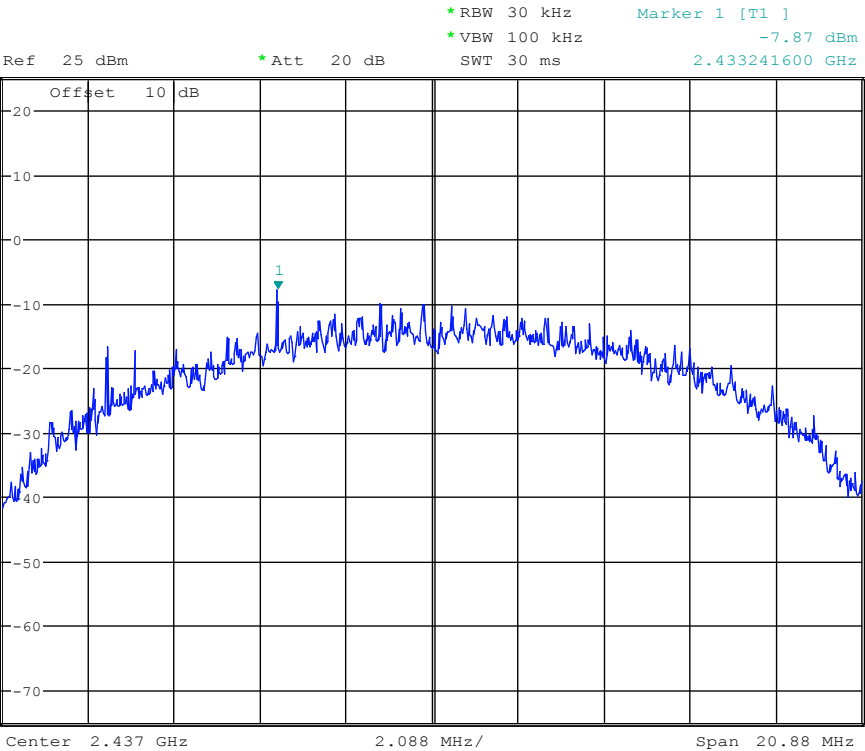


Date: 26.DEC.2017 19:13:51

Maximum Peak power spectral density_11BMIMO_2437_Ant2



1 PK
VIEW

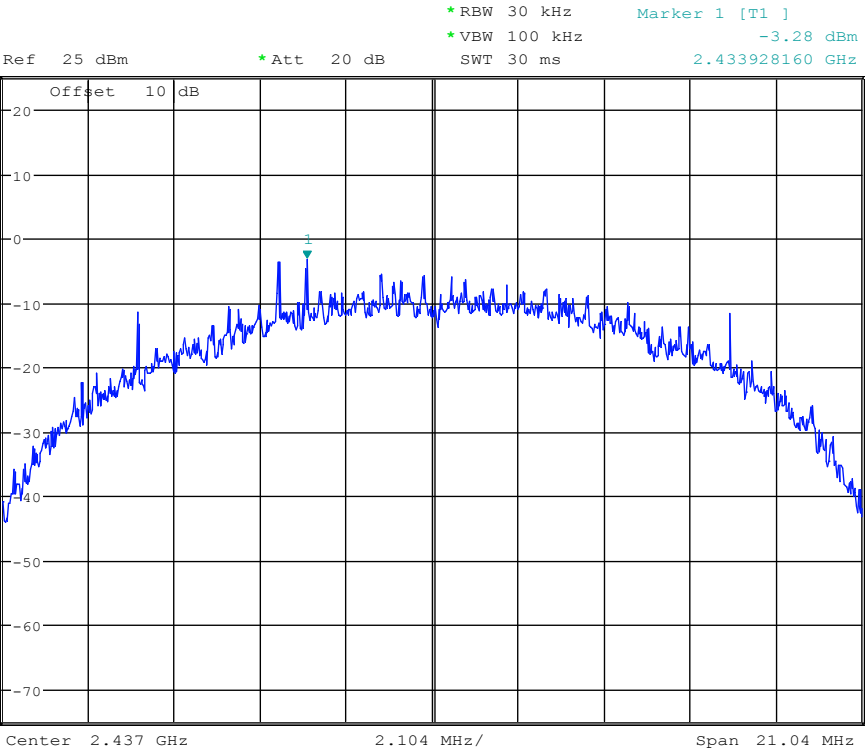


Date: 26.DEC.2017 19:15:25

Maximum Peak power spectral density_11BMIMO_2462_Ant1



1 PK
VIEW

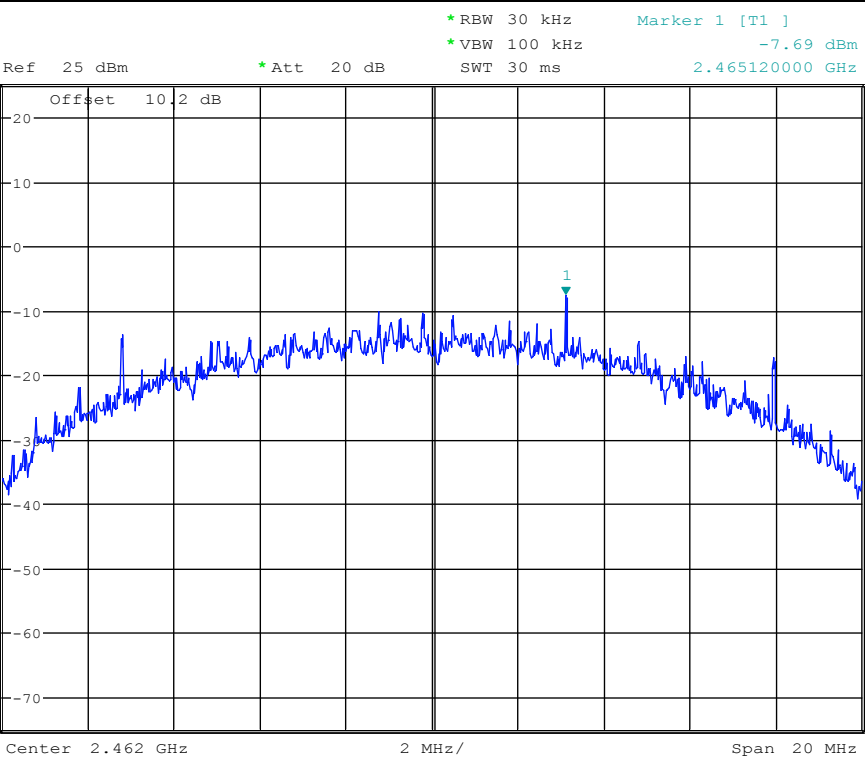


Date: 26.DEC.2017 19:22:52

Maximum Peak power spectral density_11BMIMO_2462_Ant2




1 PK
VIEW

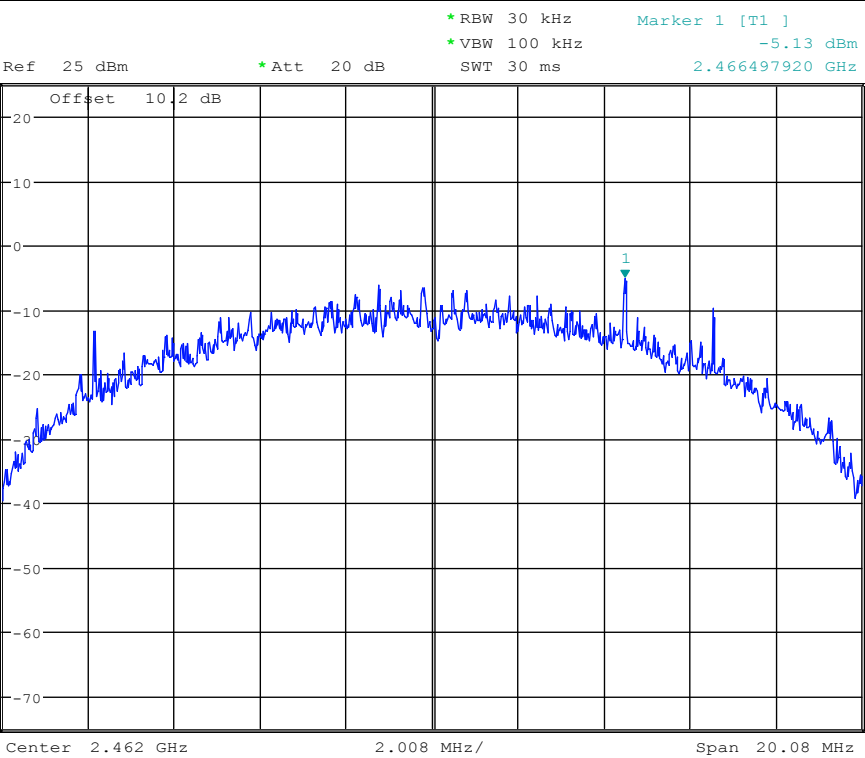


Date: 26.DEC.2017 19:25:22

Maximum Peak power spectral density_11GMIMO_2412_Ant1

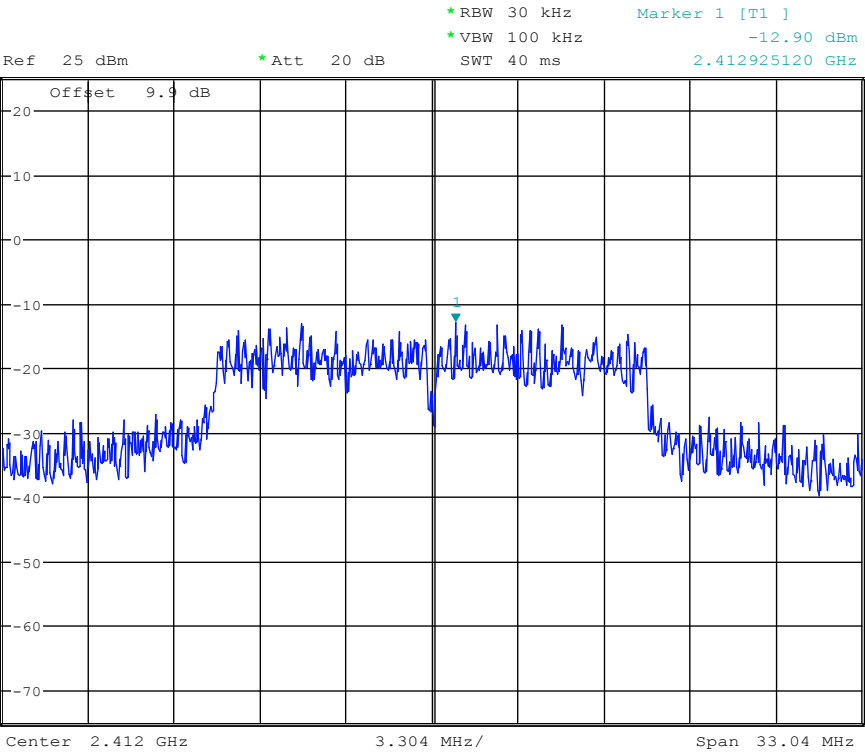

Date: 26.DEC.2017 19:32:39

Maximum Peak power spectral density_11GMIMO_2412_Ant2

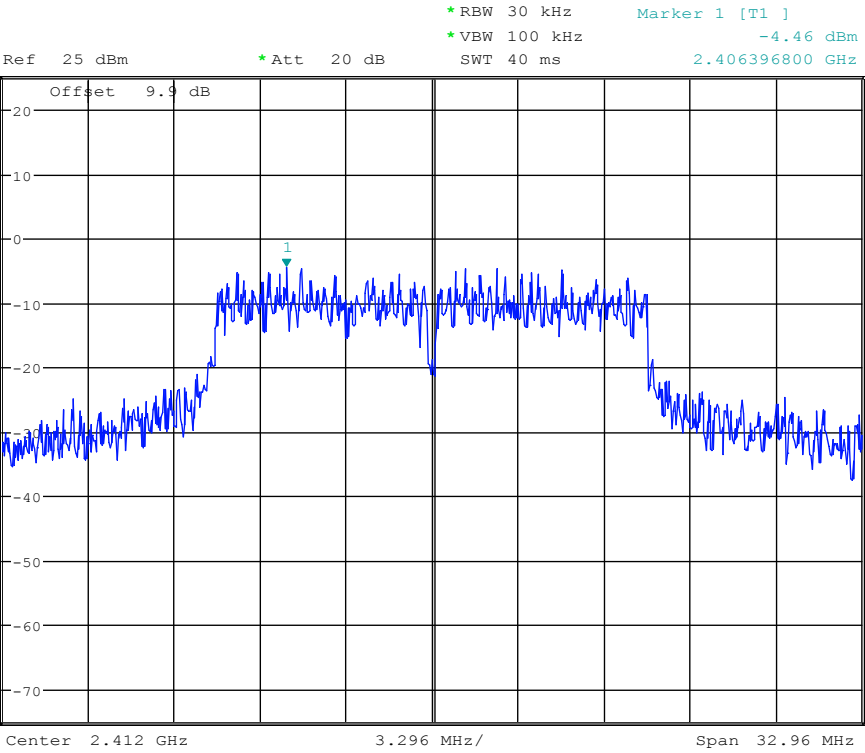


Date: 26.DEC.2017 19:35:08

Maximum Peak power spectral density_11GMIMO_2437_Ant1



1 PK
VIEW

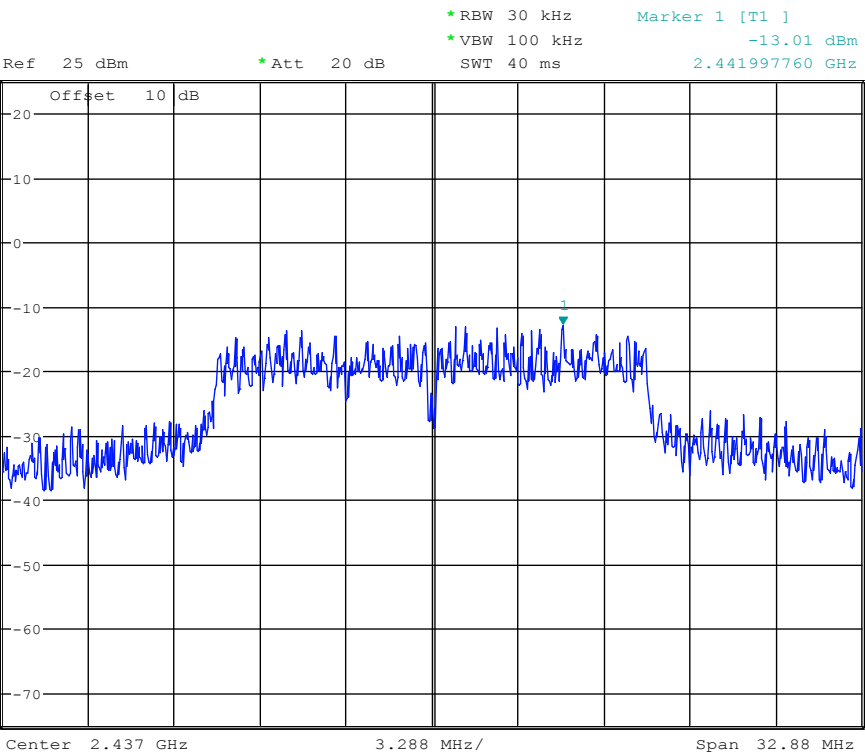


Date: 26.DEC.2017 19:39:12

Maximum Peak power spectral density_11GMIMO_2437_Ant2



1 PK
VIEW

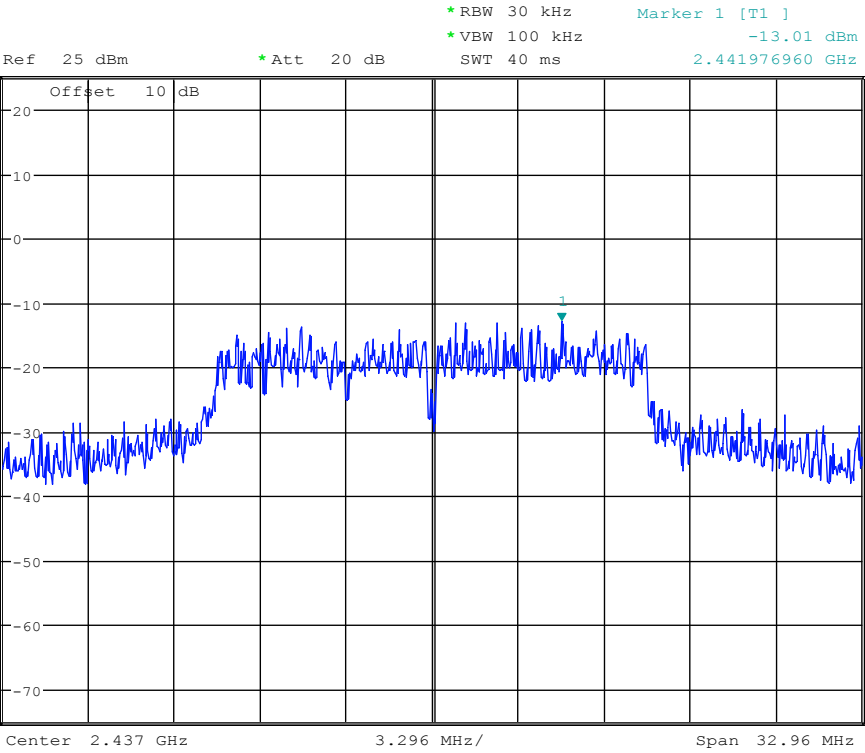


Date: 26.DEC.2017 19:40:46

Maximum Peak power spectral density_11GMIMO_2462_Ant1



1 PK
VIEW

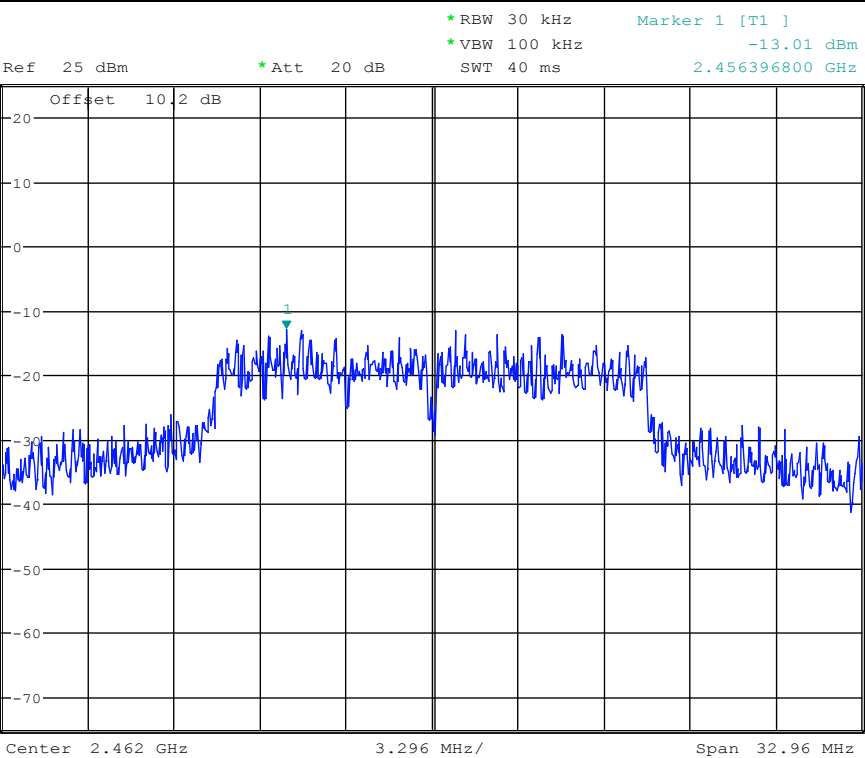


Date: 26.DEC.2017 19:43:28

Maximum Peak power spectral density_11GMIMO_2462_Ant2



1 PK
VIEW

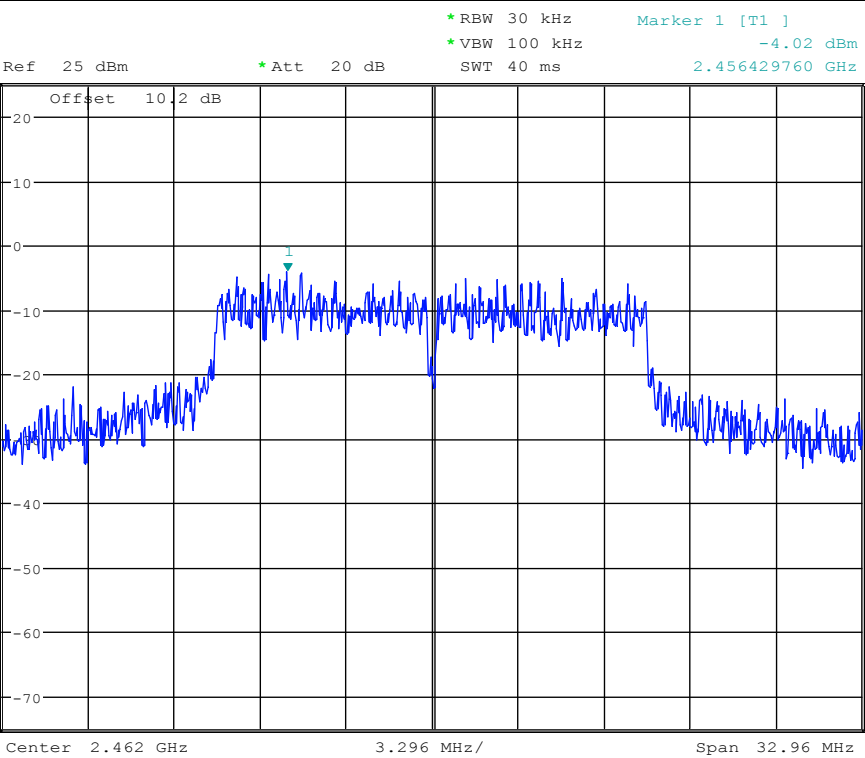


Date: 26.DEC.2017 19:45:58

Maximum Peak power spectral density_11N20MIMO_2412_Ant1



1 PK
VIEW

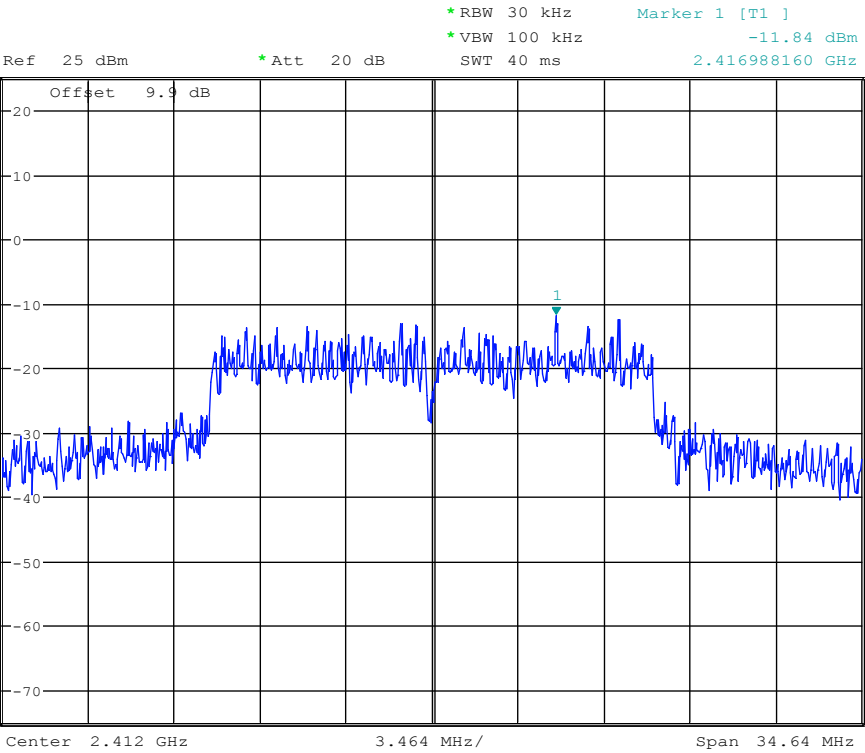


Date: 26.DEC.2017 19:49:57

Maximum Peak power spectral density_11N20MIMO_2412_Ant2



1 PK
VIEW

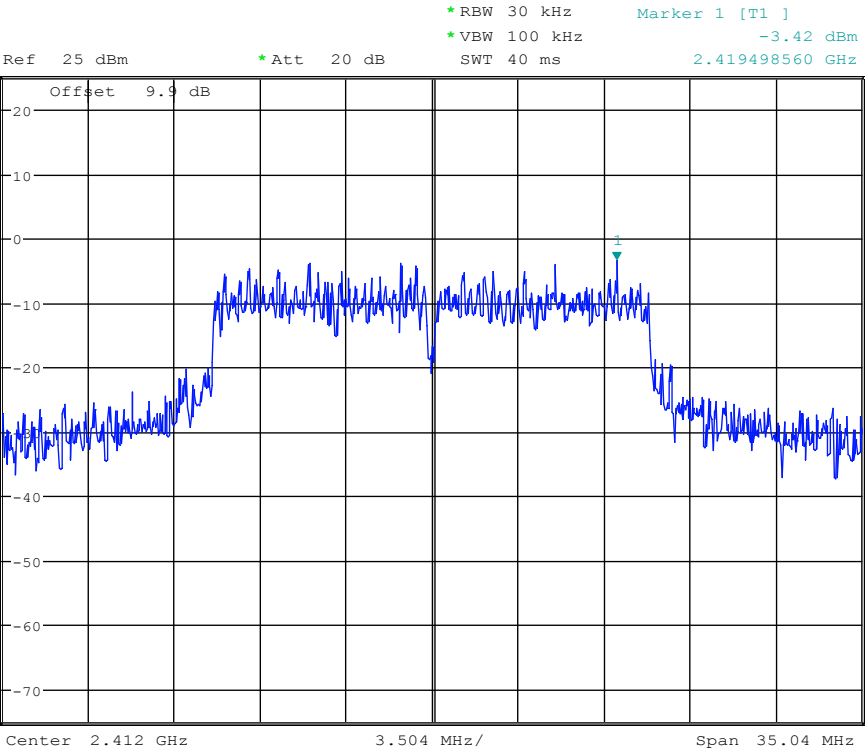


Date: 26.DEC.2017 19:52:26

Maximum Peak power spectral density_11N20MIMO_2437_Ant1



1 PK
VIEW

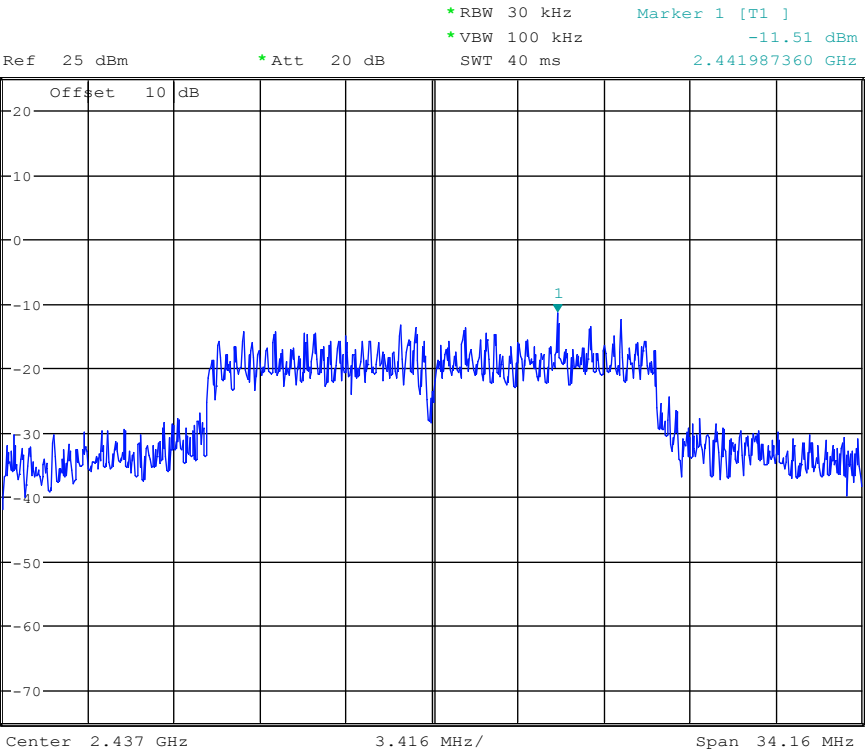


Date: 26.DEC.2017 18:23:26

Maximum Peak power spectral density_11N20MIMO_2437_Ant2



1 PK
VIEW

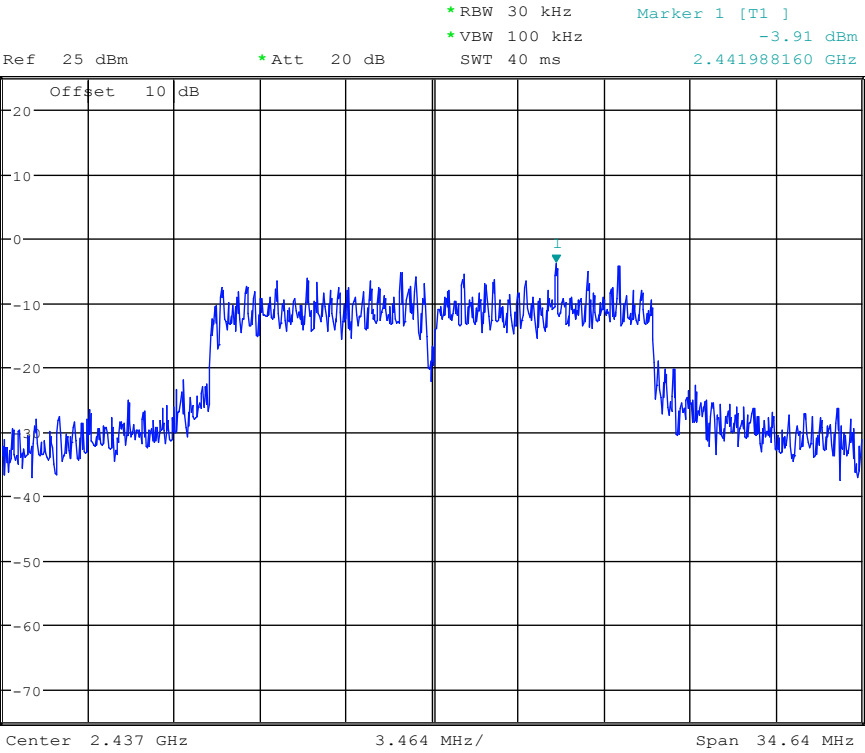


Date: 26.DEC.2017 18:24:59

Maximum Peak power spectral density_11N20MIMO_2462_Ant1



1 PK
VIEW

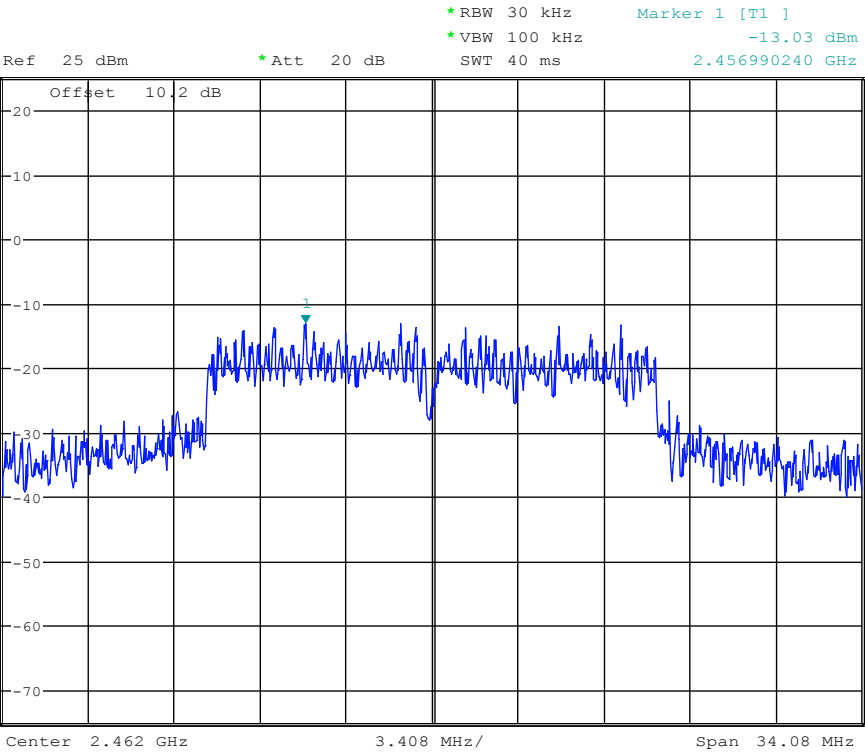


Date: 26.DEC.2017 18:27:32

Maximum Peak power spectral density_11N20MIMO_2462_Ant2



1 PK
VIEW

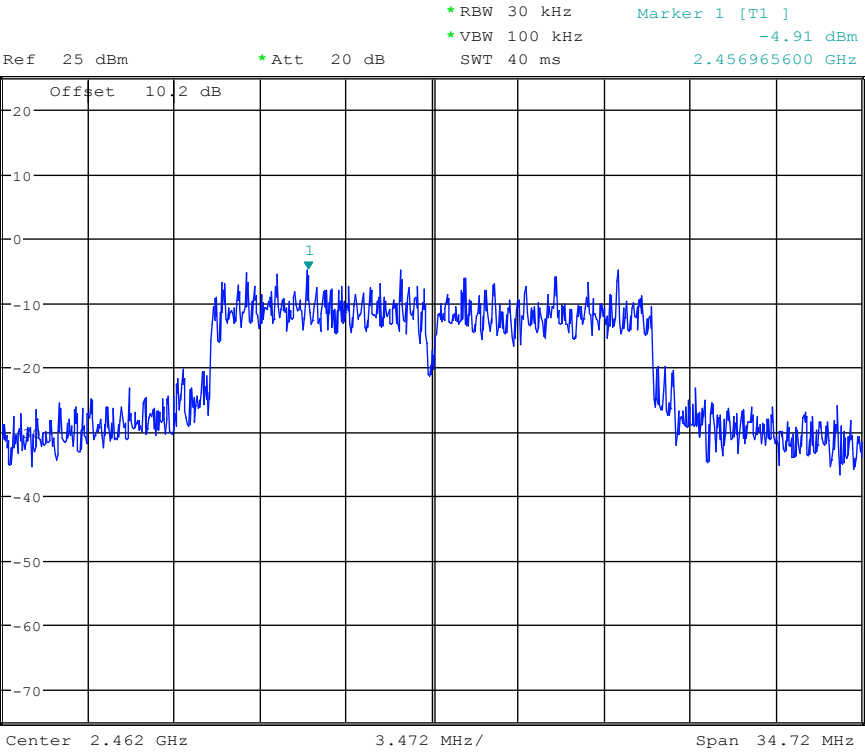


Date: 26.DEC.2017 18:30:02

Maximum Peak power spectral density_11N40MIMO_2422_Ant1



1 PK
VIEW

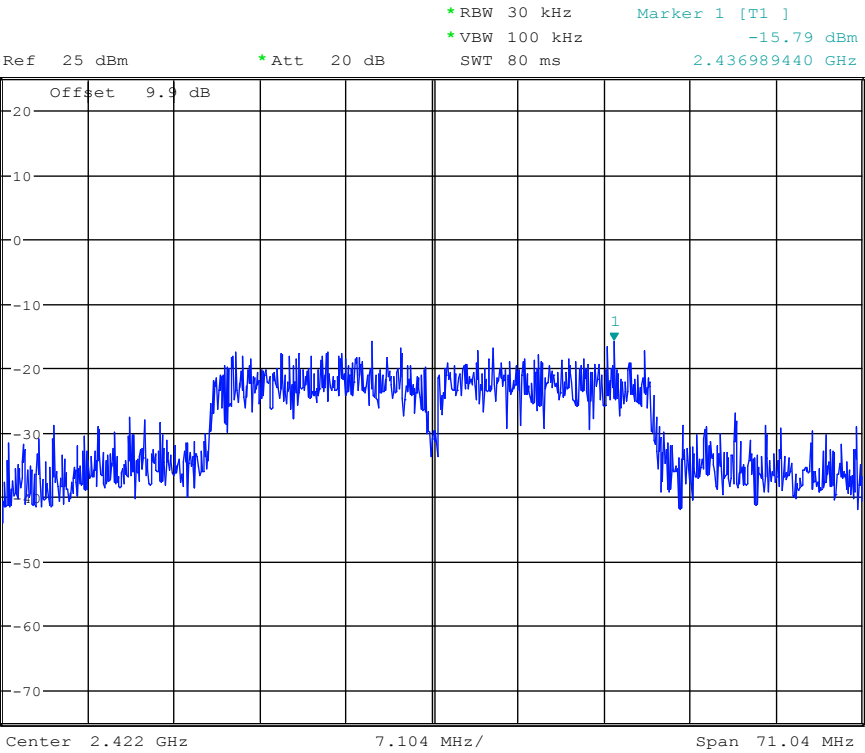


Date: 26.DEC.2017 18:33:48

Maximum Peak power spectral density_11N40MIMO_2422_Ant2



1 PK
VIEW

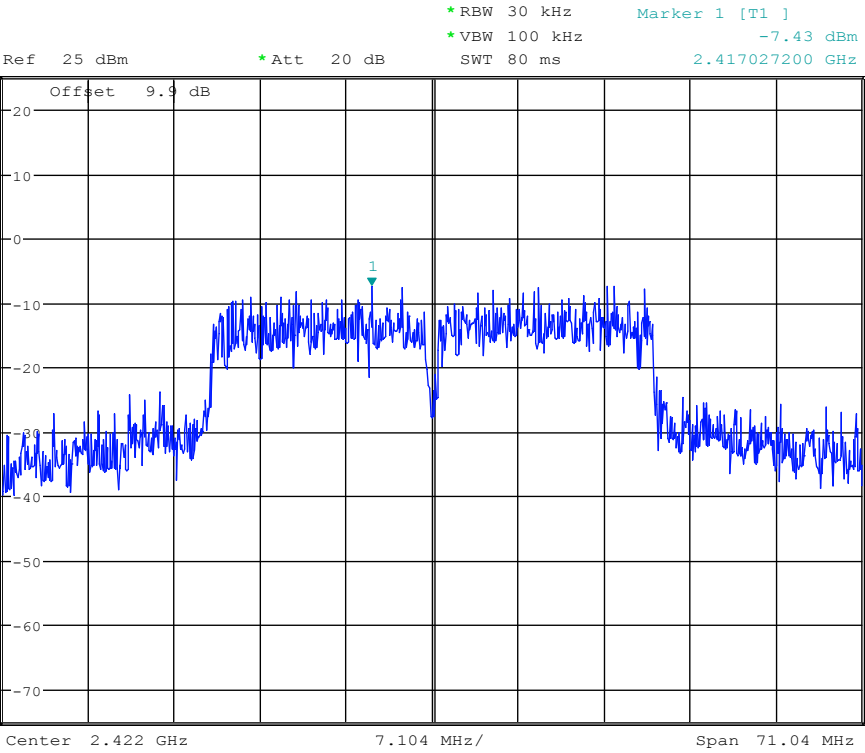


Date: 26.DEC.2017 18:36:18

Maximum Peak power spectral density_11N40MIMO_2437_Ant1



1 PK
VIEW

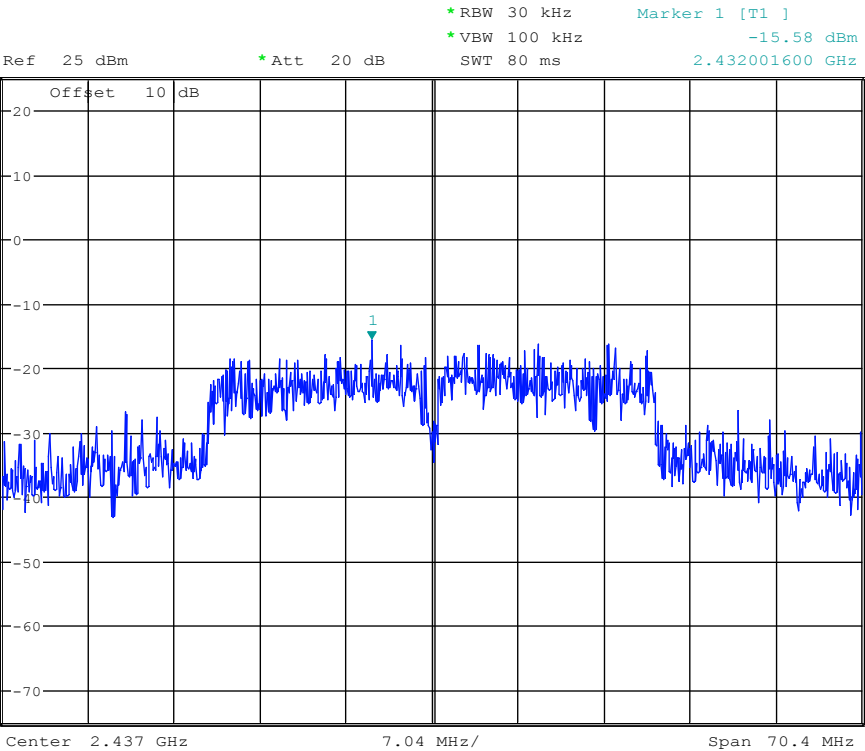


Date: 26.DEC.2017 18:43:10

Maximum Peak power spectral density_11N40MIMO_2437_Ant2



1 PK
VIEW

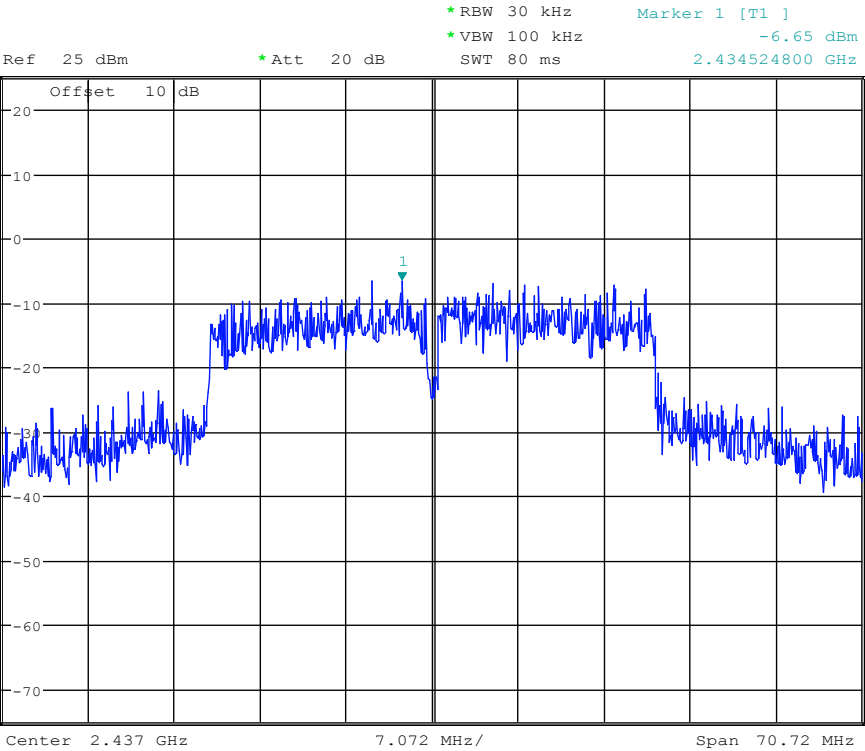


Date: 26.DEC.2017 18:44:43

Maximum Peak power spectral density_11N40MIMO_2452_Ant1



1 PK
VIEW

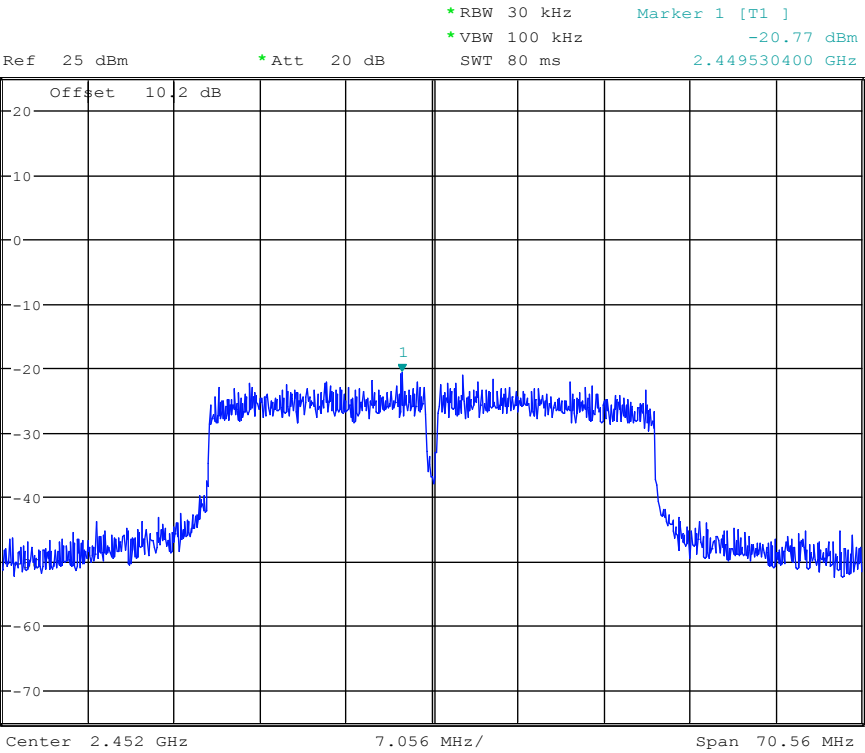


Date: 2.JAN.2018 10:49:40

Maximum Peak power spectral density_11N40MIMO_2452_Ant2



1 PK
VIEW

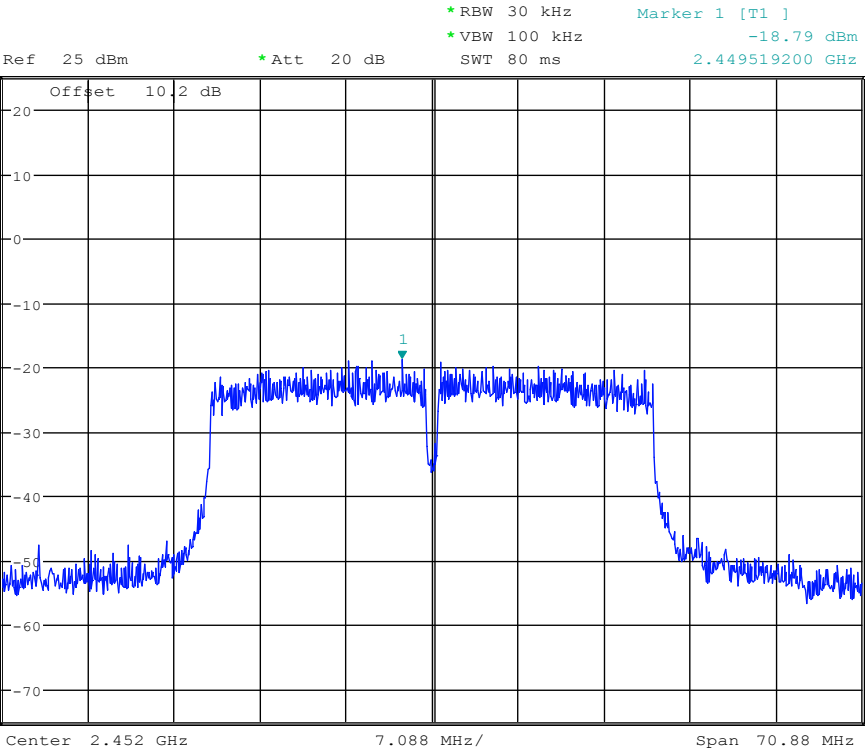

Date: 2.JAN.2018 10:46:48

6.6. Band Edge and Spurious Emissions (Conducted)

6.7. Block diagram of test setup

Same as section 4.1

6.8. Limits

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.9. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100KHz
VBW:	300KHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100KHz
VBW:	300KHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


6.10. Test Result

EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11BMIMO	CH1	PASS	11N20 MIMO	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11GMIMO	CH1	PASS	11N40MIMO	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS


EUT Set Mode	CH or Frequency	Ant2 Result (dBm)	EUT Set Mode	CH or Frequency	Ant2 Result (dBm)
11BMIMO	CH1	PASS	11N20 MIMO	CH1	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH11	PASS
11GMIMO	CH1	PASS	11N40MIMO	CH3	PASS
	CH6	PASS		CH6	PASS
	CH11	PASS		CH9	PASS

Note: Low channel and high channel of all modes have been tested , only worse case low channel and high channel is reported

6.11. original test data

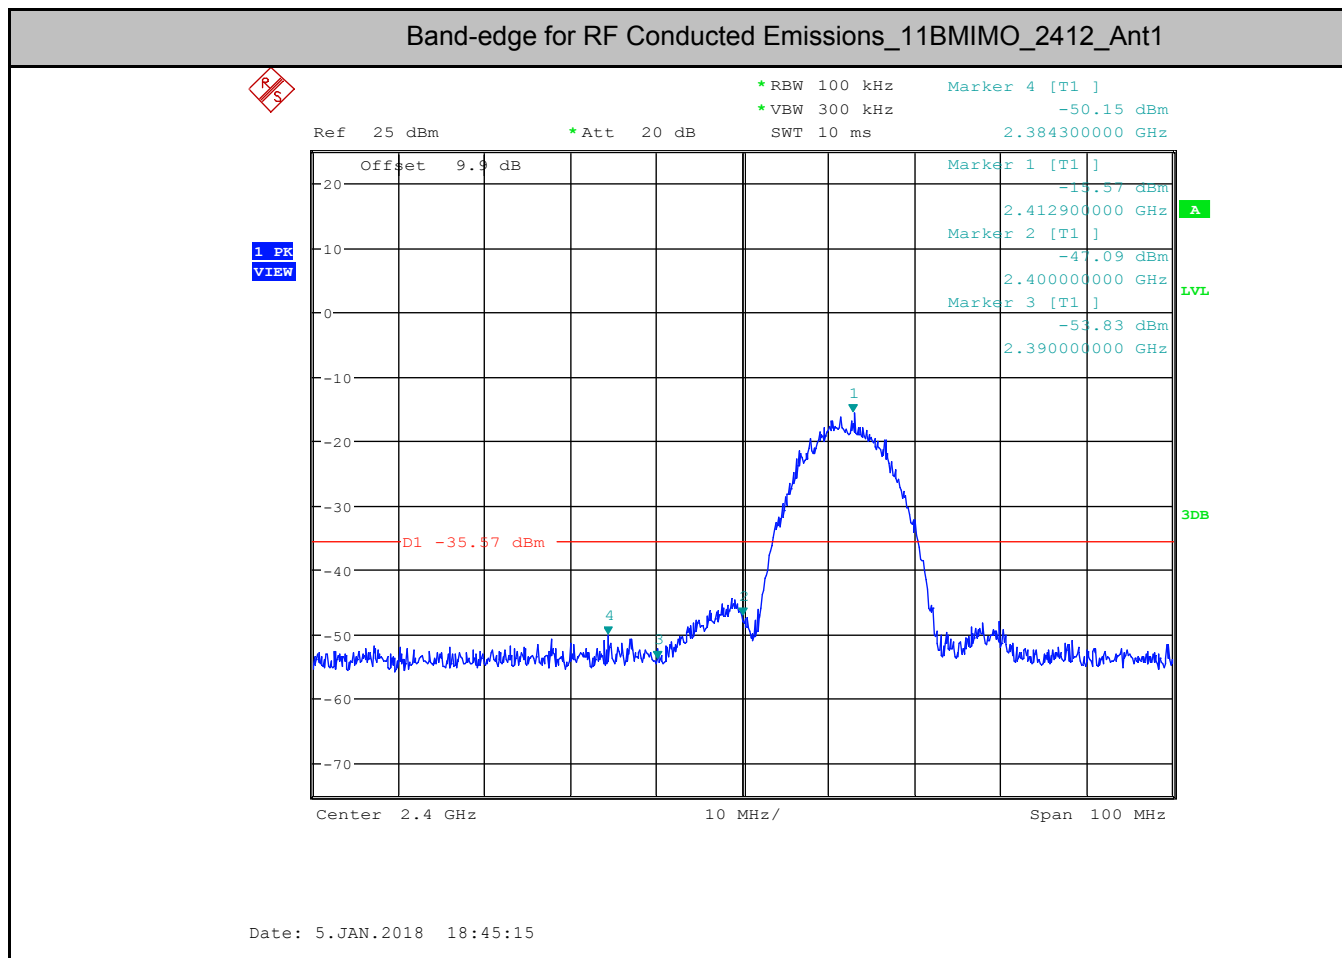


Band-edge for RF Conducted Emissions_11BMIMO_2412_Ant2

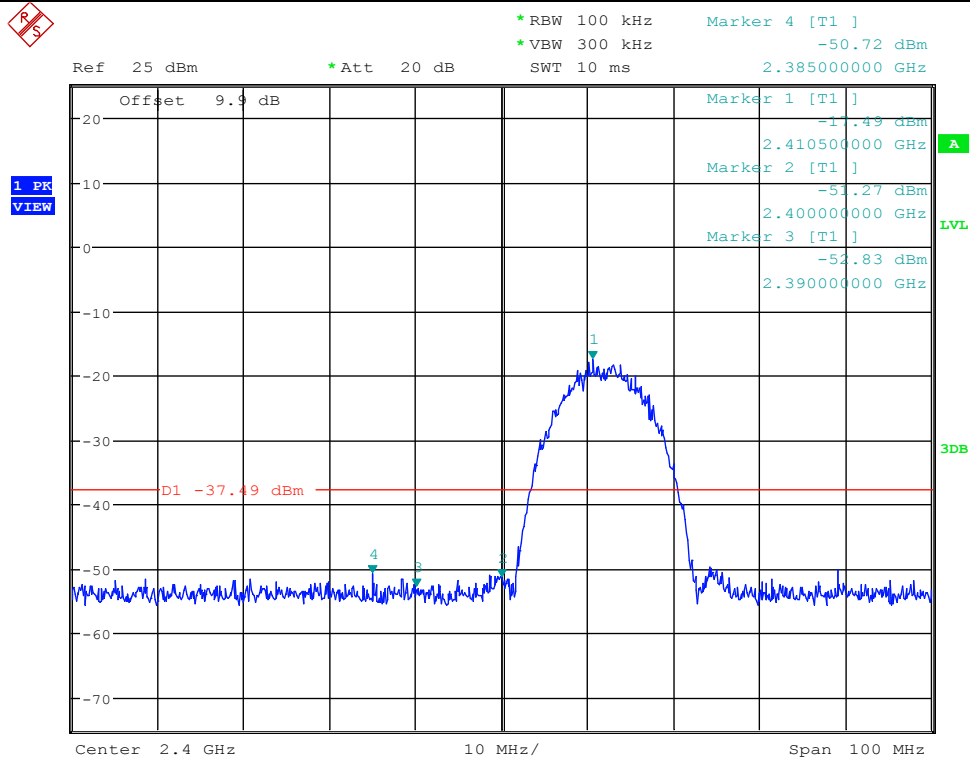


Date: 5.JAN.2018 19:03:49

Band-edge for RF Conducted Emissions_11BMIMO_2462_Ant1

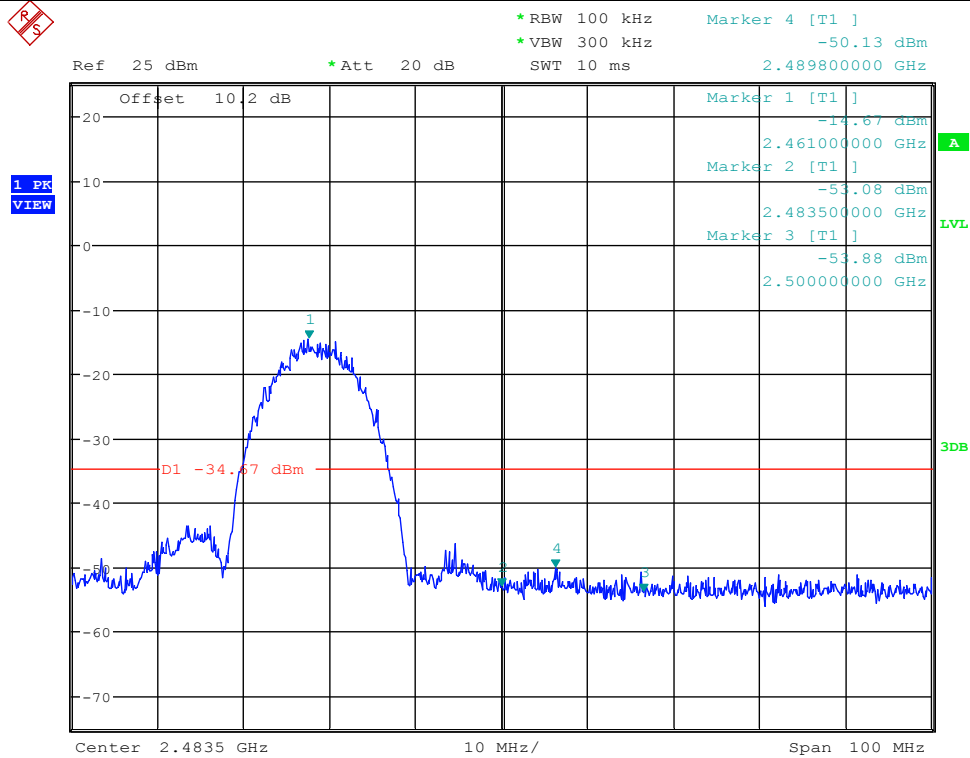


Date: 5.JAN.2018 18:45:47

Band-edge for RF Conducted Emissions_11BMIMO_2462_Ant2

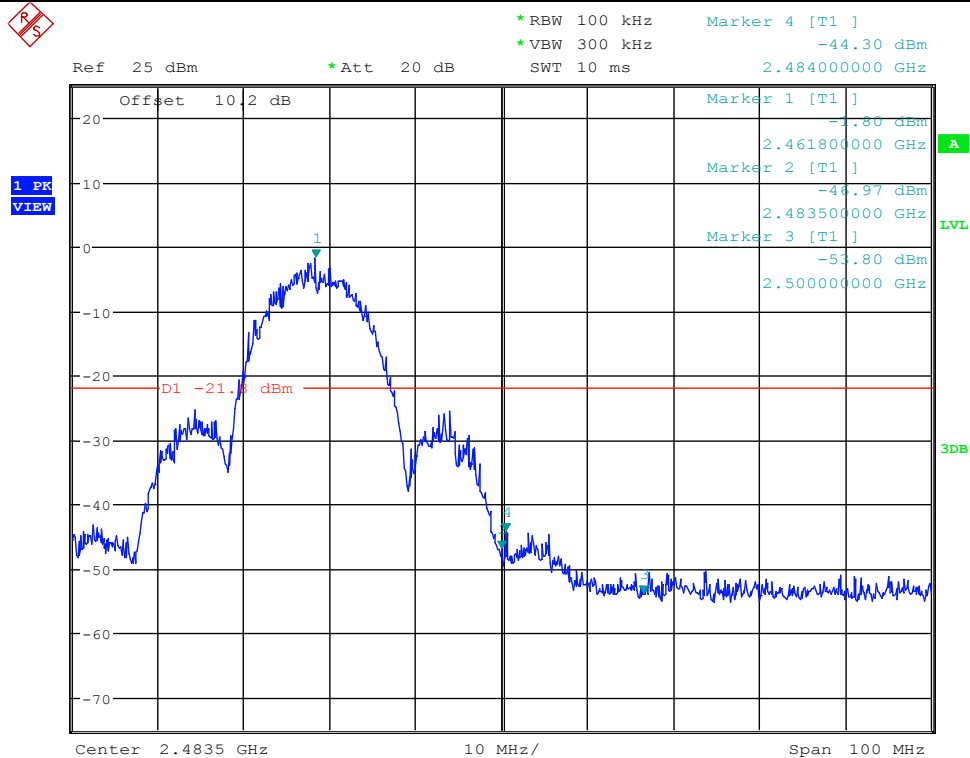


Date: 26.DEC.2017 19:25:38

Band-edge for RF Conducted Emissions_11GMIMO_2412_Ant1

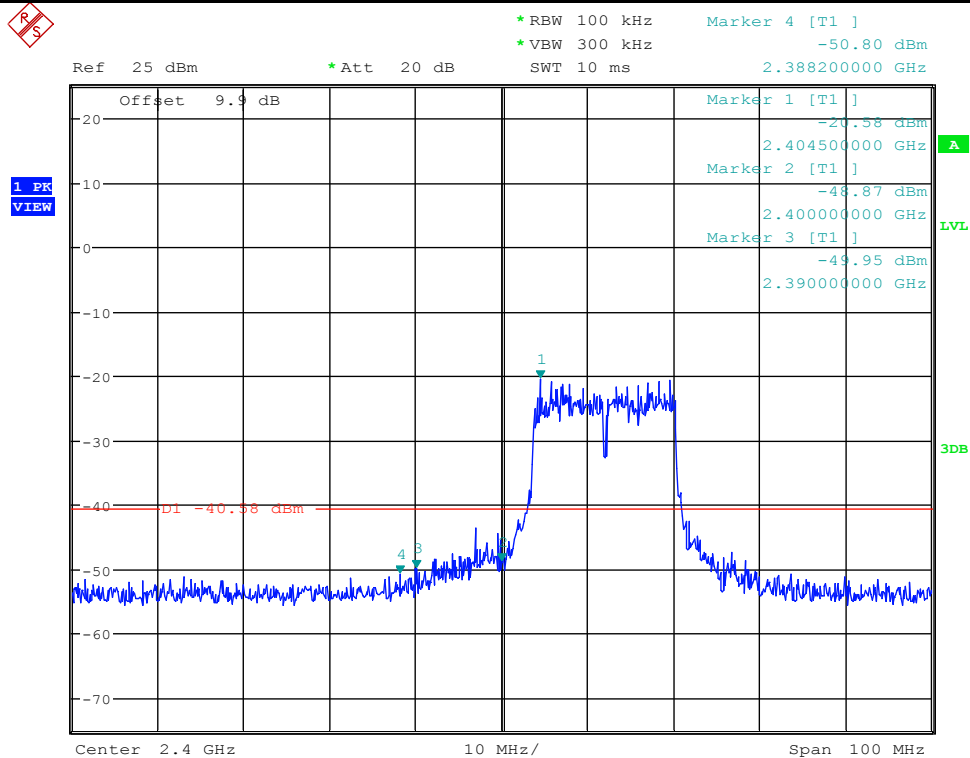


Date: 5.JAN.2018 18:48:18

Band-edge for RF Conducted Emissions_11GMIMO_2412_Ant2

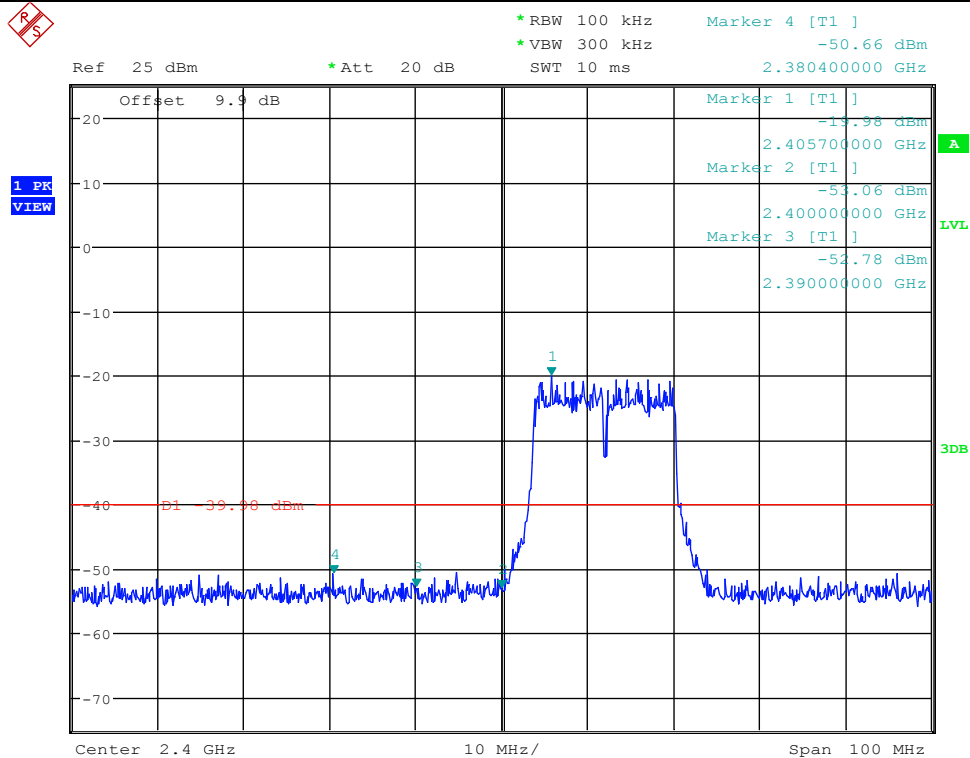


Date: 5.JAN.2018 19:01:16

Band-edge for RF Conducted Emissions_11GMIMO_2462_Ant1

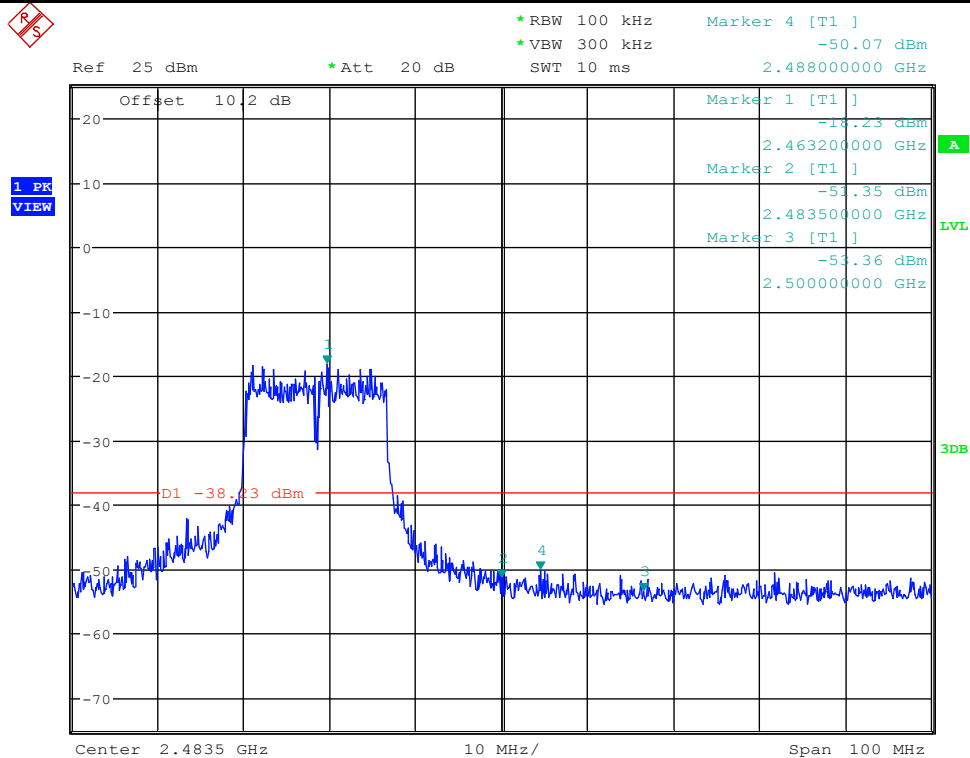


Date: 5.JAN.2018 18:49:41

Band-edge for RF Conducted Emissions_11GMIMO_2462_Ant2

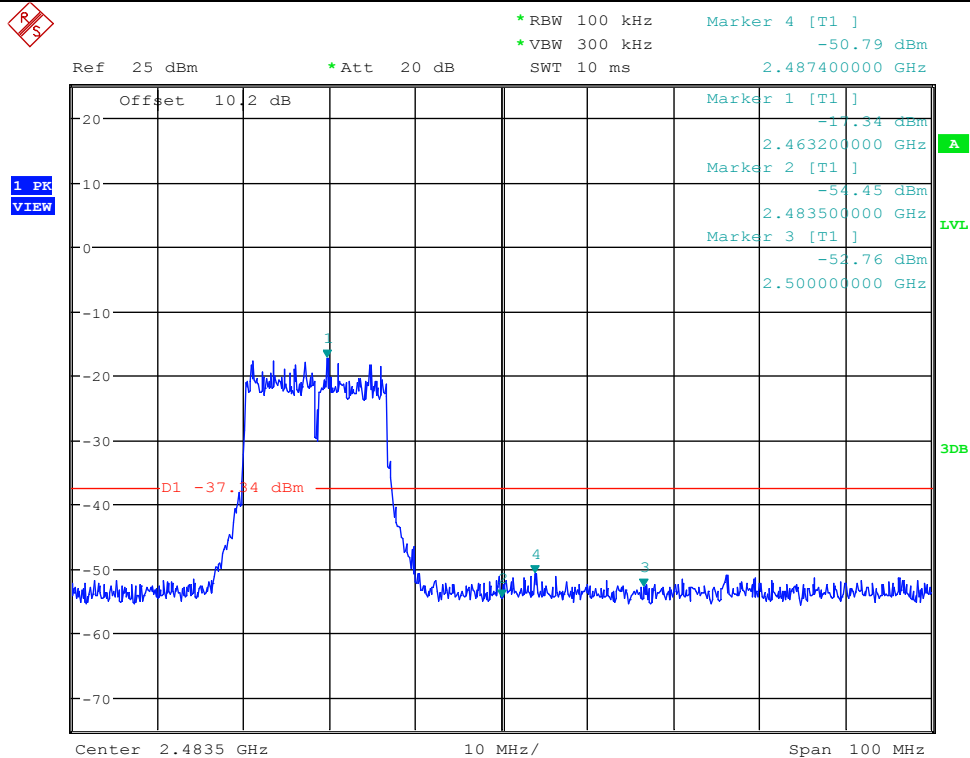


Date: 5.JAN.2018 18:57:16

Band-edge for RF Conducted Emissions_11N20MIMO_2412_Ant1

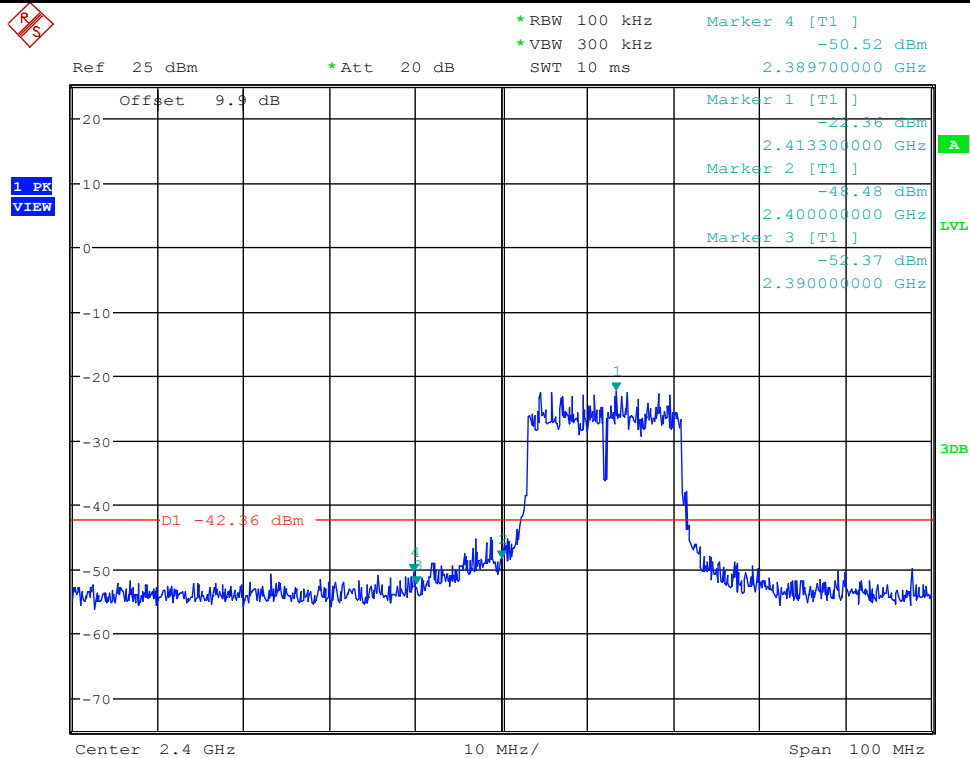


Date: 5.JAN.2018 18:46:26

Band-edge for RF Conducted Emissions_11N20MIMO_2412_Ant2

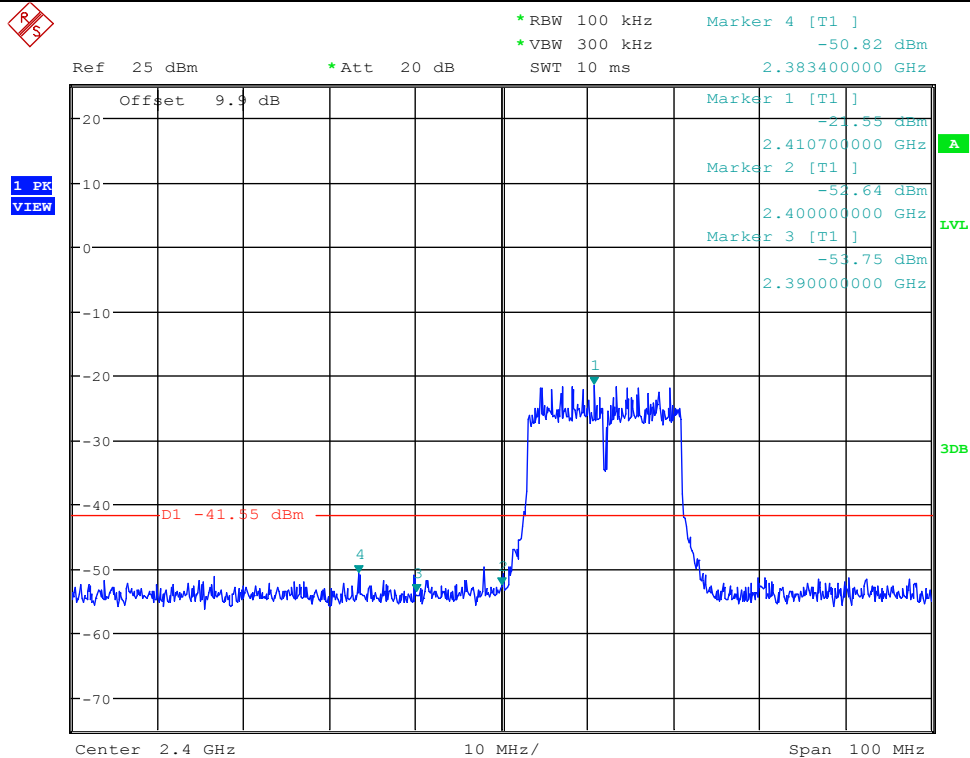


Date: 5.JAN.2018 19:01:49

Band-edge for RF Conducted Emissions_11N20MIMO_2462_Ant1

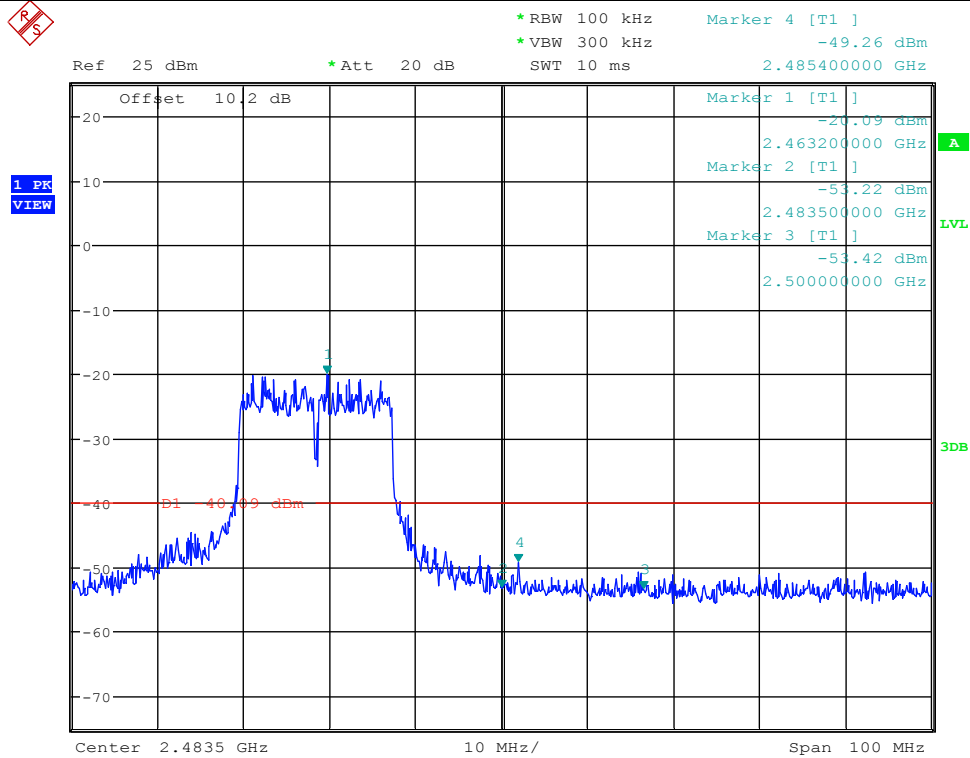


Date: 5.JAN.2018 18:52:24

Band-edge for RF Conducted Emissions_11N20MIMO_2462_Ant2

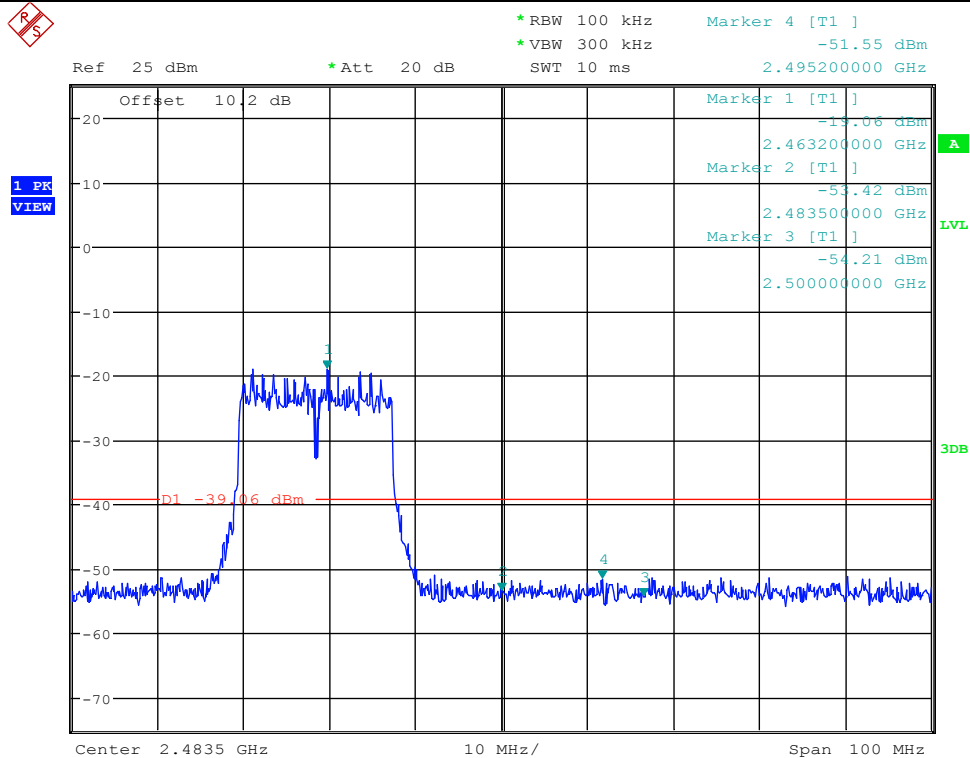


Date: 5.JAN.2018 19:02:18

Band-edge for RF Conducted Emissions_11N40MIMO_2422_Ant1

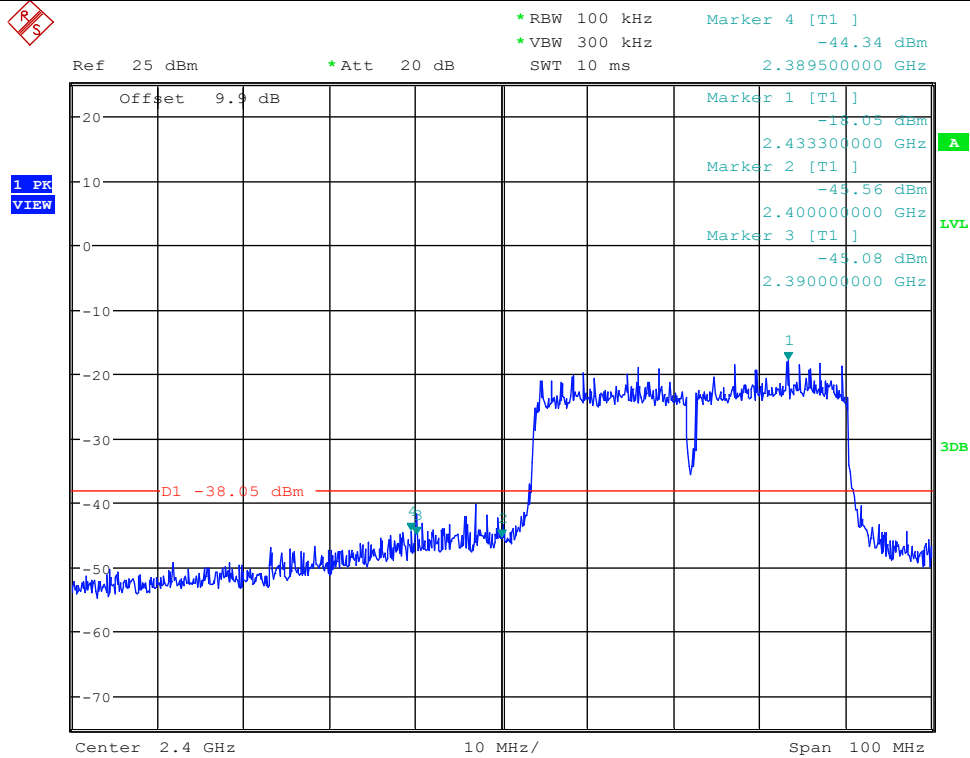


Date: 2.JAN.2018 10:35:46

Band-edge for RF Conducted Emissions_11N40MIMO_2422_Ant2

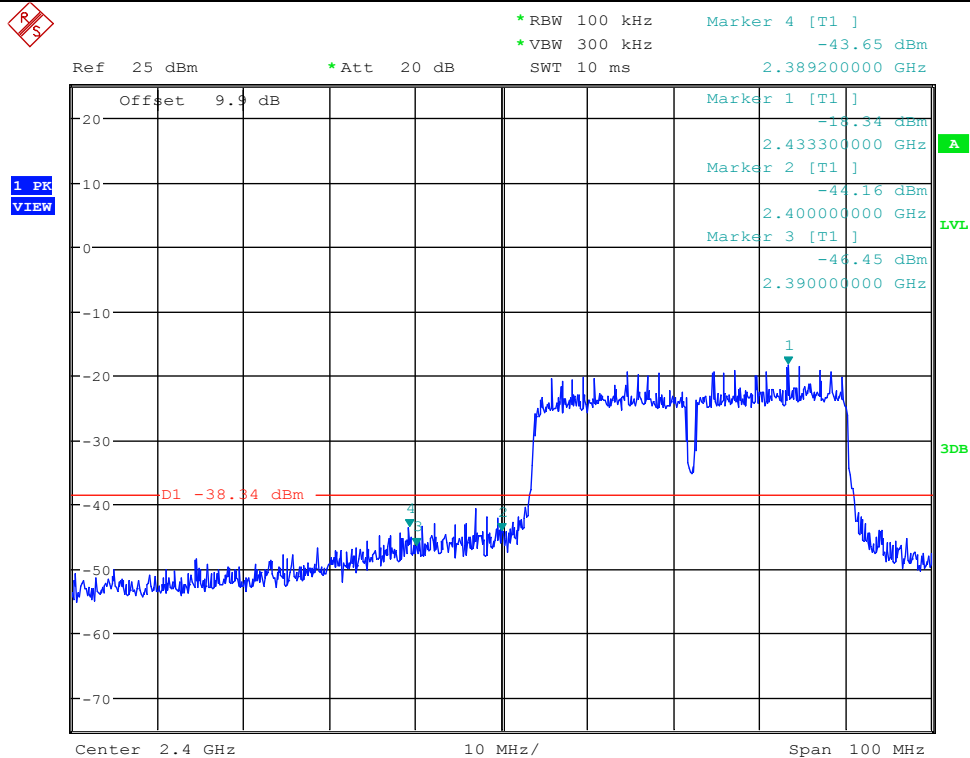


Date: 2.JAN.2018 10:36:22

Band-edge for RF Conducted Emissions_11N40MIMO_2452_Ant1

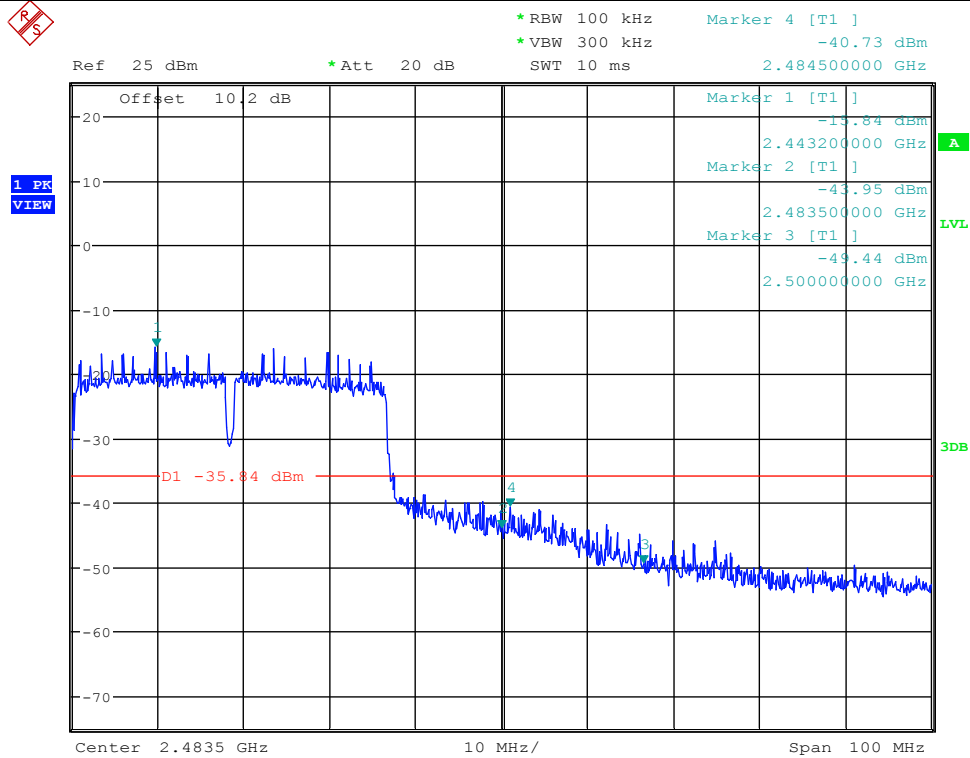


Date: 2.JAN.2018 10:49:56

Band-edge for RF Conducted Emissions_11N40MIMO_2452_Ant2

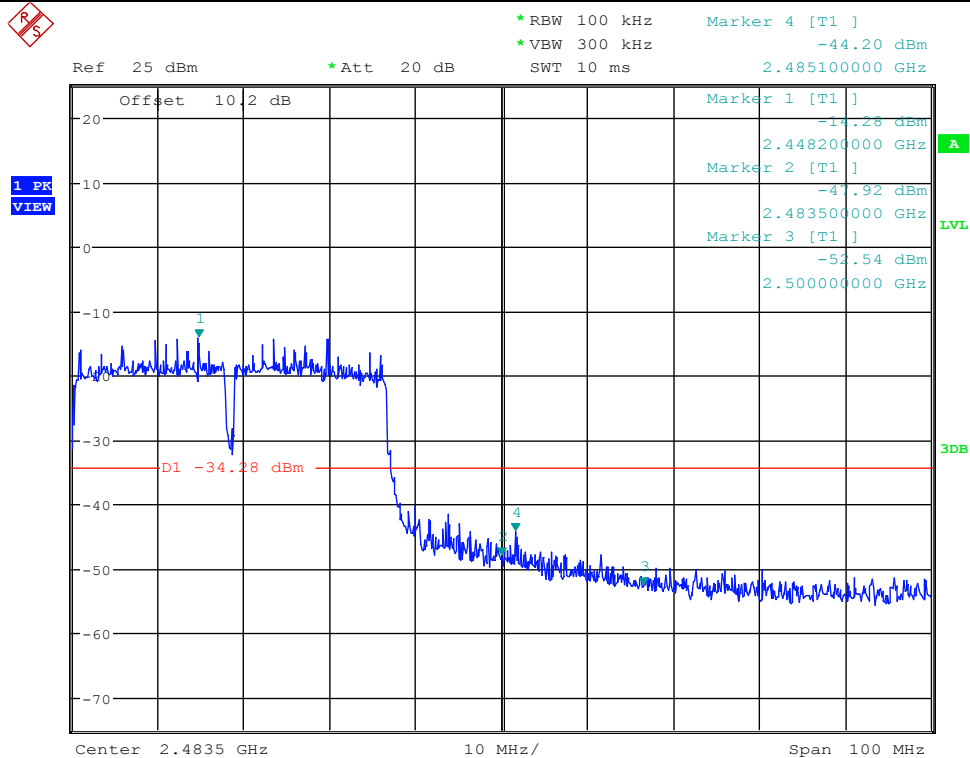


Date: 2.JAN.2018 10:47:04


RF Conducted Spurious Emissions_11BMIMO_2412_Ant1

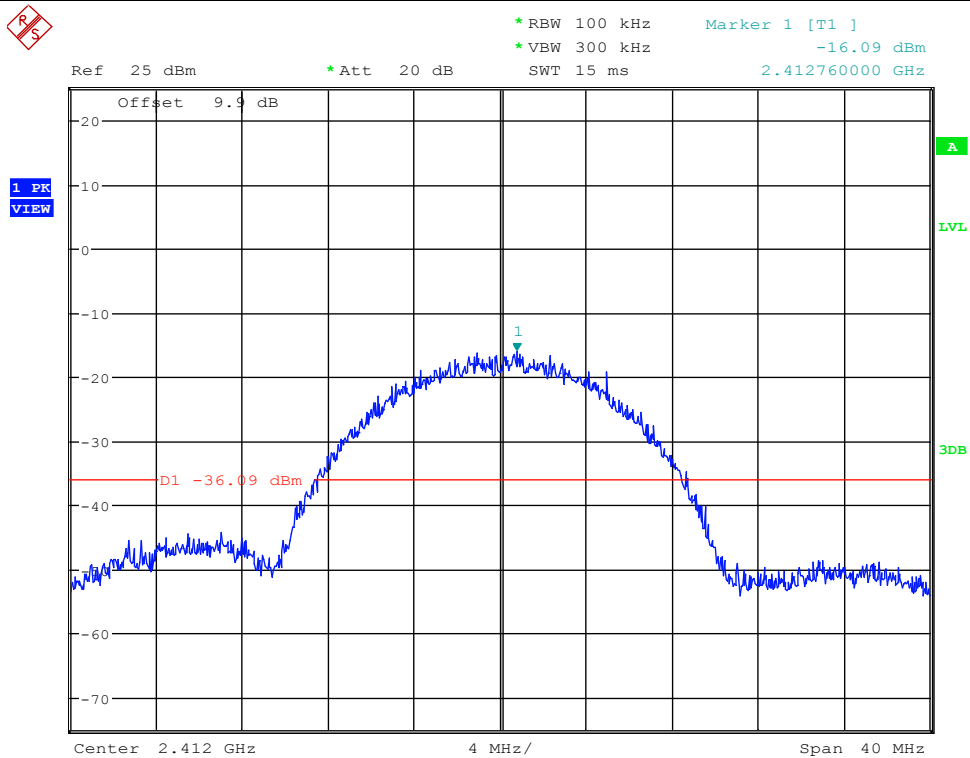

Date: 8.JAN.2018 11:26:26

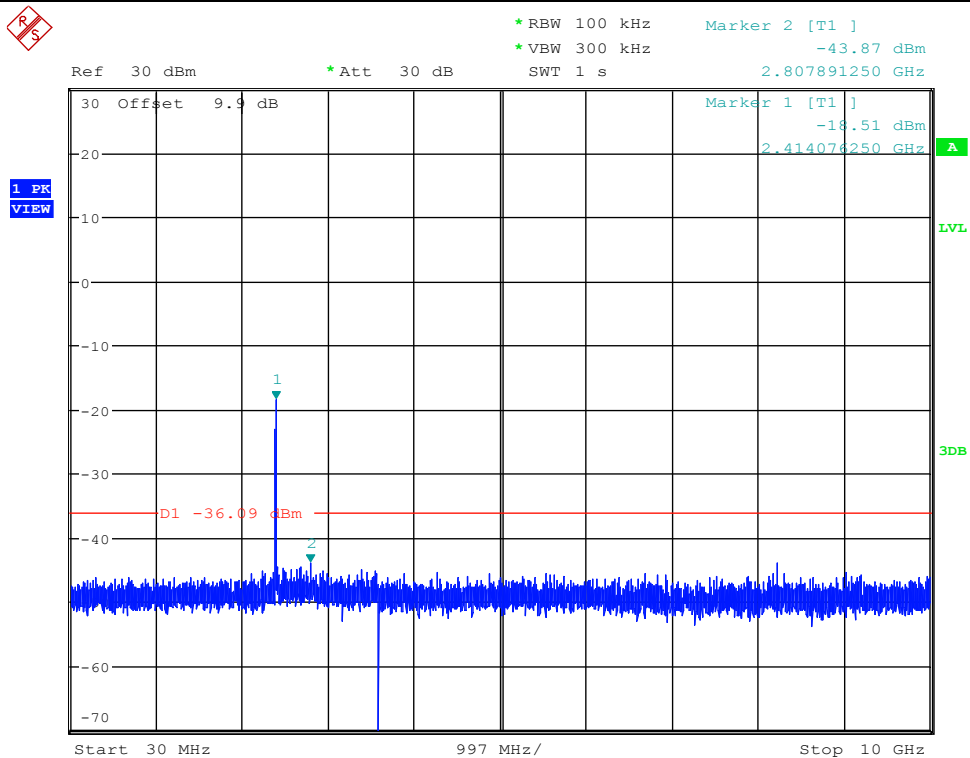


Date: 8.JAN.2018 11:26:37

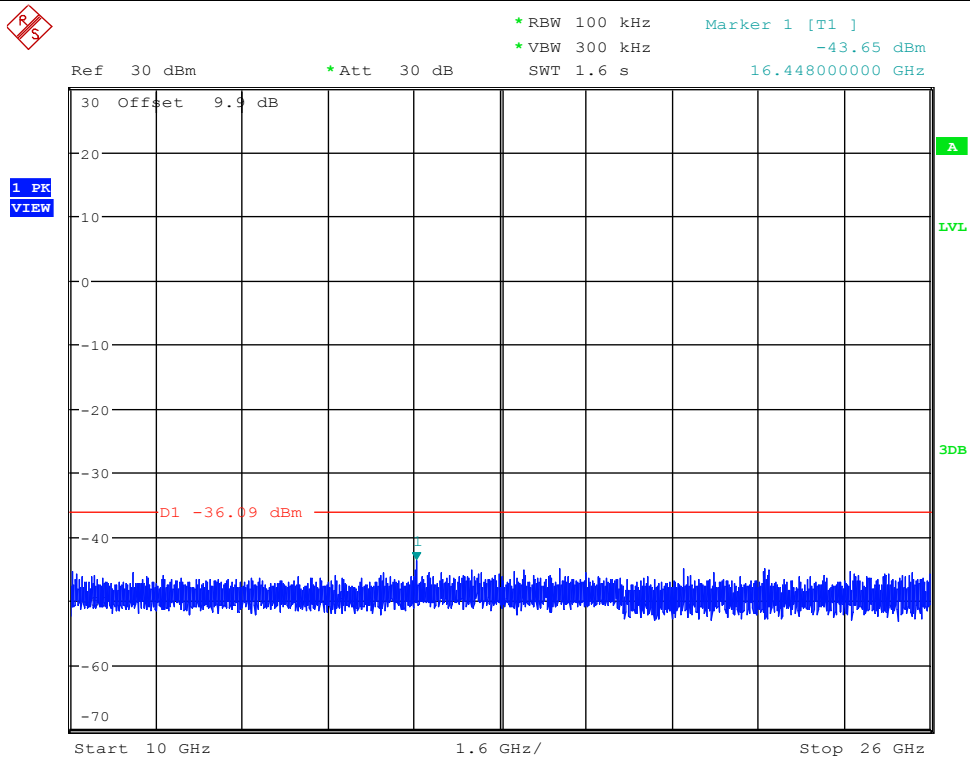


Date: 8.JAN.2018 11:26:47


RF Conducted Spurious Emissions_11BMIMO_2412_Ant2

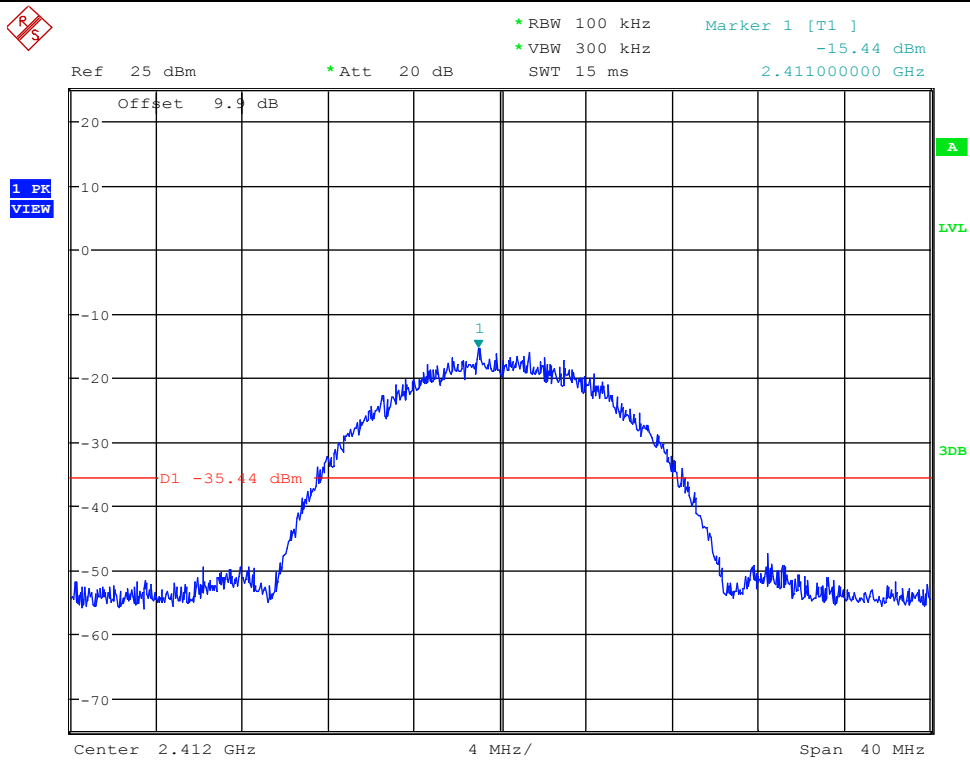

Date: 8.JAN.2018 11:45:52

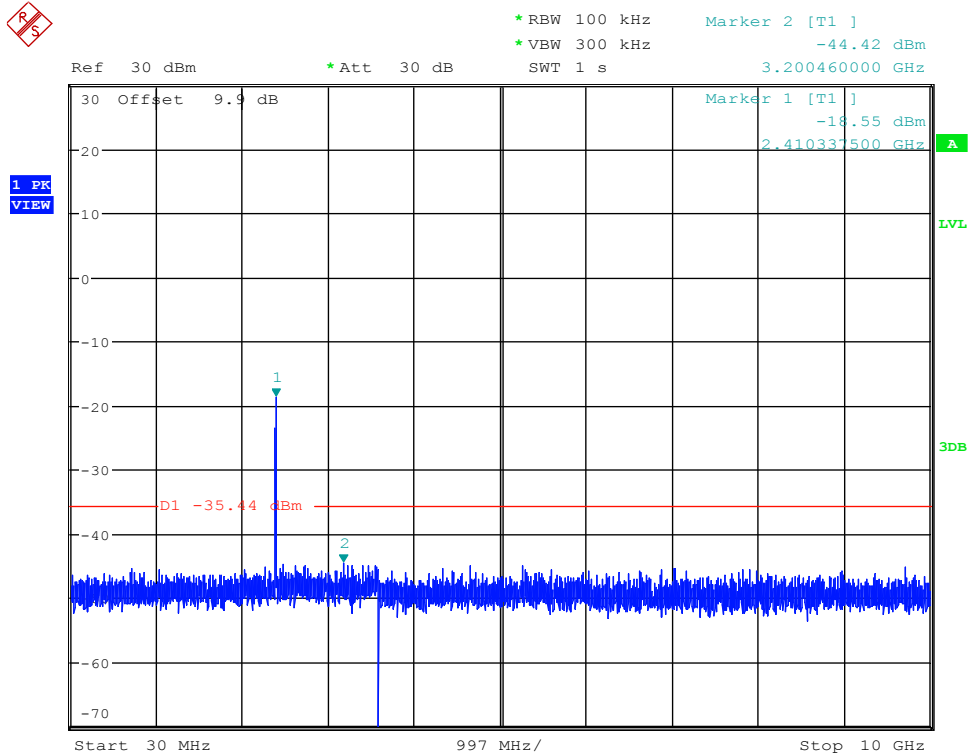


Date: 8.JAN.2018 11:46:04

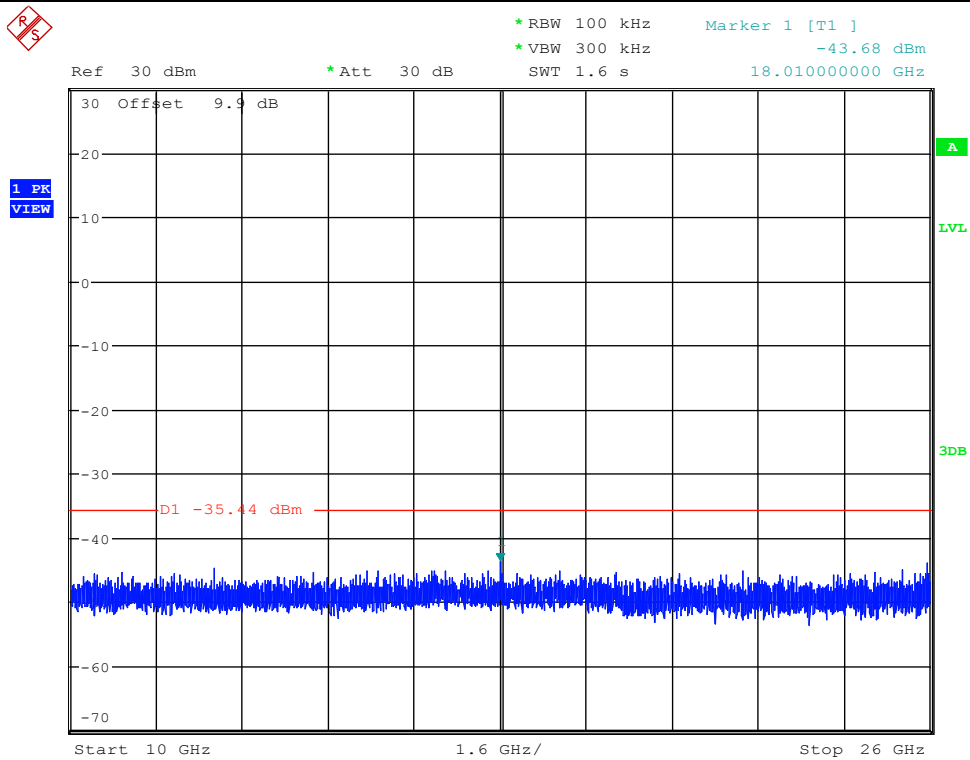


Date: 8.JAN.2018 11:46:14


RF Conducted Spurious Emissions_11BMIMO_2462_Ant1

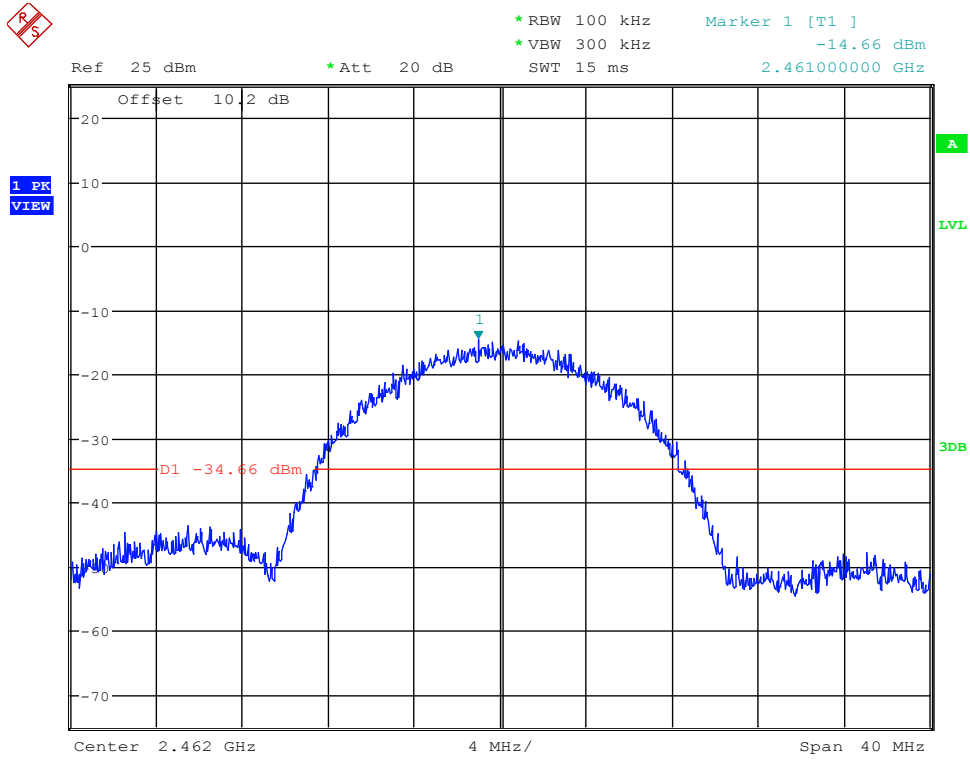

Date: 8.JAN.2018 11:27:35

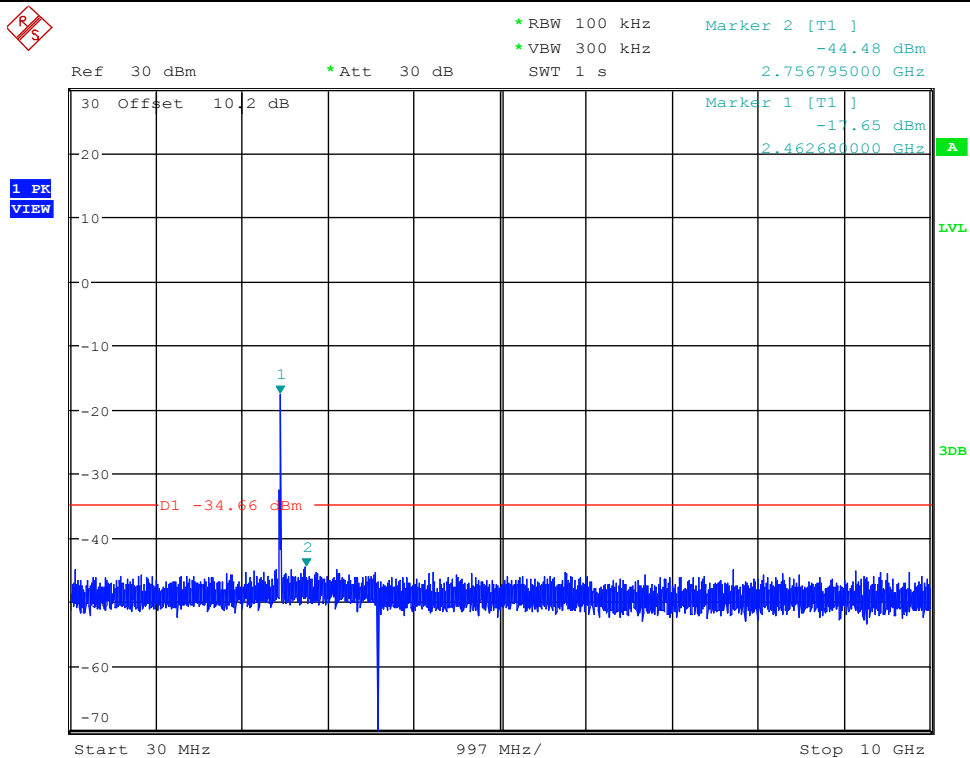


Date: 8.JAN.2018 11:27:47

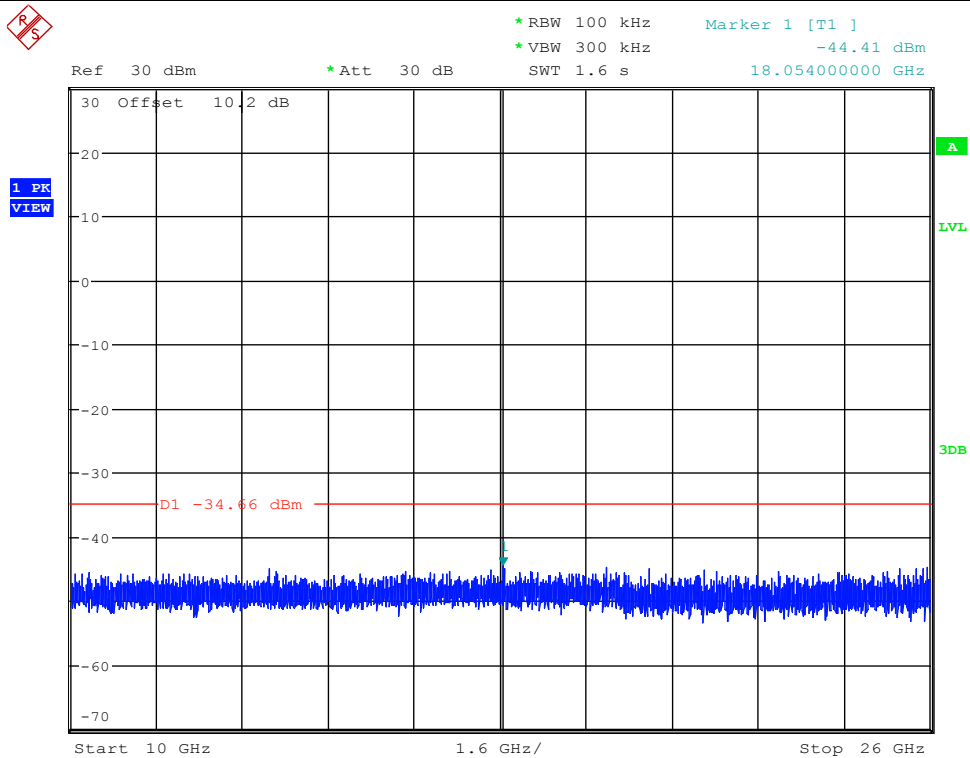


Date: 8.JAN.2018 11:27:57


RF Conducted Spurious Emissions_11BMIMO_2462_Ant2

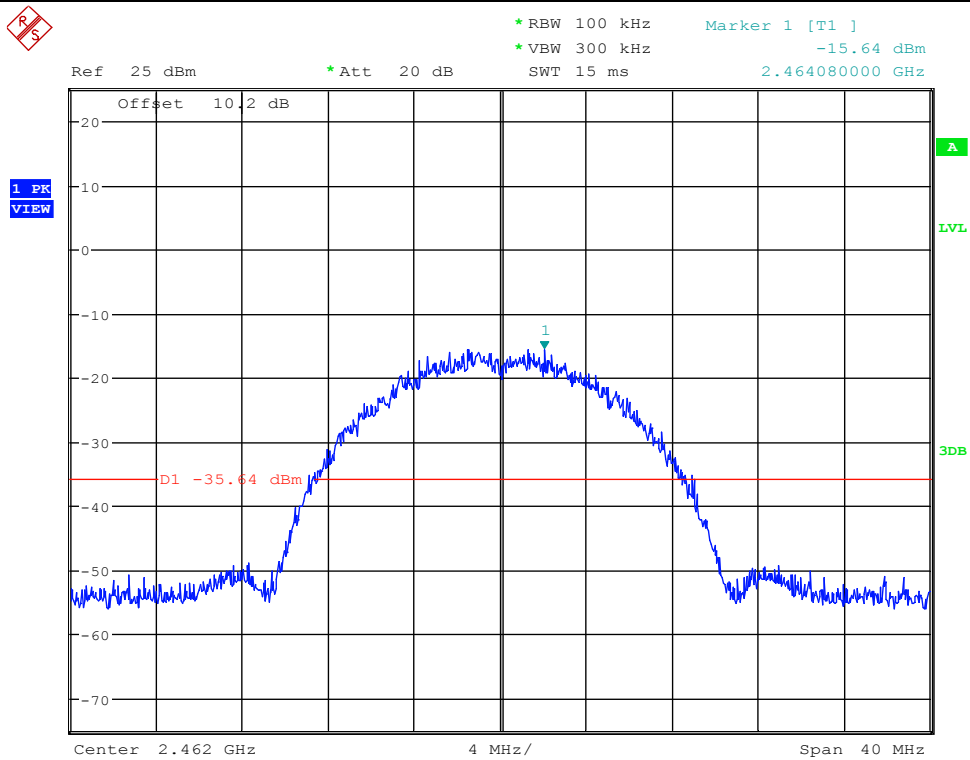

Date: 8.JAN.2018 11:46:34

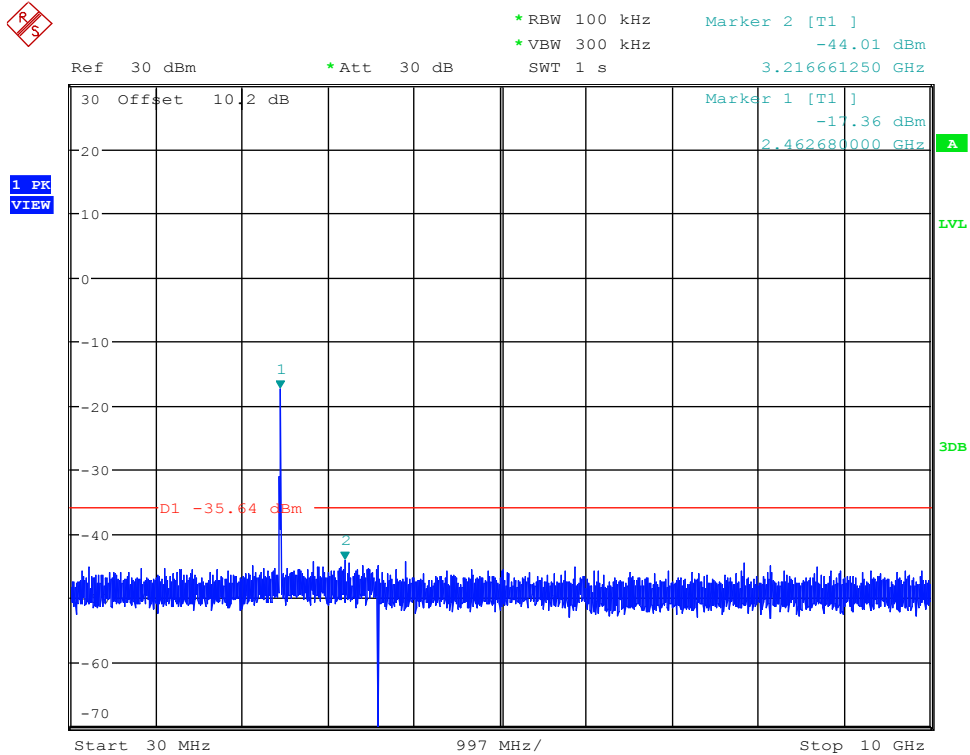


Date: 8.JAN.2018 11:46:45

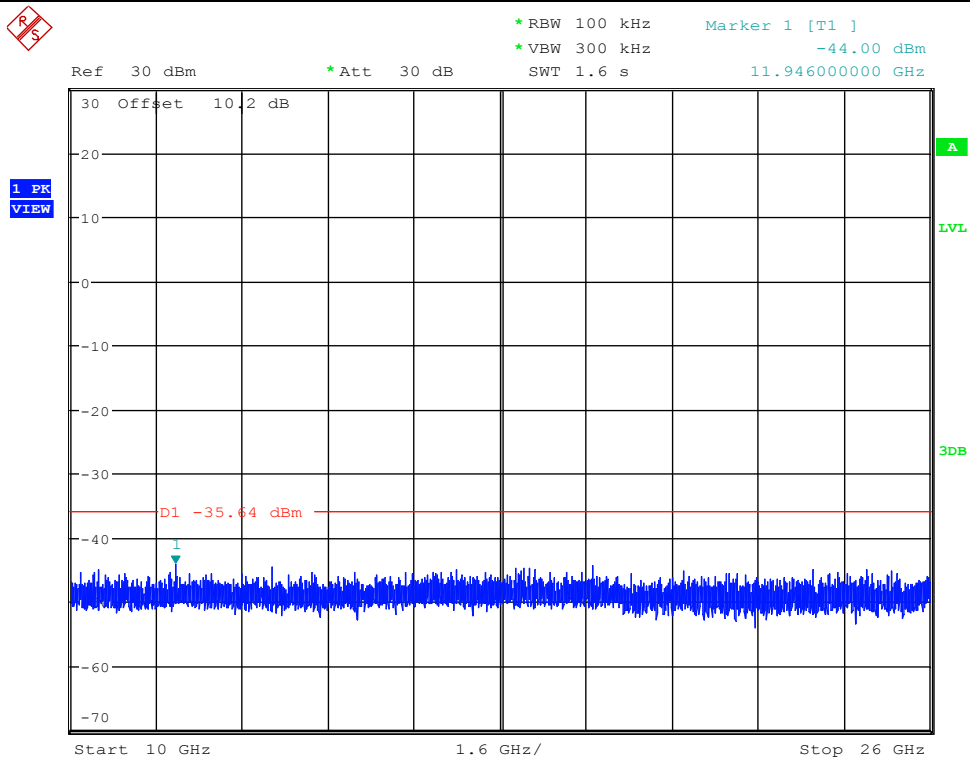


Date: 8.JAN.2018 11:46:55


RF Conducted Spurious Emissions_11GMIMO_2412_Ant1

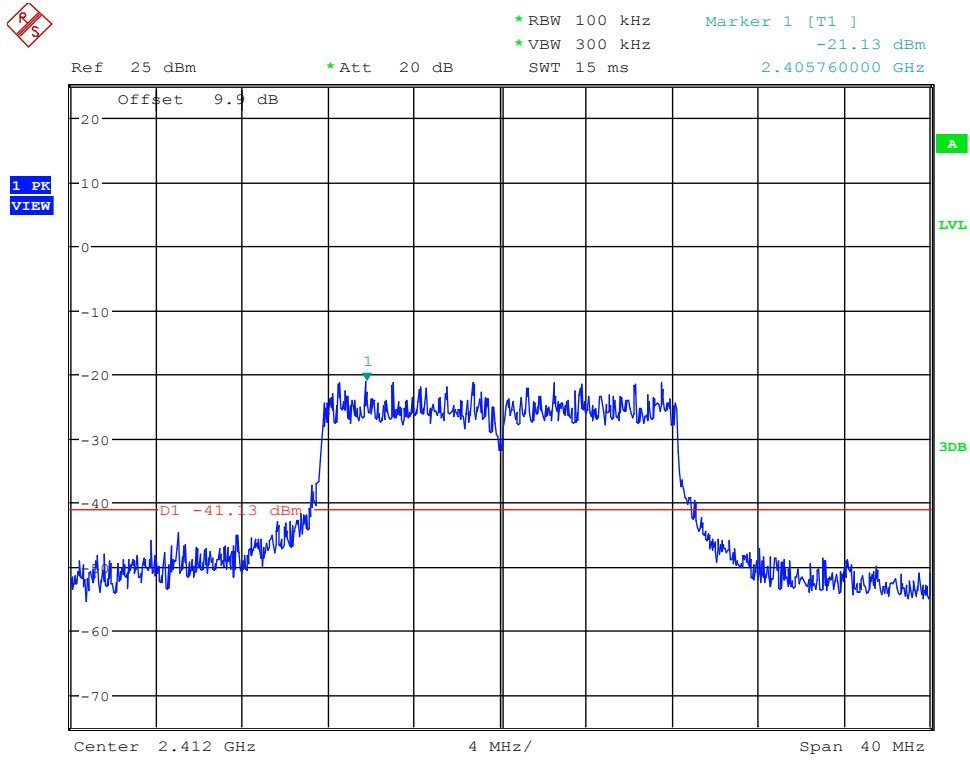

Date: 8.JAN.2018 11:35:45

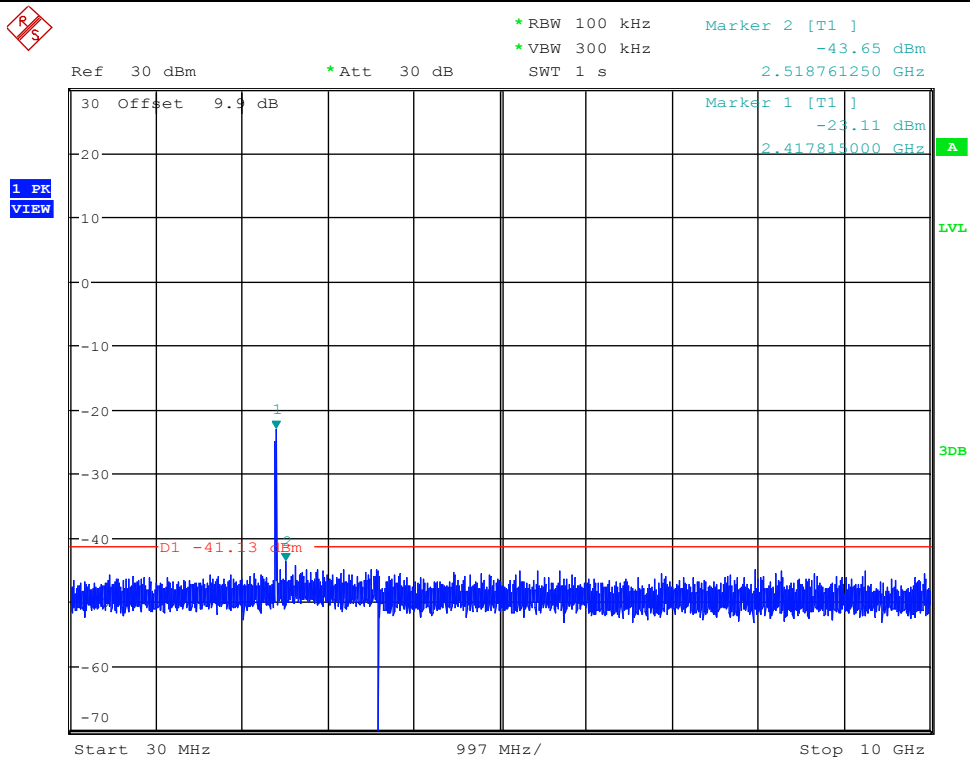


Date: 8.JAN.2018 11:35:56

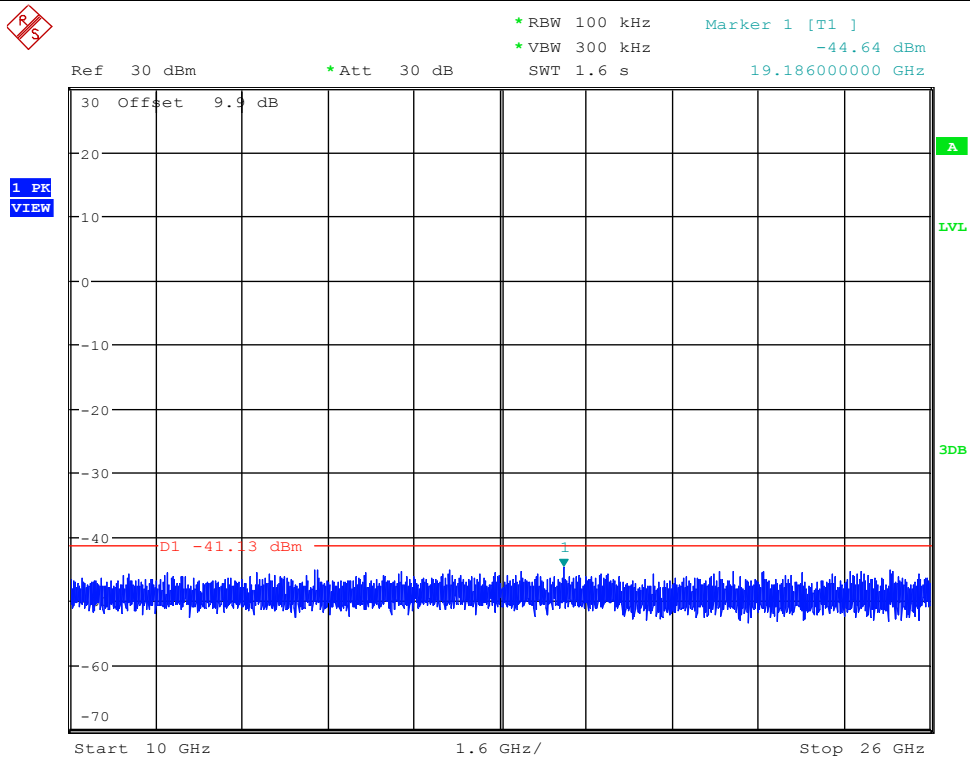


Date: 8.JAN.2018 11:36:06


RF Conducted Spurious Emissions_11GMIMO_2412_Ant2

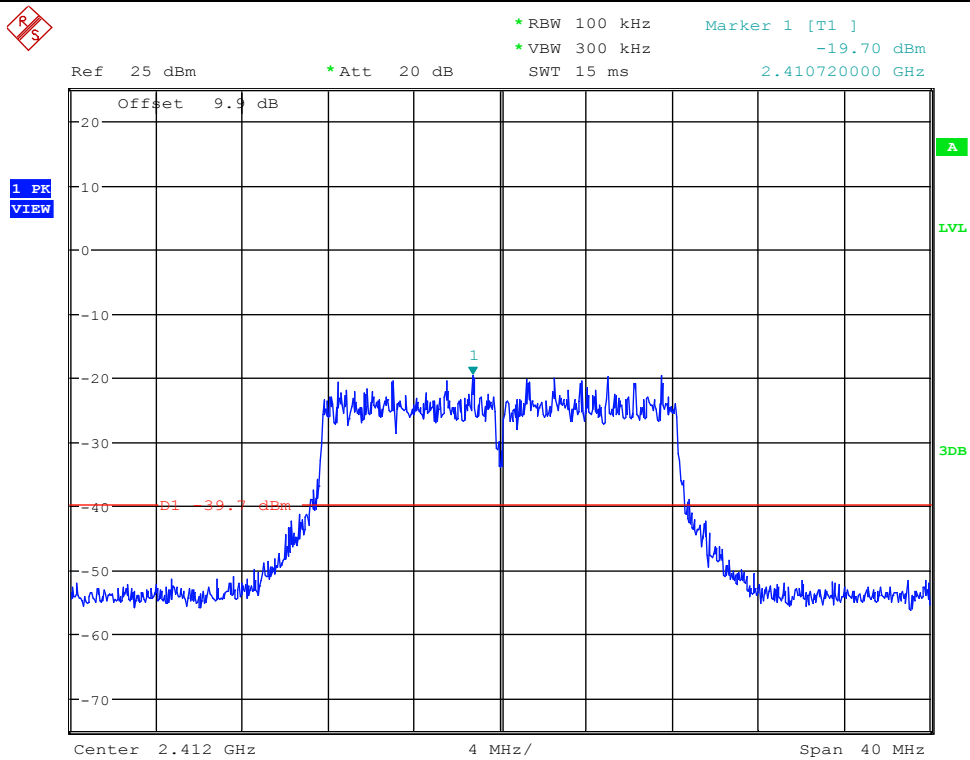

Date: 8.JAN.2018 11:47:27

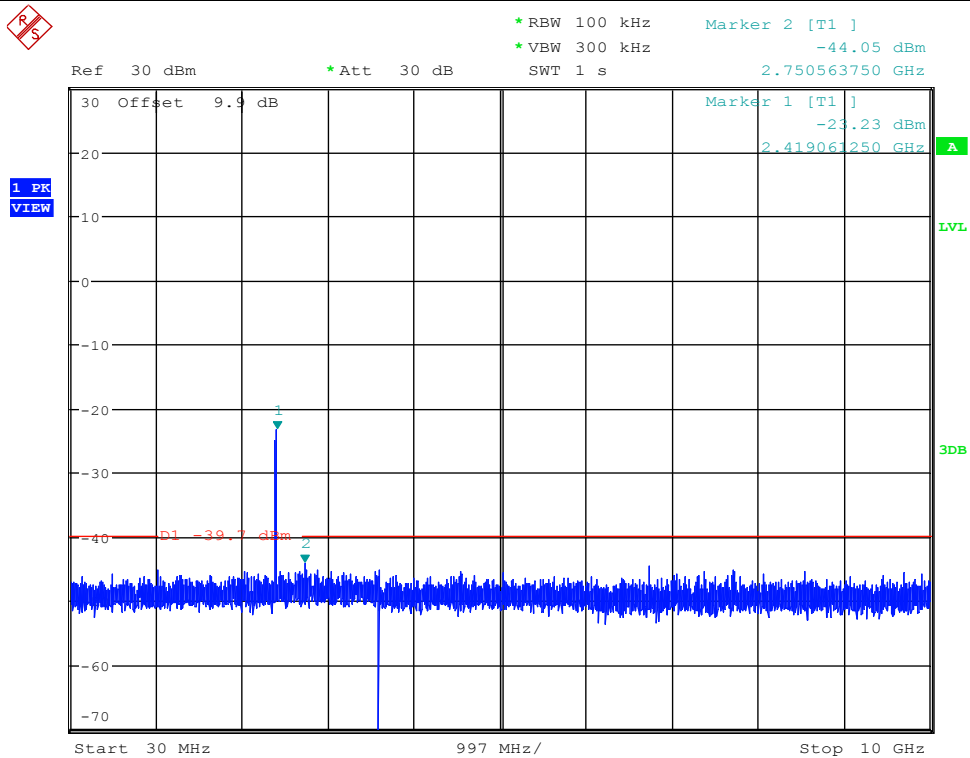


Date: 8.JAN.2018 11:47:38

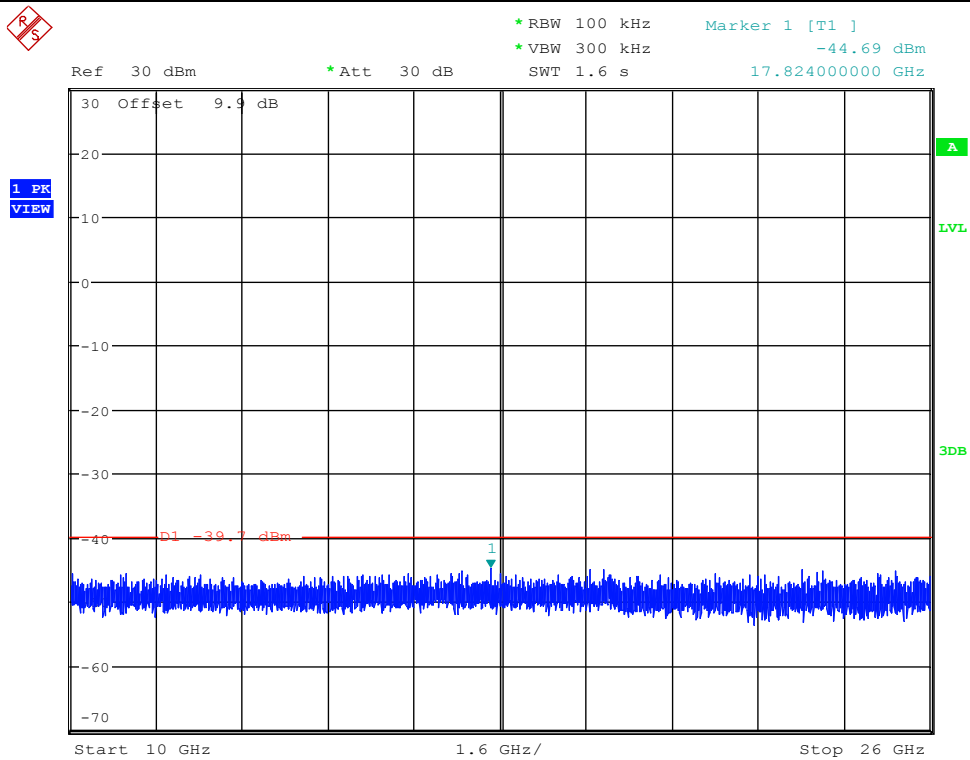


Date: 8.JAN.2018 11:47:49


RF Conducted Spurious Emissions_11GMIMO_2462_Ant1

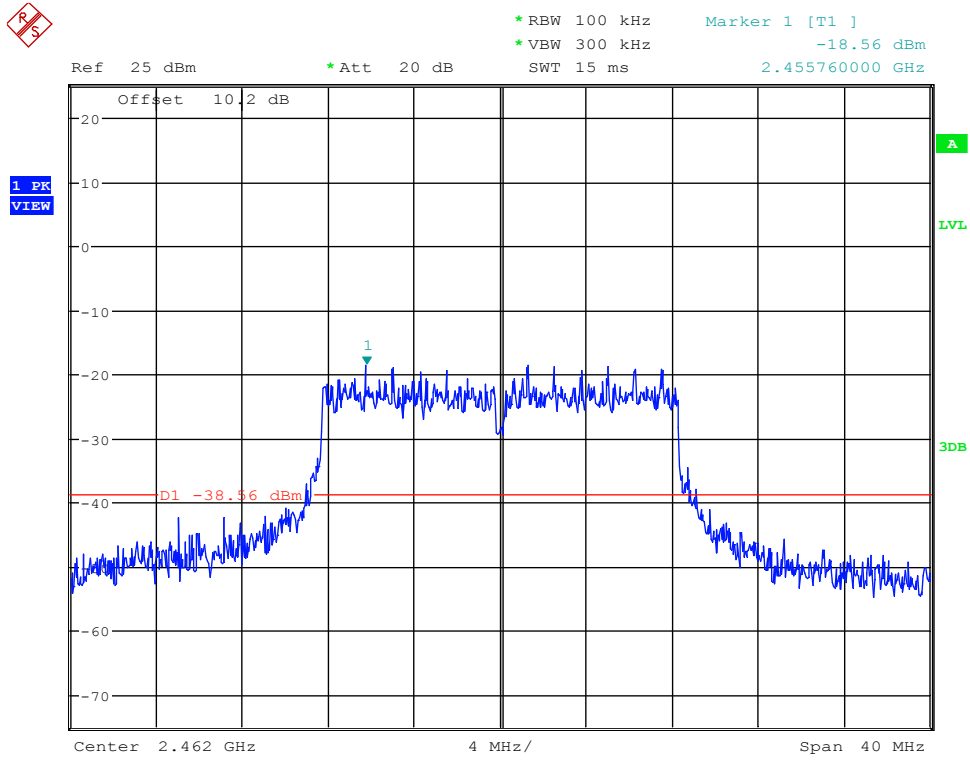

Date: 8.JAN.2018 11:37:38

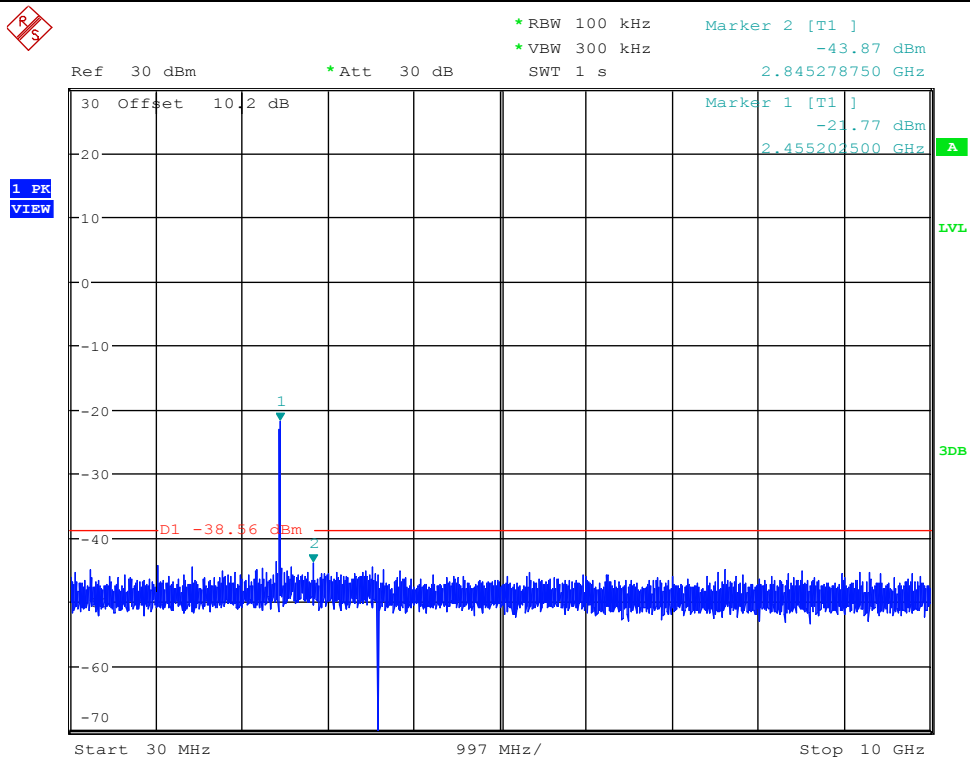


Date: 8.JAN.2018 11:37:50

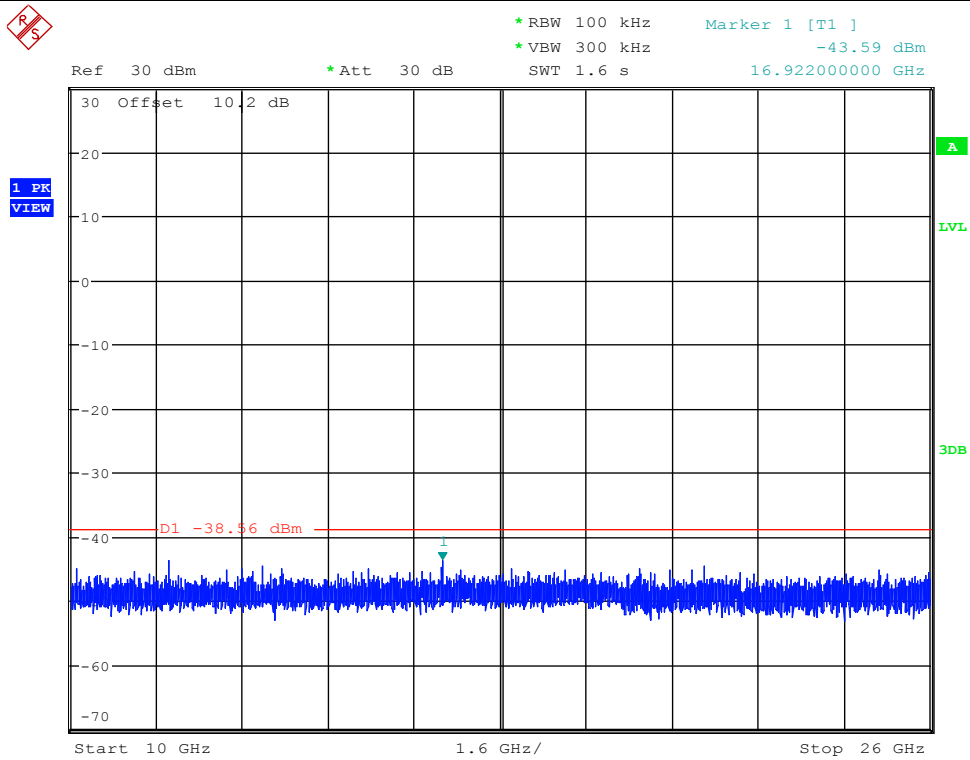


Date: 8.JAN.2018 11:38:00


RF Conducted Spurious Emissions_11GMIMO_2462_Ant2

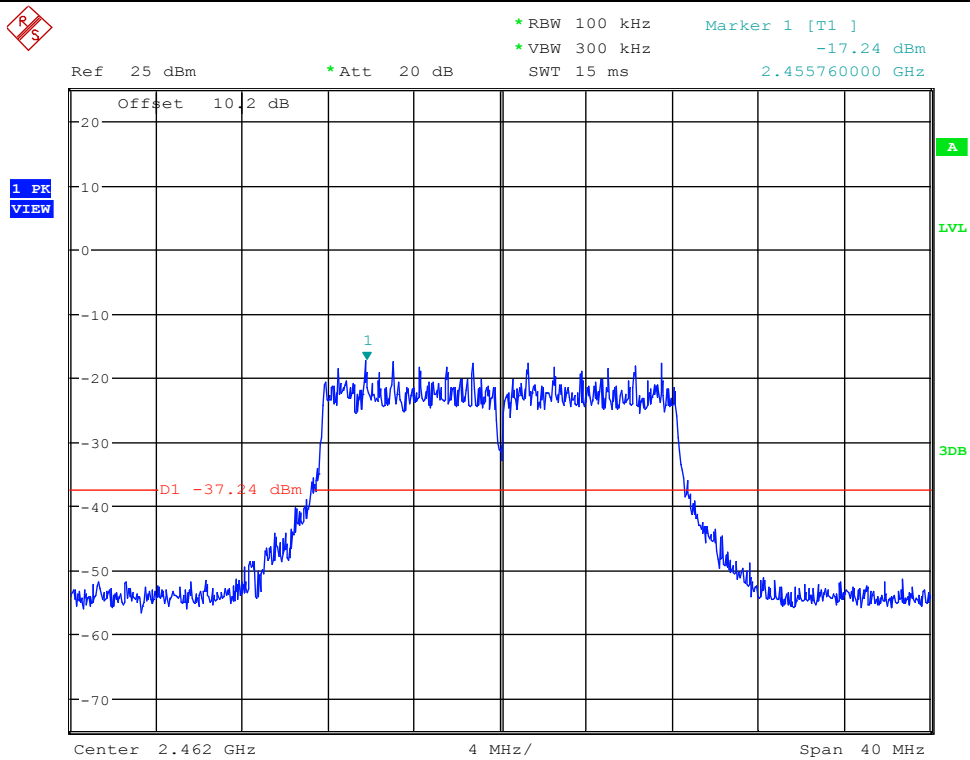

Date: 8.JAN.2018 11:48:30

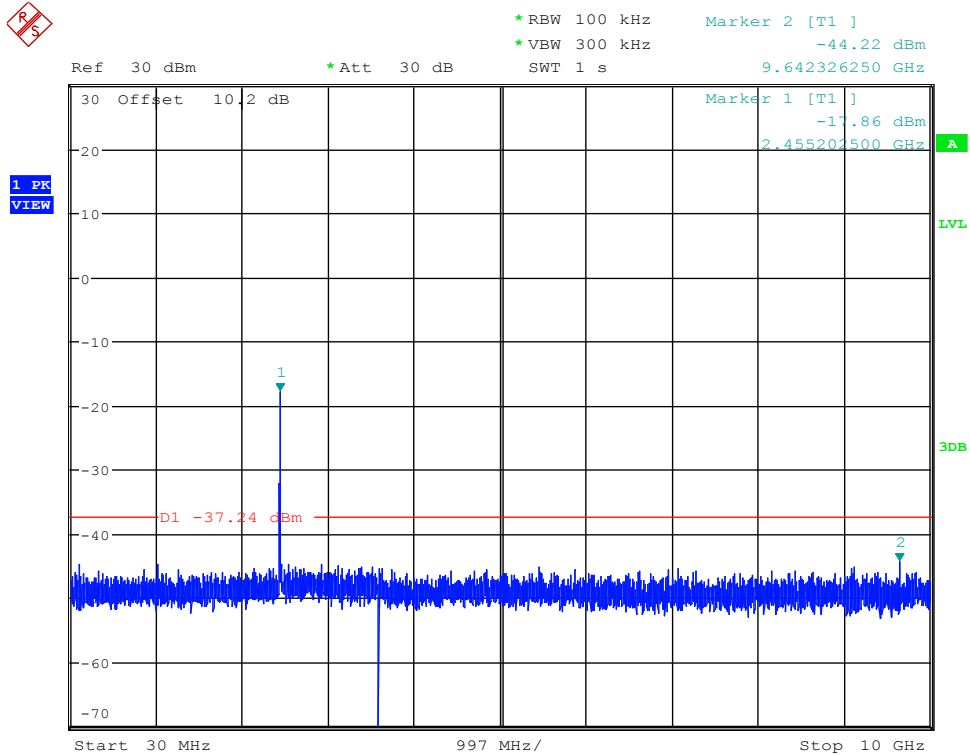


Date: 8.JAN.2018 11:48:42

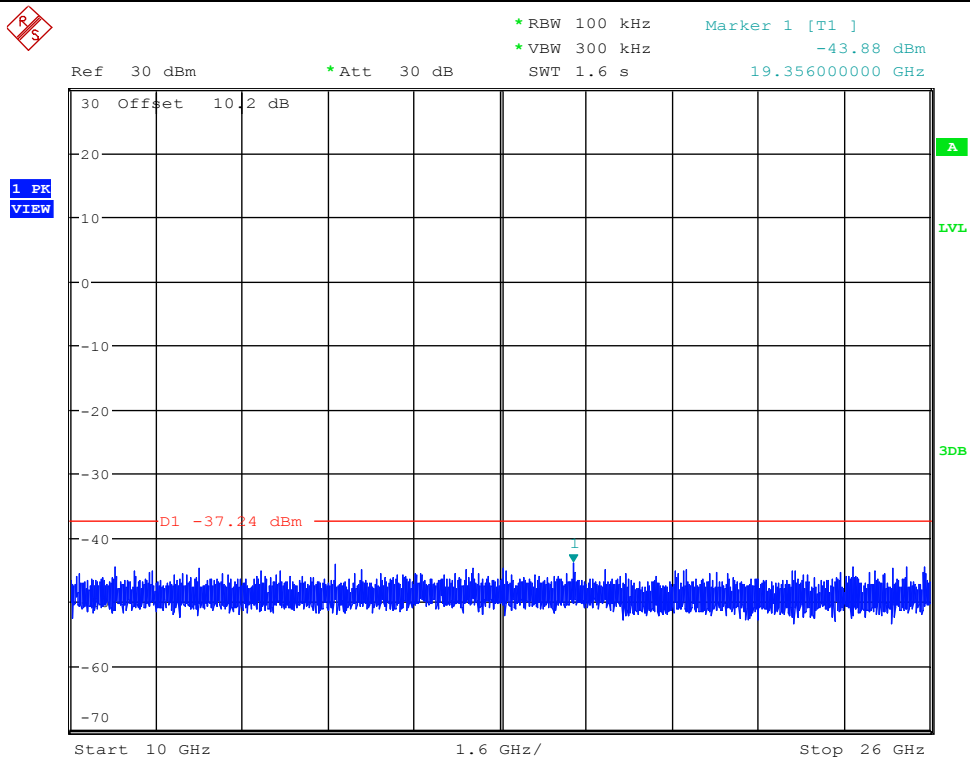


Date: 8.JAN.2018 11:48:52


RF Conducted Spurious Emissions_11N20MIMO_2412_Ant1

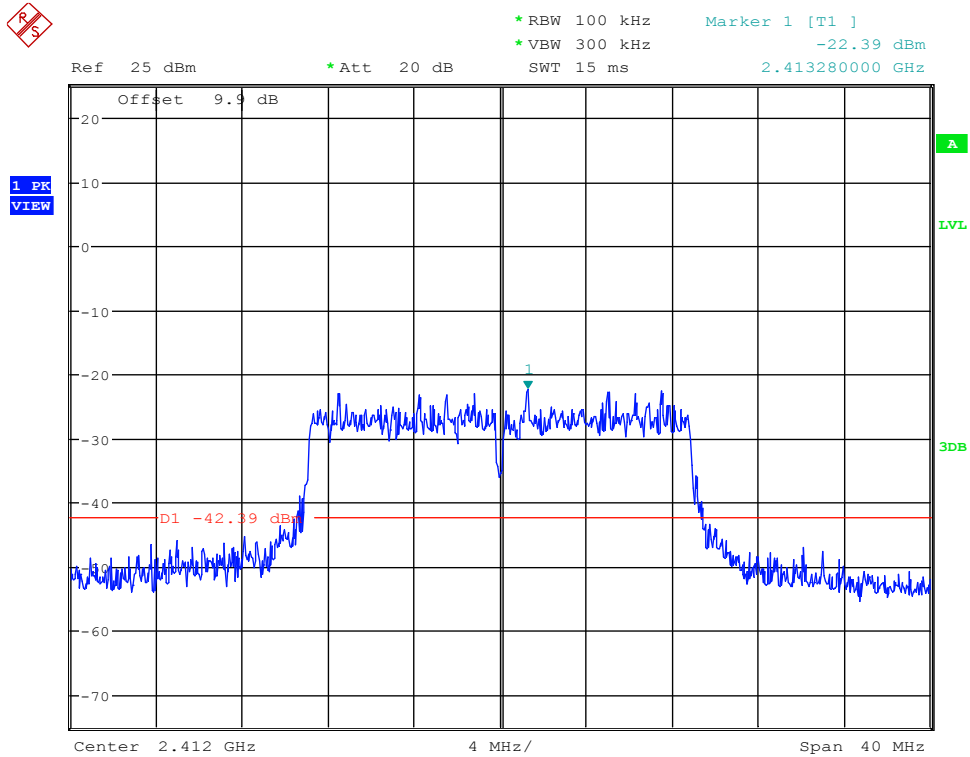

Date: 8.JAN.2018 11:38:44

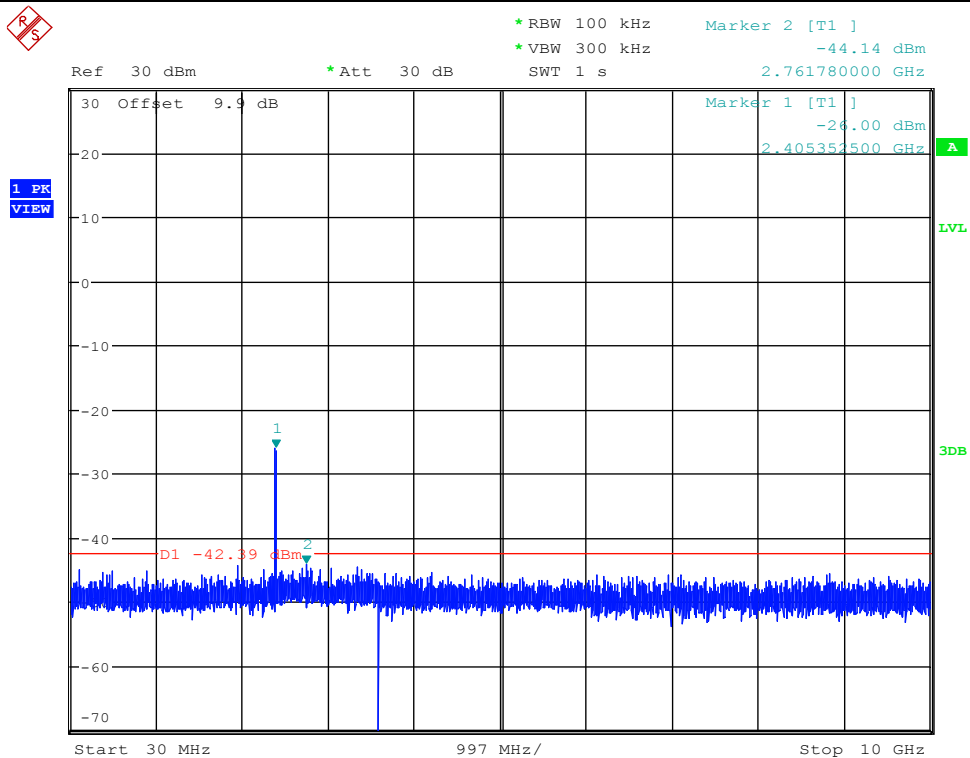


Date: 8.JAN.2018 11:38:55

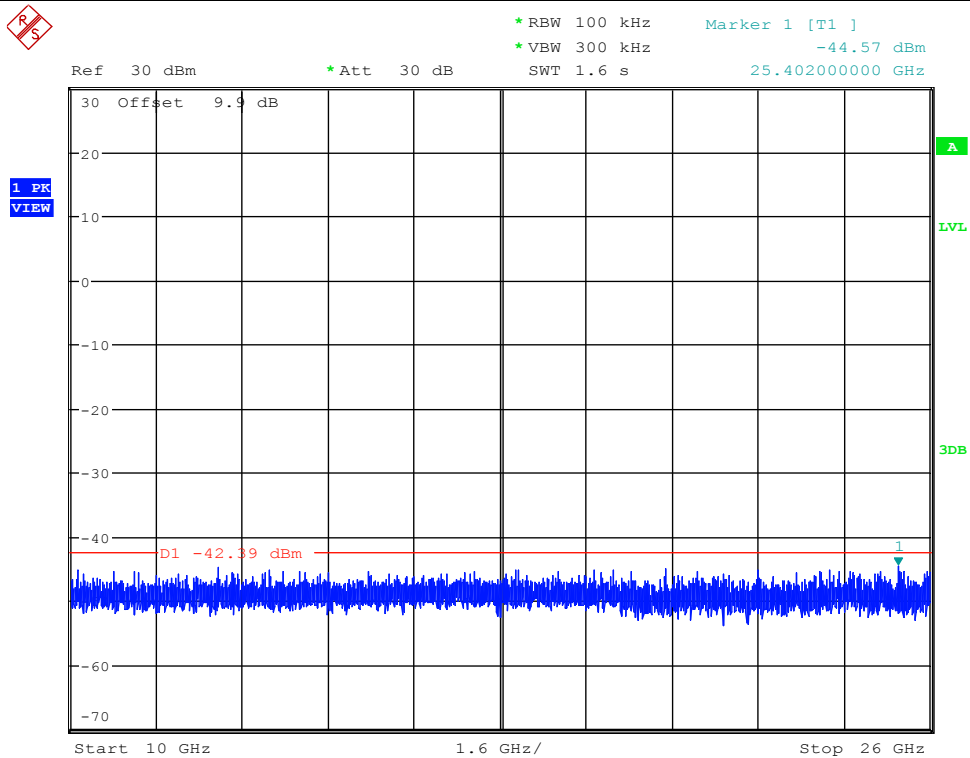


Date: 8.JAN.2018 11:39:05


RF Conducted Spurious Emissions_11N20MIMO_2412_Ant2

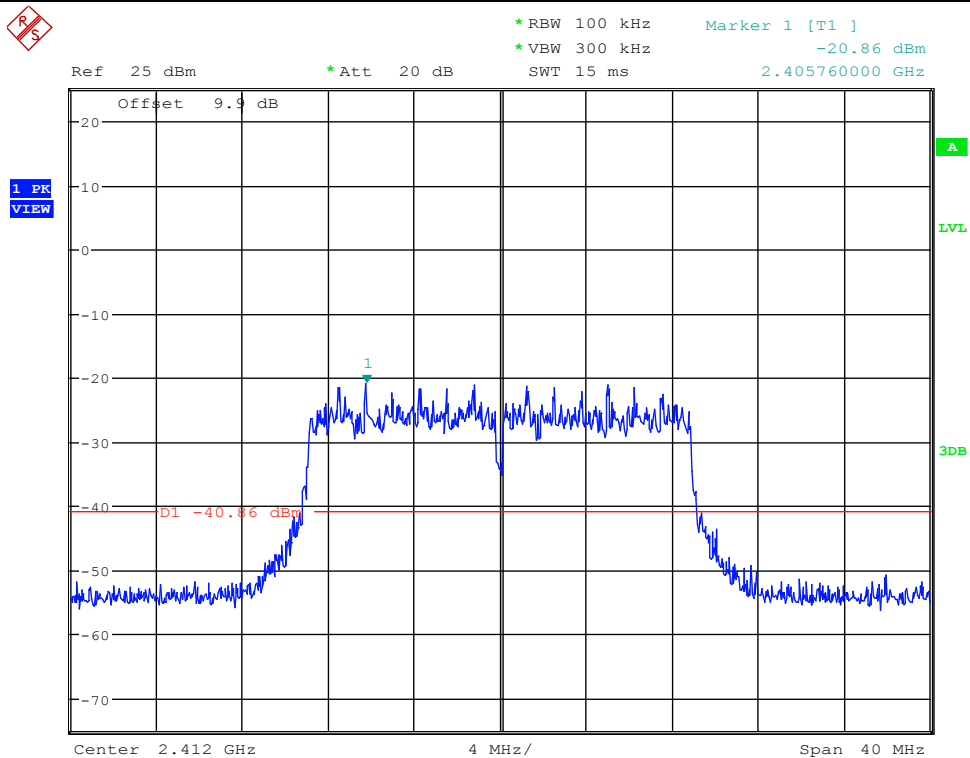

Date: 8.JAN.2018 11:50:06

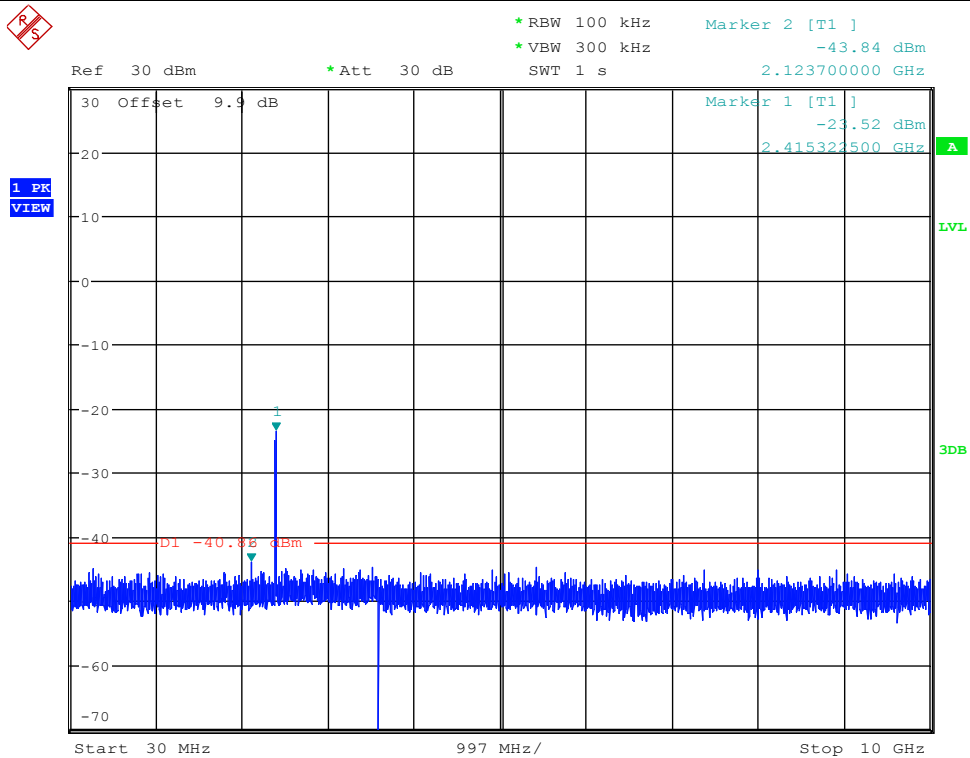


Date: 8.JAN.2018 11:50:17

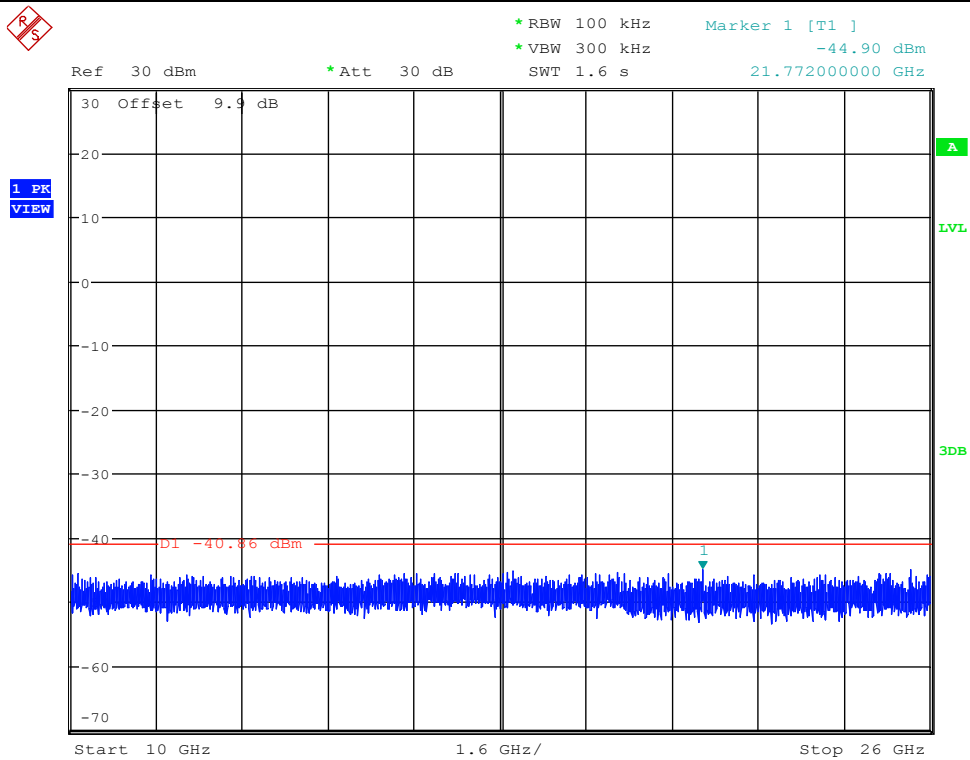


Date: 8.JAN.2018 11:50:27


RF Conducted Spurious Emissions_11N20MIMO_2462_Ant1

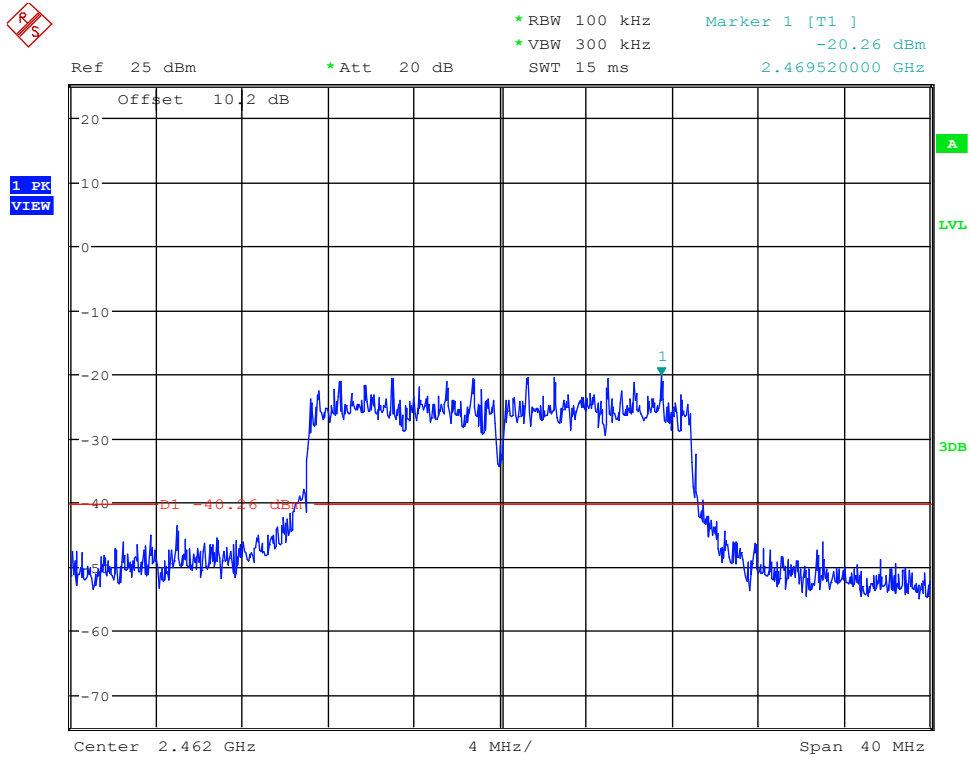

Date: 8.JAN.2018 11:39:44

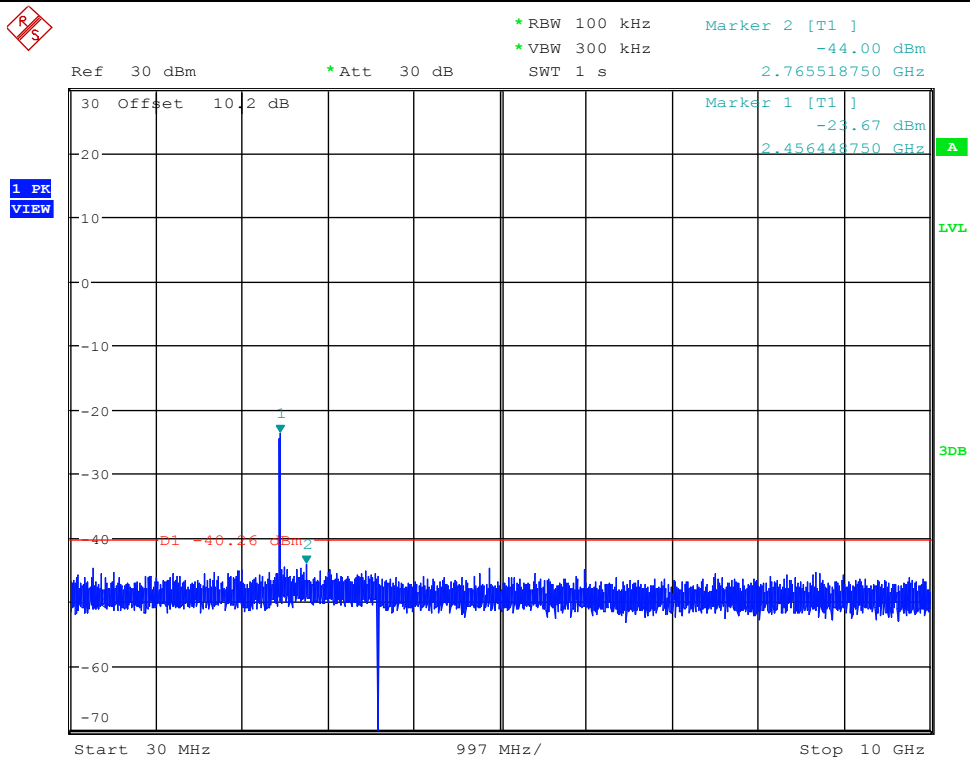


Date: 8.JAN.2018 11:39:56

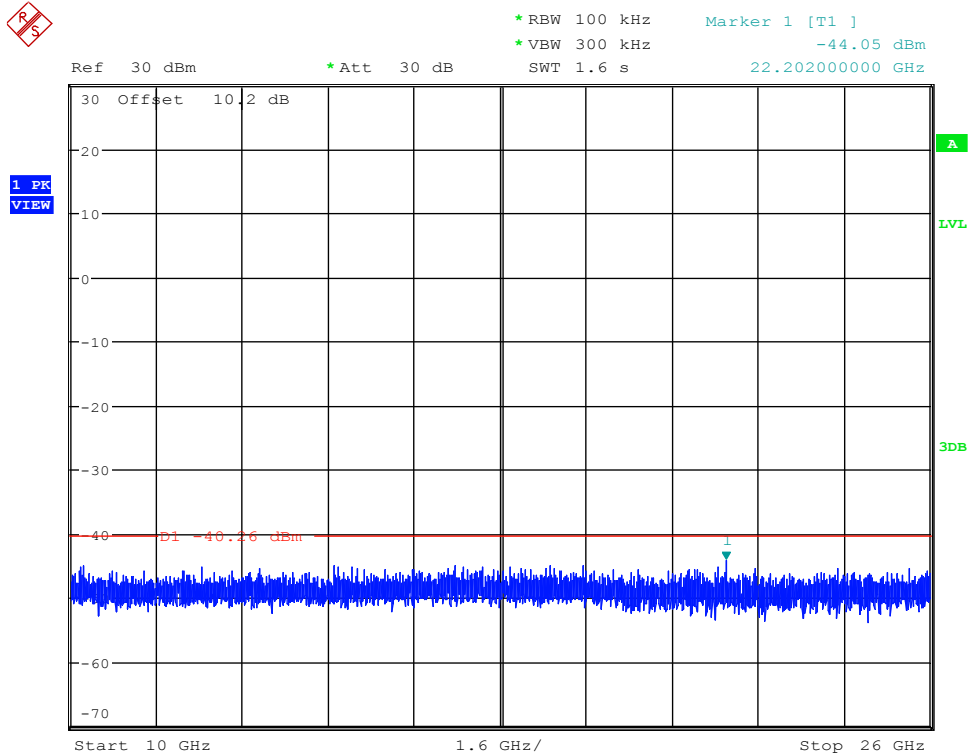


Date: 8.JAN.2018 11:40:06


RF Conducted Spurious Emissions_11N20MIMO_2462_Ant2

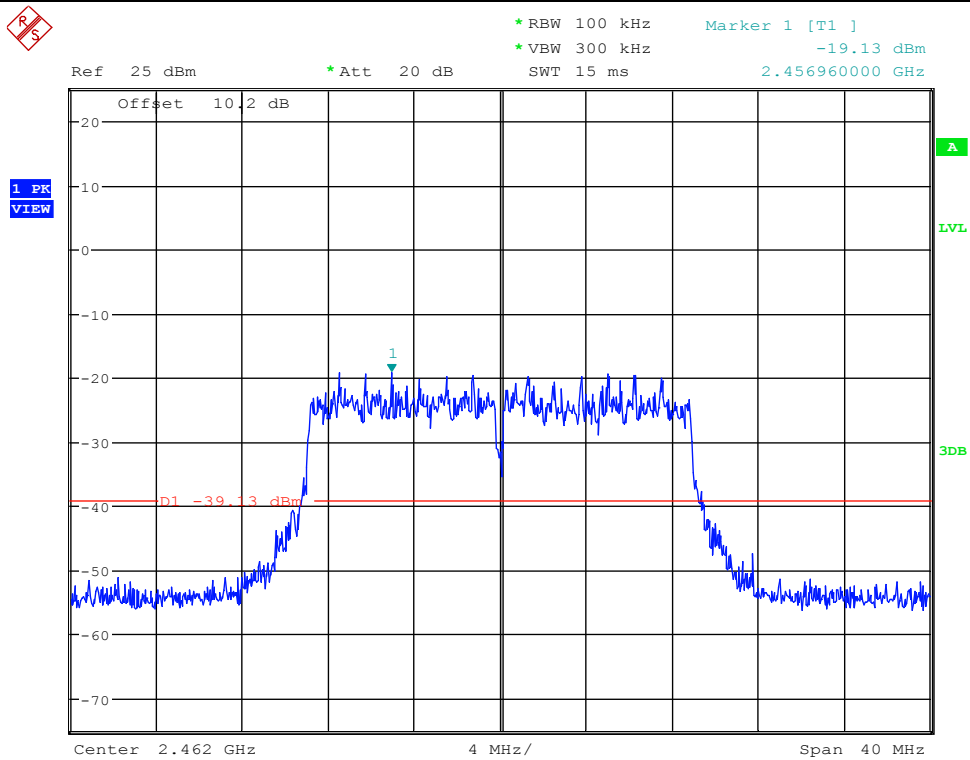

Date: 8.JAN.2018 11:51:38

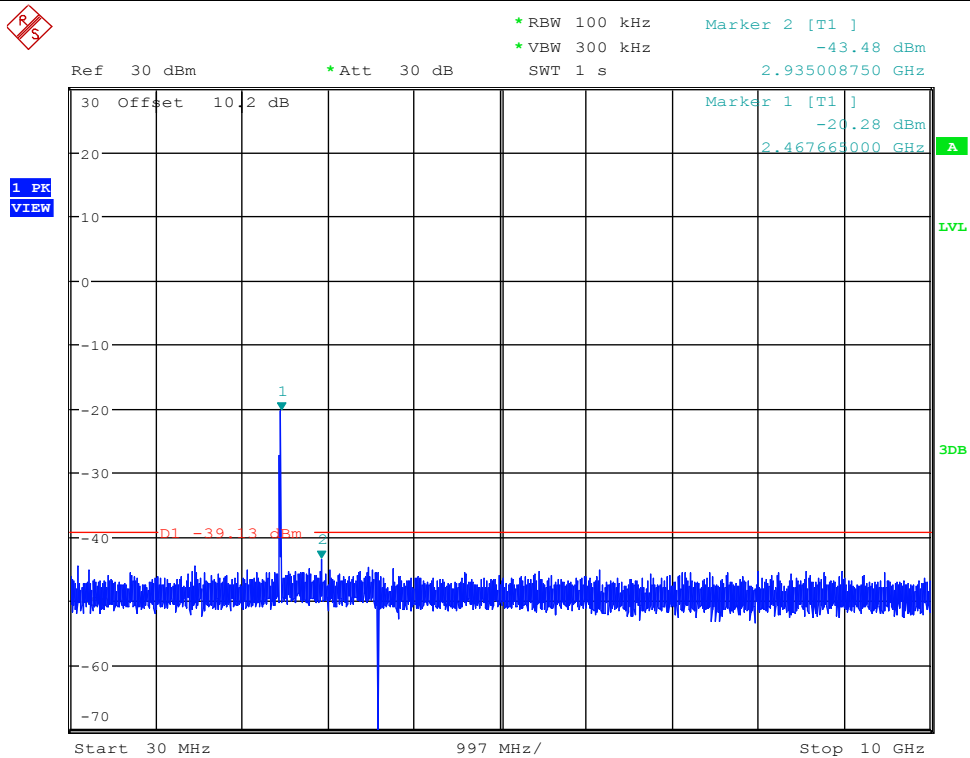


Date: 8.JAN.2018 11:51:49

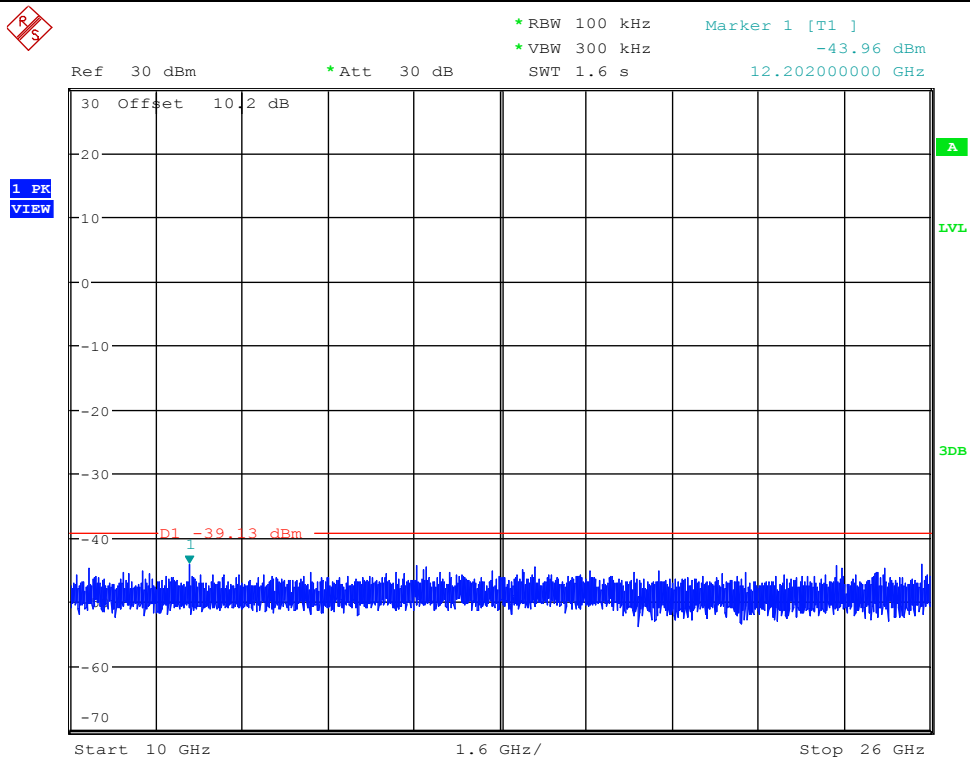


Date: 8.JAN.2018 11:51:59


RF Conducted Spurious Emissions_11N40MIMO_2422_Ant1

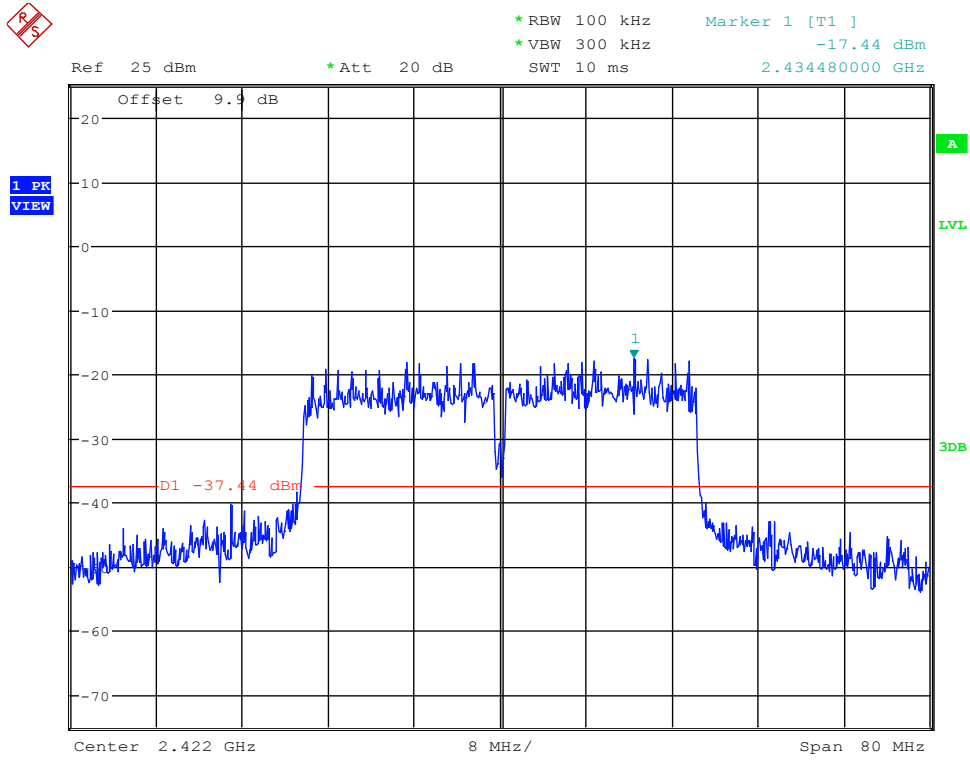

Date: 8.JAN.2018 11:42:13

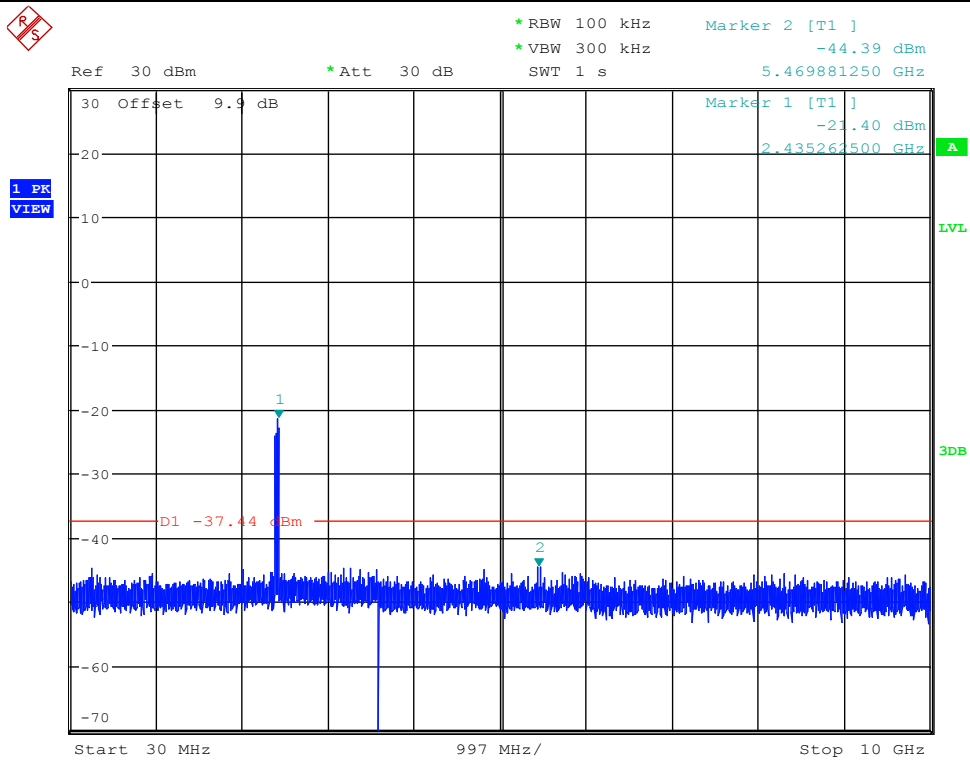


Date: 8.JAN.2018 11:42:24

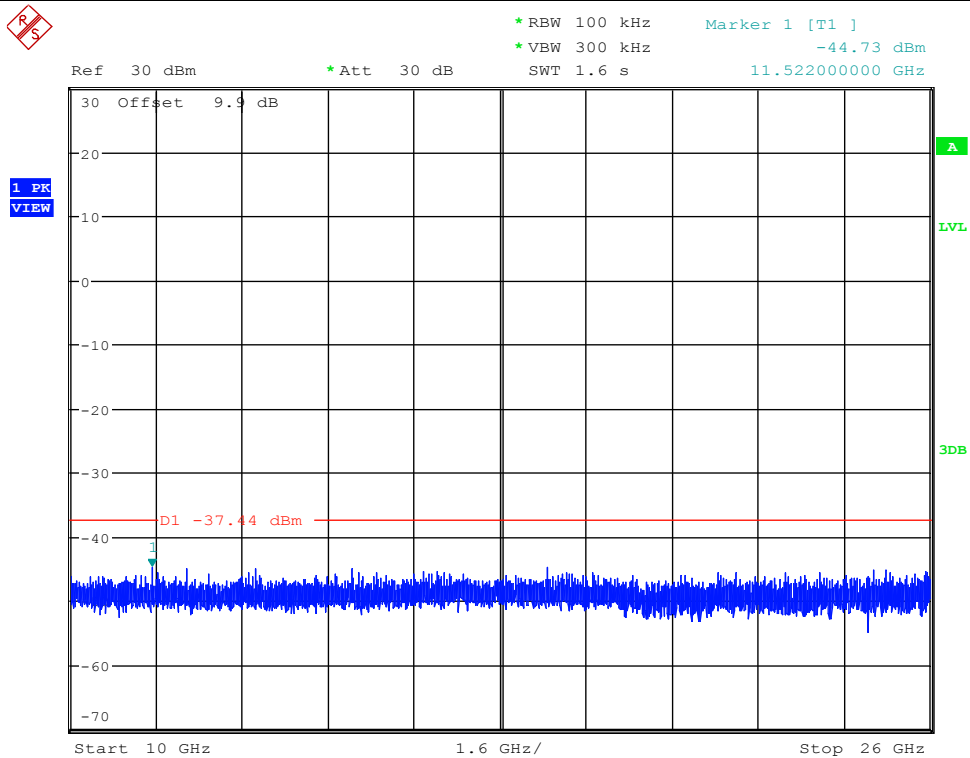


Date: 8.JAN.2018 11:42:34


RF Conducted Spurious Emissions_11N40MIMO_2422_Ant2

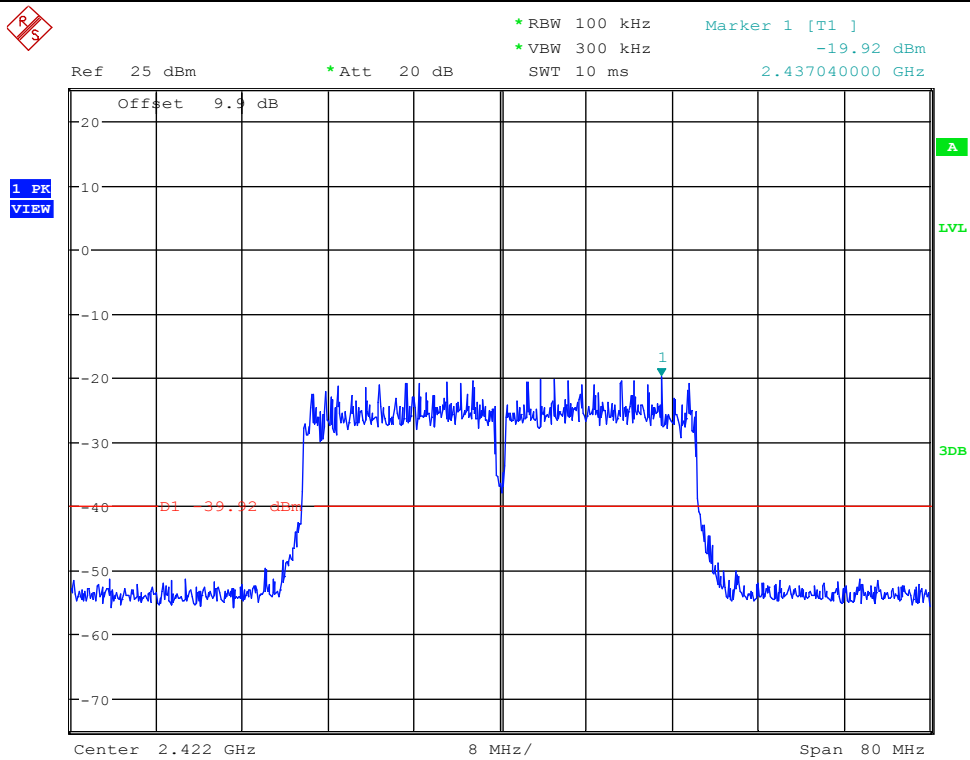

Date: 8.JAN.2018 11:52:19

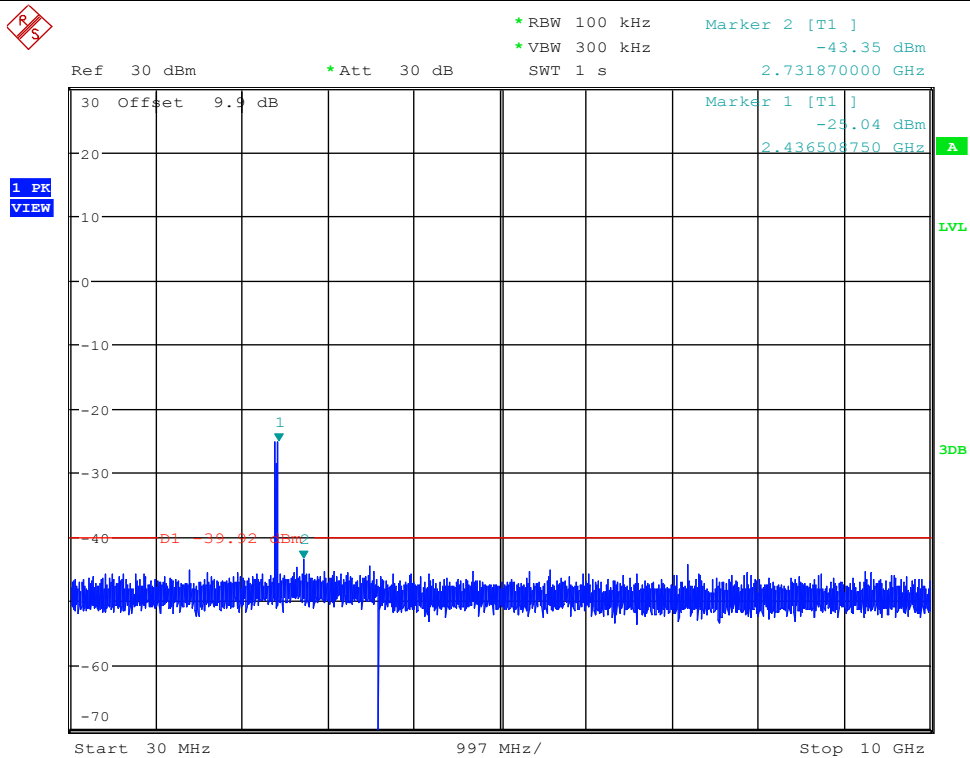


Date: 8.JAN.2018 11:52:31

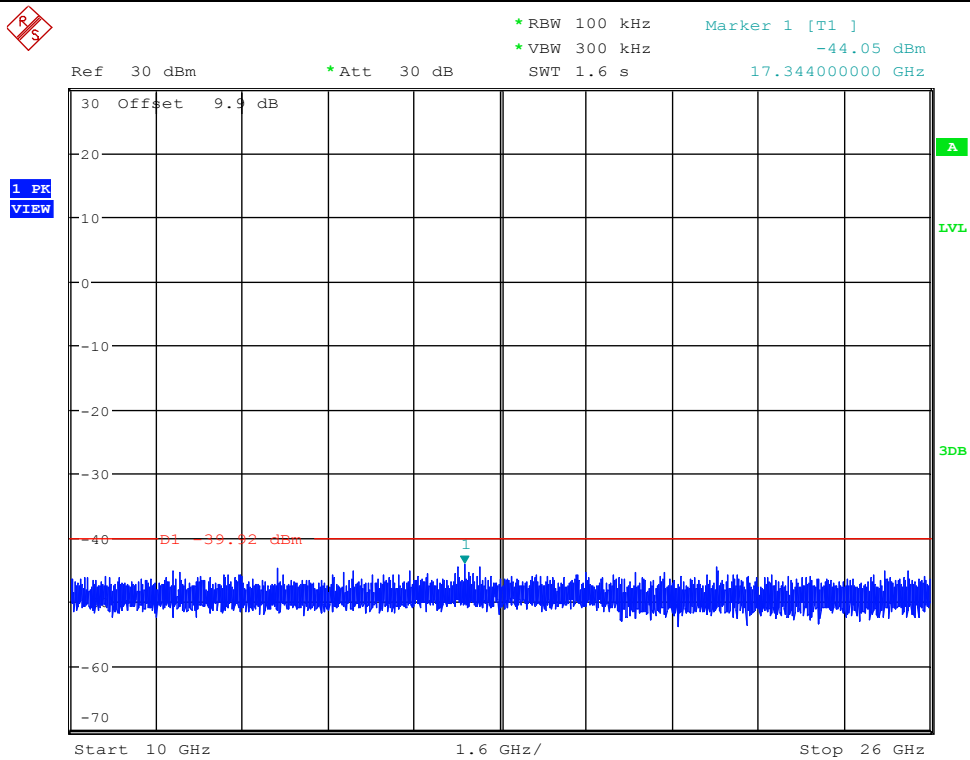


Date: 8.JAN.2018 11:52:41


RF Conducted Spurious Emissions_11N40MIMO_2452_Ant1

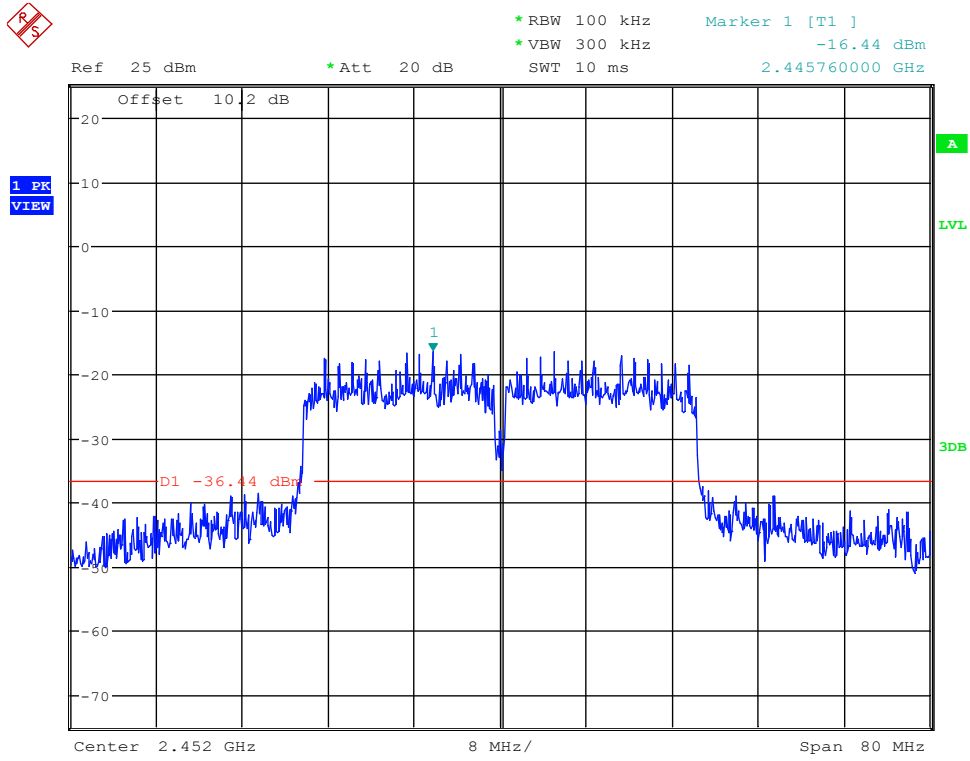

Date: 8.JAN.2018 11:43:12

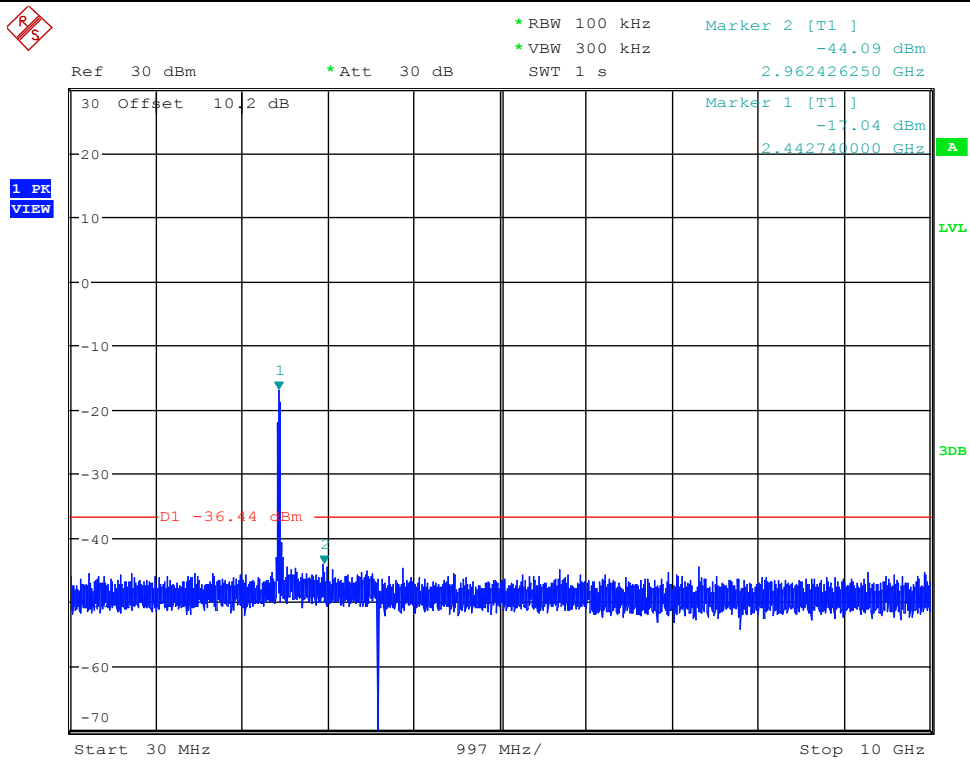


Date: 8.JAN.2018 11:43:23

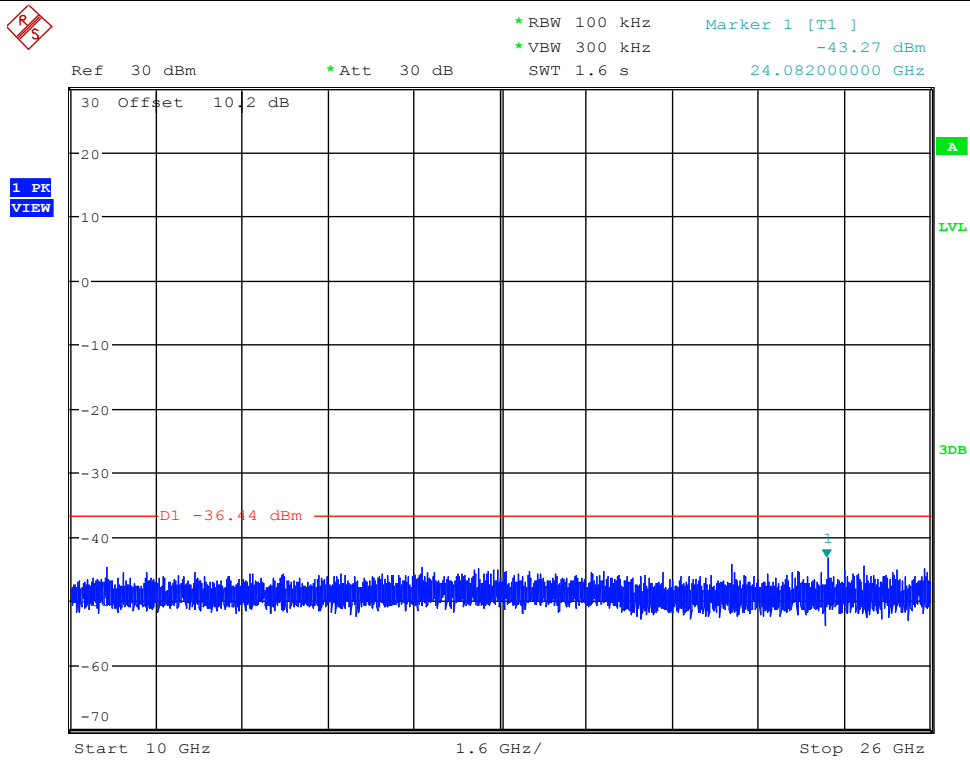


Date: 8.JAN.2018 11:43:33


RF Conducted Spurious Emissions_11N40MIMO_2452_Ant2

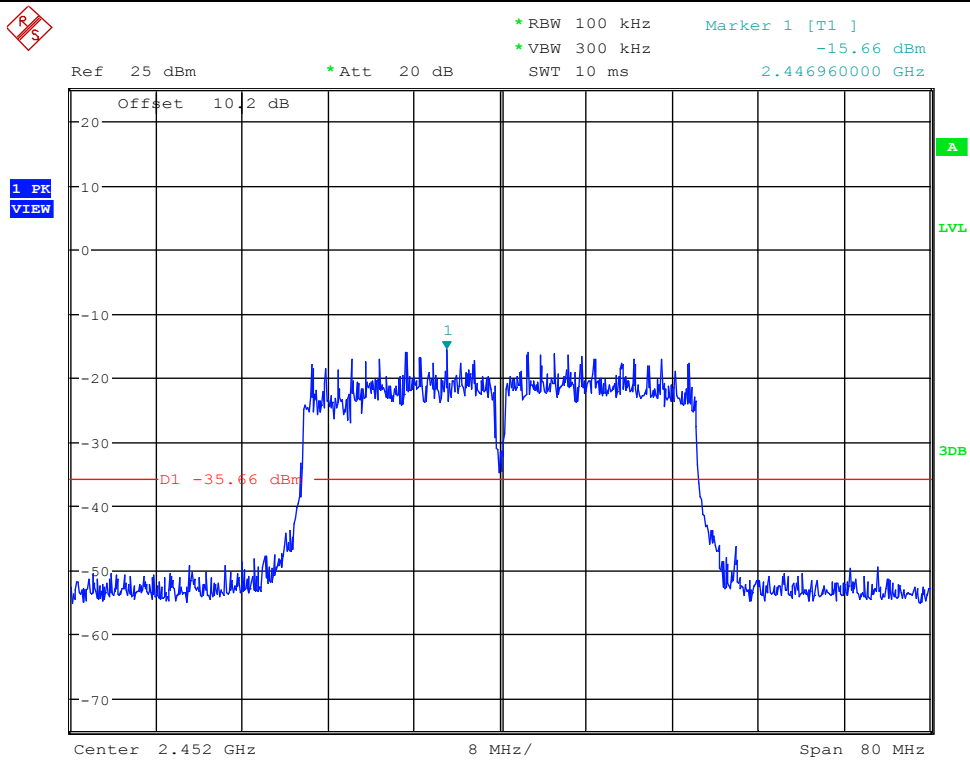

Date: 8.JAN.2018 11:53:11

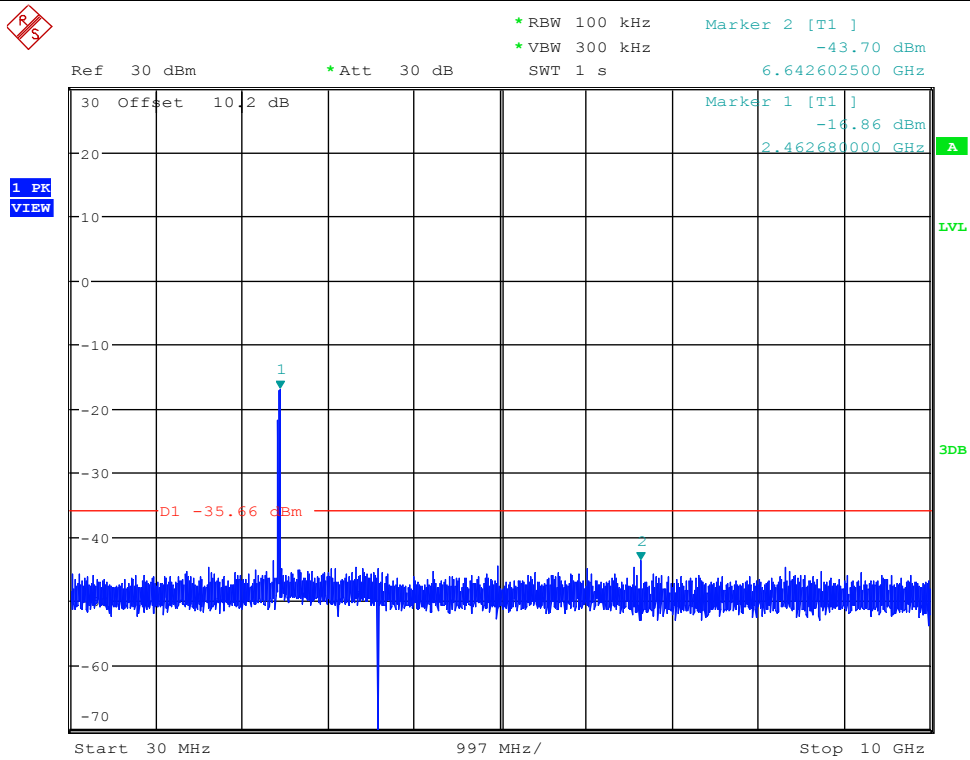


Date: 8.JAN.2018 11:53:23

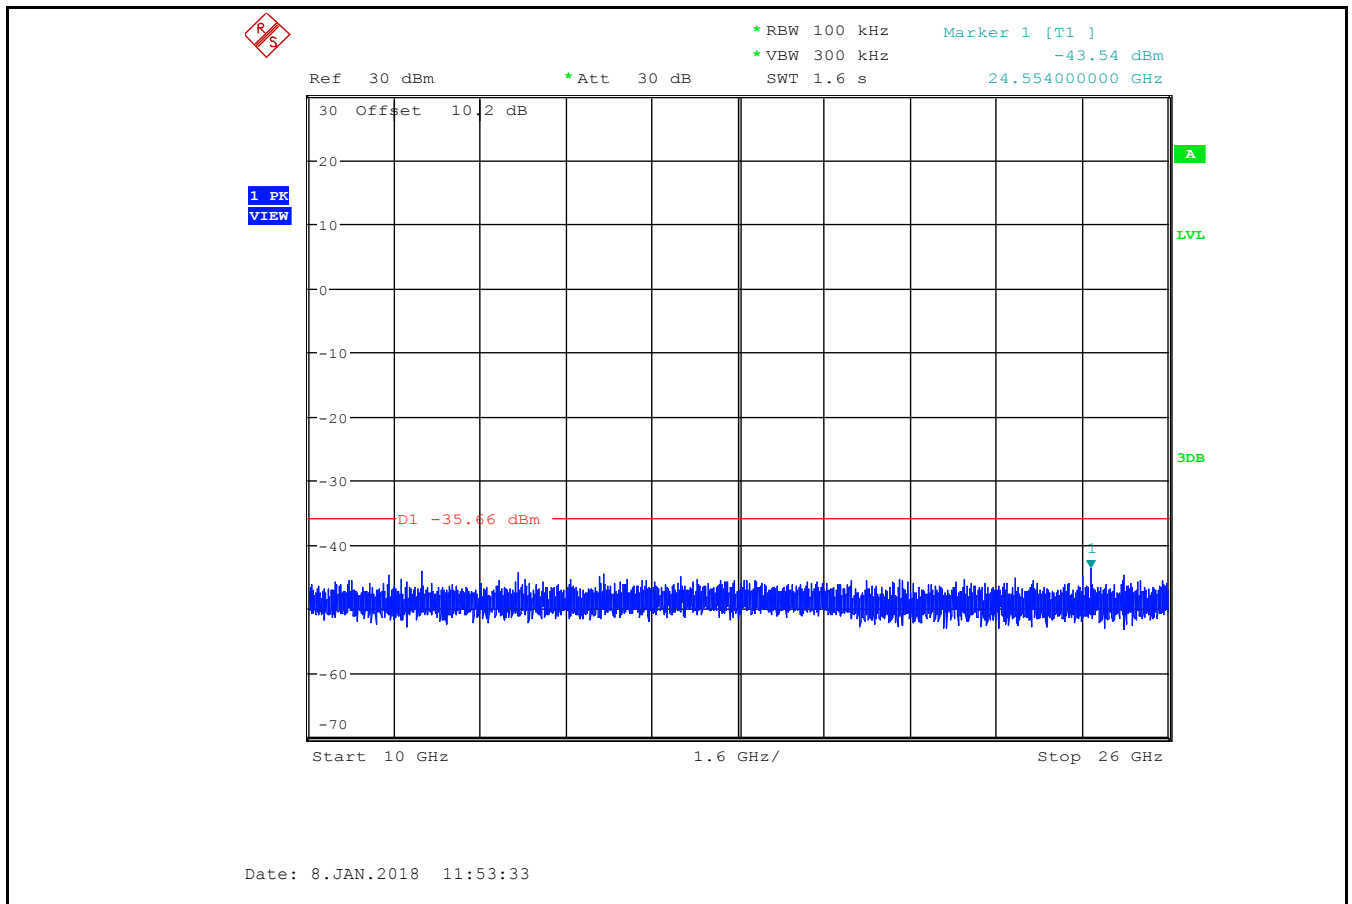


7. Radiated Spurious Emissions

7.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz-30MHz

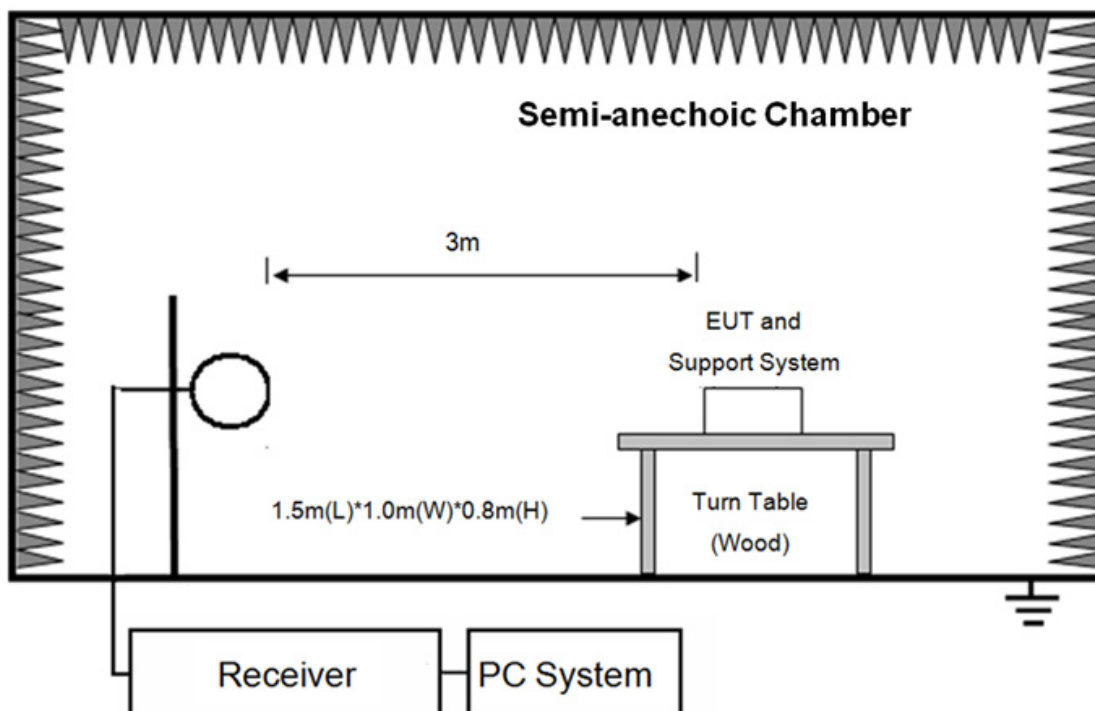

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

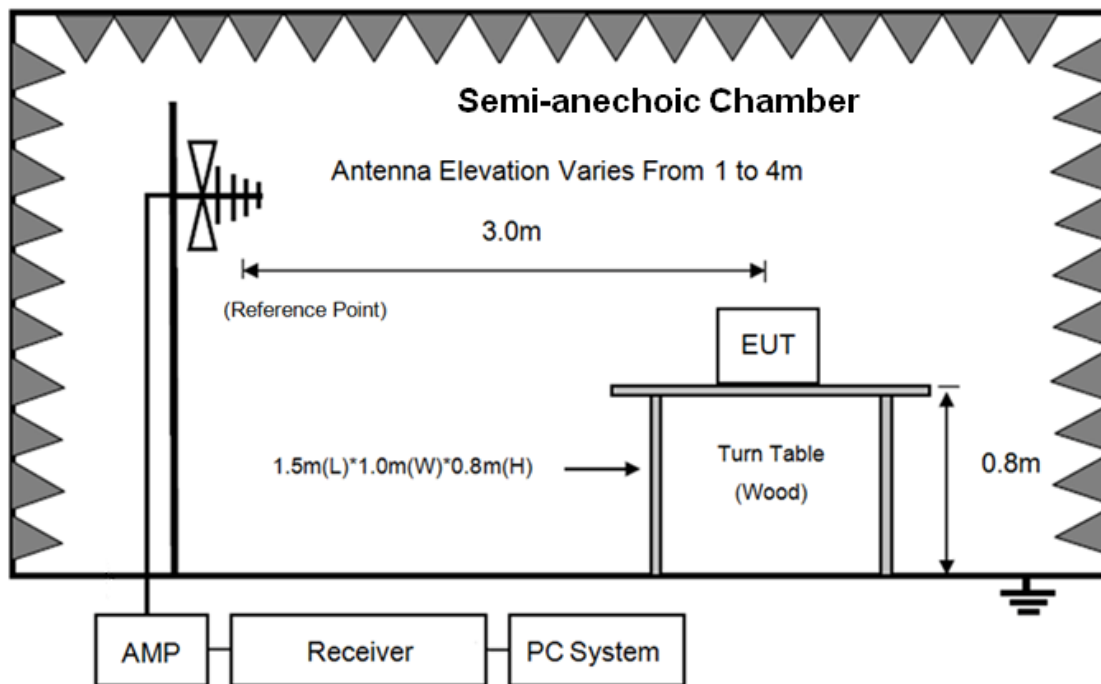

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

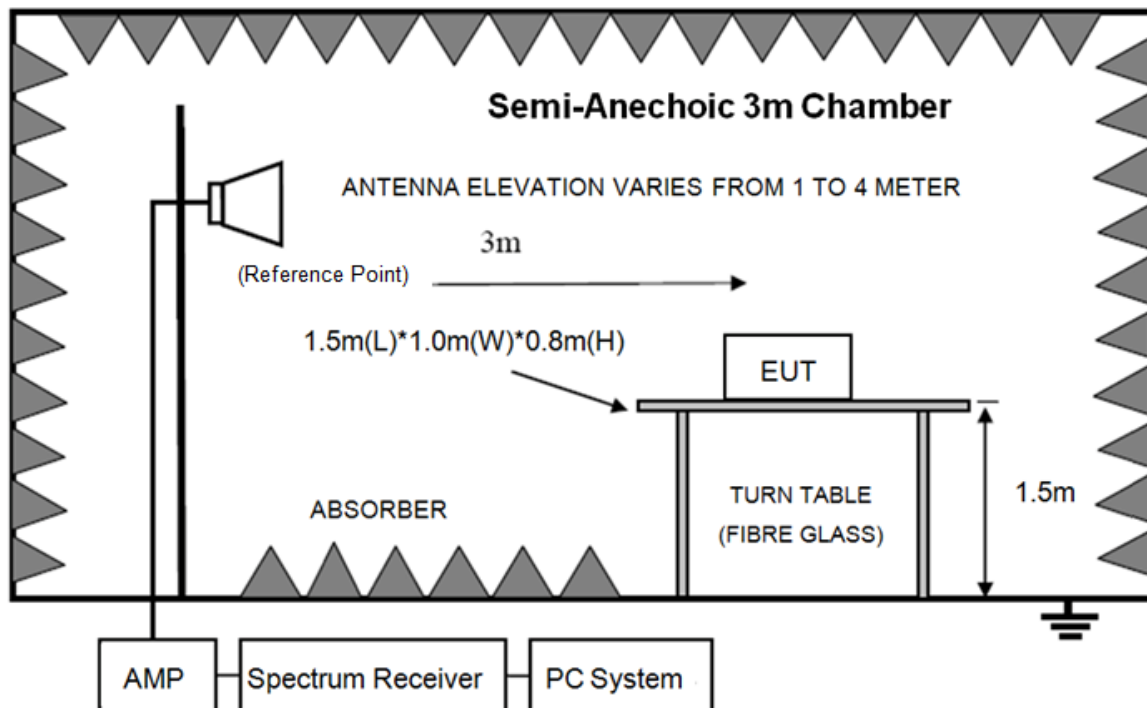

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

7.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.G
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

8.2.2 FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(KHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(KHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1)The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30m}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

7.3. Test Procedure

- (1) EUT height should be 0.8m for below 1GHz at a semi - anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers.
- (2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9KHz-30MHz	Active Loop antenna	3 m
30MHz-1GHz	Trilog Broadband Antenna	3 m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of

Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9KHz to 25GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9KHz to 18GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

- (5) The emissions from 9KHz to 1GHz were measured based on CISPR QP detector except for the

frequency bands 9-90KHz, 110-490KHz, for emissions from 9KHz-90KHz, 110KHz-490KHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.

- (6) The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RMS detector RBW 1MHz VBW 3MHz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

7.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9KHz to 25GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 25GHz, so the final test was performed with frequency range from 30MHz to 18GHz and recorded in below.

Note2: For emissions below 1GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1GHz, the final test was only performed with EUT working in MIMO mode, 11b, Tx CH6 mode.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E FCC 30M-1G.EM6

Test Date : 2017-12-28

Tested By : TALENT

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode

Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 VULB 9163 1#/3m/VERTICAL

Memo :

Data: 1

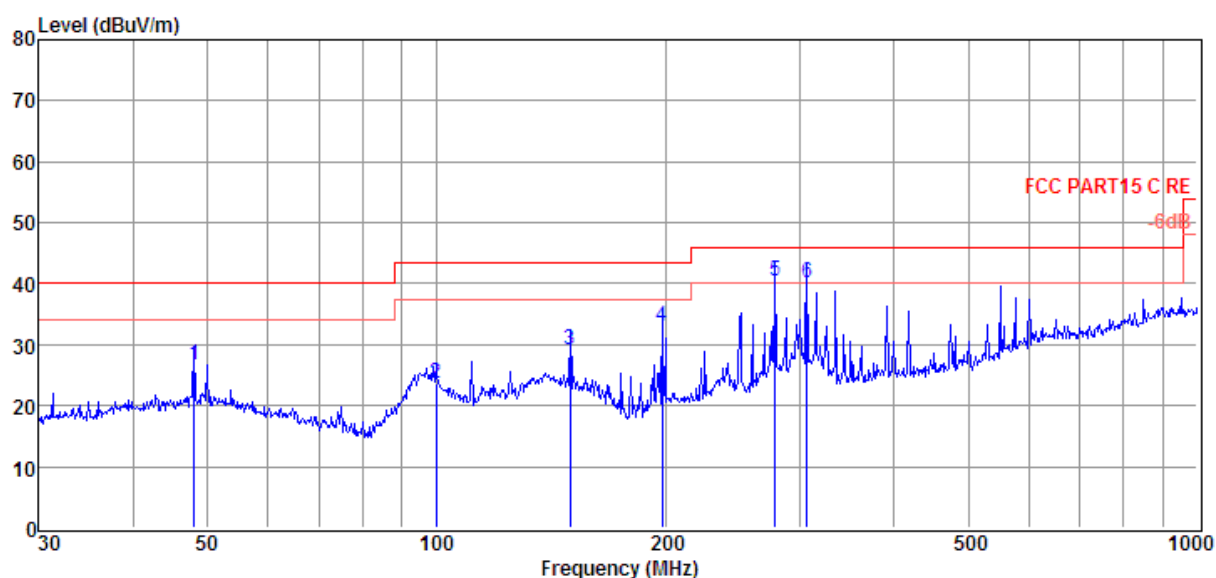

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	47.99	9.19	13.58	3.97	26.74	40.00	-13.26	QP	VERTICAL
2	99.88	7.71	11.48	4.41	23.60	43.50	-19.90	QP	VERTICAL
3	150.01	16.36	8.02	4.77	29.15	43.50	-14.35	QP	VERTICAL
4	197.89	16.61	11.32	5.01	32.94	43.50	-10.56	QP	VERTICAL
5	279.04	22.01	12.98	5.43	40.42	46.00	-5.58	QP	VERTICAL
6	306.75	21.16	13.45	5.55	40.16	46.00	-5.84	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E FCC
30M-1G.EM6

Test Date : 2017-12-28

Tested By : TALENT

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode

Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 VULB 9163 1#/3m/HORIZONTAL

Memo :

Data: 2

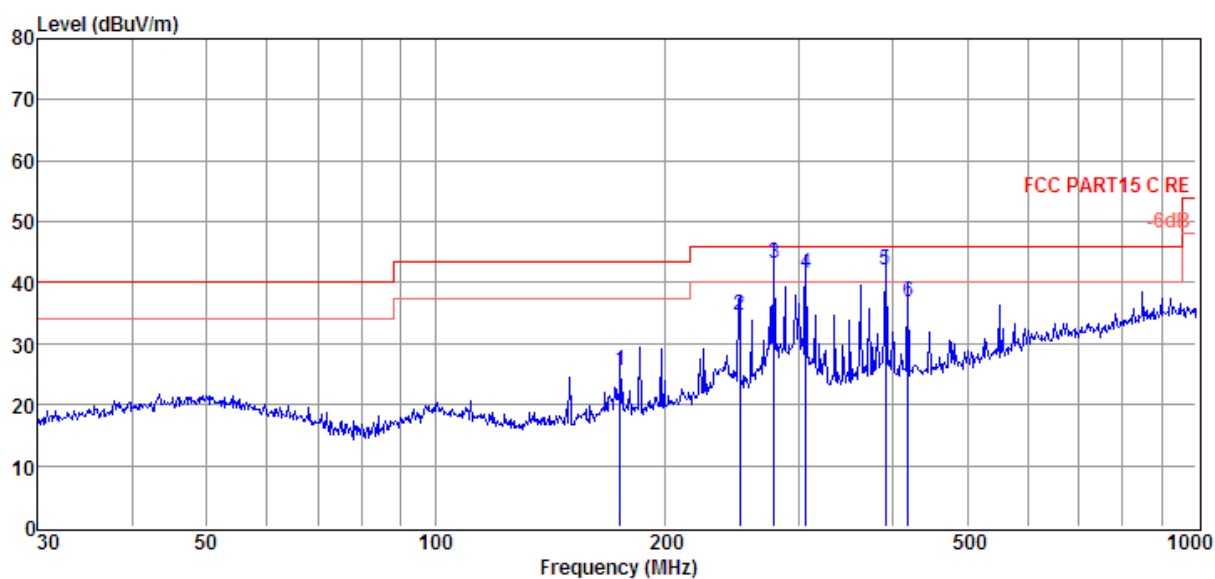

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	175.04	11.12	9.44	4.90	25.46	43.50	-18.04	QP	HORIZONTAL
2	251.18	16.73	12.51	5.30	34.54	46.00	-11.46	QP	HORIZONTAL
3	279.04	24.80	12.98	5.43	43.21	46.00	-2.79	QP	HORIZONTAL
4	306.75	22.65	13.45	5.55	41.65	46.00	-4.35	QP	HORIZONTAL
5	390.72	21.12	15.05	5.91	42.08	46.00	-3.92	QP	HORIZONTAL
6	417.64	15.36	15.64	5.83	36.83	46.00	-9.17	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11b CH1									
4230.00	35.91	33.28	29.09	6.81	46.91	74.00	-27.09	Peak	HORIZONTAL
4825.00	36.11	34.72	29.32	7.40	48.91	54.00	-5.09	Average	HORIZONTAL
6559.00	35.90	35.83	29.94	8.28	50.07	74.00	-23.93	Peak	HORIZONTAL
7596.00	37.09	37.04	30.90	8.87	52.10	74.00	-21.90	Peak	HORIZONTAL
9041.00	35.60	37.52	32.34	10.39	51.17	74.00	-22.83	Peak	HORIZONTAL
9755.00	35.62	37.96	32.82	10.76	51.52	74.00	-22.48	Peak	HORIZONTAL
3839.00	36.86	32.31	29.13	6.45	46.49	74.00	-27.51	Peak	VERTICAL
4825.00	36.25	34.72	29.32	7.40	49.05	54.00	-4.95	Average	VERTICAL
5896.00	35.60	35.66	29.20	8.14	50.20	74.00	-23.80	Peak	VERTICAL
7919.00	35.77	37.17	31.10	9.16	51.00	74.00	-23.00	Peak	VERTICAL
9636.00	36.60	37.84	32.75	10.70	52.39	74.00	-21.61	Peak	VERTICAL
10486.00	34.82	38.49	33.25	10.97	51.03	74.00	-22.97	Peak	VERTICAL
11b CH6									
4434.00	35.31	33.98	29.18	7.01	47.12	74.00	-26.88	Peak	HORIZONTAL
4876.00	34.55	34.80	29.33	7.46	47.48	54.00	-6.52	Average	HORIZONTAL
5896.00	35.13	35.66	29.20	8.14	49.73	74.00	-24.27	Peak	HORIZONTAL
7324.00	37.14	36.93	30.59	8.62	52.10	74.00	-21.90	Peak	HORIZONTAL
8650.00	33.17	37.36	31.98	9.97	48.52	74.00	-25.48	Peak	HORIZONTAL
9755.00	36.56	37.96	32.82	10.76	52.46	74.00	-21.54	Peak	HORIZONTAL
3839.00	37.90	32.31	29.13	6.45	47.53	74.00	-26.47	Peak	VERTICAL
4876.00	35.23	34.80	29.33	7.46	48.16	54.00	-5.84	Average	VERTICAL
5981.00	35.46	35.69	29.19	8.20	50.16	74.00	-23.84	Peak	VERTICAL
6950.00	36.72	36.69	30.34	8.32	51.39	74.00	-22.61	Peak	VERTICAL
8837.00	34.53	37.43	32.20	10.18	49.94	74.00	-24.06	Peak	VERTICAL
9755.00	33.25	37.96	32.82	10.76	49.15	54.00	-4.85	Average	VERTICAL
11b CH11									
4910.00	35.32	34.86	29.33	7.49	48.34	54.00	-5.66	Average	HORIZONTAL
6950.00	35.70	36.69	30.34	8.32	50.37	74.00	-23.63	Peak	HORIZONTAL
7681.00	36.71	37.07	30.96	8.94	51.76	74.00	-22.24	Peak	HORIZONTAL
8446.00	35.55	37.29	31.63	9.74	50.95	74.00	-23.05	Peak	HORIZONTAL
10316.00	34.89	38.39	33.11	10.94	51.11	74.00	-22.89	Peak	HORIZONTAL
10316.00	34.89	38.39	33.11	10.94	51.11	74.00	-22.89	Peak	HORIZONTAL
3805.00	37.22	32.27	29.16	6.42	46.75	74.00	-27.25	Peak	VERTICAL
4910.00	34.97	34.86	29.33	7.49	47.99	54.00	-6.01	Average	VERTICAL
6950.00	35.76	36.69	30.34	8.32	50.43	74.00	-23.57	Peak	VERTICAL
8395.00	35.19	37.28	31.55	9.68	50.60	74.00	-23.40	Peak	VERTICAL
9840.00	36.14	38.04	32.85	10.81	52.14	74.00	-21.86	Peak	VERTICAL
11914.00	34.55	38.85	34.77	10.98	49.61	74.00	-24.39	Peak	VERTICAL

Note: 1.30MHz~25GHz: (Scan with 11b MIMO mode, 11g MIMO mode, 11n HT20 MIMO mode and 11n HT40 MIMO mode, the worst case is 11b MIMO mode)


2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

8. Radiated Band Edge Compliance

8.1. Block diagram of test setup

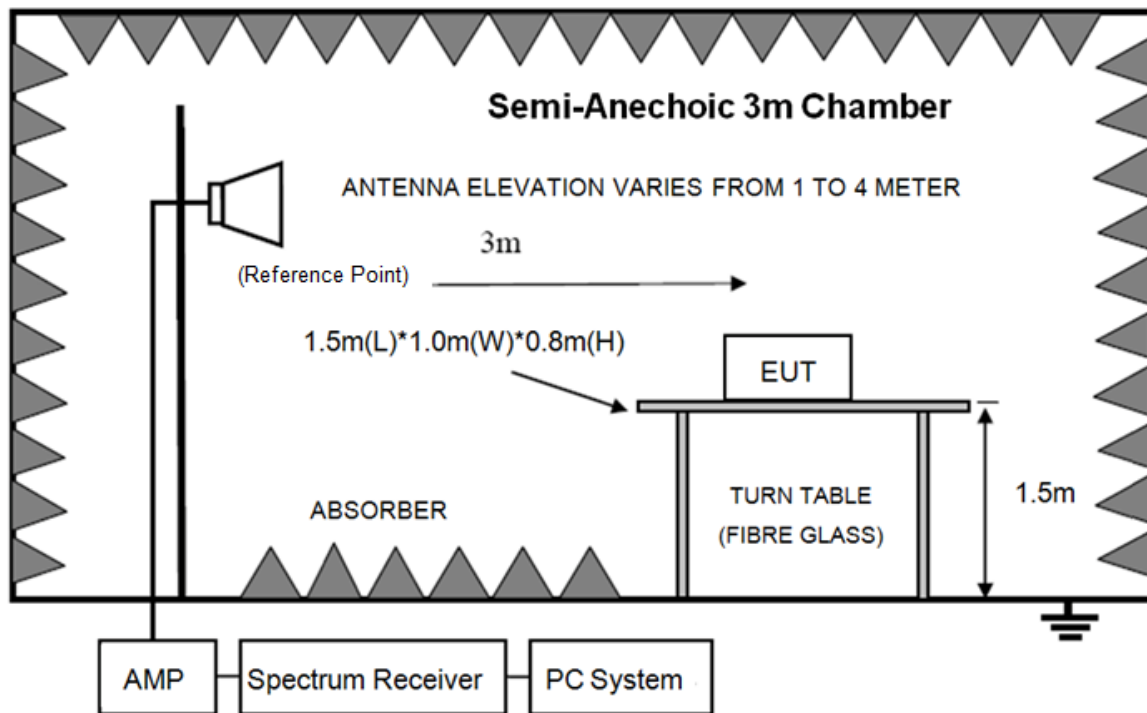

8.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

8.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2100MHz to 2450MHz and 2450MHz to 2500MHz.

Remark: All restriction band have been tested, and only the worse case is shown in report.

NOTE: TEST MODE IS MIMO ONLY

8.4. Test result

PASS. (See below detailed test result)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6

Test Date : 2017-12-28

Tested By : BOBO

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode 11B 2412

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/VERTICAL

Memo :

Data: 3

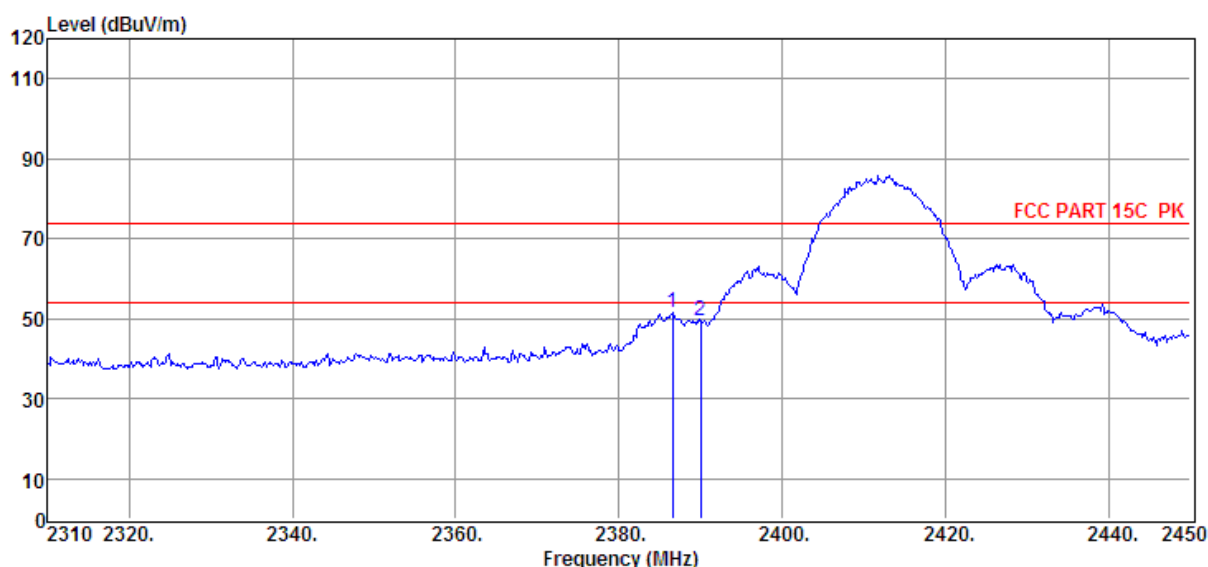

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBuV)	(dB/m)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)		
1	2386.58	48.99	26.99	29.41	5.11	51.68	74.00	-22.32	Peak	VERTICAL
2	2390.00	46.99	27.00	29.42	5.11	49.68	74.00	-24.32	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-28
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11B 2412
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Data: 4

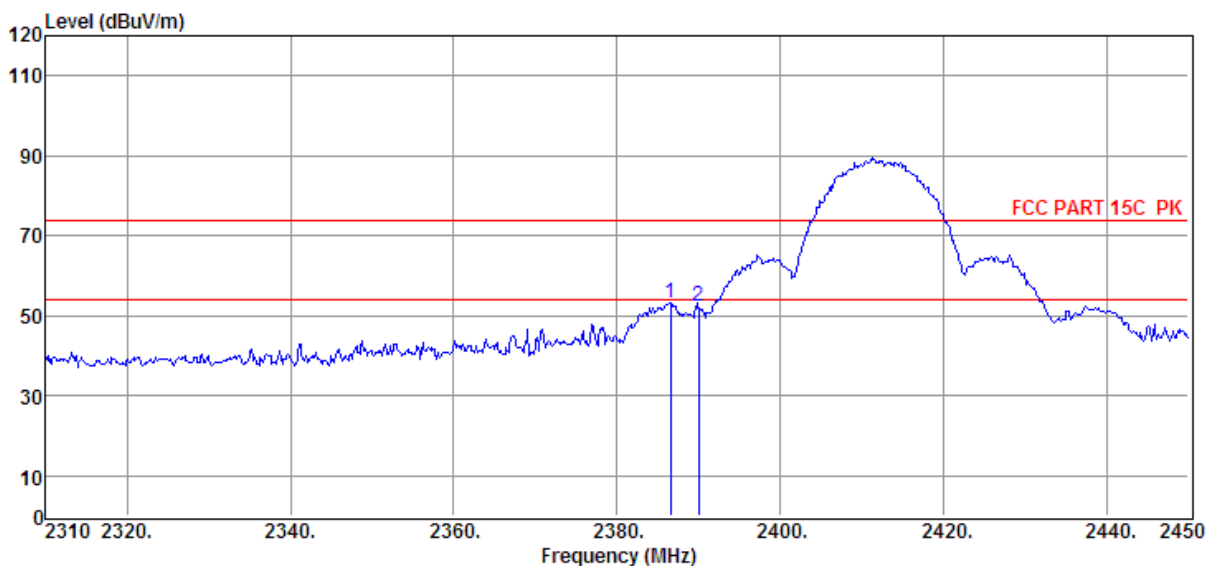

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBuV)	(dB/m)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)		
1	2386.58	50.68	26.99	29.41	5.11	53.37	74.00	-20.63	Peak	HORIZONTAL
2	2390.00	49.48	27.00	29.42	5.11	52.17	74.00	-21.83	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6

Test Date : 2017-12-29

Tested By : BOBO

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode 11B 2462

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Memo :

Data: 9

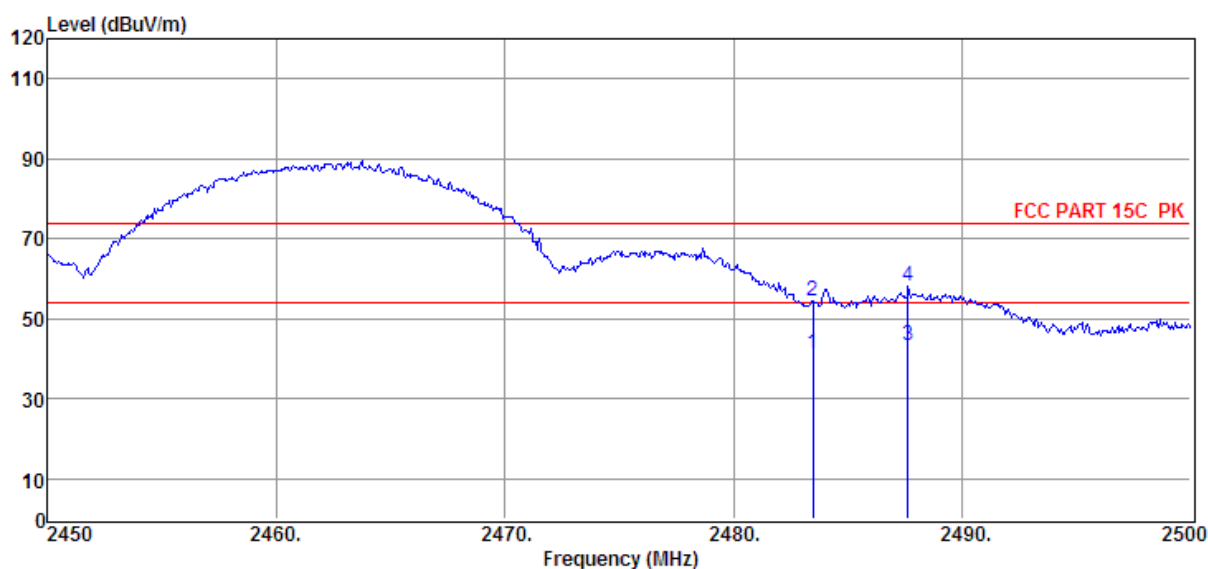

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dB/m)	dB	dB	(dBμV/m)	(dBμV/m)	(dB)		
1	2483.50	38.25	27.34	29.71	5.21	41.09	54.00	-12.91	Average	HORIZONTAL
2	2483.50	51.58	27.34	29.71	5.21	54.42	74.00	-19.58	Peak	HORIZONTAL
3	2487.65	40.35	27.36	29.71	5.22	43.22	54.00	-10.78	Average	HORIZONTAL
4	2487.65	55.44	27.36	29.71	5.22	58.31	74.00	-15.69	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-29
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
 FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11B 2462
Antenna/Distance : 2017 HF907/3m/VERTICAL

Data: 10

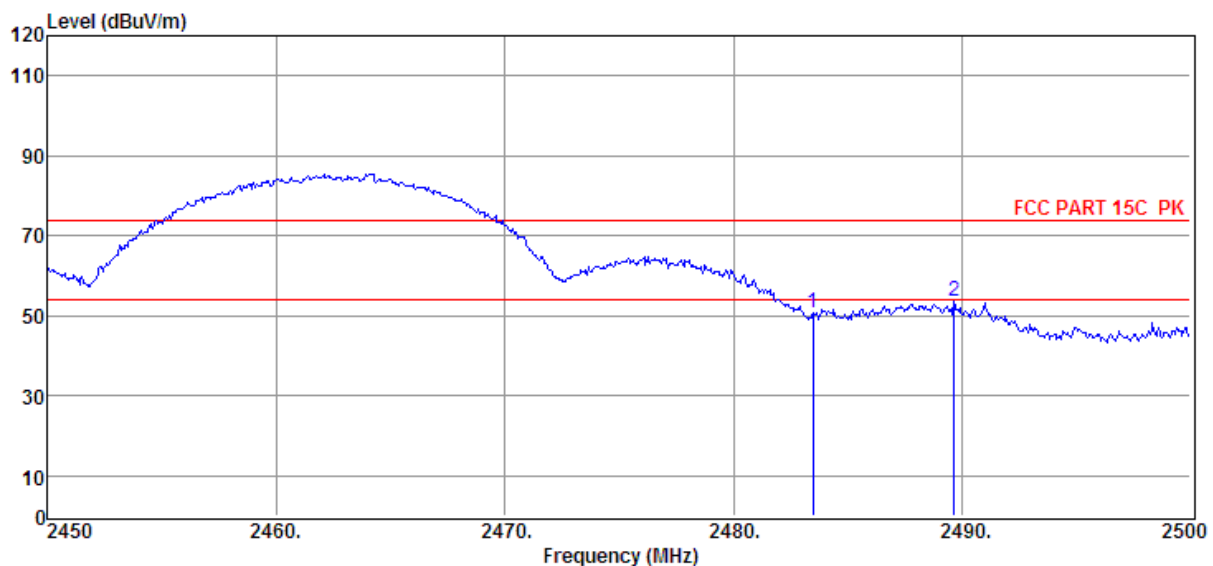

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dB/m)	dB	dB	(dBμV/m)	(dBμV/m)	(dB)		
1	2483.50	48.01	27.34	29.71	5.21	50.85	74.00	-23.15	Peak	VERTICAL
2	2489.65	50.84	27.36	29.71	5.22	53.71	74.00	-20.29	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-29
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11G 2412
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Data: 13

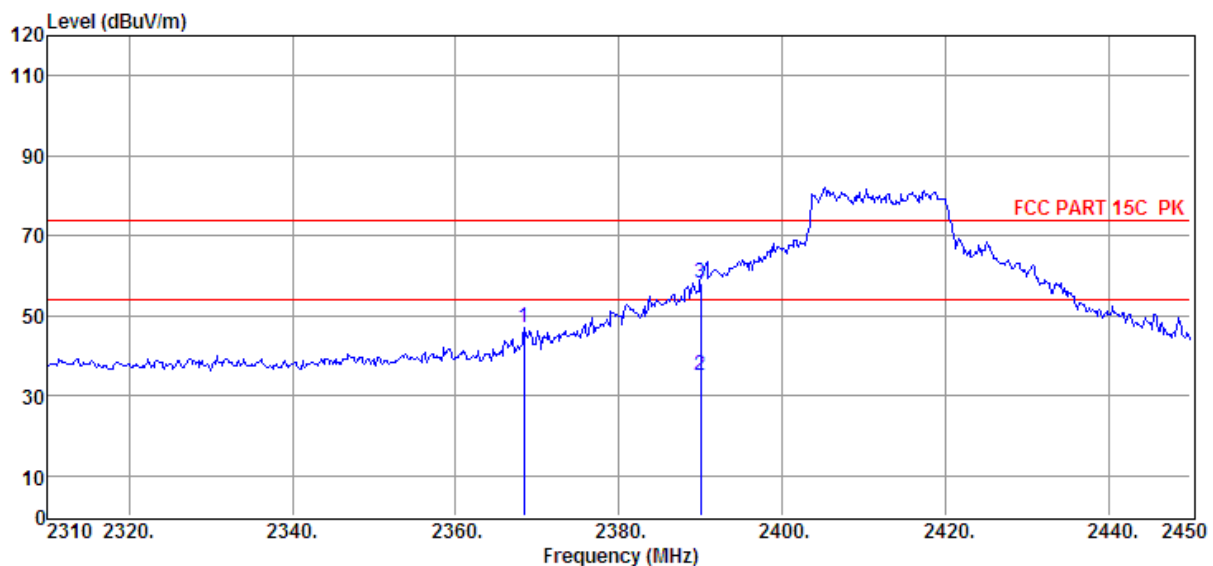

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2368.38	44.23	26.93	29.37	5.09	46.88	74.00	-27.12	Peak	HORIZONTAL
2	2390.00	32.52	27.00	29.42	5.11	35.21	54.00	-18.79	Average	HORIZONTAL
3	2390.00	55.47	27.00	29.42	5.11	58.16	74.00	-15.84	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-29
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
 FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11G 2412
Antenna/Distance : 2017 HF907/3m/VERTICAL

Data: 14

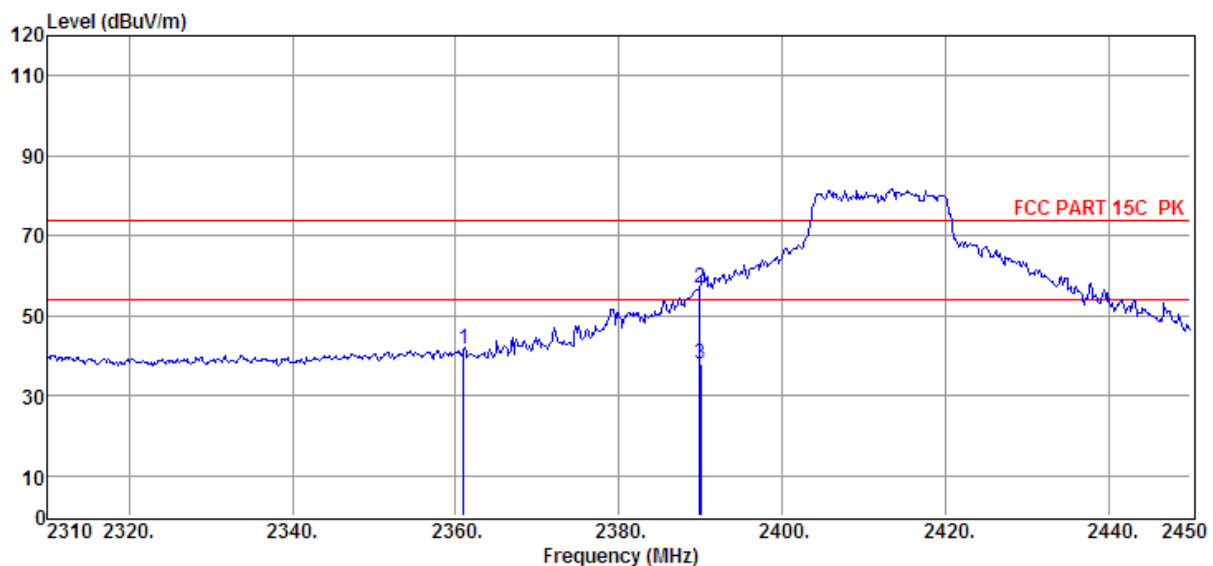

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2360.96	38.85	26.90	29.35	5.08	41.48	74.00	-32.52	Peak	VERTICAL
2	2389.94	54.40	27.00	29.42	5.11	57.09	74.00	-16.91	Peak	VERTICAL
3	2390.00	35.24	27.00	29.42	5.11	37.93	54.00	-16.07	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-29
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11G 2462
Antenna/Distance : 2017 HF907/3m/VERTICAL

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
 FCC 1G-18G.EM6

Data: 11

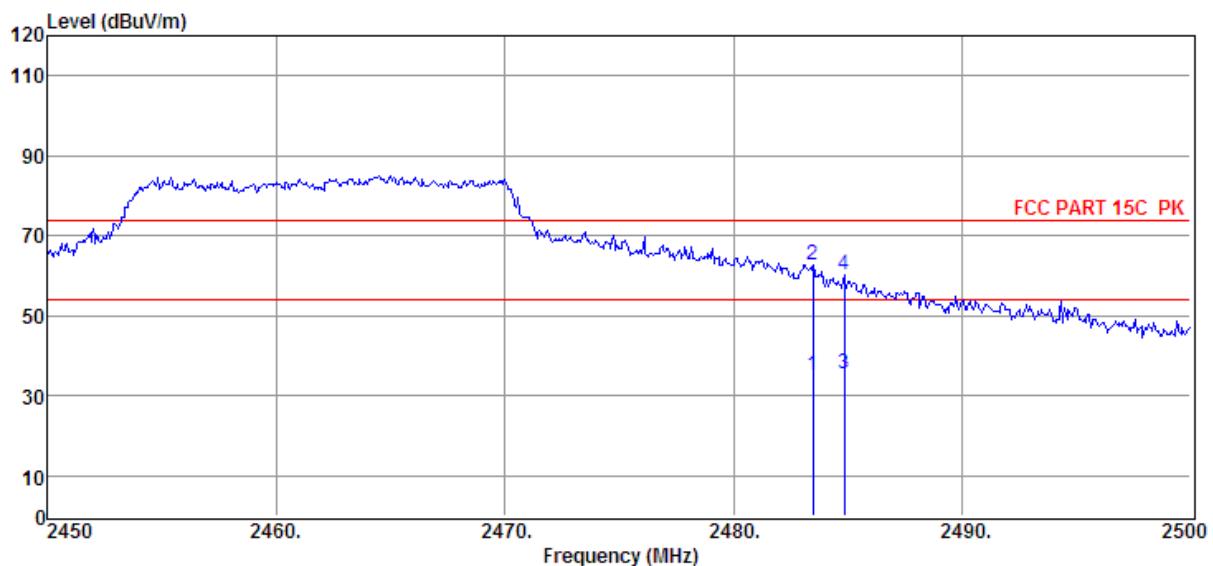

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenn a Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	32.20	27.34	29.71	5.21	35.04	54.00	-18.96	Average	VERTICAL
2	2483.50	59.68	27.34	29.71	5.21	62.52	74.00	-11.48	Peak	VERTICAL
3	2484.85	32.45	27.35	29.71	5.21	35.30	54.00	-18.70	Average	VERTICAL
4	2484.85	57.28	27.35	29.71	5.21	60.13	74.00	-13.87	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6

Test Date : 2017-12-29

Tested By : BOBO

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode 11G 2462

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Memo :

Data: 12

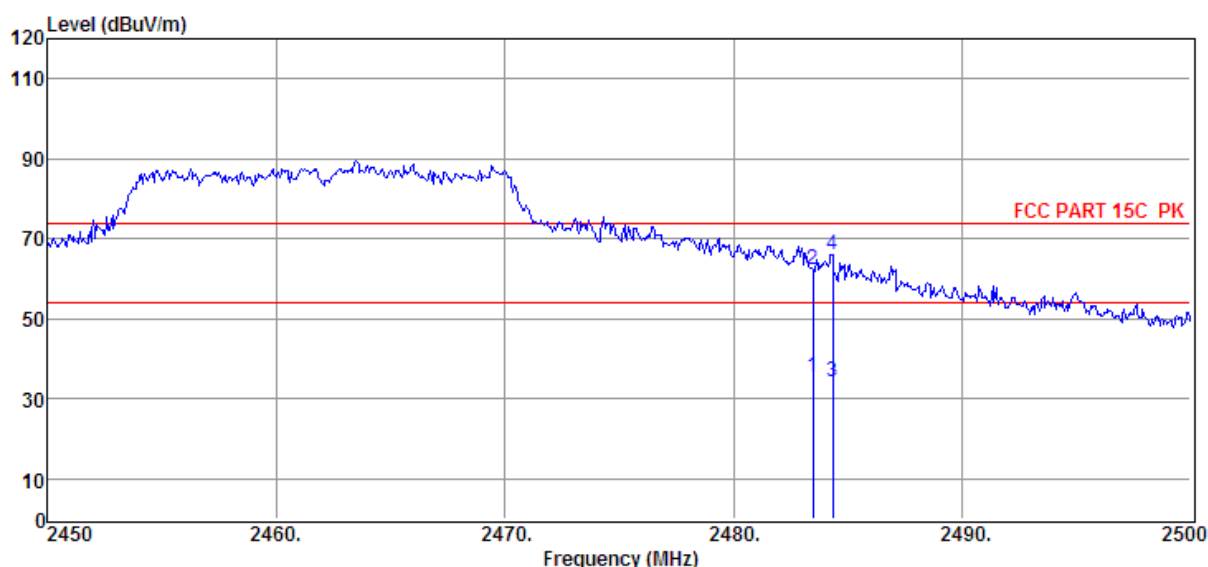

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBuV)	(dB/m)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)		
1	2483.50	32.52	27.34	29.71	5.21	35.36	54.00	-18.64	Average	HORIZONTAL
2	2483.50	59.60	27.34	29.71	5.21	62.44	74.00	-11.56	Peak	HORIZONTAL
3	2484.35	31.22	27.34	29.71	5.21	34.06	54.00	-19.94	Average	HORIZONTAL
4	2484.35	62.96	27.34	29.71	5.21	65.80	74.00	-8.20	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-29
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
 FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11N20 2412
Antenna/Distance : 2017 HF907/3m/VERTICAL

Data: 15

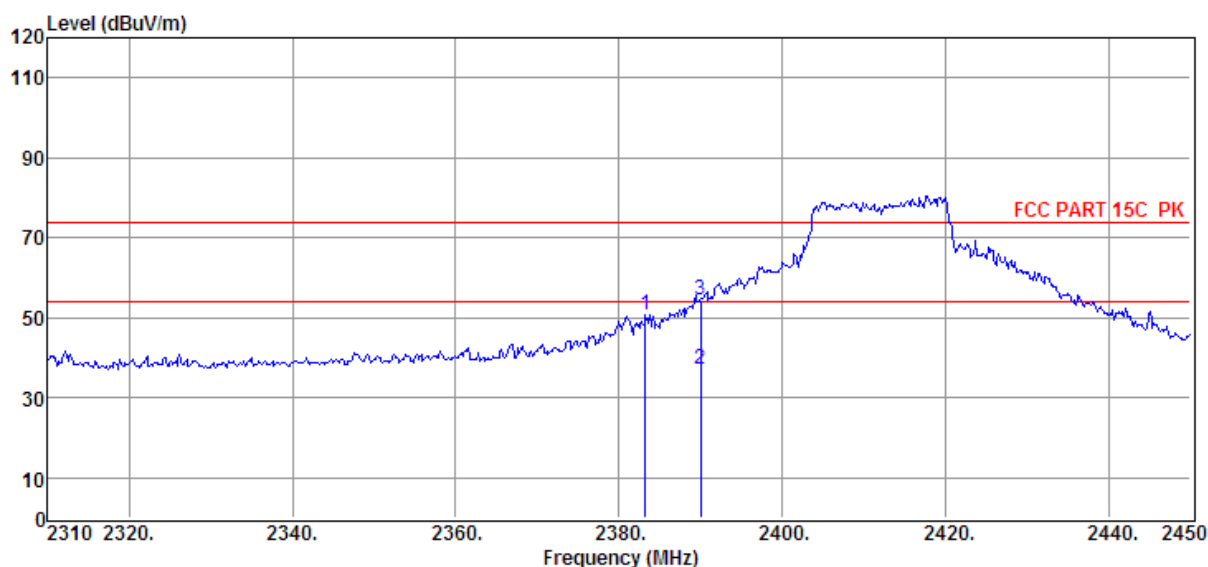

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dB/m)	dB	dB	(dBμV/m)	(dBμV/m)	(dB)		
1	2383.22	48.24	26.98	29.41	5.10	50.91	74.00	-23.09	Peak	VERTICAL
2	2390.00	34.22	27.00	29.42	5.11	36.91	54.00	-17.09	Average	VERTICAL
3	2390.00	51.56	27.00	29.42	5.11	54.25	74.00	-19.75	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-29
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
 FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11N20 2412
Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Data: 16

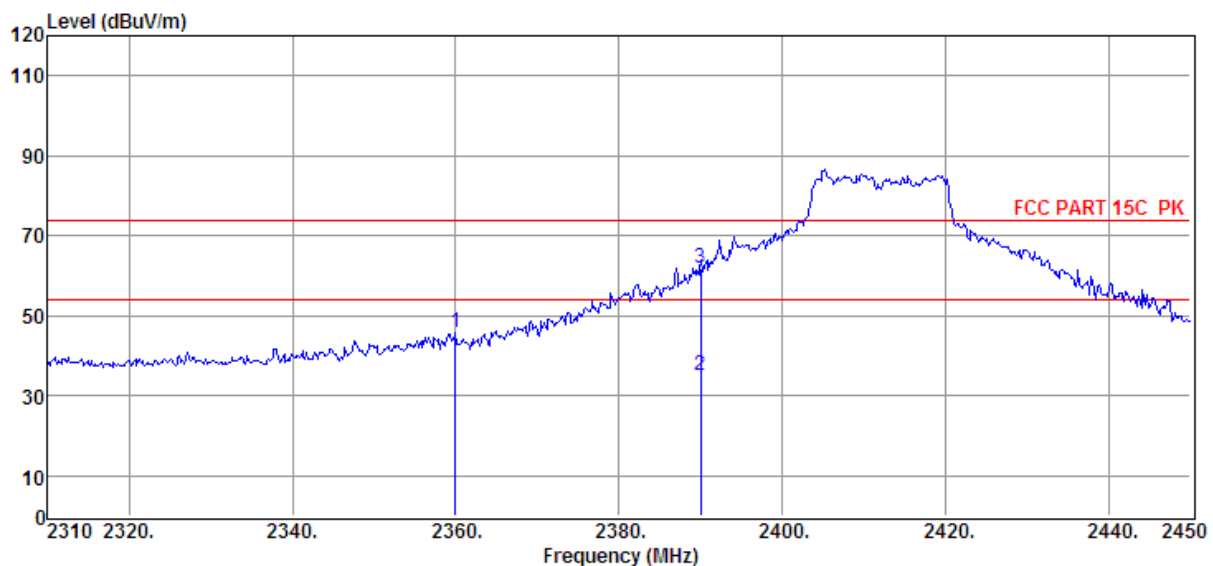

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBuV)	(dB/m)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)		
1	2359.98	43.12	26.90	29.35	5.08	45.75	74.00	-28.25	Peak	HORIZONTAL
2	2390.00	32.52	27.00	29.42	5.11	35.21	54.00	-18.79	Average	HORIZONTAL
3	2390.00	59.35	27.00	29.42	5.11	62.04	74.00	-11.96	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6

Test Date : 2017-12-29

Tested By : BOBO

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode 11N20 2462

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Memo :

Data: 17

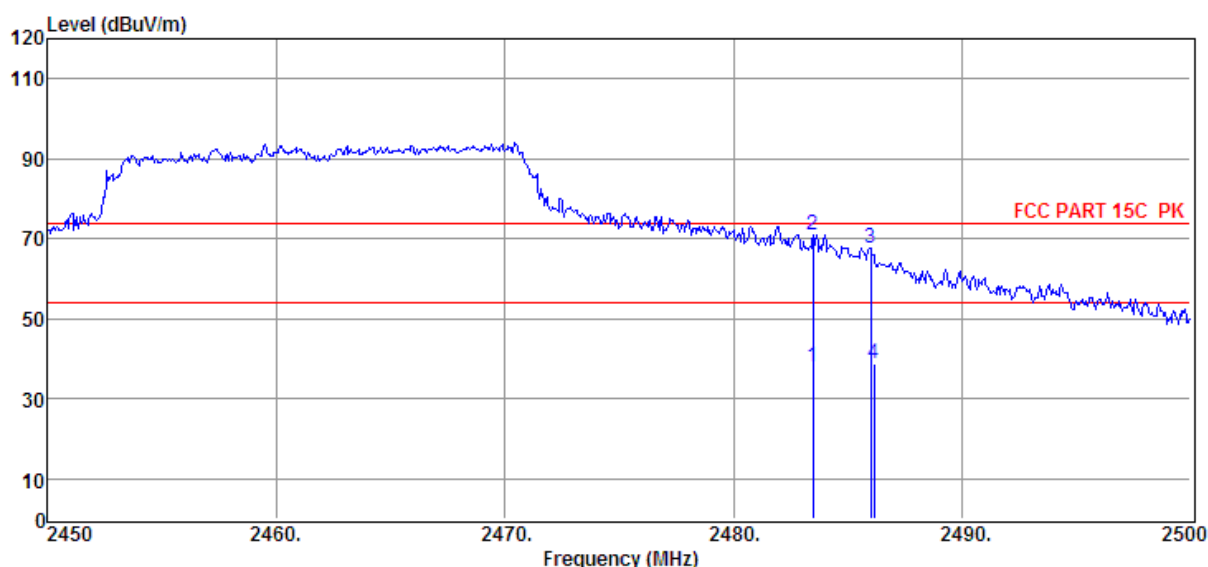

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	35.25	27.34	29.71	5.21	38.09	54.00	-15.91	Average	HORIZONTAL
2	2483.50	68.19	27.34	29.71	5.21	71.03	74.00	-2.97	Peak	HORIZONTAL
3	2486.00	64.79	27.35	29.71	5.21	67.64	74.00	-6.36	Peak	HORIZONTAL
4	2486.15	35.74	27.35	29.71	5.21	38.59	54.00	-15.41	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6

Test Date : 2017-12-29

Tested By : BOBO

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode 11N20 2462

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/VERTICAL

Memo :

Data: 18

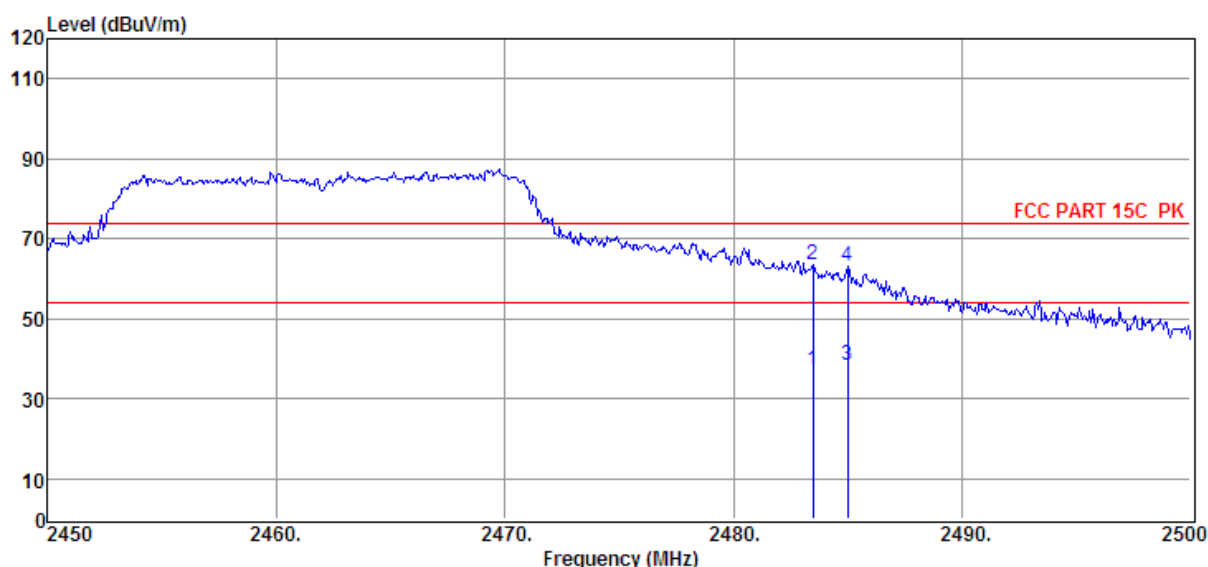

Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBμV)	(dB/m)	dB	dB	(dBμV/m)	(dBμV/m)	(dB)		
1	2483.50	34.18	27.34	29.71	5.21	37.02	54.00	-16.98	Average	VERTICAL
2	2483.50	60.54	27.34	29.71	5.21	63.38	74.00	-10.62	Peak	VERTICAL
3	2485.00	35.63	27.35	29.71	5.21	38.48	54.00	-15.52	Average	VERTICAL
4	2485.00	60.11	27.35	29.71	5.21	62.96	74.00	-11.04	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6

Test Date : 2017-12-28

Tested By : BOBO

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode 11N40 2422

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Memo :

Data: 21

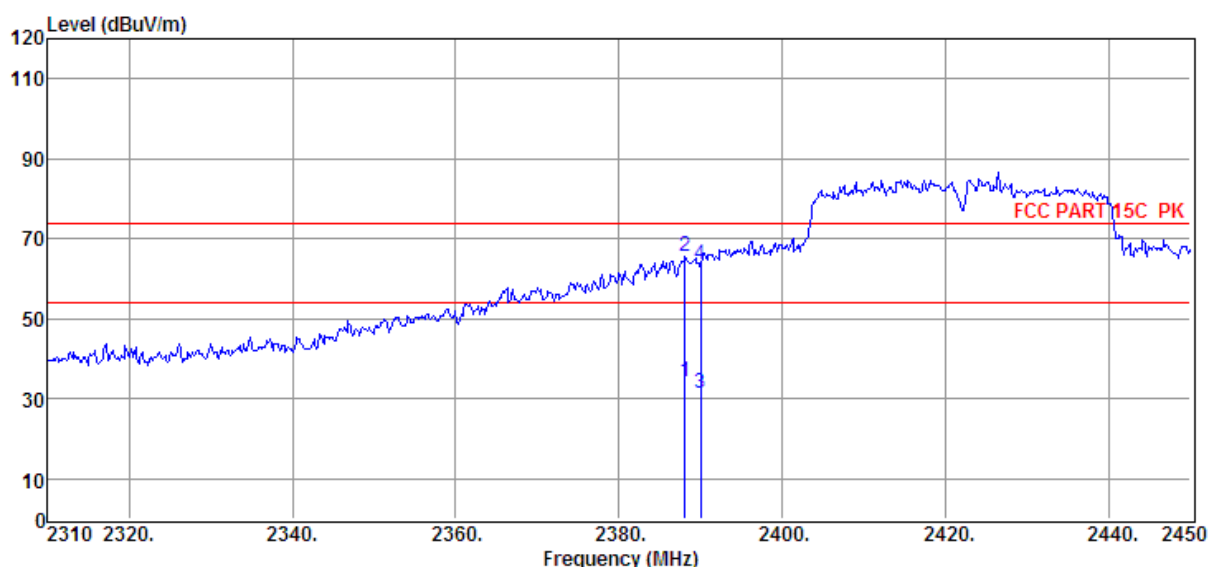

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.12	31.36	27.00	29.41	5.11	34.06	54.00	-19.94	Average	HORIZONTAL
2	2388.12	63.02	27.00	29.41	5.11	65.72	74.00	-8.28	Peak	HORIZONTAL
3	2390.00	28.75	27.00	29.42	5.11	31.44	54.00	-22.56	Average	HORIZONTAL
4	2390.00	60.69	27.00	29.42	5.11	63.38	74.00	-10.62	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-28
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
 FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11N40 2422
Antenna/Distance : 2017 HF907/3m/VERTICAL

Data: 22

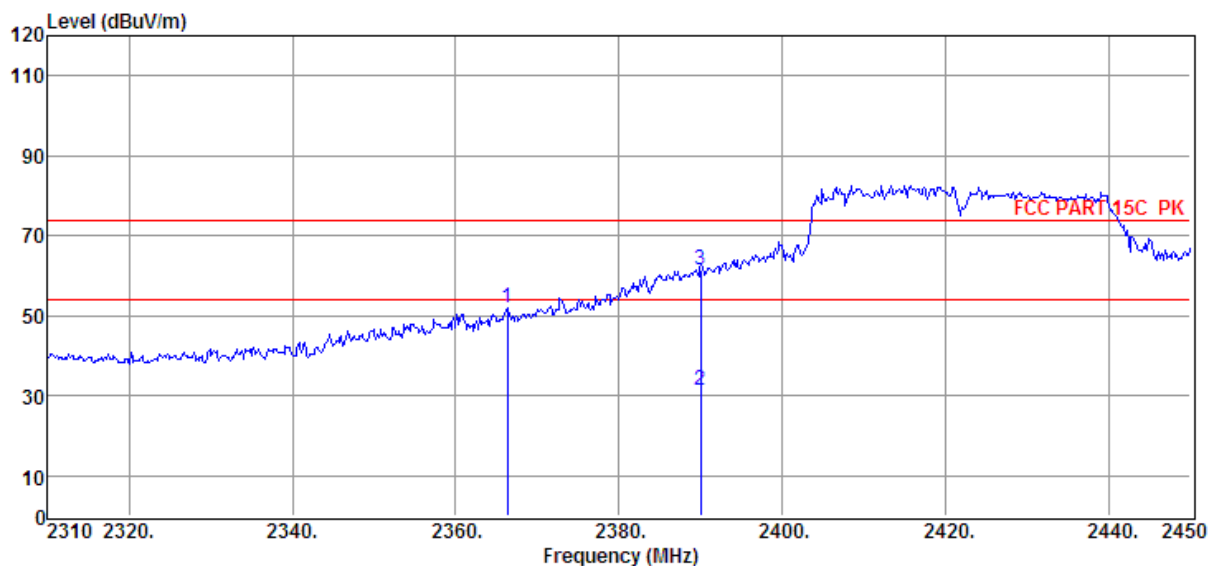


Item	Freq.	Read Level	Antenna Factor	PRM Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector	Polarization
(Mark)	(MHz)	(dBuV)	(dB/m)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)		
1	2366.28	49.41	26.92	29.37	5.08	52.04	74.00	-21.96	Peak	VERTICAL
2	2390.00	28.74	27.00	29.42	5.11	31.43	54.00	-22.57	Average	VERTICAL
3	2390.00	58.74	27.00	29.42	5.11	61.43	74.00	-12.57	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#
Test Date : 2017-12-29
EUT : Video Security Camera Light
Power Supply : AC 120v / 60Hz
Condition : Temp:24.5'C,Humi:55%,
 Press:100.1kPa
Memo :

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
 FCC 1G-18G.EM6
Tested By : BOBO
Model Number : HSC600184
Test Mode : TX mode 11N40 2452
Antenna/Distance : 2017 HF907/3m/VERTICAL

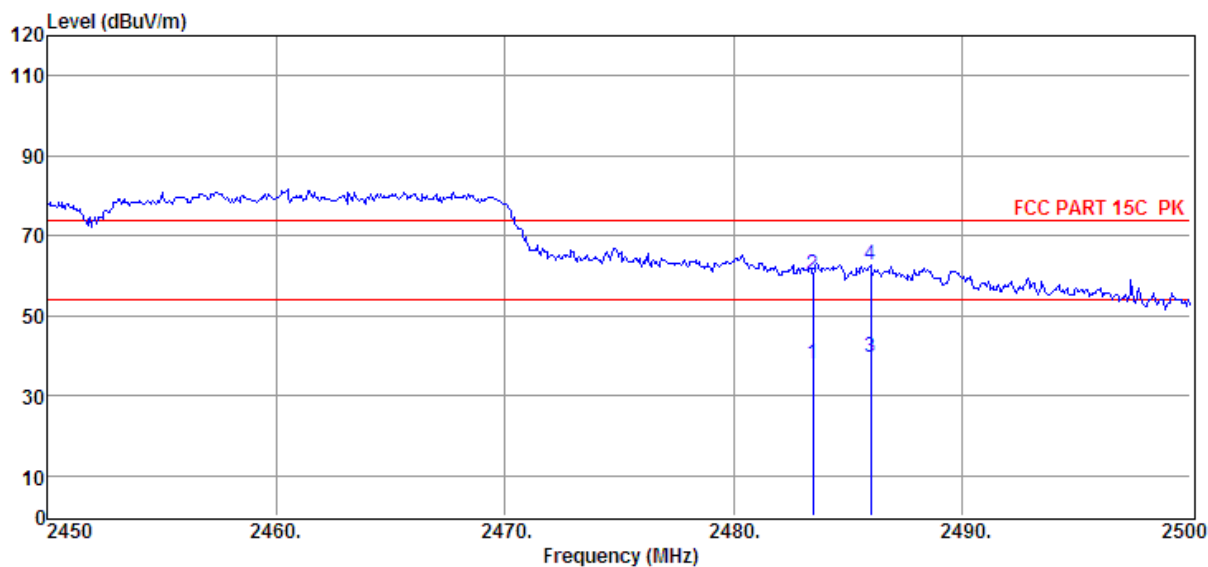

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	35.24	27.34	29.71	5.21	38.08	54.00	-15.92	Average	VERTICAL
2	2483.50	57.51	27.34	29.71	5.21	60.35	74.00	-13.65	Peak	VERTICAL
3	2486.00	36.54	27.35	29.71	5.21	39.39	54.00	-14.61	Average	VERTICAL
4	2486.00	60.03	27.35	29.71	5.21	62.88	74.00	-11.12	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1#

D:\2017 RE1# Report Data\Q17112904-1E\Q17112904-1E
FCC 1G-18G.EM6

Test Date : 2017-12-29

Tested By : BOBO

EUT : Video Security Camera Light

Model Number : HSC600184

Power Supply : AC 120v / 60Hz


Test Mode : TX mode 11N40 2452

Condition : Temp:24.5'C,Humi:55%,
Press:100.1kPa

Antenna/Distance : 2017 HF907/3m/HORIZONTAL

Memo :

Data: 20

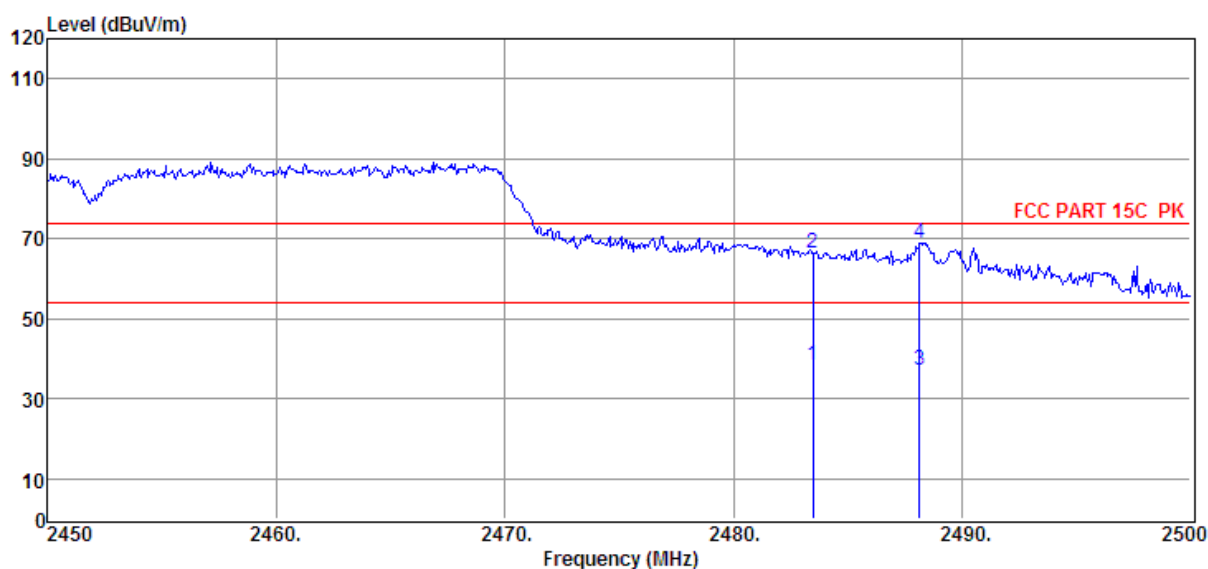

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	35.61	27.34	29.71	5.21	38.45	54.00	-15.55	Average	HORIZONTAL
2	2483.50	63.45	27.34	29.71	5.21	66.29	74.00	-7.71	Peak	HORIZONTAL
3	2488.15	34.24	27.36	29.71	5.22	37.11	54.00	-16.89	Average	HORIZONTAL
4	2488.15	66.10	27.36	29.71	5.22	68.97	74.00	-5.03	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. Power Line Conducted Emission

9.1. Block diagram of test setup

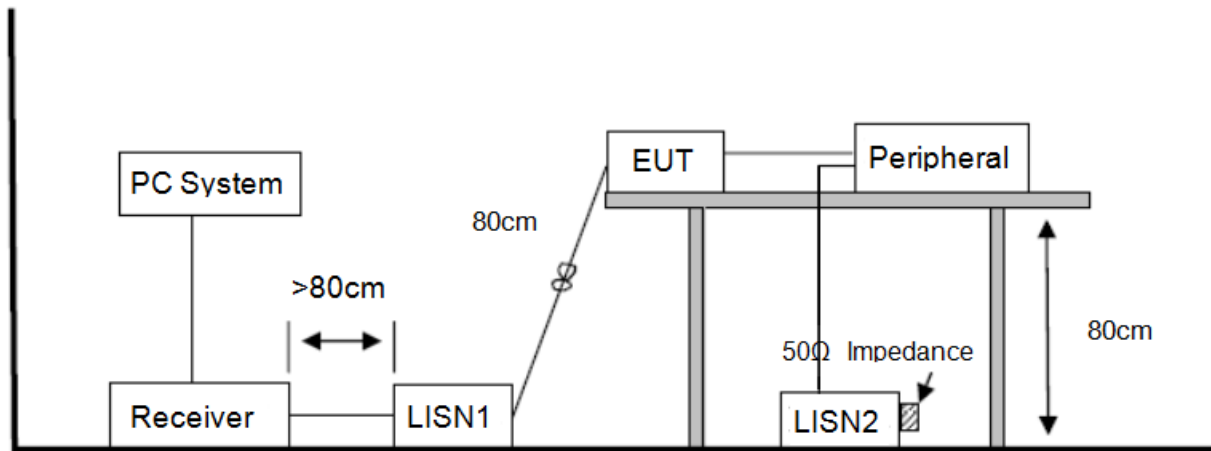

9.2. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

9.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.

9.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means peak detection; “----” means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case (AC 120V/60Hz).

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **E:\2017 CE report data\Q17112904-1E\CE.EM6**
Test Date : 2017-12-20 **Tested By** : Aaron
EUT : Video Security Camera Light **Model Number** : HSC600184
Power Supply : AC 120V/60Hz **Test Mode** : TX mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **LISN** : 2017 ENV216/LINE
Memo :

Data: 6

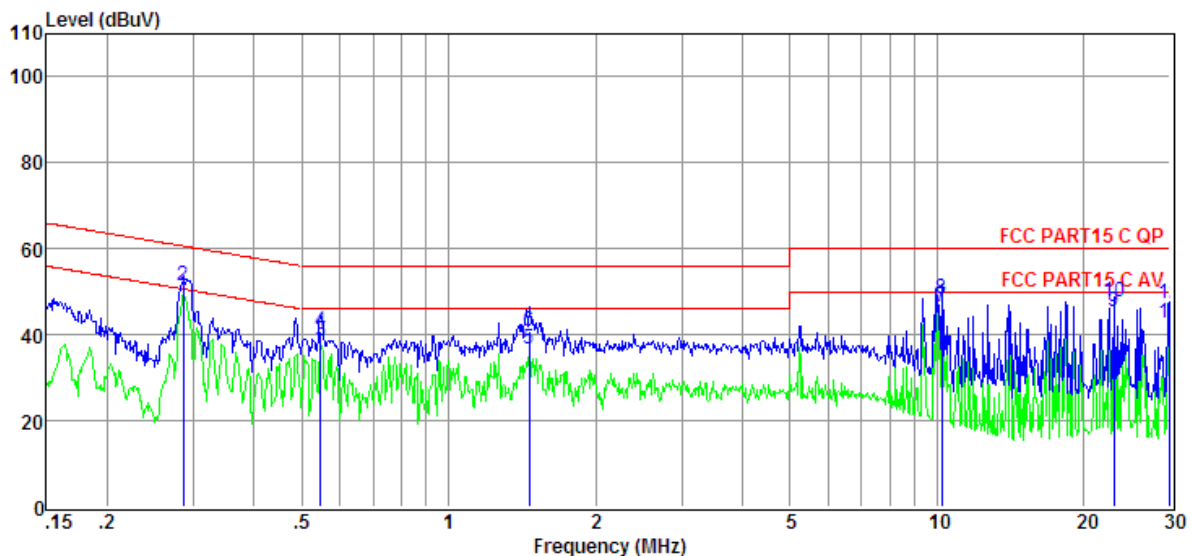

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.29	29.98	9.53	-0.04	9.86	49.33	50.63	-1.30	Average	LINE
2	0.29	31.88	9.53	-0.04	9.86	51.23	60.63	-9.40	QP	LINE
3	0.55	19.34	9.54	-0.05	9.82	38.65	46.00	-7.35	Average	LINE
4	0.55	21.48	9.54	-0.05	9.82	40.79	56.00	-15.21	QP	LINE
5	1.46	17.30	9.59	-0.13	9.86	36.62	46.00	-9.38	Average	LINE
6	1.46	21.44	9.59	-0.13	9.86	40.76	56.00	-15.24	QP	LINE
7	10.23	27.07	9.82	-0.12	9.89	46.66	50.00	-3.34	Average	LINE
8	10.23	28.69	9.82	-0.12	9.89	48.28	60.00	-11.72	QP	LINE
9	23.02	25.64	9.96	-0.11	9.96	45.45	50.00	-4.55	Average	LINE
10	23.02	27.79	9.96	-0.11	9.96	47.60	60.00	-12.40	QP	LINE
11	29.84	22.70	10.08	-0.11	10.01	42.68	50.00	-7.32	Average	LINE
12	29.84	27.22	10.08	-0.11	10.01	47.20	60.00	-12.80	QP	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **E:\2017 CE report data\Q17112904-1E\CE.EM6**
Test Date : 2017-12-20 **Tested By** : Aaron
EUT : Video Security Camera Light **Model Number** : HSC600184
Power Supply : AC 120V/60Hz **Test Mode** : TX mode
Condition : Temp:24.5°C,Humi:55%,
Press:100.1kPa **LISN** : 2017 ENV216/NEUTRAL
Memo :

Data: 8

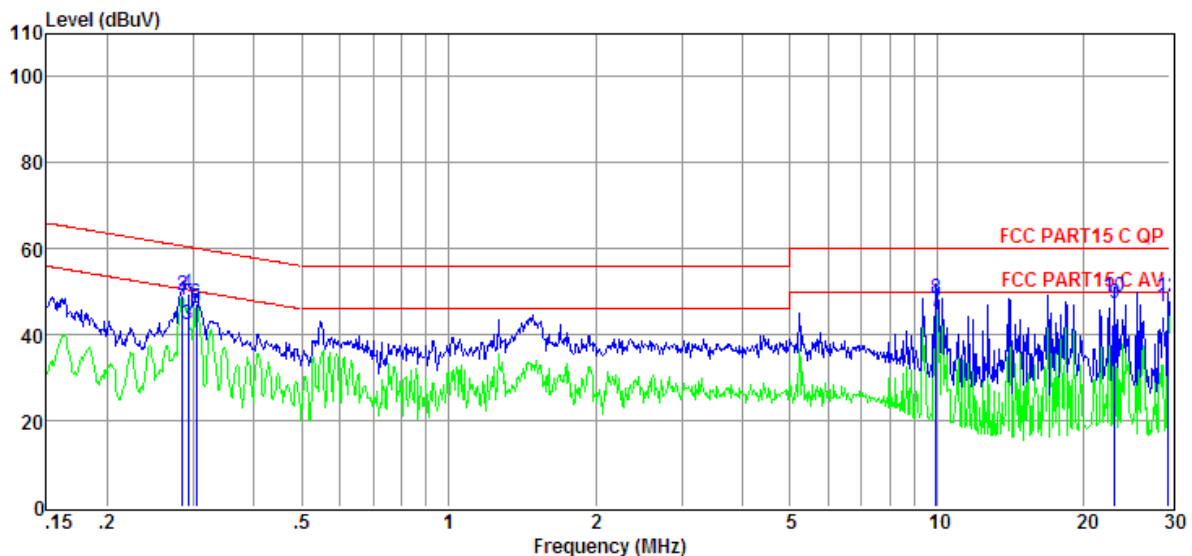

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.29	28.80	9.41	-0.04	9.86	48.03	50.66	-2.63	Average	NEUTRAL
2	0.29	29.81	9.41	-0.04	9.86	49.04	60.66	-11.62	QP	NEUTRAL
3	0.29	23.00	9.40	-0.04	9.86	42.22	50.46	-8.24	Average	NEUTRAL
4	0.29	30.28	9.40	-0.04	9.86	49.50	60.46	-10.96	QP	NEUTRAL
5	0.30	26.80	9.40	-0.04	9.86	46.02	50.13	-4.11	Average	NEUTRAL
6	0.30	28.02	9.40	-0.04	9.86	47.24	60.13	-12.89	QP	NEUTRAL
7	9.94	26.00	9.44	-0.12	9.89	45.21	50.00	-4.79	Average	NEUTRAL
8	9.94	29.17	9.44	-0.12	9.89	48.38	60.00	-11.62	QP	NEUTRAL
9	23.07	27.80	9.56	-0.11	9.96	47.21	50.00	-2.79	Average	NEUTRAL
10	23.07	29.39	9.56	-0.11	9.96	48.80	60.00	-11.20	QP	NEUTRAL
11	29.69	27.01	9.69	-0.11	10.01	46.60	50.00	-3.40	Average	NEUTRAL
12	29.69	29.01	9.69	-0.11	10.01	48.60	60.00	-11.40	QP	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

10. Antenna Requirements

10.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Result

The antennas used for this product are integrated antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 5.01dBi.

END OF REPORT