

# FCC PART 15.247 TEST REPORT

For

**NextVPU (Shanghai) Co., Ltd.**

Rm 501-07, Section A, Bldg. 1#3000 Longdong Rd, Pudong New District, Shanghai, P.R. China  
201203

**FCC ID: 2AOQI-SRW1**

|                                           |                                                                                                                                                                                                                            |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report    | <b>Product Type:</b><br>AngelEye Smart Reader                                                                                                                                                                              |
| <b>Test Engineer:</b> Hope Zhang          | Hope Zhang                                                                                                                                                                                                                 |
| <b>Report Number:</b> RSHA190404001-00B   |                                                                                                                                                                                                                            |
| <b>Report Date:</b> 2019-06-19            |                                                                                                                                                                                                                            |
| <b>Reviewed By:</b> Oscar Ye<br>RF Leader | Oscar Ye                                                                                                                                                                                                                   |
| <b>Prepared By:</b>                       | Bay Area Compliance Laboratories Corp. (Kunshan)<br>No.248 Chenghu Road,Kunshan,Jiangsu province,China<br>Tel: +86-0512-86175000<br>Fax: +86-0512-88934268<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                        | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....               | 4         |
| OBJECTIVE .....                                                        | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                     | 4         |
| TEST METHODOLOGY .....                                                 | 4         |
| MEASUREMENT UNCERTAINTY .....                                          | 5         |
| TEST FACILITY .....                                                    | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                  | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                | 6         |
| EUT EXERCISE SOFTWARE .....                                            | 6         |
| SPECIAL ACCESSORIES.....                                               | 6         |
| EQUIPMENT MODIFICATIONS .....                                          | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                               | 7         |
| BLOCK DIAGRAM OF TEST SETUP .....                                      | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                   | <b>9</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                                       | <b>10</b> |
| <b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>                         | <b>12</b> |
| APPLICABLE STANDARD .....                                              | 12        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                   | 12        |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>             | <b>13</b> |
| APPLICABLE STANDARD .....                                              | 13        |
| EUT SETUP .....                                                        | 13        |
| EMI TEST RECEIVER SETUP.....                                           | 13        |
| TEST PROCEDURE .....                                                   | 13        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                            | 14        |
| TEST RESULTS SUMMARY .....                                             | 14        |
| TEST DATA .....                                                        | 14        |
| <b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b> | <b>17</b> |
| APPLICABLE STANDARD .....                                              | 17        |
| EUT SETUP .....                                                        | 17        |
| EMI TEST RECEIVER SETUP.....                                           | 18        |
| TEST PROCEDURE .....                                                   | 18        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                         | 18        |
| TEST RESULTS SUMMARY .....                                             | 18        |
| TEST DATA .....                                                        | 19        |
| <b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>                | <b>30</b> |
| APPLICABLE STANDARD .....                                              | 30        |
| TEST PROCEDURE .....                                                   | 30        |
| TEST DATA .....                                                        | 30        |
| <b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>              | <b>36</b> |
| APPLICABLE STANDARD .....                                              | 36        |
| TEST PROCEDURE .....                                                   | 36        |
| TEST DATA .....                                                        | 36        |
| <b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b> | <b>42</b> |
| APPLICABLE STANDARD .....                                              | 42        |
| TEST PROCEDURE .....                                                   | 42        |

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| TEST DATA .....                                                       | 42        |
| <b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b> | <b>45</b> |
| APPLICABLE STANDARD .....                                             | 45        |
| TEST PROCEDURE .....                                                  | 45        |
| TEST DATA .....                                                       | 45        |
| <b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>       | <b>61</b> |
| APPLICABLE STANDARD .....                                             | 61        |
| TEST PROCEDURE .....                                                  | 61        |
| TEST DATA .....                                                       | 61        |
| <b>FCC §15.247(d) - BAND EDGES TESTING .....</b>                      | <b>68</b> |
| APPLICABLE STANDARD .....                                             | 68        |
| TEST PROCEDURE .....                                                  | 68        |
| TEST DATA .....                                                       | 68        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|              |                              |
|--------------|------------------------------|
| Applicant    | NextVPU (Shanghai) Co., Ltd. |
| Tested Model | SR-W1                        |
| Product Type | AngelEye Smart Reader        |
| Dimension    | 72mm(L)*27mm(W)*15mm(H)      |
| Power Supply | DC 3.7V from battery         |

*\*All measurement and test data in this report was gathered from production sample serial number: 20190404001.  
(Assigned by the BACL. The EUT supplied by the applicant was received on 2019-04-04)*

### Objective

This test report is prepared on behalf of *NextVPU (Shanghai) Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: 2AOQI-SRW1.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

| Item                               |             | Uncertainty |
|------------------------------------|-------------|-------------|
| AC Power Lines Conducted Emissions |             | 3.19dB      |
| RF conducted test with spectrum    |             | 0.9dB       |
| RF Output Power with Power meter   |             | 0.5dB       |
| Radiated emission                  | 30MHz~1GHz  | 6.11dB      |
|                                    | 1GHz~6GHz   | 4.45dB      |
|                                    | 6GHz~18GHz  | 5.23dB      |
|                                    | 18GHz~40GHz | 5.65dB      |
| Occupied Bandwidth                 |             | 0.5kHz      |
| Temperature                        |             | 1.0℃        |
| Humidity                           |             | 6%          |

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel list for BT3.0:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 40      | 2442            |
| 1       | 2403            | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | 78      | 2480            |
| 39      | 2441            | /       | /               |

EUT was tested with Channel 0, 39 and 78.

### EUT Exercise Software

RF test software: Engineering mode

GFSK,  $\pi/4$ -DQPSK , 8DPSK Power level: 0.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

**Support Equipment List and Details**


| Manufacturer | Description | Model      | Serial Number |
|--------------|-------------|------------|---------------|
| DELL         | Notebook    | GX620      | D65874152     |
| Logitech     | Mouse       | M-U0026    | HS529HB       |
| DELL         | Adapter     | LA65NS0-00 | DF263         |

**External I/O Cable**


| Cable Description | Shielding Type | Length (m) | From Port | To  |
|-------------------|----------------|------------|-----------|-----|
| USB Cable         | Un-shielding   | 0.8        | Notebook  | EUT |

**Block Diagram of Test Setup**


For Conducted Emissions:

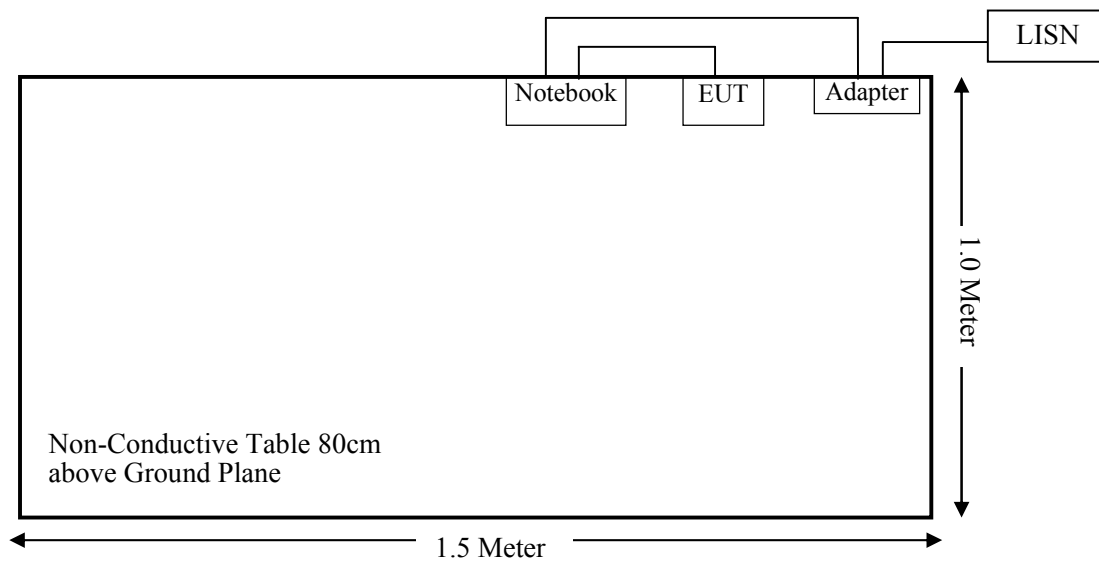

For Radiated Emissions (Below 1GHz):

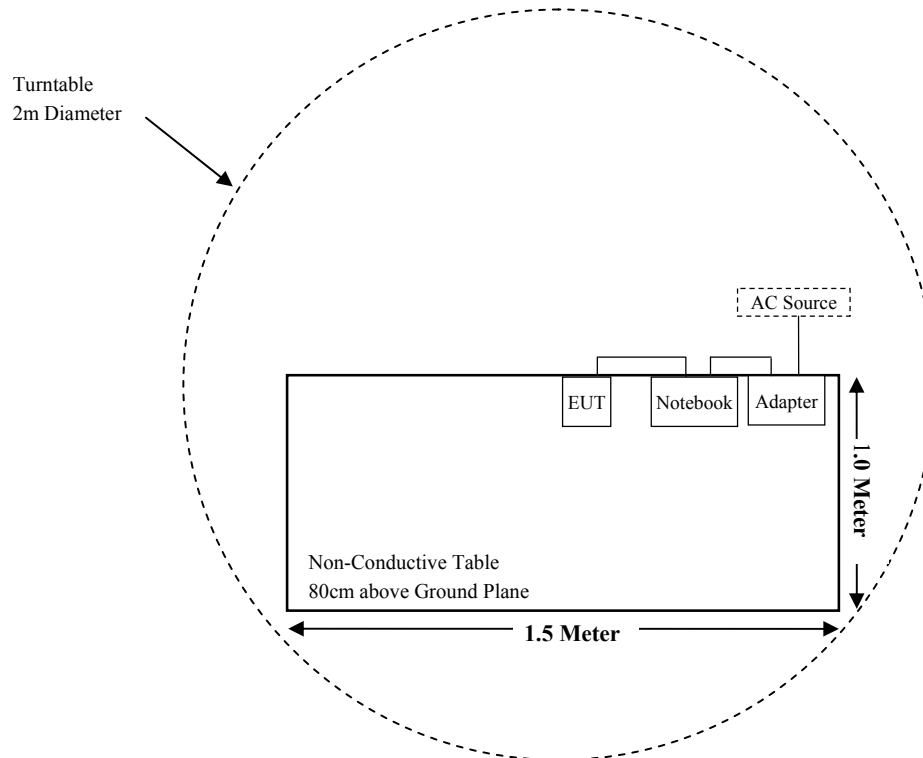

For Radiated Emissions (Above 1GHz):

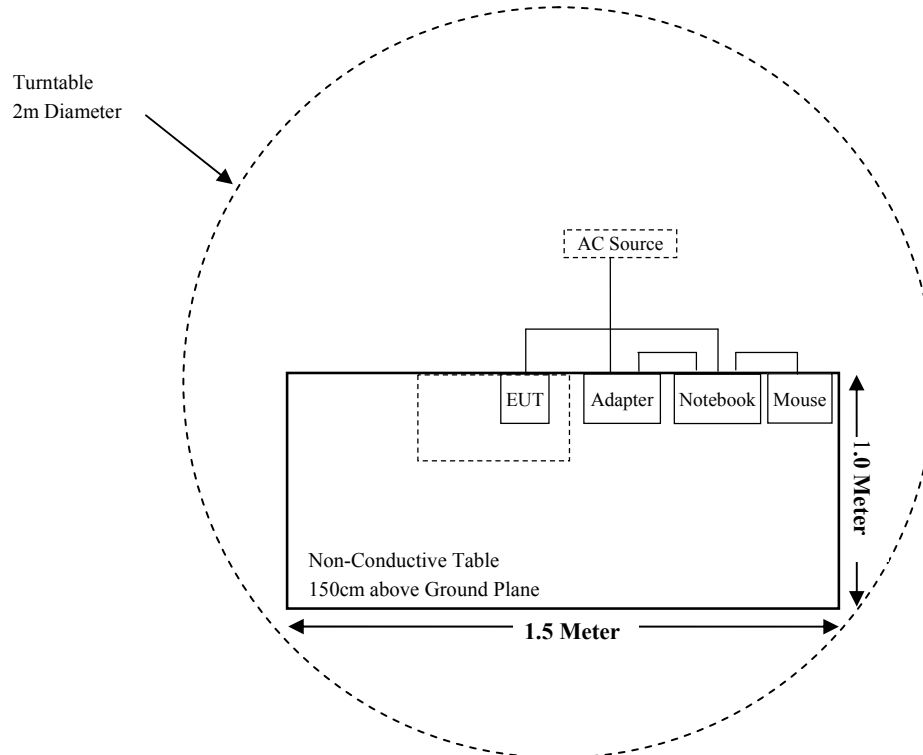



**SUMMARY OF TEST RESULTS**

| <b>FCC Rules</b>               | <b>Description of Test</b>                      | <b>Result</b> |
|--------------------------------|-------------------------------------------------|---------------|
| §15.247 (I), §1.1310 & §2.1093 | RF EXPOSURE                                     | Compliant     |
| §15.203                        | Antenna Requirement                             | Compliant     |
| §15.207(a)                     | AC Line Conducted Emissions                     | Compliant     |
| §15.205, §15.209 & §15.247(d)  | Radiated Emissions & Restricted Bands Emissions | Compliant     |
| §15.247(a)(1)                  | 20 dB Emission Bandwidth                        | Compliant     |
| §15.247(a)(1)                  | Channel Separation Test                         | Compliant     |
| §15.247(a)(1)(iii)             | Time of Occupancy (Dwell Time)                  | Compliant     |
| §15.247(a)(1)(iii)             | Quantity of hopping channel Test                | Compliant     |
| §15.247(b)(1)                  | Peak Output Power Measurement                   | Compliant     |
| §15.247(d)                     | Band edges                                      | Compliant     |

**TEST EQUIPMENT LIST**

| Manufacturer                               | Description        | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------------------|--------------------|-------------|---------------|------------------|----------------------|
| <b>Radiated Emission Test (Chamber 1#)</b> |                    |             |               |                  |                      |
| Rohde & Schwarz                            | EMI Test Receiver  | ESCI        | 100195        | 2018-11-12       | 2019-11-11           |
| Sunol Sciences                             | Broadband Antenna  | JB3         | A090413-1     | 2016-12-26       | 2019-12-25           |
| Sonoma Instrument                          | Pre-amplifier      | 310N        | 171205        | 2018-08-15       | 2019-08-14           |
| Rohde & Schwarz                            | Auto test Software | EMC32       | 100361        | /                | /                    |
| MICRO-COAX                                 | Coaxial Cable      | Cable-8     | 008           | 2018-08-15       | 2019-08-14           |
| MICRO-COAX                                 | Coaxial Cable      | Cable-9     | 009           | 2018-08-15       | 2019-08-14           |
| MICRO-COAX                                 | Coaxial Cable      | Cable-10    | 010           | 2018-08-15       | 2019-08-14           |
| <b>Radiated Emission Test (Chamber 2#)</b> |                    |             |               |                  |                      |
| Rohde & Schwarz                            | EMI Test Receiver  | ESU40       | 100207        | 2018-08-27       | 2019-08-26           |
| ETS-LINDGREN                               | Horn Antenna       | 3115        | 6229          | 2019-01-11       | 2022-01-10           |
| ETS-LINDGREN                               | Horn Antenna       | 3116        | 00084159      | 2016-10-18       | 2019-10-17           |
| A.H.Systems, inc                           | Amplifier          | 2641-1      | 466           | 2019-02-20       | 2020-02-19           |
| EM Electronics Corporation                 | Amplifier          | EM18G40G    | 060726        | 2019-03-22       | 2020-03-21           |
| MICRO-TRONICS                              | Band Reject Filter | BRM50702    | G024          | 2018-08-05       | 2019-08-04           |
| Narda                                      | Attenuator         | 10dB        | 010           | 2018-08-15       | 2019-08-14           |
| Rohde & Schwarz                            | Auto test Software | EMC32       | 100361        | /                | /                    |
| MICRO-COAX                                 | Coaxial Cable      | Cable-6     | 006           | 2018-08-15       | 2019-08-14           |
| MICRO-COAX                                 | Coaxial Cable      | Cable-11    | 011           | 2018-08-15       | 2019-08-14           |
| MICRO-COAX                                 | Coaxial Cable      | Cable-12    | 012           | 2018-08-15       | 2019-08-14           |
| MICRO-COAX                                 | Coaxial Cable      | Cable-13    | 013           | 2018-08-15       | 2019-08-14           |
| <b>RF Conducted Test</b>                   |                    |             |               |                  |                      |
| Rohde & Schwarz                            | Signal Analyzer    | FSIQ26      | 836131/009    | 2018-11-12       | 2019-11-11           |
| Rohde & Schwarz                            | Signal Analyzer    | FSV40       | 101116        | 2018-07-23       | 2019-07-22           |
| Narda                                      | Attenuator         | 10dB        | 010           | 2018-08-15       | 2019-08-14           |
| NextVPU                                    | RF Cable           | NextVPU C01 | C01           | Each Time        | /                    |
| <b>Conducted Emission Test</b>             |                    |             |               |                  |                      |
| Rohde & Schwarz                            | EMI Test Receiver  | ESCS30      | 834115/007    | 2018-11-30       | 2019-11-29           |
| Rohde & Schwarz                            | LISN               | ENV216      | 3560655016    | 2018-11-30       | 2019-11-29           |
| BACL                                       | Auto test Software | BACL-EMC    | CE001         | /                | /                    |
| Narda                                      | Attenuator/6dB     | 10690812-2  | 26850-6       | 2019-01-10       | 2020-01-09           |
| MICRO-COAX                                 | Coaxial Cable      | Cable-15    | 015           | 2018-08-15       | 2019-08-14           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.247 (i), §1.1310 & §2.1093 –RF EXPOSURE**

### **Applicable Standard**

According to §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

### **Measurement Result**

**For worst case:**

| Mode   | Frequency Range (MHz) | Max Tune-up Conducted Power |      | Calculated Distance (mm) | Calculated Value | Threshold (1-g SAR) | SAR Test Exclusion |
|--------|-----------------------|-----------------------------|------|--------------------------|------------------|---------------------|--------------------|
|        |                       | (dBm)                       | (mW) |                          |                  |                     |                    |
| BT 3.0 | 2402-2480             | 6.0                         | 3.98 | 5.0                      | 1.3              | 3.0                 | Yes                |
| BLE    | 2402-2480             | 0                           | 1.00 | 5.0                      | 0.3              | 3.0                 | Yes                |

**Result: For BLE & BT3.0** is not necessary to standalone SAR evaluation.

For WiFi please refer to SAR Report: RSHA190404001-23

---

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


**Antenna Connector Construction**

The EUT has an internal FPC antenna for Bluetooth, which the antenna gain is -1.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS****Applicable Standard**

FCC §15.207(a)

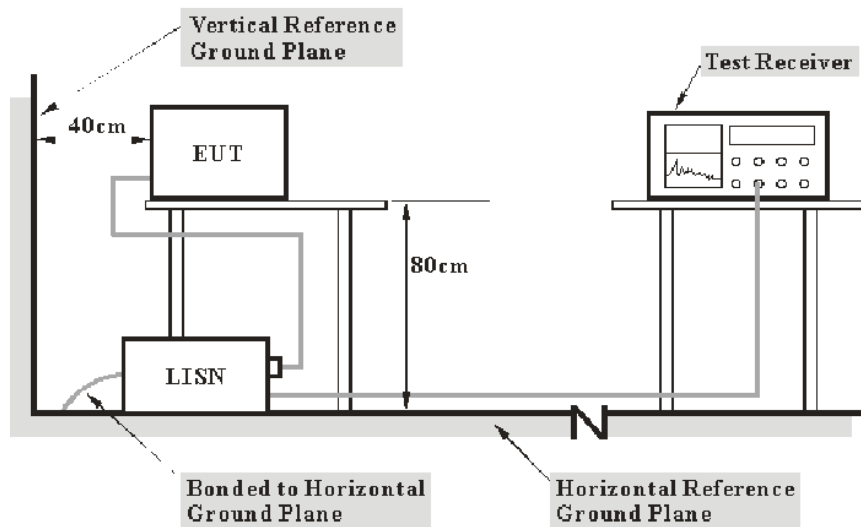**EUT Setup**

- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

**Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

### Test Data


#### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.4 °C   |
| <b>Relative Humidity:</b> | 51 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |


*The testing was performed by Hope Zhang on 2019-04-17.*

*EUT operation mode: Transmitting in high channel of GFSK mode (Worst case)*

## AC 120V/60 Hz, Line

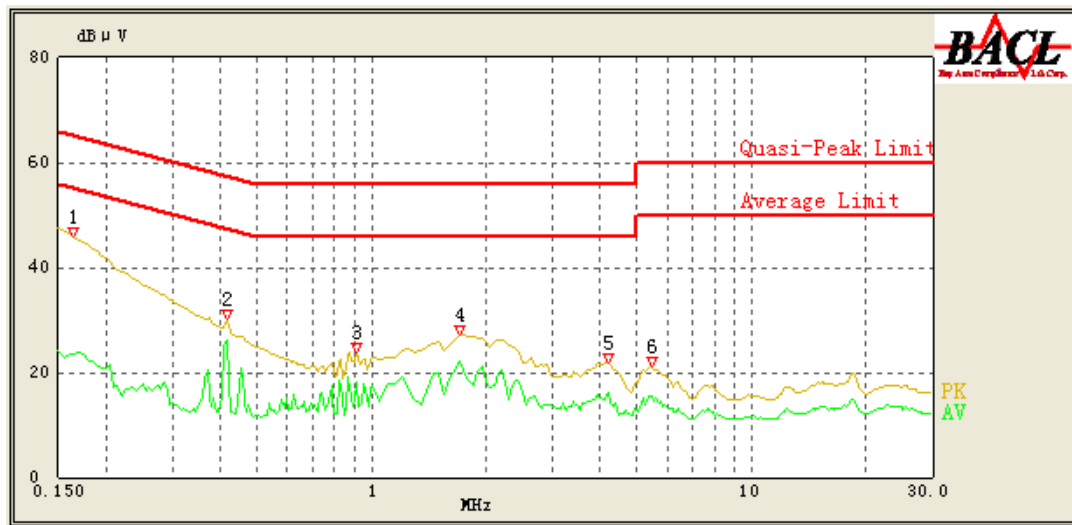

| Frequency (MHz) | Corrected Amplitude (dBμV) | Detector (PK/AV/QP) | Bandwidth (kHz) | Line | Corrected Factor (dB) | Limit (dBμV) | Margin (dB) | Comment   |
|-----------------|----------------------------|---------------------|-----------------|------|-----------------------|--------------|-------------|-----------|
| 0.165           | 45.75                      | QP                  | 9.000           | L1   | 16.05                 | 65.21        | 19.46       | Compliant |
| 0.165           | 23.62                      | AV                  | 9.000           | L1   | 16.05                 | 55.21        | 31.59       | Compliant |
| 0.415           | 30.14                      | QP                  | 9.000           | L1   | 16.06                 | 57.55        | 27.41       | Compliant |
| 0.415           | 26.20                      | AV                  | 9.000           | L1   | 16.06                 | 47.55        | 21.35       | Compliant |
| 0.915           | 23.89                      | QP                  | 9.000           | L1   | 15.90                 | 56.00        | 32.11       | Compliant |
| 0.915           | 18.30                      | AV                  | 9.000           | L1   | 15.90                 | 46.00        | 27.70       | Compliant |
| 1.700           | 27.17                      | QP                  | 9.000           | L1   | 15.86                 | 56.00        | 28.83       | Compliant |
| 1.700           | 22.07                      | AV                  | 9.000           | L1   | 15.86                 | 46.00        | 23.93       | Compliant |
| 4.200           | 21.95                      | QP                  | 9.000           | L1   | 15.85                 | 56.00        | 34.05       | Compliant |
| 4.200           | 16.12                      | AV                  | 9.000           | L1   | 15.85                 | 46.00        | 29.88       | Compliant |
| 5.450           | 21.31                      | QP                  | 9.000           | L1   | 15.88                 | 60.00        | 38.69       | Compliant |
| 5.450           | 15.44                      | AV                  | 9.000           | L1   | 15.88                 | 50.00        | 34.56       | Compliant |

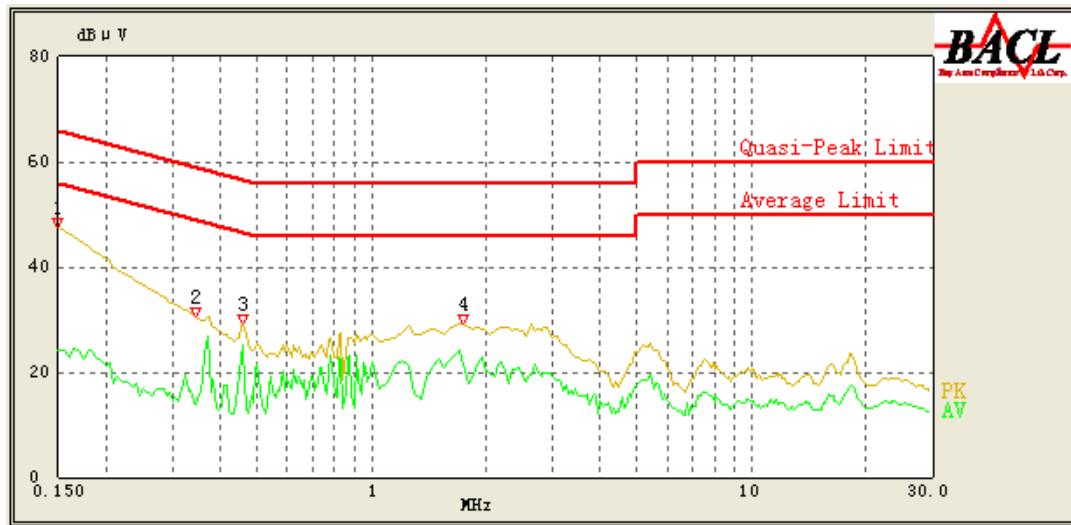**AC 120V/60 Hz, Neutral**

| Frequency (MHz) | Corrected Amplitude (dBμV) | Detector (PK/AV/QP) | Bandwidth (kHz) | Line | Corrected Factor (dB) | Limit (dBμV) | Margin (dB) | Comment   |
|-----------------|----------------------------|---------------------|-----------------|------|-----------------------|--------------|-------------|-----------|
| 0.150           | 47.41                      | QP                  | 9.000           | N    | 16.06                 | 66.00        | 18.59       | Compliant |
| 0.150           | 24.15                      | AV                  | 9.000           | N    | 16.06                 | 56.00        | 31.85       | Compliant |
| 0.345           | 30.43                      | QP                  | 9.000           | N    | 16.08                 | 59.08        | 28.65       | Compliant |
| 0.345           | 14.00                      | AV                  | 9.000           | N    | 16.08                 | 49.08        | 35.08       | Compliant |
| 0.460           | 29.29                      | QP                  | 9.000           | N    | 16.10                 | 56.69        | 27.40       | Compliant |
| 0.460           | 25.13                      | AV                  | 9.000           | N    | 16.10                 | 46.69        | 21.56       | Compliant |
| 1.750           | 29.23                      | QP                  | 9.000           | N    | 15.92                 | 56.00        | 26.77       | Compliant |
| 1.750           | 21.55                      | AV                  | 9.000           | N    | 15.92                 | 46.00        | 24.45       | Compliant |
| 5.400           | 25.51                      | QP                  | 9.000           | N    | 15.88                 | 60.00        | 34.49       | Compliant |
| 5.400           | 19.65                      | AV                  | 9.000           | N    | 15.88                 | 50.00        | 30.35       | Compliant |
| 18.050          | 23.54                      | QP                  | 9.000           | N    | 16.10                 | 60.00        | 36.46       | Compliant |
| 18.050          | 17.05                      | AV                  | 9.000           | N    | 16.10                 | 50.00        | 32.95       | Compliant |

**Note:**



1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)



**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

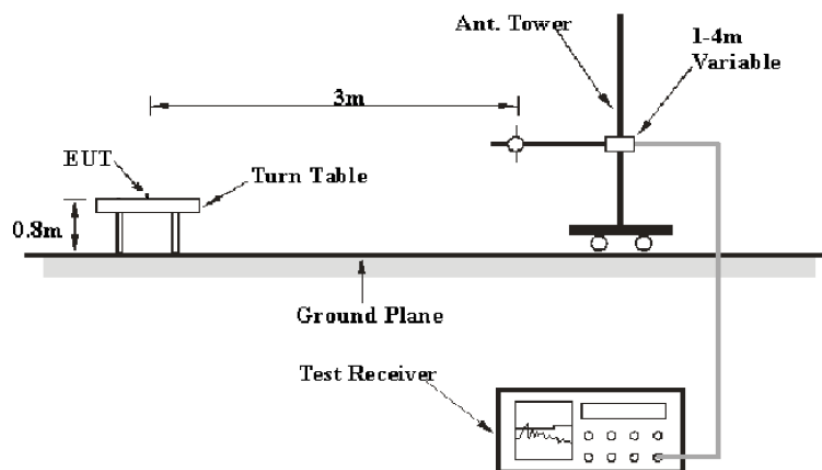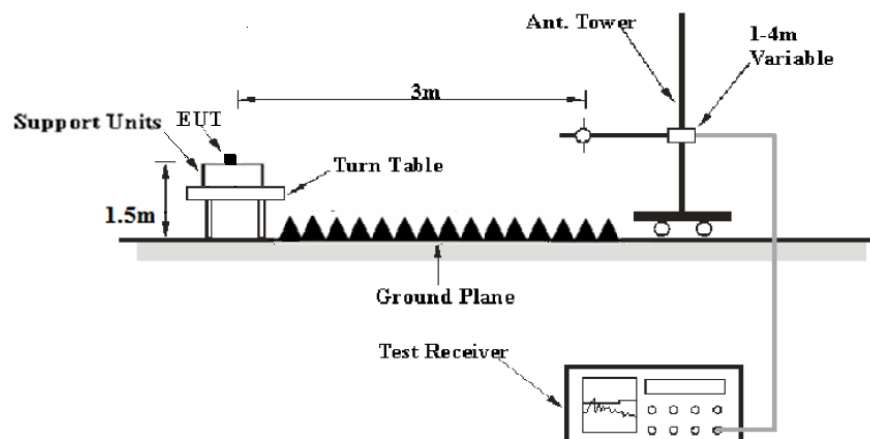**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1GHz        | 1MHz    | 3 MHz     | /       | PK       |
|                   | 1MHz    | 3 MHz     | /       | Ave.     |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data****Environmental Conditions**


|                           |                |
|---------------------------|----------------|
| <b>Temperature:</b>       | 24.1-24.8 °C   |
| <b>Relative Humidity:</b> | 48-50 %        |
| <b>ATM Pressure:</b>      | 101.0-101.2kPa |

The testing was performed by Hope Zhang from 2019-04-26 to 2019-05-06.

EUT operation mode: Transmitting

**Spurious Emission Test:****30MHz-1GHz:**

Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of GFSK Mode in Z-axis of orientation was recorded

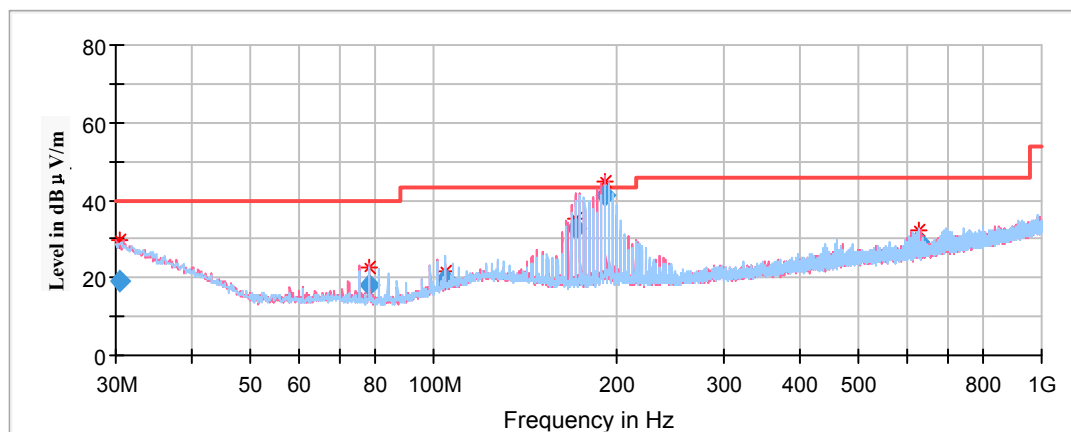

| Frequency (MHz) | Corrected Amplitude | Rx Antenna  |             | Turntable Degree | Corrected Factor (dB/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------------------|-------------|-------------|------------------|-------------------------|----------------|-------------|
|                 | Quasi-peak (dBμV/m) | Height (cm) | Polar (H/V) |                  |                         |                |             |
| 30.379950       | 19.01               | 101.0       | V           | 203.0            | -4.2                    | 40.00          | 20.99       |
| 78.402450       | 18.27               | 101.0       | V           | 228.0            | -17.7                   | 40.00          | 21.73       |
| 104.524300      | 19.83               | 199.0       | H           | 168.0            | -14.0                   | 43.50          | 23.67       |
| 171.313700      | 32.86               | 101.0       | V           | 274.0            | -13.2                   | 43.50          | 10.64       |
| 191.714400      | 41.26               | 101.0       | V           | 259.0            | -12.8                   | 43.50          | 2.24        |
| 627.260350      | 29.12               | 199.0       | H           | 203.0            | -4.7                    | 46.00          | 16.88       |

**1GHz-18GHz:**


*Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode in Z-axis of orientation was recorded*

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)  
 Corrected Amplitude (dB $\mu$ V /m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)  
 Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V /m)

**Low Channel: 2402MHz**


Full Spectrum

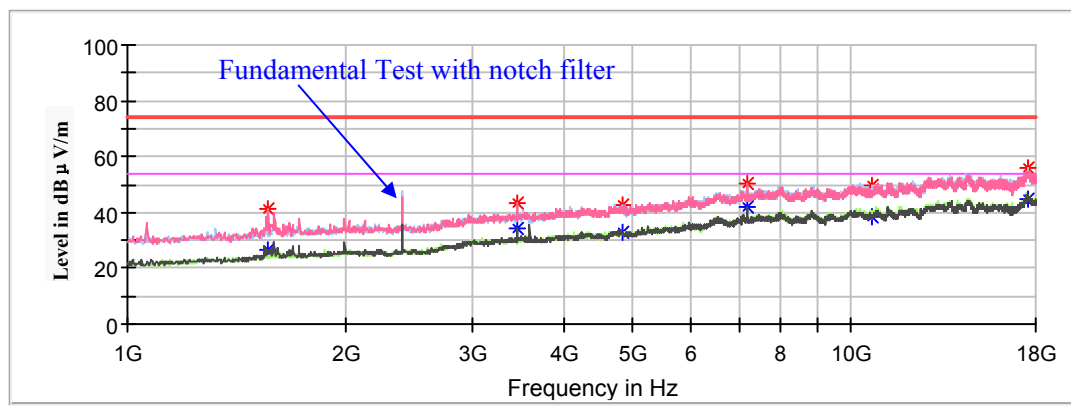

| Frequency (MHz) | Corrected Amplitude     |                         | Rx Antenna  |             | Turntable Degree | Corrected Factor (dB/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|-------------------------|-------------------------|-------------|-------------|------------------|-------------------------|----------------------|-------------|
|                 | MaxPeak (dB $\mu$ V /m) | Average (dB $\mu$ V /m) | Height (cm) | Polar (H/V) |                  |                         |                      |             |
| 1567.800000     | ---                     | 26.79                   | 200.0       | V           | 235.0            | -9.7                    | 54.00                | 27.21       |
| 1567.800000     | 41.11                   | ---                     | 200.0       | V           | 235.0            | -9.7                    | 74.00                | 32.89       |
| 3454.800000     | ---                     | 34.56                   | 200.0       | V           | 303.0            | -3.6                    | 54.00                | 19.44       |
| 3454.800000     | 43.69                   | ---                     | 200.0       | V           | 303.0            | -3.6                    | 74.00                | 30.31       |
| 4804.000000     | ---                     | 32.99                   | 200.0       | H           | 236.0            | -0.5                    | 54.00                | 21.01       |
| 4804.000000     | 42.38                   | ---                     | 200.0       | H           | 236.0            | -0.5                    | 74.00                | 31.62       |
| 7206.000000     | ---                     | 41.82                   | 100.0       | H           | 263.0            | 5.7                     | 54.00                | 12.18       |
| 7206.000000     | 50.56                   | ---                     | 100.0       | H           | 263.0            | 5.7                     | 74.00                | 23.44       |
| 10686.600000    | ---                     | 38.61                   | 100.0       | H           | 96.0             | 9.3                     | 54.00                | 15.39       |
| 10686.600000    | 49.33                   | ---                     | 100.0       | H           | 96.0             | 9.3                     | 74.00                | 24.67       |
| 17578.400000    | ---                     | 45.02                   | 200.0       | H           | 153.0            | 14.2                    | 54.00                | 8.98        |
| 17578.400000    | 56.05                   | ---                     | 200.0       | H           | 153.0            | 14.2                    | 74.00                | 17.95       |

**Middle Channel: 2441MHz**


Full Spectrum

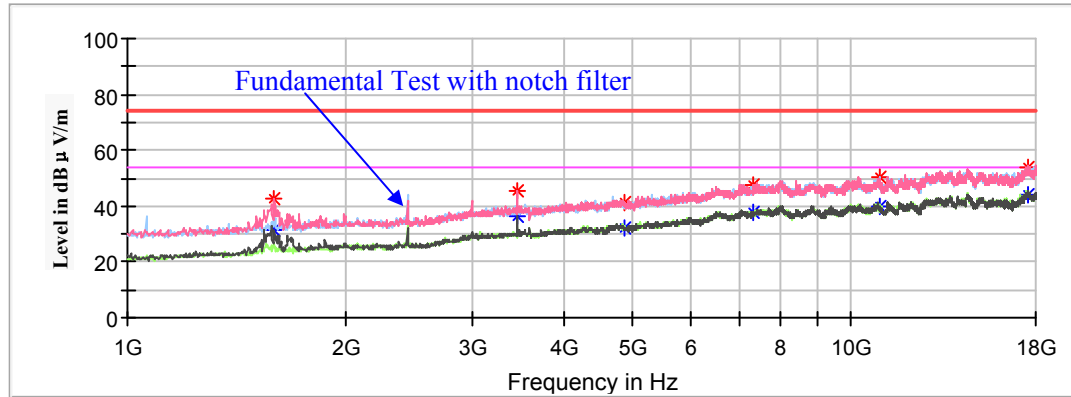

| Frequency (MHz) | Corrected Amplitude |                   | Rx Antenna  |             | Turntable Degree | Corrected Factor (dB/m) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------------------|-------------------|-------------|-------------|------------------|-------------------------|----------------|-------------|
|                 | MaxPeak (dBμV /m)   | Average (dBμV /m) | Height (cm) | Polar (H/V) |                  |                         |                |             |
| 1595.000000     | ---                 | 31.66             | 200.0       | V           | 358.0            | -9.6                    | 54.00          | 22.34       |
| 1595.000000     | 42.98               | ---               | 200.0       | V           | 358.0            | -9.6                    | 74.00          | 31.02       |
| 3454.800000     | ---                 | 36.15             | 200.0       | V           | 306.0            | -3.6                    | 54.00          | 17.85       |
| 3454.800000     | 45.22               | ---               | 200.0       | V           | 306.0            | -3.6                    | 74.00          | 28.78       |
| 4882.000000     | ---                 | 32.23             | 200.0       | H           | 0.0              | -0.5                    | 54.00          | 21.77       |
| 4882.000000     | 41.59               | ---               | 200.0       | H           | 0.0              | -0.5                    | 74.00          | 32.41       |
| 7323.000000     | ---                 | 37.88             | 100.0       | H           | 86.0             | 5.9                     | 54.00          | 16.12       |
| 7323.000000     | 47.38               | ---               | 100.0       | H           | 86.0             | 5.9                     | 74.00          | 26.62       |
| 10938.200000    | ---                 | 39.56             | 200.0       | V           | 286.0            | 9.7                     | 54.00          | 14.44       |
| 10938.200000    | 50.07               | ---               | 200.0       | V           | 286.0            | 9.7                     | 74.00          | 23.93       |
| 17507.000000    | ---                 | 44.09             | 200.0       | H           | 62.0             | 14.3                    | 54.00          | 9.91        |
| 17507.000000    | 54.03               | ---               | 200.0       | H           | 62.0             | 14.3                    | 74.00          | 19.97       |

**High Channel: 2480MHz**


Full Spectrum

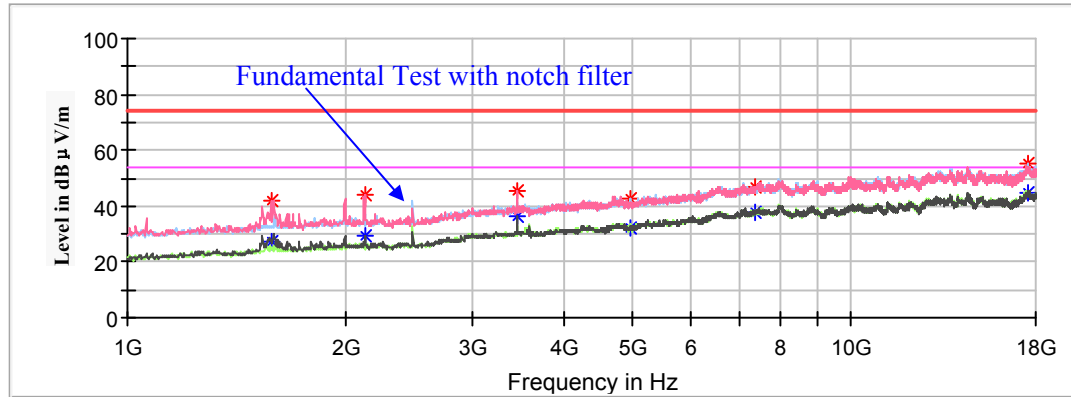


| Frequency (MHz) | Corrected Amplitude |                   | Rx Antenna  |             | Turntable Degree | Corrected Factor (dB/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|---------------------|-------------------|-------------|-------------|------------------|-------------------------|----------------|-------------|
|                 | MaxPeak (dBµV /m)   | Average (dBµV /m) | Height (cm) | Polar (H/V) |                  |                         |                |             |
| 1578.000000     | ---                 | 27.26             | 200.0       | V           | 280.0            | -9.7                    | 54.00          | 26.74       |
| 1578.000000     | 41.86               | ---               | 200.0       | V           | 280.0            | -9.7                    | 74.00          | 32.14       |
| 2128.800000     | ---                 | 29.08             | 200.0       | V           | 280.0            | -7.9                    | 54.00          | 24.92       |
| 2128.800000     | 44.40               | ---               | 200.0       | V           | 280.0            | -7.9                    | 74.00          | 29.60       |
| 3454.800000     | ---                 | 36.11             | 200.0       | V           | 318.0            | -3.6                    | 54.00          | 17.89       |
| 3454.800000     | 45.70               | ---               | 200.0       | V           | 318.0            | -3.6                    | 74.00          | 28.30       |
| 4960.000000     | ---                 | 32.13             | 150.0       | H           | 25.0             | -0.3                    | 54.00          | 21.87       |
| 4960.000000     | 42.54               | ---               | 150.0       | H           | 25.0             | -0.3                    | 74.00          | 31.46       |
| 7381.800000     | ---                 | 37.49             | 100.0       | H           | 288.0            | 5.9                     | 54.00          | 16.51       |
| 7381.800000     | 47.14               | ---               | 100.0       | H           | 288.0            | 5.9                     | 74.00          | 26.86       |
| 17561.400000    | ---                 | 44.90             | 100.0       | H           | 132.0            | 14.2                    | 54.00          | 9.10        |
| 17561.400000    | 55.12               | ---               | 100.0       | H           | 132.0            | 14.2                    | 74.00          | 18.88       |

**18GHz-25GHz:**

*Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case high channel of GFSK Mode in Z-axis of orientation was recorded*

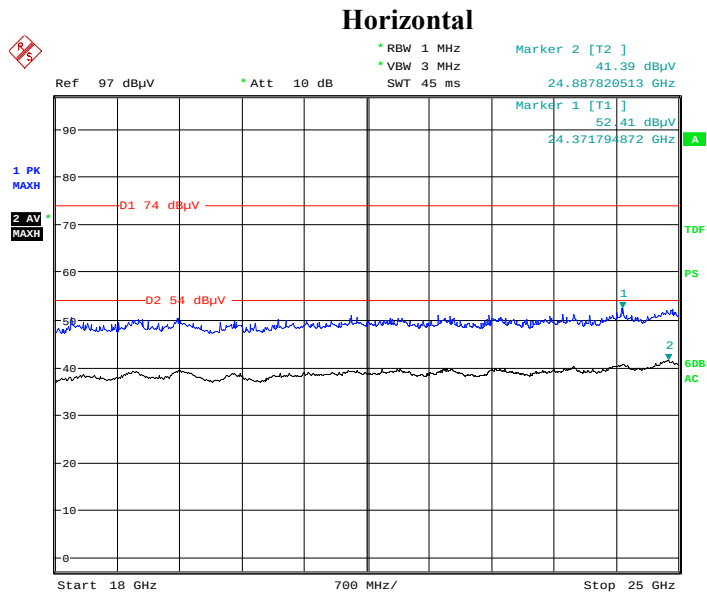

Date: 6.MAY.2019 12:19:51

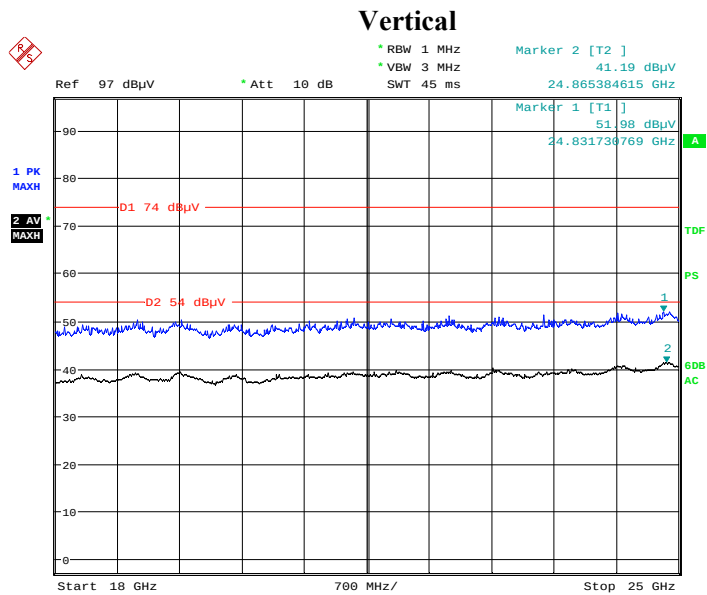

Date: 6.MAY.2019 12:41:14

**Fundamental Test & Restricted Bands Emissions:**

*Pre-Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case GFSK Mode in Z-axis of orientation was recorded*

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB $\mu$ V /m) = Corrected Factor (dB/m) + Reading (dB $\mu$ V)


Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V /m)

| Frequency<br>(MHz)      | Corrected Amplitude     |                      | Rx Antenna     |                | Turntable<br>Degree | Corrected<br>Factor<br>(dB/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|-------------------------|-------------------------|----------------------|----------------|----------------|---------------------|-------------------------------|-------------------|----------------|
|                         | MaxPeak<br>(dBμV<br>/m) | Average<br>(dBμV /m) | Height<br>(cm) | Polar<br>(H/V) |                     |                               |                   |                |
| Low Channel: 2402MHz    |                         |                      |                |                |                     |                               |                   |                |
| 2402.000000             | 99.27                   | ---                  | 150.0          | H              | 191.0               | 2.8                           | /                 | /              |
| 2402.000000             | ---                     | 98.86                | 150.0          | H              | 191.0               | 2.8                           | /                 | /              |
| 2402.000000             | 96.89                   | ---                  | 150.0          | V              | 138.0               | 2.8                           | /                 | /              |
| 2402.000000             | ---                     | 96.54                | 150.0          | V              | 138.0               | 2.8                           | /                 | /              |
| 2390.000000             | ---                     | 36.71                | 100.0          | H              | 118.0               | 2.8                           | 54.00             | 17.29          |
| 2390.000000             | 46.96                   | ---                  | 100.0          | H              | 118.0               | 2.8                           | 74.00             | 27.04          |
| Middle Channel: 2441MHz |                         |                      |                |                |                     |                               |                   |                |
| 2441.000000             | 98.65                   | ---                  | 100.0          | H              | 306.0               | 2.9                           | /                 | /              |
| 2441.000000             | ---                     | 97.93                | 100.0          | H              | 306.0               | 2.9                           | /                 | /              |
| 2441.000000             | 96.44                   | ---                  | 250.0          | V              | 62.0                | 2.9                           | /                 | /              |
| 2441.000000             | ---                     | 95.46                | 250.0          | V              | 62.0                | 2.9                           | /                 | /              |
| High Channel: 2480MHz   |                         |                      |                |                |                     |                               |                   |                |
| 2480.000000             | 100.98                  | ---                  | 100.0          | H              | 158.0               | 6.3                           | /                 | /              |
| 2480.000000             | ---                     | 100.52               | 100.0          | H              | 158.0               | 6.3                           | /                 | /              |
| 2480.000000             | 98.64                   | ---                  | 200.0          | V              | 157.0               | 6.3                           | /                 | /              |
| 2480.000000             | ---                     | 98.14                | 200.0          | V              | 157.0               | 6.3                           | /                 | /              |
| 2483.500000             | 47.25                   | ---                  | 100.0          | H              | 69.0                | 6.3                           | 74.00             | 26.75          |
| 2483.500000             | ---                     | 37.69                | 100.0          | H              | 69.0                | 6.3                           | 54.00             | 16.31          |




## Conducted Spurious Emissions at Antenna Port

### BDR (GFSK): Low Channel

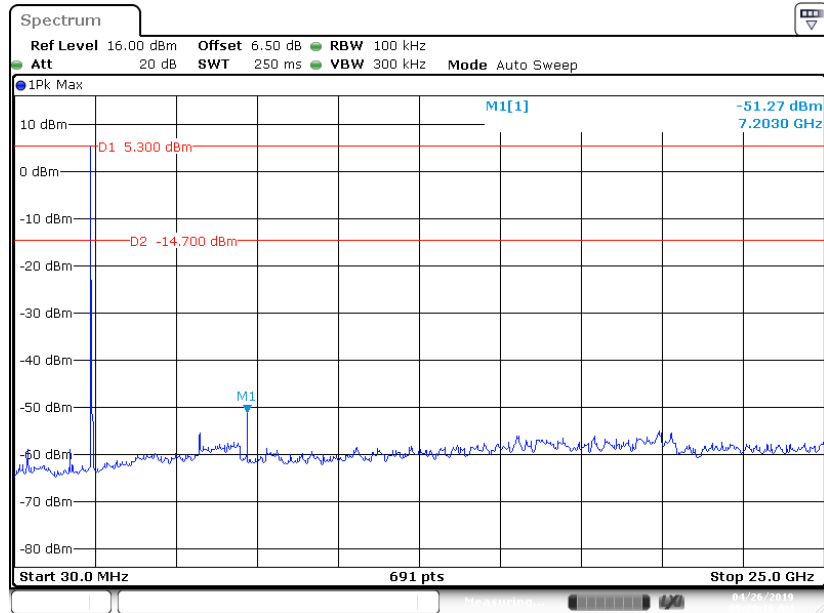


Date: 26 APR 2019 09:29:16

### BDR (GFSK): Middle Channel

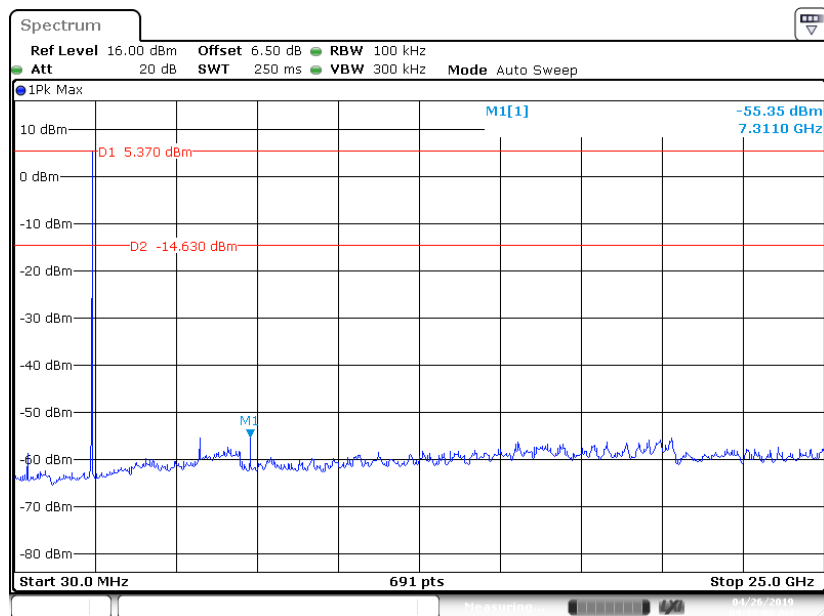


Date: 26 APR 2019 09:33:08

### BDR (GFSK): High Channel

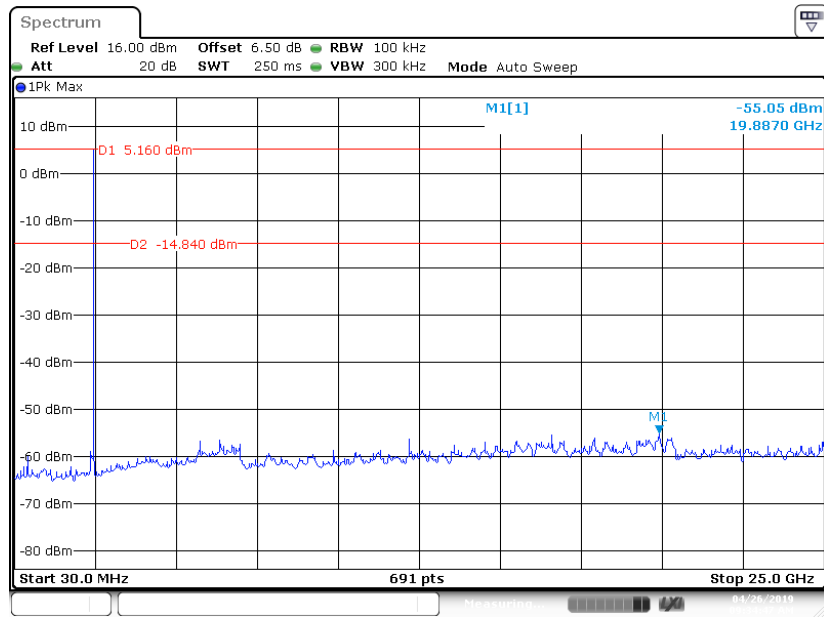


Date: 26 APR 2019 09:34:47

### EDR ( $\pi/4$ -DQPSK): Low Channel

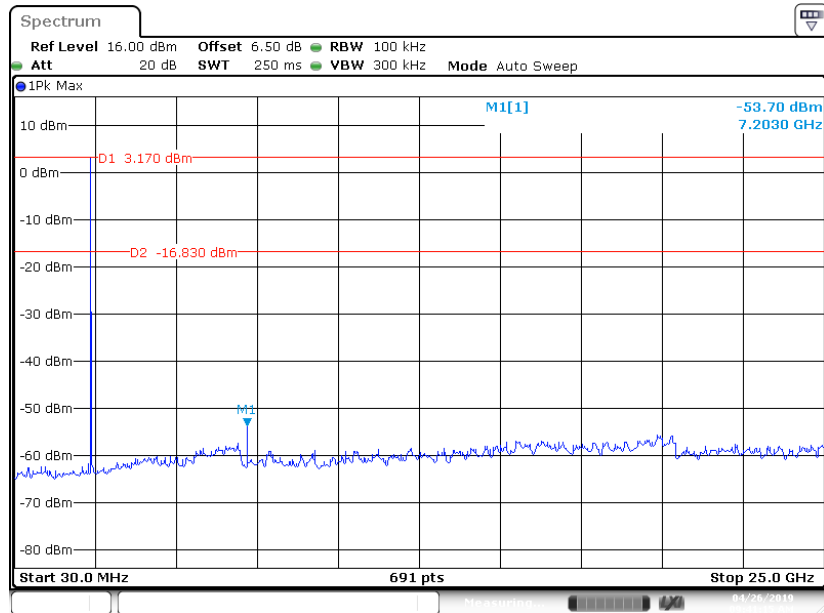


Date: 26 APR 2019 09:41:15

### EDR ( $\pi/4$ -DQPSK): Middle Channel

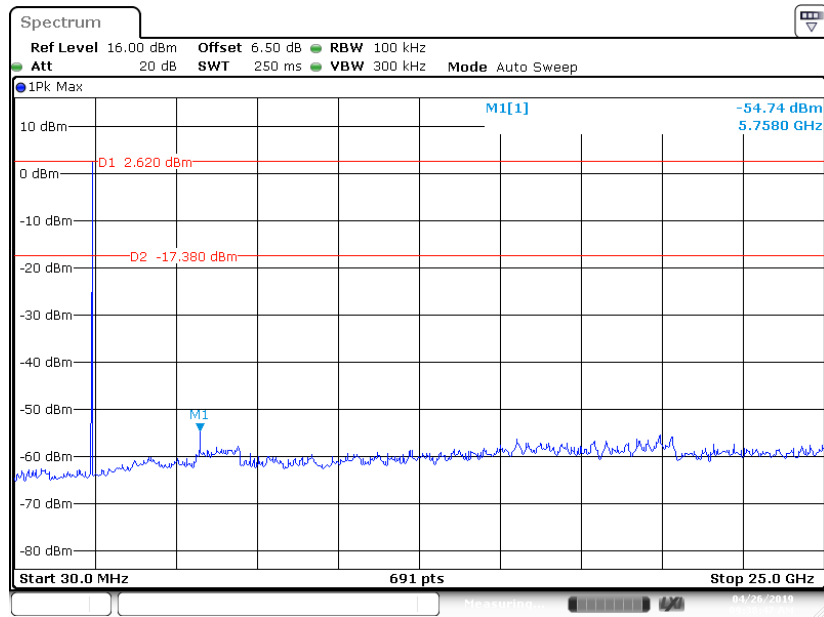


Date: 26 APR 2019 09:38:47

### EDR ( $\pi/4$ -DQPSK): High Channel

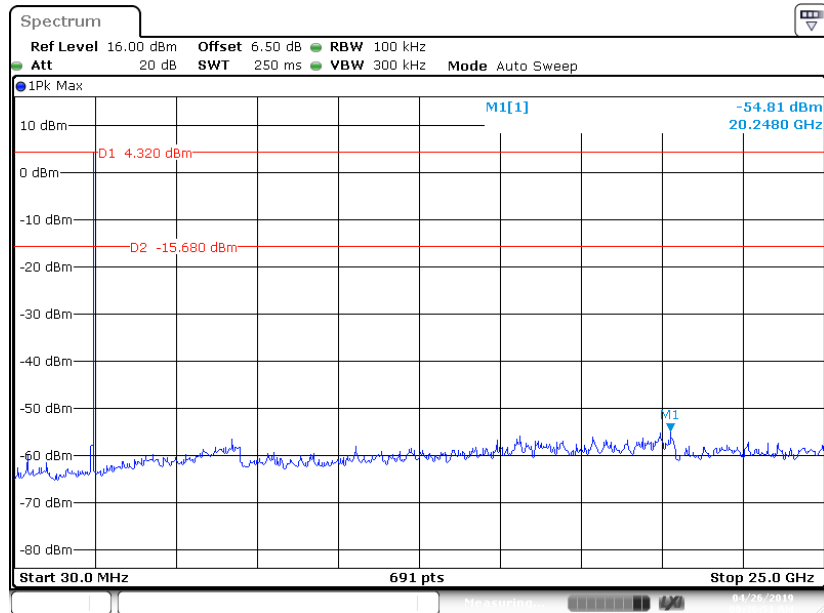


Date: 26 APR 2019 09:36:51

### EDR (8DPSK): Low Channel

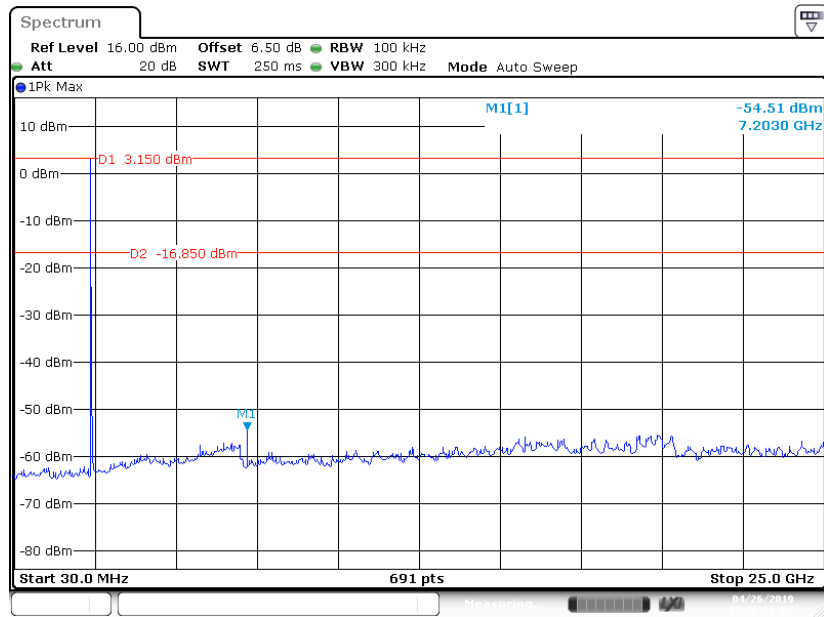


Date: 26 APR 2019 09:46:39

### EDR (8DPSK): Middle Channel

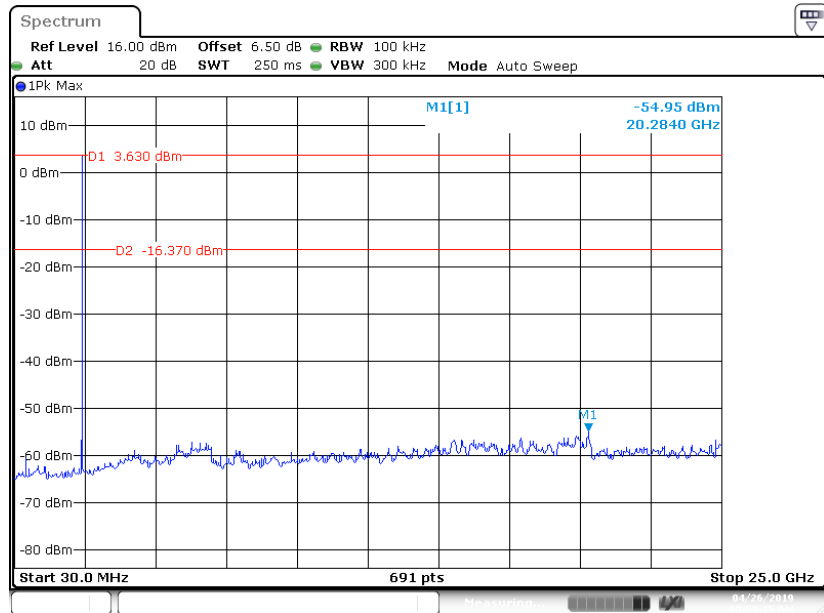

Date: 26 APR 2019 09:53:15

# EDR (8DPSK): High Channel

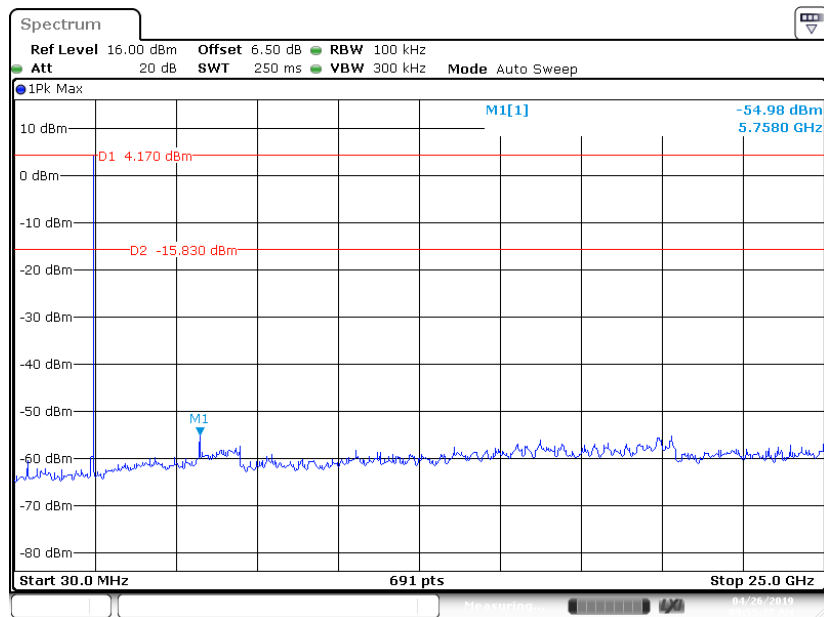

Date: 26 APR 2019 09:55:36

**FCC §15.247(a) (1)-CHANNEL SEPARATION TEST****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.2 °C   |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 101.3 kPa |

*The testing was performed by Hope Zhang on 2019-04-25.*


*EUT operation mode: Transmitting*

*Test Result: Compliant.*


| Mode                  | Channel  | Frequency (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
|-----------------------|----------|-----------------|--------------------------|-------------|--------|
| BDR (GFSK)            | Low      | 2402            | 1.003                    | 0.692       | Pass   |
|                       | Adjacent | 2403            |                          |             |        |
|                       | Middle   | 2441            | 0.999                    | 0.689       | Pass   |
|                       | Adjacent | 2442            |                          |             |        |
|                       | High     | 2480            | 1.003                    | 0.689       | Pass   |
|                       | Adjacent | 2479            |                          |             |        |
| EDR ( $\pi/4$ -DQPSK) | Low      | 2402            | 1.003                    | 0.859       | Pass   |
|                       | Adjacent | 2403            |                          |             |        |
|                       | Middle   | 2441            | 1.003                    | 0.857       | Pass   |
|                       | Adjacent | 2442            |                          |             |        |
|                       | High     | 2480            | 1.003                    | 0.859       | Pass   |
|                       | Adjacent | 2479            |                          |             |        |
| EDR (8DPSK)           | Low      | 2402            | 1.003                    | 0.854       | Pass   |
|                       | Adjacent | 2403            |                          |             |        |
|                       | Middle   | 2441            | 1.003                    | 0.848       | Pass   |
|                       | Adjacent | 2442            |                          |             |        |
|                       | High     | 2480            | 0.999                    | 0.854       | Pass   |
|                       | Adjacent | 2479            |                          |             |        |

Note: For BDR mode and EDR mode, Limit = 20 dB bandwidth\*2/3


### BDR (GFSK): Low Channel

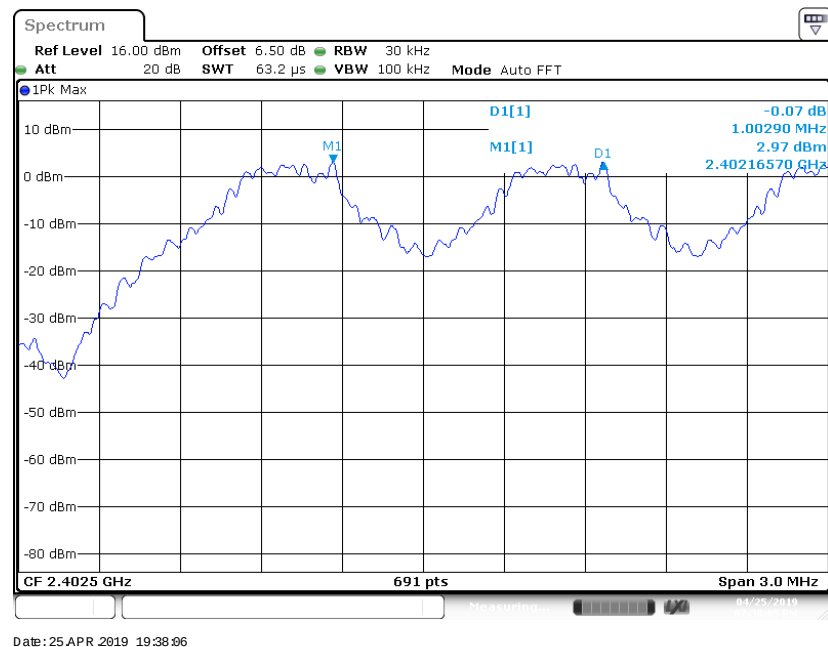


### BDR (GFSK): Middle Channel

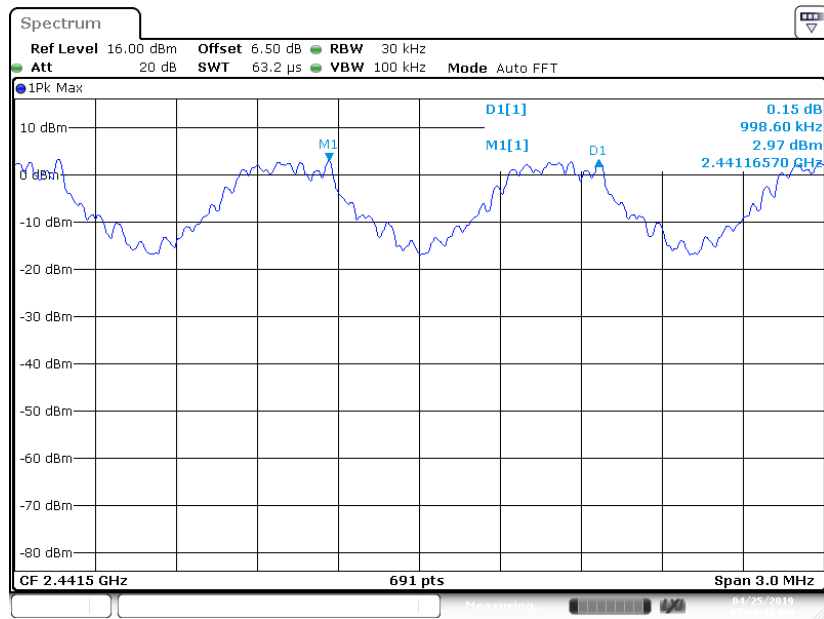


### BDR (GFSK): High Channel

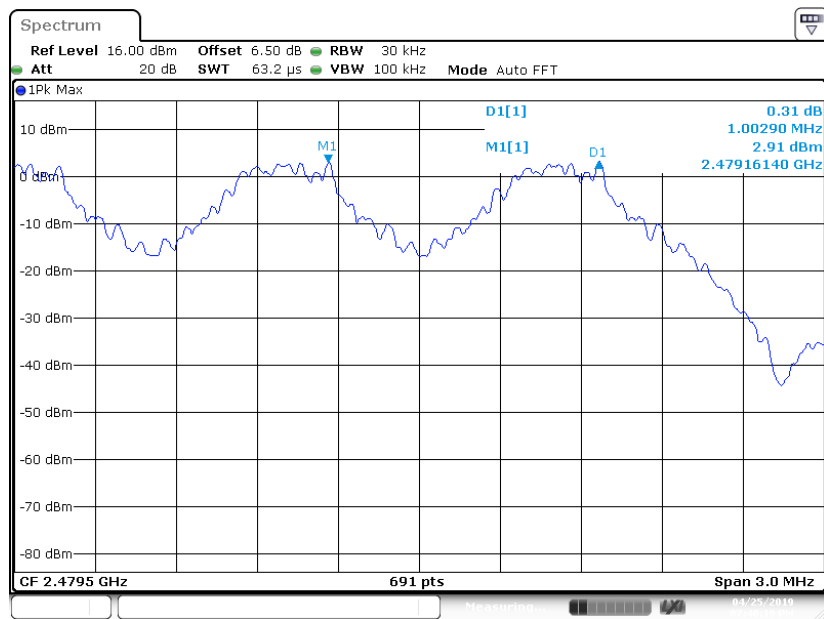

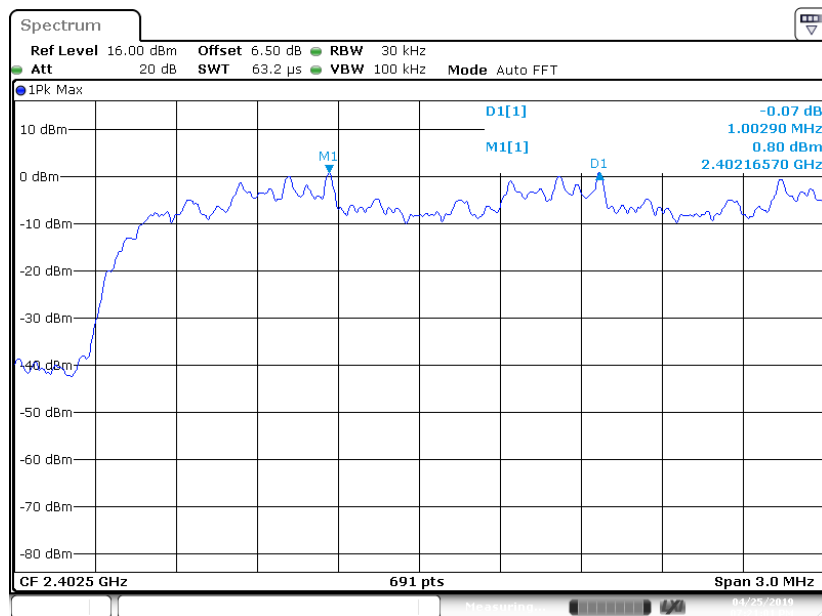


**EDR ( $\pi/4$ -DQPSK): Low Channel**

Date: 25 APR 2019 19:21:01

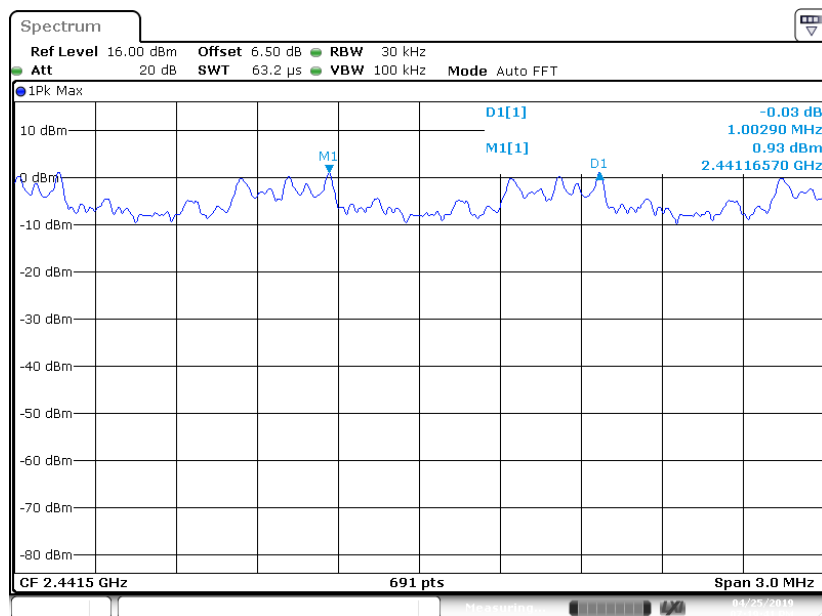
**EDR ( $\pi/4$ -DQPSK): Middle Channel**

Date: 25 APR 2019 19:19:41

### EDR ( $\pi/4$ -DQPSK): High Channel

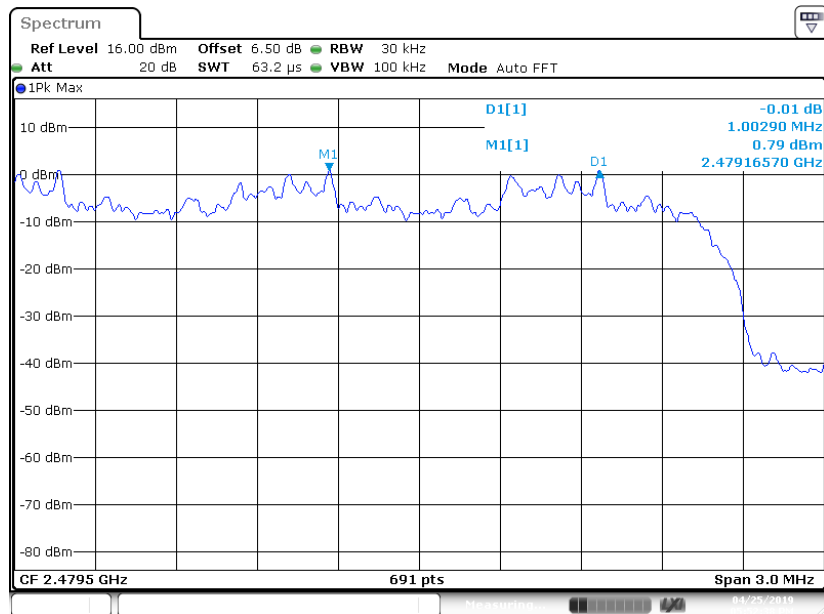

### EDR (8DPSK): Low Channel

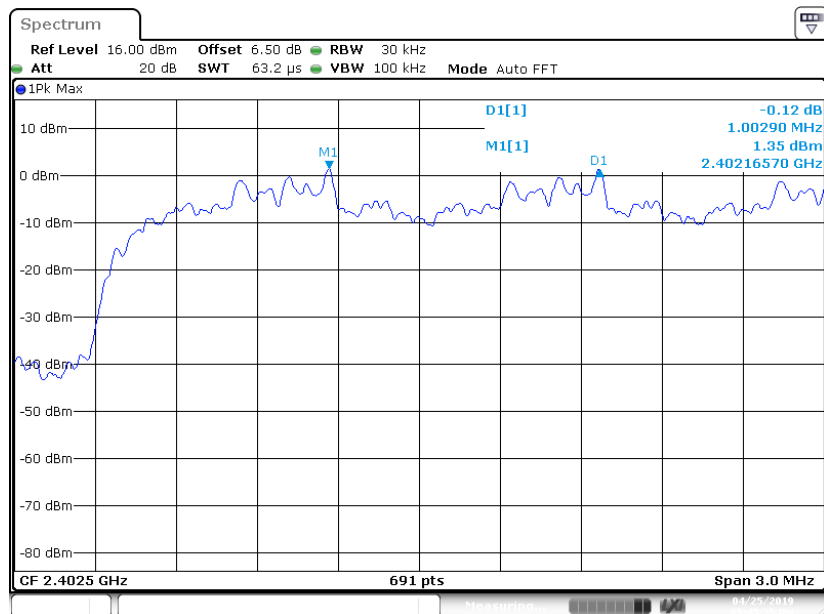

**Spectrum**

**Ref Level** 16.00 dBm **Offset** 6.50 dB **RBW** 30 kHz  
**Att** 20 dB **SWT** 63.2  $\mu$ s **VBW** 100 kHz **Mode** Auto FFT

**1Pk Max**

10 dBm  
0 dBm  
-10 dBm  
-20 dBm  
-30 dBm  
-40 dBm  
-50 dBm  
-60 dBm  
-70 dBm  
-80 dBm

D1[1] 0.52 dB  
M1[1] 1.00290 MHz  
D1 0.45 dBm  
2.44116570 GHz

CF 2.4415 GHz 691 pts Span 3.0 MHz

Measuring 04/25/2019

**Spectrum**

Ref Level 16.00 dBm Offset 6.50 dB RBW 30 kHz  
 Att 20 dB SWT 63.2  $\mu$ s VBW 100 kHz Mode Auto FFT

1Pk Max

10 dBm  
 0 dBm  
 -10 dBm  
 -20 dBm  
 -30 dBm  
 -40 dBm  
 -50 dBm  
 -60 dBm  
 -70 dBm  
 -80 dBm

D1[1] -0.52 dBm  
 M1[1] 998.60 kHz  
 D1 1.44 dBm  
 2.47916570 GHz

CF 2.4795 GHz 691 pts Span 3.0 MHz

Measurement 04/25/2010

Page 35 of 74

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.2 °C   |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 101.3 kPa |

*The testing was performed by Hope Zhang on 2019-04-25.*

*EUT operation mode: Transmitting*


*Test Result: Compliant.*

| Mode                                  | Channel | Frequency (MHz) | 20 dB Emission Bandwidth (MHz) |
|---------------------------------------|---------|-----------------|--------------------------------|
| <b>BDR (GFSK)</b>                     | Low     | 2402            | 1.038                          |
|                                       | Middle  | 2441            | 1.033                          |
|                                       | High    | 2480            | 1.033                          |
| <b>EDR (<math>\pi/4</math>-DQPSK)</b> | Low     | 2402            | 1.289                          |
|                                       | Middle  | 2441            | 1.285                          |
|                                       | High    | 2480            | 1.289                          |
| <b>EDR (8DPSK)</b>                    | Low     | 2402            | 1.281                          |
|                                       | Middle  | 2441            | 1.272                          |
|                                       | High    | 2480            | 1.281                          |

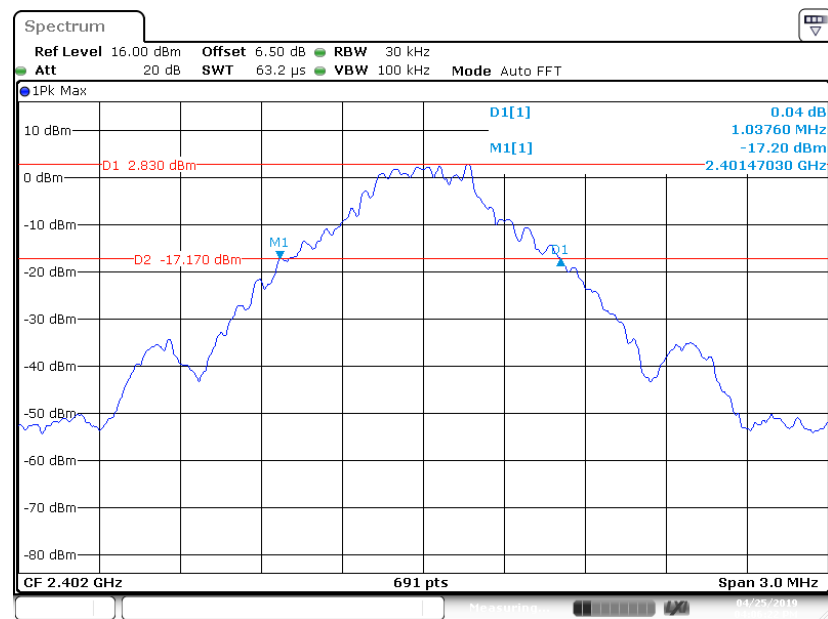**BDR (GFSK): Low Channel**


Date: 25 APR 2019 16:06:22

### BDR (GFSK): Middle Channel

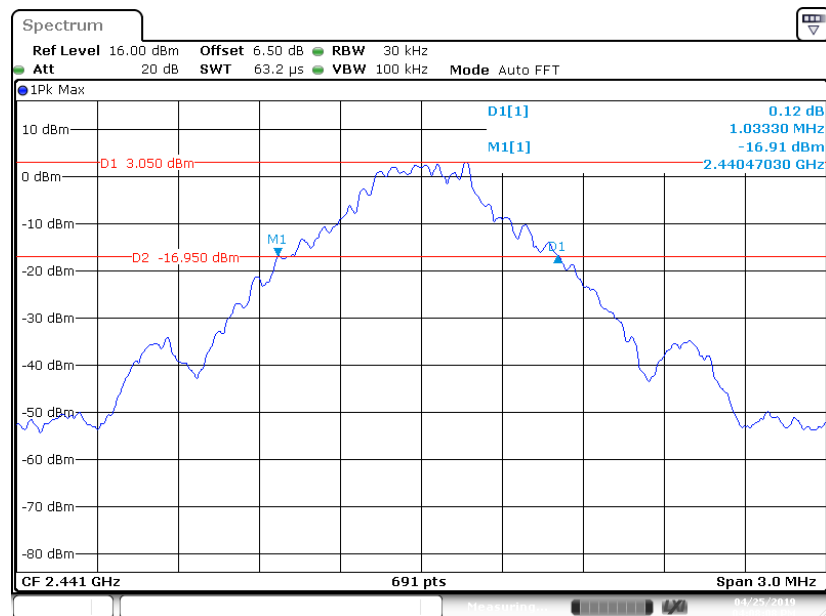


Date: 25 APR 2019 16:08:09

### BDR (GFSK): High Channel

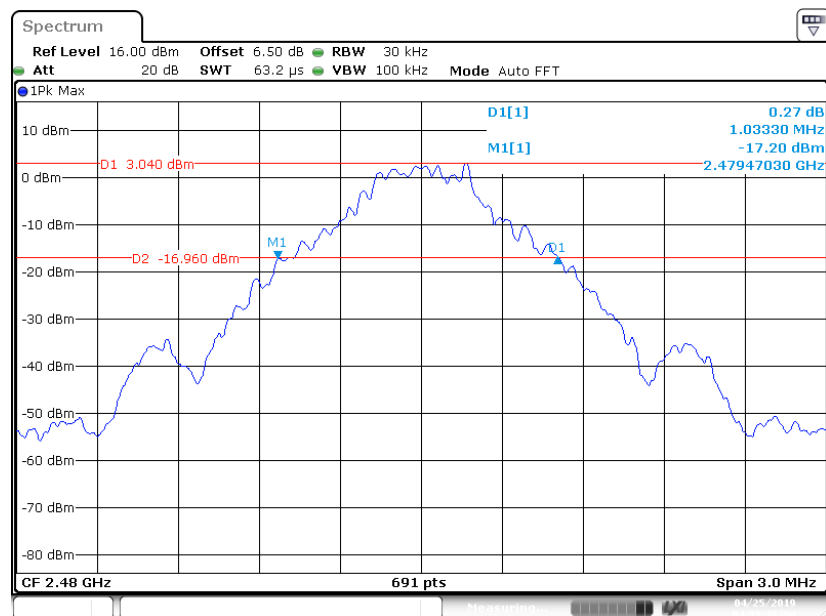


Date: 25 APR 2019 16:09:38


### EDR ( $\pi/4$ -DQPSK): Low Channel

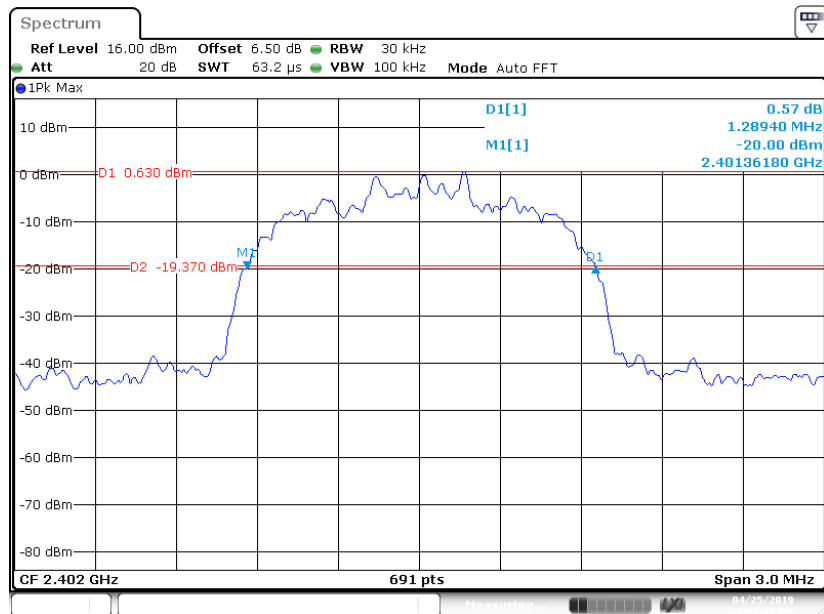


### EDR( $\pi/4$ -DQPSK): Middle Channel

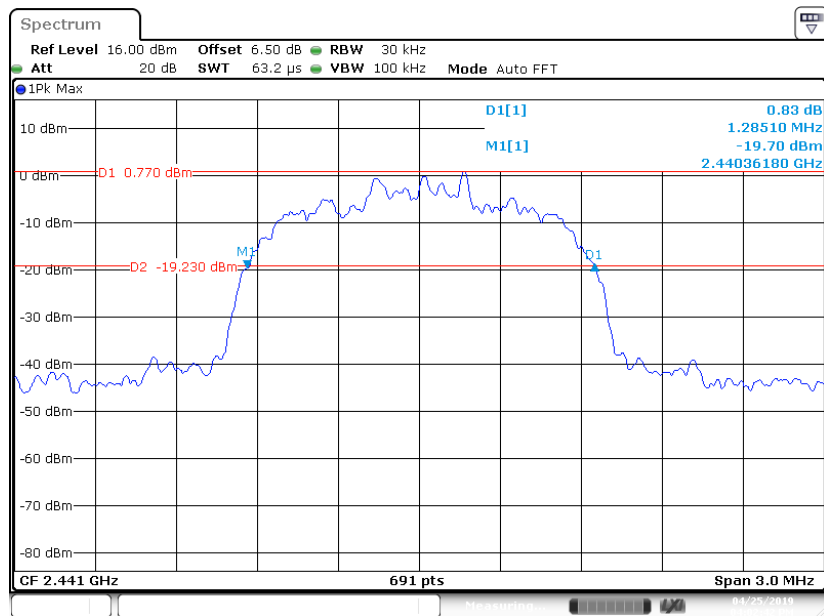

### EDR ( $\pi/4$ -DQPSK): High Channel

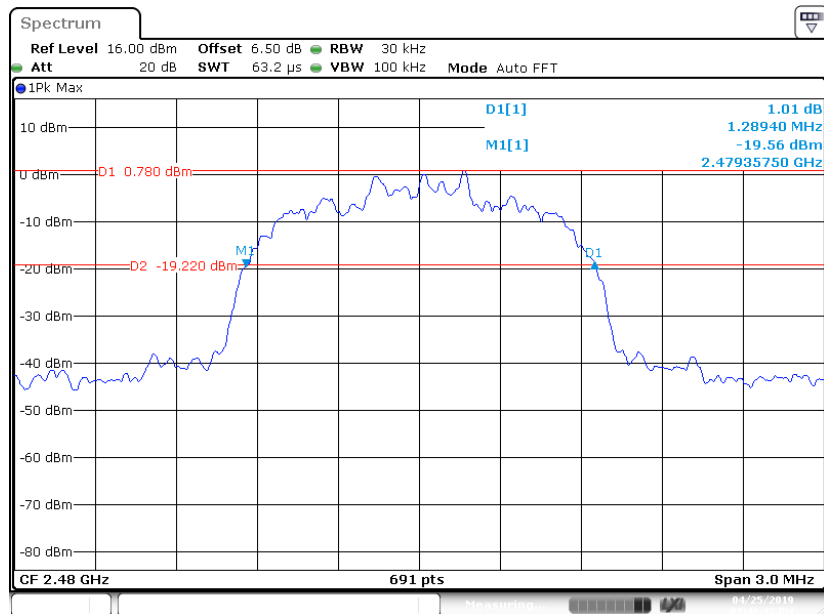


### EDR (8DPSK): Low Channel

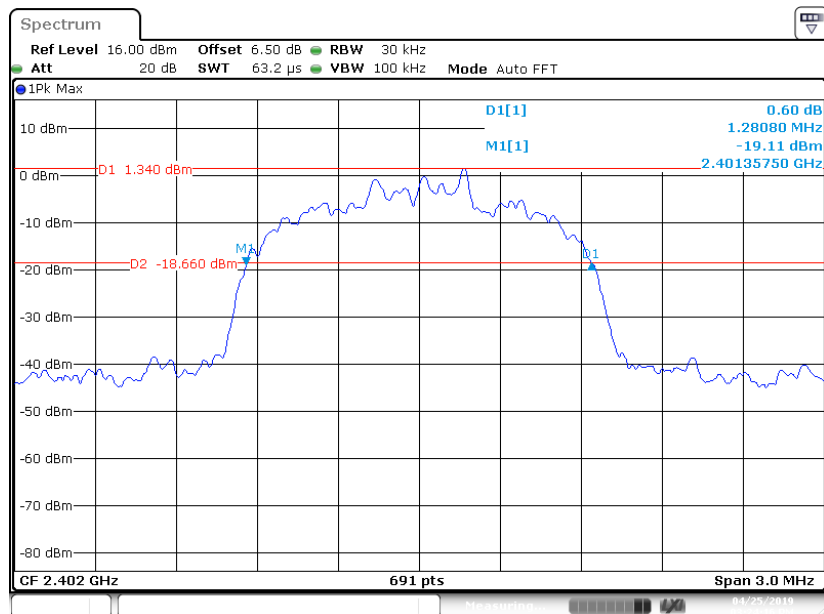




### EDR (8DPSK): Middle Channel

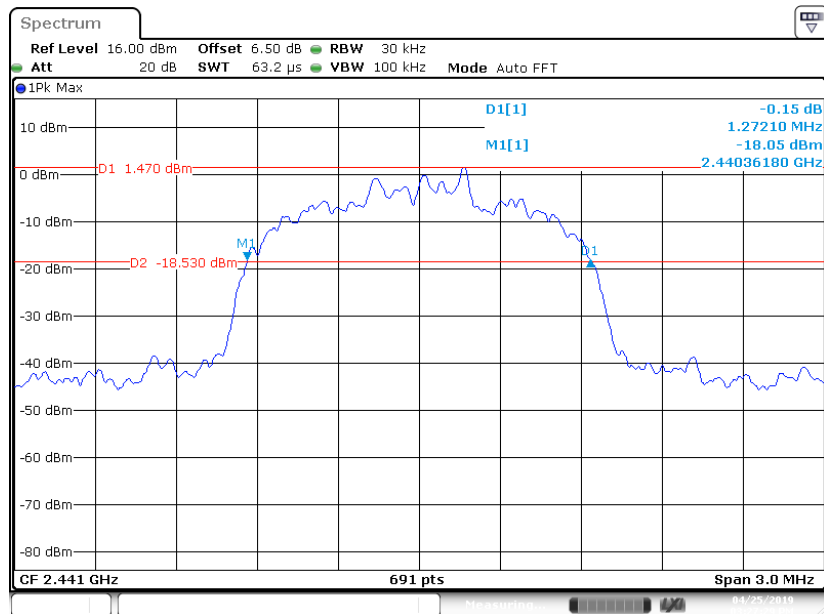

### EDR (8DPSK): High Channel

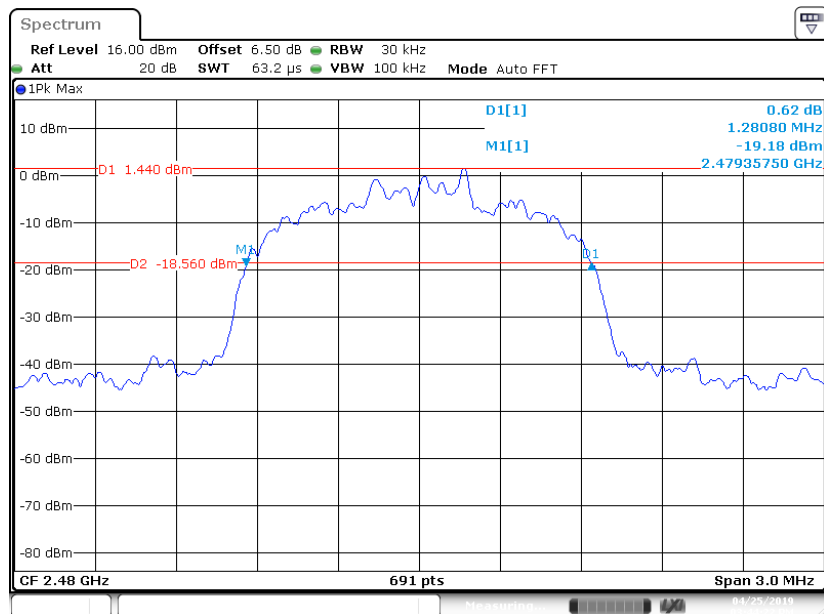

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW  $\geq$  RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.2 °C   |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 101.3 kPa |


*The testing was performed by Hope Zhang on 2019-04-26.*

*EUT operation mode: Hopping*

*Test Result: Compliant.*


| Mode                  | Frequency Range (MHz) | Number of Hopping Channel (CH) | Limit (CH) |
|-----------------------|-----------------------|--------------------------------|------------|
| BDR (GFSK)            | 2400-2483.5           | 79                             | ≥15        |
| EDR ( $\pi/4$ -DQPSK) | 2400-2483.5           | 79                             | ≥15        |
| EDR (8DPSK)           | 2400-2483.5           | 79                             | ≥15        |

### BDR (GFSK): Number of Hopping Channels

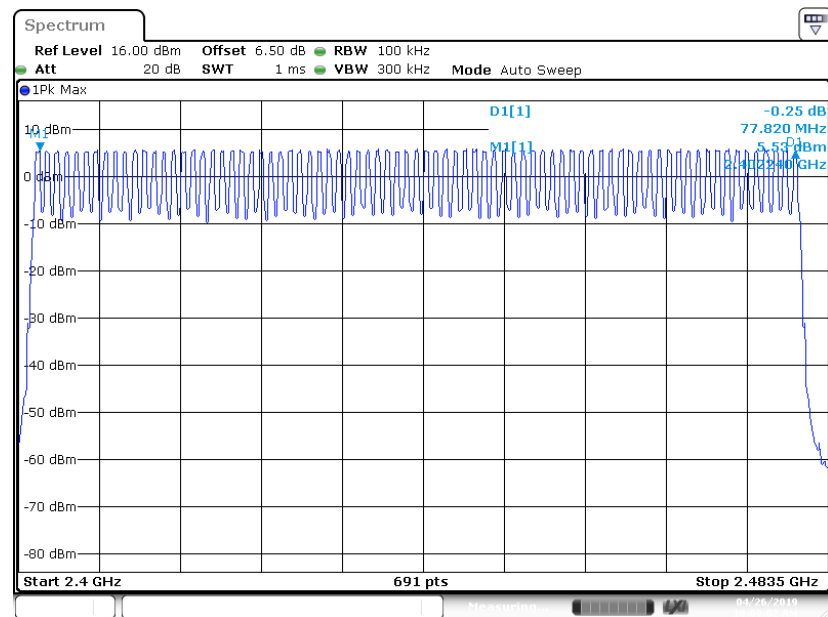


Date: 26 APR 2019 10:09:02

### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

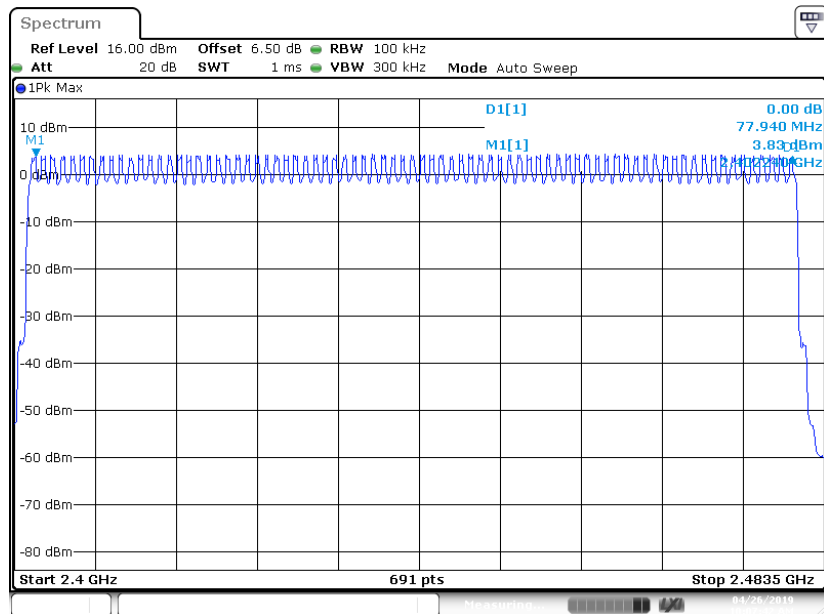

Date: 26 APR 2019 10:07:42

### EDR (8DPSK): Number of Hopping Channels

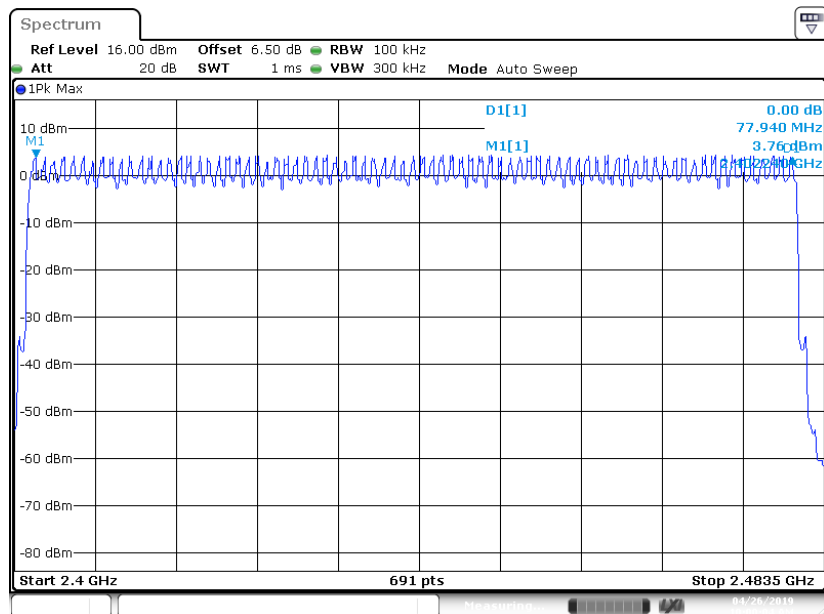

Date: 26 APR 2019 10:00:05

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\geq 1 / T$ , where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

**Test Data****Environmental Conditions**


|                           |                     |
|---------------------------|---------------------|
| <b>Temperature:</b>       | 23.2 °C~25.3 °C     |
| <b>Relative Humidity:</b> | 50 %~51 %           |
| <b>ATM Pressure:</b>      | 101.3 kPa~102.5 kPa |

*The testing was performed by Hope Zhang from 2019-04-26 to 2019-06-19.*


*EUT operation mode: Hopping*

| Mode                  |      | Channel                                              | Pulse Width (ms) | Dwell Time (s) | Limit (s) | Result |
|-----------------------|------|------------------------------------------------------|------------------|----------------|-----------|--------|
| BDR (GFSK)            | DH1  | Low                                                  | 0.596            | 0.191          | 0.4       | Pass   |
|                       |      | Middle                                               | 0.594            | 0.190          | 0.4       | Pass   |
|                       |      | High                                                 | 0.594            | 0.190          | 0.4       | Pass   |
|                       |      | Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S  |                  |                |           |        |
|                       | DH3  | Low                                                  | 1.857            | 0.297          | 0.4       | Pass   |
|                       |      | Middle                                               | 1.848            | 0.296          | 0.4       | Pass   |
|                       |      | High                                                 | 1.848            | 0.296          | 0.4       | Pass   |
|                       |      | Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S  |                  |                |           |        |
|                       | DH5  | Low                                                  | 2.906            | 0.310          | 0.4       | Pass   |
|                       |      | Middle                                               | 2.906            | 0.310          | 0.4       | Pass   |
|                       |      | High                                                 | 2.906            | 0.310          | 0.4       | Pass   |
|                       |      | Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S  |                  |                |           |        |
| EDR ( $\pi/4$ -DQPSK) | 2DH1 | Low                                                  | 0.594            | 0.190          | 0.4       | Pass   |
|                       |      | Middle                                               | 0.596            | 0.191          | 0.4       | Pass   |
|                       |      | High                                                 | 0.594            | 0.190          | 0.4       | Pass   |
|                       |      | Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S |                  |                |           |        |
|                       | 2DH3 | Low                                                  | 1.666            | 0.267          | 0.4       | Pass   |
|                       |      | Middle                                               | 1.666            | 0.267          | 0.4       | Pass   |
|                       |      | High                                                 | 1.667            | 0.267          | 0.4       | Pass   |
|                       |      | Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S |                  |                |           |        |
|                       | 2DH5 | Low                                                  | 2.928            | 0.312          | 0.4       | Pass   |
|                       |      | Middle                                               | 2.928            | 0.312          | 0.4       | Pass   |
|                       |      | High                                                 | 2.918            | 0.311          | 0.4       | Pass   |
|                       |      | Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S |                  |                |           |        |
| EDR (8DPSK)           | 3DH1 | Low                                                  | 0.594            | 0.190          | 0.4       | Pass   |
|                       |      | Middle                                               | 0.594            | 0.190          | 0.4       | Pass   |
|                       |      | High                                                 | 0.594            | 0.190          | 0.4       | Pass   |
|                       |      | Note:3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S |                  |                |           |        |
|                       | 3DH3 | Low                                                  | 1.667            | 0.267          | 0.4       | Pass   |
|                       |      | Middle                                               | 1.667            | 0.267          | 0.4       | Pass   |
|                       |      | High                                                 | 1.667            | 0.267          | 0.4       | Pass   |
|                       |      | Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S |                  |                |           |        |
|                       | 3DH5 | Low                                                  | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Middle                                               | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | High                                                 | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S |                  |                |           |        |


### BDR (GFSK): Pulse time, Low Channel, DH1

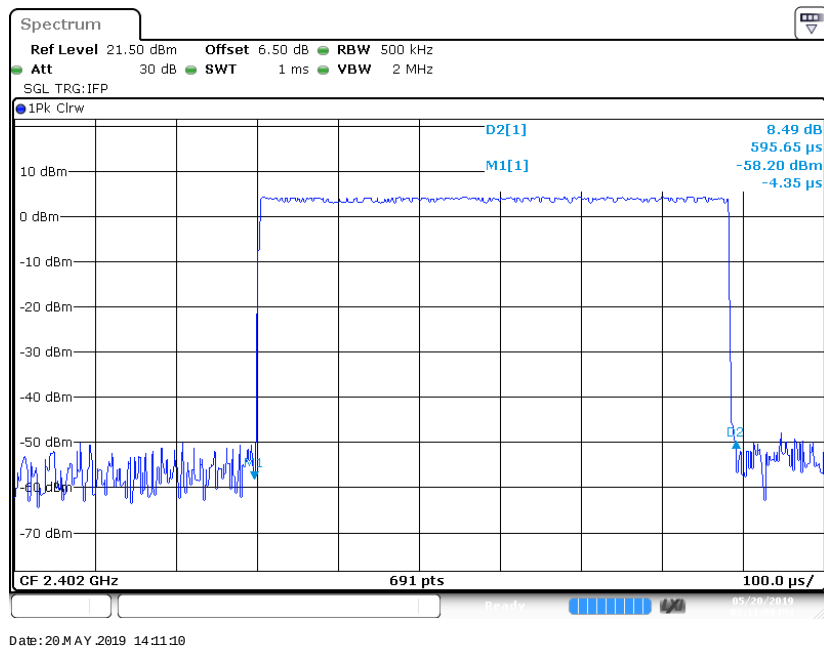

### BDR (GFSK): Pulse time, Middle Channel, DH1

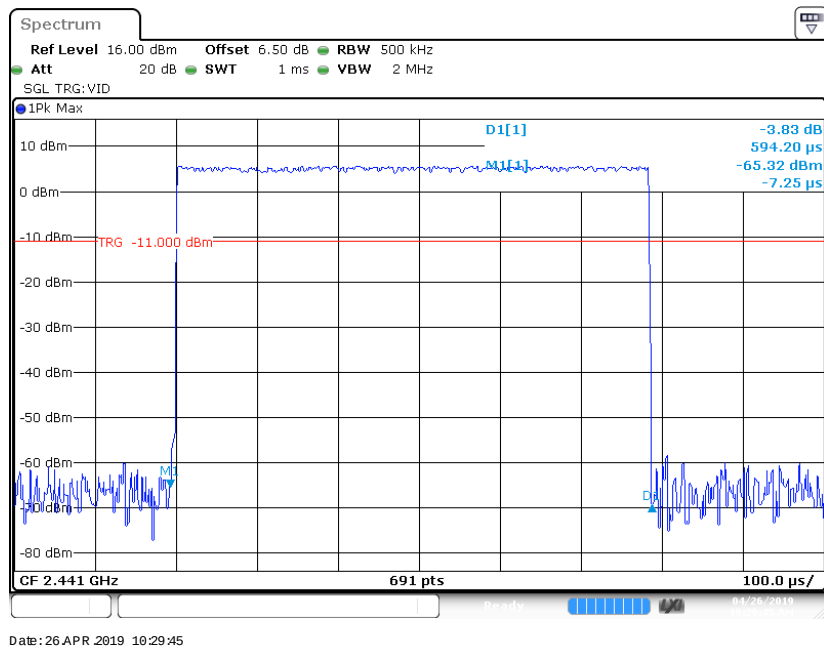


### BDR (GFSK): Pulse time, High Channel, DH1

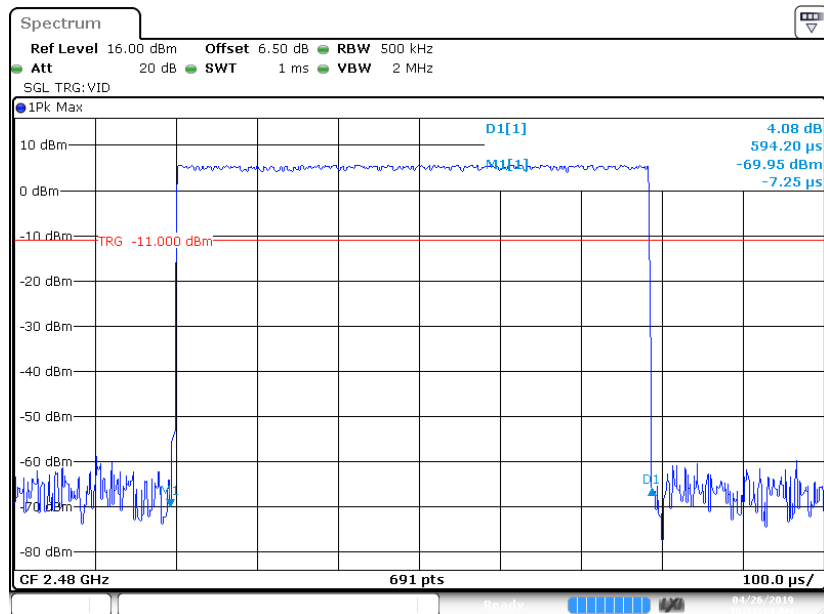

Date: 26 APR 2019 10:31:14


### BDR (GFSK): Pulse time, Low Channel, DH3

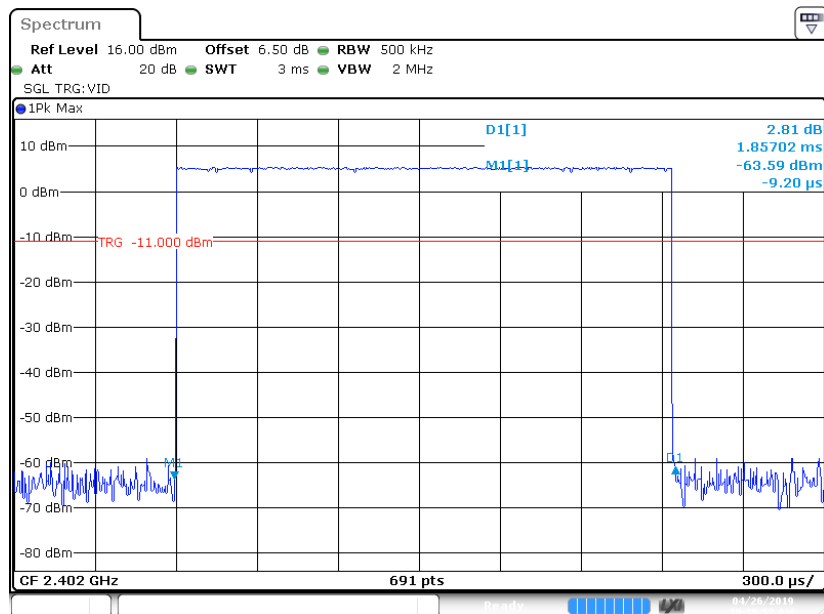

Date: 26 APR 2019 10:39:53




### BDR (GFSK): Pulse time, Middle Channel, DH3

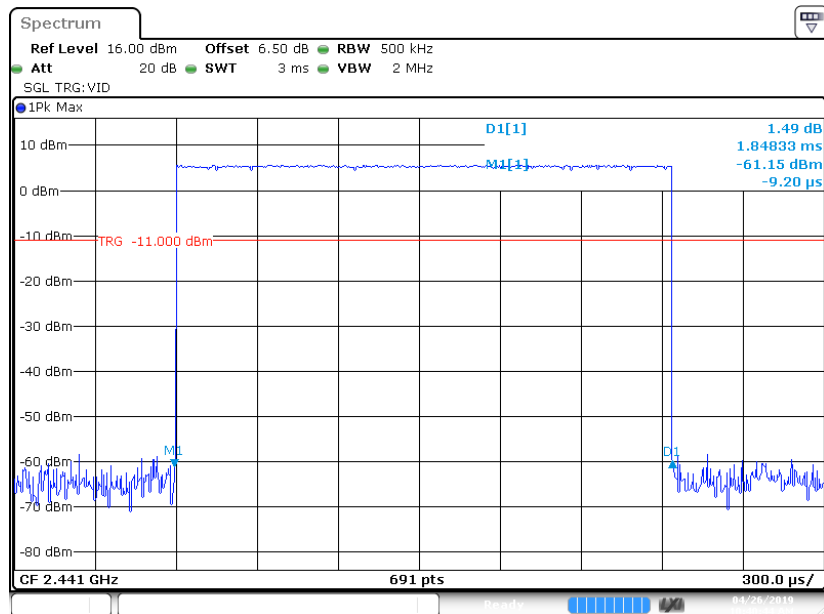


Date: 26 APR 2019 10:40:45

### BDR (GFSK): Pulse time, High Channel, DH3

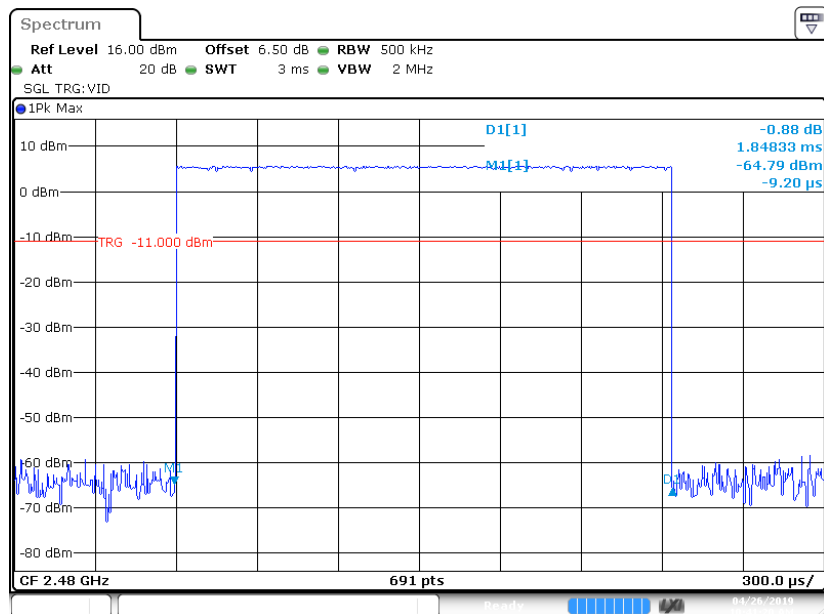


Date: 26 APR 2019 10:41:19

### BDR (GFSK): Pulse time, Low Channel, DH5

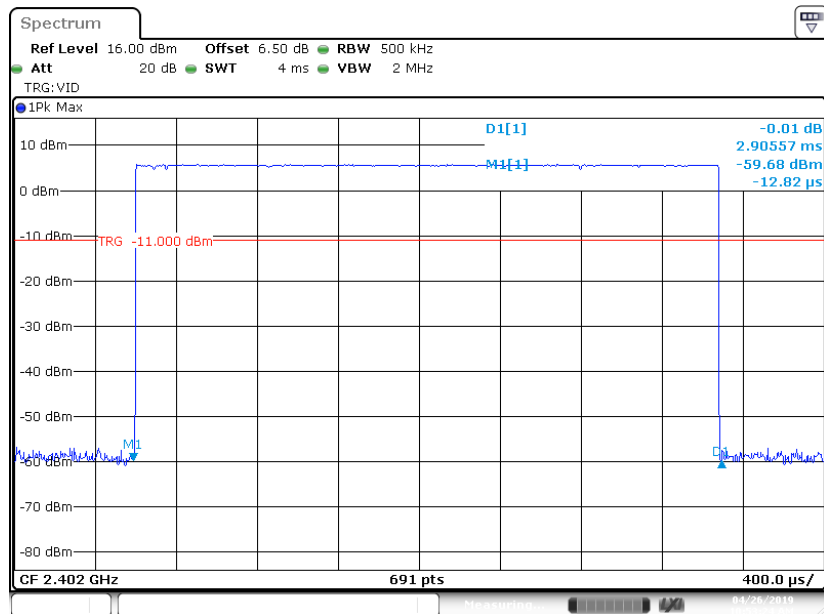


Date: 26 APR 2019 10:53:24


### BDR (GFSK): Pulse time, Middle Channel, DH5

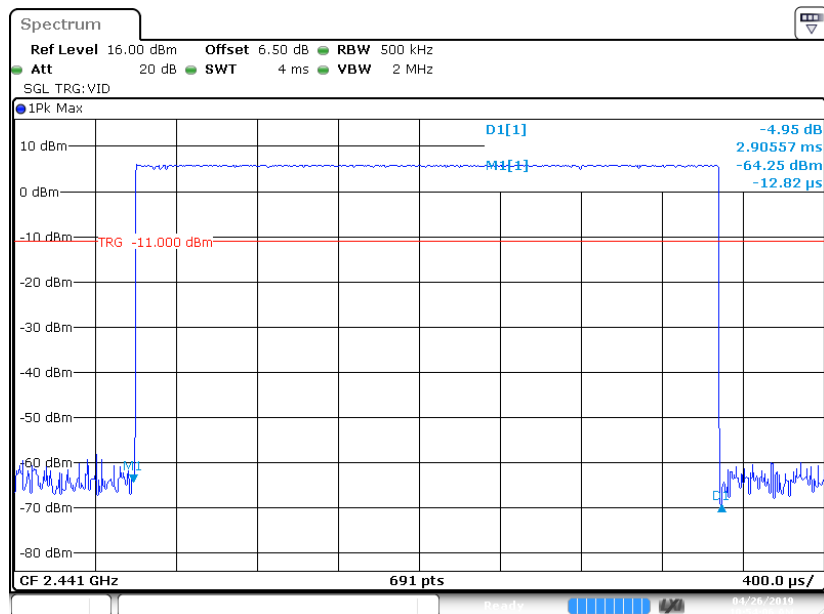

Date: 26 APR 2019 10:54:06

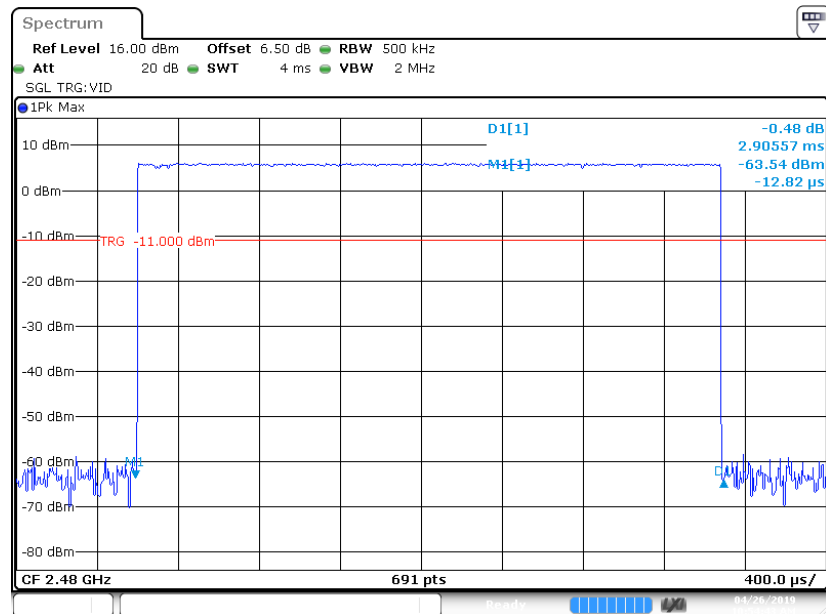
**BDR (GFSK): Pulse time, High Channel, DH5**

Date: 26 APR 2019 10:54:42

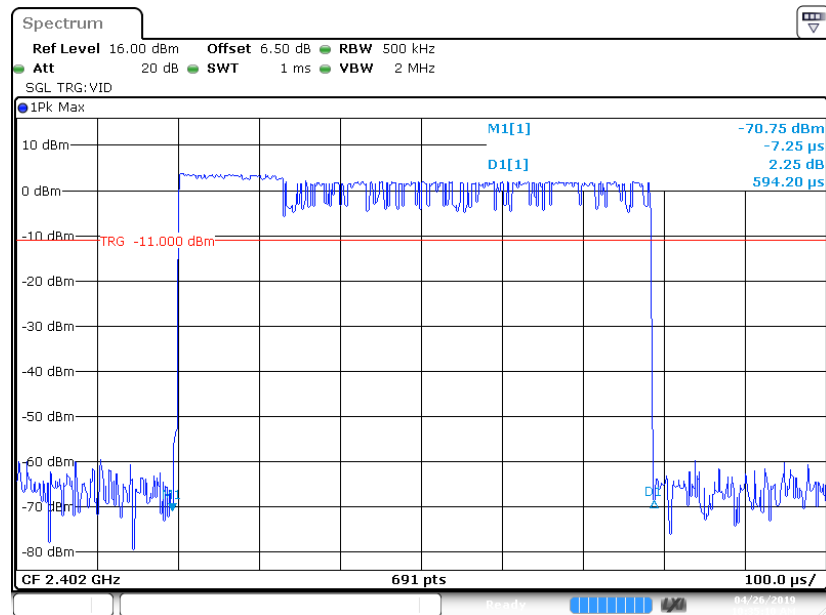**EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1**


Date: 26 APR 2019 10:35:10

### EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH1

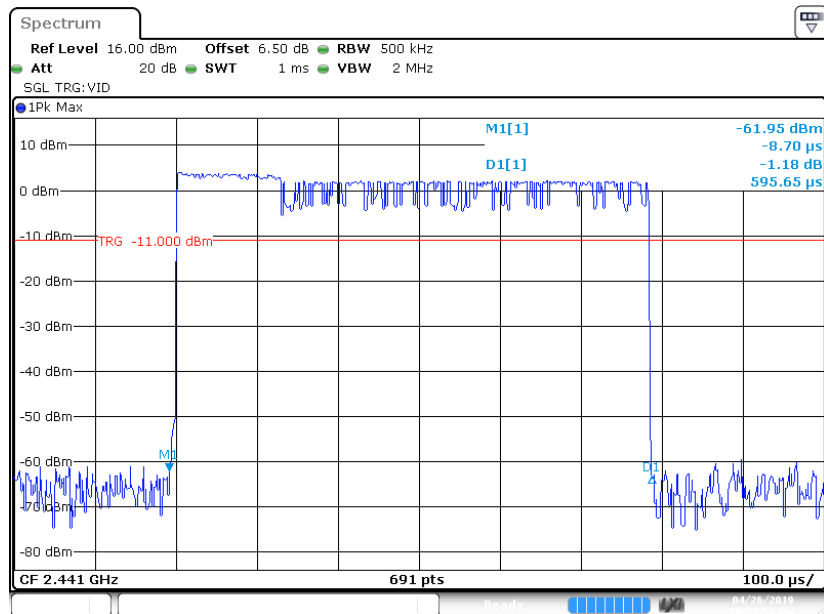


Date: 26 APR 2019 10:33:52

### EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH1

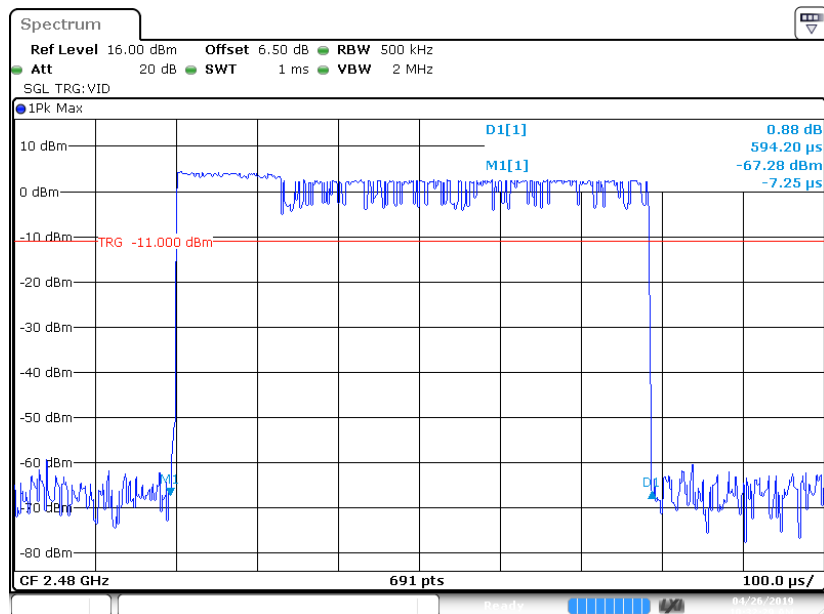


Date: 26 APR 2019 10:32:29


### EDR ( $\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3

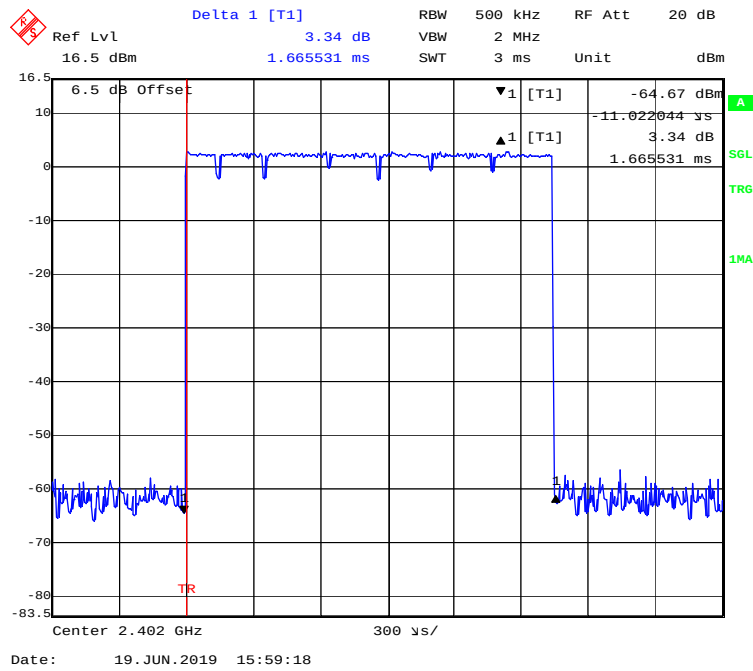


### EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3

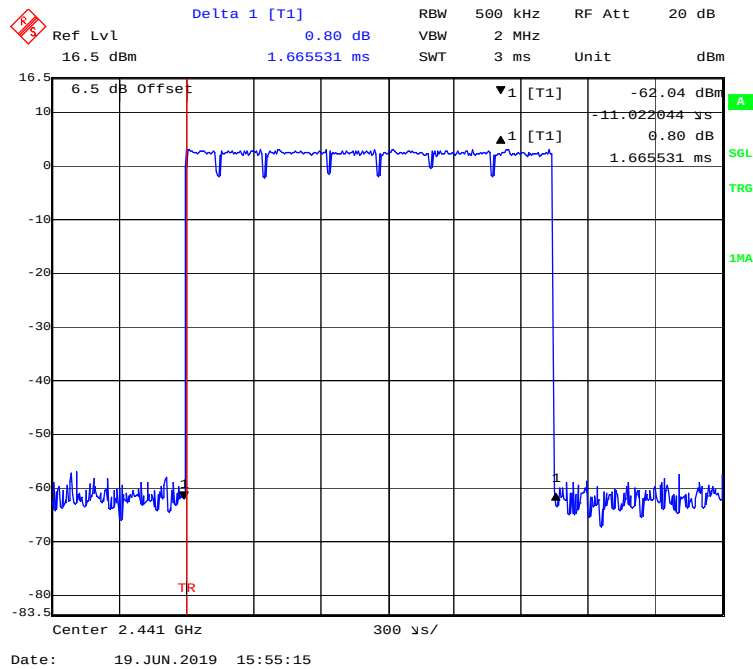


### EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3

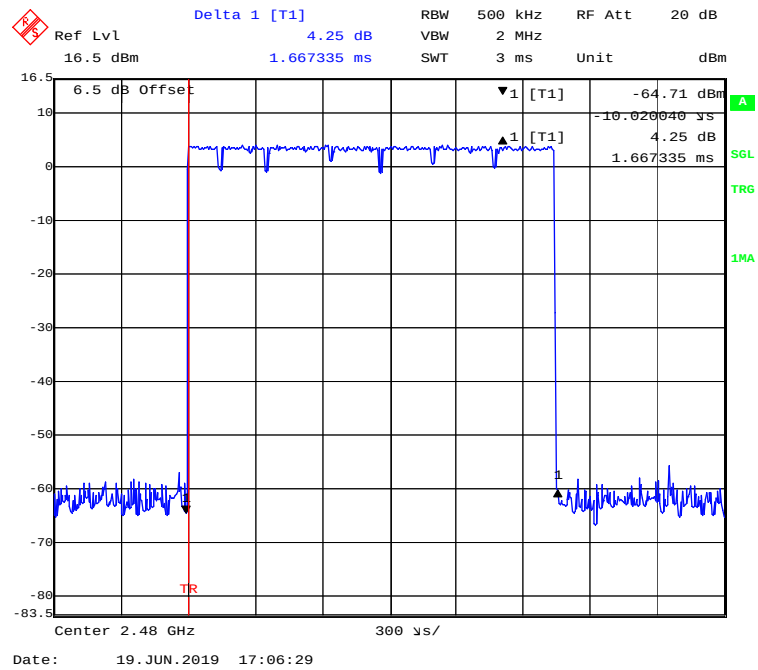


### EDR ( $\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5

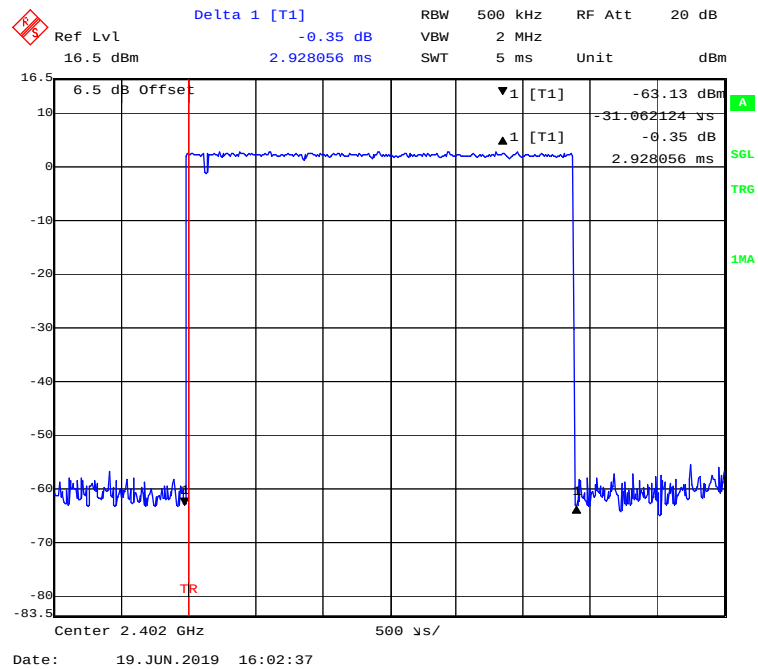


### EDR ( $\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5

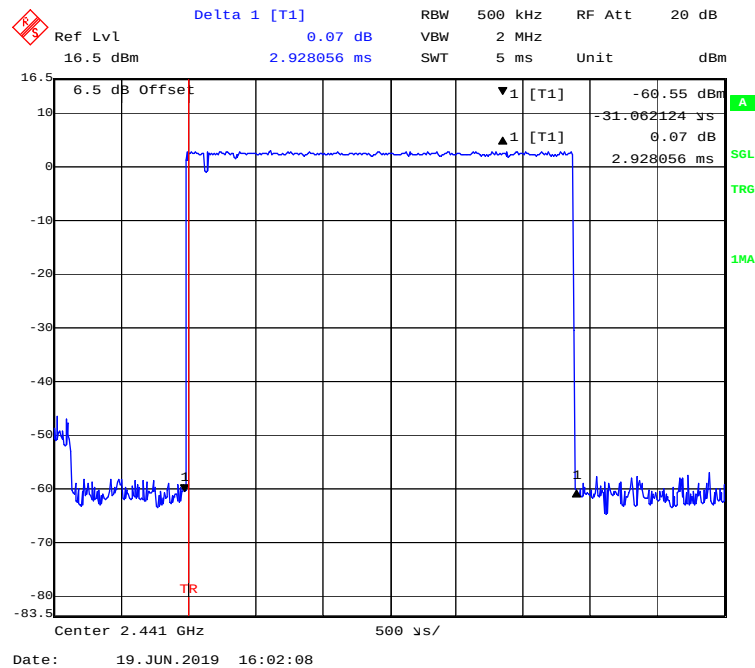

### EDR ( $\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5

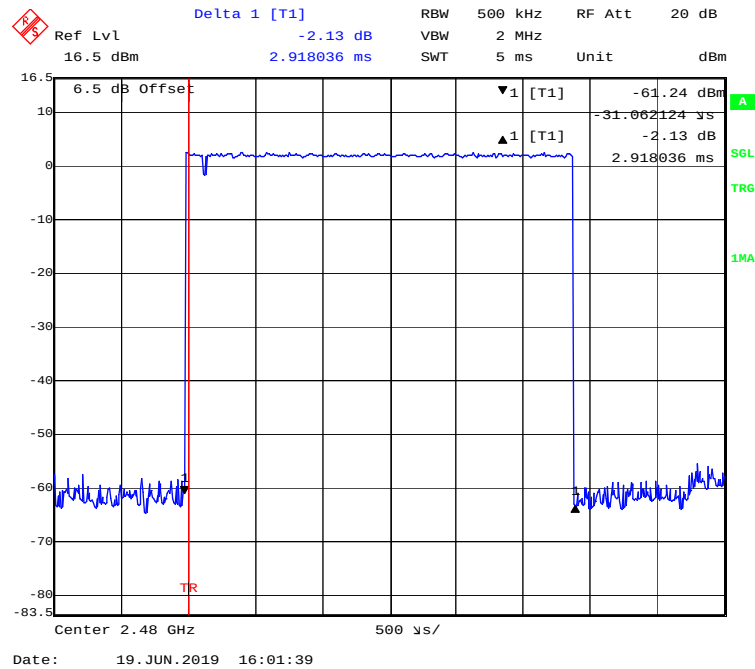


### EDR (8DPSK): Pulse time, Low Channel, 3DH1

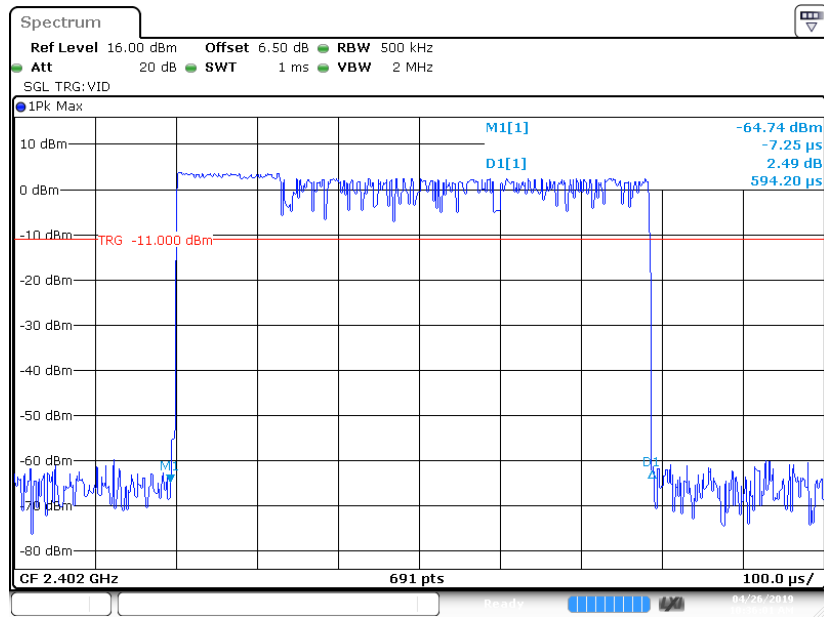


Date: 26 APR 2019 10:36:01

### EDR (8DPSK): Pulse time, Middle Channel, 3DH1

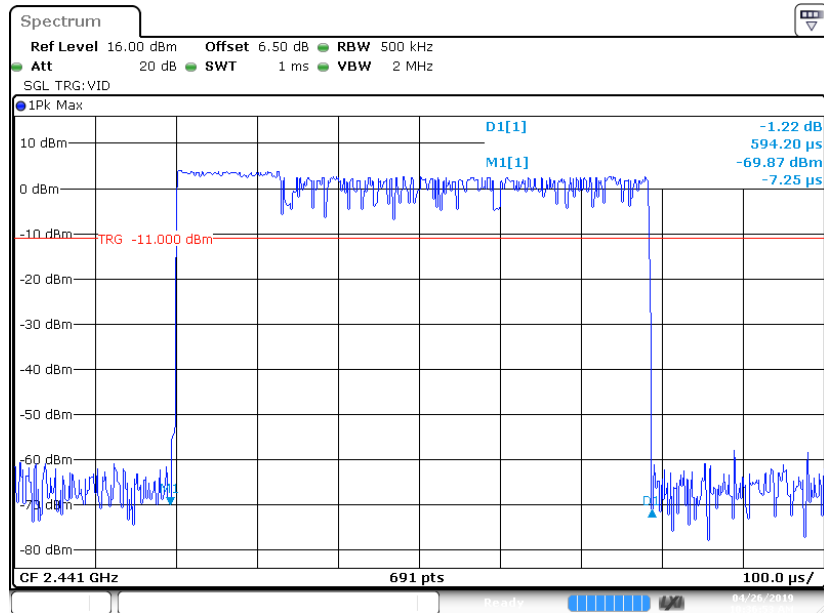


Date: 26 APR 2019 10:36:53

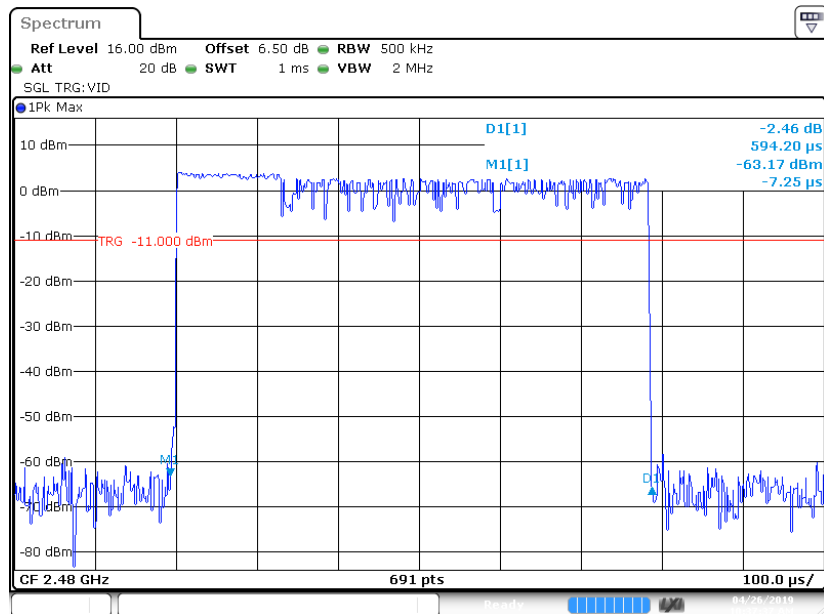


**EDR (8DPSK): Pulse time, High Channel, 3DH1**

Date: 26 APR 2019 10:37:38

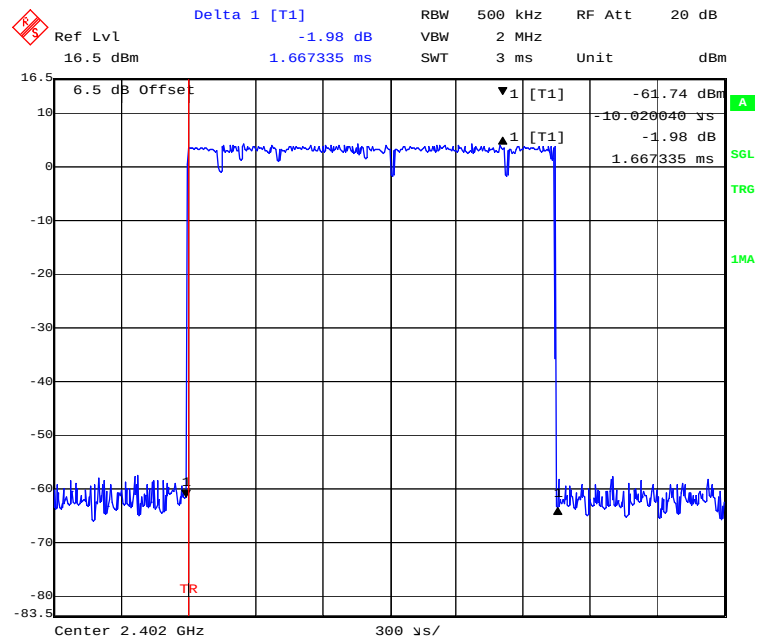
**EDR (8DPSK): Pulse time, Low Channel, 3DH3**

Date: 19 JUN 2019 16:07:27


### EDR (8DPSK): Pulse time, Middle Channel, 3DH3

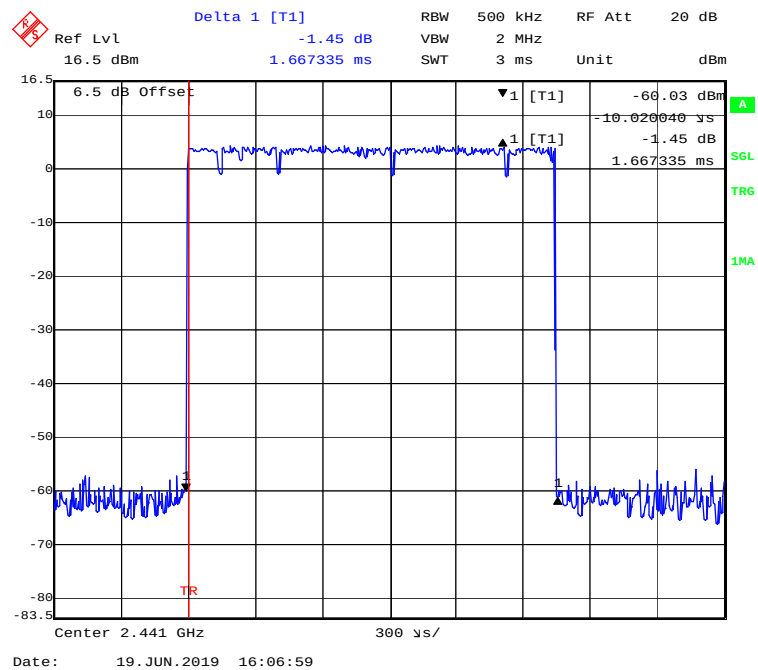


### EDR (8DPSK): Pulse time, High Channel, 3DH3

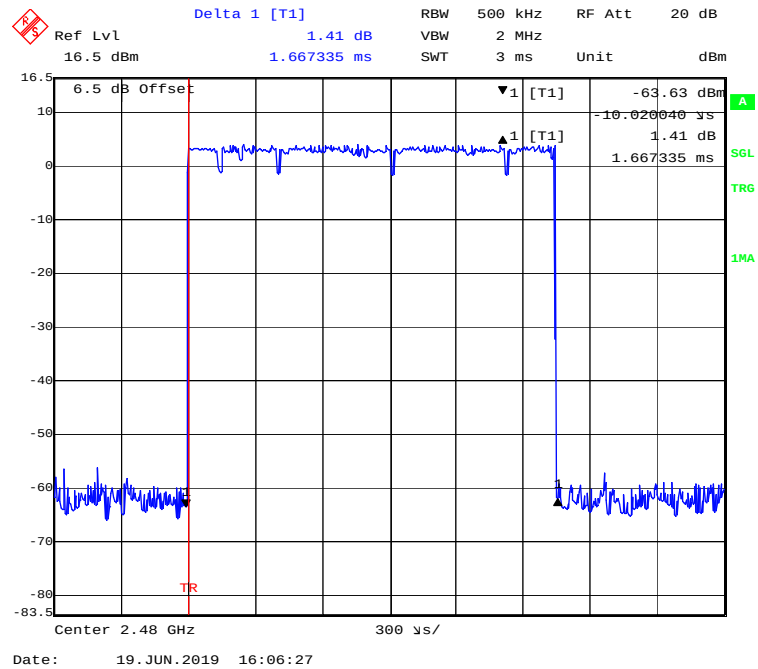

### EDR (8DPSK): Pulse time, Low Channel, 3DH5

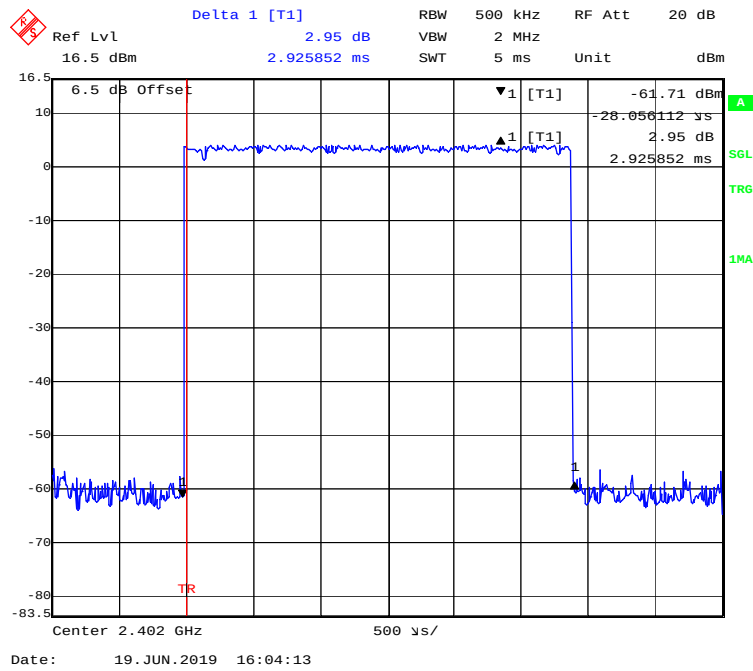

### EDR (8DPSK): Pulse time, Middle Channel, 3DH5

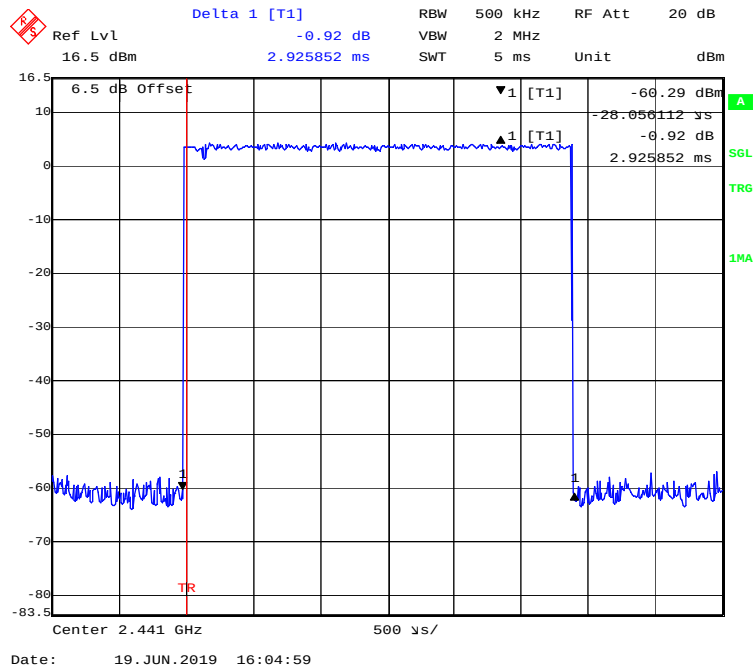

Delta 1 [T1]  
 -0.71 dB  
 2.925852 ms

RBW 500 kHz  
 VBW 2 MHz  
 SWT 5 ms

Ref Lvl 16.5 dBm  
 RF Att 20 dB  
 Unit dBm

6.5 dB Offset  
 -61.87 dBm  
 -28.056112 μs  
 -0.71 dB  
 2.925852 ms

Center 2.48 GHz  
 500 μs/

Date: 19. JUN. 2019 16:05:23

## **FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**

### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### **Test Procedure**

- a. Use the following spectrum analyzer settings:
  - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW  $\geq$  RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

### **Test Data**

#### **Environmental Conditions**

|                           |                     |
|---------------------------|---------------------|
| <b>Temperature:</b>       | 23.1 °C~25 °C       |
| <b>Relative Humidity:</b> | 50.1 %~51.3 %       |
| <b>ATM Pressure:</b>      | 101.2 kPa~102.3 kPa |


*The testing was performed by Hope Zhang from 2019-04-25 to 2019-05-20.*

*EUT operation mode: Transmitting*


*Test Result: Compliant.*



| Mode                                      | Frequency<br>(MHz) | Output Power |      | Limit<br>(mW) |
|-------------------------------------------|--------------------|--------------|------|---------------|
|                                           |                    | (dBm)        | (mW) |               |
| <b>BDR<br/>(GFSK)</b>                     | 2402               | 4.97         | 3.14 | 125           |
|                                           | 2441               | 4.99         | 3.16 | 125           |
|                                           | 2480               | 5.41         | 3.48 | 125           |
| <b>EDR<br/>(<math>\pi/4</math>-DQPSK)</b> | 2402               | 4.52         | 2.83 | 125           |
|                                           | 2441               | 4.68         | 2.94 | 125           |
|                                           | 2480               | 4.49         | 2.81 | 125           |
| <b>EDR<br/>(8DPSK)</b>                    | 2402               | 4.50         | 2.82 | 125           |
|                                           | 2441               | 4.87         | 3.07 | 125           |
|                                           | 2480               | 4.88         | 3.08 | 125           |

### BDR (GFSK): 2402MHz

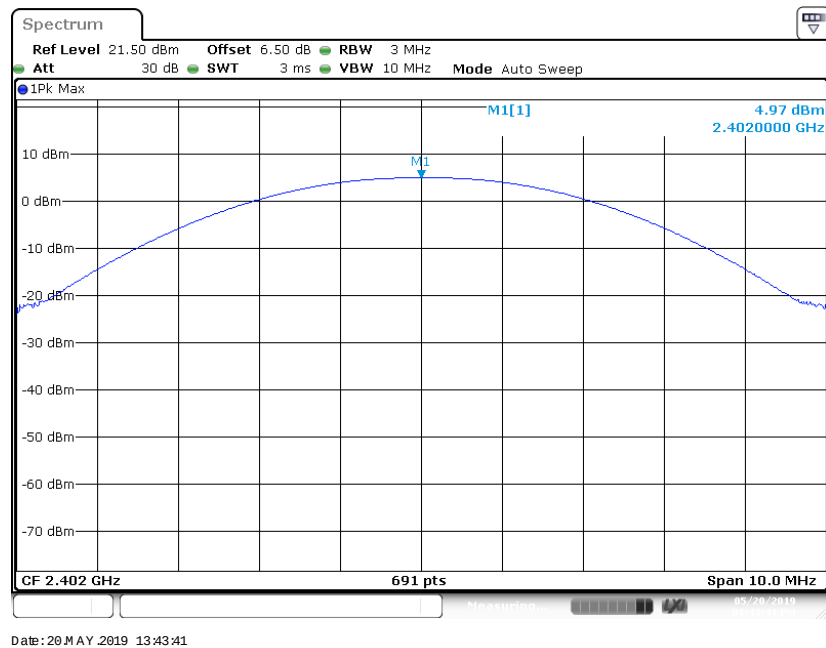


### BDR (GFSK): 2441MHz

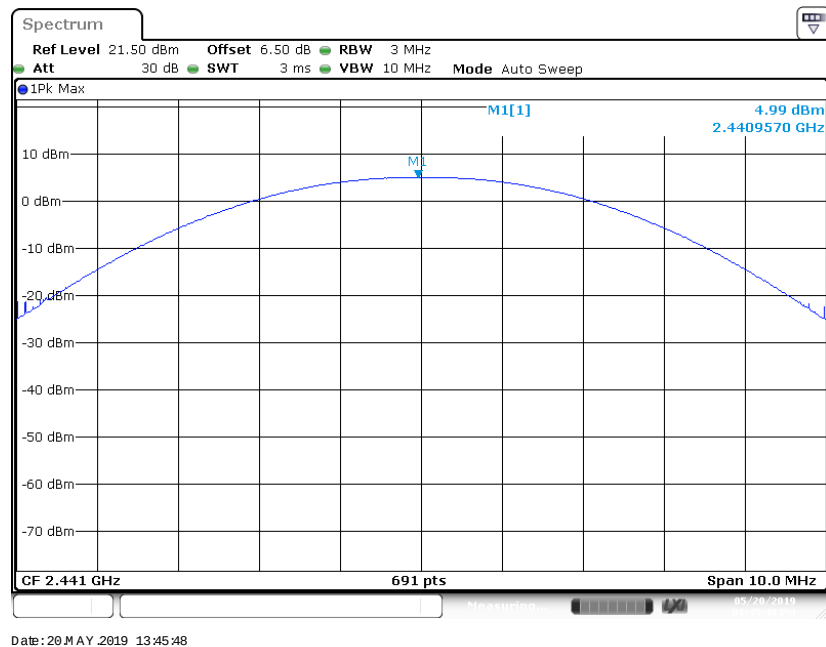

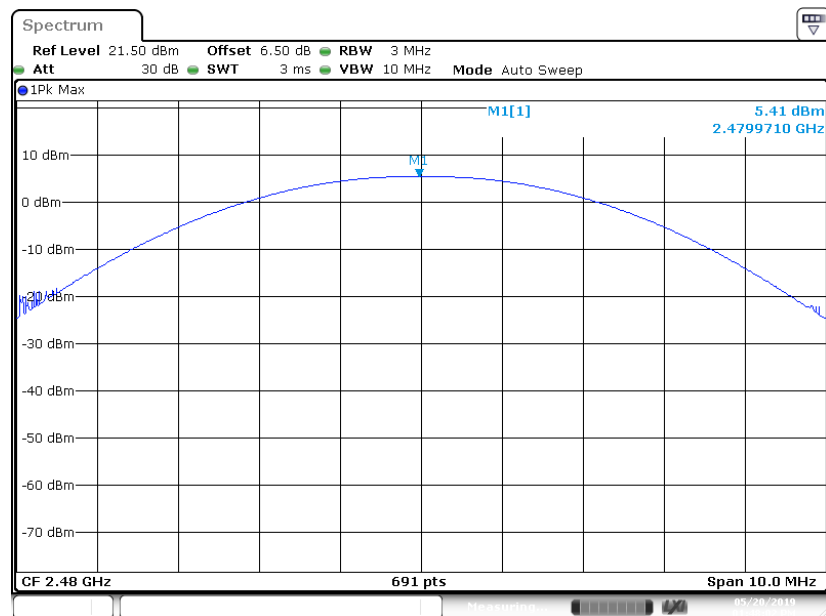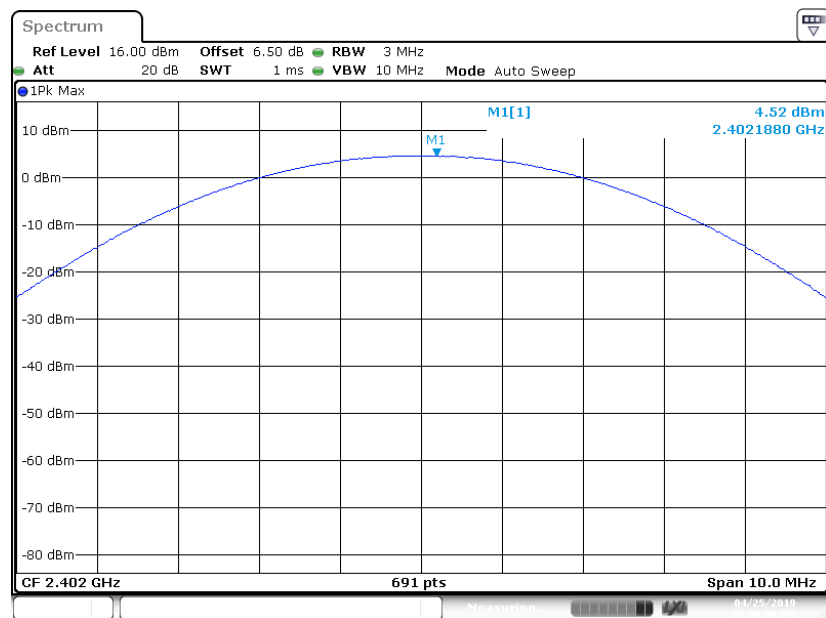
**BDR (GFSK): 2480MHz****EDR( $\pi/4$ -DQPSK): 2402MHz**




**EDR( $\pi/4$ -DQPSK): 2441MHz**

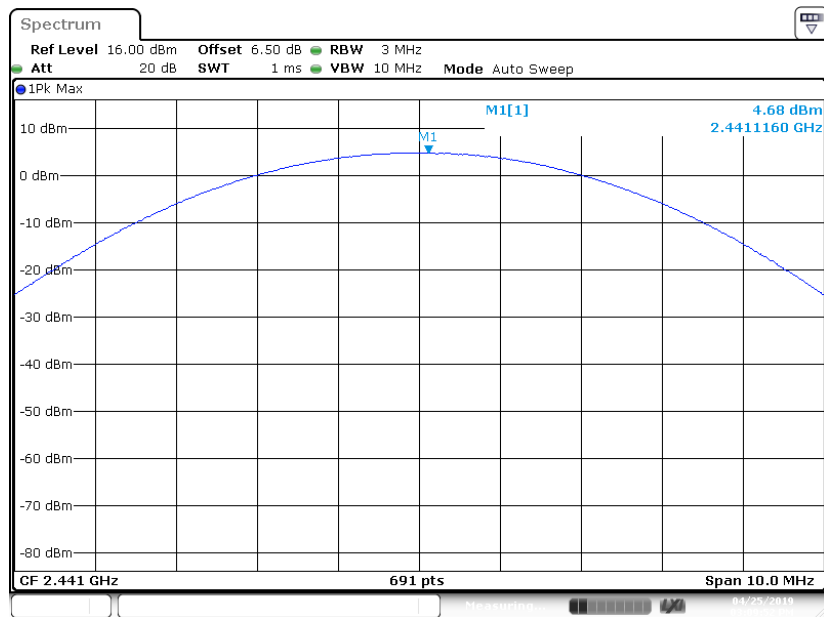


**EDR( $\pi/4$ -DQPSK): 2480MHz**

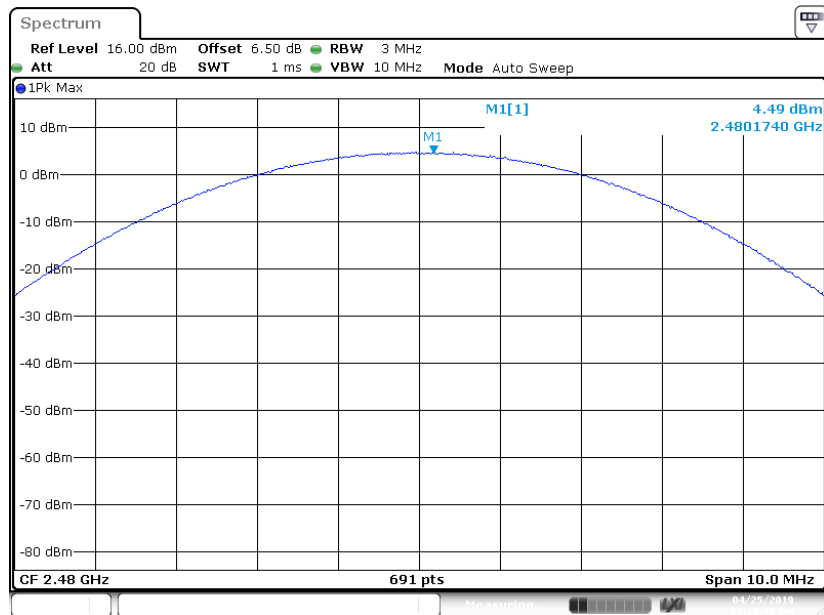


### EDR(8DPSK): 2402MHz

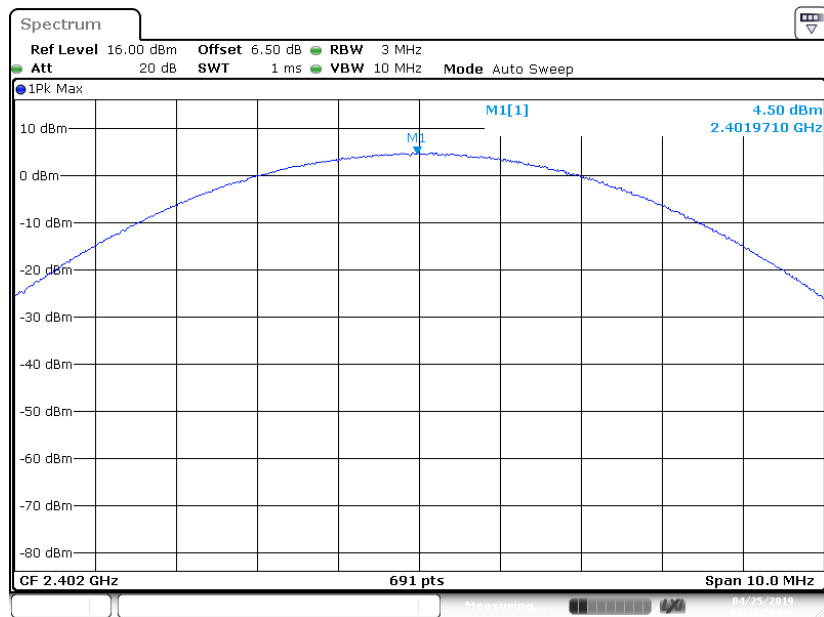

### EDR(8DPSK): 2441MHz

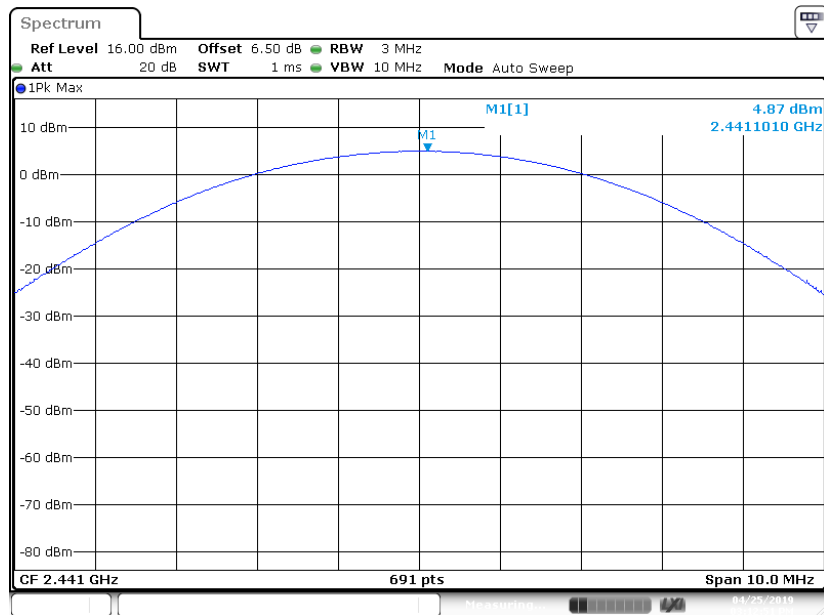

**EDR(8DPSK): 2480MHz**

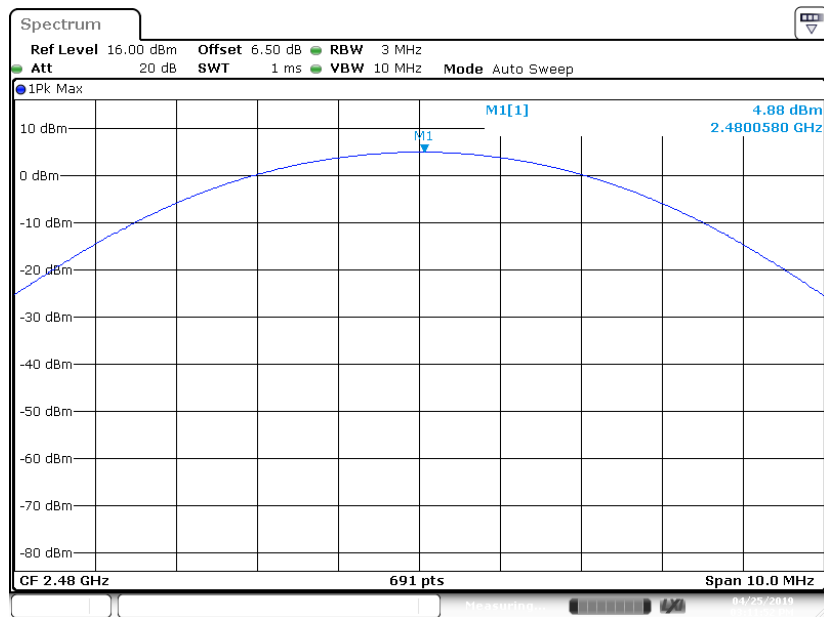

Date: 25 APR 2019 15:11:52

## **FCC §15.247(d) - BAND EDGES TESTING**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**


#### **Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.2 °C   |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 101.3 kPa |


*The testing was performed by Hope Zhang on 2019-04-25.*

*EUT operation mode: Transmitting & Hopping*

*Test Result: Compliant.*

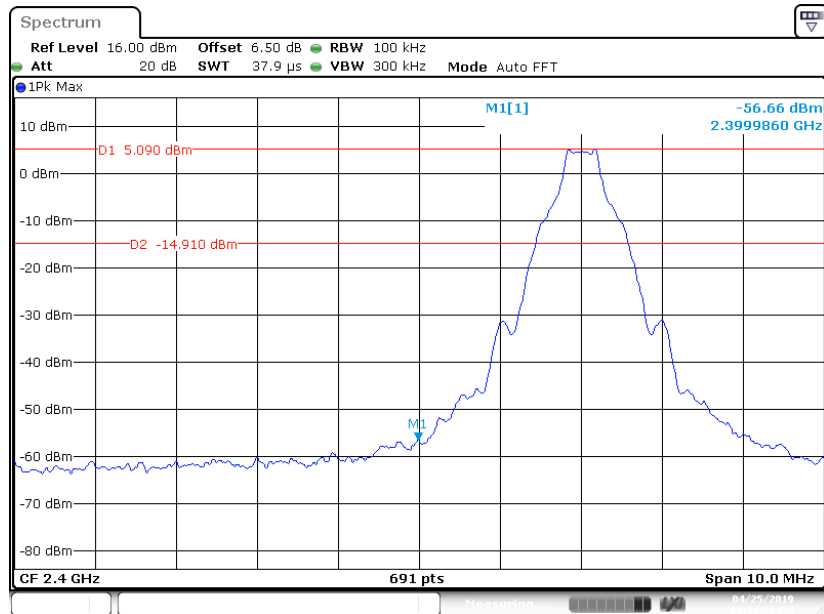
**Band Edge****BDR (GFSK): Left Side - Transmitting**

Date: 25 APR 2019 16:14:56

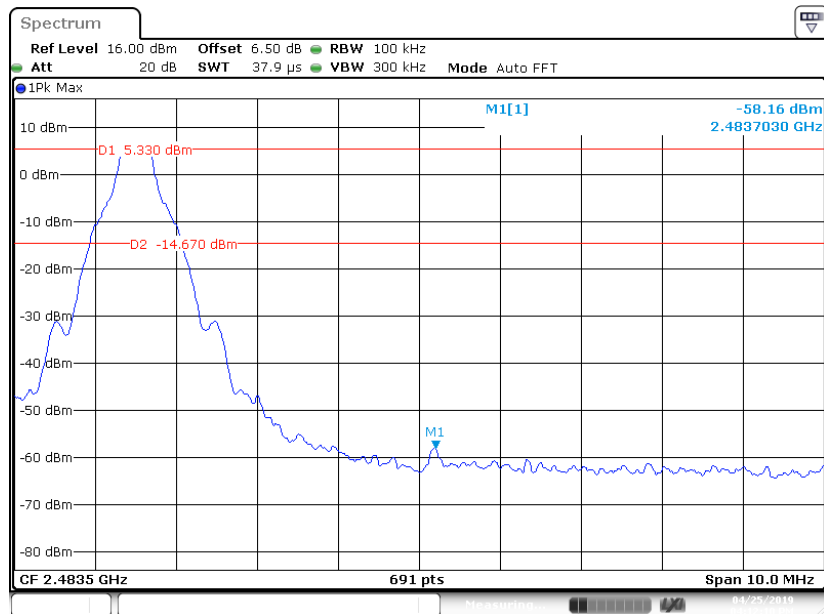
**BDR (GFSK): Right Side - Transmitting**

Date: 25 APR 2019 16:12:10


### EDR ( $\pi/4$ -DQPSK): Left Side - Transmitting

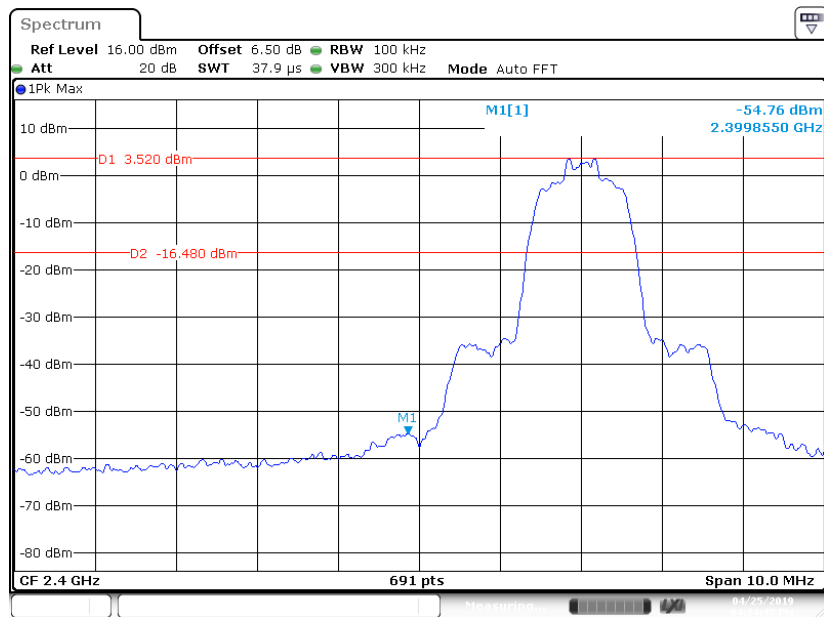


### EDR ( $\pi/4$ -DQPSK): Right Side - Transmitting

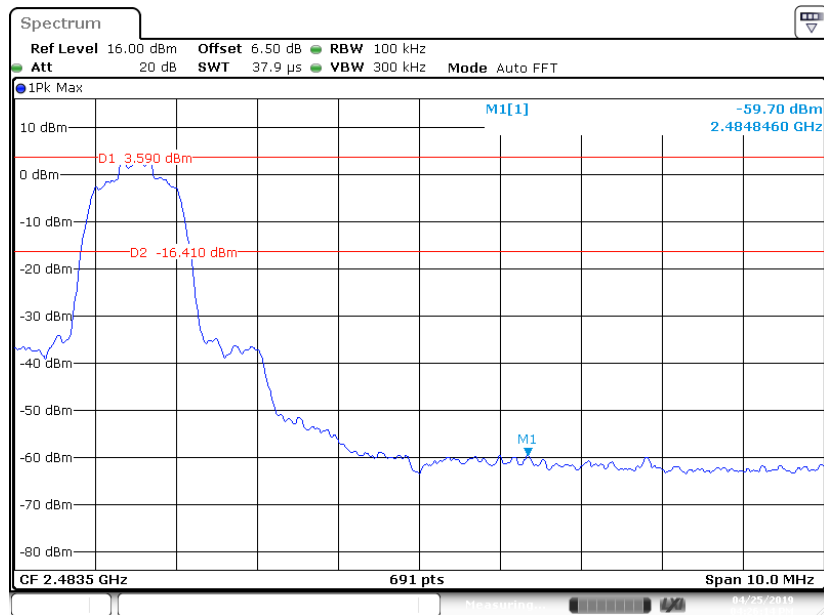


### EDR (8DPSK): Left Side - Transmitting

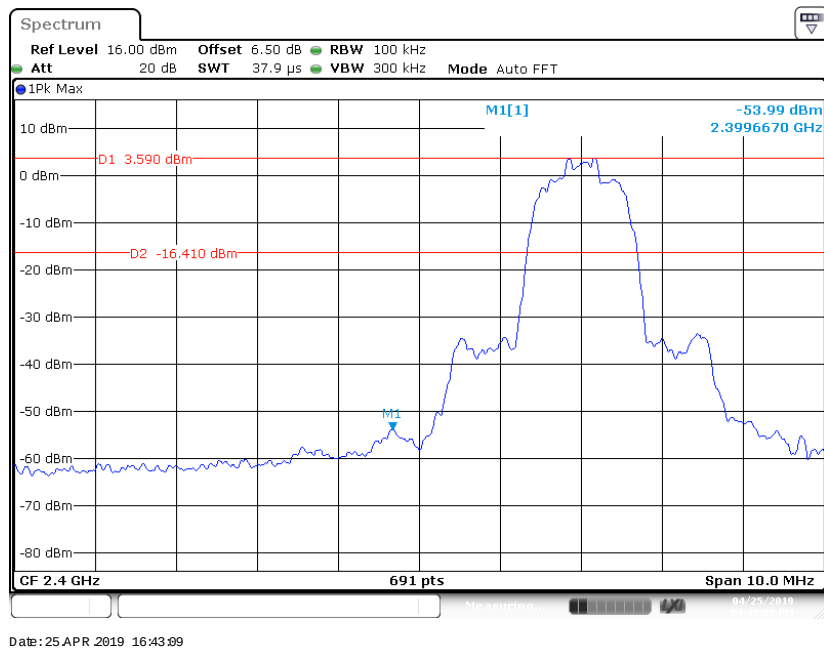


### EDR (8DPSK): Right Side - Transmitting

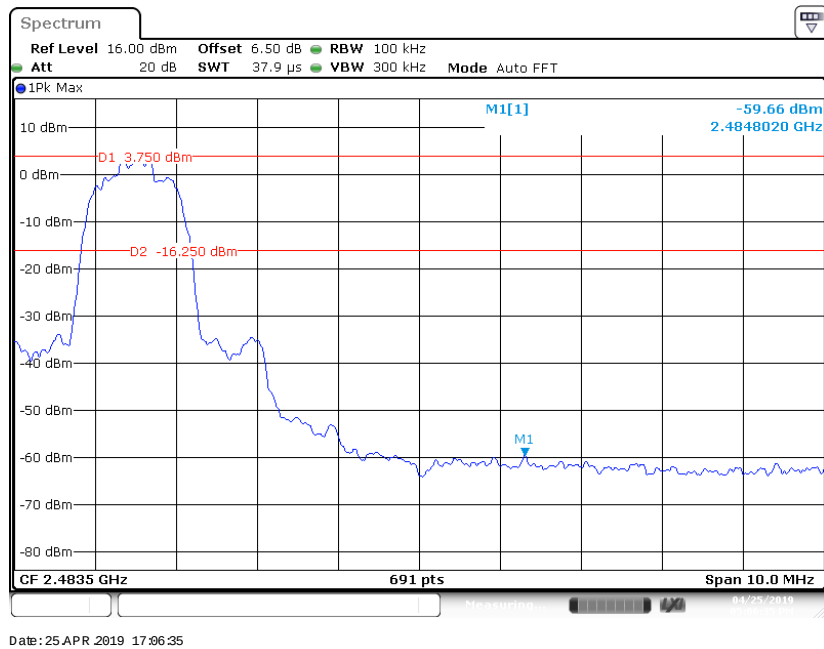



### BDR (GFSK): Left Side - Hopping

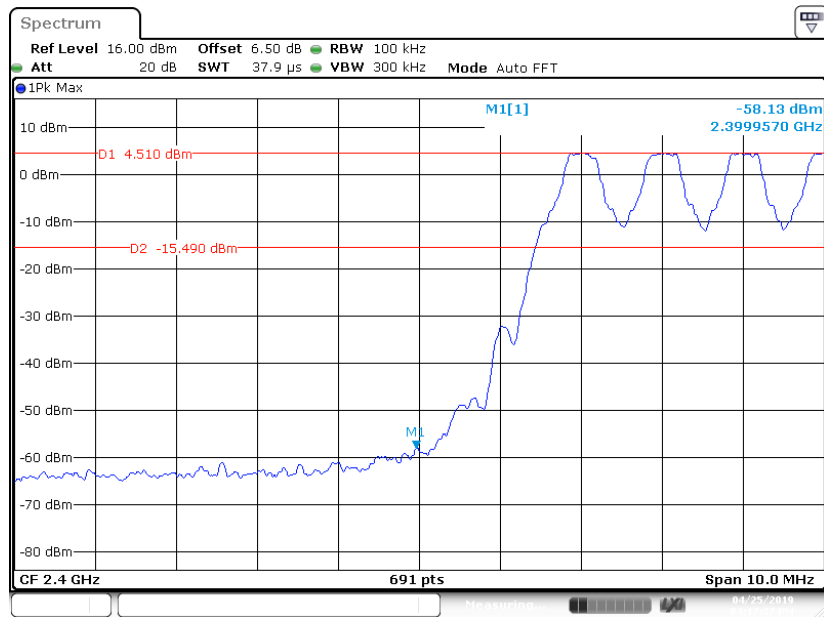


### BDR (GFSK): Right Side- Hopping

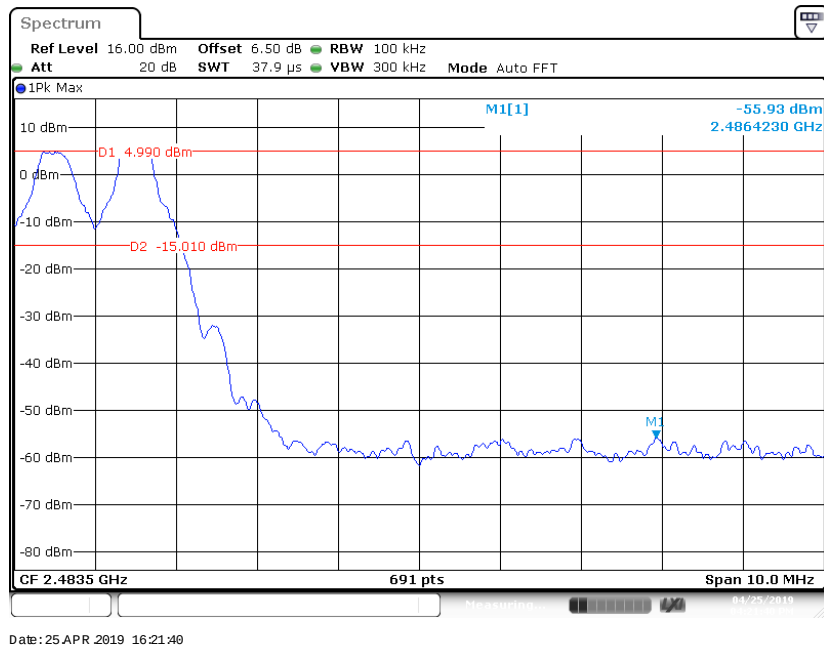

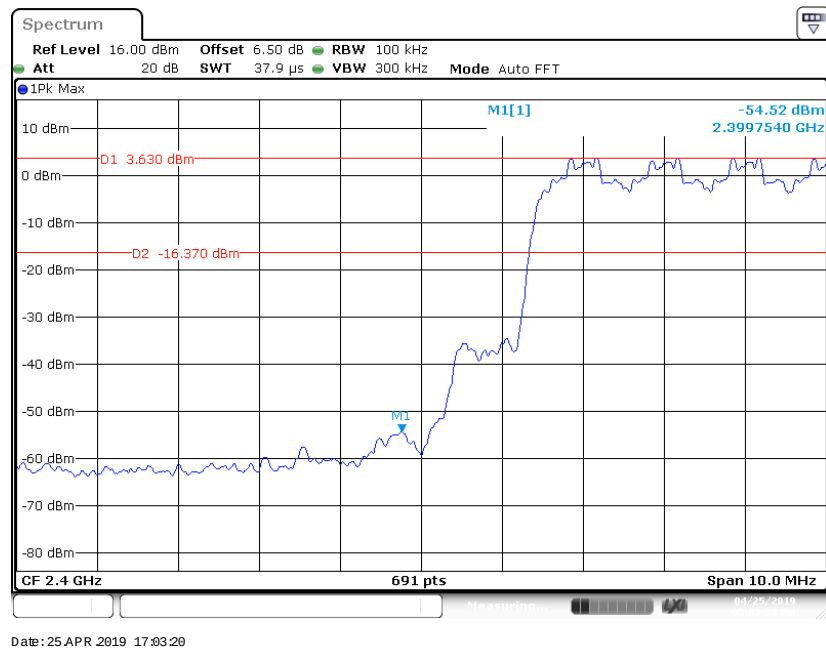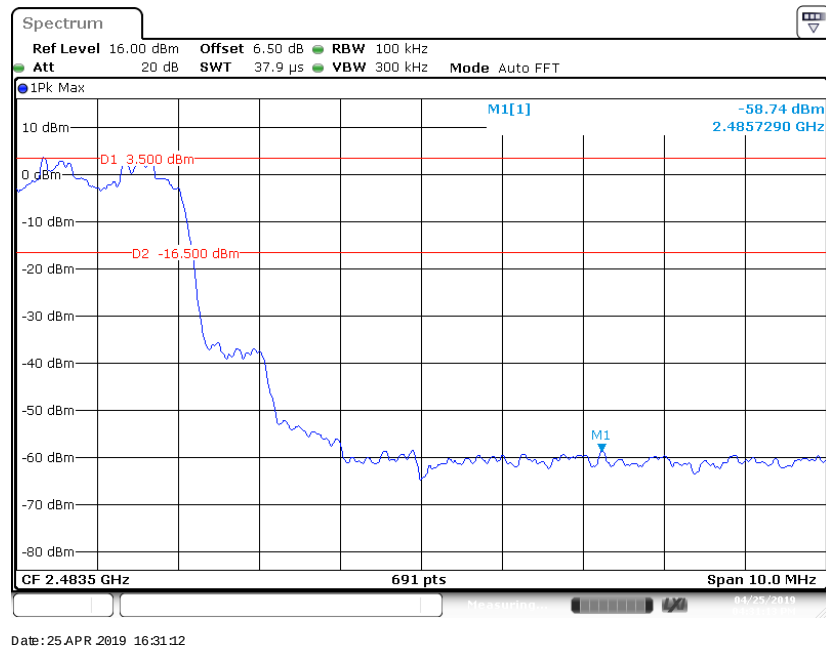


**EDR ( $\pi/4$ -DQPSK): Left Side- Hopping****EDR ( $\pi/4$ -DQPSK): Right Side- Hopping**

### EDR (8DPSK): Left Side- Hopping

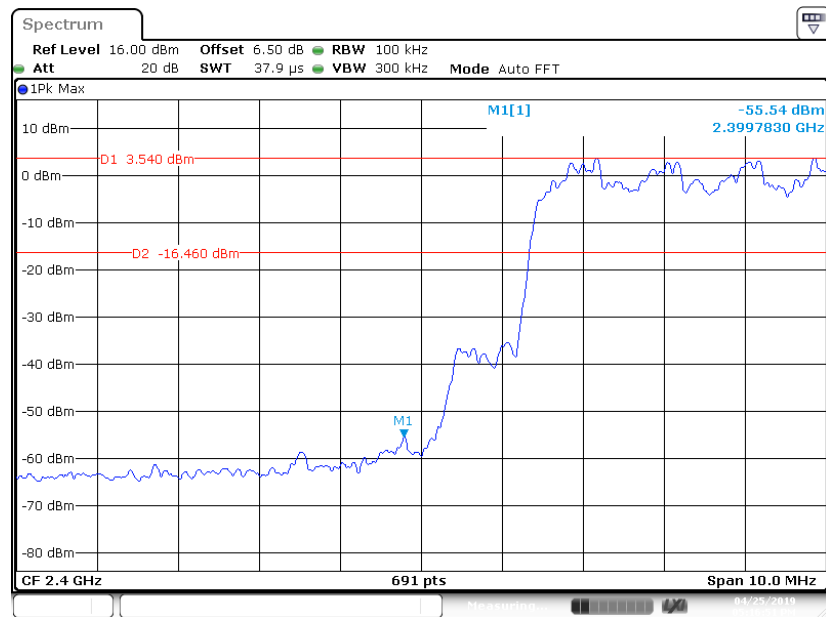

Date: 25 APR 2019 17:16:52

### EDR (8DPSK): Right Side- Hopping

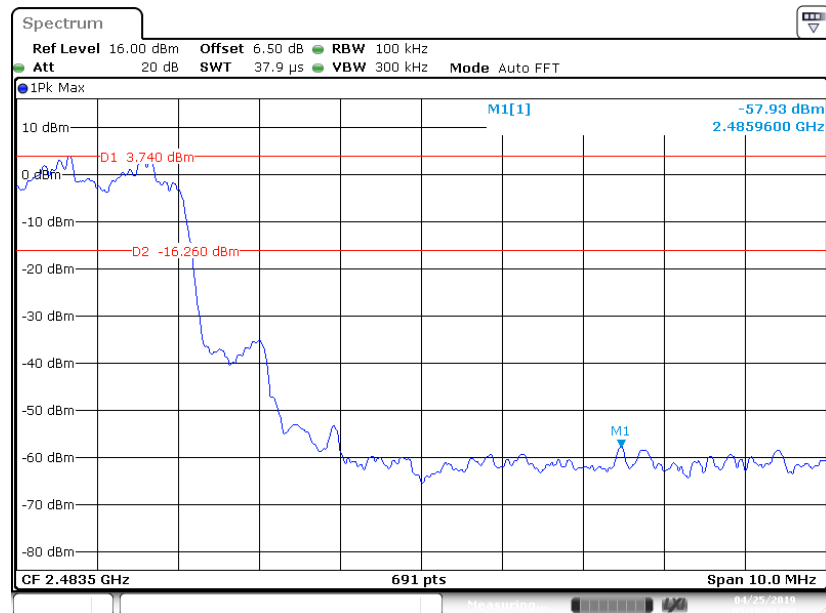

Date: 25 APR 2019 17:10:31

\*\*\*\*\* END OF REPORT \*\*\*\*\*