

Report on the Radio Testing

For

Robert Bosch Manufacturing Solutions GmbH

on

Sense S

Report no. TRA-038556-47-00C

20 June 2018

RF915 5.0

Report Number: TRA-038556-47-00C
Issue: C

REPORT ON THE RADIO TESTING OF A
Robert Bosch Manufacturing Solutions GmbH
Sense S
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15.247

TEST DATE: 2018-04-17

Written by: Steven Garwell, Daniel
Moncayola
Radio Test Engineer

Approved by: John Charters
Date: 20 June 2018
Department Manager - Radio

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF915 5.0

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	20 April 2018	Original
B	5 May 2018	Duty cycle updated.
C	20 June 2018	Adding bandedge plot

2 Summary

TEST REPORT NUMBER: TRA-038556-47-00C

WORKS ORDER NUMBER: TRA-038556-03

PURPOSE OF TEST: USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.

TEST SPECIFICATION(S): 47CFR15.247

EQUIPMENT UNDER TEST (EUT): Sense S

FCC IDENTIFIER: 2A0SY-SENSE01

EUT SERIAL NUMBER: Not Stated

MANUFACTURER/AGENT: Robert Bosch Manufacturing Solutions GmbH

ADDRESS: Leitzstrasse 47
Stuttgart-Feuerbach
70469
Germany

CLIENT CONTACT: Peter Bahm
☎ +49 152 09224457
✉ Peter.Bahm@de.bosch.com

ORDER NUMBER: 71283938/114

TEST DATE: 2018-04-17

TESTED BY: Steven Garwell, Daniel Moncayola
Element

2.1 Test Summary

Test Method and Description		Requirement Clause	Applicable to this equipment	Result / Note
		47CFR15		
Radiated spurious emissions (restricted bands of operation and cabinet radiation)		15.205	<input checked="" type="checkbox"/>	Pass
AC power line conducted emissions		15.207	<input type="checkbox"/>	Note 1
Occupied bandwidth		15.247(a)(2)	<input checked="" type="checkbox"/>	Pass
Conducted carrier power	Peak	15.247(b)(3)	<input checked="" type="checkbox"/>	Pass
	Max.		<input type="checkbox"/>	
Conducted / radiated RF power out-of-band		15.247(d)	<input checked="" type="checkbox"/>	Pass
Power spectral density, conducted		15.247(e)	<input checked="" type="checkbox"/>	Pass
Calculation of duty correction		15.35(c)	<input checked="" type="checkbox"/>	Pass

Notes:

Note 1: Not applicable, stand-alone battery powered device only.

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record.....	3
2	Summary.....	4
2.1	Test Summary.....	5
3	Contents.....	6
4	Introduction	8
5	Test Specifications	9
5.1	Normative References	9
5.2	Deviations from Test Standards	9
6	Glossary of Terms.....	10
7	Equipment Under Test	11
7.1	EUT Identification	11
7.2	System Equipment	11
7.3	EUT Mode of Operation	11
7.3.1	Transmission.....	11
7.4	EUT Radio Parameters	12
7.4.1	General	12
7.4.2	Antennas	12
7.5	EUT Description	13
8	Modifications	14
9	EUT Test Setup.....	14
9.1	Block Diagram.....	14
9.2	General Set-up Photograph	15
10	General Technical Parameters.....	16
10.1	Normal Conditions.....	16
10.2	Varying Test Conditions	16
11	Radiated emissions.....	17
11.1	Definitions	17
11.2	Test Parameters.....	17
11.3	Test Limit	17
11.4	Test Method	18
11.5	Test Set-up Photograph	19
11.6	Test Equipment.....	19
11.7	Test Results	20
12	Occupied Bandwidth	23
12.1	Definition	23
12.2	Test Parameters.....	23
12.3	Test Limit	24
12.4	Test Method	24
12.5	Test Equipment.....	24
12.6	Test Results	25
13	Maximum peak conducted output power.....	28
13.1	Definition	28
13.2	Test Parameters.....	28
13.3	Test Limit	28
13.4	Test Method	29
13.5	Test Equipment.....	29
13.6	Test Results	30
14	Out-of-band and conducted spurious emissions	33
14.1	Definition	33
14.2	Test Parameters.....	33
14.3	Test Limit	33
14.4	Test Method	34
14.5	Test Equipment.....	34
14.6	Test Results	35
15	Power spectral density	41
15.1	Definition	41
15.2	Test Parameters.....	41
15.3	Test Limit	41
15.4	Test Method	42
15.5	Test Equipment.....	42
15.6	Test Results	43
16	Duty Cycle.....	46
16.1	Definition	46

16.2	Test Parameters.....	46
16.3	Test Limit	46
16.4	Test Method	47
16.5	Test Equipment.....	47
16.6	Test Results	48
17	Measurement Uncertainty	51

4 Introduction

This report TRA-038556-47-00C presents the results of the Radio testing on a Robert Bosch Manufacturing Solutions GmbH, Sense S to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Robert Bosch Manufacturing Solutions GmbH by Element, at the address detailed below.

<input type="checkbox"/> Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	<input checked="" type="checkbox"/> Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

IC Registration Number(s):

Element Hull	3483A
Element North West	3930B

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 *Normative References*

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

5.2 *Deviations from Test Standards*

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment Under Test

7.1 EUT Identification

- Name: Sense S
- Serial Number: Not Stated
- Model Number: Sense S (3843.AU2.679)
- Software Revision: V1.0.0
- Build Level / Revision Number: Production

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

Programming board.

7.3 EUT Mode of Operation

7.3.1 Transmission

The mode of operation for Transmit tests was as follows:-

The device was programmable by customer supplied python scripts to allow continuous transmission on top, middle and bottom channels via NFC using the programming board.

7.4 EUT Radio Parameters

7.4.1 General

Frequency of operation:	2400 MHz – 2483.5 MHz
Modulation type(s):	GFSK
Occupied channel bandwidth(s):	1 MHz
Channel spacing:	2 MHz
ITU emission designator(s):	G1D
Declared output power(s):	6.1 dB
Warning against use of alternative antennas in user manual (yes/no):	Not Applicable
Nominal Supply Voltage:	3 V dc
Method of prevention of use on non-US / non-Canadian frequencies:	Label / user manual / both
Duty cycle:	61.5%

7.4.2 Antennas

Type:	Integral PCB
Frequency range:	2400 MHz – 2483.5 MHz
Impedance:	50 Ohm
Gain:	0
Polarisation:	Omni-Directional
Connector type:	Not Applicable

7.5 EUT Description

The EUT is a freight tracking device


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup

9.1 *Block Diagram*

The following diagram shows basic EUT interconnections:
The EUT is standalone device and is programmed via NFC interface, once programmed the interface is removed.

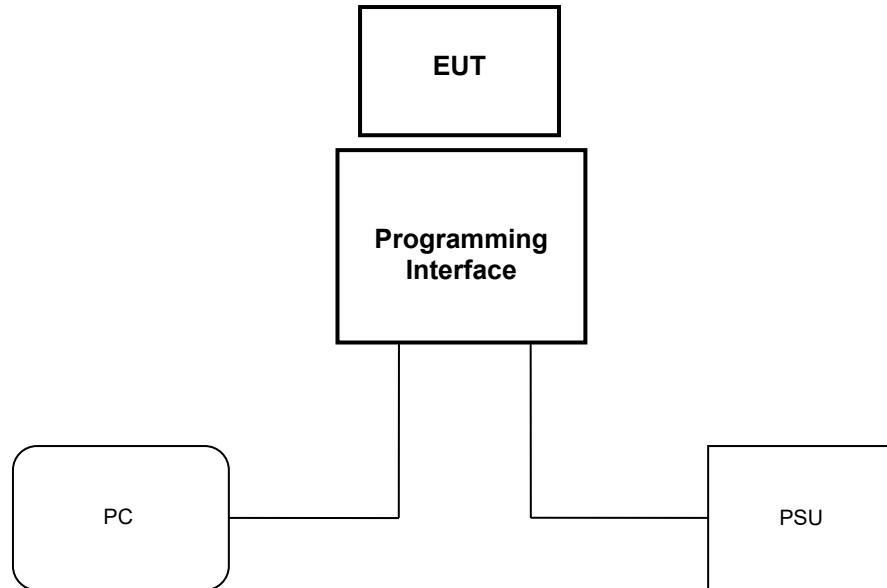

9.2 General Set-up Photograph

The following photograph shows basic EUT set-up:



10 General Technical Parameters

10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 3 V dc from battery.

10.2 Varying Test Conditions

There are no specific frequency stability requirements for the type of device. The results contained in this report demonstrate that the occupied bandwidth is contained within the authorised band and the manufacturer has declared sufficient frequency stability (refer to section 7.4).

Variation of supply voltage is required to ensure stability of the declared output power. During carrier power testing the following variations were made:

	Category	Nominal	Variation
<input type="checkbox"/>	Mains	110 V ac +/-2 %	85 % and 115 %
<input checked="" type="checkbox"/>	Power Supply	3 V dc	New Battery

11 Radiated emissions

11.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Restricted bands

A frequency band in which intentional radiators are permitted to radiate only spurious emissions but not fundamental signals.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 6.5 and 6.6
EUT Frequencies Measured:	2402 MHz, 2440 MHz, 2480 MHz
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 21 °C	+15 °C to +35 °C (as declared)
Humidity: 39 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	

11.3 Test Limit

Unwanted emissions that fall within the restricted frequency bands shall comply with the limits specified:

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

11.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure i, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB μ V/m at the regulatory distance, using:


$$FS = PR + CL + AF - PA + DC - CF$$

Where,


- PR is the power recorded on the receiver / spectrum analyzer in dB μ V;
- CL is the cable loss in dB;
- AF is the test antenna factor in dB/m;
- PA is the pre-amplifier gain in dB (where used);
- DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);
- CF is the distance factor in dB (where measurement distance different to limit distance);

This field strength value is then compared with the regulatory limit.

Figure i Test Setup

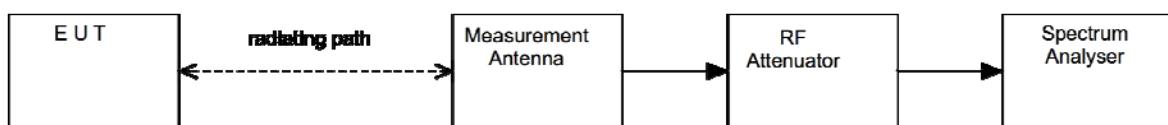

11.5 Test Set-up Photograph

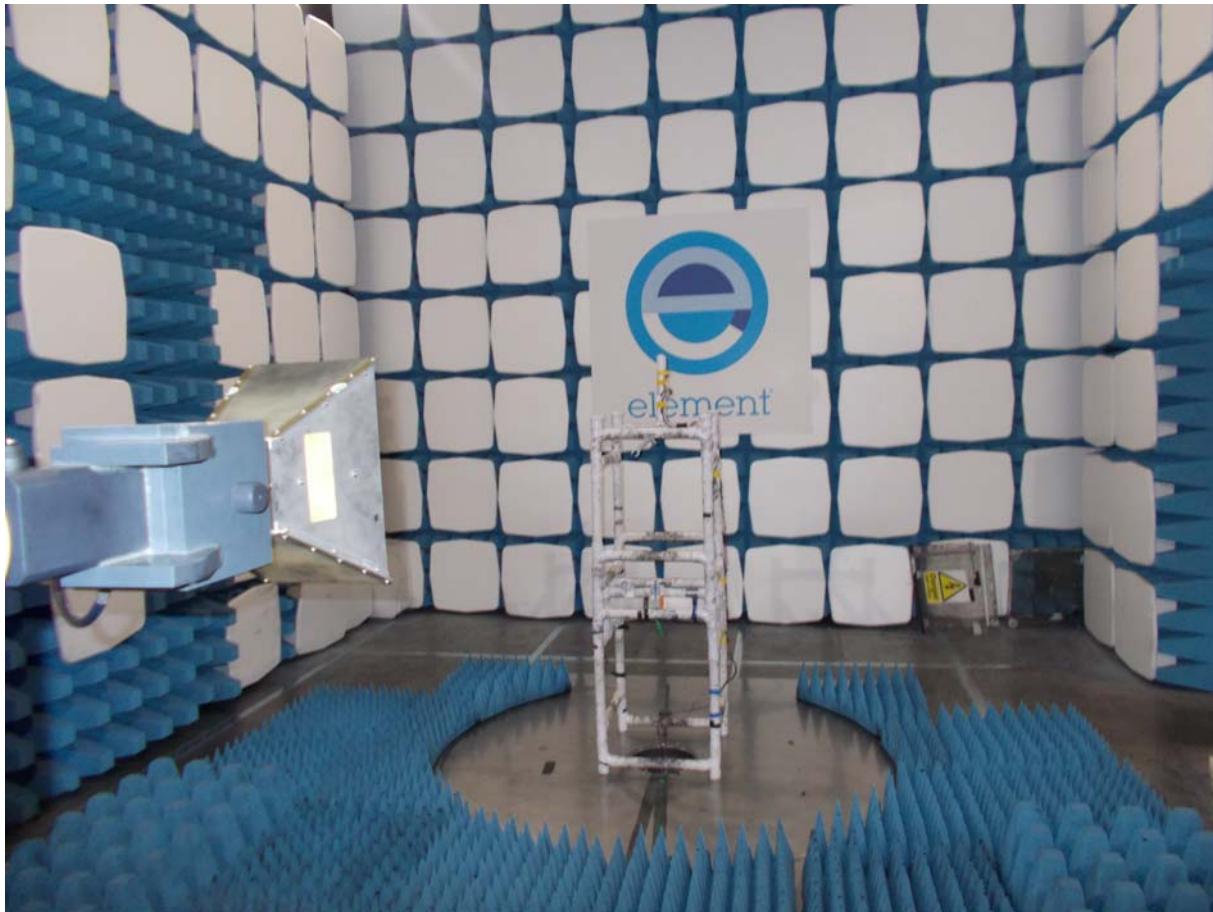


11.6 Test Equipment



Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU26	R&S	Spectrum Analyser	U405	2018-06-06
ESVS10	R&S	Receiver	L317	2019-03-22
3115	EMCO	1-18GHz Horn	U223	2019-10-25
Bilog	Chase	CBL611/A	U573	2019-08-02
8449B	Agilent	Pre Amp	L572	2018-09-28

11.7 Test Results


Frequency 2402 MHz:

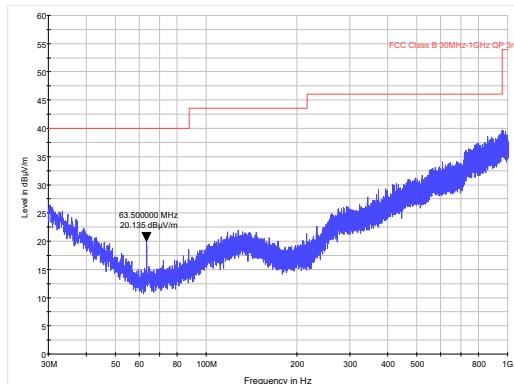


30 MHz to 1 GHz

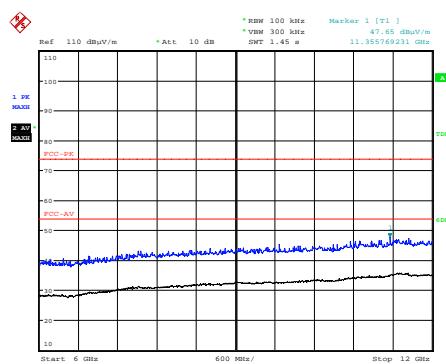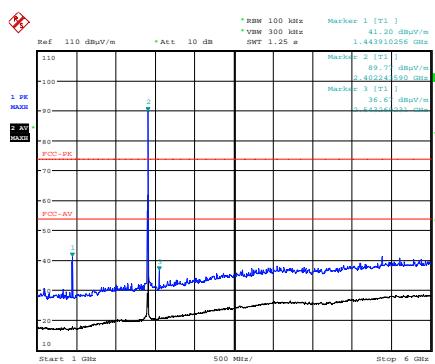

Date: 17.APR.2018 09:13:36

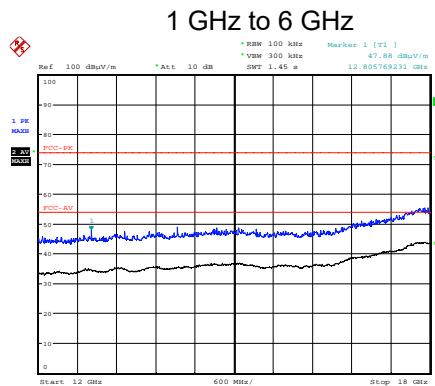

Date: 17.APR.2018 09:16:53

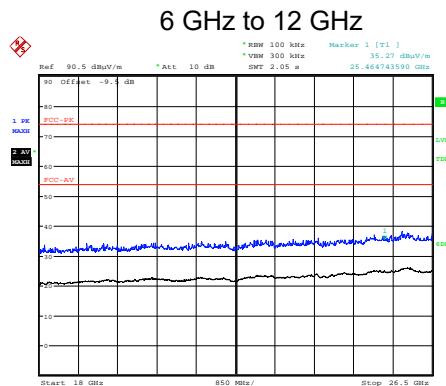

Date: 17.APR.2018 09:18:16

12 GHz to 18 GHz


Date: 17.APR.2018 11:47:09

18 GHz to 26.5 GHz



Frequency 2402 MHz:

Detector	Freq. (MHz)	Meas'd Emission (dBµV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBµV/m)	Field Strength (µV/m)	Limit (µV/m)
Pk	4804.00	46.55	5.30	32.80	36.19	0.00	0.00	48.46	264.85	5000
Av	4804.00	33.64	5.30	32.80	36.19	4.22	0.00	39.77	97.39	500

Frequency 2440 MHz:

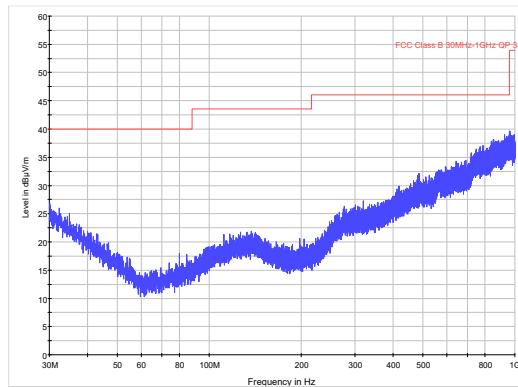


30 MHz to 1 GHz

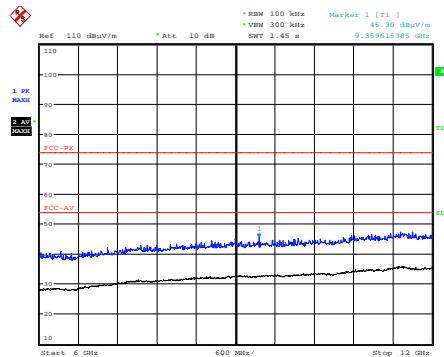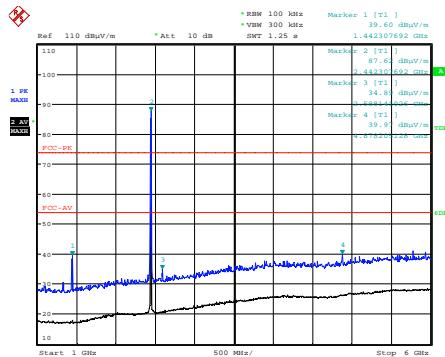


Date: 17.APR.2018 08:43:46

Date: 17.APR.2018 08:47:37

1 GHz to 6 GHz

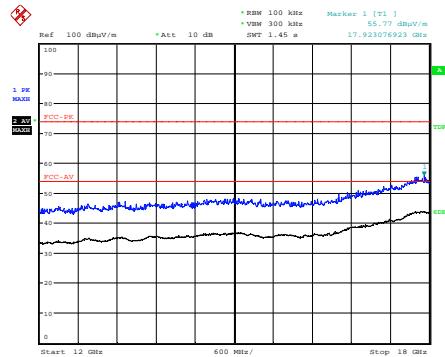

6 GHz to 12 GHz

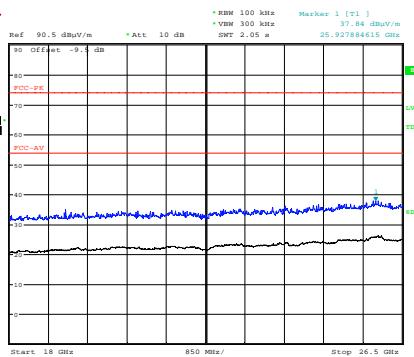

Date: 17.APR.2018 08:49:17

Date: 17.APR.2018 11:52:57


12 GHz to 18 GHz

18 GHz to 26.5 GHz



Frequency 2440 MHz:

Detector	Freq. (MHz)	Meas'd Emission (dB μ V)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
Pk	4880.00	47.84	5.30	32.90	36.21	0.00	0.00	49.83	310.10	5000
Av	4880.00	34.51	5.30	32.90	36.21	4.22	0.00	40.72	108.64	500

Frequency 2480 MHz:

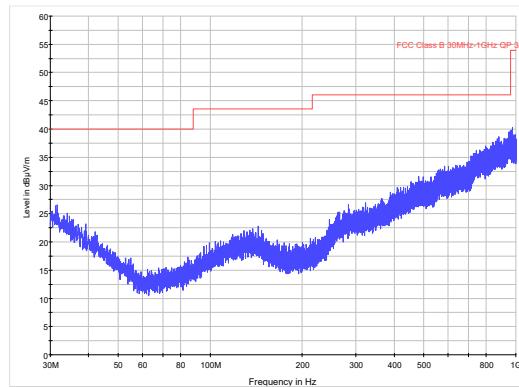


30 MHz to 1 GHz

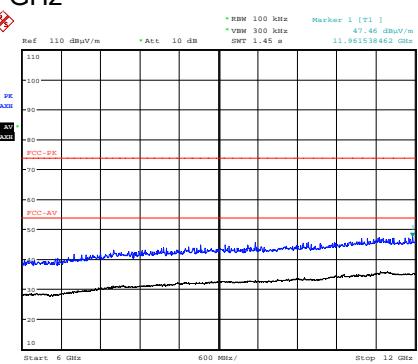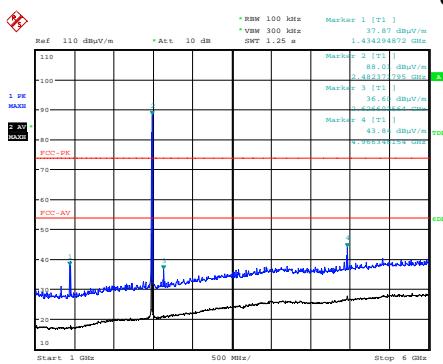


Date: 17.APR.2018 09:26:26

Date: 17.APR.2018 09:27:43

1 GHz to 6 GHz

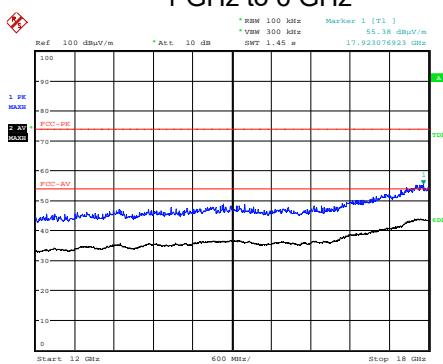

6 GHz to 12 GHz

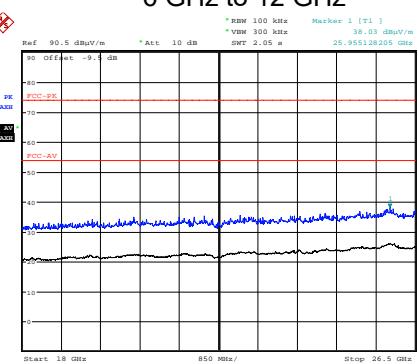

Date: 17.APR.2018 09:31:07

Date: 17.APR.2018 11:58:02

12 GHz to 18 GHz

18 GHz to 26.5 GHz

Frequency 2480 MHz:

Detector	Freq. (MHz)	Meas'd Emission (dBμV)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-amp Gain (dB)	Duty Cycle Corr'n (dB)	Distance Extrap'n Factor (dB)	Field Strength (dBμV/m)	Field Strength (μV/m)	Limit (μV/m)
Pk	4960.00	49.27	5.40	33.10	36.23	0.00	0.00	51.54	377.57	5000
Av	4960.00	38.04	5.40	33.10	36.23	4.22	0.00	44.53	168.46	500

12 Occupied Bandwidth

12.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

12.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	FCC: ANSI C63.10-2013, Clause 11.8
EUT Frequencies Measured:	2402 MHz, 2440 MHz, 2480 MHz
EUT Channel Bandwidths:	1 MHz
EUT Test Modulations:	GFSK
Deviations From Standard:	None
Measurement BW:	100 KHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 KHz
Measurement Span: (requirement 2 to 5 times OBW)	3 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 40 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	

12.3 Test Limit


The minimum -6 dB bandwidth shall be at least 500 kHz.

12.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iii, the bandwidth of the EUT was measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iii Test Setup

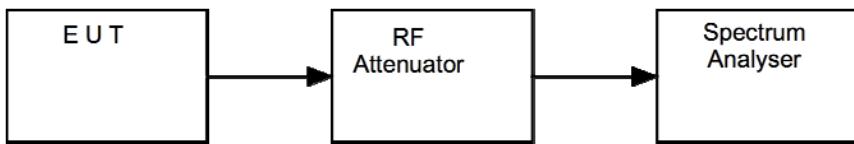


12.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	REF910	2018-07-13


12.6 Test Results

Frequency 2402 MHz:				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	6dB Bandwidth (kHz)	Result
2402	2401.673077	2402.384615	711.538	PASS

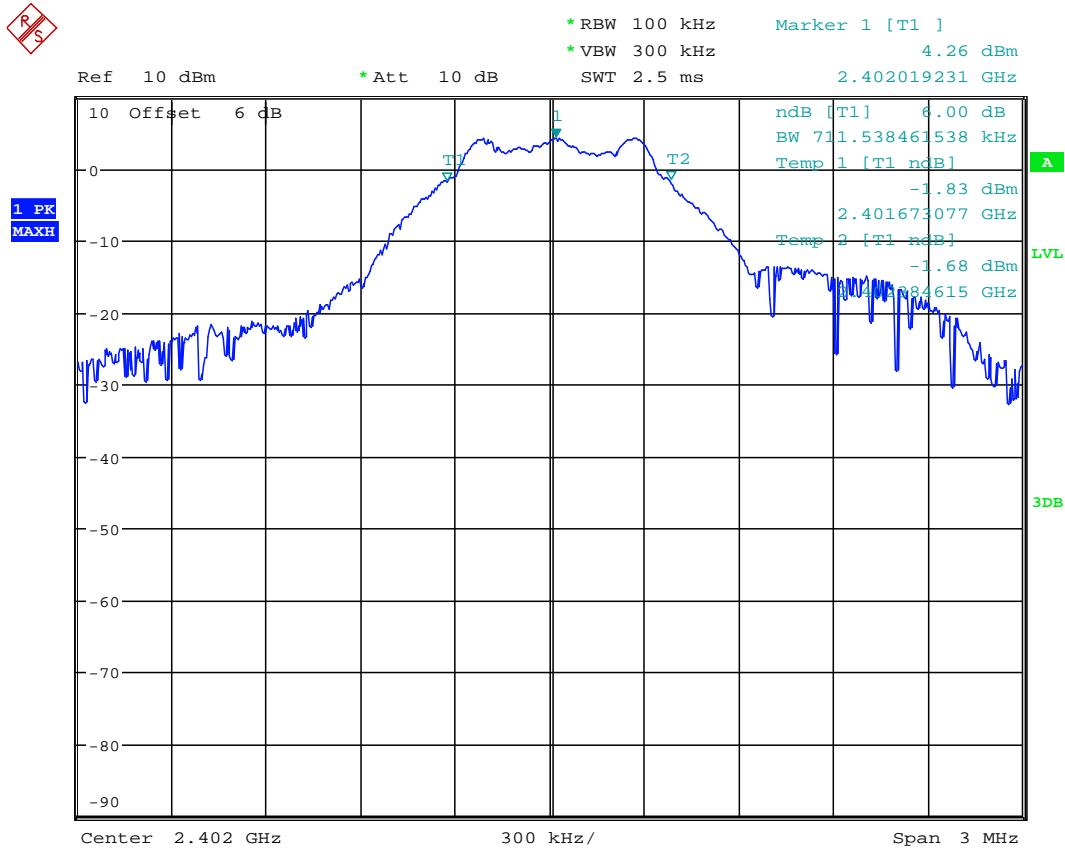


Date: 17.APR.2018 17:22:47

Frequency 2440 MHz:				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	6dB Bandwidth (kHz)	Result
2440	2439.663462	2440.384615	721.153	PASS

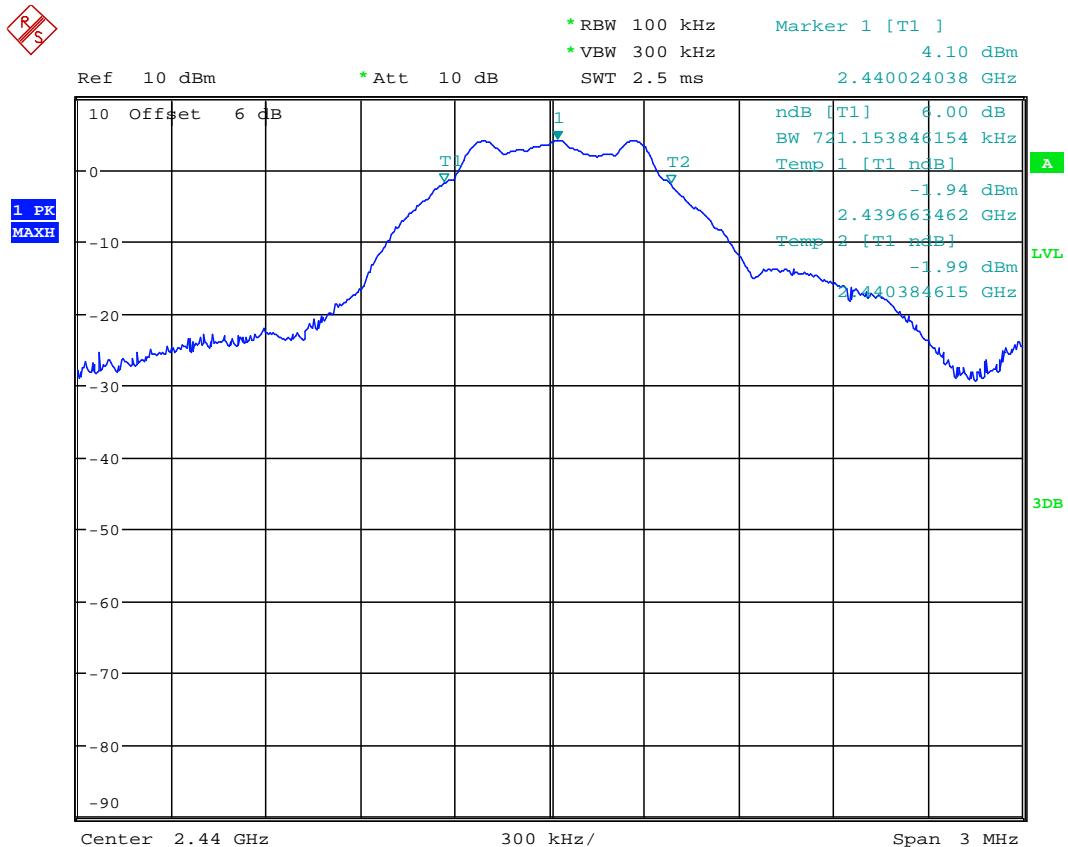

Date: 17.APR.2018 17:20:57

Frequency 2480 MHz:				
Channel Frequency (MHz)	F_L (MHz)	F_H (MHz)	6dB Bandwidth (kHz)	Result
2480	2479.663462	2480.384615	721.153	PASS

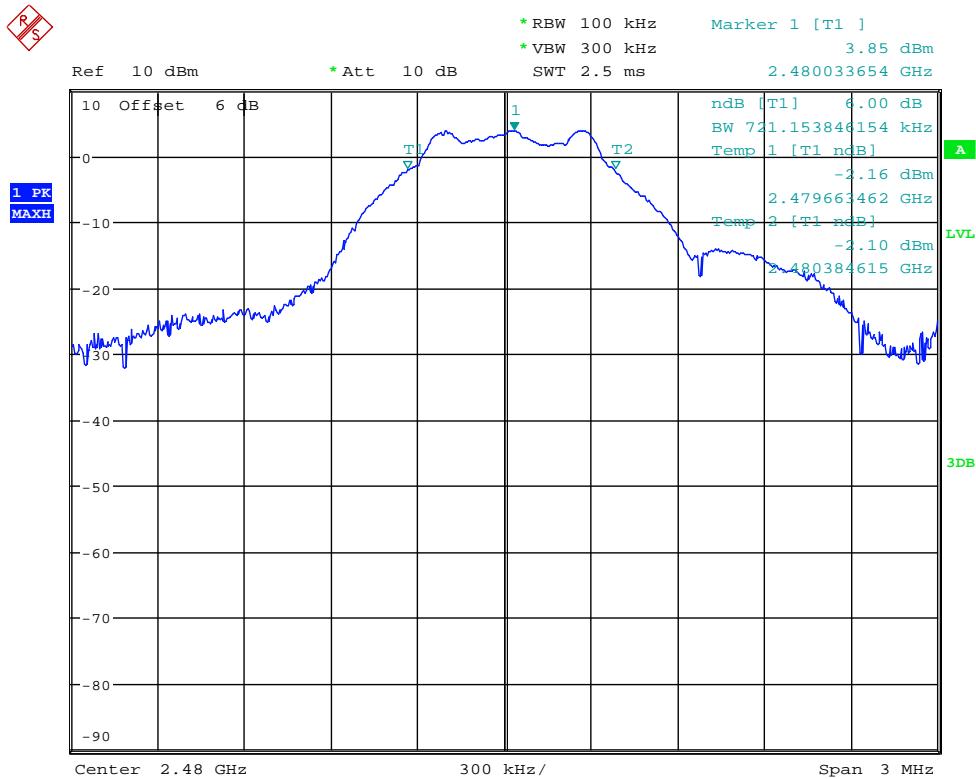

Date: 17.APR.2018 17:23:54

13 Maximum peak conducted output power

13.1 Definition

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the signal bandwidth.

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

13.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.9.1
EUT Frequencies Measured:	2402 MHz, 2440 MHz, 2480 MHz
Deviations From Standard:	None
Measurement BW:	3 MHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	10 MHz
Measurement Detector:	Peak
Voltage Extreme Environment Test Range:	Battery Power = New Battery

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 40 % RH	20 % RH to 75 % RH (as declared)

13.3 Test Limit


For systems employing digital modulation techniques operating in the bands 902 to 928 MHz, 2400 to 2483.5 MHz and 5725 to 5850 MHz, the maximum peak conducted output power shall not exceed 1 W.

13.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure iv, the resolution bandwidth of the spectrum analyser was increased above the EUT occupied bandwidth and the peak emission data noted.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst-case configuration in each bandwidth.

Figure iv Test Setup

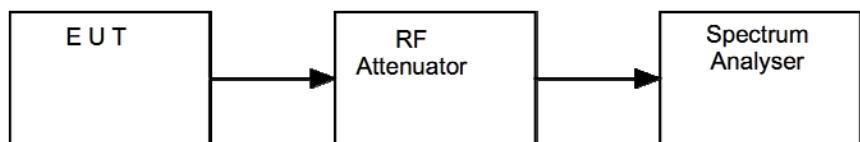


13.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	REF910	2018-07-13


13.6 Test Results

Frequency 2402 MHz:				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (mW)	Result
2402	5.29	0.00	3.38	PASS

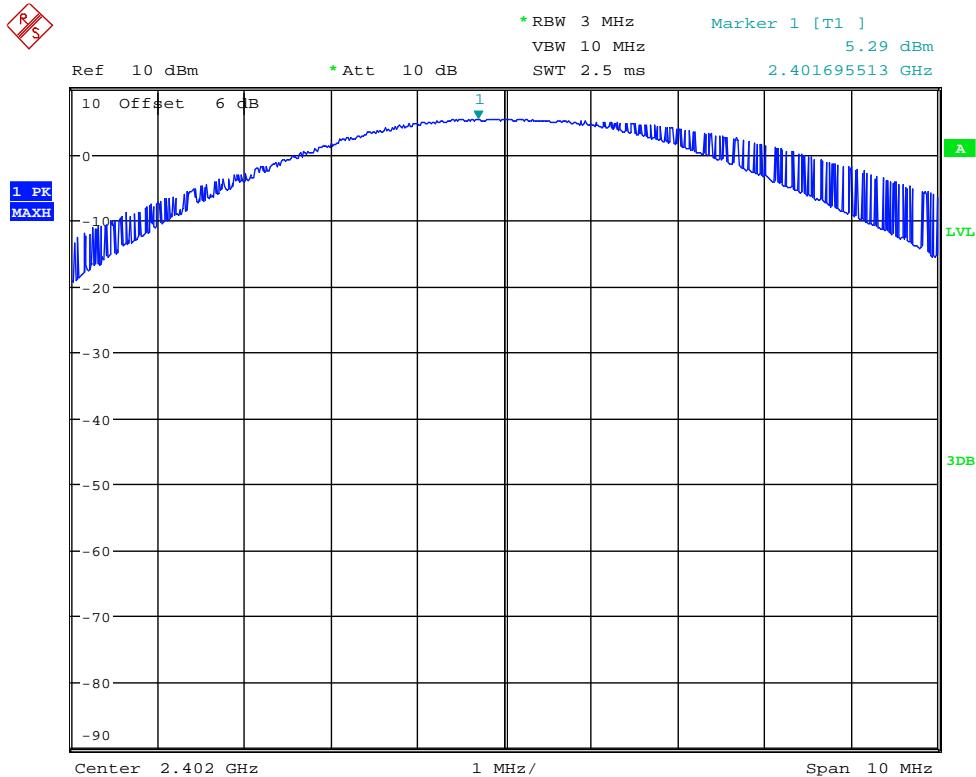


Date: 17.APR.2018 17:30:10

Frequency 2440 MHz:				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (mW)	Result
2440	5.09	0.00	3.23	PASS

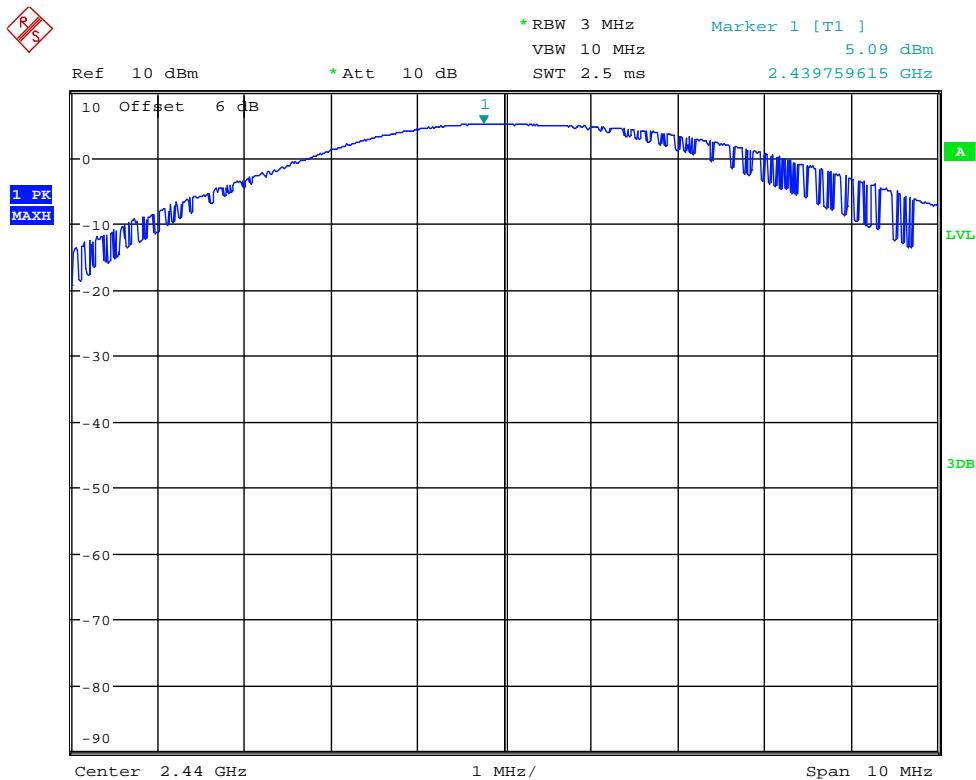

Date: 17.APR.2018 17:29:13

Frequency 2480 MHz:				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (mW)	Result
2480	4.83	0.00	3.04	PASS

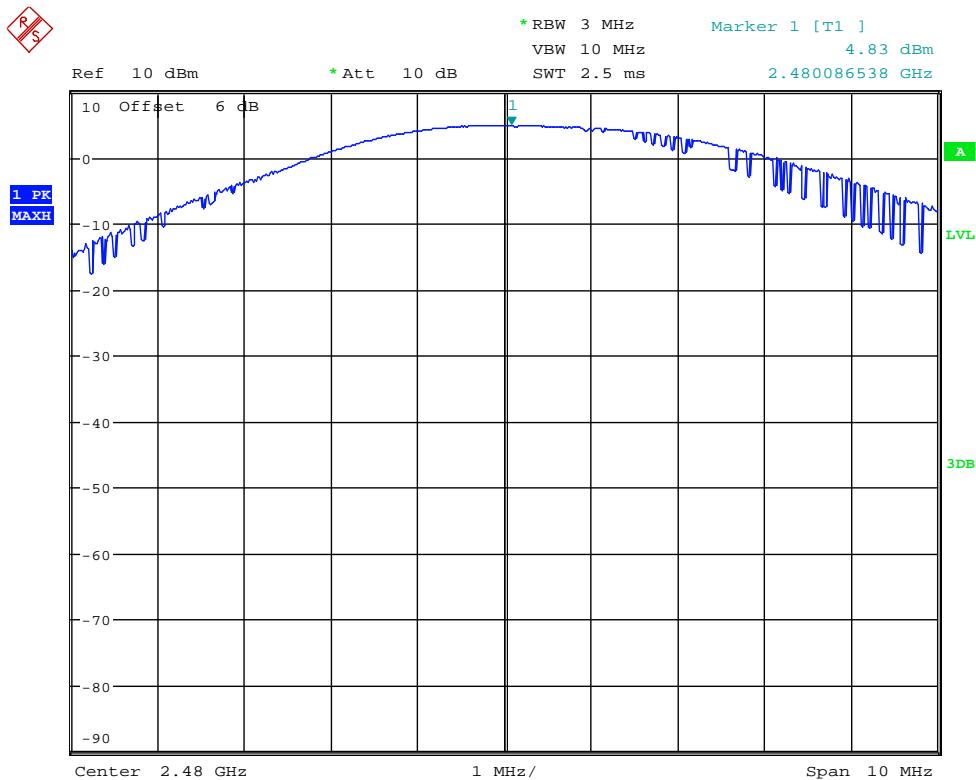

Date: 17.APR.2018 17:27:29

14 Out-of-band and conducted spurious emissions

14.1 Definition

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude out-of-band emissions.

14.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.11
EUT Frequencies Measured:	2402 MHz, 2440 MHz, 2480 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	300 kHz
Measurement Detector:	Peak
Measurement Range:	9 kHz to 25 GHz

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 40 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	

14.3 Test Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in FCC 47CFR15.209(a) / RSS-Gen is not required.

14.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure v Test Setup


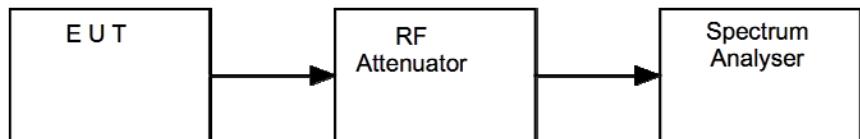


14.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	REF910	2018-07-13


14.6 *Test Results*

Frequency 2402 MHz:						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
2402	2400	-27.65	4.10	-15.9	11.8	PASS

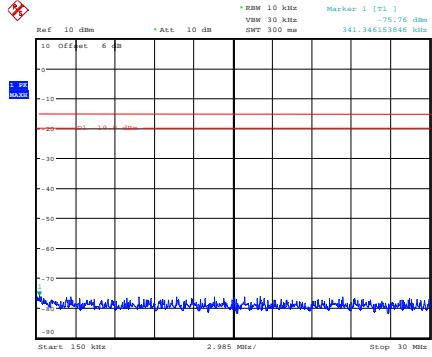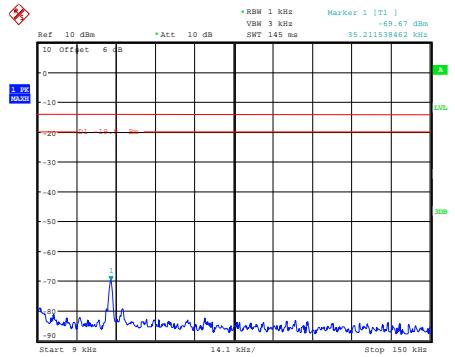


Date: 17.APR.2018 18:47:05

9 kHz to 150 kHz

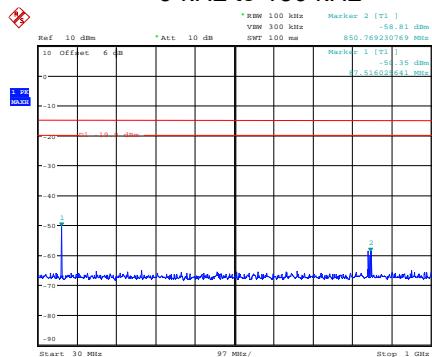


Date: 17.APR.2018 18:48:03

150 kHz to 30 MHz

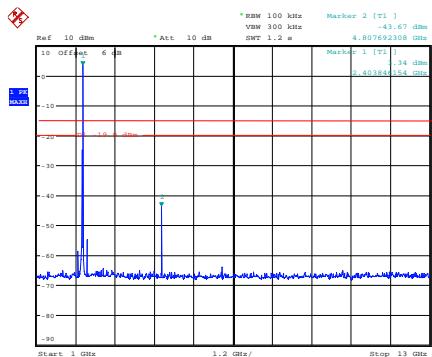


Date: 17.APR.2018 18:49:41

30 MHz to 1 GHz

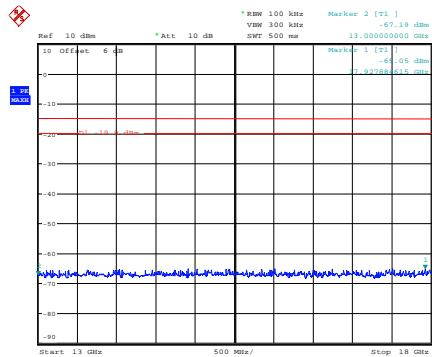

Date: 17.APR.2018 18:50:42

1 GHz to 13 GHz

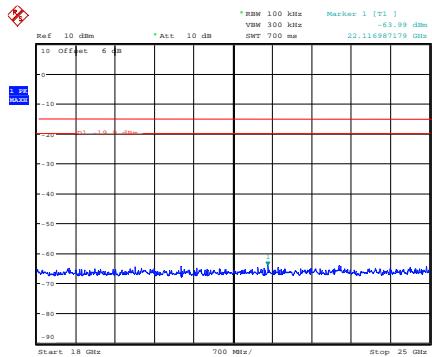





Date: 17.APR.2018 18:51:50

13 GHz to 18 GHz





Date: 17.APR.2018 18:52:35

18 GHz to 25 GHz


Frequency 2440 MHz:						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
No emissions within 20 dB of the limit					PASS	

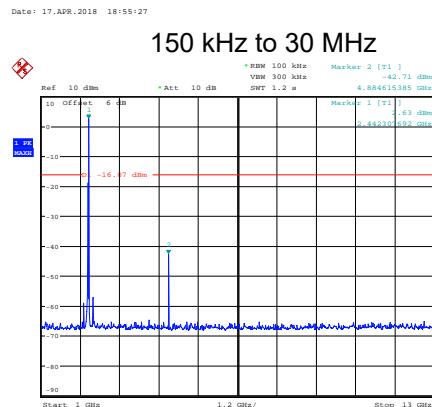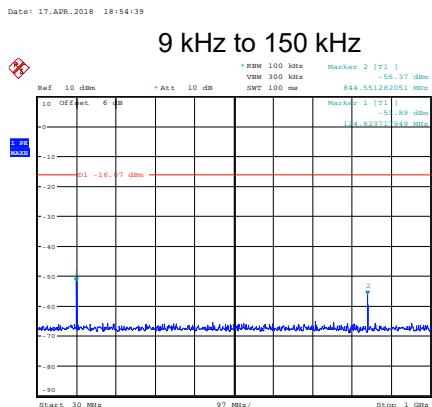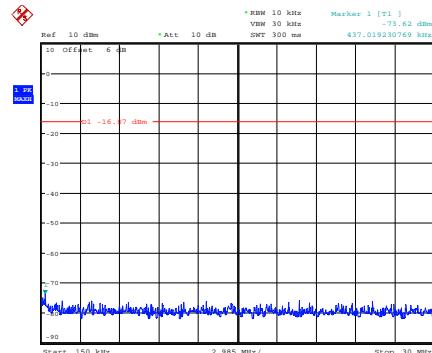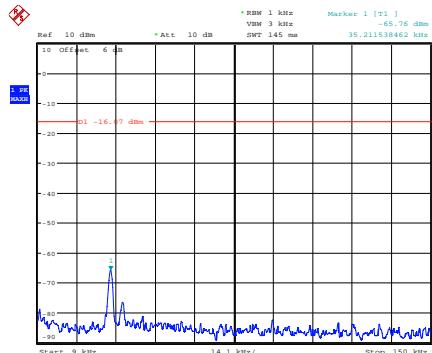

Frequency 2480 MHz:						
Channel Frequency (MHz)	Emission Frequency (MHz)	Analyzer Level (dBm)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
2480	2483.5	-32.88	3.67	-16.33	16.55	PASS

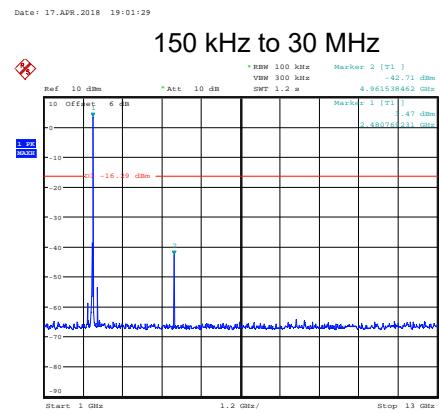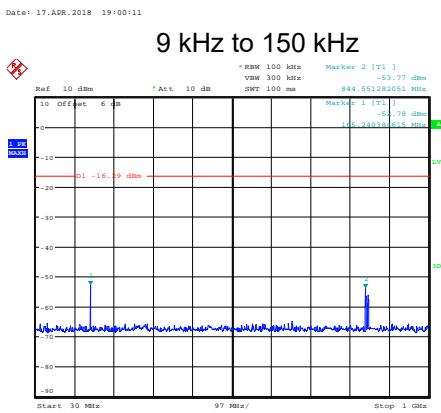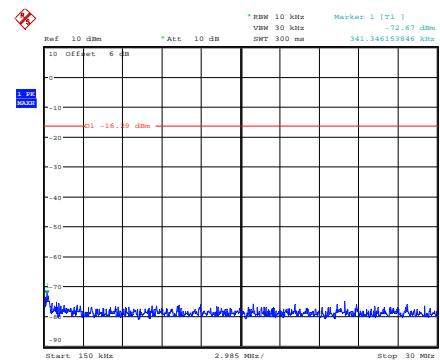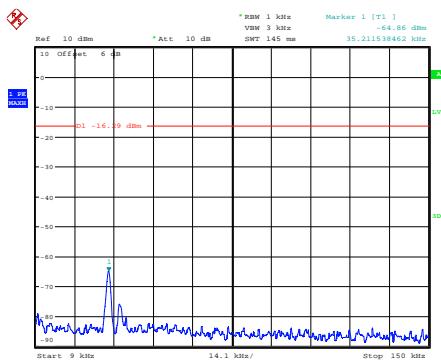


Upper Band Edge Radiated

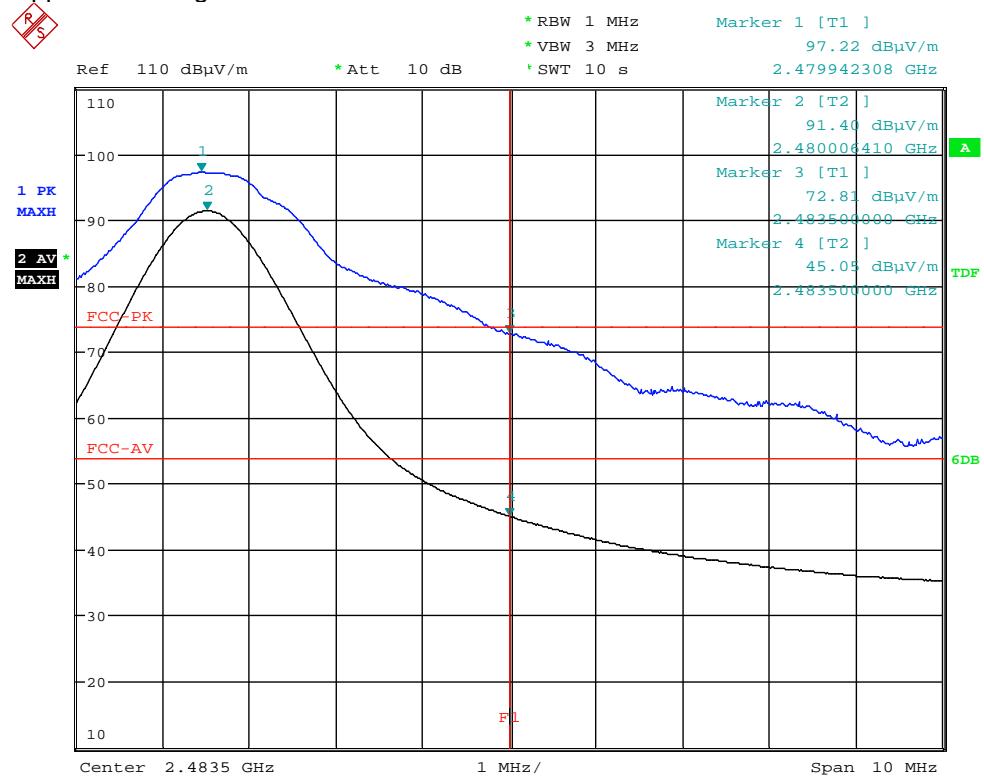


Date: 17.APR.2018 09:48:31

Lower Band Edge Conducted

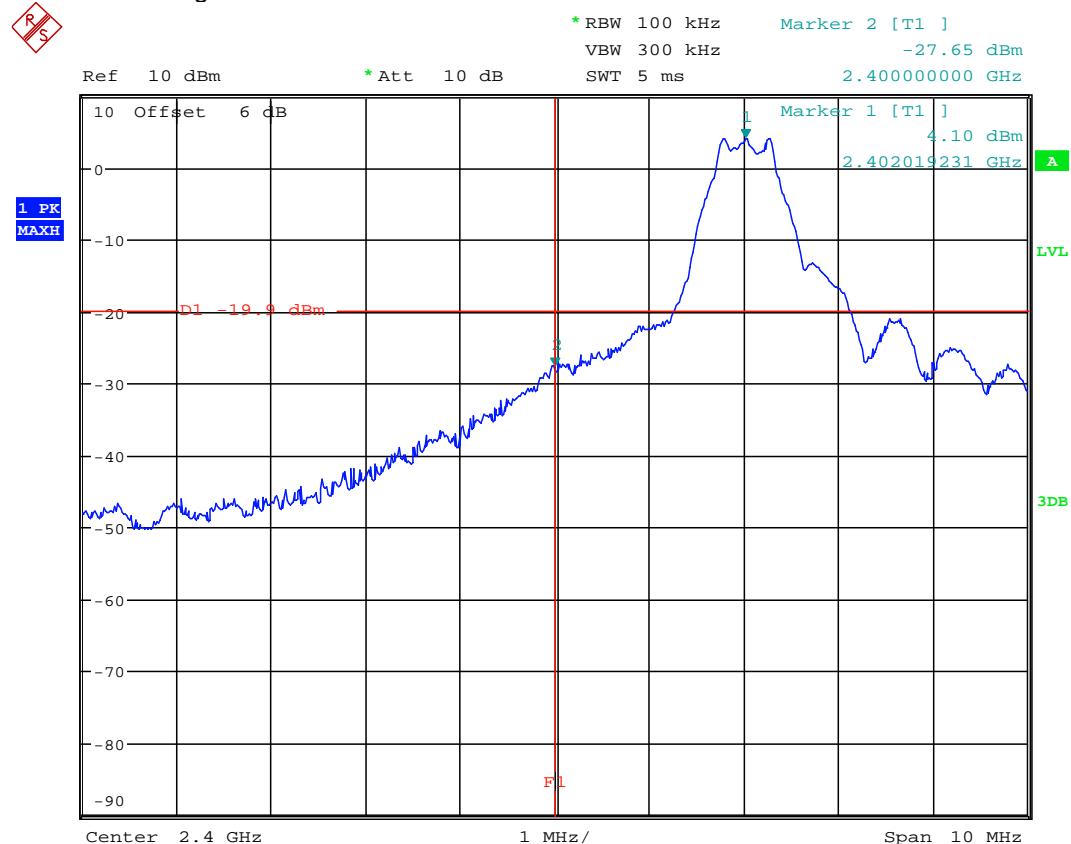

Date: 17.APR.2018 18:42:35

Upper Band Edge Conducted

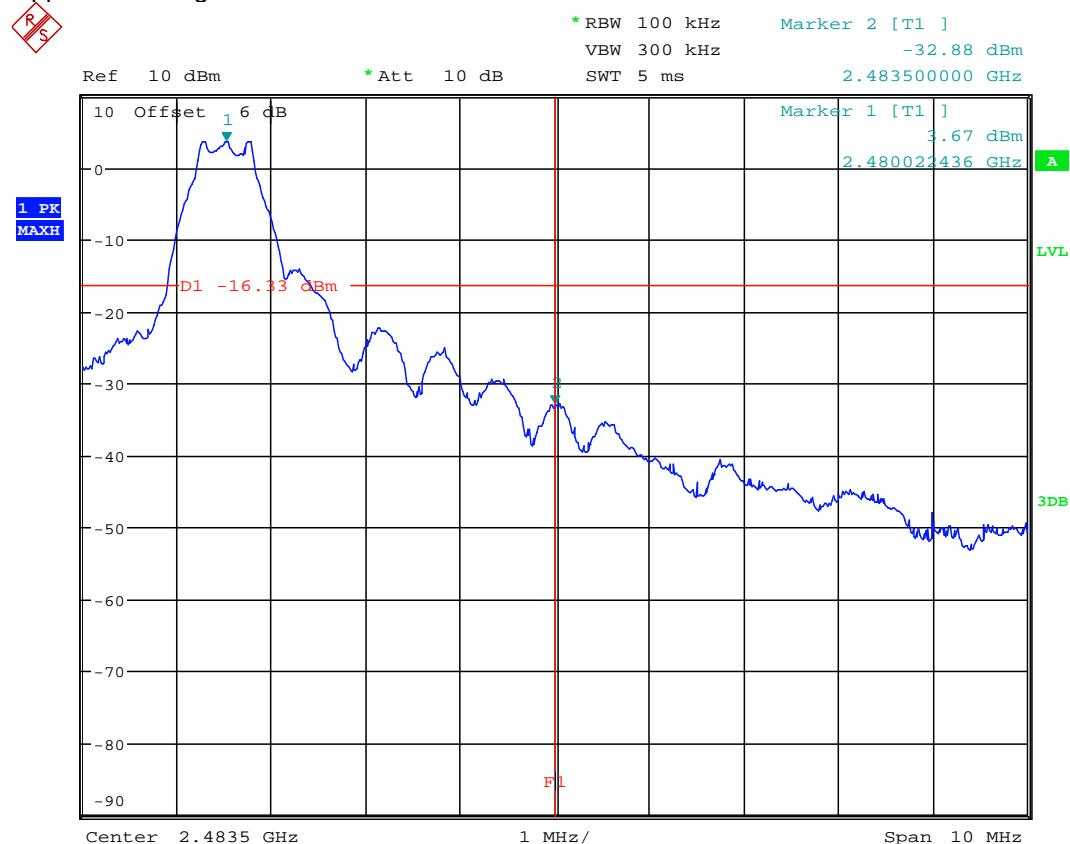

Date: 17.APR.2018 18:39:59

15 Power spectral density

15.1 Definition

The power per unit bandwidth.

15.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 11.10
EUT Frequencies Measured:	2402 MHz, 2440 MHz, 2480 MHz
Deviations From Standard:	None
Measurement BW:	100 kHz
Spectrum Analyzer Video BW: (requirement at least 3x RBW)	100 kHz
Measurement Span: (requirement 1.5 times Channel BW)	1.2 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 40 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	

15.3 Test Limit


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

15.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure vi, the peak emission of the EUT was measured on a spectrum analyser, with path losses taken into account.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.

Figure vi Test Setup

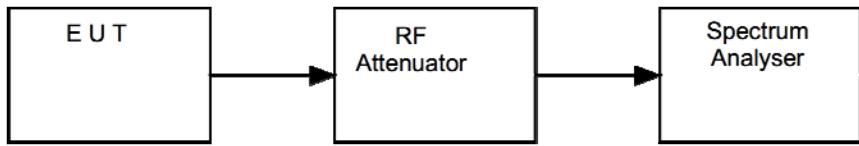


15.5 Test Equipment

Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
FSU46	R&S	Spectrum Analyser	REF910	2018-07-13


15.6 Test Results

Frequency 2402 MHz:				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
2402	4.25	0	4.25	PASS

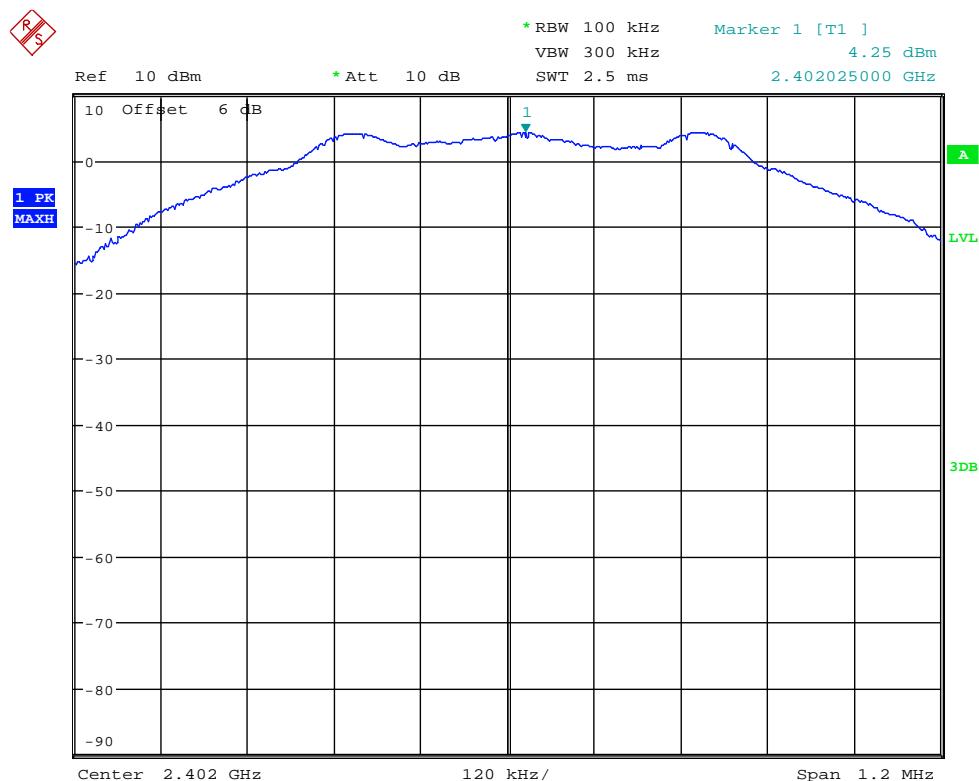


Date: 17.APR.2018 17:31:18

Frequency 2440 MHz:				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
2440	4.06	0	4.06	PASS

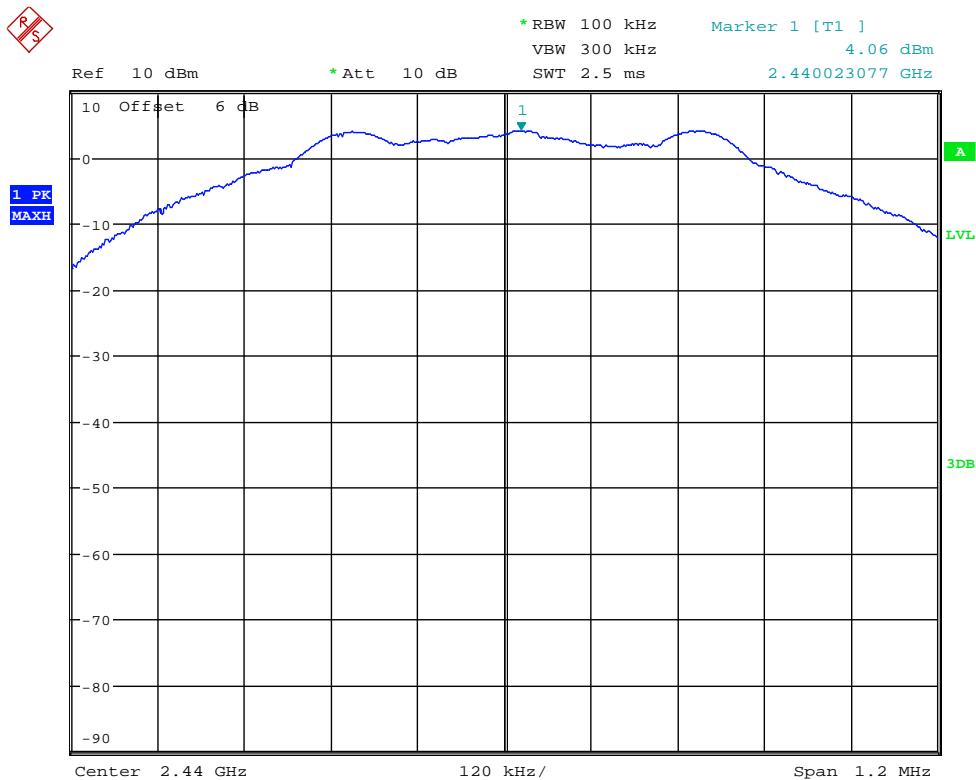

Date: 17.APR.2018 17:32:09

Frequency 2480 MHz:				
Channel Frequency (MHz)	Analyzer Level (dBm)	Cable loss (dB)	Power (dBm)	Result
2480	3.51	0	3.51	PASS

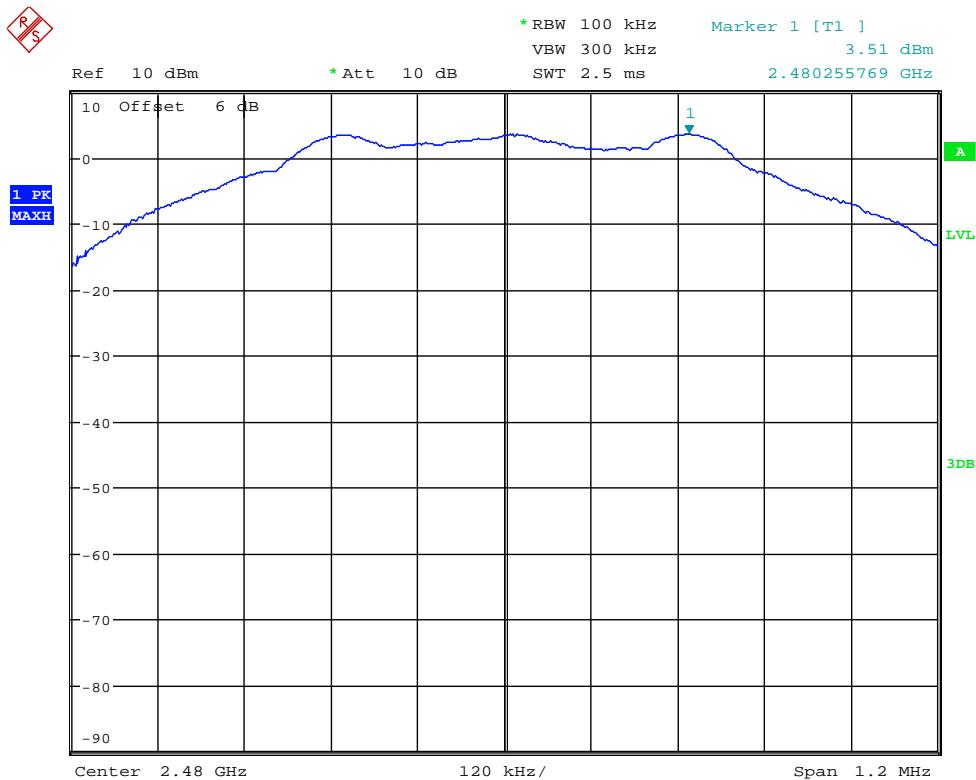

Date: 17.APR.2018 17:47:56

16 Duty Cycle

16.1 Definition

The ratio of the sum of all pulse durations to the total period, during a specified period of operation. The duty cycle is determined on the basis of one complete pulse train for pulse trains not exceeding 100 milliseconds. Where the pulse train exceeds 100 milliseconds, the duty cycle is determined on the basis of the 100 millisecond interval with the highest average value of emission.

16.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	ANSI C63.10-2013, Clause 7.5
EUT Frequencies Measured:	2402 MHz, 2440 MHz, 2480 MHz
EUT Channel loading:	100 %
Deviations From Standard:	None
Temperature Extreme Environment Test Range:	N/A
Voltage Extreme Environment Test Range:	N/A

Environmental Conditions (Normal Environment)

Temperature: 24 °C	+15 °C to +35 °C (as declared)
Humidity: 40 % RH	20 % RH to 75 % RH (as declared)
Supply: 3 V dc	

16.3 Test Limit

N/A.

Note, the maximum duty cycle correction factor which may be used is 20 dB.

16.4 Test Method


With the EUT setup as per section 9 of this report and connected as per Figure vii, the duty of the EUT was calculated from the sum of total on and off times over the observation period.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, bandwidths, data rates and power settings were used to observe the worst-case configuration.

[1] Single antenna output devices

Duty was measured at the antenna port

Figure vii Test Setup

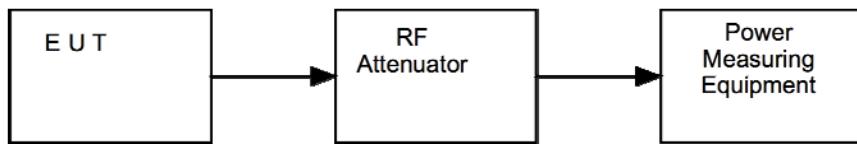


16.5 Test Equipment


Equipment Type	Manufacturer	Equipment Description	Element No	Due For Calibration
RPR3006W	Dare	Power Meter	REF2083	2018-11-17

16.6 Test Results


Frequency 2402 MHz:	
	Duty (%)
	61.5

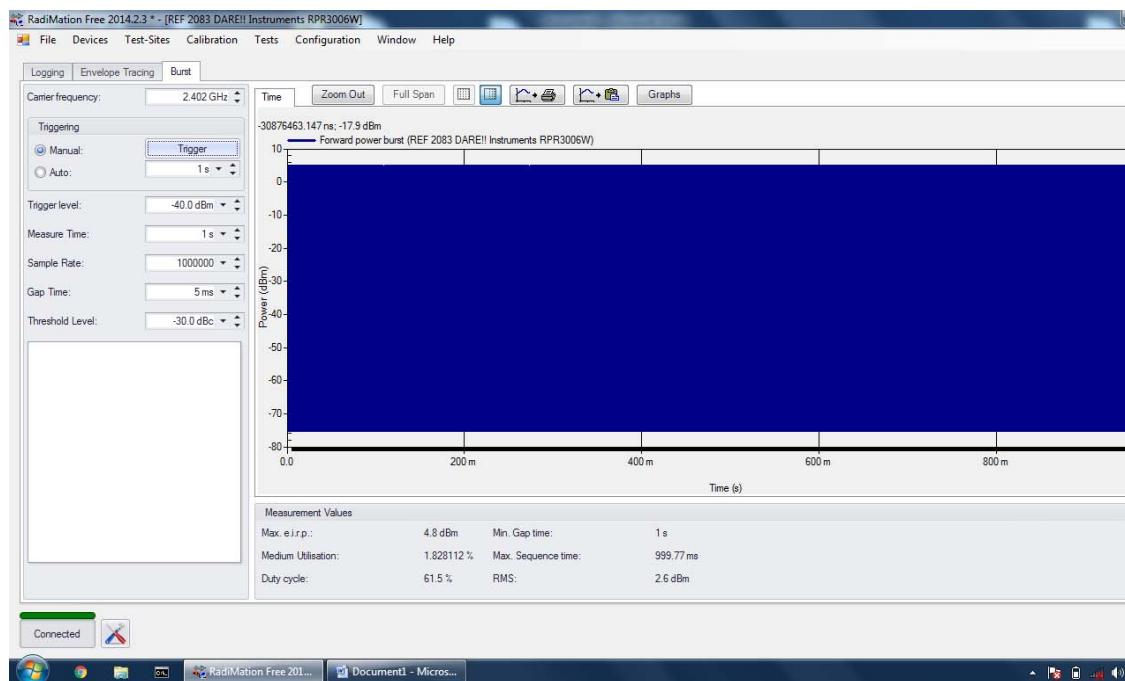

Frequency 2440 MHz:	
Duty (%)	
61.5	

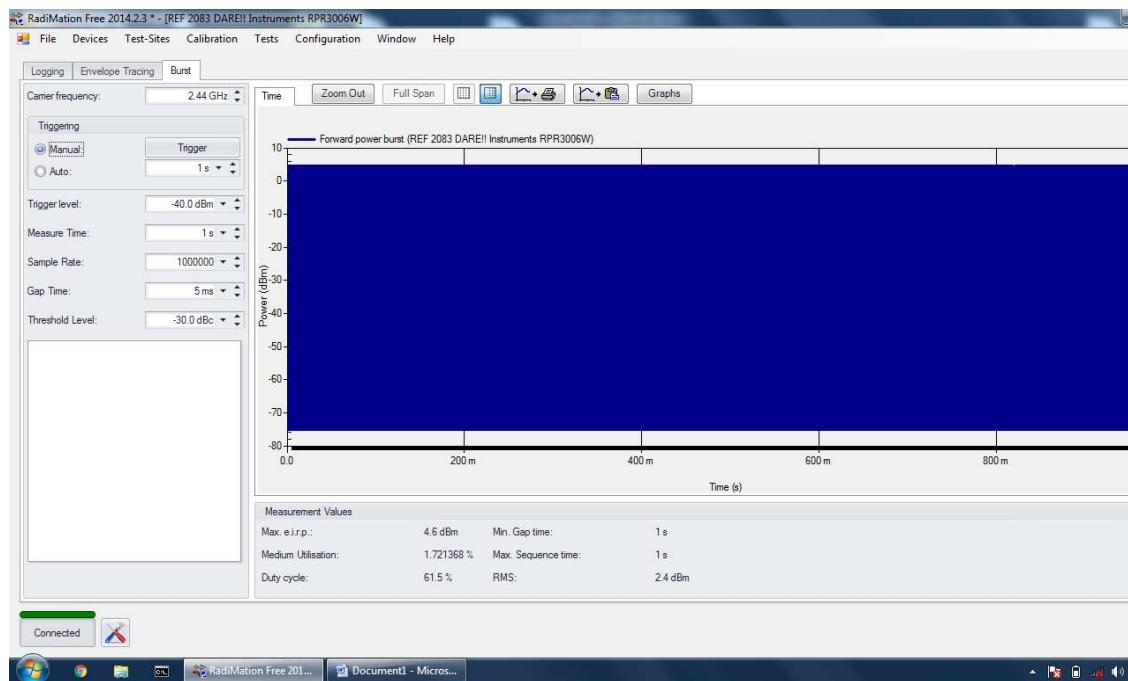

Frequency 2480 MHz:	
	Duty (%)
	61.5

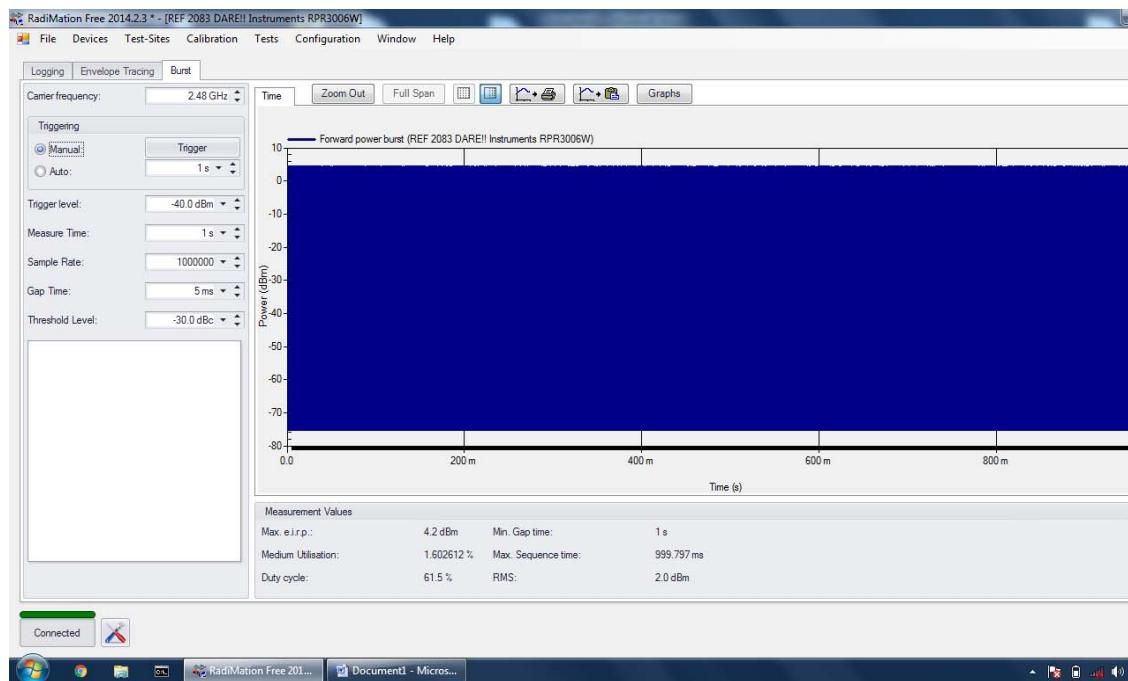

17 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**
Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[2] AC power line conducted emissions

Uncertainty in test result = **3.4 dB**

[3] Occupied bandwidth

Uncertainty in test result = **15.5 %**

[4] Conducted carrier power

Uncertainty in test result (Power Meter) = **1.08 dB**

[5] Conducted / radiated RF power out-of-band

Uncertainty in test result – up to 8.1 GHz = **3.31 dB**
Uncertainty in test result – 8.1 GHz to 15.3 GHz = **4.43 dB**
Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**
Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[6] Power spectral density

Uncertainty in test result (Spectrum Analyser) = **2.48 dB**