



A4-1. Conducted Band Edge GPRS


Band	Channel	Freq (MHz)	PCL	Slots	Result	Verdict
GSM 850	251	848.8	5	1 Tx	see graph	PASS
GSM 850	128	824.2	5	1 Tx	see graph	PASS
PCS 1900	810	1909.8	0	1 Tx	see graph	PASS
PCS 1900	512	1850.2	0	1 Tx	see graph	PASS

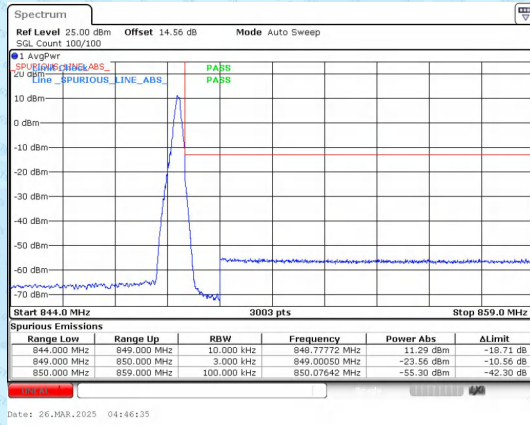


GSM 850 0.2MHz/848.8/High

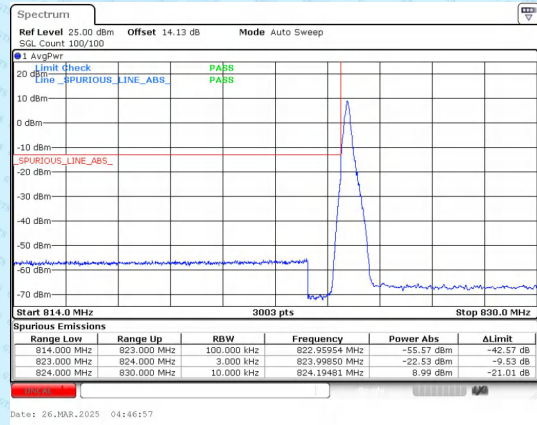

GSM 850 0.2MHz/824.2/Low

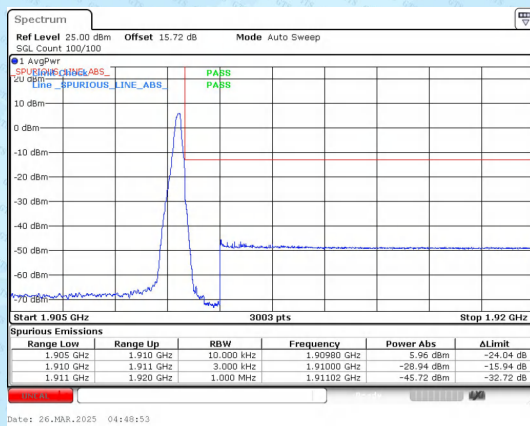


PCS 1900 0.2MHz/1909.8/High

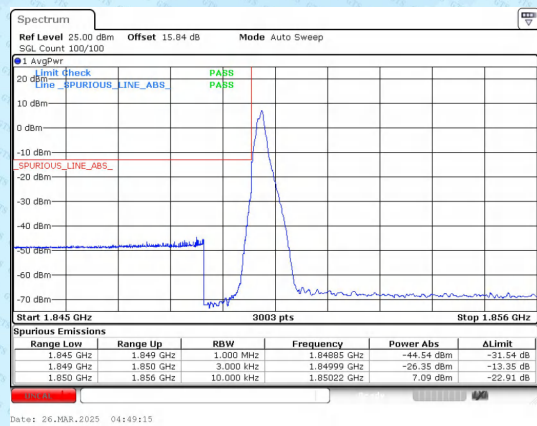


PCS 1900 0.2MHz/1850.2/Low

A4-2.Conducted Band Edge EGPRS


Band	Channel	Freq (MHz)	PCL	Slots	Result	Verdict
GSM 850	251	848.8	8	1 Tx	see graph	PASS
GSM 850	128	824.2	8	1 Tx	see graph	PASS
PCS 1900	810	1909.8	2	1 Tx	see graph	PASS
PCS 1900	512	1850.2	2	1 Tx	see graph	PASS

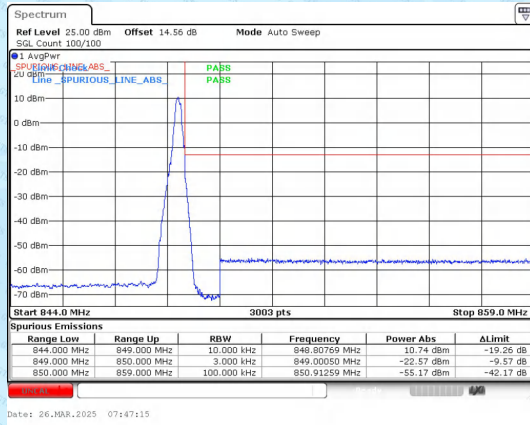


GSM 850 0.2MHz/848.8/High

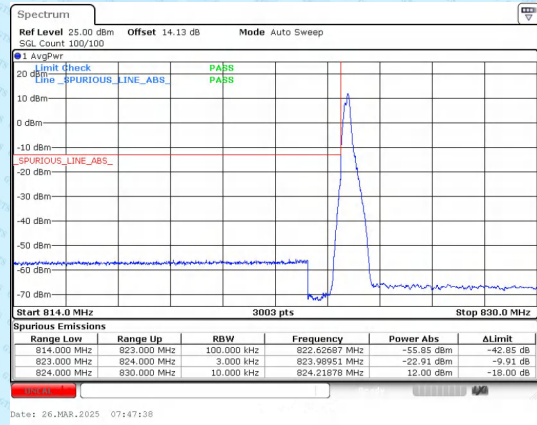

GSM 850 0.2MHz/824.2/Low

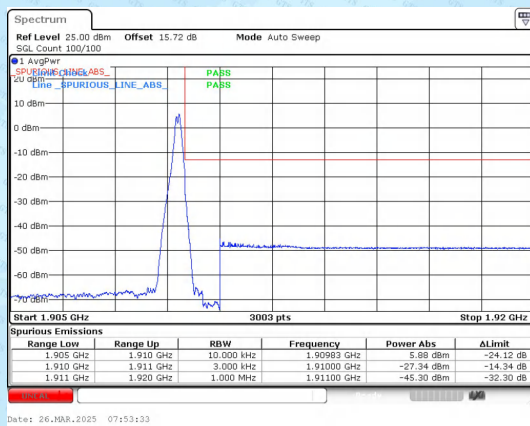


PCS 1900 0.2MHz/1909.8/High

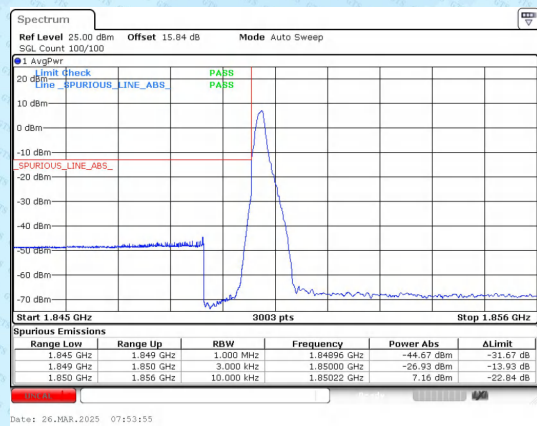

PCS 1900 0.2MHz/1850.2/Low


A5.Conducted Spurious Emissions

Band	Channel	Freq (MHz)	PCL	StartFreq (MHz)	StopFreq (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM 850	251	848.8	5	0.15	30.0	-55.1	-13	PASS
GSM 850	251	848.8	5	30.0	1000.0	-28.94	-13	PASS
GSM 850	251	848.8	5	1000.0	10000.0	-21.6	-13	PASS
GSM 850	190	836.6	5	0.15	30.0	-56.2	-13	PASS
GSM 850	190	836.6	5	30.0	1000.0	-28.63	-13	PASS
GSM 850	190	836.6	5	1000.0	10000.0	-21.88	-13	PASS
GSM 850	128	824.2	5	0.15	30.0	-55.41	-13	PASS
GSM 850	128	824.2	5	30.0	1000.0	-28.24	-13	PASS
GSM 850	128	824.2	5	1000.0	10000.0	-22.43	-13	PASS
PCS 1900	810	1909.8	0	0.15	30.0	-54.08	-23	PASS
PCS 1900	810	1909.8	0	30.0	1000.0	-49.44	-13	PASS
PCS 1900	810	1909.8	0	1000.0	20000.0	-16.95	-13	PASS
PCS 1900	661	1880.0	0	0.15	30.0	-55.07	-23	PASS
PCS 1900	661	1880.0	0	30.0	1000.0	-51.53	-13	PASS
PCS 1900	661	1880.0	0	1000.0	20000.0	-17.13	-13	PASS
PCS 1900	512	1850.2	0	0.15	30.0	-54.96	-23	PASS
PCS 1900	512	1850.2	0	30.0	1000.0	-51.47	-13	PASS
PCS 1900	512	1850.2	0	1000.0	20000.0	-16.49	-13	PASS

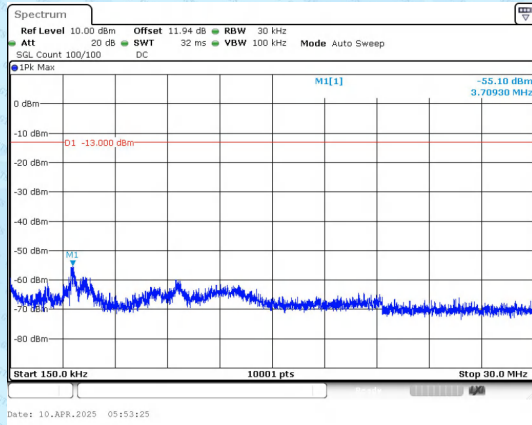


0.15MHz-30.0MHz

GSM 850 0.2MHz/848.8/High

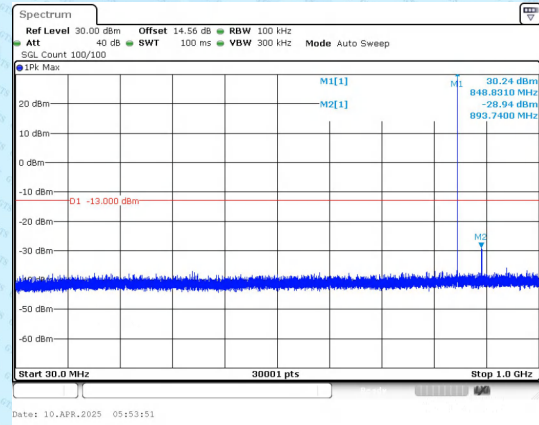


30.0MHz-1000.0MHz

GSM 850 0.2MHz/848.8/High

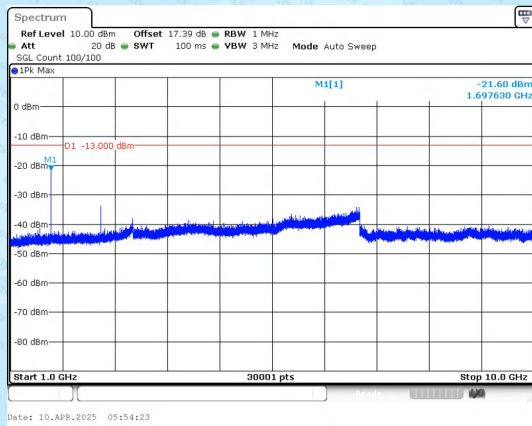


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/848.8/High

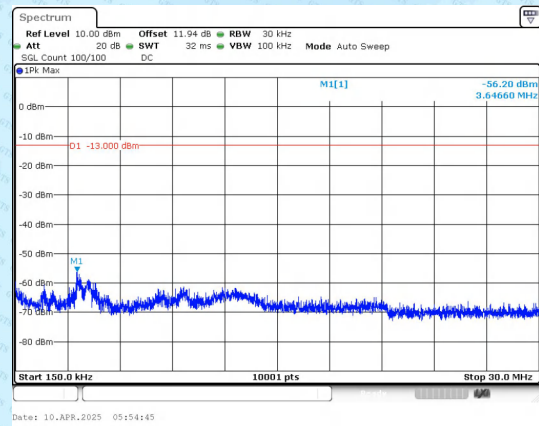


0.15MHz-30.0MHz

GSM 850 0.2MHz/836.6/Mid

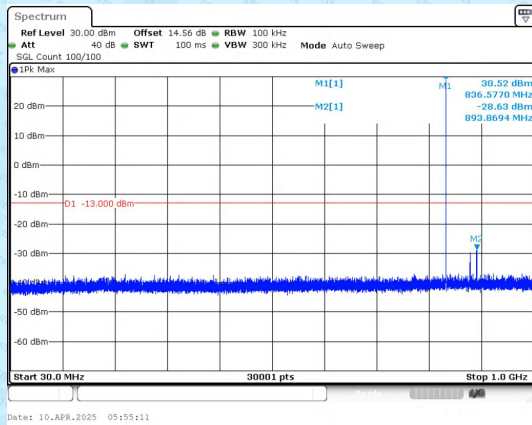


30.0MHz-1000.0MHz

GSM 850 0.2MHz/836.6/Mid

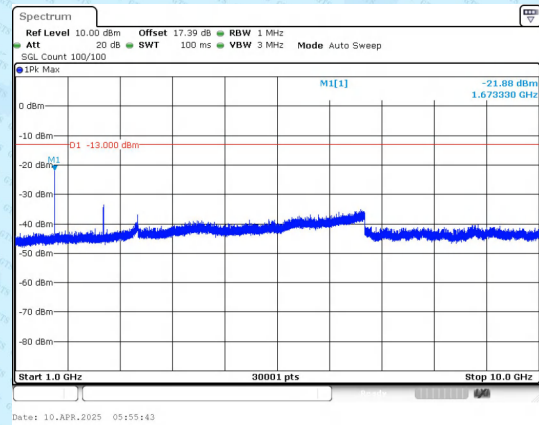


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/836.6/Mid

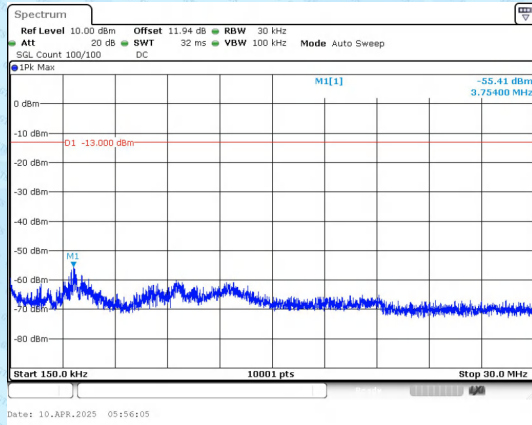


0.15MHz-30.0MHz

GSM 850 0.2MHz/824.2/Low

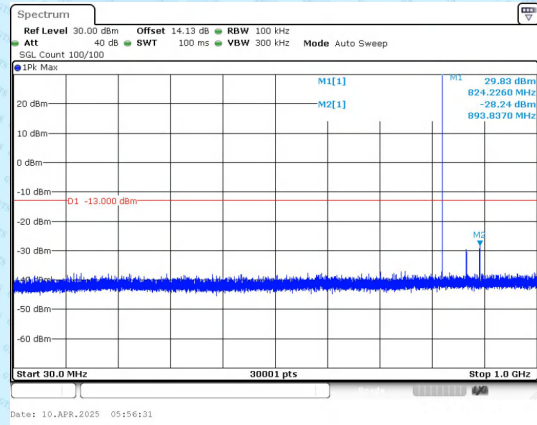


30.0MHz-1000.0MHz

GSM 850 0.2MHz/824.2/Low

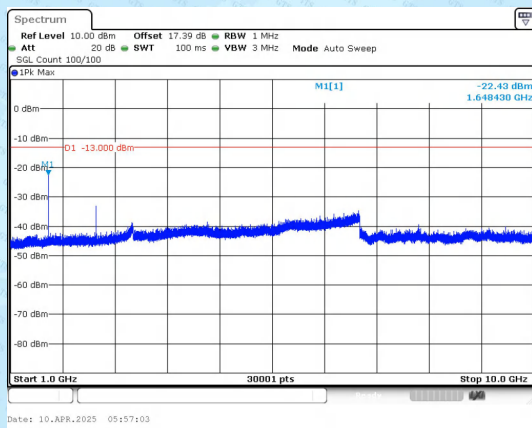


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/824.2/Low

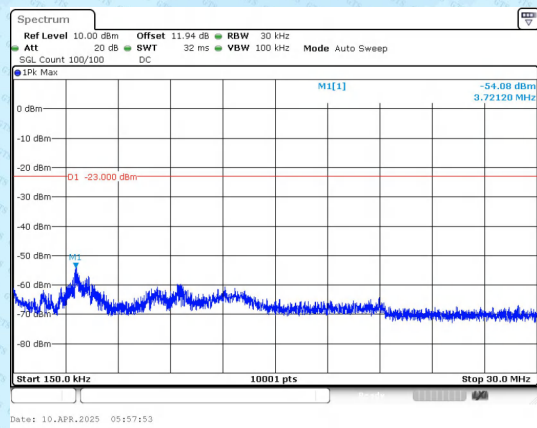


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1909.8/High

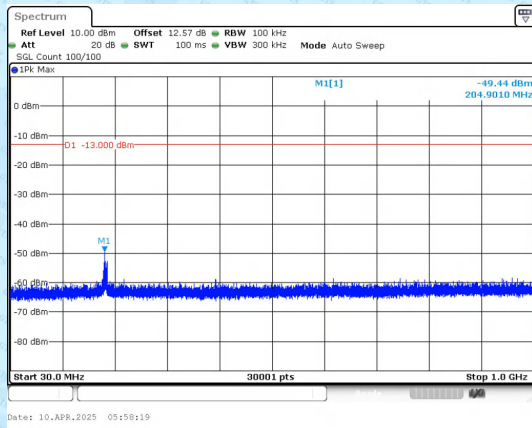


30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1909.8/High

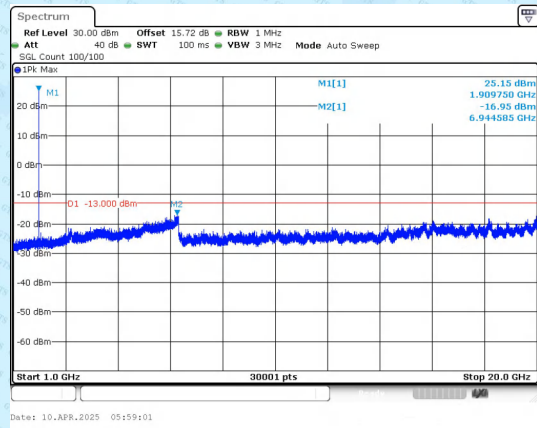


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1909.8/High

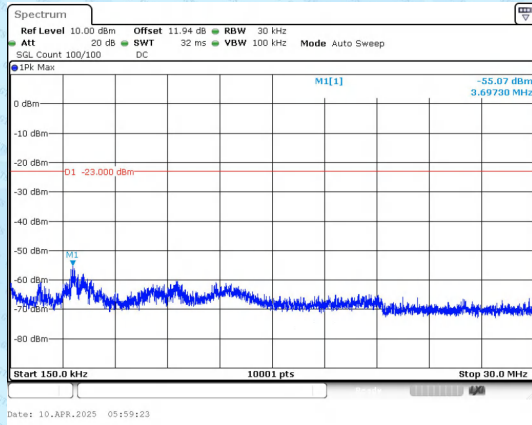


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1880.0/Mid

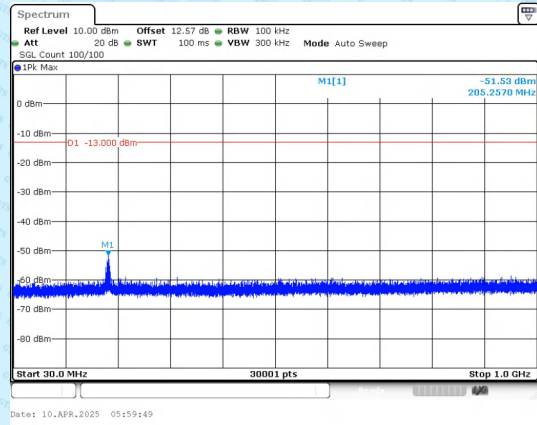


30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1880.0/Mid

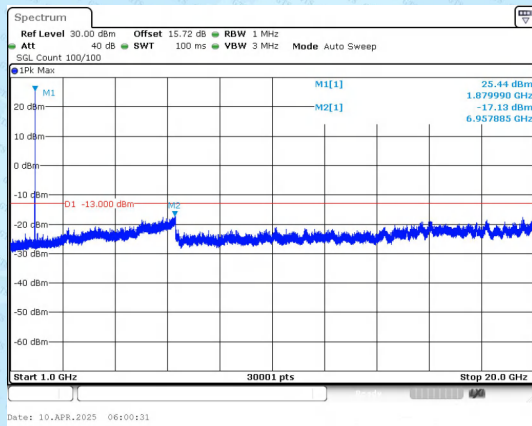


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1880.0/Mid

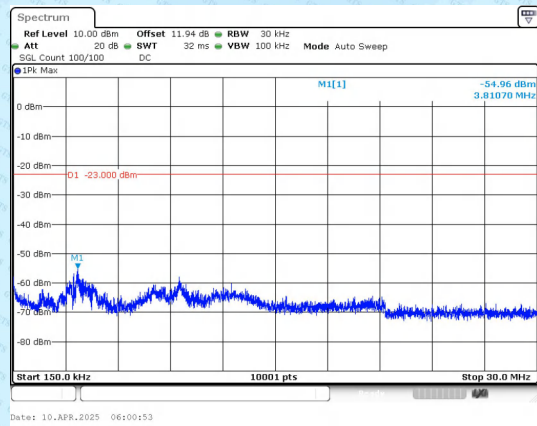


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1850.2/Low

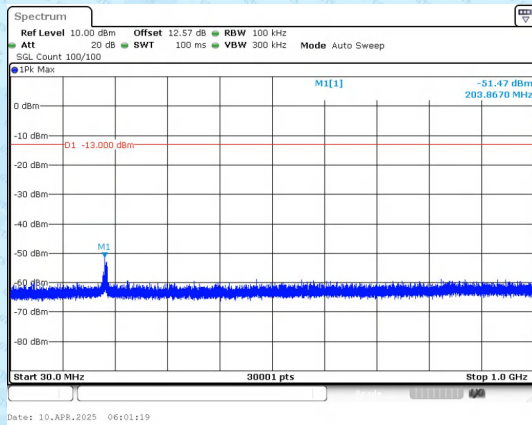

30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1850.2/Low

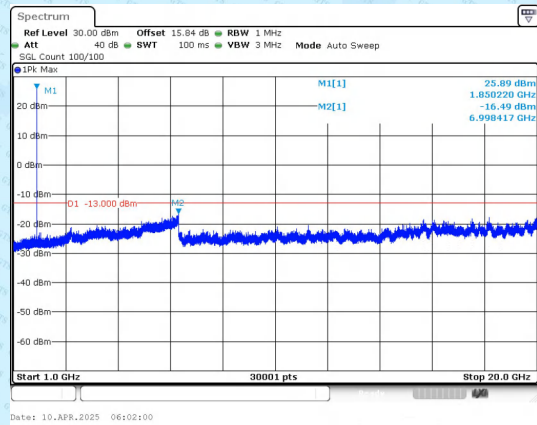


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1850.2/Low


A5-1.Conducted Spurious Emissions GPRS

Band	Channel	Freq (MHz)	PCL	StartFreq (MHz)	StopFreq (MHz)	Slots	Result (dBm)	Limit (dBm)	Verdict
GSM 850	251	848.8	5	0.15	30.0	1 Tx	-63.35	-13	PASS
GSM 850	251	848.8	5	30.0	1000.0	1 Tx	-48.04	-13	PASS
GSM 850	251	848.8	5	1000.0	10000.0	1 Tx	-29.75	-13	PASS
GSM 850	190	836.6	5	0.15	30.0	1 Tx	-63.93	-13	PASS
GSM 850	190	836.6	5	30.0	1000.0	1 Tx	-48.37	-13	PASS
GSM 850	190	836.6	5	1000.0	10000.0	1 Tx	-28.6	-13	PASS
GSM 850	128	824.2	5	0.15	30.0	1 Tx	-63.41	-13	PASS
GSM 850	128	824.2	5	30.0	1000.0	1 Tx	-47.48	-13	PASS
GSM 850	128	824.2	5	1000.0	10000.0	1 Tx	-27.88	-13	PASS
PCS 1900	810	1909.8	0	0.15	30.0	1 Tx	-53.45	-23	PASS
PCS 1900	810	1909.8	0	30.0	1000.0	1 Tx	-56.71	-13	PASS
PCS 1900	810	1909.8	0	1000.0	20000.0	1 Tx	-13.45	-13	PASS
PCS 1900	661	1880.0	0	0.15	30.0	1 Tx	-53.58	-23	PASS
PCS 1900	661	1880.0	0	30.0	1000.0	1 Tx	-57.31	-13	PASS
PCS 1900	661	1880.0	0	1000.0	20000.0	1 Tx	-14.62	-13	PASS
PCS 1900	512	1850.2	0	0.15	30.0	1 Tx	-53.83	-23	PASS
PCS 1900	512	1850.2	0	30.0	1000.0	1 Tx	-56.98	-13	PASS
PCS 1900	512	1850.2	0	1000.0	20000.0	1 Tx	-14.08	-13	PASS

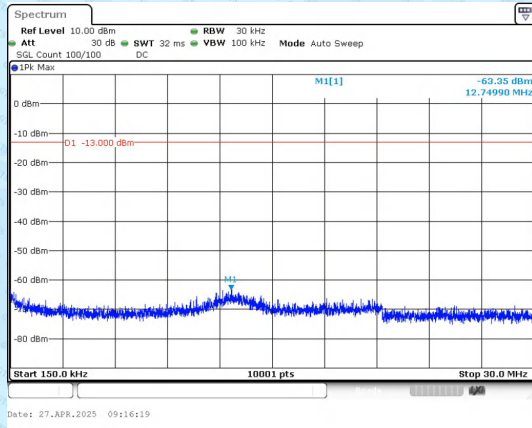


0.15MHz-30.0MHz

GSM 850 0.2MHz/848.8/High

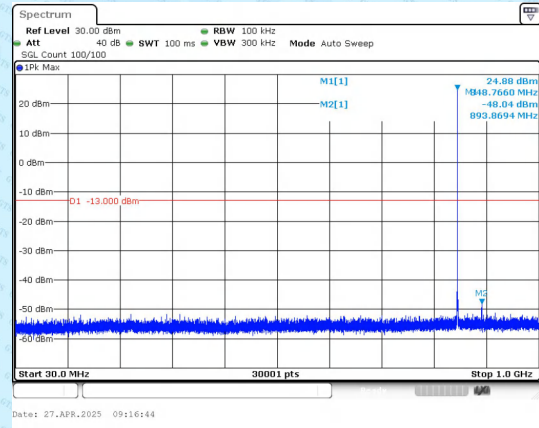


30.0MHz-1000.0MHz

GSM 850 0.2MHz/848.8/High

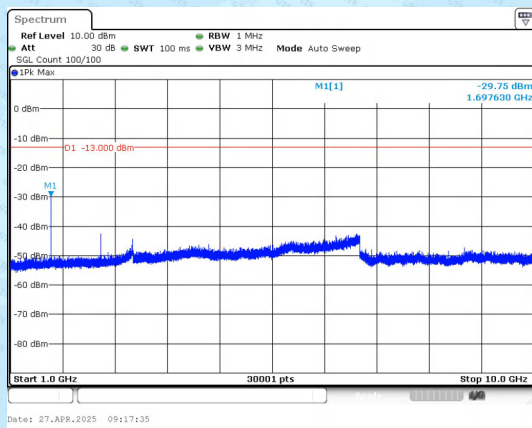


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/848.8/High

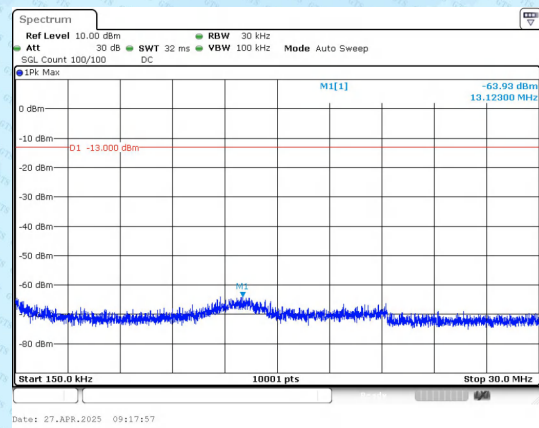


0.15MHz-30.0MHz

GSM 850 0.2MHz/836.6/Mid

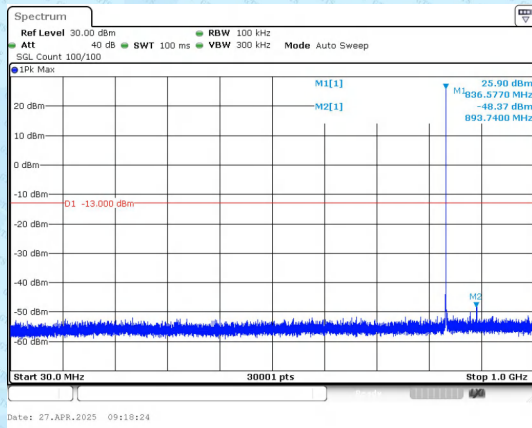


30.0MHz-1000.0MHz

GSM 850 0.2MHz/836.6/Mid

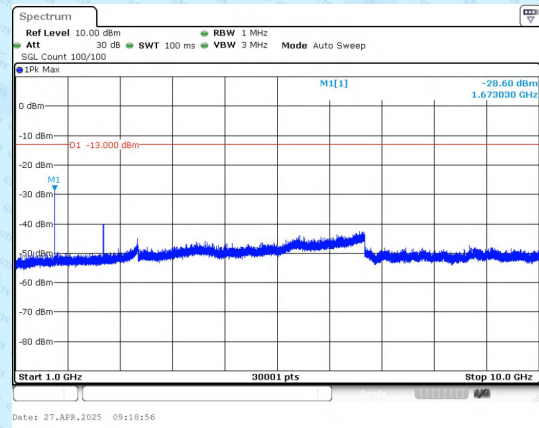


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/836.6/Mid

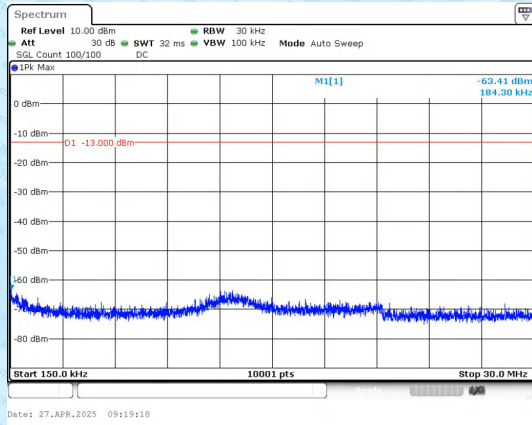


0.15MHz-30.0MHz

GSM 850 0.2MHz/824.2/Low

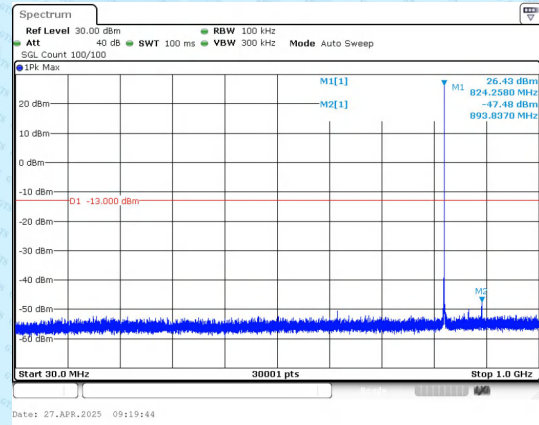


30.0MHz-1000.0MHz

GSM 850 0.2MHz/824.2/Low

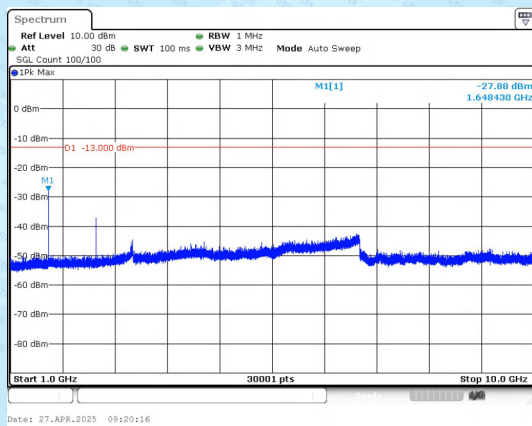


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/824.2/Low

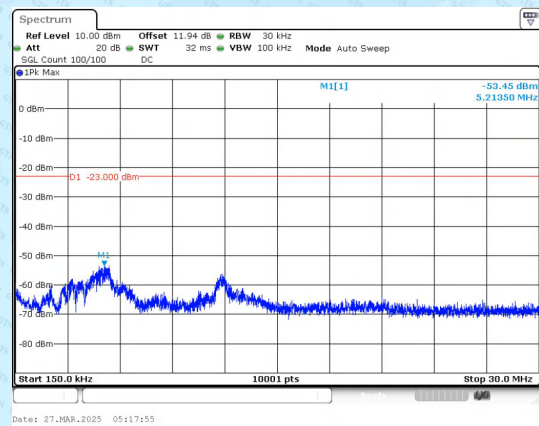


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1909.8/High

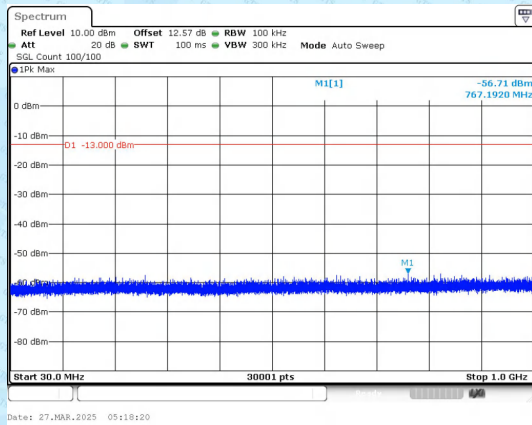


30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1909.8/High

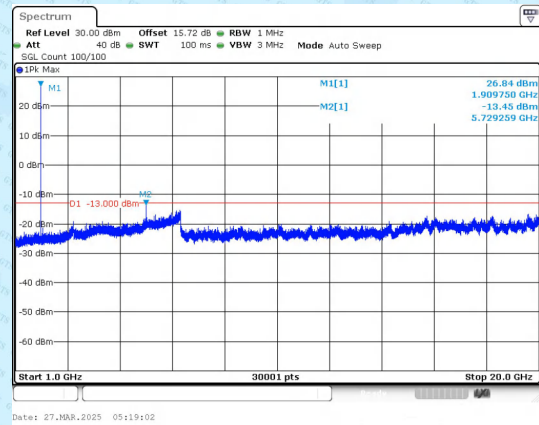


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1909.8/High

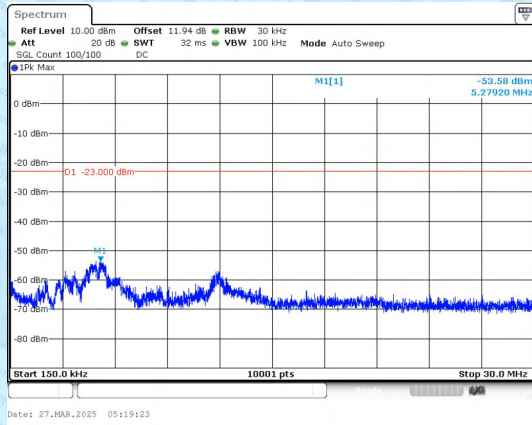


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1880.0/Mid

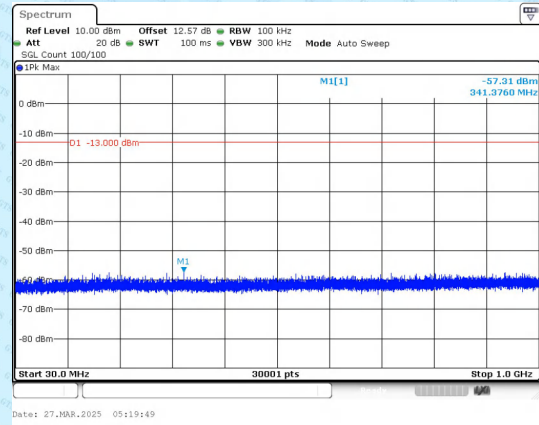


30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1880.0/Mid

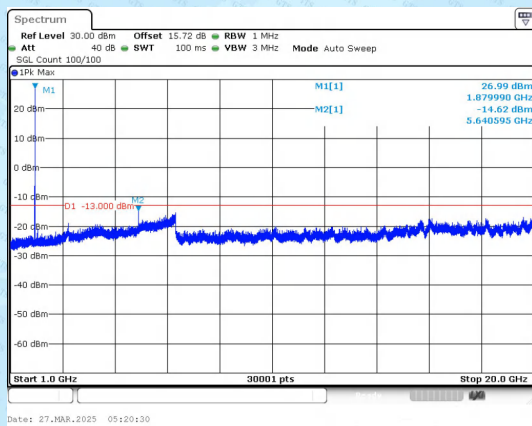


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1880.0/Mid

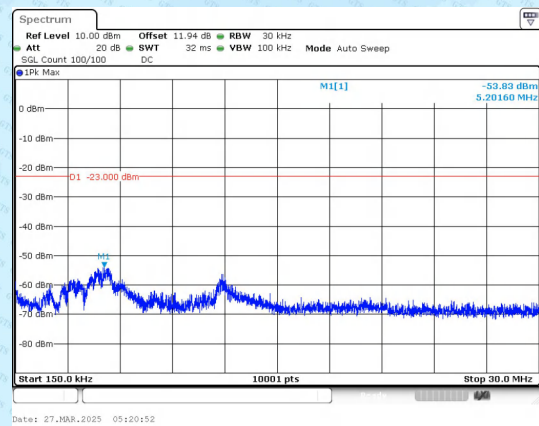


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1850.2/Low

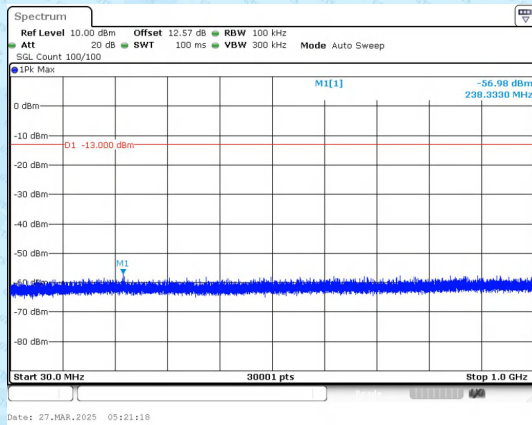

30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1850.2/Low

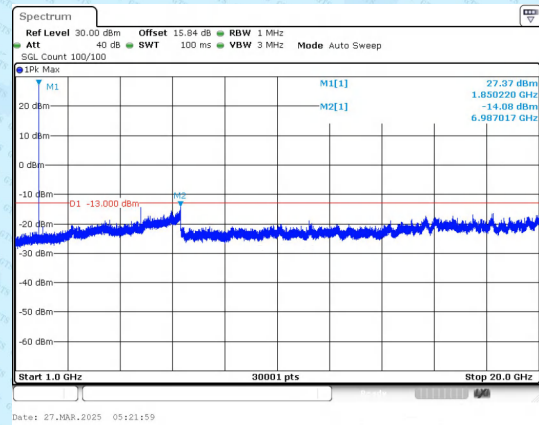


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1850.2/Low


A5-2.Conducted Spurious Emissions EGPRS

Band	Channel	Freq (MHz)	PCL	StartFreq (MHz)	StopFreq (MHz)	Slots	Result (dBm)	Limit (dBm)	Verdict
GSM 850	251	848.8	8	0.15	30.0	1 Tx	-62.76	-13	PASS
GSM 850	251	848.8	8	30.0	1000.0	1 Tx	-47.94	-13	PASS
GSM 850	251	848.8	8	1000.0	10000.0	1 Tx	-29.93	-13	PASS
GSM 850	190	836.6	8	0.15	30.0	1 Tx	-63.39	-13	PASS
GSM 850	190	836.6	8	30.0	1000.0	1 Tx	-48.3	-13	PASS
GSM 850	190	836.6	8	1000.0	10000.0	1 Tx	-28.65	-13	PASS
GSM 850	128	824.2	8	0.15	30.0	1 Tx	-63.57	-13	PASS
GSM 850	128	824.2	8	30.0	1000.0	1 Tx	-48.19	-13	PASS
GSM 850	128	824.2	8	1000.0	10000.0	1 Tx	-27.83	-13	PASS
PCS 1900	810	1909.8	2	0.15	30.0	1 Tx	-54.29	-23	PASS
PCS 1900	810	1909.8	2	30.0	1000.0	1 Tx	-56.85	-13	PASS
PCS 1900	810	1909.8	2	1000.0	20000.0	1 Tx	-14.84	-13	PASS
PCS 1900	661	1880.0	2	0.15	30.0	1 Tx	-54.08	-23	PASS
PCS 1900	661	1880.0	2	30.0	1000.0	1 Tx	-57.26	-13	PASS
PCS 1900	661	1880.0	2	1000.0	20000.0	1 Tx	-15.21	-13	PASS
PCS 1900	512	1850.2	2	0.15	30.0	1 Tx	-53.48	-23	PASS
PCS 1900	512	1850.2	2	30.0	1000.0	1 Tx	-57.09	-13	PASS
PCS 1900	512	1850.2	2	1000.0	20000.0	1 Tx	-15.26	-13	PASS

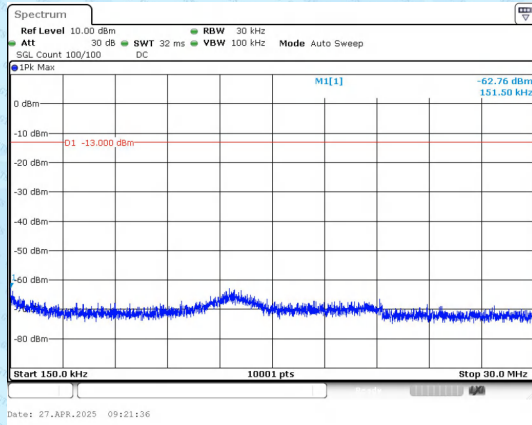


0.15MHz-30.0MHz

GSM 850 0.2MHz/848.8/High

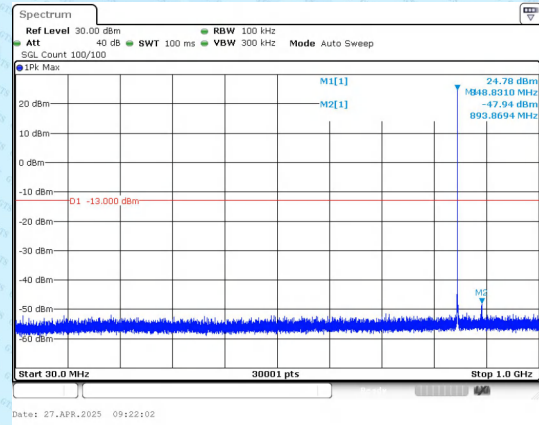


30.0MHz-1000.0MHz

GSM 850 0.2MHz/848.8/High

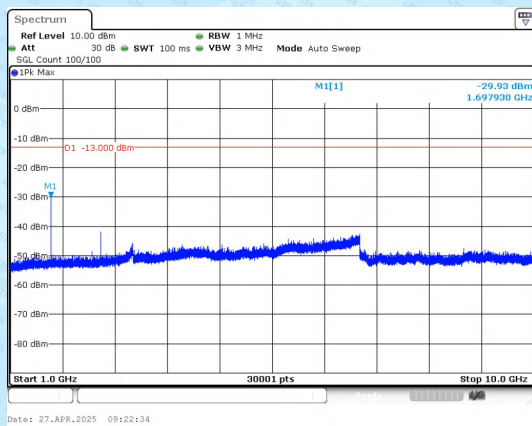


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/848.8/High

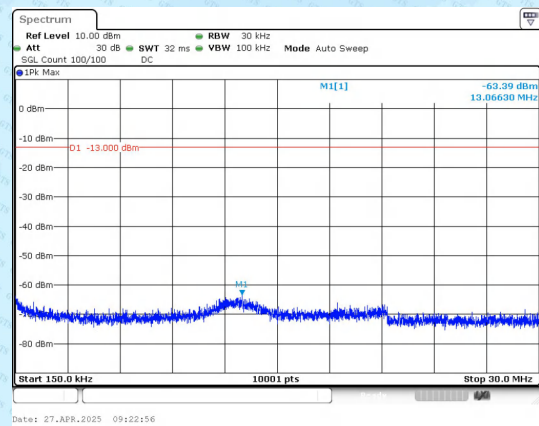


0.15MHz-30.0MHz

GSM 850 0.2MHz/836.6/Mid

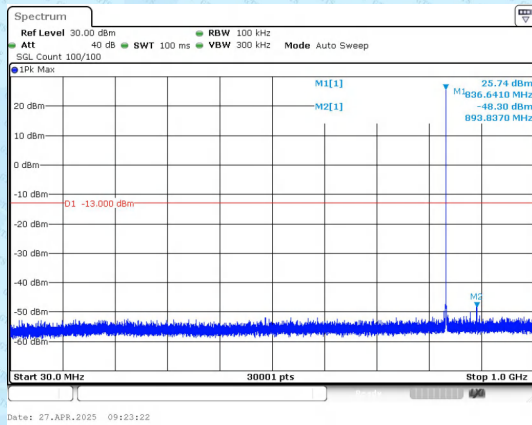


30.0MHz-1000.0MHz

GSM 850 0.2MHz/836.6/Mid

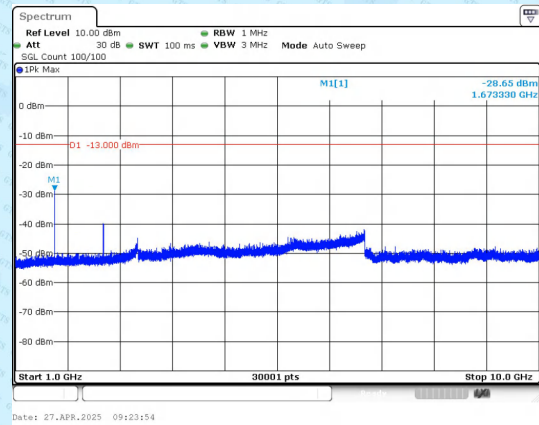


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/836.6/Mid

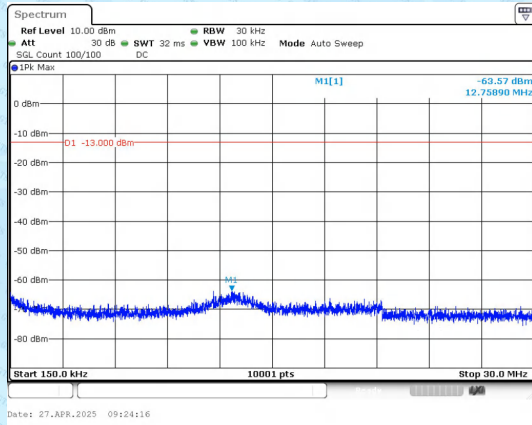


0.15MHz-30.0MHz

GSM 850 0.2MHz/824.2/Low

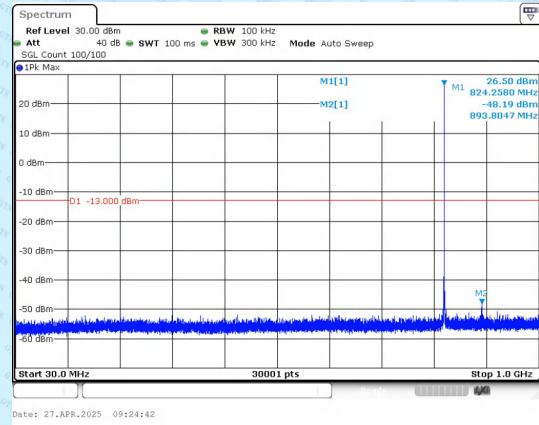


30.0MHz-1000.0MHz

GSM 850 0.2MHz/824.2/Low

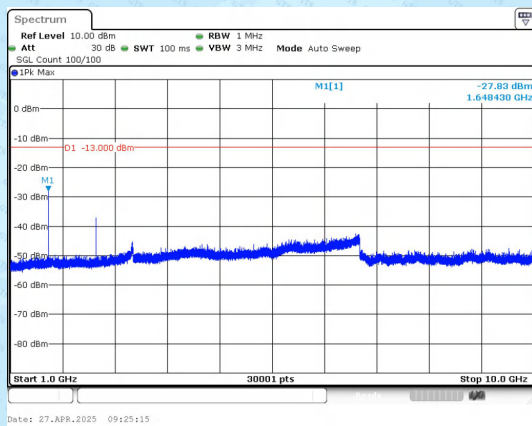


1000.0MHz-10000.0MHz

GSM 850 0.2MHz/824.2/Low

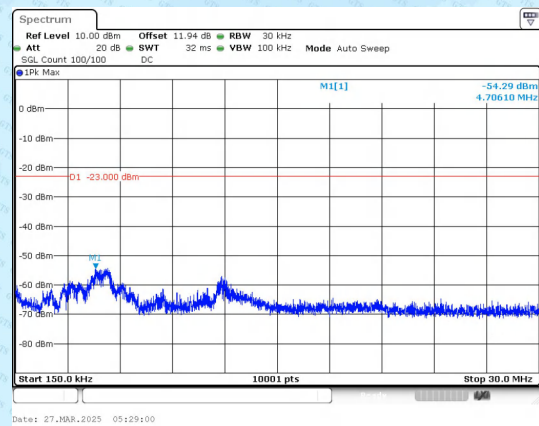


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1909.8/High

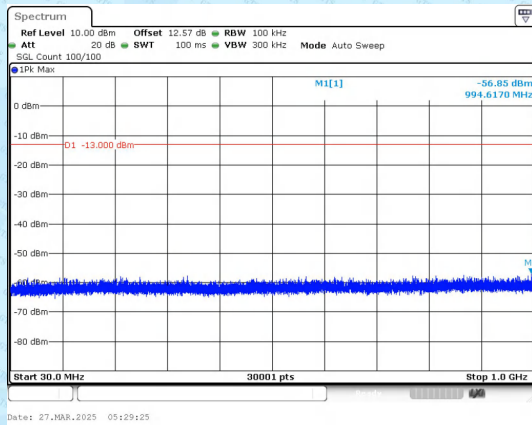


30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1909.8/High

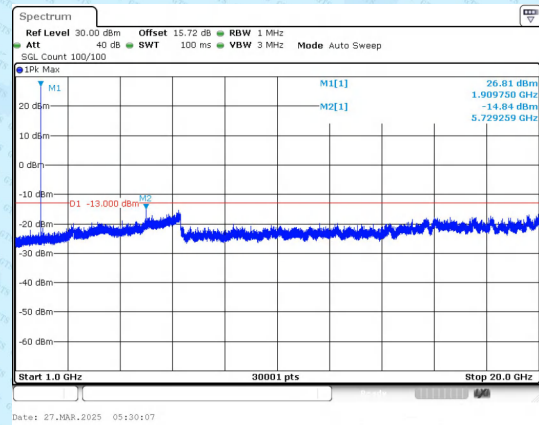


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1909.8/High

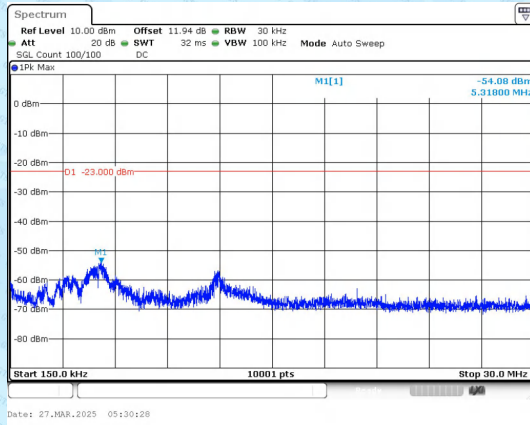


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1880.0/Mid

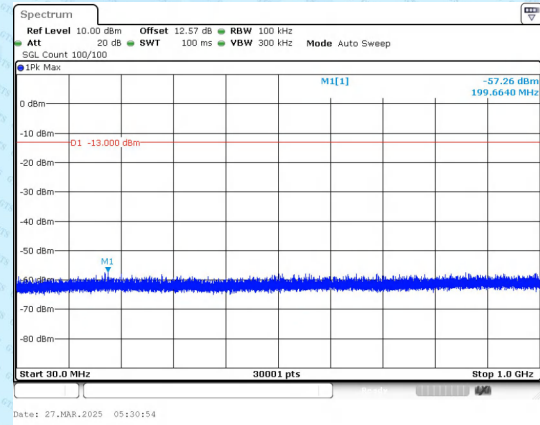


30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1880.0/Mid

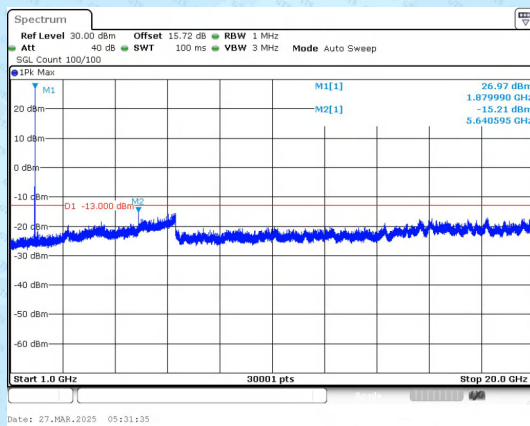


1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1880.0/Mid

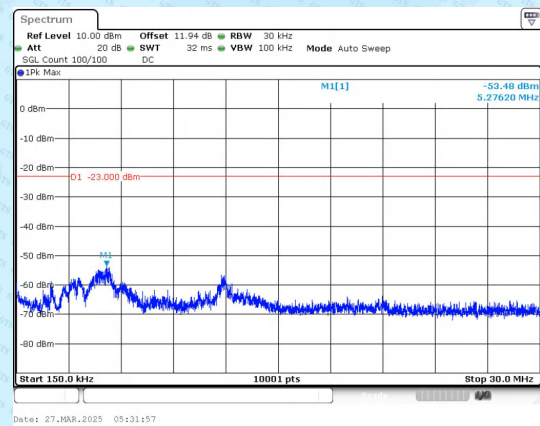


0.15MHz-30.0MHz

PCS 1900 0.2MHz/1850.2/Low

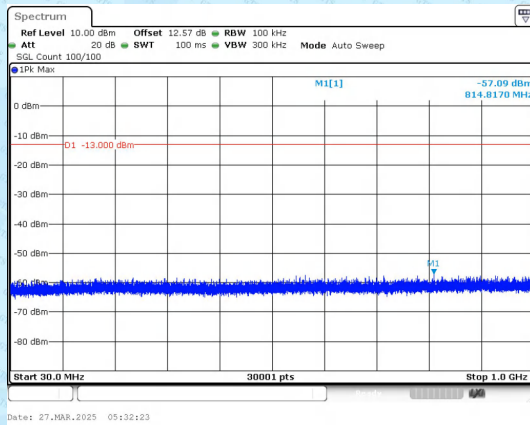

30.0MHz-1000.0MHz

PCS 1900 0.2MHz/1850.2/Low

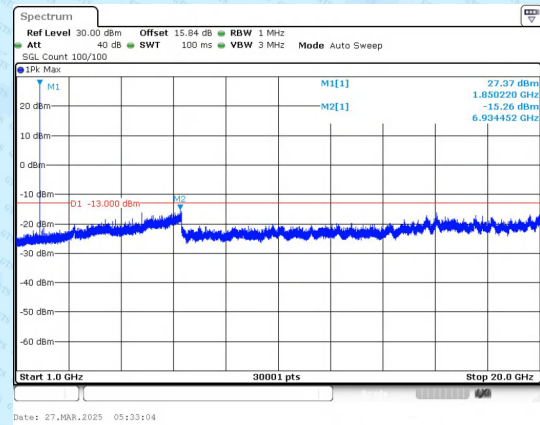

1000.0MHz-20000.0MHz

PCS 1900 0.2MHz/1850.2/Low

A6.Frequency Stability

Band	Channel	Freq (MHz)	Deviation (Hz)	Deviation (ppm)	Limit(ppm)	Verdict	Environment
GSM 850	251	848.8	-10.43	-0.01229	±2.5	PASS	Vibration
GSM 850	251	848.8	-5.26	-0.0062	±2.5	PASS	Humidity
GSM 850	251	848.8	-7.36	-0.00867	±2.5	PASS	VL
GSM 850	251	848.8	-7.52	-0.00886	±2.5	PASS	VN
GSM 850	251	848.8	-6.62	-0.0078	±2.5	PASS	VH
GSM 850	251	848.8	-6.1	-0.00719	±2.5	PASS	-30℃
GSM 850	251	848.8	-4.13	-0.00487	±2.5	PASS	-20℃
GSM 850	251	848.8	-5.0	-0.0059	±2.5	PASS	-10℃
GSM 850	251	848.8	-4.39	-0.00517	±2.5	PASS	0℃
GSM 850	251	848.8	-2.13	-0.00251	±2.5	PASS	10℃
GSM 850	251	848.8	-7.1	-0.00837	±2.5	PASS	20℃
GSM 850	251	848.8	-5.52	-0.0065	±2.5	PASS	30℃
GSM 850	251	848.8	-0.39	-0.00046	±2.5	PASS	40℃
GSM 850	251	848.8	-3.62	-0.00426	±2.5	PASS	50℃
GSM 850	190	836.6	-4.0	-0.00479	±2.5	PASS	Vibration
GSM 850	190	836.6	-5.04	-0.00602	±2.5	PASS	Humidity
GSM 850	190	836.6	-3.45	-0.00413	±2.5	PASS	VL
GSM 850	190	836.6	-3.16	-0.00378	±2.5	PASS	VN
GSM 850	190	836.6	-2.68	-0.0032	±2.5	PASS	VH
GSM 850	190	836.6	-2.94	-0.00351	±2.5	PASS	-30℃
GSM 850	190	836.6	-2.58	-0.00309	±2.5	PASS	-20℃
GSM 850	190	836.6	-2.0	-0.00239	±2.5	PASS	-10℃
GSM 850	190	836.6	-3.23	-0.00386	±2.5	PASS	0℃
GSM 850	190	836.6	-1.19	-0.00143	±2.5	PASS	10℃
GSM 850	190	836.6	-3.23	-0.00386	±2.5	PASS	20℃
GSM 850	190	836.6	-4.26	-0.00509	±2.5	PASS	30℃
GSM 850	190	836.6	-7.72	-0.00922	±2.5	PASS	40℃
GSM 850	190	836.6	-5.46	-0.00652	±2.5	PASS	50℃
GSM 850	128	824.2	-3.36	-0.00407	±2.5	PASS	Vibration
GSM 850	128	824.2	-5.59	-0.00678	±2.5	PASS	Humidity
GSM 850	128	824.2	-1.58	-0.00192	±2.5	PASS	VL
GSM 850	128	824.2	-5.23	-0.00635	±2.5	PASS	VN
GSM 850	128	824.2	-5.33	-0.00646	±2.5	PASS	VH
GSM 850	128	824.2	-4.88	-0.00592	±2.5	PASS	-30℃
GSM 850	128	824.2	-2.42	-0.00294	±2.5	PASS	-20℃
GSM 850	128	824.2	-1.65	-0.002	±2.5	PASS	-10℃
GSM 850	128	824.2	-3.07	-0.00372	±2.5	PASS	0℃
GSM 850	128	824.2	-4.88	-0.00592	±2.5	PASS	10℃
GSM 850	128	824.2	-7.36	-0.00893	±2.5	PASS	20℃
GSM 850	128	824.2	-2.45	-0.00298	±2.5	PASS	30℃
GSM 850	128	824.2	-3.65	-0.00443	±2.5	PASS	40℃

GSM 850	128	824.2	-5.91	-0.00717	±2.5	PASS	50℃
PCS 1900	810	1909.8	-1.71	-0.0009	±2.5	PASS	Vibration
PCS 1900	810	1909.8	-9.01	-0.00472	±2.5	PASS	Humidity
PCS 1900	810	1909.8	-5.65	-0.00296	±2.5	PASS	VL
PCS 1900	810	1909.8	-7.17	-0.00375	±2.5	PASS	VN
PCS 1900	810	1909.8	-6.97	-0.00365	±2.5	PASS	VH
PCS 1900	810	1909.8	-12.14	-0.00636	±2.5	PASS	-30℃
PCS 1900	810	1909.8	-9.23	-0.00483	±2.5	PASS	-20℃
PCS 1900	810	1909.8	-7.17	-0.00375	±2.5	PASS	-10℃
PCS 1900	810	1909.8	-10.33	-0.00541	±2.5	PASS	0℃
PCS 1900	810	1909.8	-6.13	-0.00321	±2.5	PASS	10℃
PCS 1900	810	1909.8	-13.3	-0.00697	±2.5	PASS	20℃
PCS 1900	810	1909.8	-10.43	-0.00546	±2.5	PASS	30℃
PCS 1900	810	1909.8	-10.78	-0.00565	±2.5	PASS	40℃
PCS 1900	810	1909.8	-7.14	-0.00374	±2.5	PASS	50℃
PCS 1900	661	1880.0	-3.49	-0.00185	±2.5	PASS	Vibration
PCS 1900	661	1880.0	-0.45	-0.00024	±2.5	PASS	Humidity
PCS 1900	661	1880.0	-4.13	-0.0022	±2.5	PASS	VL
PCS 1900	661	1880.0	-6.01	-0.00319	±2.5	PASS	VN
PCS 1900	661	1880.0	1.0	0.00053	±2.5	PASS	VH
PCS 1900	661	1880.0	-6.3	-0.00335	±2.5	PASS	-30℃
PCS 1900	661	1880.0	-2.91	-0.00155	±2.5	PASS	-20℃
PCS 1900	661	1880.0	-4.68	-0.00249	±2.5	PASS	-10℃
PCS 1900	661	1880.0	-6.39	-0.0034	±2.5	PASS	0℃
PCS 1900	661	1880.0	-6.55	-0.00349	±2.5	PASS	10℃
PCS 1900	661	1880.0	-3.36	-0.00179	±2.5	PASS	20℃
PCS 1900	661	1880.0	-3.07	-0.00163	±2.5	PASS	30℃
PCS 1900	661	1880.0	-3.23	-0.00172	±2.5	PASS	40℃
PCS 1900	661	1880.0	-6.55	-0.00349	±2.5	PASS	50℃
PCS 1900	512	1850.2	-7.2	-0.00389	±2.5	PASS	Vibration
PCS 1900	512	1850.2	-7.01	-0.00379	±2.5	PASS	Humidity
PCS 1900	512	1850.2	-8.56	-0.00462	±2.5	PASS	VL
PCS 1900	512	1850.2	-6.39	-0.00346	±2.5	PASS	VN
PCS 1900	512	1850.2	-5.0	-0.0027	±2.5	PASS	VH
PCS 1900	512	1850.2	-6.59	-0.00356	±2.5	PASS	-30℃
PCS 1900	512	1850.2	-6.2	-0.00335	±2.5	PASS	-20℃
PCS 1900	512	1850.2	-7.81	-0.00422	±2.5	PASS	-10℃
PCS 1900	512	1850.2	-5.36	-0.0029	±2.5	PASS	0℃
PCS 1900	512	1850.2	-1.13	-0.00061	±2.5	PASS	10℃
PCS 1900	512	1850.2	-6.46	-0.00349	±2.5	PASS	20℃
PCS 1900	512	1850.2	-3.75	-0.00202	±2.5	PASS	30℃
PCS 1900	512	1850.2	-2.94	-0.00159	±2.5	PASS	40℃
PCS 1900	512	1850.2	-7.43	-0.00401	±2.5	PASS	50℃

A6-1.Frequency Stability GPRS

Band	Channel	Freq (MHz)	Slots	Deviation (Hz)	Deviation (ppm)	Limit(ppm)	Verdict	Environment
GSM 850	251	848.8	1 Tx	-11.04	-0.01301	±2.5	PASS	Vibration
GSM 850	251	848.8	1 Tx	-11.04	-0.01301	±2.5	PASS	Humidity
GSM 850	251	848.8	1 Tx	-10.07	-0.01187	±2.5	PASS	VL
GSM 850	251	848.8	1 Tx	-8.62	-0.01016	±2.5	PASS	VN
GSM 850	251	848.8	1 Tx	-8.65	-0.01019	±2.5	PASS	VH
GSM 850	251	848.8	1 Tx	-9.65	-0.01137	±2.5	PASS	-30℃
GSM 850	251	848.8	1 Tx	-7.72	-0.00909	±2.5	PASS	-20℃
GSM 850	251	848.8	1 Tx	-10.17	-0.01198	±2.5	PASS	-10℃
GSM 850	251	848.8	1 Tx	-8.01	-0.00943	±2.5	PASS	0℃
GSM 850	251	848.8	1 Tx	-7.04	-0.00829	±2.5	PASS	10℃
GSM 850	251	848.8	1 Tx	-8.43	-0.00993	±2.5	PASS	20℃
GSM 850	251	848.8	1 Tx	-5.26	-0.0062	±2.5	PASS	30℃
GSM 850	251	848.8	1 Tx	-9.75	-0.01149	±2.5	PASS	40℃
GSM 850	251	848.8	1 Tx	-19.08	-0.02248	±2.5	PASS	50℃
GSM 850	190	836.6	1 Tx	-8.56	-0.01023	±2.5	PASS	Vibration
GSM 850	190	836.6	1 Tx	-8.88	-0.01061	±2.5	PASS	Humidity
GSM 850	190	836.6	1 Tx	-7.33	-0.00876	±2.5	PASS	VL
GSM 850	190	836.6	1 Tx	-7.65	-0.00915	±2.5	PASS	VN
GSM 850	190	836.6	1 Tx	-3.87	-0.00463	±2.5	PASS	VH
GSM 850	190	836.6	1 Tx	-8.78	-0.0105	±2.5	PASS	-30℃
GSM 850	190	836.6	1 Tx	-8.33	-0.00996	±2.5	PASS	-20℃
GSM 850	190	836.6	1 Tx	-5.71	-0.00683	±2.5	PASS	-10℃
GSM 850	190	836.6	1 Tx	-5.13	-0.00614	±2.5	PASS	0℃
GSM 850	190	836.6	1 Tx	-8.17	-0.00976	±2.5	PASS	10℃
GSM 850	190	836.6	1 Tx	-7.81	-0.00934	±2.5	PASS	20℃
GSM 850	190	836.6	1 Tx	-9.88	-0.01181	±2.5	PASS	30℃
GSM 850	190	836.6	1 Tx	-6.23	-0.00745	±2.5	PASS	40℃
GSM 850	190	836.6	1 Tx	-5.36	-0.00641	±2.5	PASS	50℃
GSM 850	128	824.2	1 Tx	-7.85	-0.00952	±2.5	PASS	Vibration
GSM 850	128	824.2	1 Tx	-3.71	-0.0045	±2.5	PASS	Humidity
GSM 850	128	824.2	1 Tx	-8.81	-0.01069	±2.5	PASS	VL
GSM 850	128	824.2	1 Tx	-6.62	-0.00803	±2.5	PASS	VN
GSM 850	128	824.2	1 Tx	-5.0	-0.00607	±2.5	PASS	VH
GSM 850	128	824.2	1 Tx	-7.01	-0.0085	±2.5	PASS	-30℃
GSM 850	128	824.2	1 Tx	-8.68	-0.01054	±2.5	PASS	-20℃
GSM 850	128	824.2	1 Tx	-6.55	-0.00795	±2.5	PASS	-10℃
GSM 850	128	824.2	1 Tx	-4.88	-0.00592	±2.5	PASS	0℃
GSM 850	128	824.2	1 Tx	-5.94	-0.00721	±2.5	PASS	10℃
GSM 850	128	824.2	1 Tx	-6.49	-0.00787	±2.5	PASS	20℃
GSM 850	128	824.2	1 Tx	-6.39	-0.00776	±2.5	PASS	30℃
GSM 850	128	824.2	1 Tx	-6.81	-0.00827	±2.5	PASS	40℃

GSM 850	128	824.2	1 Tx	-4.42	-0.00537	±2.5	PASS	50℃
PCS 1900	810	1909.8	1 Tx	-9.46	-0.00495	±2.5	PASS	Vibration
PCS 1900	810	1909.8	1 Tx	-19.47	-0.01019	±2.5	PASS	Humidity
PCS 1900	810	1909.8	1 Tx	-19.05	-0.00997	±2.5	PASS	VL
PCS 1900	810	1909.8	1 Tx	-17.82	-0.00933	±2.5	PASS	VN
PCS 1900	810	1909.8	1 Tx	-9.33	-0.00489	±2.5	PASS	VH
PCS 1900	810	1909.8	1 Tx	-17.5	-0.00916	±2.5	PASS	-30℃
PCS 1900	810	1909.8	1 Tx	-12.62	-0.00661	±2.5	PASS	-20℃
PCS 1900	810	1909.8	1 Tx	-16.34	-0.00855	±2.5	PASS	-10℃
PCS 1900	810	1909.8	1 Tx	-9.49	-0.00497	±2.5	PASS	0℃
PCS 1900	810	1909.8	1 Tx	-12.69	-0.00664	±2.5	PASS	10℃
PCS 1900	810	1909.8	1 Tx	-15.27	-0.008	±2.5	PASS	20℃
PCS 1900	810	1909.8	1 Tx	-12.69	-0.00664	±2.5	PASS	30℃
PCS 1900	810	1909.8	1 Tx	-13.17	-0.0069	±2.5	PASS	40℃
PCS 1900	810	1909.8	1 Tx	-12.07	-0.00632	±2.5	PASS	50℃
PCS 1900	661	1880.0	1 Tx	-7.46	-0.00397	±2.5	PASS	Vibration
PCS 1900	661	1880.0	1 Tx	-4.62	-0.00246	±2.5	PASS	Humidity
PCS 1900	661	1880.0	1 Tx	-8.46	-0.0045	±2.5	PASS	VL
PCS 1900	661	1880.0	1 Tx	-8.07	-0.00429	±2.5	PASS	VN
PCS 1900	661	1880.0	1 Tx	-8.91	-0.00474	±2.5	PASS	VH
PCS 1900	661	1880.0	1 Tx	-10.23	-0.00544	±2.5	PASS	-30℃
PCS 1900	661	1880.0	1 Tx	-4.29	-0.00228	±2.5	PASS	-20℃
PCS 1900	661	1880.0	1 Tx	-11.49	-0.00611	±2.5	PASS	-10℃
PCS 1900	661	1880.0	1 Tx	-7.81	-0.00416	±2.5	PASS	0℃
PCS 1900	661	1880.0	1 Tx	-9.3	-0.00495	±2.5	PASS	10℃
PCS 1900	661	1880.0	1 Tx	-6.3	-0.00335	±2.5	PASS	20℃
PCS 1900	661	1880.0	1 Tx	-6.42	-0.00342	±2.5	PASS	30℃
PCS 1900	661	1880.0	1 Tx	-7.39	-0.00393	±2.5	PASS	40℃
PCS 1900	661	1880.0	1 Tx	-2.39	-0.00127	±2.5	PASS	50℃
PCS 1900	512	1850.2	1 Tx	-6.01	-0.00325	±2.5	PASS	Vibration
PCS 1900	512	1850.2	1 Tx	-10.3	-0.00557	±2.5	PASS	Humidity
PCS 1900	512	1850.2	1 Tx	-12.75	-0.00689	±2.5	PASS	VL
PCS 1900	512	1850.2	1 Tx	-6.3	-0.0034	±2.5	PASS	VN
PCS 1900	512	1850.2	1 Tx	-8.04	-0.00435	±2.5	PASS	VH
PCS 1900	512	1850.2	1 Tx	-8.3	-0.00448	±2.5	PASS	-30℃
PCS 1900	512	1850.2	1 Tx	-10.62	-0.00574	±2.5	PASS	-20℃
PCS 1900	512	1850.2	1 Tx	-8.62	-0.00466	±2.5	PASS	-10℃
PCS 1900	512	1850.2	1 Tx	-7.23	-0.00391	±2.5	PASS	0℃
PCS 1900	512	1850.2	1 Tx	-3.33	-0.0018	±2.5	PASS	10℃
PCS 1900	512	1850.2	1 Tx	-7.01	-0.00379	±2.5	PASS	20℃
PCS 1900	512	1850.2	1 Tx	-9.3	-0.00503	±2.5	PASS	30℃
PCS 1900	512	1850.2	1 Tx	-9.52	-0.00515	±2.5	PASS	40℃
PCS 1900	512	1850.2	1 Tx	-6.33	-0.00342	±2.5	PASS	50℃

A6-2.Frequency Stability EGPRS

Band	Channel	Freq (MHz)	Slots	Deviation (Hz)	Deviation (ppm)	Limit(ppm)	Verdict	Environment
GSM 850	251	848.8	1 Tx	-12.72	-0.01499	±2.5	PASS	Vibration
GSM 850	251	848.8	1 Tx	-11.2	-0.0132	±2.5	PASS	Humidity
GSM 850	251	848.8	1 Tx	-11.11	-0.01308	±2.5	PASS	VL
GSM 850	251	848.8	1 Tx	-8.91	-0.0105	±2.5	PASS	VN
GSM 850	251	848.8	1 Tx	-8.23	-0.0097	±2.5	PASS	VH
GSM 850	251	848.8	1 Tx	-6.78	-0.00799	±2.5	PASS	-30℃
GSM 850	251	848.8	1 Tx	-6.17	-0.00727	±2.5	PASS	-20℃
GSM 850	251	848.8	1 Tx	-8.33	-0.00981	±2.5	PASS	-10℃
GSM 850	251	848.8	1 Tx	-8.17	-0.00962	±2.5	PASS	0℃
GSM 850	251	848.8	1 Tx	-5.59	-0.00658	±2.5	PASS	10℃
GSM 850	251	848.8	1 Tx	-7.33	-0.00863	±2.5	PASS	20℃
GSM 850	251	848.8	1 Tx	-6.88	-0.0081	±2.5	PASS	30℃
GSM 850	251	848.8	1 Tx	-12.43	-0.01464	±2.5	PASS	40℃
GSM 850	251	848.8	1 Tx	-15.66	-0.01845	±2.5	PASS	50℃
GSM 850	190	836.6	1 Tx	-6.59	-0.00787	±2.5	PASS	Vibration
GSM 850	190	836.6	1 Tx	-8.68	-0.01038	±2.5	PASS	Humidity
GSM 850	190	836.6	1 Tx	-5.46	-0.00652	±2.5	PASS	VL
GSM 850	190	836.6	1 Tx	-5.46	-0.00652	±2.5	PASS	VN
GSM 850	190	836.6	1 Tx	-7.14	-0.00853	±2.5	PASS	VH
GSM 850	190	836.6	1 Tx	-7.33	-0.00876	±2.5	PASS	-30℃
GSM 850	190	836.6	1 Tx	-4.42	-0.00529	±2.5	PASS	-20℃
GSM 850	190	836.6	1 Tx	-6.88	-0.00822	±2.5	PASS	-10℃
GSM 850	190	836.6	1 Tx	-5.75	-0.00687	±2.5	PASS	0℃
GSM 850	190	836.6	1 Tx	-7.43	-0.00888	±2.5	PASS	10℃
GSM 850	190	836.6	1 Tx	-6.01	-0.00718	±2.5	PASS	20℃
GSM 850	190	836.6	1 Tx	-9.65	-0.01154	±2.5	PASS	30℃
GSM 850	190	836.6	1 Tx	-4.23	-0.00506	±2.5	PASS	40℃
GSM 850	190	836.6	1 Tx	-8.78	-0.0105	±2.5	PASS	50℃
GSM 850	128	824.2	1 Tx	-7.49	-0.00909	±2.5	PASS	Vibration
GSM 850	128	824.2	1 Tx	-5.59	-0.00678	±2.5	PASS	Humidity
GSM 850	128	824.2	1 Tx	-6.13	-0.00744	±2.5	PASS	VL
GSM 850	128	824.2	1 Tx	-7.94	-0.00964	±2.5	PASS	VN
GSM 850	128	824.2	1 Tx	-8.33	-0.01011	±2.5	PASS	VH
GSM 850	128	824.2	1 Tx	-4.94	-0.00599	±2.5	PASS	-30℃
GSM 850	128	824.2	1 Tx	-5.23	-0.00635	±2.5	PASS	-20℃
GSM 850	128	824.2	1 Tx	-6.68	-0.00811	±2.5	PASS	-10℃
GSM 850	128	824.2	1 Tx	-6.04	-0.00733	±2.5	PASS	0℃
GSM 850	128	824.2	1 Tx	-8.59	-0.01042	±2.5	PASS	10℃
GSM 850	128	824.2	1 Tx	-7.72	-0.00936	±2.5	PASS	20℃
GSM 850	128	824.2	1 Tx	-6.1	-0.0074	±2.5	PASS	30℃
GSM 850	128	824.2	1 Tx	-6.1	-0.0074	±2.5	PASS	40℃

GSM 850	128	824.2	1 Tx	-5.78	-0.00701	±2.5	PASS	50℃
PCS 1900	810	1909.8	1 Tx	-12.11	-0.00634	±2.5	PASS	Vibration
PCS 1900	810	1909.8	1 Tx	-16.63	-0.00871	±2.5	PASS	Humidity
PCS 1900	810	1909.8	1 Tx	-17.5	-0.00916	±2.5	PASS	VL
PCS 1900	810	1909.8	1 Tx	-17.24	-0.00903	±2.5	PASS	VN
PCS 1900	810	1909.8	1 Tx	-11.11	-0.00582	±2.5	PASS	VH
PCS 1900	810	1909.8	1 Tx	-11.49	-0.00602	±2.5	PASS	-30℃
PCS 1900	810	1909.8	1 Tx	-13.56	-0.0071	±2.5	PASS	-20℃
PCS 1900	810	1909.8	1 Tx	-8.62	-0.00451	±2.5	PASS	-10℃
PCS 1900	810	1909.8	1 Tx	-12.72	-0.00666	±2.5	PASS	0℃
PCS 1900	810	1909.8	1 Tx	-11.98	-0.00627	±2.5	PASS	10℃
PCS 1900	810	1909.8	1 Tx	-12.72	-0.00666	±2.5	PASS	20℃
PCS 1900	810	1909.8	1 Tx	-10.82	-0.00566	±2.5	PASS	30℃
PCS 1900	810	1909.8	1 Tx	-14.79	-0.00774	±2.5	PASS	40℃
PCS 1900	810	1909.8	1 Tx	-14.24	-0.00746	±2.5	PASS	50℃
PCS 1900	661	1880.0	1 Tx	-9.27	-0.00493	±2.5	PASS	Vibration
PCS 1900	661	1880.0	1 Tx	-6.26	-0.00333	±2.5	PASS	Humidity
PCS 1900	661	1880.0	1 Tx	-7.23	-0.00385	±2.5	PASS	VL
PCS 1900	661	1880.0	1 Tx	-6.2	-0.0033	±2.5	PASS	VN
PCS 1900	661	1880.0	1 Tx	-9.81	-0.00522	±2.5	PASS	VH
PCS 1900	661	1880.0	1 Tx	-6.84	-0.00364	±2.5	PASS	-30℃
PCS 1900	661	1880.0	1 Tx	-4.04	-0.00215	±2.5	PASS	-20℃
PCS 1900	661	1880.0	1 Tx	-9.3	-0.00495	±2.5	PASS	-10℃
PCS 1900	661	1880.0	1 Tx	-8.88	-0.00472	±2.5	PASS	0℃
PCS 1900	661	1880.0	1 Tx	-8.46	-0.0045	±2.5	PASS	10℃
PCS 1900	661	1880.0	1 Tx	-3.94	-0.0021	±2.5	PASS	20℃
PCS 1900	661	1880.0	1 Tx	-7.85	-0.00417	±2.5	PASS	30℃
PCS 1900	661	1880.0	1 Tx	-6.13	-0.00326	±2.5	PASS	40℃
PCS 1900	661	1880.0	1 Tx	-7.04	-0.00374	±2.5	PASS	50℃
PCS 1900	512	1850.2	1 Tx	-10.72	-0.00579	±2.5	PASS	Vibration
PCS 1900	512	1850.2	1 Tx	-11.53	-0.00623	±2.5	PASS	Humidity
PCS 1900	512	1850.2	1 Tx	-11.46	-0.00619	±2.5	PASS	VL
PCS 1900	512	1850.2	1 Tx	-10.78	-0.00583	±2.5	PASS	VN
PCS 1900	512	1850.2	1 Tx	-8.91	-0.00482	±2.5	PASS	VH
PCS 1900	512	1850.2	1 Tx	-9.27	-0.00501	±2.5	PASS	-30℃
PCS 1900	512	1850.2	1 Tx	-10.33	-0.00558	±2.5	PASS	-20℃
PCS 1900	512	1850.2	1 Tx	-12.69	-0.00686	±2.5	PASS	-10℃
PCS 1900	512	1850.2	1 Tx	-13.75	-0.00743	±2.5	PASS	0℃
PCS 1900	512	1850.2	1 Tx	-7.39	-0.004	±2.5	PASS	10℃
PCS 1900	512	1850.2	1 Tx	-13.75	-0.00743	±2.5	PASS	20℃
PCS 1900	512	1850.2	1 Tx	-12.98	-0.00701	±2.5	PASS	30℃
PCS 1900	512	1850.2	1 Tx	-9.49	-0.00513	±2.5	PASS	40℃
PCS 1900	512	1850.2	1 Tx	-4.13	-0.00223	±2.5	PASS	50℃

-----End-----