

# FCC TEST REPORT

**Product Name:** FM WIRELESS INTERCOM  
**Trade Mark:** Maxtone / Calford  
**Model No.:** SK1208  
**Add. Model No.:** SK1204 / CF828  
**Report Number:** 190705004RFC-1  
**Test Standards:** FCC 47 CFR Part 95  
FCC 47 CFR Part 2  
**FCC ID:** 2AOXESK1208  
**Test Result:** PASS  
**Date of Issue:** August 23, 2019

Prepared for:

**Heyuan SunKeungFung Technology LTD.**  
**3/F, Block B, Area A, Fumin Industrial Park, 8th keji Road, Hi-Tech**  
**Zone, HeYuan, China**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**16/F, Block A, Building 6, Baoneng Science and Technology Park,**  
**Qingxiang Road No.1, Longhua New District, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Tested by:



Reviewed by:

  
Kevin Liang  
Assistant Manager

Approved by:

  
Billy Li  
Technical Director

Date: August 23, 2019

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

**Version**

Version No.	Date	Description
V1.0	August 23, 2019	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 CLIENT INFORMATION .....	4
1.2 EUT INFORMATION .....	4
1.2.1 GENERAL DESCRIPTION OF EUT .....	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	4
1.4 OTHER INFORMATION.....	5
1.5 DESCRIPTION OF SUPPORT UNITS .....	5
1.6 TEST LOCATION.....	5
1.7 TEST FACILITY.....	5
1.8 DEVIATION FROM STANDARDS .....	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	6
1.11 MEASUREMENT UNCERTAINTY .....	7
<b>2. TEST SUMMARY .....</b>	<b>8</b>
<b>3. EQUIPMENT LIST .....</b>	<b>9</b>
<b>4. TEST CONFIGURATION .....</b>	<b>10</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING .....	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS .....	10
4.2 TEST CHANNELS .....	10
4.3 EUT TEST STATUS .....	10
4.4 SYSTEM TEST CONFIGURATION .....	11
<b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION .....</b>	<b>12</b>
5.1 REFERENCE DOCUMENTS FOR TESTING .....	12
5.2 MAXIMUM TRANSMITTER POWER (EFFECTIVE RADIATED POWER).....	12
5.3 MODULATION LIMIT.....	14
5.4 AUDIO FREQUENCY RESPONSE .....	15
5.5 AUDIO LOW PASS FILTER RESPONSE .....	16
5.6 FREQUENCY STABILITY .....	17
5.7 EMISSION BANDWIDTH.....	18
5.8 EMISSION MASK .....	21
5.9 TRANSMITTER RADIATED SPURIOUS EMISSION .....	23
<b>APPENDIX 1 PHOTOS OF TEST SETUP .....</b>	<b>42</b>
<b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....</b>	<b>42</b>

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

<b>Applicant:</b>	Heyuan SunKeungFung Technology LTD.
<b>Address of Applicant:</b>	3/F,Block B,Area A,Fumin Industrial Park,8th keji Road,Hi-Tech Zone,HeYuan,China
<b>Manufacturer:</b>	Heyuan SunKeungFung Technology LTD.
<b>Address of Manufacturer:</b>	3/F,Block B,Area A,Fumin Industrial Park,8th keji Road,Hi-Tech Zone,HeYuan,China

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

<b>Product Name:</b>	FM WIRELESS INTERCOM
<b>Model No.:</b>	SK1208
<b>Add. Model No.:</b>	SK1204 / CF828
<b>Trade Mark:</b>	Maxtone / Calford
<b>DUT Stage:</b>	Identical Prototype
<b>Sample Received Date:</b>	July 15, 2019
<b>Sample Tested Date:</b>	July 15, 2019 to August 13, 2019
<b>Note:</b> The test data is gathered from a production sample, provided by the manufacturer. The marks and press key of others models listed in the report is different from main-test model SK1208, but the circuit and the electronic construction do not change, declared by the manufacturer.	

#### 1.2.2 Description of Accessories

Adapter	
Mode No:	U222C0A050100
Mark:	BMT
Input:	100-240V~50/60Hz 150mA
Output:	5.0V == 1A
Manufacturer:	Shenzhen BMT Electronics CO.,Ltd.
Address of Manufacturer:	2/F,1 Building,QiYu Industrial Zone,GongLe,TieZi Road,XiXiang Town,BaoAn District,ShenZhen City,China

Cable	
<b>Description:</b>	USB Micro-B Plug Cable
<b>Cable Type:</b>	Unshielded without ferrite
<b>Length:</b>	1.20 Meter

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

<b>Frequency Range:</b>	FRS:	462.5625 MHz to 462.7125 MHz
		467.5625 MHz to 467.7125 MHz
<b>Rated Output Power:</b>	FRS (See Note 1):	0.5W(27dBm)
	FRS:	0.5W(27dBm)
<b>Modulation Type:</b>	FRS:	FM
<b>Channel Separation:</b>	FRS:	12.5 KHz
<b>Emission Designator:</b>	FRS:	6K01F3E
<b>Maximum Transmitter Power (ERP):</b>	FRS:	25.32dbm

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
 Tel: +86-755-28230888      Fax: +86-755-28230886      E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

<b>Number of Channels:</b>	8
<b>Antenna Type:</b>	Integral Antenna
<b>Antenna Gain:</b>	1 dBi
<b>Normal Test Voltage:</b>	120 Vac
<b>Extreme Test Voltage:</b>	102 to 138 Vac
<b>Extreme Test Temperature:</b>	-10 °C to +55 °C
<b>Note 1:</b> The EUT only supports voice communication.	

## 1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
FRS	
Channel	Frequency
1	462.5625 MHz
2	462.5875 MHz
3	462.6125 MHz
4	462.6375 MHz
5	462.6625 MHz
6	462.6875 MHz
7	462.7125 MHz
8	467.5625 MHz

## 1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested independently

### 1) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

## 1.6 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

## 1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

### IC-Registration No.: 21600-1

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China  
Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

#### **A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

---

### **1.8 DEVIATION FROM STANDARDS**

None.

### **1.9 ABNORMALITIES FROM STANDARD CONDITIONS**

None.

### **1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER**

None.

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Radiated Spurious emissions 30MHz-1GHz	±4.5 dB
2	Radiated Spurious emissions 1GHz-18GHz	±4.4 dB



## 2. TEST SUMMARY

FCC 47 CFR Part 95 Test Cases			
Test Item	Test Requirement	Test Method	Result
<b>Maximum Transmitter Power</b>	FCC 47 CFR Part 95.567 FCC 47 CFR Part 2.1046(a)	ANSI/TIA-603-E-2016	PASS
<b>Modulation Limit</b>	FCC 47 CFR Part 95.575 FCC 47 CFR Part 2.1047(a)(b)	ANSI/TIA-603-E-2016	PASS
<b>Audio Frequency Response</b>	FCC CFR Part 95.1775 FCC 47 CFR Part 2.1047(a)	ANSI/TIA-603-E-2016	PASS
<b>Audio Low Pass Filter Response</b>	FCC 47 CFR Part 95.1775(e)	ANSI/TIA-603-E-2016	PASS
<b>Emission Bandwidth</b>	FCC 47 CFR Part 95.573	ANSI/TIA-603-E-2016	PASS
<b>Emission Mask</b>	FCC 47 CFR Part 95.579	ANSI/TIA-603-E-2016	PASS
<b>Transmitter Radiated Spurious Emission</b>	FCC 47 CFR Part 95.579	ANSI/TIA-603-E-2016	PASS
<b>Spurious Emission On Antenna Port</b>	FCC 47 CFR Part 95.579	ANSI/TIA-603-E-2016	N/A ( Note 1,2)
<b>Frequency Stability</b>	FCC 47 CFR Part 95.565 FCC 47 CFR Part 2.1055 (a)(1)	ANSI/TIA-603-E-2016	PASS

**Note:**

- 1) N/A: In this whole report not application.
- 2) The EUT is Integral Antenna.

### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List							
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)	
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021	
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 24, 2018	Nov. 24, 2019	
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 03, 2018	Dec. 03, 2019	
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 08, 2018	Dec. 08, 2019	
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Dec. 08, 2018	Dec. 08, 2019	
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 24, 2018	Nov. 24, 2019	
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 18, 2019	May 18, 2020	
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A	
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323			

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2018	Nov. 24, 2019
<input checked="" type="checkbox"/>	RF COMMUNITION TEST SET	HP	8920A	3813A10206	Nov. 10, 2018	Nov. 09, 2019
<input checked="" type="checkbox"/>	Oscilloscope	Tektronix	TDS3032B	B013680	Sep. 18, 2018	Sep. 18, 2019
<input checked="" type="checkbox"/>	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	Nov. 24, 2018	Nov. 24, 2019
<input checked="" type="checkbox"/>	DC Source	KIKUSUI	PWR400L	LK003024	Sep. 18, 2018	Sep. 18, 2019
<input type="checkbox"/>	Temp & Humidity chamber	Espec	GL(U)04KA(W)	16921H201P3	Sep. 20, 2018	Sep. 20, 2019
<input checked="" type="checkbox"/>	Temp & Humidity chamber	Votisch	VT4002	58566133290020	Jun. 15, 2019	Jun. 14, 2020

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Test Environment		Selected Values During Tests		
Test Condition	Ambient			Relative Humidity (%)
	Temperature (°C)	Voltage (Vac)	Relative Humidity (%)	
TN/VN	+15 to +35	120	20 to 75	
TL/VN	-10	120	20 to 75	
TH/VN	+55	120	20 to 75	
TN/VH	25	138	20 to 75	
TN/VL	25	102	20 to 75	

**Remark:**

- 1) The EUT just work in such extreme temperature of -10 °C to +55 °C and the extreme voltage of 102 V to 138 V, so here the EUT is tested in the temperature of -10 °C to +55 °C and the voltage of 102 V to 138 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;  
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;  
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

### 4.2 TEST CHANNELS

Operation Mode	Frequency Range	Test RF Channel Lists		
		Lowest	Middle	Highest
FRS	462.5625 MHz to 462.7125 MHz	Channel 1	Channel 4	Channel 7
		462.5625 MHz	462.6375 MHz	462.7125 MHz
		Lowest		
	467.5625 MHz to 467.7125 MHz	Channel 8		
		467.5625 MHz		

### 4.3 EUT TEST STATUS


Mode	Description
FRS	Keep the EUT in continuously transmitting with modulation or single carrier test single.

## 4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. Video bandwidth was 3 times greater than resolution bandwidth.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 30 MHz to the tenth harmonic of the highest fundamental frequency. The spurious emissions more than 20 dB below the permissible value are not reported.

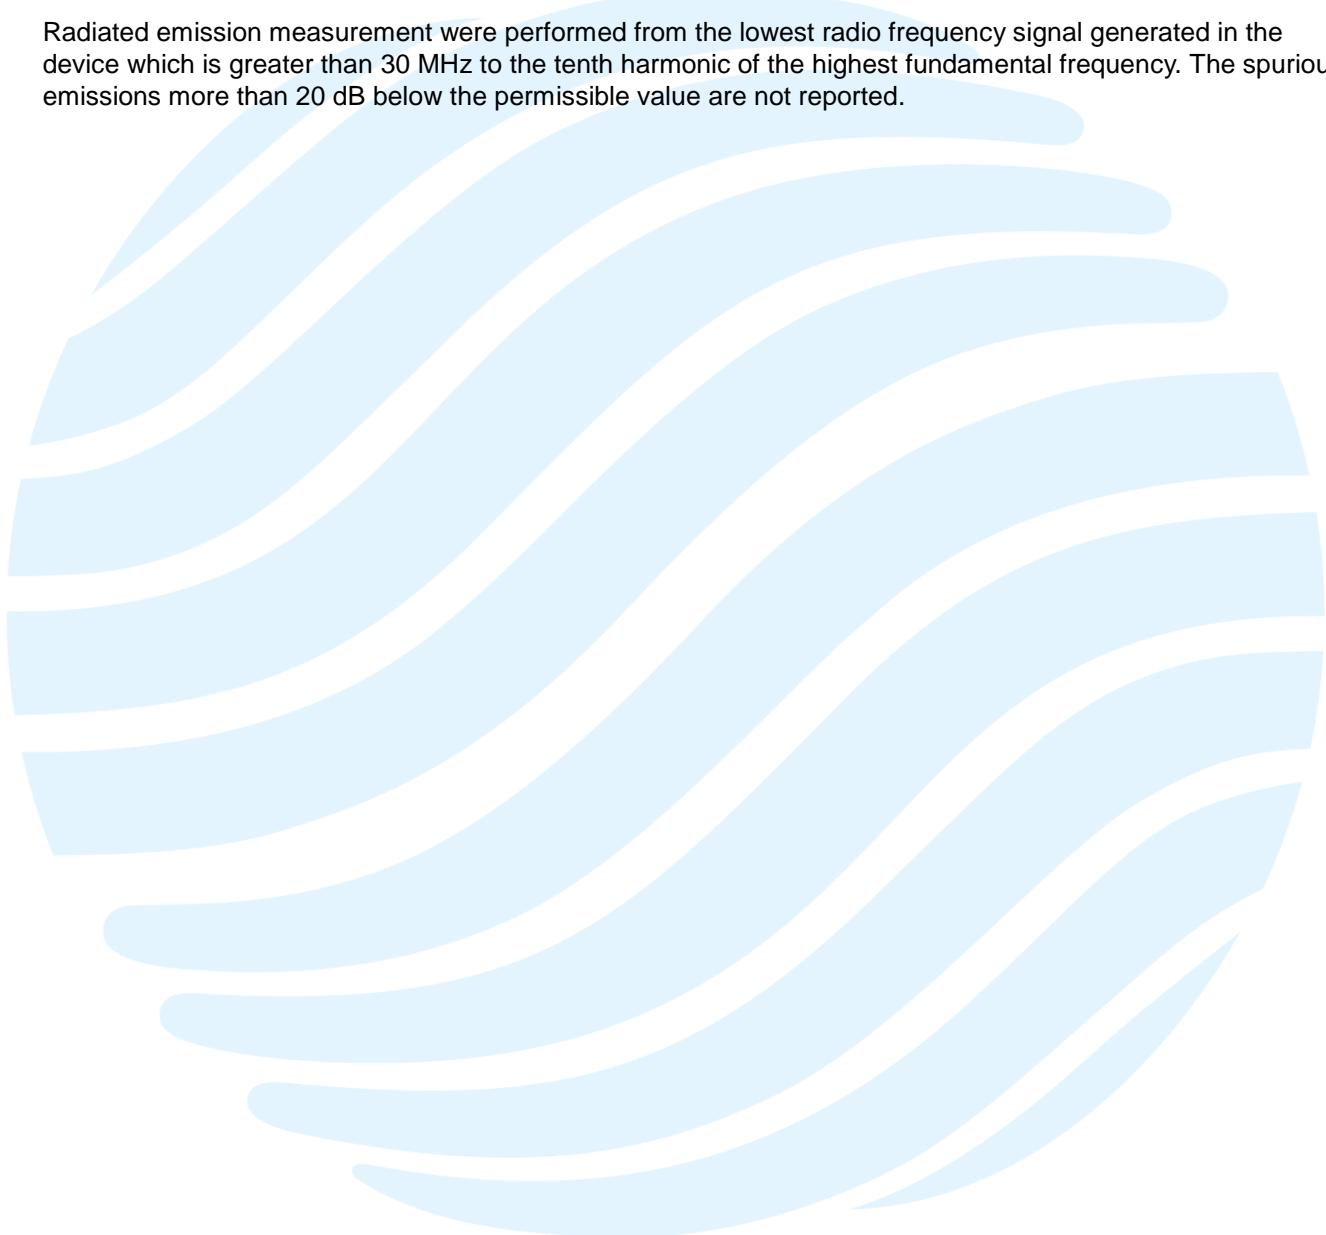

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2 Subpart J	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 95	Personal Radio Service
3	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
4	KDB 888861 D01 Part 95 GMRS FRS v01	Guidance for Certification of Part 95 GMRS and FRS transmitting equipment.

### 5.2 MAXIMUM TRANSMITTER POWER (EFFECTIVE RADIATED POWER)

**Test Requirement:** FCC 47 CFR Part 95.567

FCC 47 CFR Part 2.1046(a)

**Test Method:** ANSI/TIA-603-E-2016, Section 2.2.17

**Limit:**


#### For FRS

Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

#### Test Procedure:

Test procedure as below:

- 1) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.  
The measurement results are obtained as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$   
The measurement results are amend as described below:  
 $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
- 6) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7) ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .
- 8) Test the EUT in the lowest channel, the middle channel the Highest channel

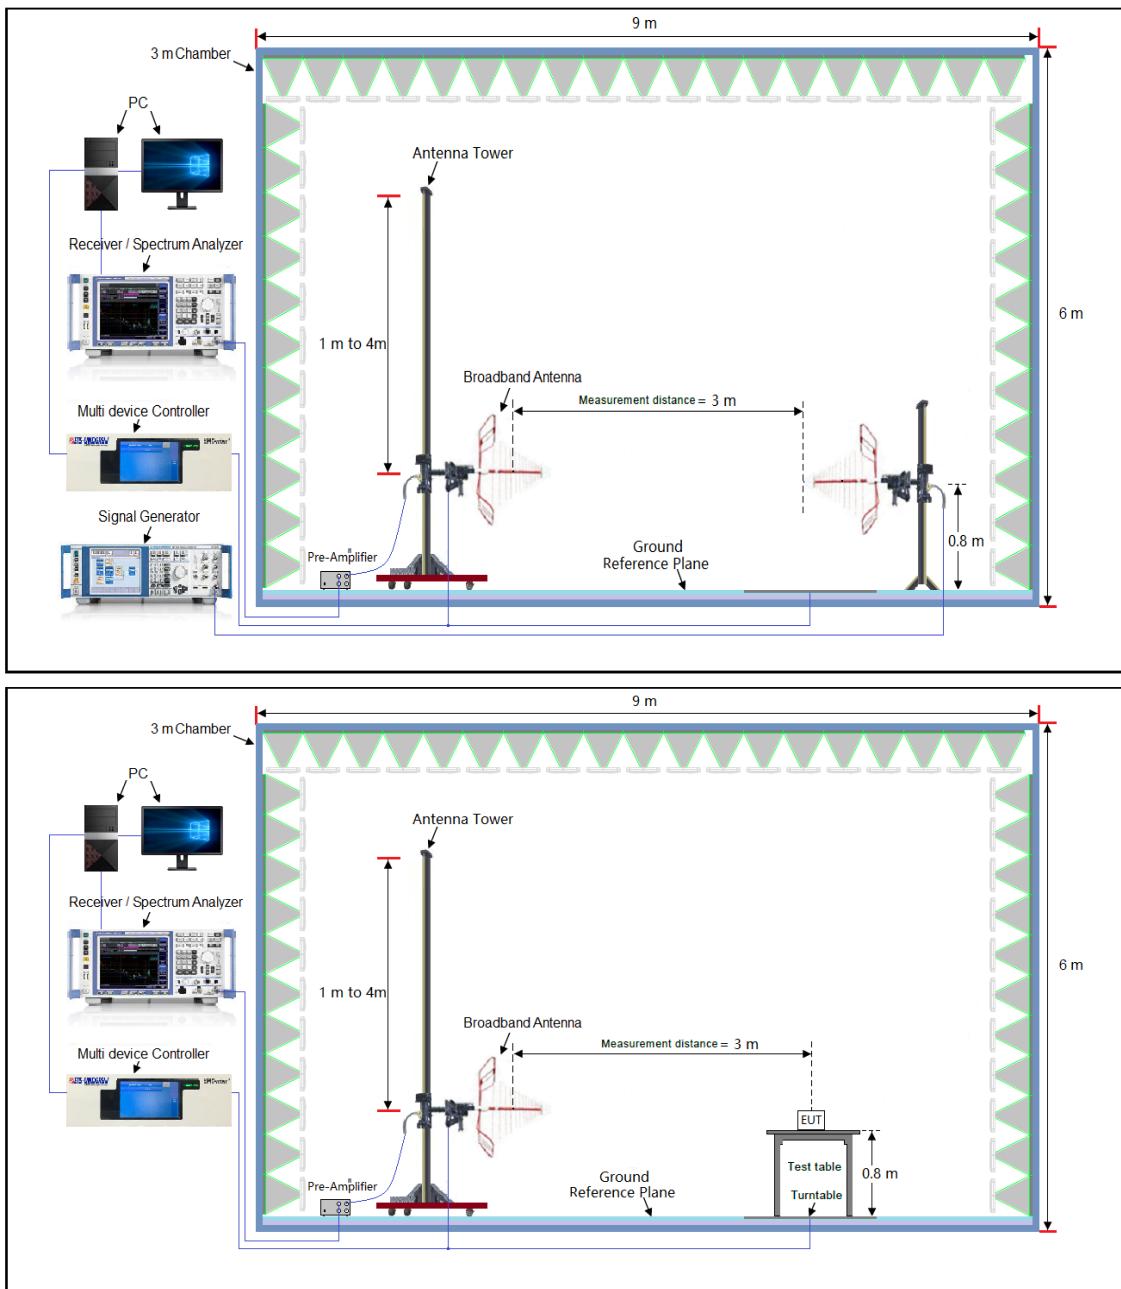**Test Setup:**

**Instruments Used:**

Refer to section 3 for details

**Test Mode:**

Unmodulated Transmitter mode

**Test Results:**

Refer to APPENDIX A.

## 5.3 MODULATION LIMIT

**Test Requirement:** FCC 47 CFR Part 95.575

**Test Method:** ANSI/TIA-603-E-2016, Section 2.2.3

**Limit:**


**For FRS**

Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

**Test Procedure:**

- a) Connect the equipment as illustrated.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for  $\leq 0.25$  Hz to  $\geq 15,000$  Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation.
- e) Increase the level from the audio frequency generator by 20 dB in one step (rise time between the 10% and 90% points shall be 0.1 second maximum).
- f) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level.
- g) With the level from the audio frequency generator held constant at the level obtained in step e), slowly vary the audio frequency from 300 Hz to 3000 Hz and observe the steady-state deviation. Record the maximum deviation.
- h) Set the test receiver to measure peak negative deviation and repeat steps d) through g).
- i) The values recorded in steps g) and h) are the modulation limiting.

**Test Setup:**

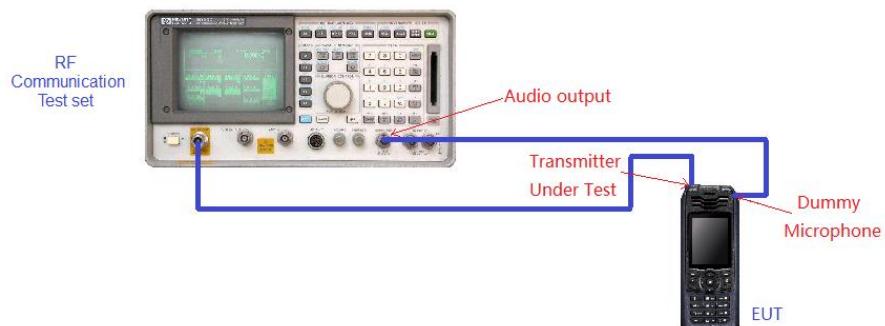

**Instruments Used:** Refer to section 3 for details


**Test Mode:** Modulated Transmitter mode

**Test Results:** Refer to APPENDIX B.

## 5.4 AUDIO FREQUENCY RESPONSE

**Test Requirement:** FCC 47 CFR Part 2.1047(a)  
**Test Method:** ANSI/TIA-603-E-2016, Section 2.2.6  
**Limit:**

Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

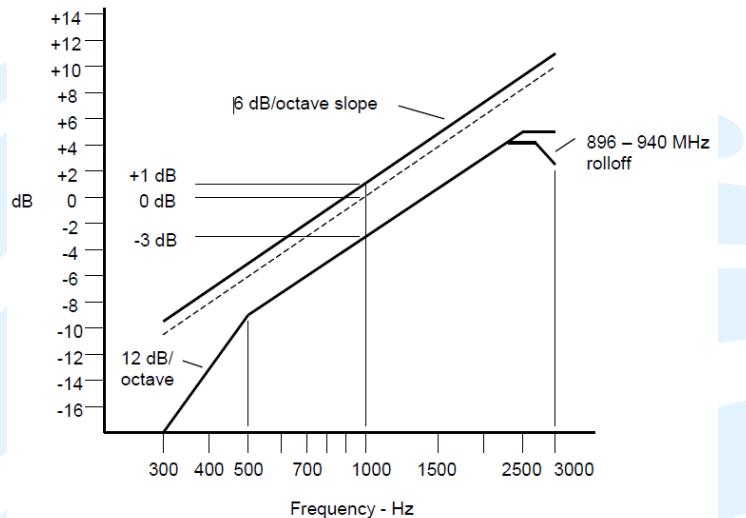


An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

### Test Procedure:

- 1) Configure the EUT as shown in figure.
- 2) Adjust the audio input for 20% of rated system deviation at 1kHz using this level as a reference.
- 3) Vary the Audio frequency from 300Hz to 3 kHz and record the frequency deviation.
- 4) Audio Frequency Response = $20\log_{10} (V_{FREQ}/V_{REF})$ .

### Test Setup:

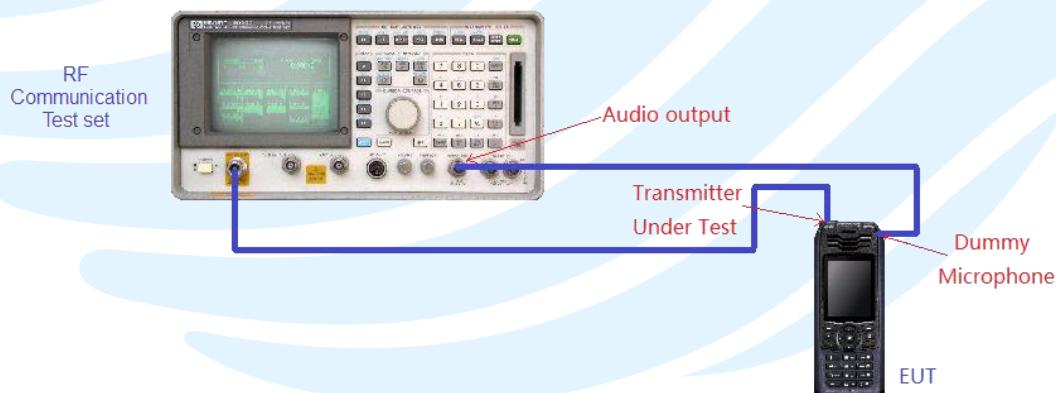

**Instruments Used:** Refer to section 3 for details


**Test Mode:** Modulated Transmitter mode

**Test Results:** Refer to APPENDIX C

## 5.5 AUDIO LOW PASS FILTER RESPONSE

**Test Requirement:** FCC 47 CFR Part 2.1047(a)  
**Test Method:** ANSI/TIA-603-E-2016, Section 2.2.15  
**Limit:**

Each GMRS transmitter, except a mobile station transmitter with a power output of 2.5 W or less, must automatically prevent a greater than normal audio level from causing overmodulation. The transmitter also must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of § 95.631 (without filtering.) The filter must be between the modulation limiter and the modulated stage of the transmitter. At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least  $60 \log_{10}(f/3)$  dB greater than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB greater than the attenuation at 1 kHz.

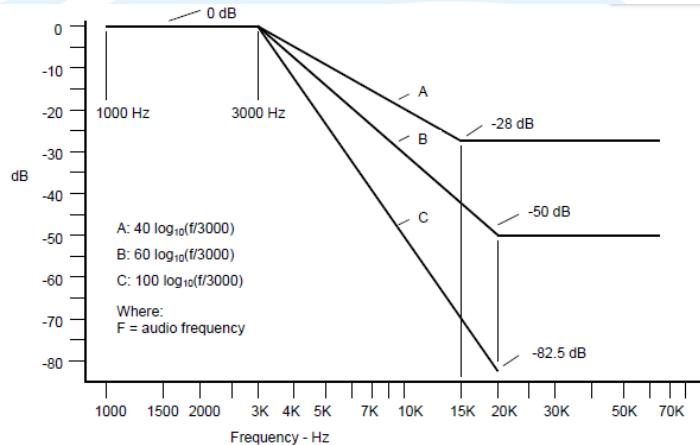


### Test Procedure:

- Connect the equipment as illustrated.
- Connect the audio frequency generator as close as possible the input of the post limiter low pass filter within the transmitter under test.
- Connect the audio spectrum analyzer to the output of the post limiter low pass filter within the transmitter under test.
- Apply a 1000 Hz tone from the audio frequency generator and adjust the level per manufacturer's specifications.
- Record the dB level of the 1000 Hz spectral line on the audio spectrum analyzer as  $LEV_{REF}$ .
- Set the audio frequency generator to the desired test frequency between 3000 Hz and the upper low pass filter limit.
- Record audio spectrum analyzer levels, at the test frequency in step f).
- Record the dB level on the audio spectrum analyzer as  $LEV_{FREQ}$ .
- Calculate the audio frequency response at the test frequency as:  

$$\text{low pass frequency response} = LEV_{FREQ} - LEV_{REF}$$

Repeat steps f) through i) for all the desired test frequencies.

### Test Setup:

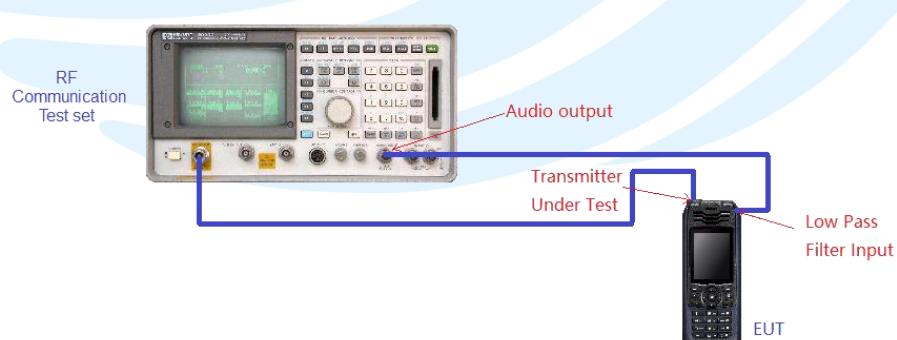

**Instruments Used:** Refer to section 3 for details

**Test Results:** Refer to APPENDIX D

## 5.6 FREQUENCY STABILITY

**Test Requirement:** FCC 47 CFR Part 95.565

FCC 47 CFR Part 2.1055 (a)(1)

**Test Method:** ANSI/TIA-603-E-2016, Section 2.2.2


**Limit:**

Each FRS transmitter type must be designed such that the carrier frequencies remain within  $\pm 2.5$  parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

**Test Procedure:**

1. According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.
2. According to FCC Part 2 Section 2.1055 (d) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
3. Vary primary supply voltage from 102 V to 138 V.
4. The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer or RF Communication Test set. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

**Test Setup:**

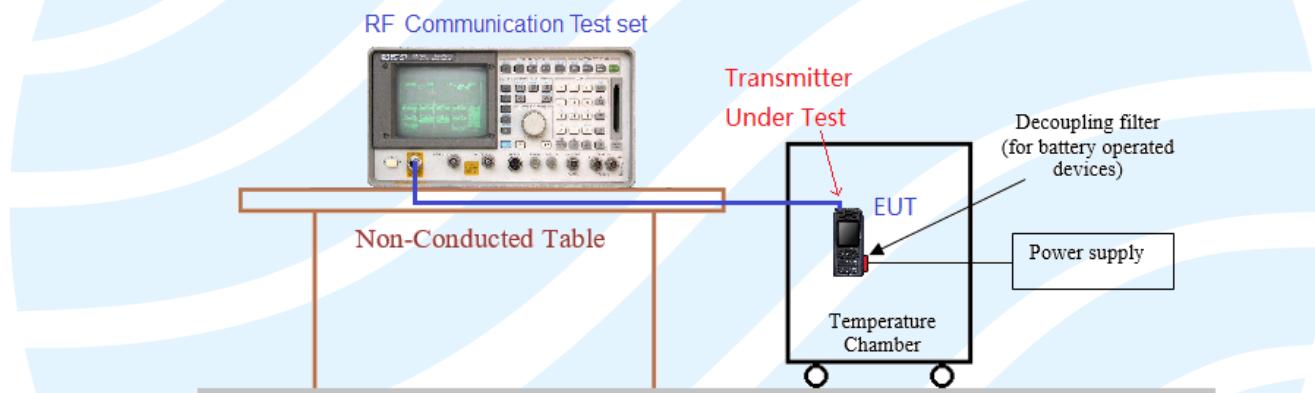

**Instruments Used:** Refer to section 3 for details

**Test Mode:** Unmodulated Transmitter mode

**Test Results:** Refer to APPENDIX E

## 5.7 EMISSION BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 95.573


**Test Method:** ANSI/TIA-603-E-2016, Section 2.2.11

**Limits:**

**For FRS**

Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

**Test Setup:**

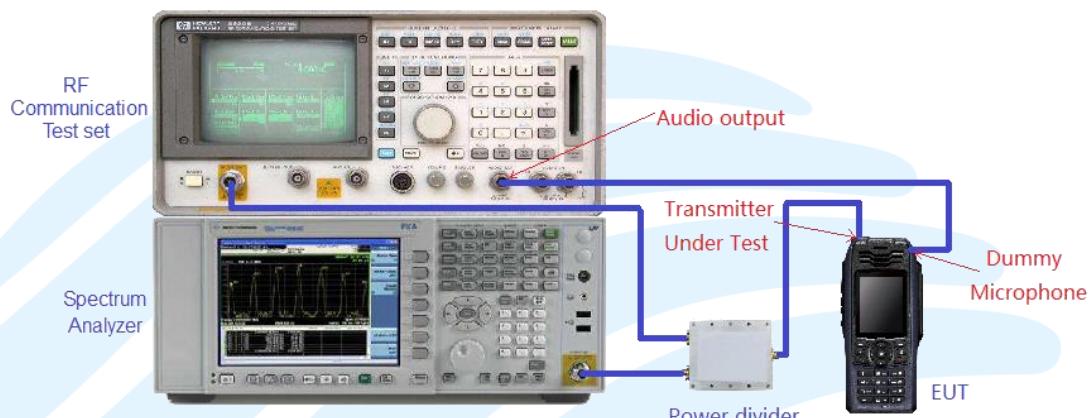

**Test Procedures:**

- 1) The EUT was modulated by 2.5 kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.  
Rated system deviation is 2.5kHz and 5kHz).
- 2) Spectrum set as follow:  
Centre frequency = fundamental frequency, span=50kHz,  
RBW=100Hz, VBW=300Hz, Sweep = auto, Detector function = peak, Trace = max hold
- 3) Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth
- 4) Measure and record the results in the test report.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

**The measurement data as follows:**

Operation Mode	Channel	Frequency (MHz)	26 dB Bandwidth (KHz)	99% Bandwidth (KHz)	26 dB Bandwidth Limit	Pass / Fail
FRS	1	462.6525	10.781	6.006	≤ 12.5 kHz	Pass
	4	462.6375	10.781	6.006	≤ 12.5 kHz	Pass
	7	462.7125	10.781	6.006	≤ 12.5 kHz	Pass
	8	467.5625	10.781	6.006	≤ 12.5 kHz	Pass



The test plot as follows:



## 5.8 EMISSION MASK

**Test Requirement:** FCC 47 CFR Part 95.579

**Test Method:** ANSI/TIA-603-E-2016, Section 2.2.11


**Limits:**

**For FRS**

The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- 1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- 2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- 3)  $43 + 10 \log (P)$  dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

**Test Setup:**

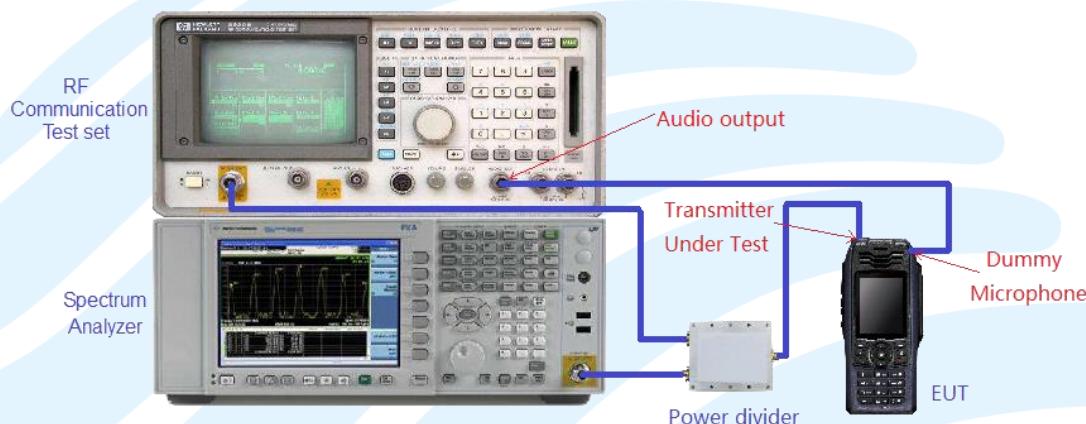


**Test Procedures:**

- 5) Connect the equipment as illustrated.
- 6) Spectrum set as follow:  
Centre frequency = fundamental frequency, span=125kHz for 12.5kHz channel spacing,  
RBW=300Hz, VBW=1000Hz, Sweep = auto, Detector function = peak, Trace = max hold
- 7) Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.  
Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
- 8) The input level shall be established at the frequency of maximum response of the audio modulating circuit. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer
- 9) Measure and record the results in the test report.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

The test plot as follows:

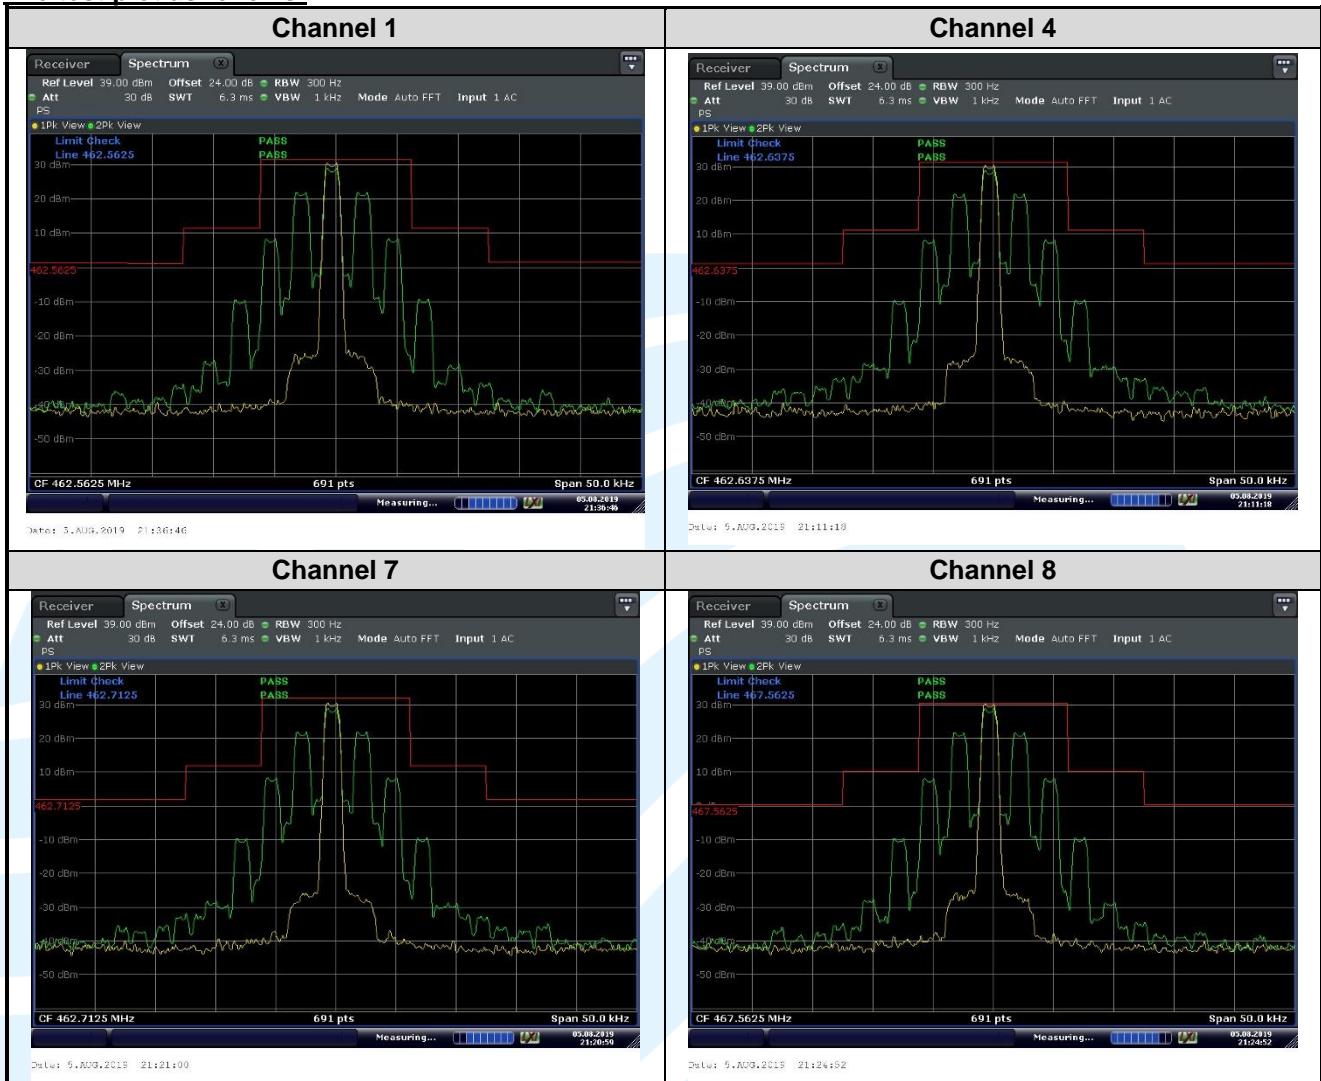

## 5.9 TRANSMITTER RADIATED SPURIOUS EMISSION

**Test Requirement:**

FCC 47 CFR Part 95.579

FCC 47 CFR Part 2.1053

**Test Method:**

ANSI/TIA-603-E-2016, Section 2.2.12

**Limit:****For FRS**

The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:


- 1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- 2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- 3)  $43 + 10 \log (P)$  dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

**Test Procedure:**


Test procedure as below:

- 1) EUT was placed on a 0.8 or 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.  
The measurement results are obtained as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$   
The measurement results are amend as described below:  
 $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
- 6) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7) ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15 \text{ dBi}$ .
- 8) Test the EUT in the lowest channel, the middle channel the Highest channel

**Test Setup:**

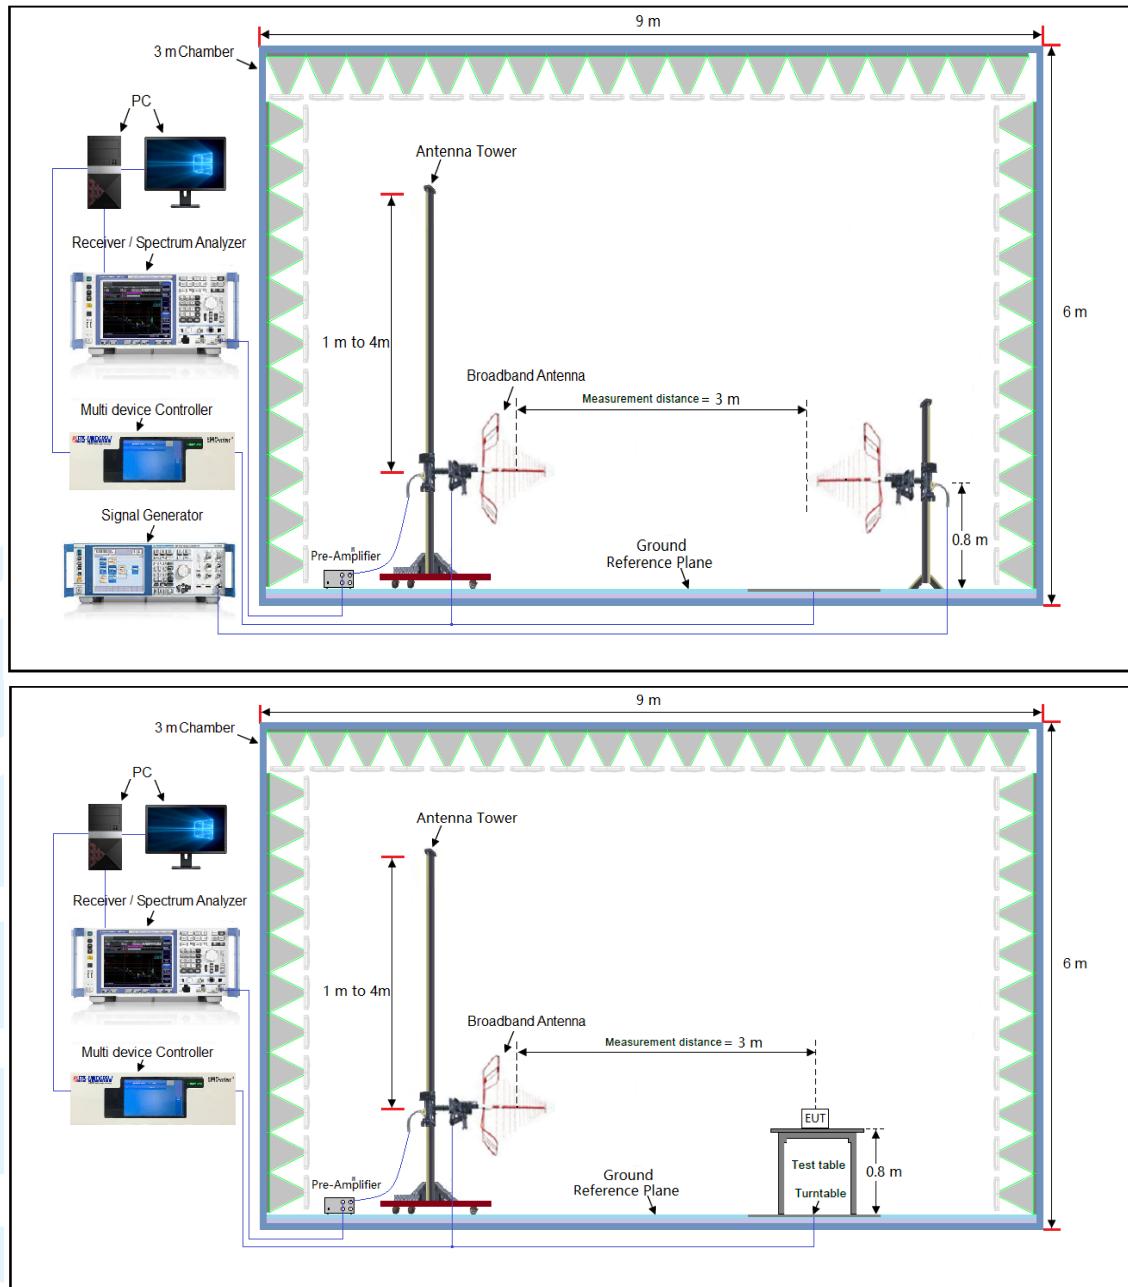

ERP Test Setup

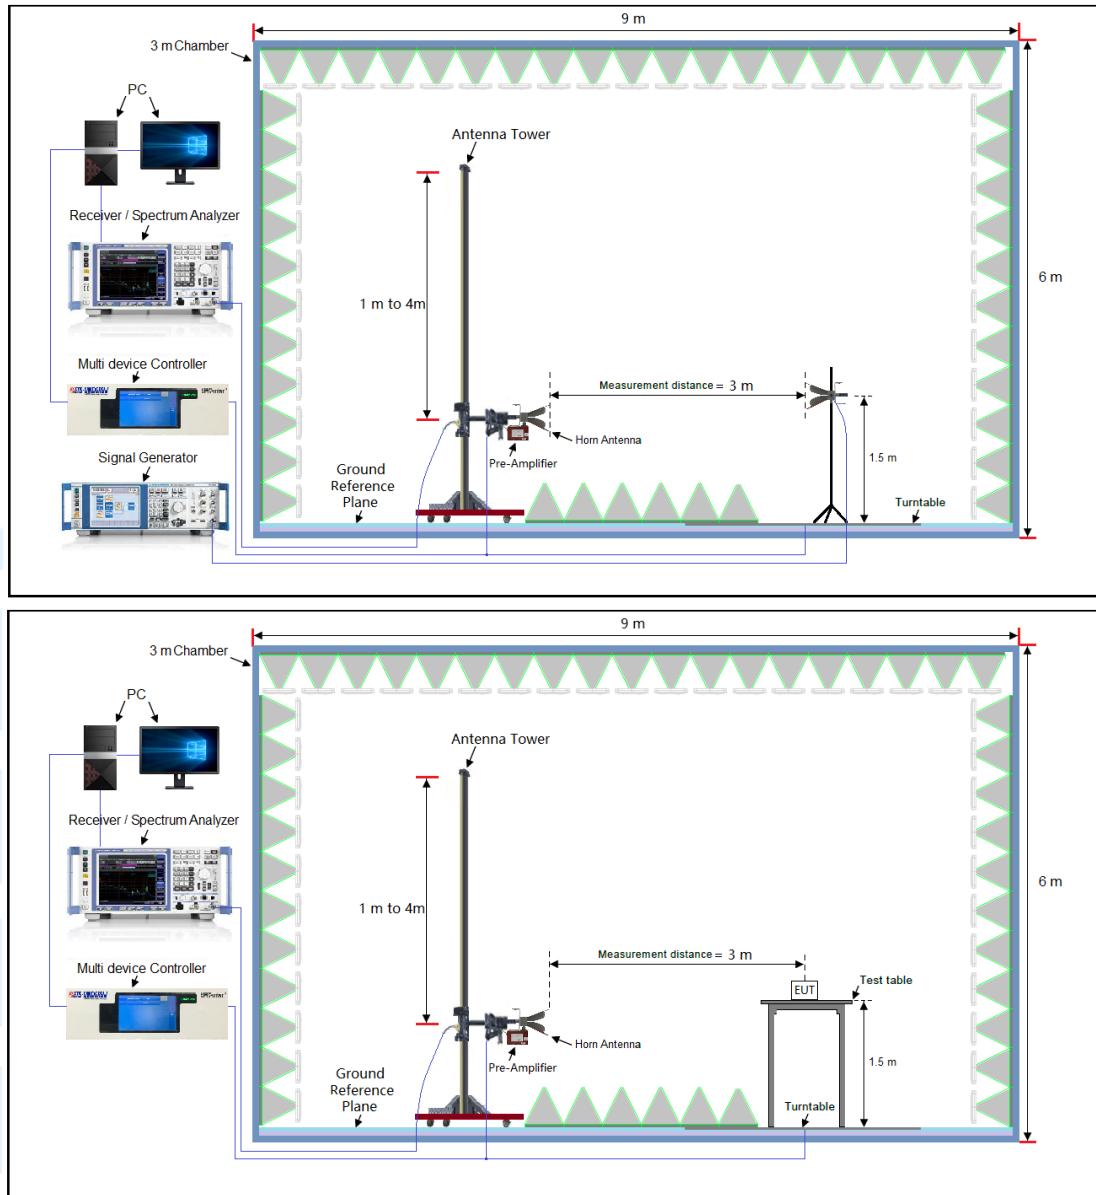

### EIRP Test Setup

**Instruments Used:**

Refer to section 3 for details


**Test Mode:**

Unmodulated Transmitter mode


**Test Results:**


Pass


**The measurement data as follows:**

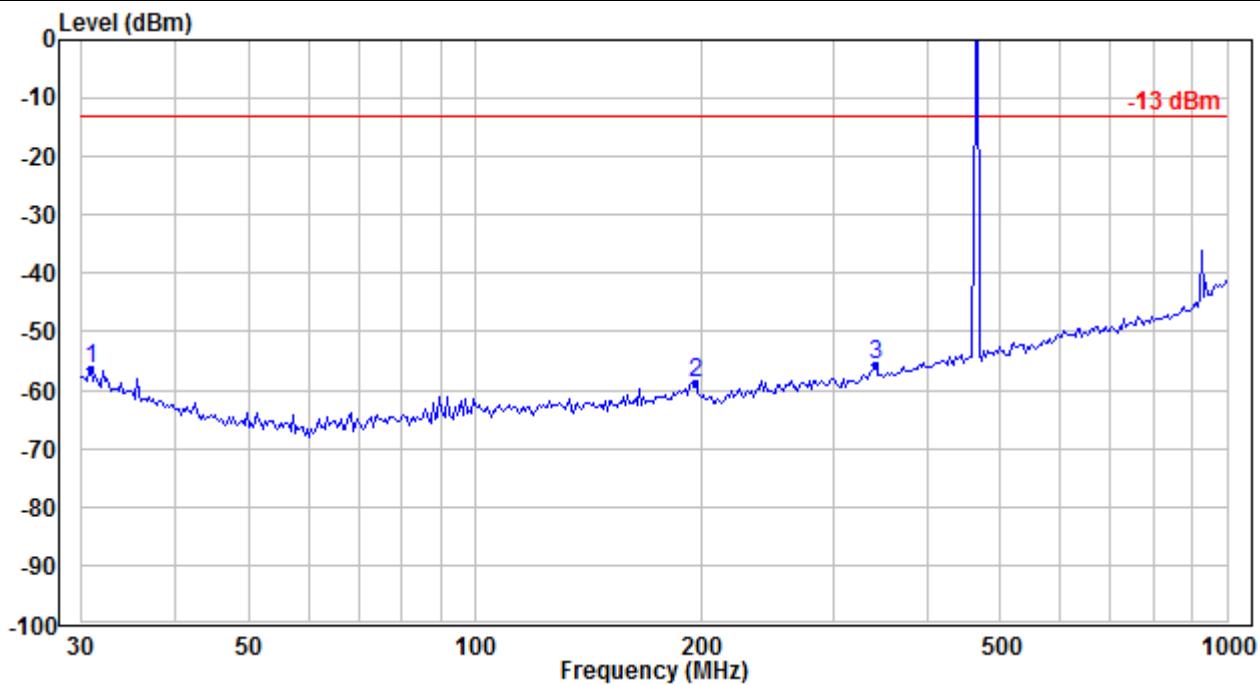
**Spurious emissions test data (30MHz to 1 GHz):**
**Channel 1**
**Horizontal**


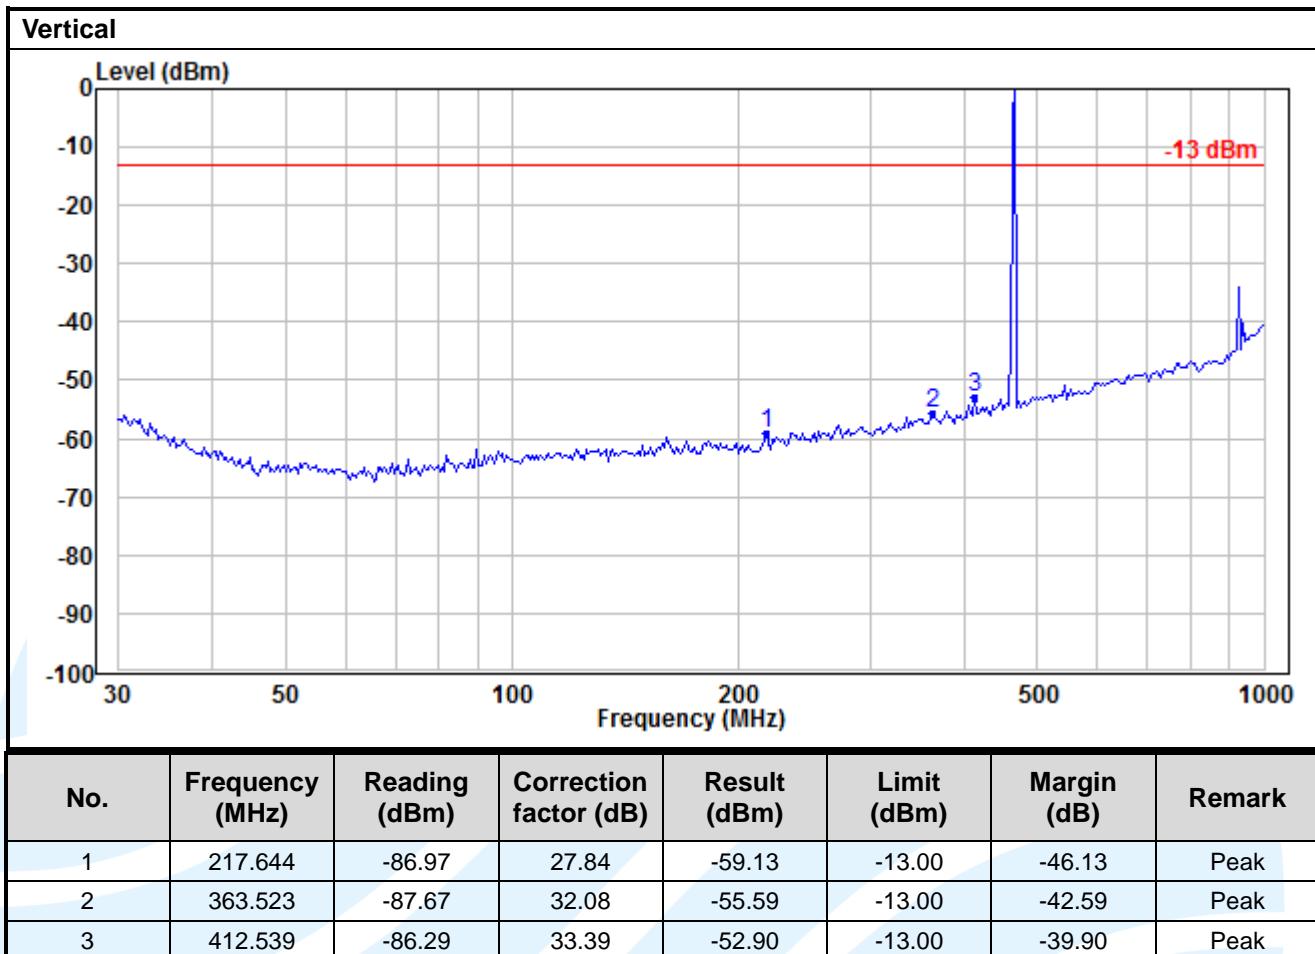
No.	Frequency (MHz)	Reading (dBm)	Correction factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	30.855	-90.22	33.86	-56.36	-13.00	-43.36	Peak
2	195.870	-86.61	27.85	-58.76	-13.00	-45.76	Peak
3	341.244	-87.60	31.85	-55.75	-13.00	-42.75	Peak

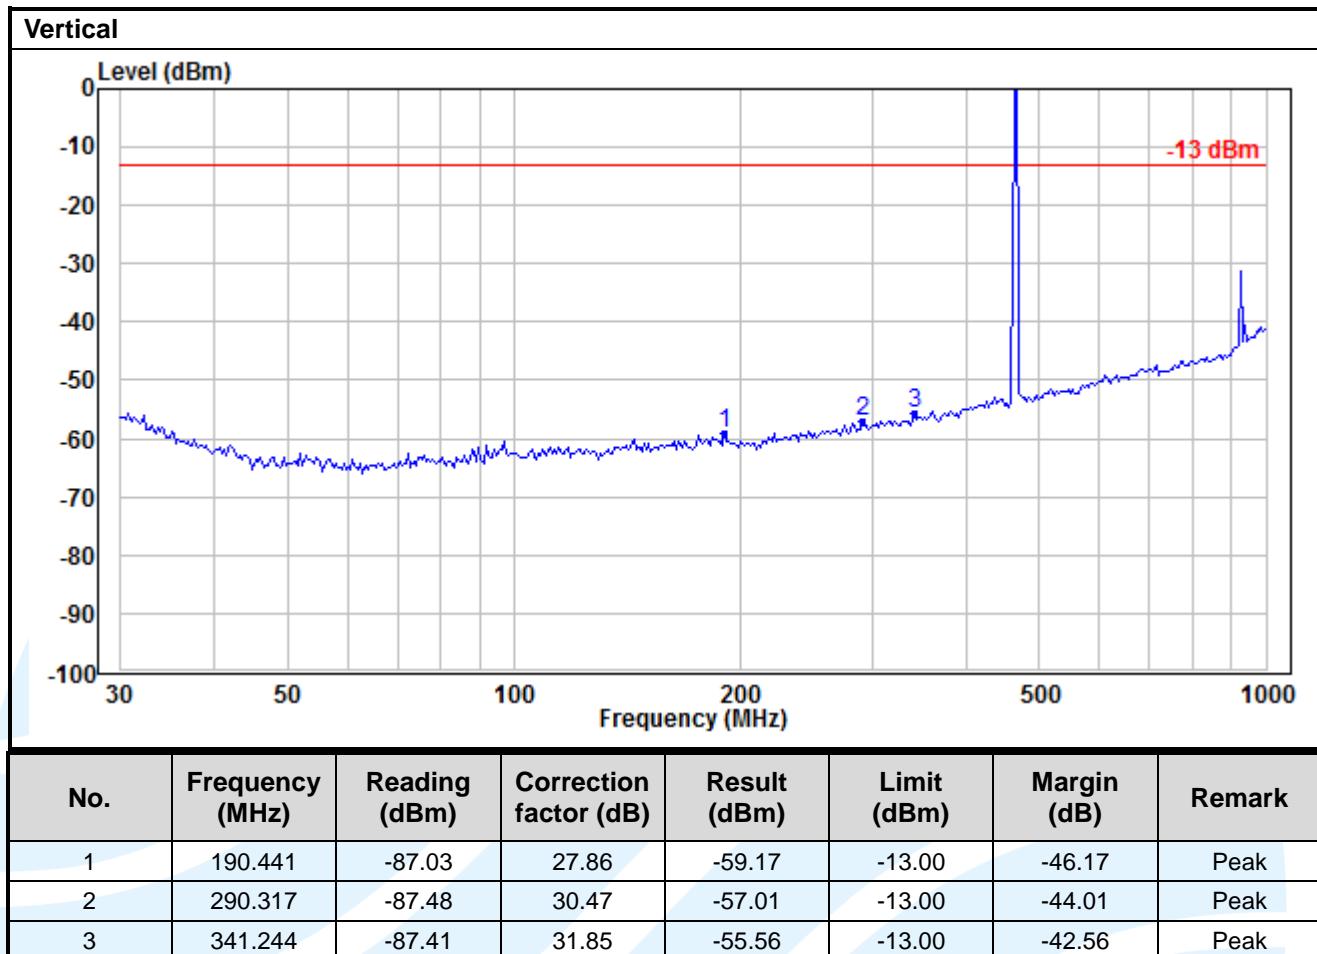


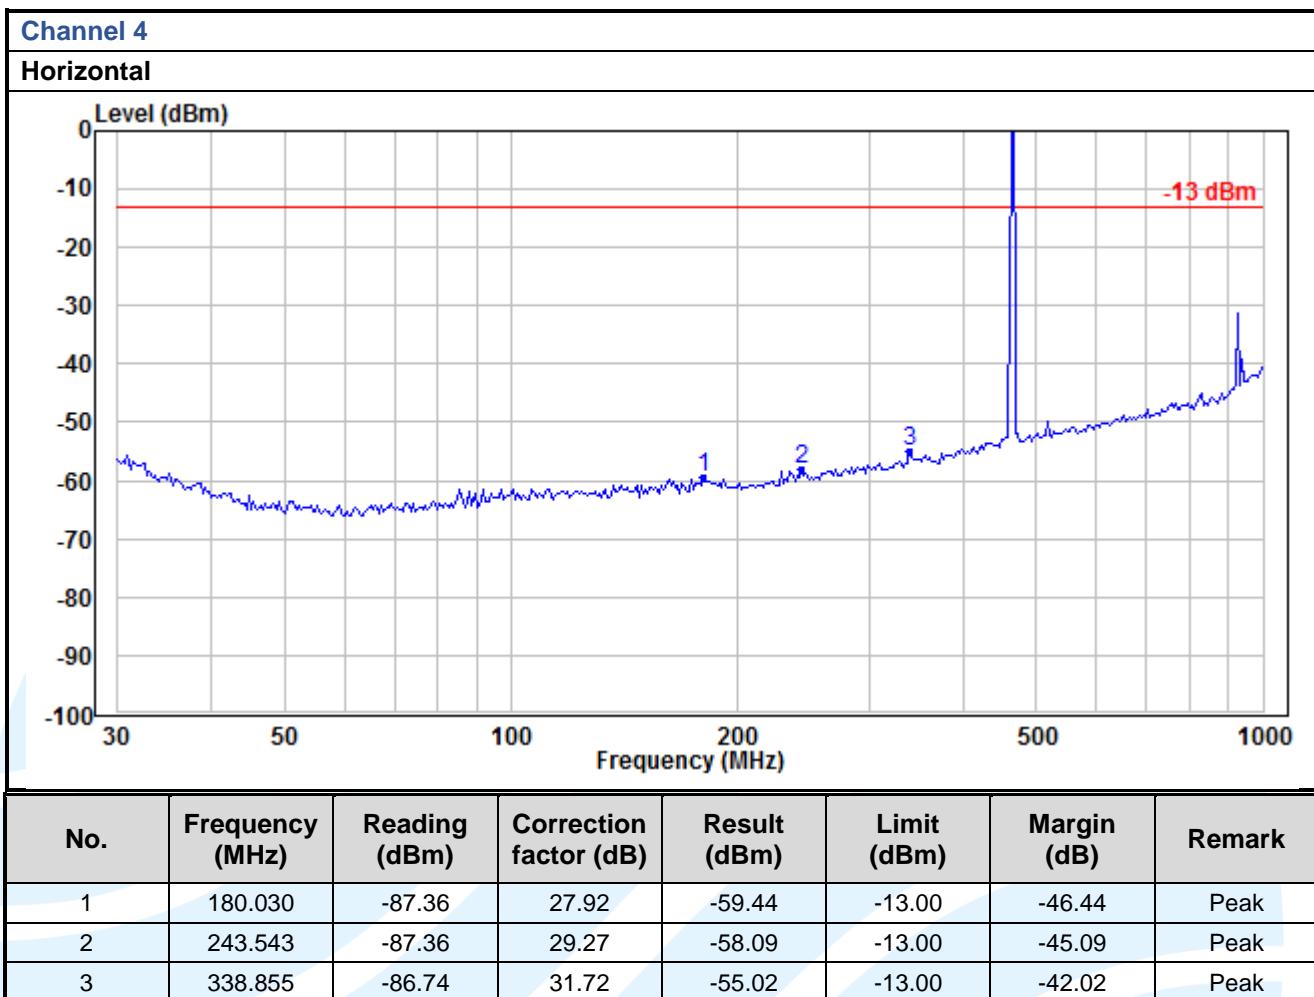


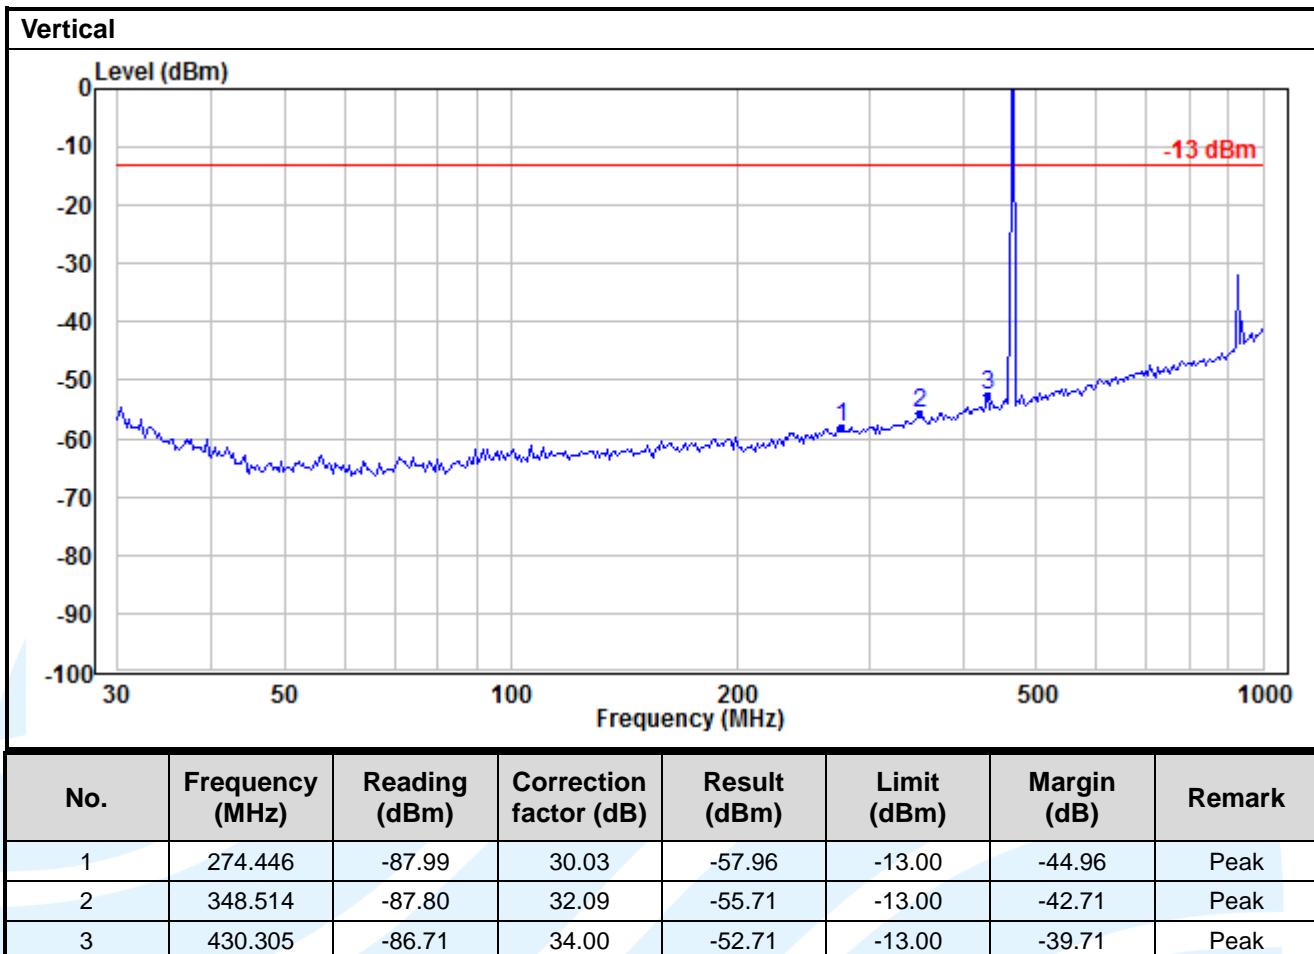


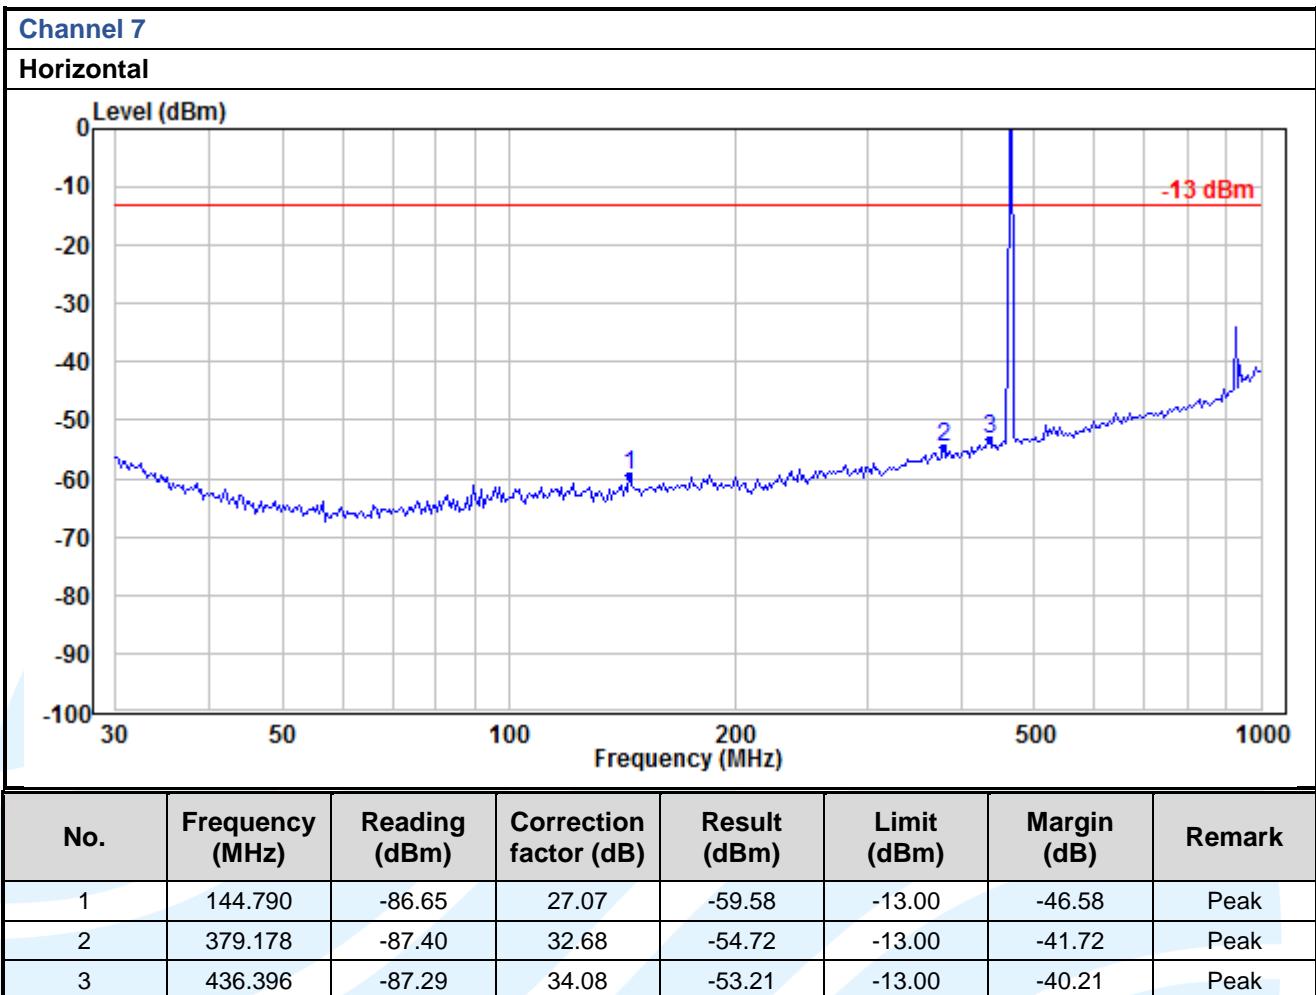




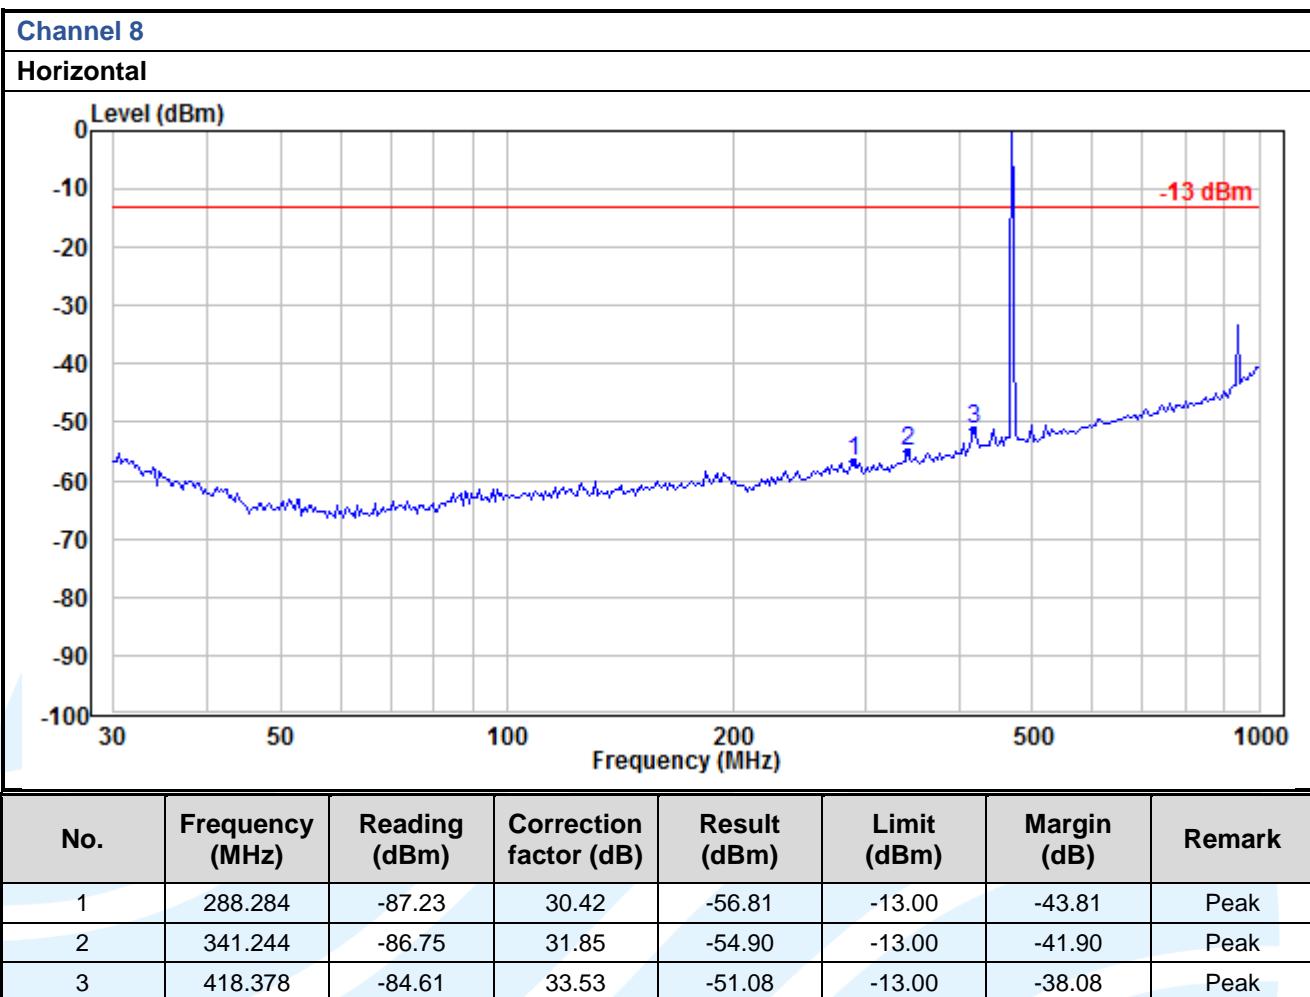


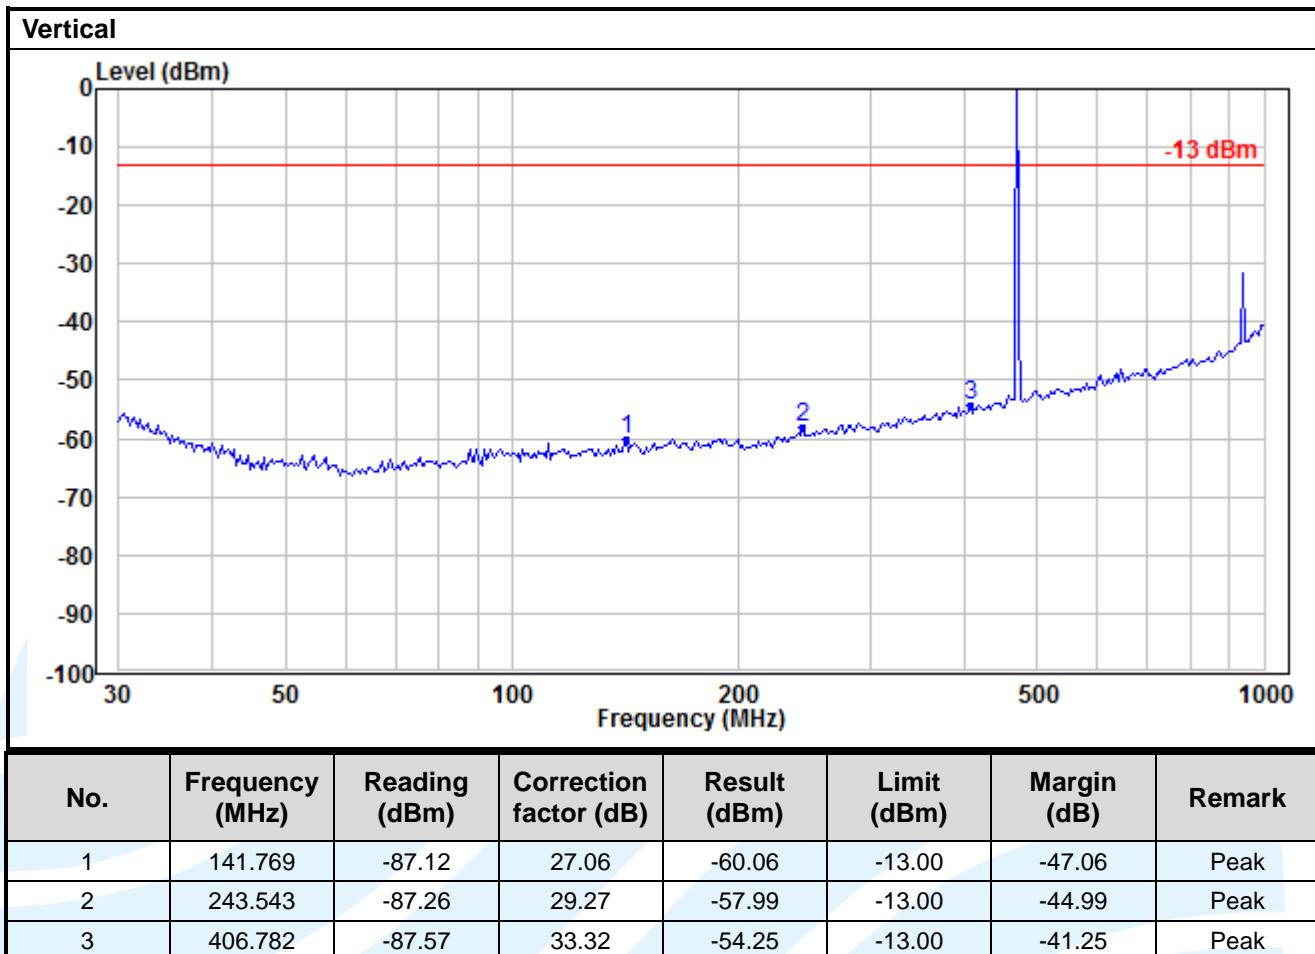


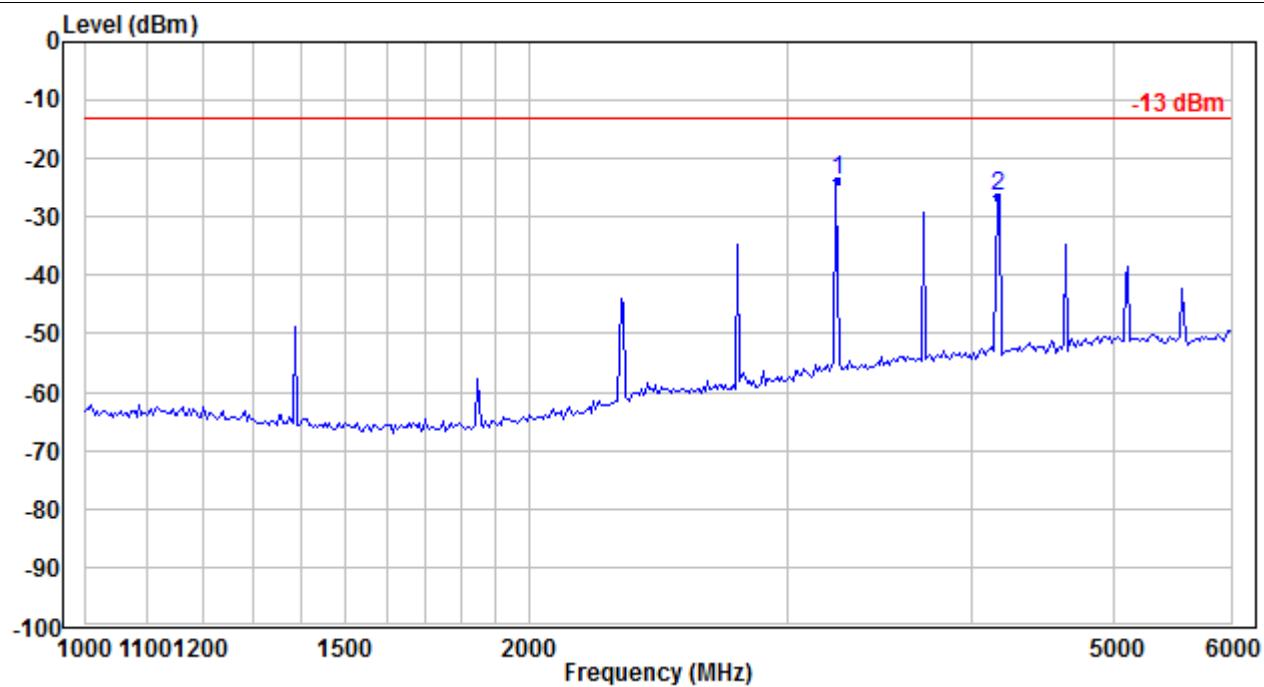
**Spurious emissions test data (1GHz to 6 GHz):****Channel 1****Horizontal**


No.	Frequency (MHz)	Reading (dBm)	Correction factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	3237.938	-35.49	11.69	-23.80	-13.00	-10.80	Peak
2	4163.063	-40.95	14.63	-26.32	-13.00	-13.32	Peak

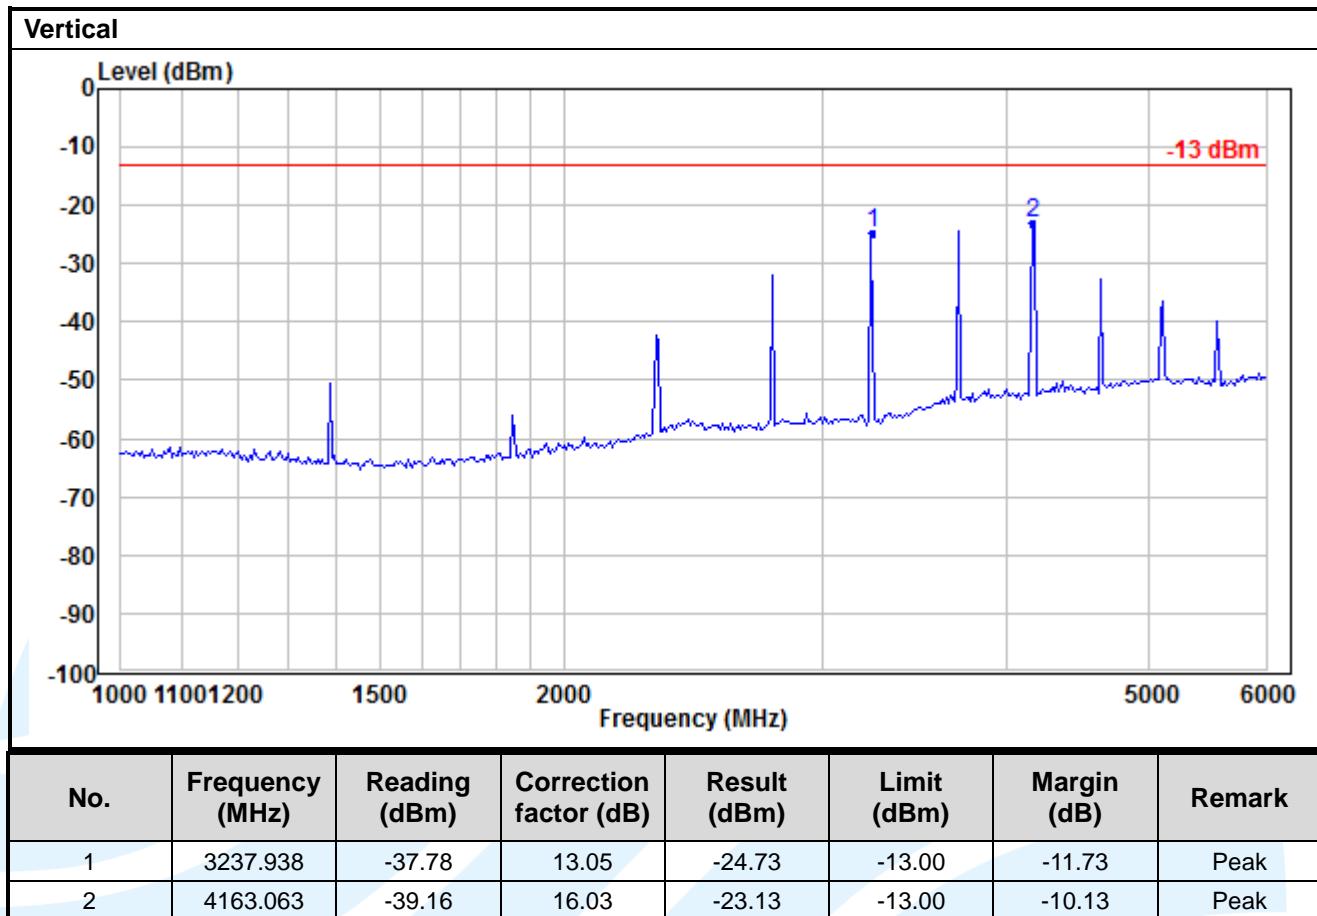


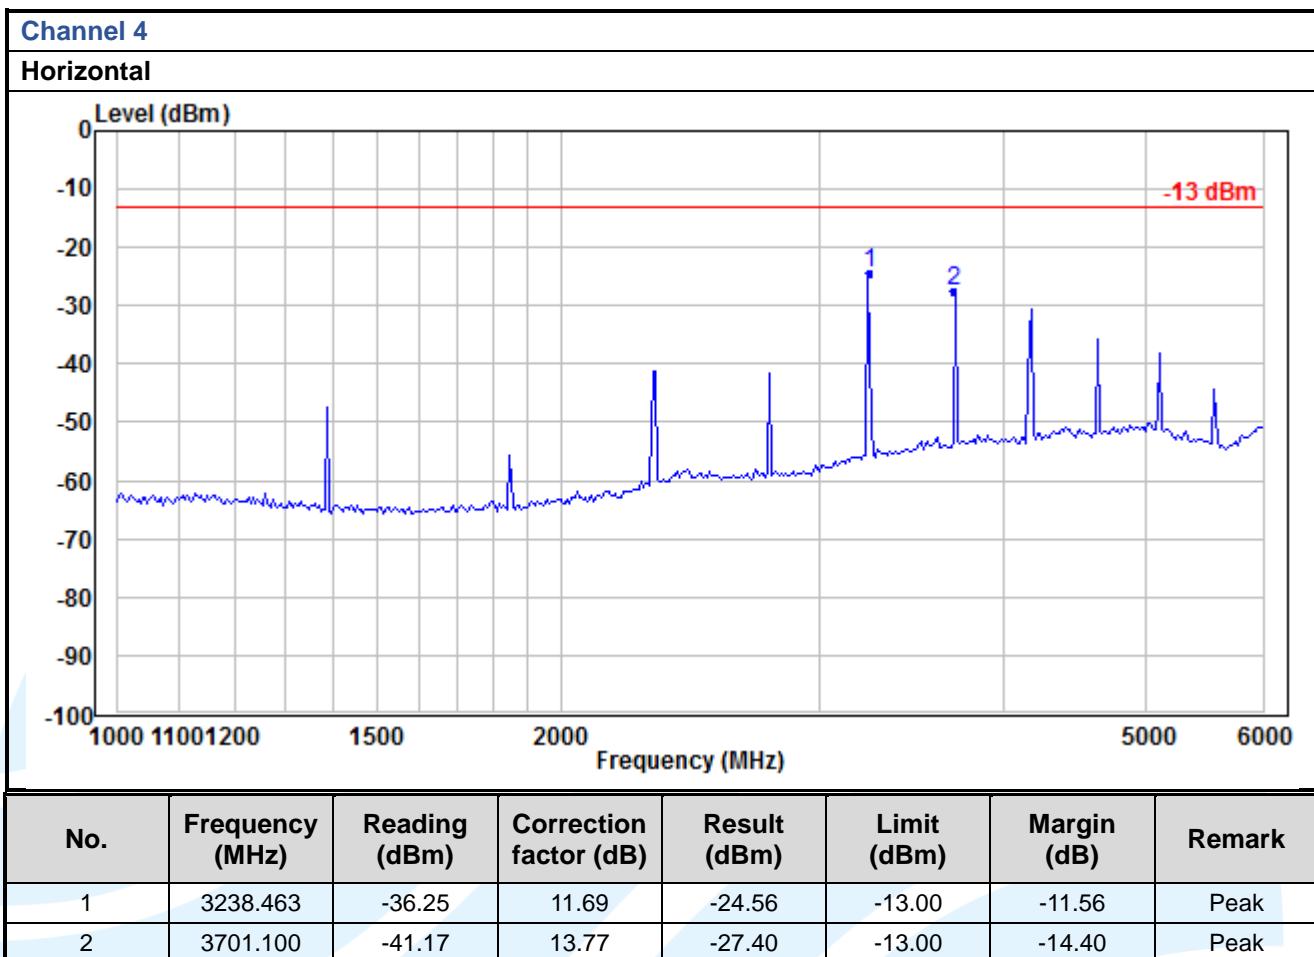


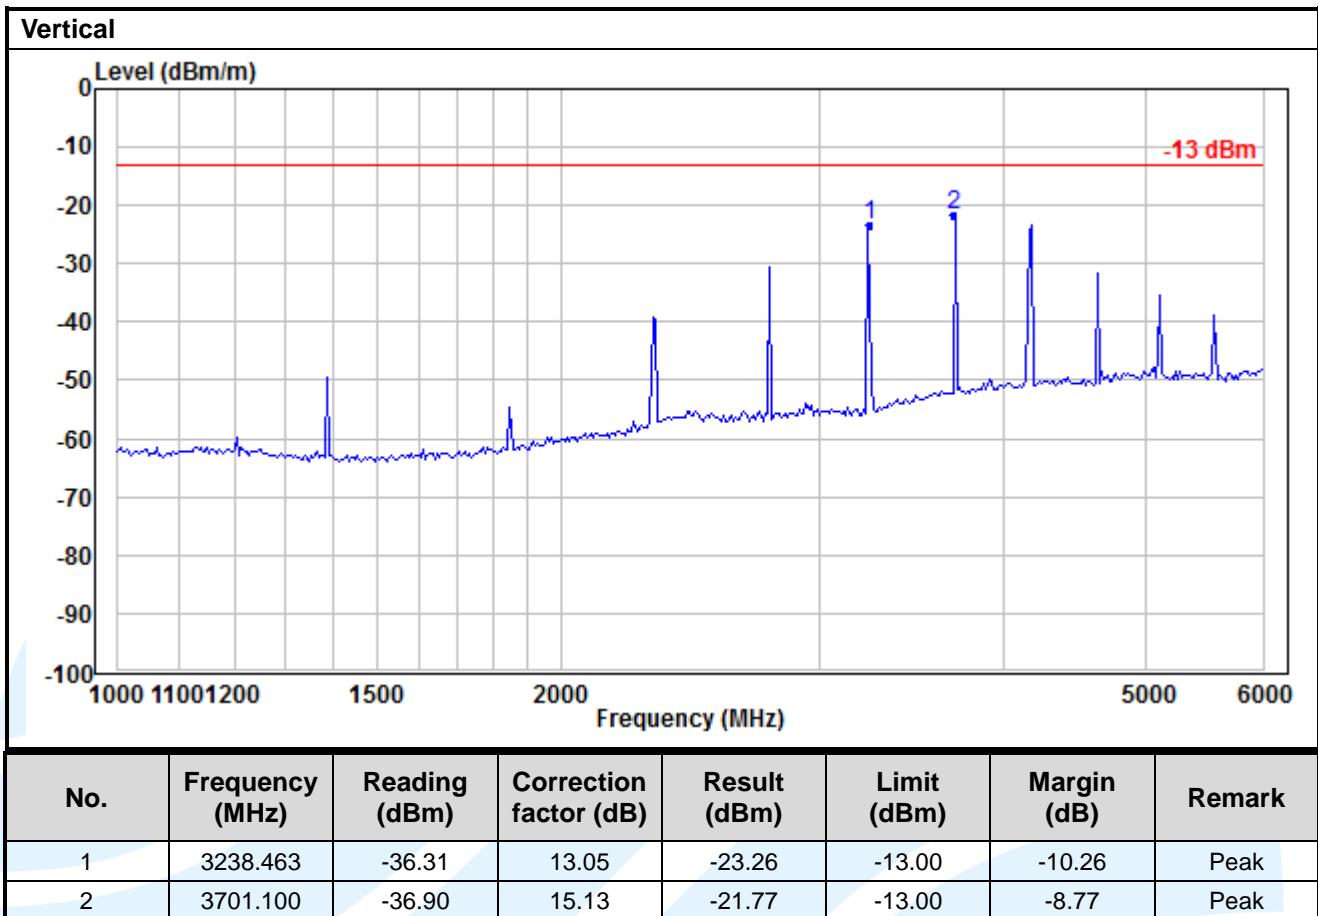

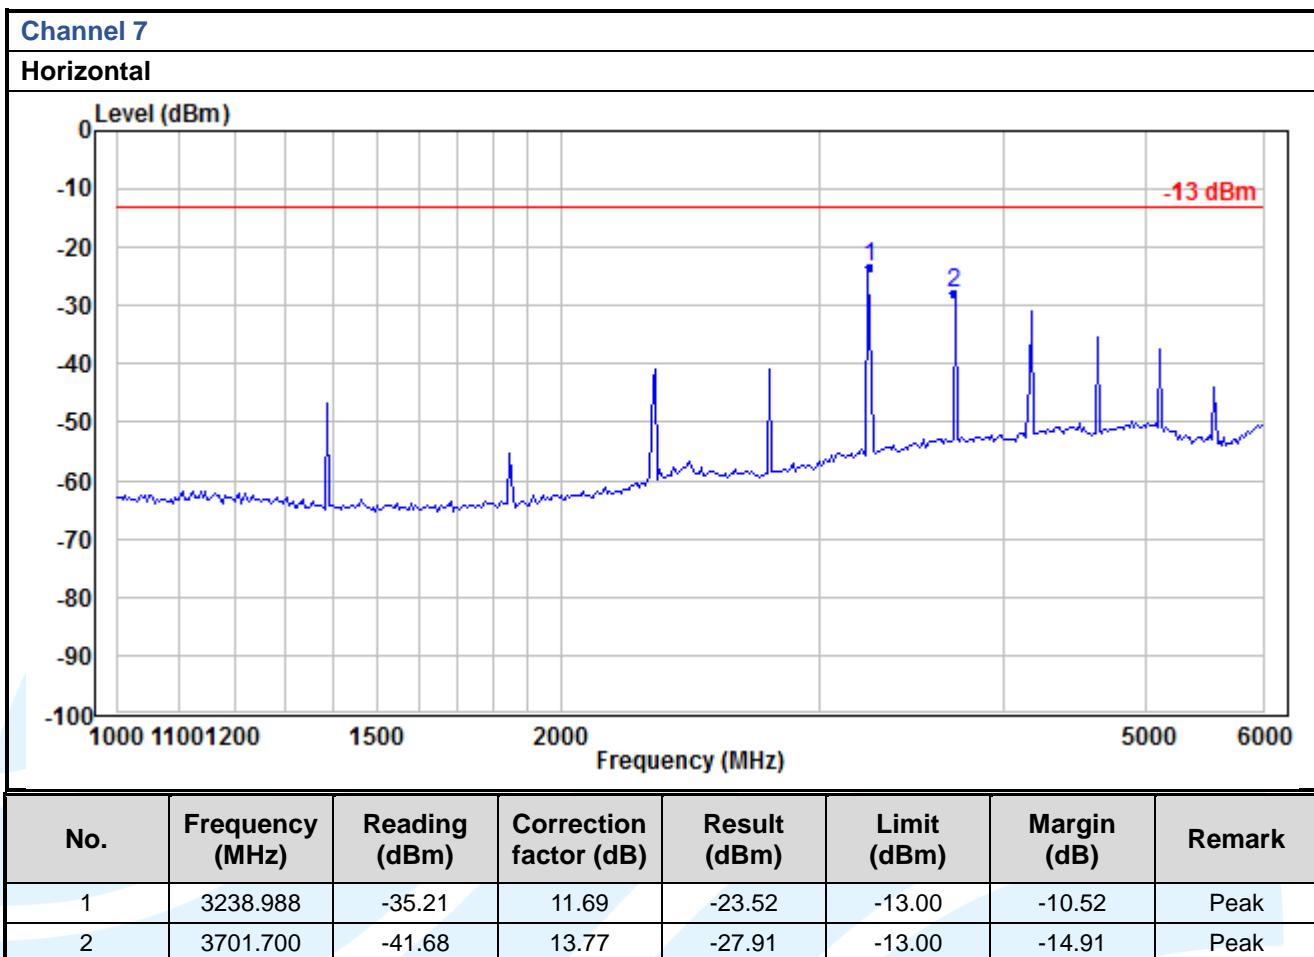

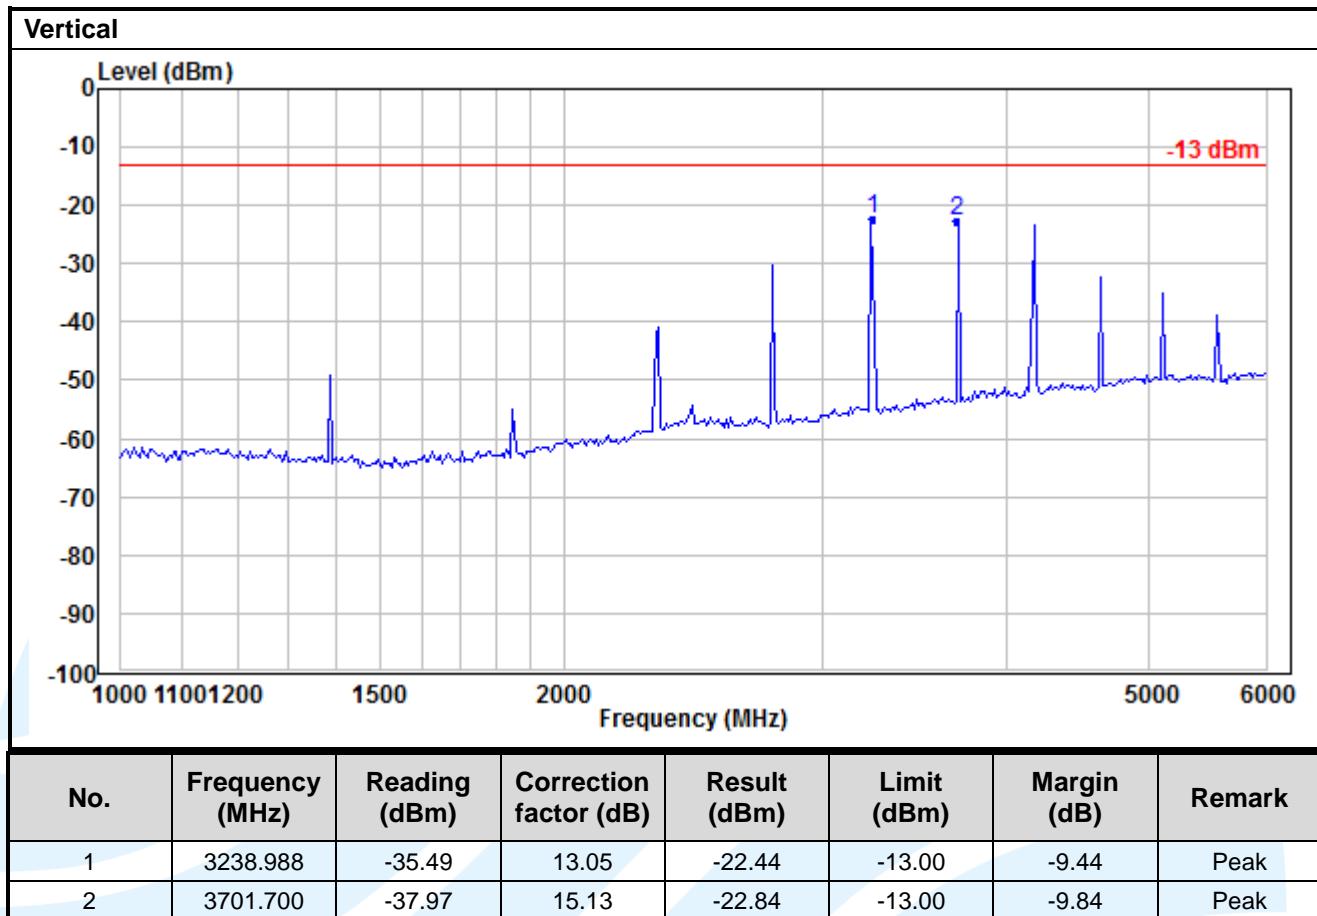

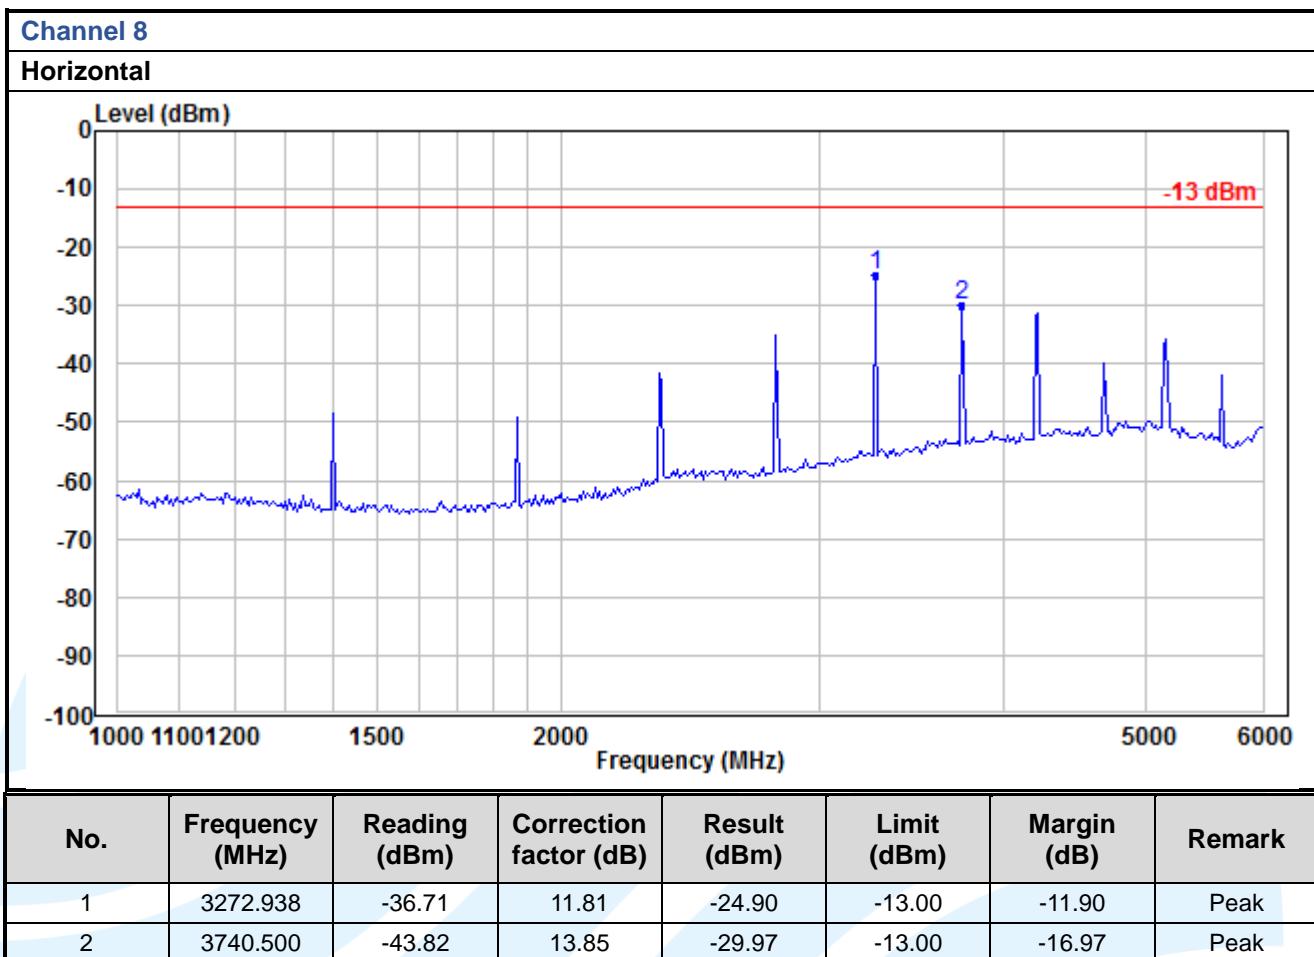

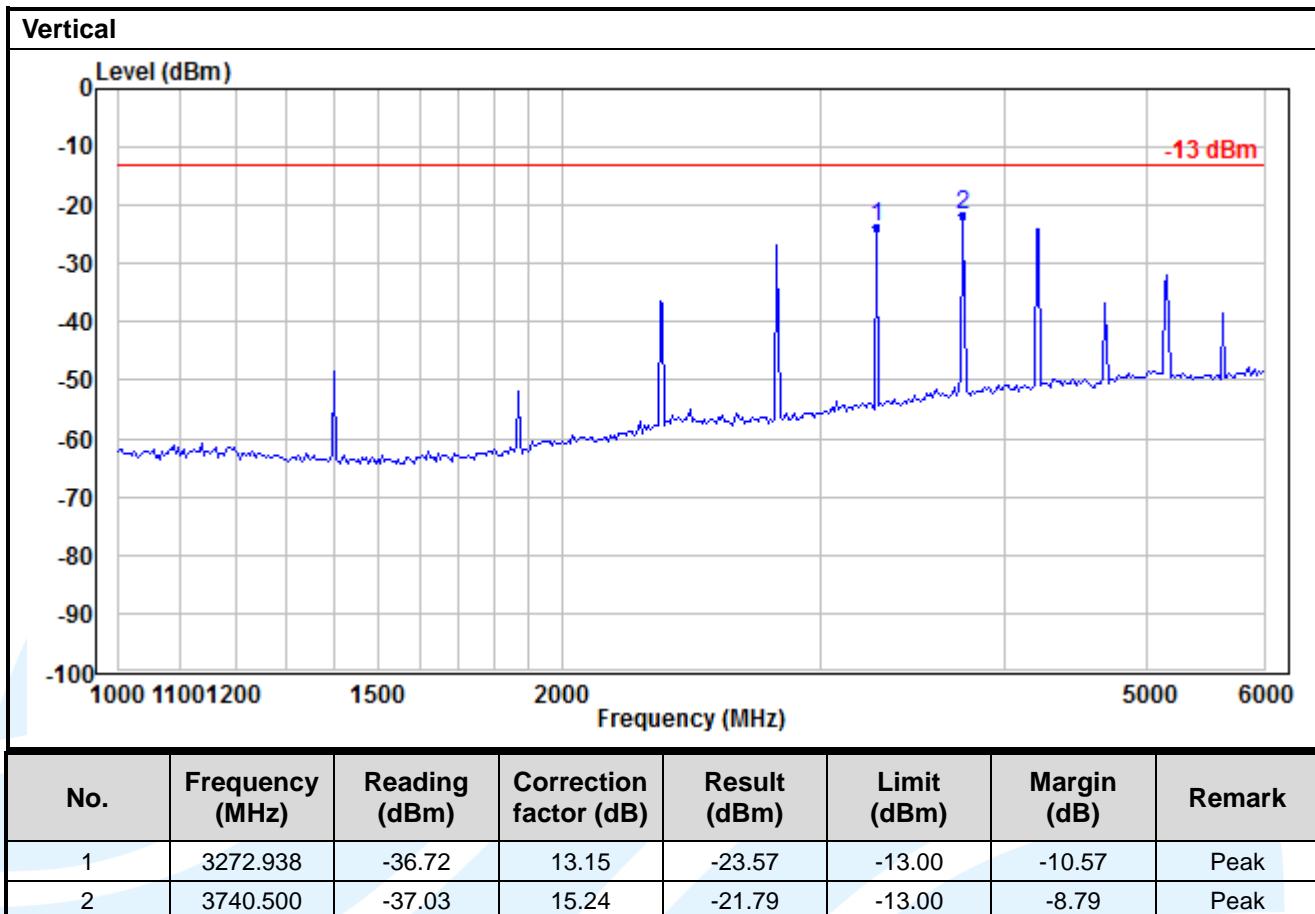

Remark:

1) All the above conduction data, the fundamental frequency is not marked, it may exceed the limit, please ignore it.

## APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

## APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

---

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

---