



REPORT No. : SZ17120057W02

TEST REPORT

APPLICANT : Sound Bubble LLC

PRODUCT NAME : Ear Bolts

MODEL NAME : LA-S062

BRAND NAME : Sound Bubble LLC

FCC ID : 2AOYZEB1BTV1020218X

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2018-01-15 to 2018-02-02

ISSUE DATE : 2018-04-08

Tested by: Li Jingzong
Li Jingzong (Test Engineer)

Approved by: Andy Yeh
Andy Yeh (Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Manufacturer and Factory Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	5
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna requirement	6
2.2. Number of Hopping Frequency	6
2.3. Peak Output Power	10
2.4. 20dB Bandwidth	17
2.5. Carried Frequency Separation	24
2.6. Time of Occupancy (Dwell time)	27
2.7. Conducted Spurious Emissions	34
2.8. Restricted Frequency Bands	47
2.9. Conducted Emission	56
2.10. Radiated Emission	60
Annex A Test Uncertainty	73
Annex B Testing Laboratory Information	74



REPORT No. : SZ17120057W02

Change History		
Issue	Date	Reason for change
1.0	2018-04-08	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Sound Bubble LLC
Applicant Address:	2256 Saint Margarets Court, Livermore, CA94550, USA
Manufacturer:	Dongguan Manchun Electronic Technology Co., Ltd.
Manufacturer Address:	No.2, Lanyuan road, Zengtian Industrial Park, Chang'an Town, Dongguan City, Guangdong Province, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Ear Bolts
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	B04G
Software Version:	VER1.0
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Operating Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Bluetooth Version:	Bluetooth 4.1(BR/EDR)
Antenna Type:	PIFA Antenna
Antenna Gain:	2.0 dBi

Note 1: The EUT contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(a)	Number of Hopping Frequency	Jan 15, 2018	Li Jingzong	PASS
3	15.247(b)	Peak Output Power	Jan 15, 2018 & Apr 08, 2018	Li Jingzong	PASS
4	15.247(a)	20dB Bandwidth	Jan 15, 2018	Li Jingzong	PASS
5	15.247(a)	Carrier Frequency Separation	Jan 15, 2018	Li Jingzong	PASS
6	15.247(a)	Time of Occupancy (Dwell time)	Jan 15, 2018	Li Jingzong	PASS
7	15.247(d)	Conducted Spurious Emission	Jan 15, 2018	Li Jingzong	PASS
8	15.247(d)	Restricted Frequency Bands	Jan 20, 2018	Peng Xuewei	PASS
9	15.209, 15.247(d)	Radiated Emission	Jan 20, 2018	Peng Xuewei	PASS
10	15.207	Conducted Emission	Jan 20, 2018	Peng Xuewei	PASS

Note: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

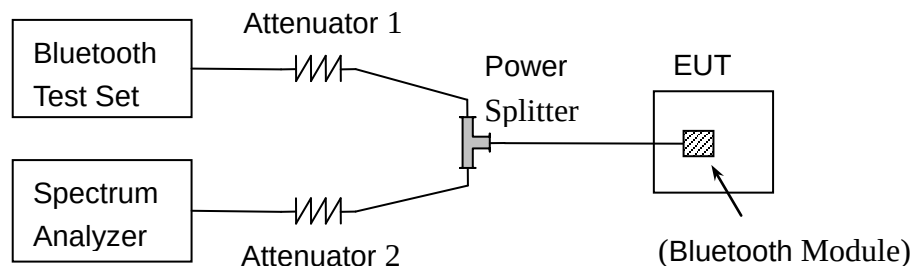

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS



Agilent Spectrum Analyzer - Swept SA

Marker 1 Δ 79.15800000 MHz

PNO: Fast IF Gain: Low Trig: Free Run Atten: 24 dB

Avg Type: Log-Pwr Avg/Hold: >10/10

Ref Offset 1.5 dB Ref 15.00 dBm

Δ Mkr1 79.158 0 MHz -2.575 dB

10 dB/div Log

Start 2.40000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.48350 GHz Sweep 1.000 ms (1001 pts)



Marker Select Marker 1

Normal Delta Fixed Off

Properties More 1 of 2

MSG STATUS

(GFSK)

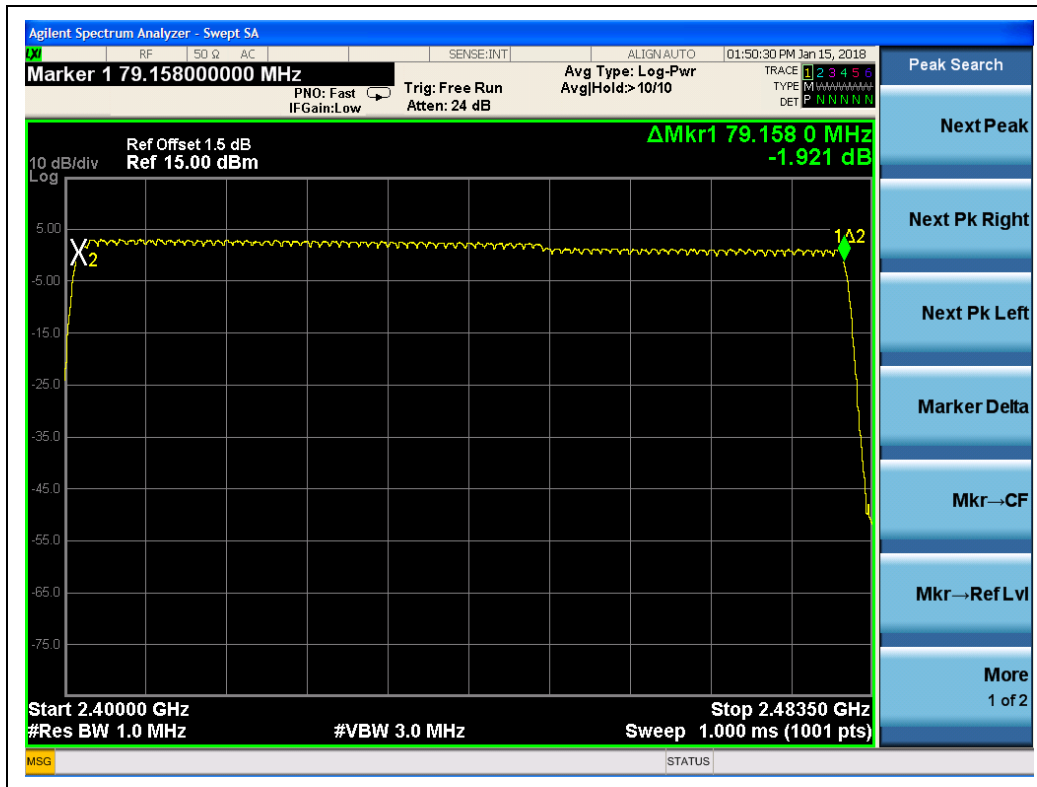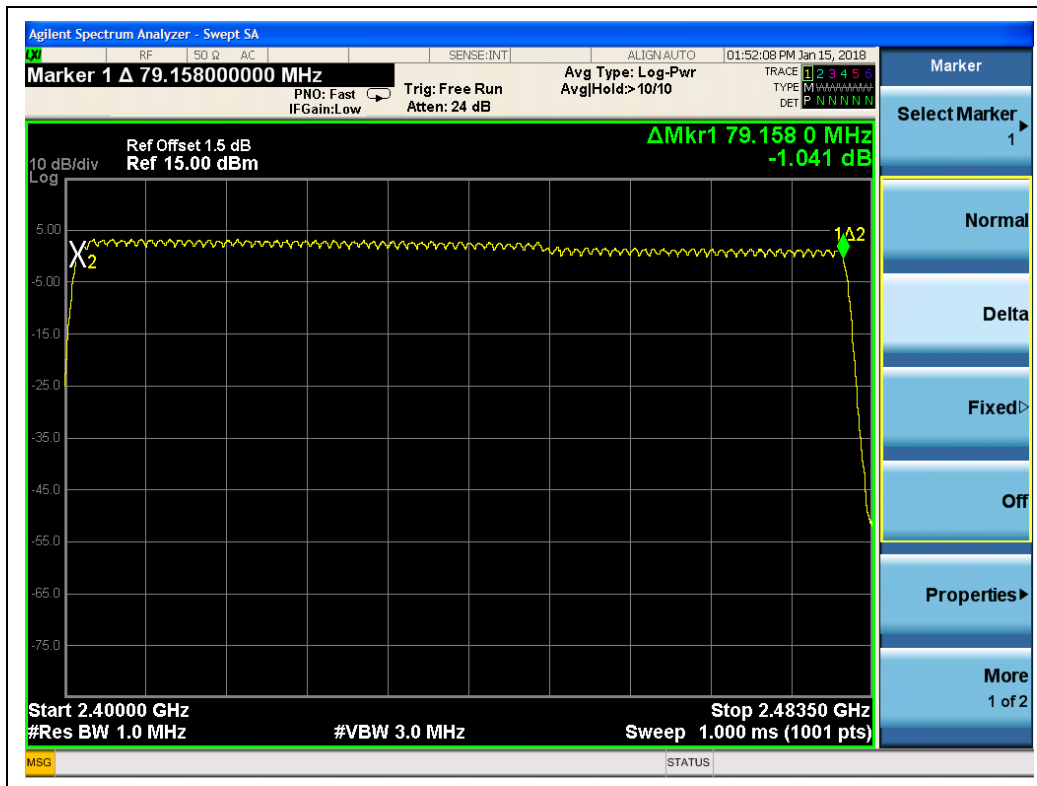 $(\pi/4\text{-DQPSK})$  (8- DPSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

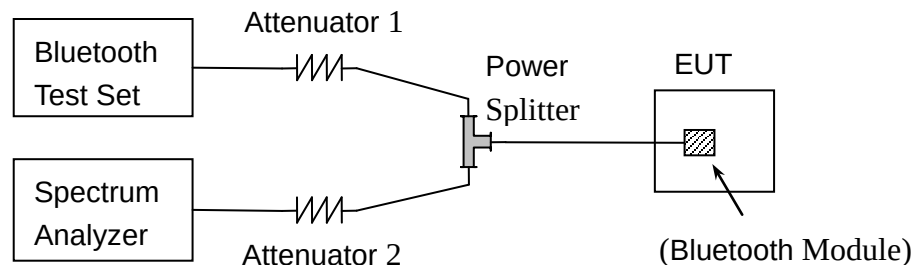

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.




2.3.3.1 GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	4.72	0.00296	30	1	PASS
39	2441	4.73	0.00297			PASS
78	2480	3.23	0.00210			PASS


B. Test Plots:

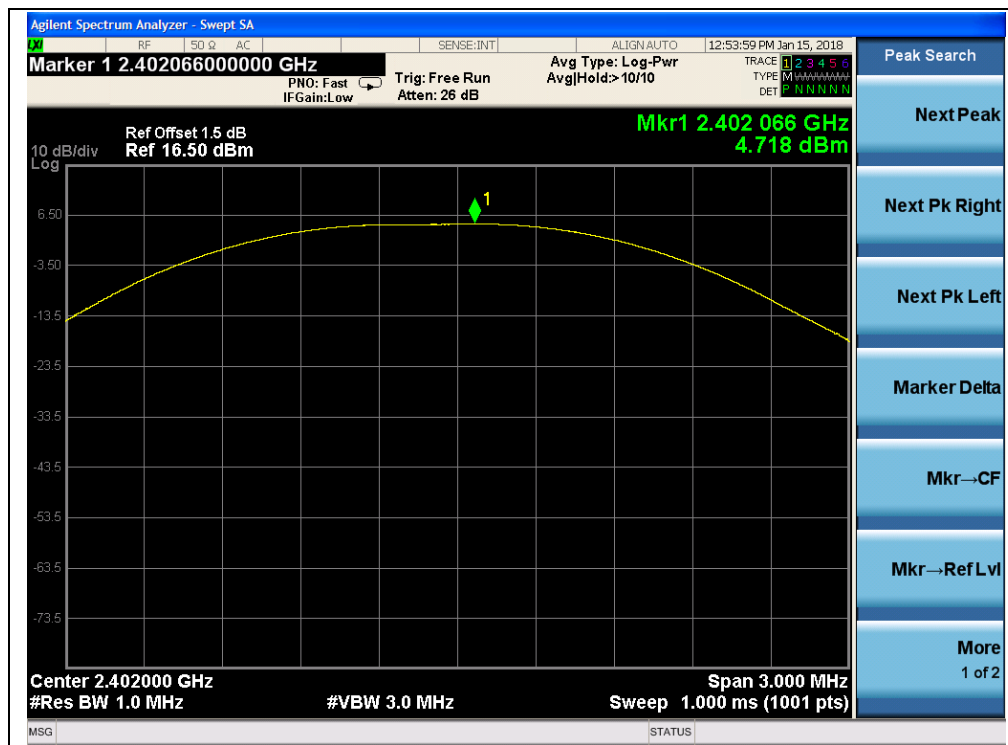

(GFSK, Channel 0, 2402MHz)

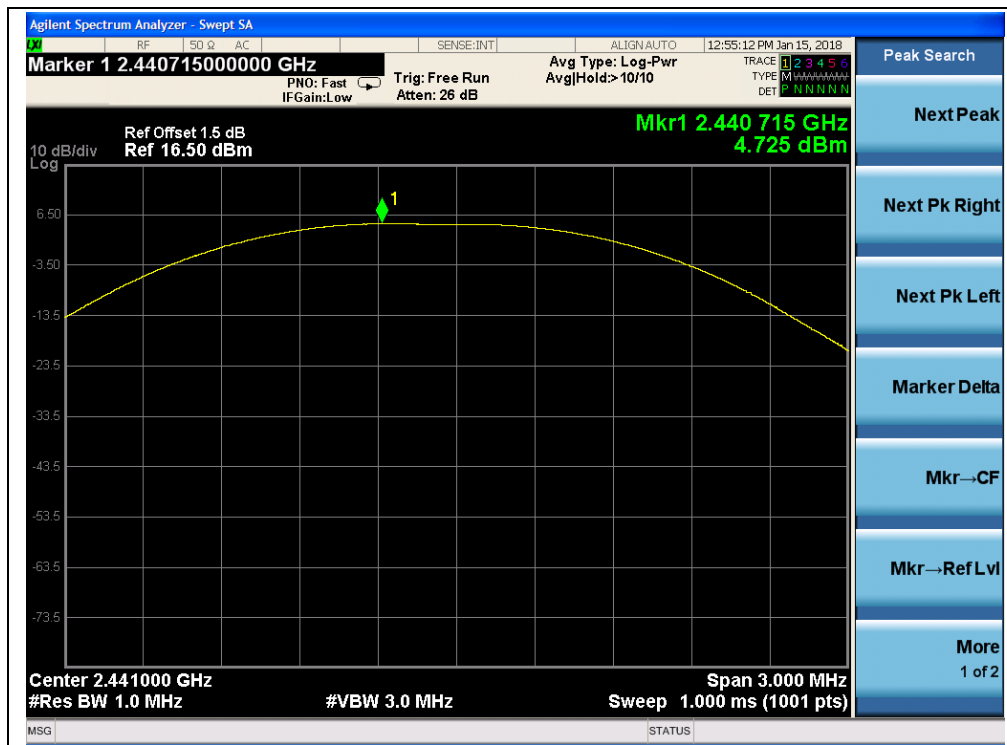

(GFSK, Channel 39, 2441MHz)

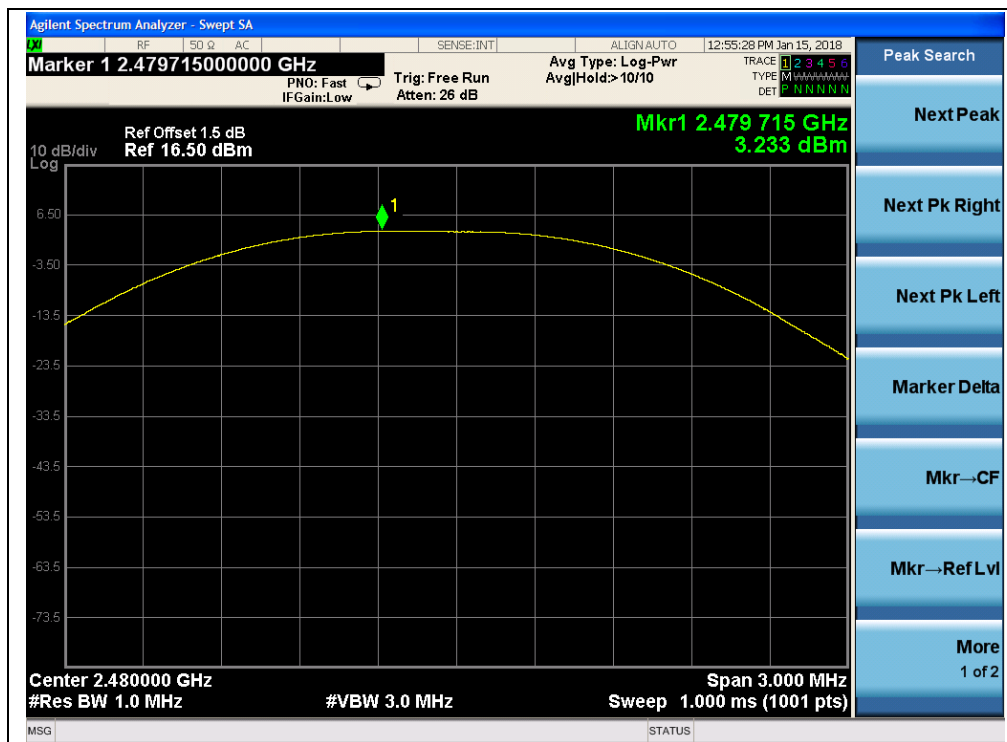

(GFSK, Channel 78, 2480MHz)




2.3.3.2 $\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	1.19	0.00132	30	1	PASS
39	2441	2.54	0.00179			PASS
78	2480	2.95	0.00197			PASS


B. Test Plots:

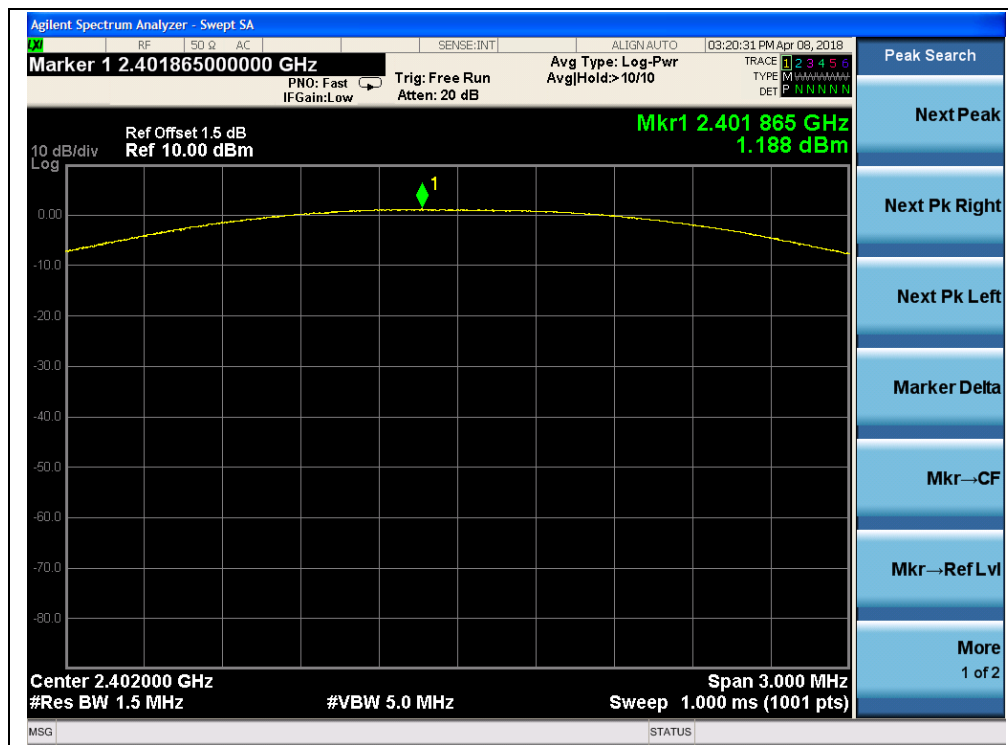

($\pi/4$ -DQPSK, Channel 0, 2402MHz)

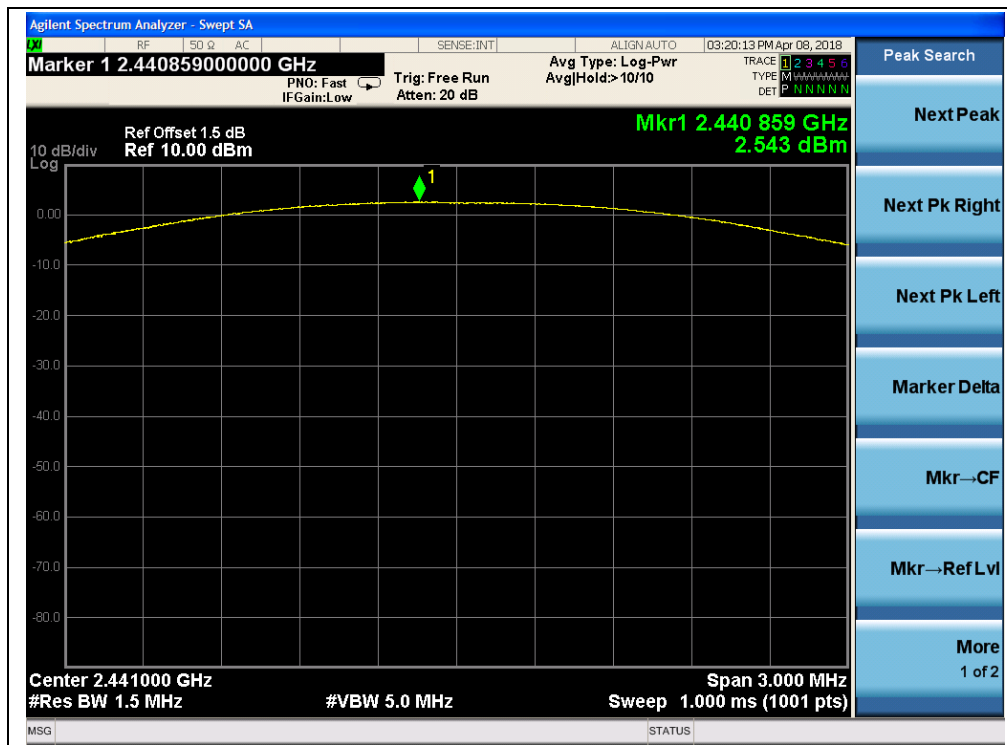

(π/4-DQPSK, Channel 39, 2441MHz)

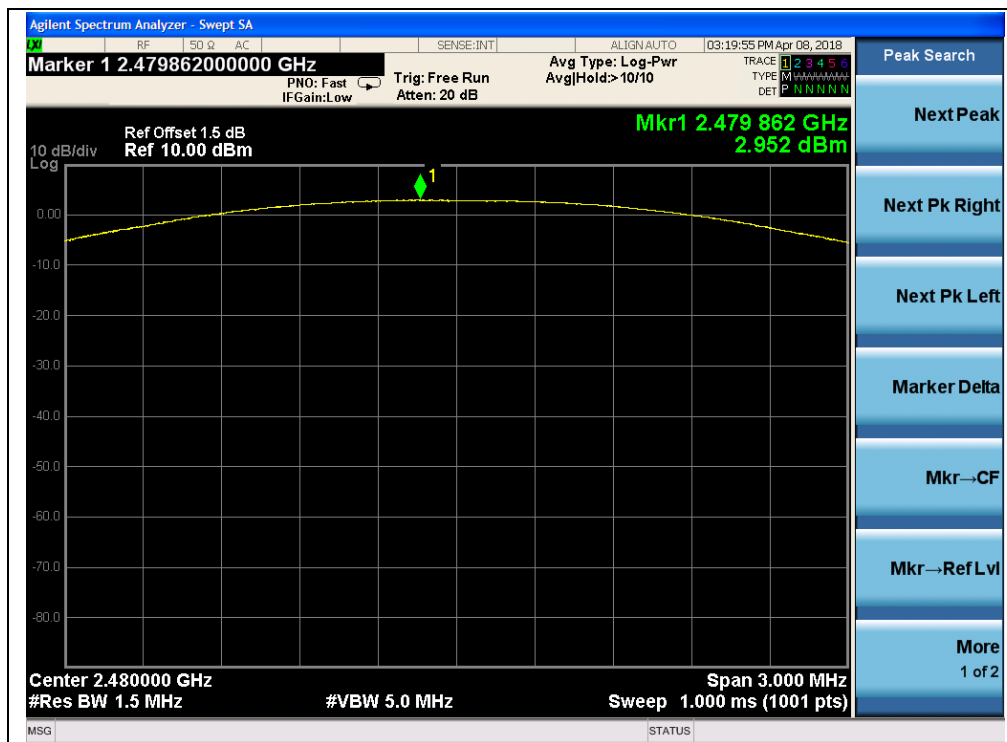

(π/4-DQPSK, Channel 78, 2480MHz)




2.3.3.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	1.33	0.00136	30	1	PASS
39	2441	2.66	0.00185			PASS
78	2480	3.14	0.00206			PASS


B. Test Plots:

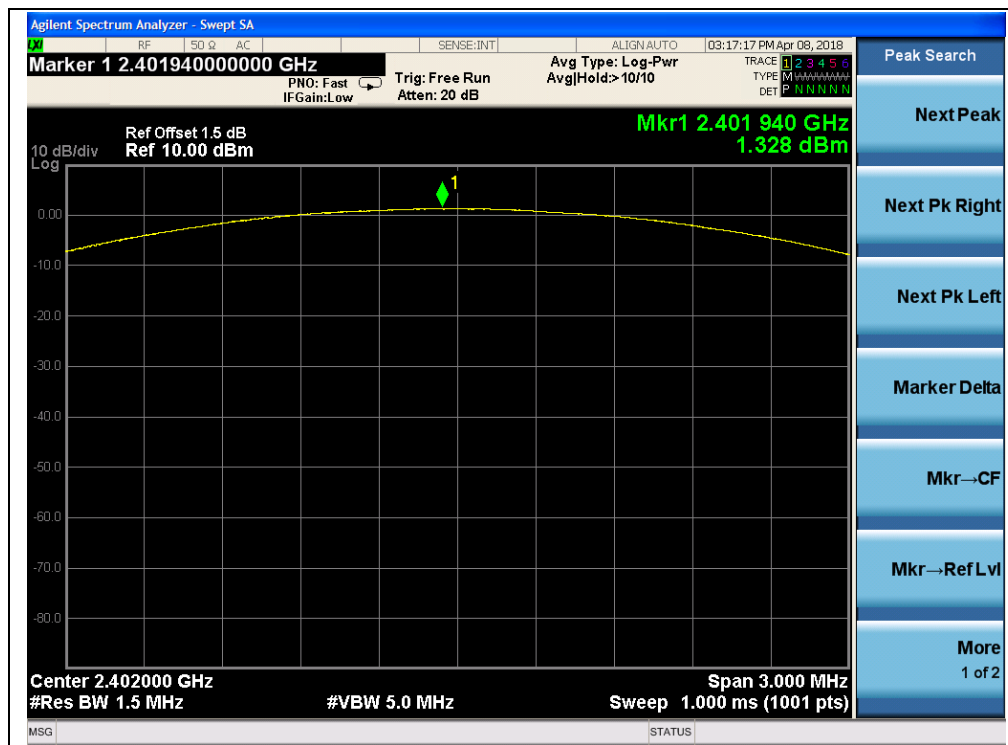

(8-DPSK, Channel 0, 2402MHz)

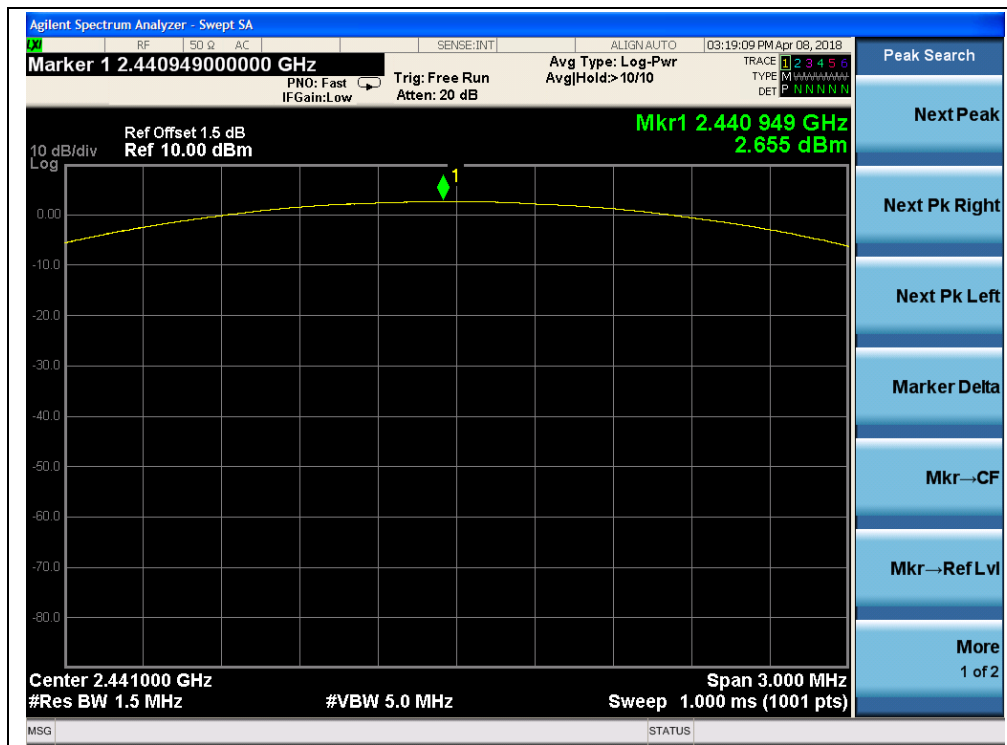

(8-DPSK, Channel 39, 2441MHz)

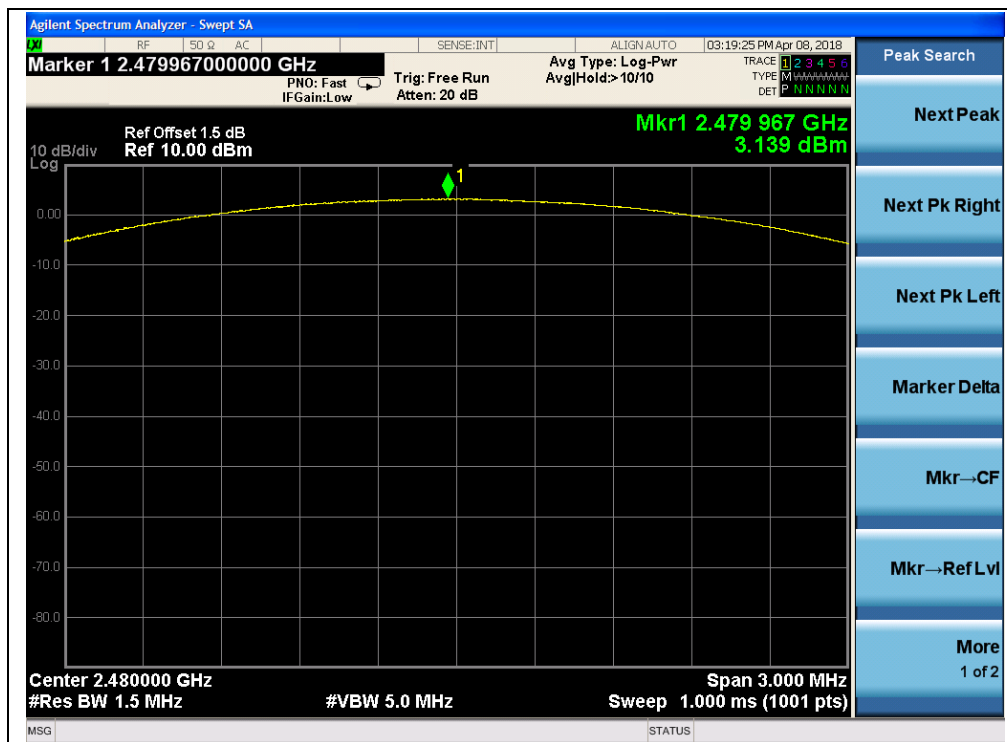

(8-DPSK, Channel 78, 2480MHz)


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

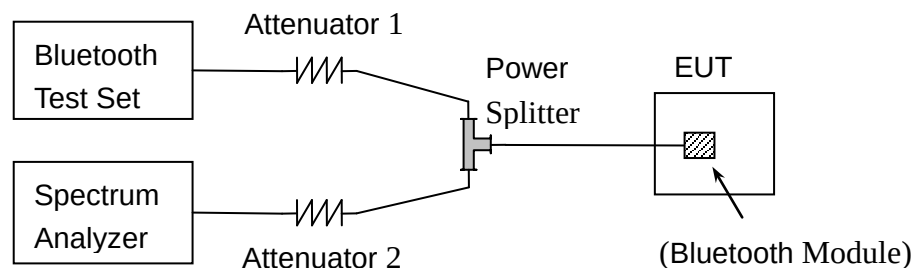

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.4.4. Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

2.4.4.1 GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.9494	PASS
39	2441	0.9480	PASS
78	2480	0.9453	PASS

B. Test Plots:

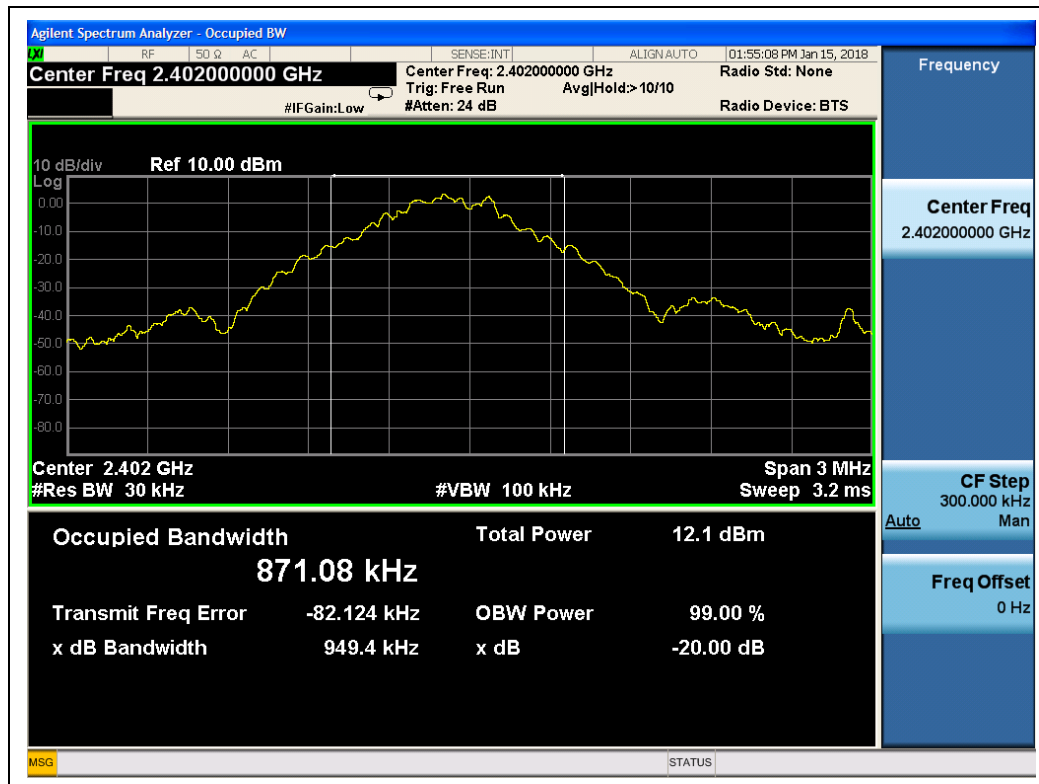

(GFSK, Channel 0, 2402MHz)

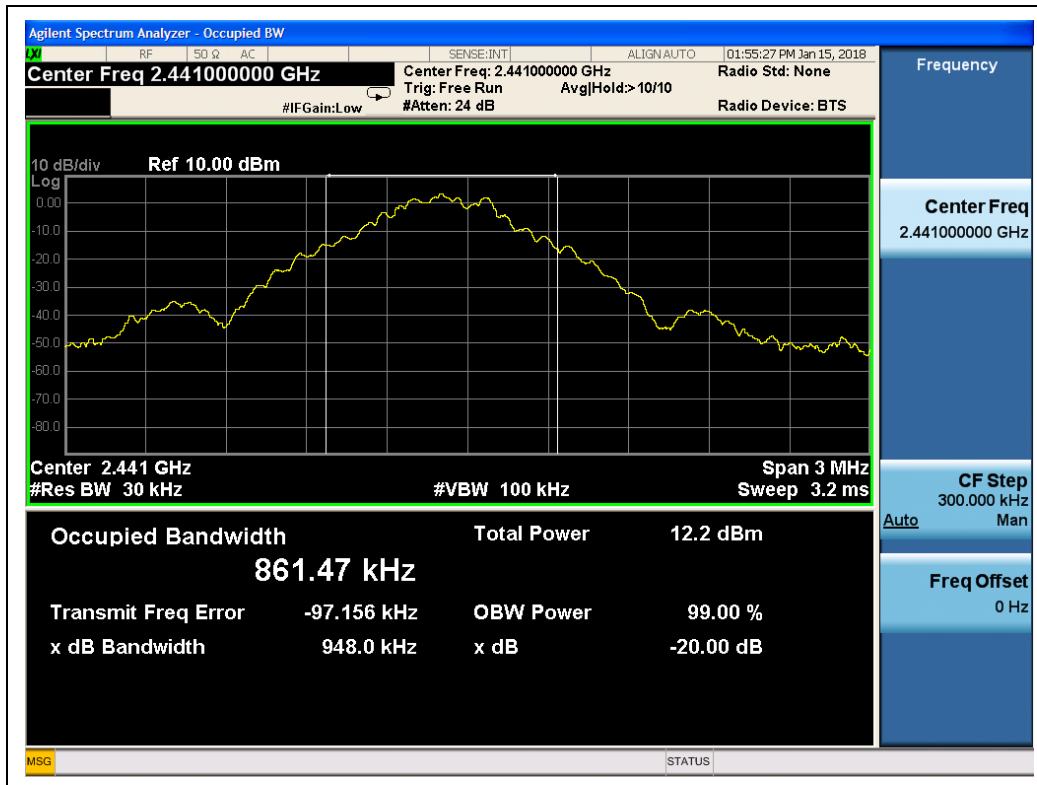

(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)




2.4.4.2 $\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.268	PASS
39	2441	1.238	PASS
78	2480	1.266	PASS


B. Test Plots:

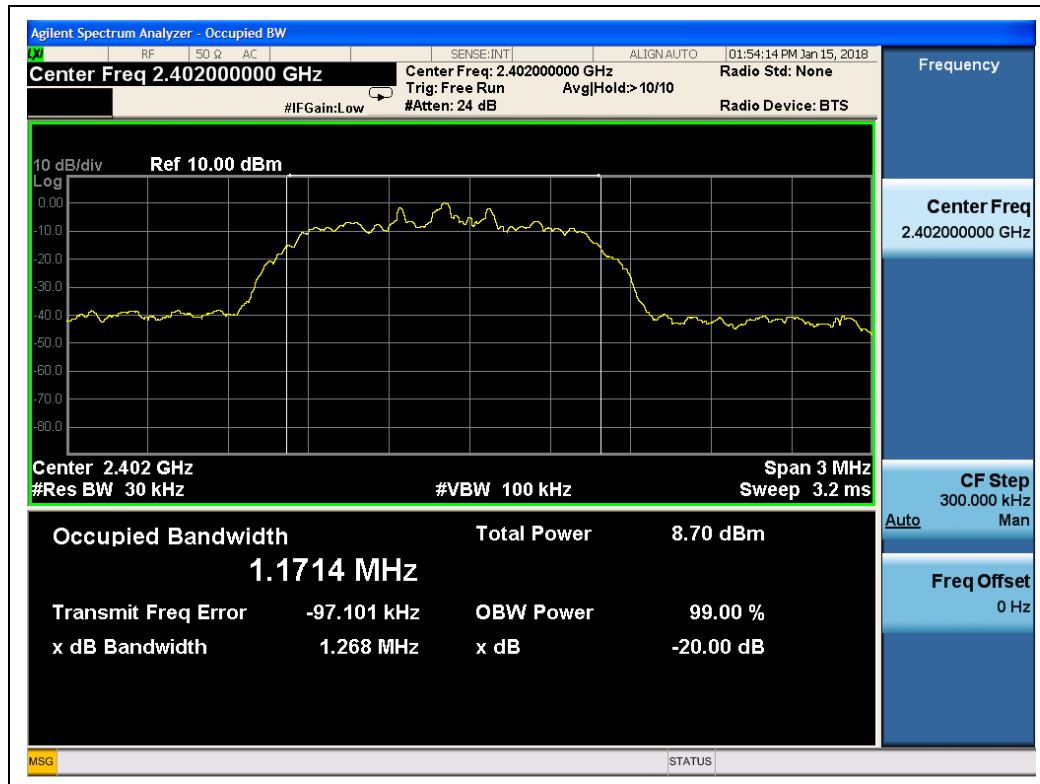

($\pi/4$ -DQPSK, Channel 0, 2402MHz)

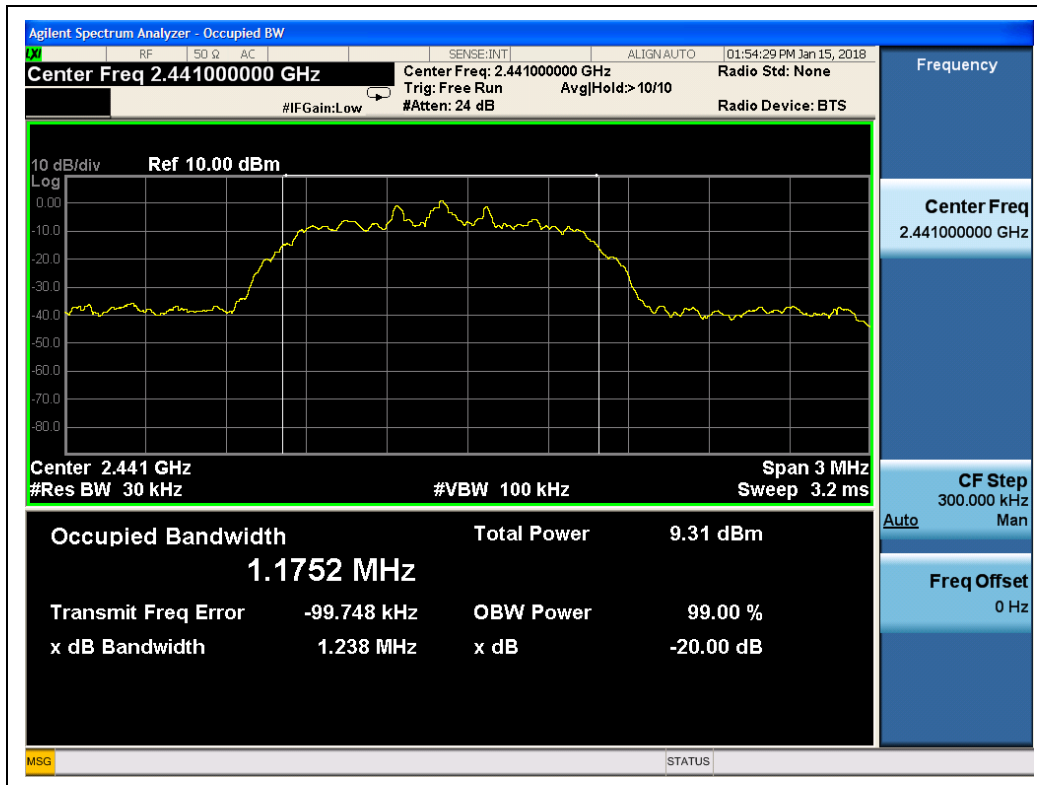

(π/4-DQPSK, Channel 39, 2441MHz)

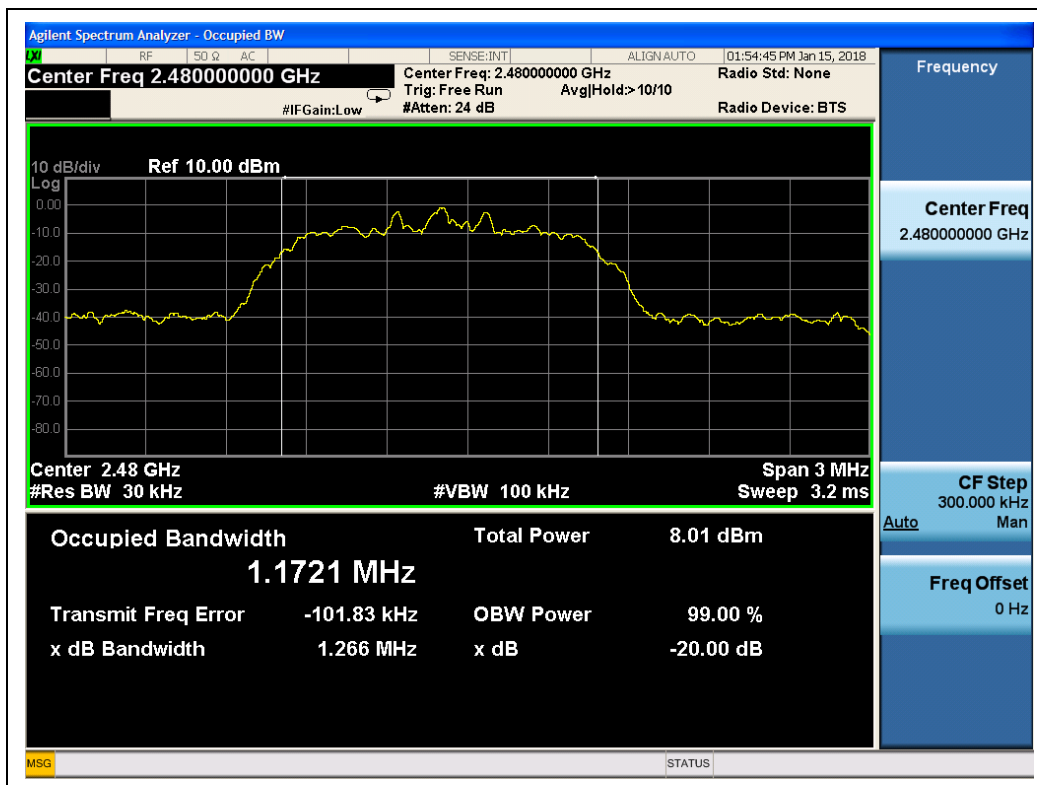

(π/4-DQPSK, Channel 78, 2480MHz)




2.4.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.276	PASS
39	2441	1.272	PASS
78	2480	1.272	PASS


B. Test Plots:

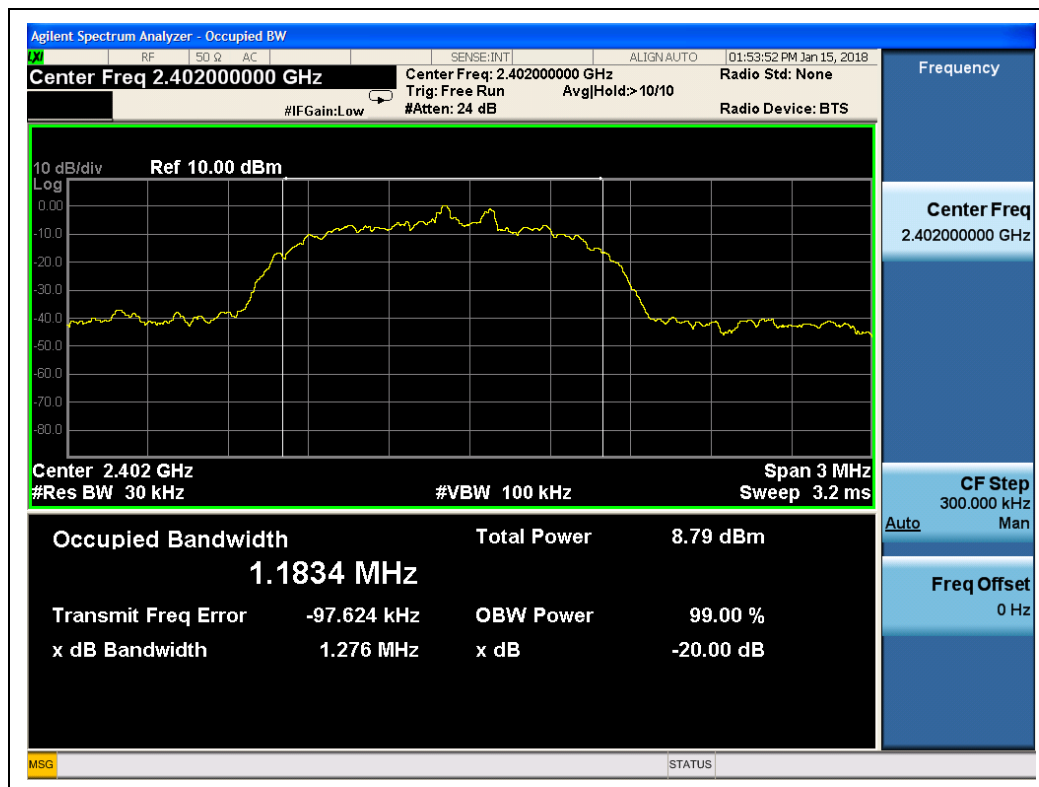

(8-DPSK, Channel 0, 2402MHz)

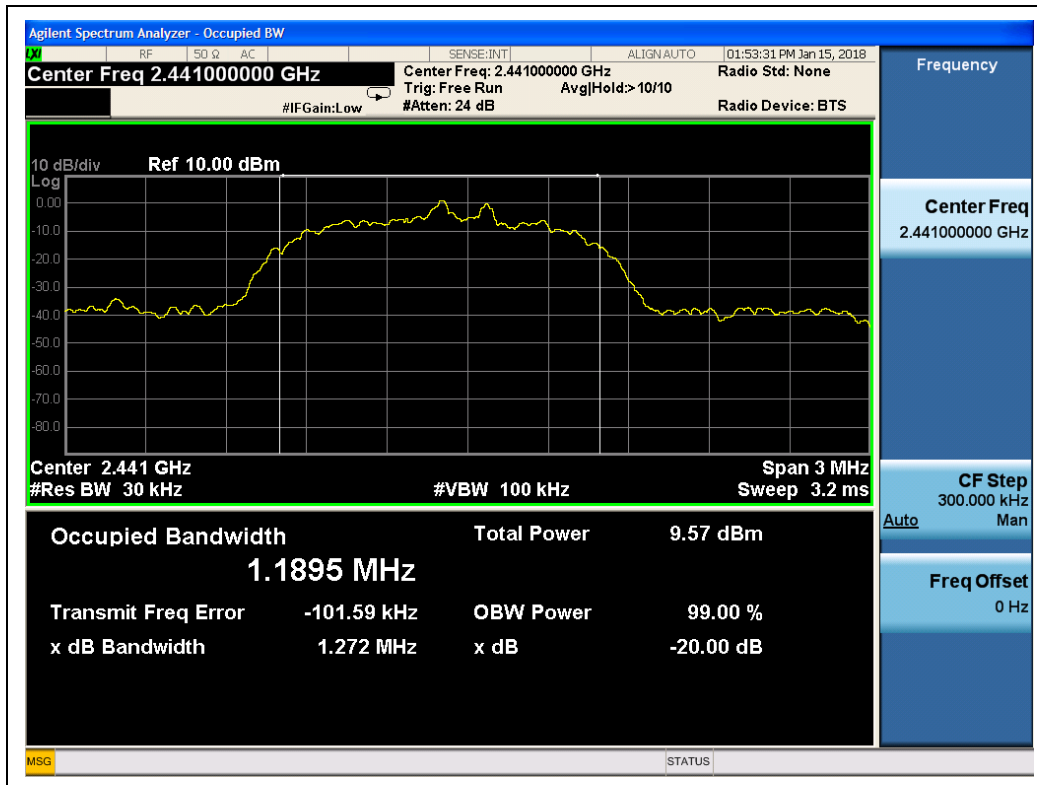

(8-DPSK, Channel 39, 2441MHz)

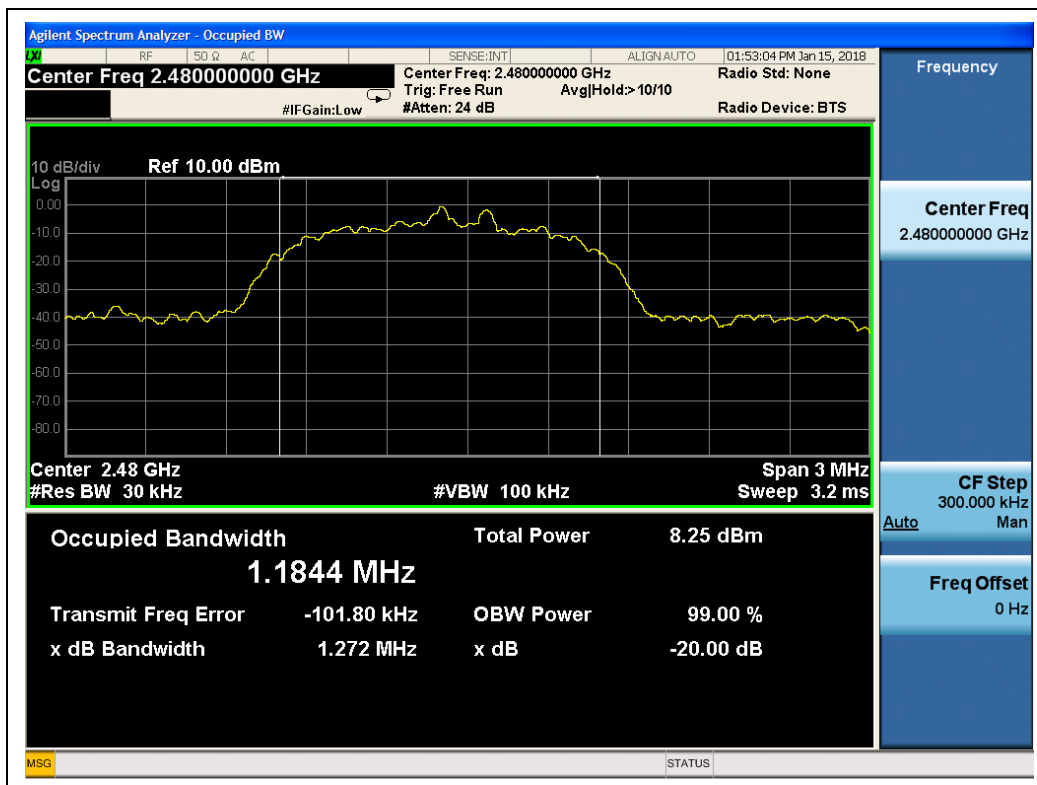

(8-DPSK, Channel 78, 2480MHz)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

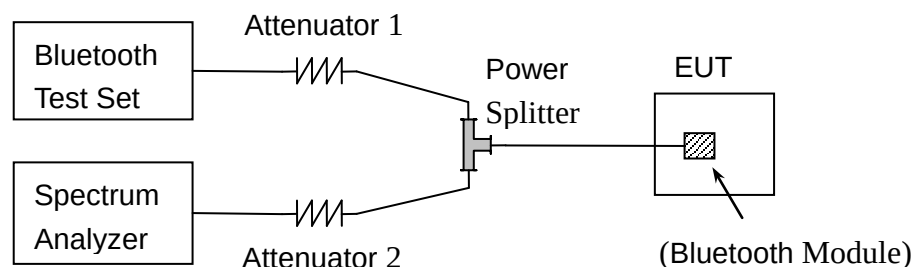

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING


Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.011	0.9453	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.008	1.238		PASS
8-DPSK	39 and 40	1.002	1.272		PASS

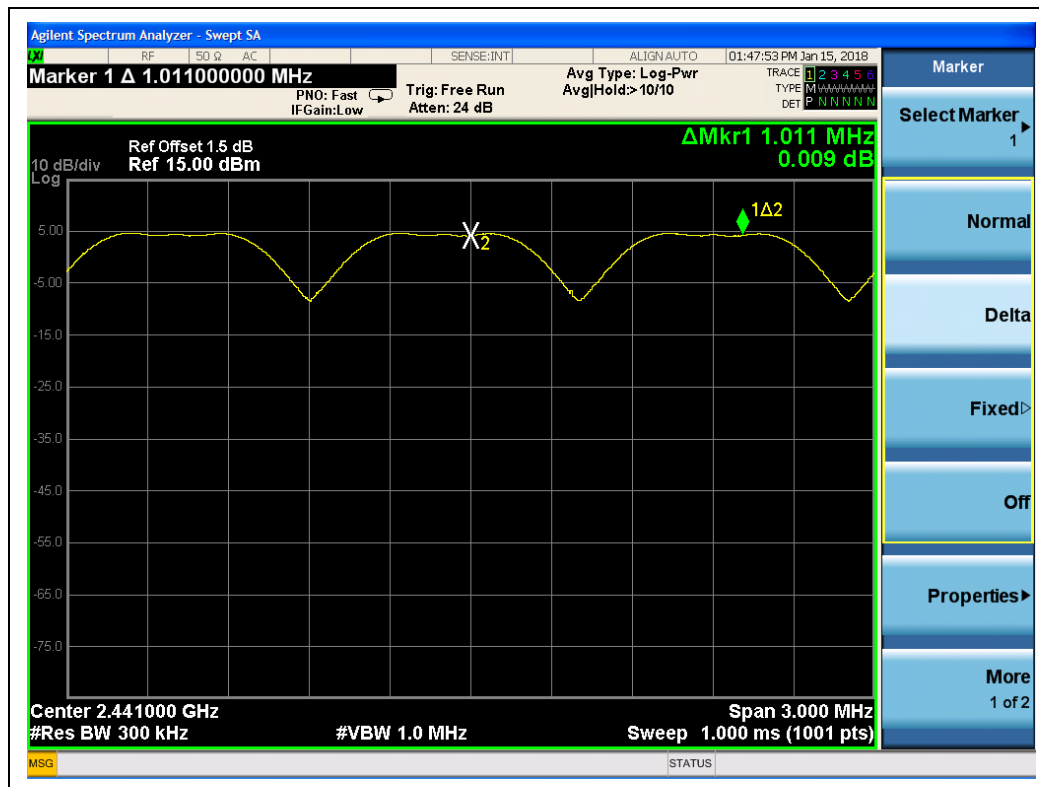

(GFSK)

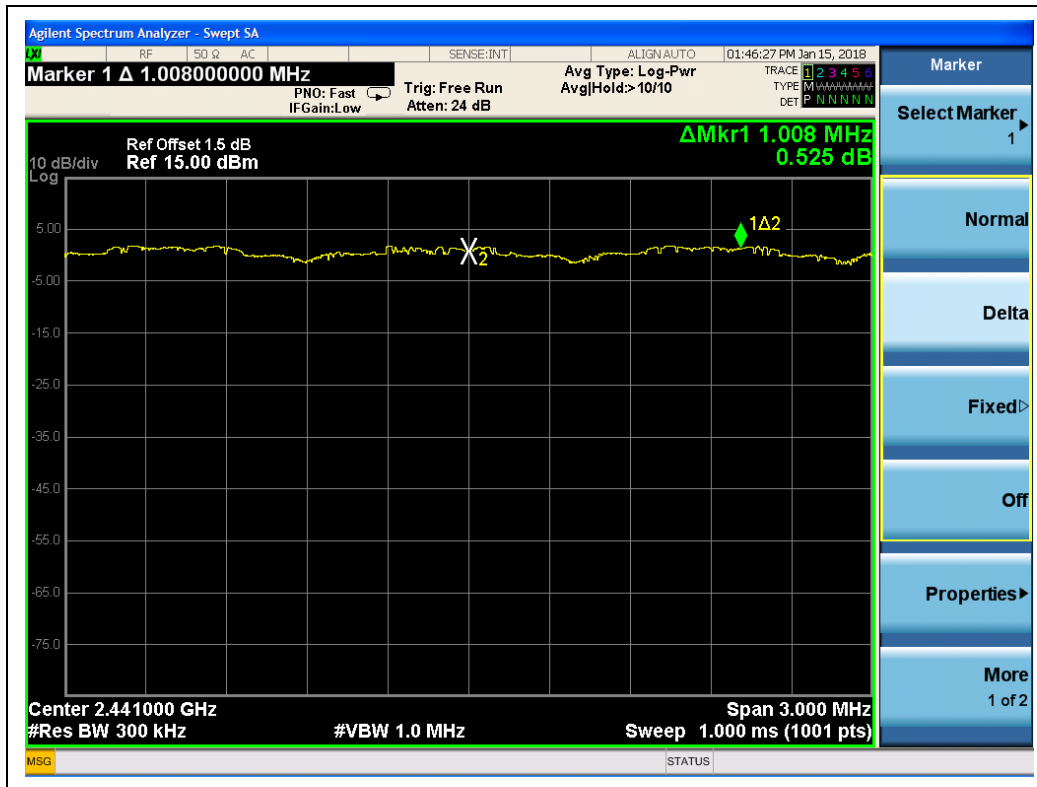

($\pi/4$ -DQPSK)

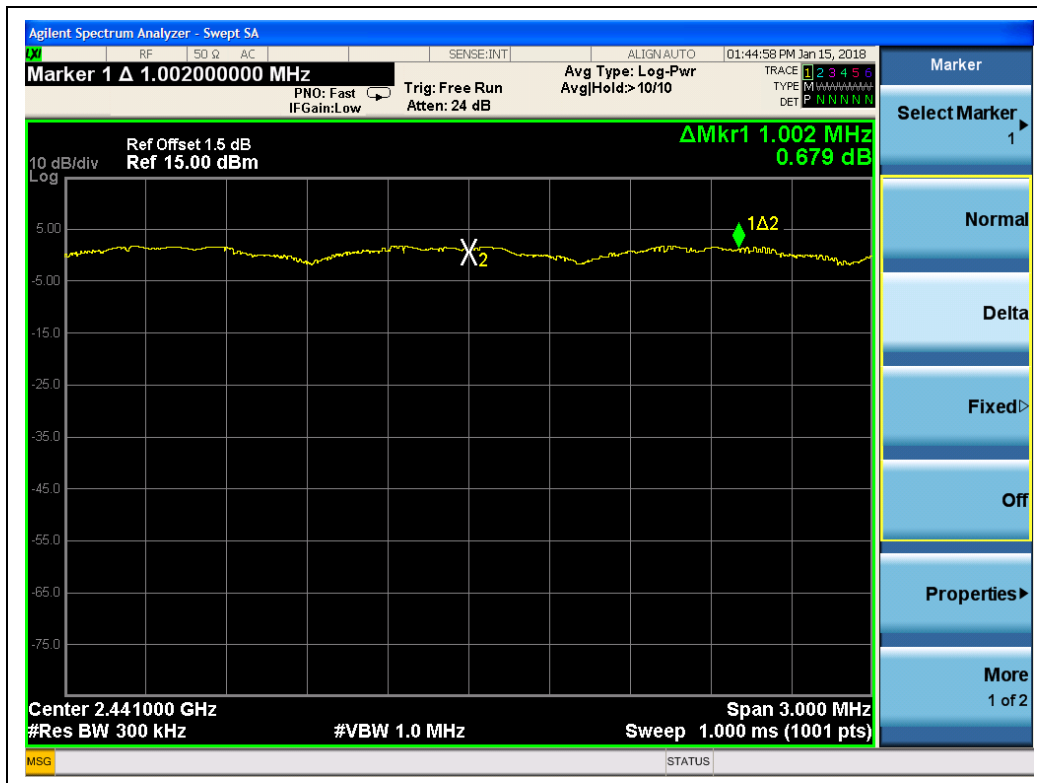

(8-DPSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

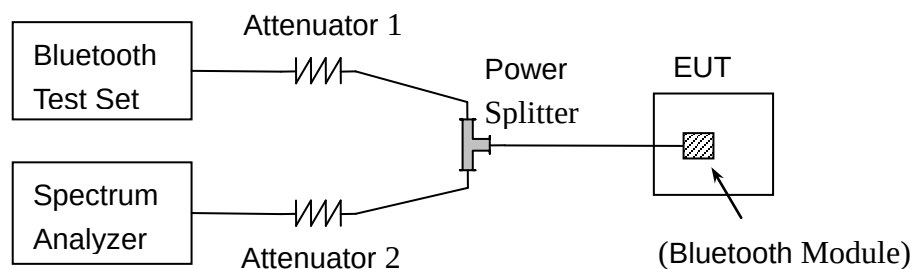

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.6.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond




2.6.4. Test Result

2.6.4.1 GFSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
DH1	0.38	121.92	0.4	PASS
DH3	1.63	261.12		PASS
DH5	2.90	309.12		PASS


B. Test Plots:

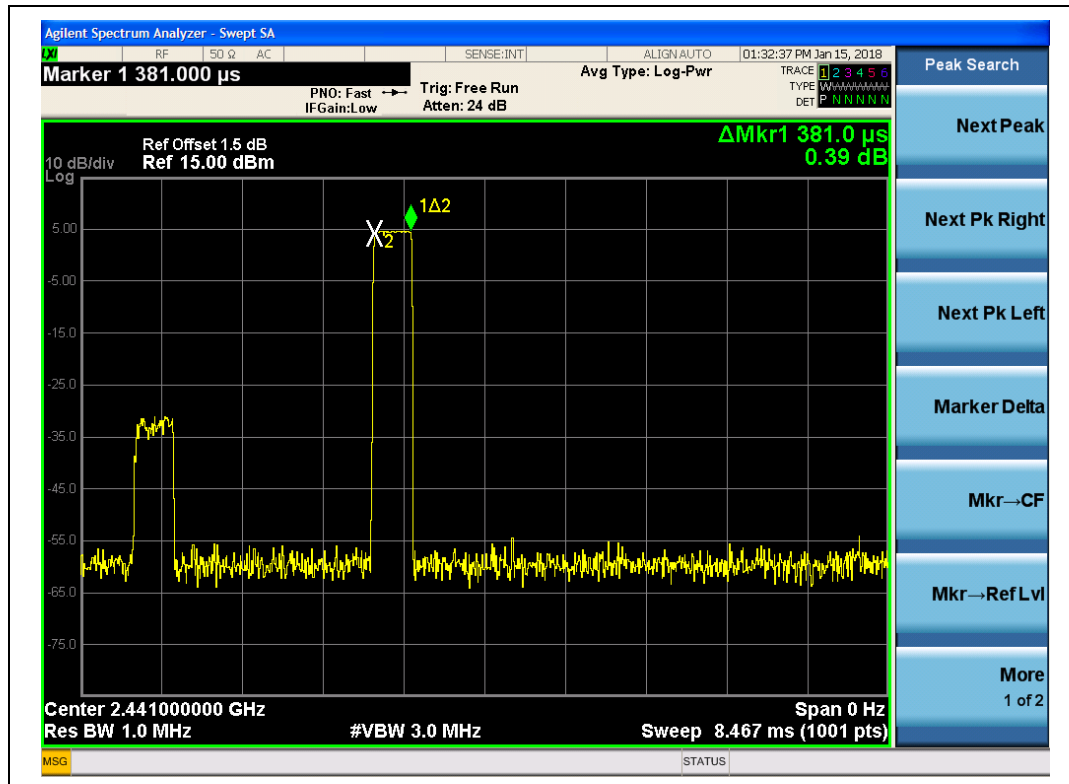

(DH1, GFSK)

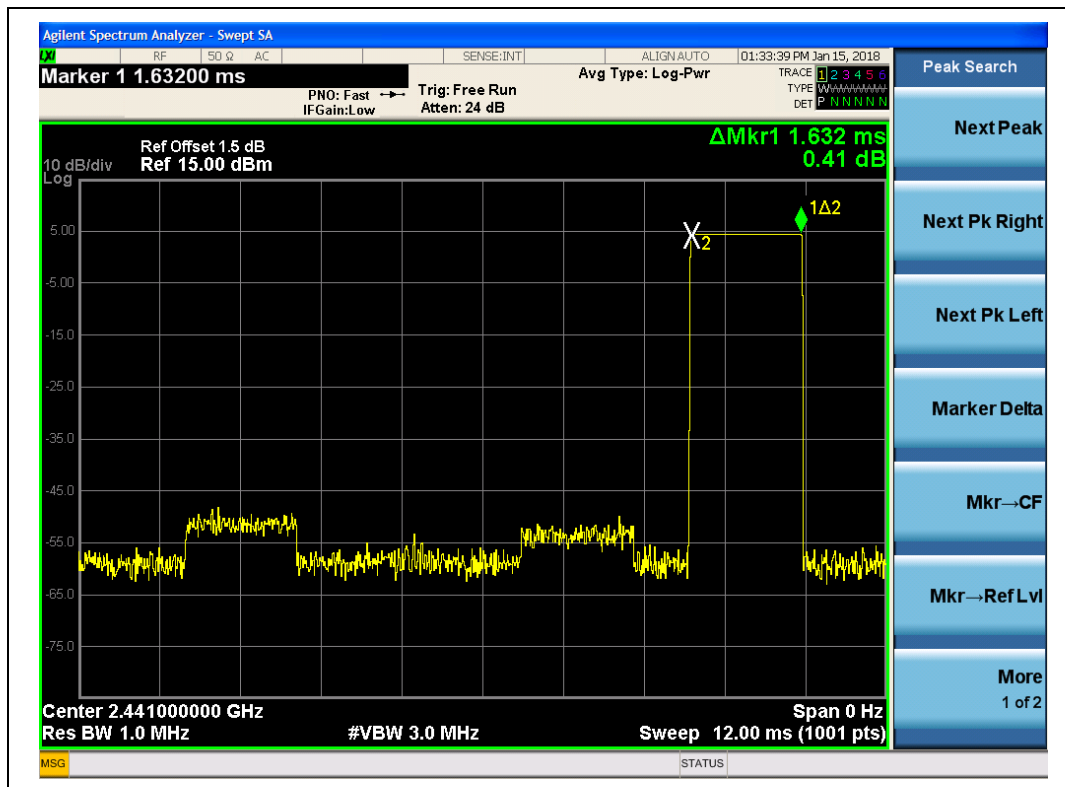

(DH3, GFSK)

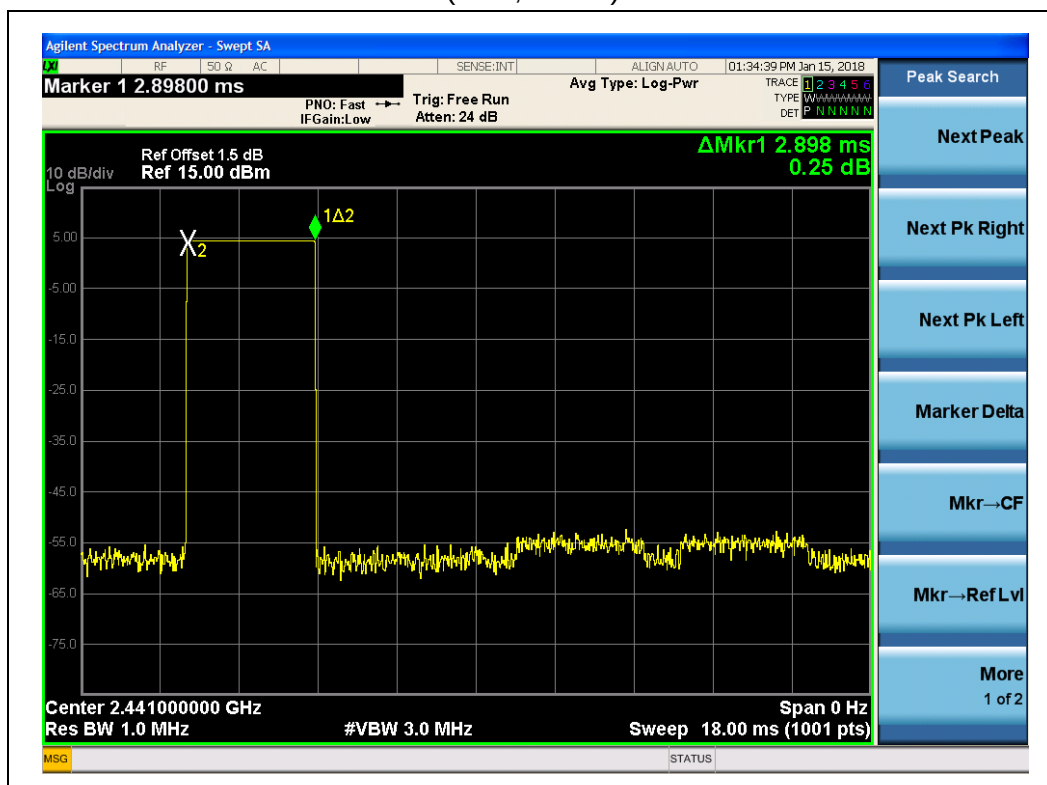

(DH5, GFSK)




2.6.4.2 $\pi/4$ -DQPSK Mode



A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
DH1	0.4	128.00	0.4	PASS
DH3	1.64	262.40		PASS
DH5	2.90	309.33		PASS

B. Test Plots:

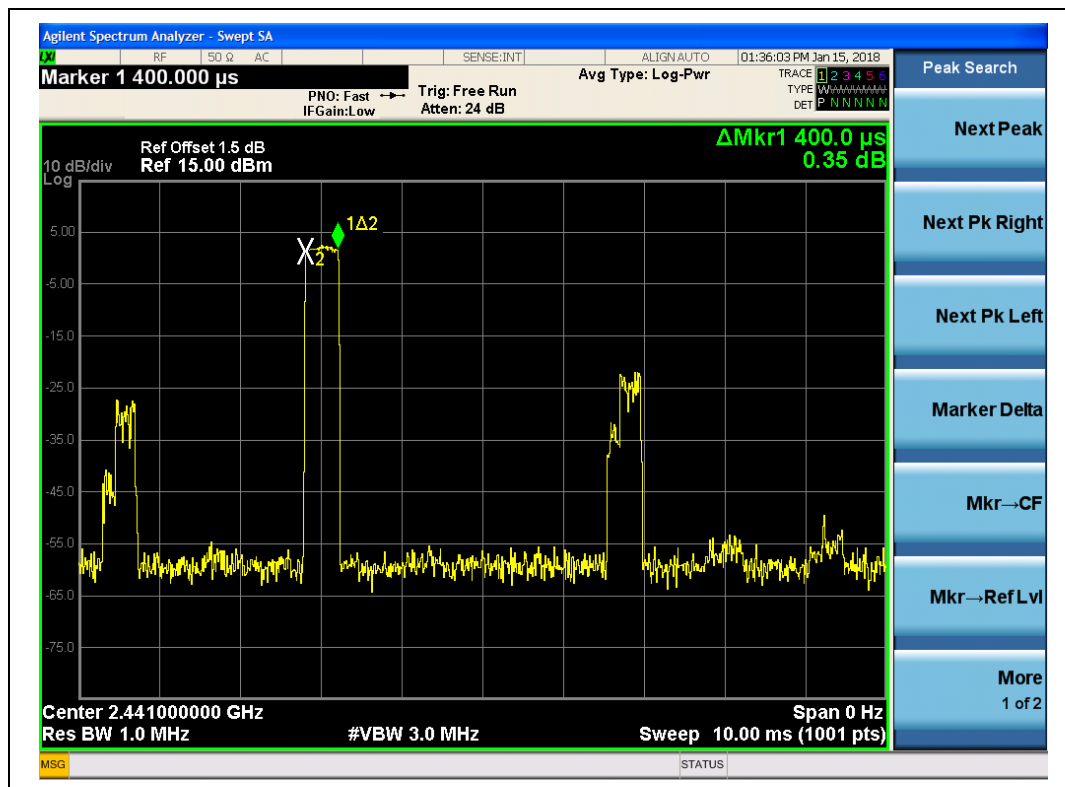

(DH1, $\pi/4$ -DQPSK)

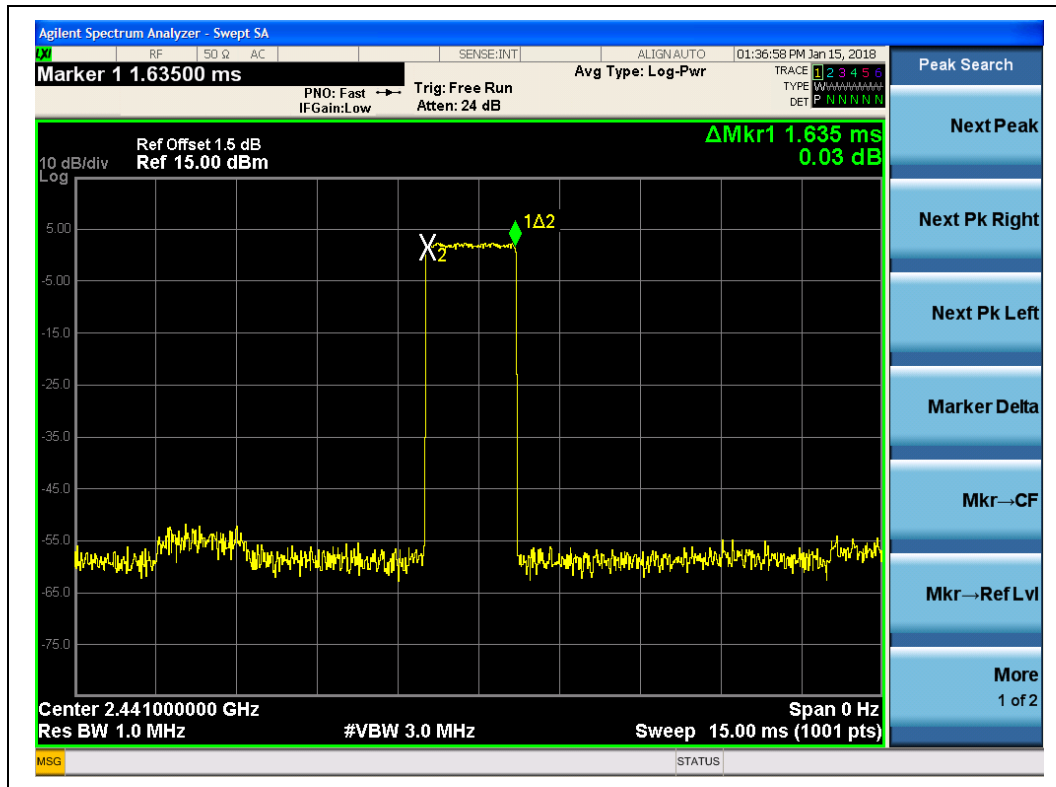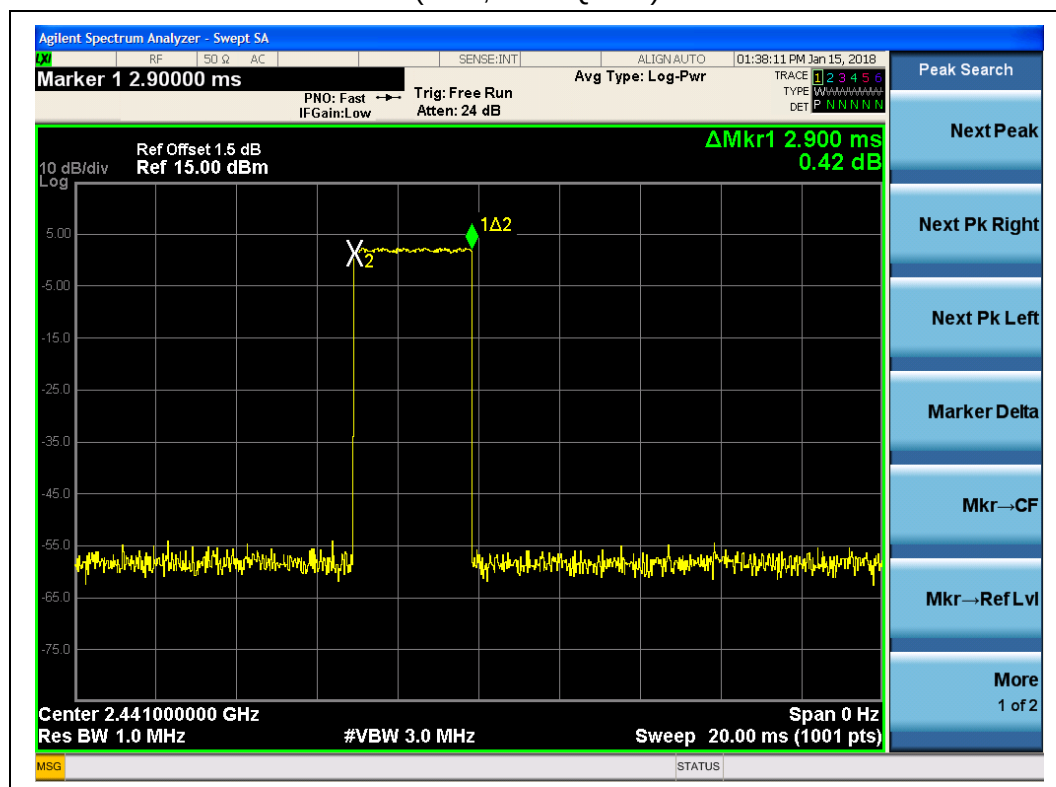
(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)




2.6.4.3 8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)	Limit (sec)	Verdict
DH1	0.4	128.00	0.4	PASS
DH3	1.64	262.40		PASS
DH5	2.84	302.93		PASS


B. Test Plots:

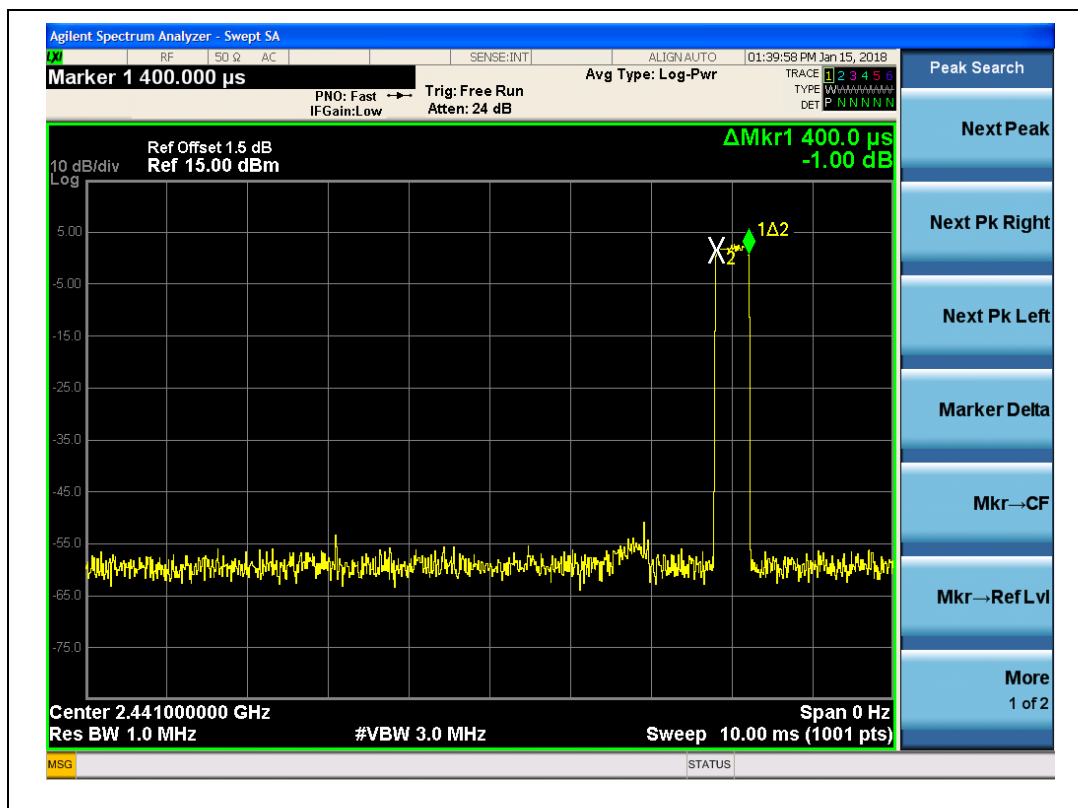

(DH1, 8-DPSK)

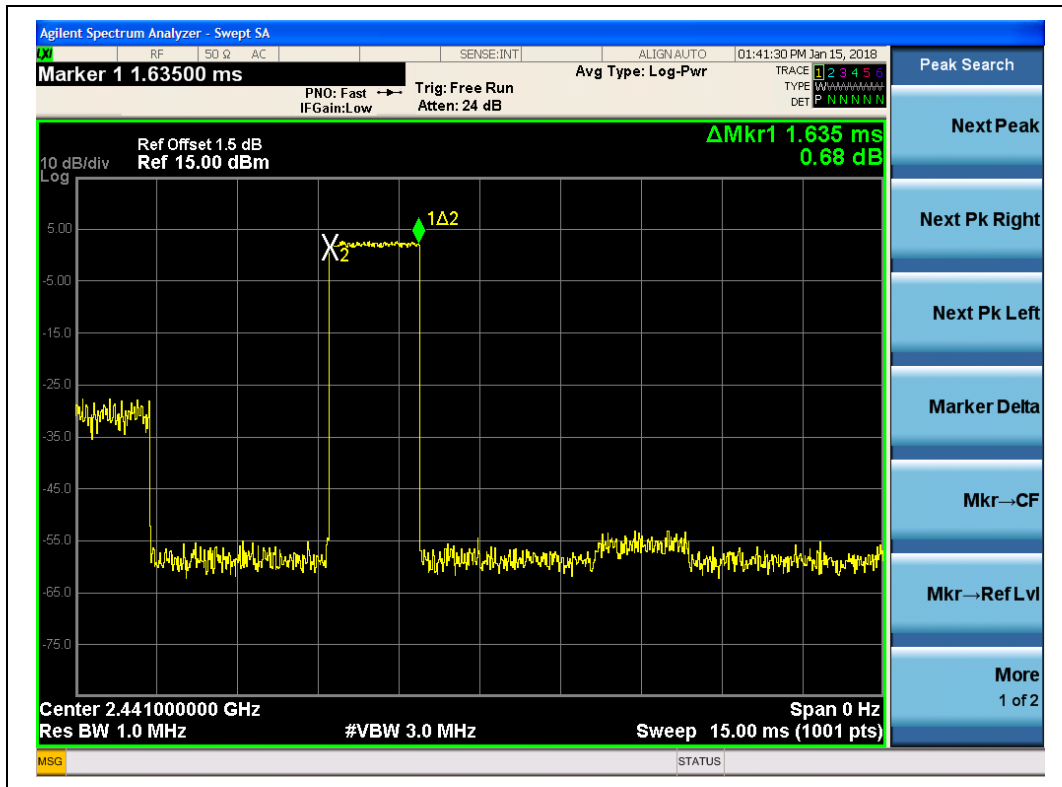

(DH3, 8-DPSK)

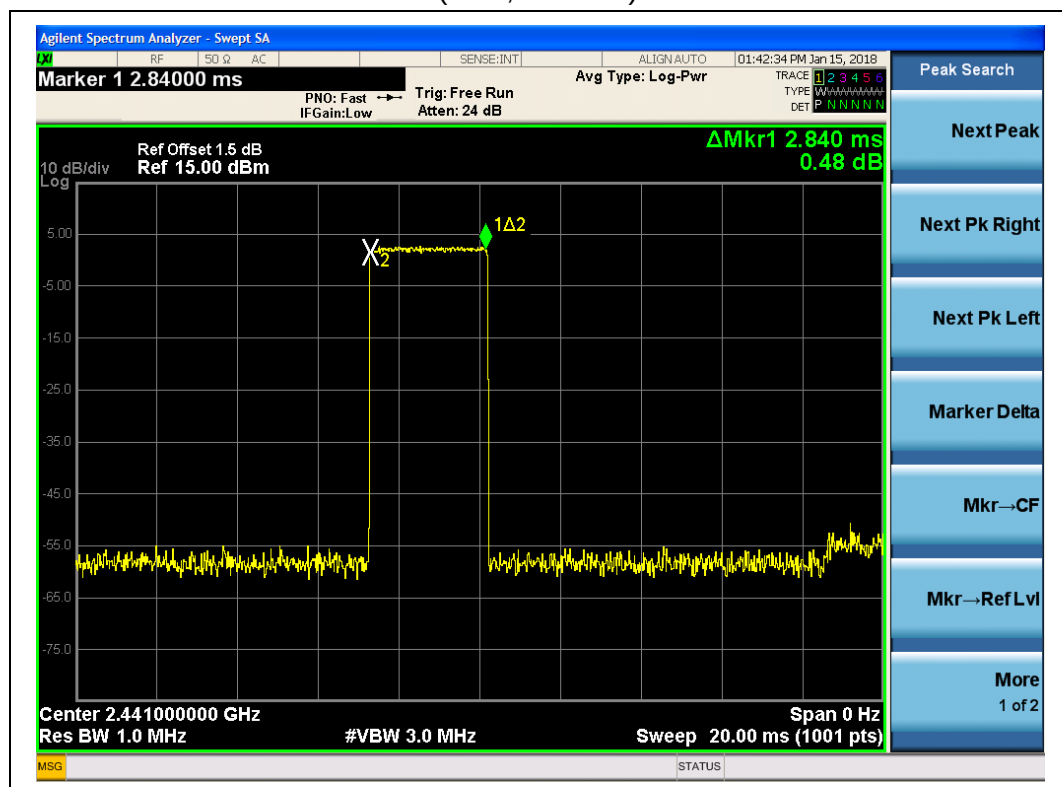

(DH5, 8-DPSK)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

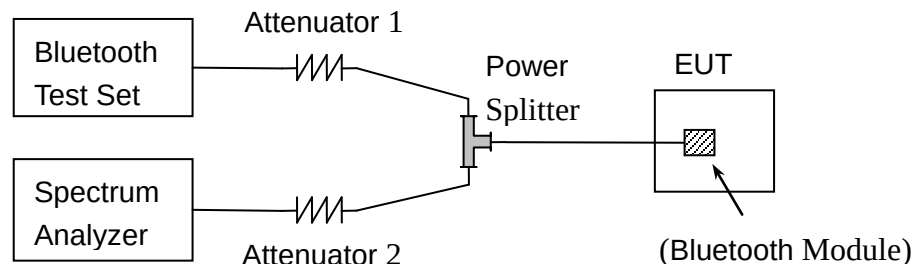

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak



Trace = max hold

Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-45.73	3.71	-16.29	PASS
39	2441	-45.79	4.35	-15.65	PASS
78	2480	-46.71	2.53	-17.47	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

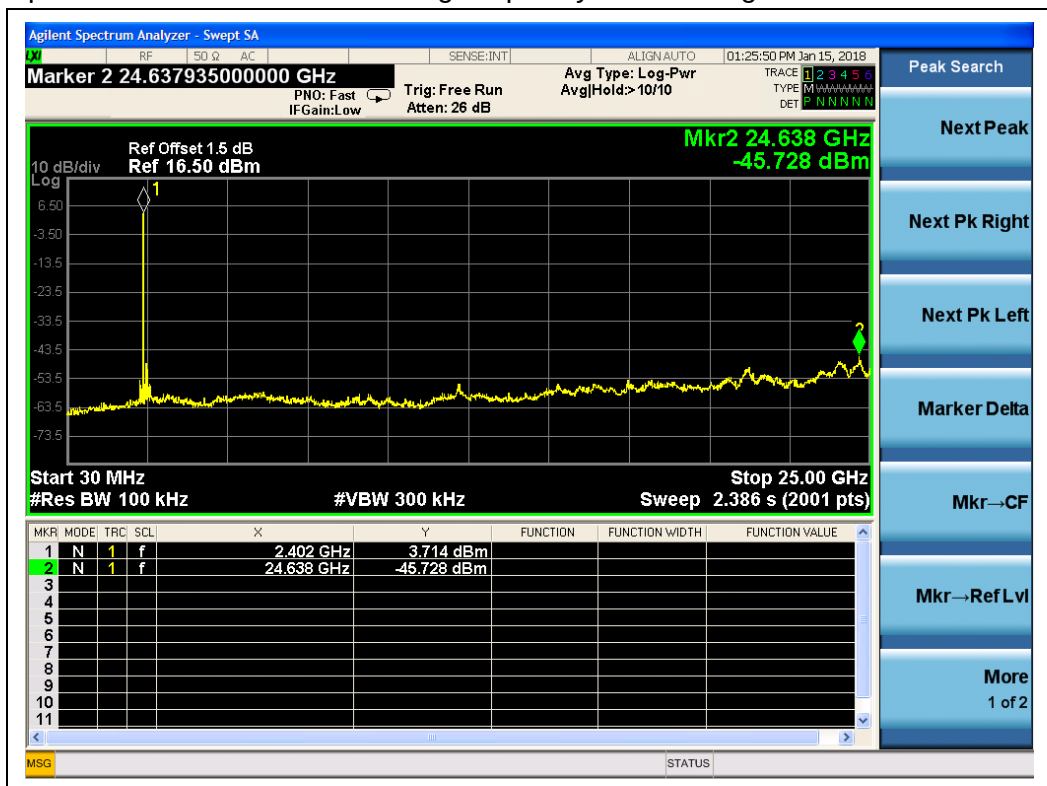


(Channel = 0, 30MHz to 25GHz, GFSK Mode)




(Channel = 0, Band edge,GFSK Mode)

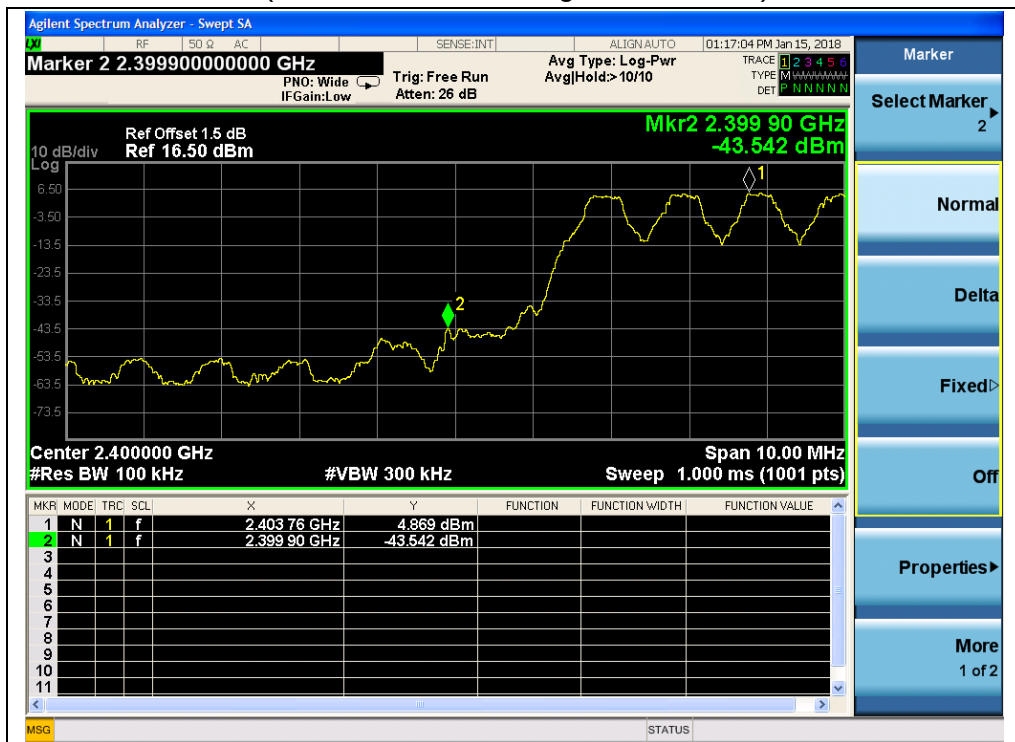


(Channel = 0, Band edge with hopping on, GFSK Mode)

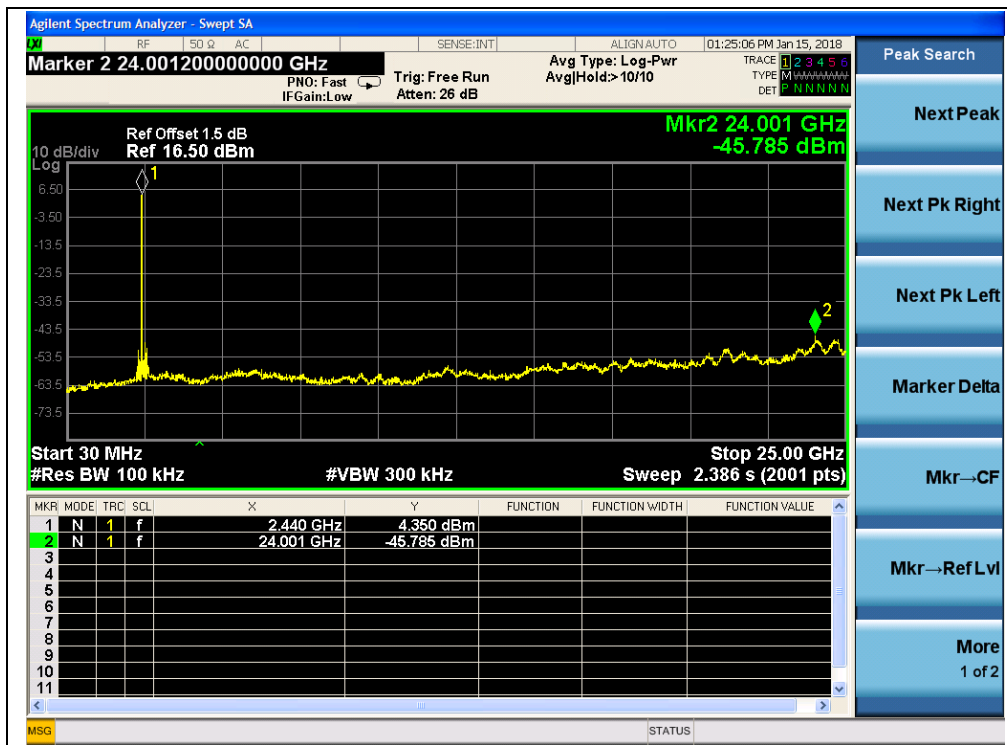

(Channel = 39, 30MHz to 25GHz, GFSK Mode)

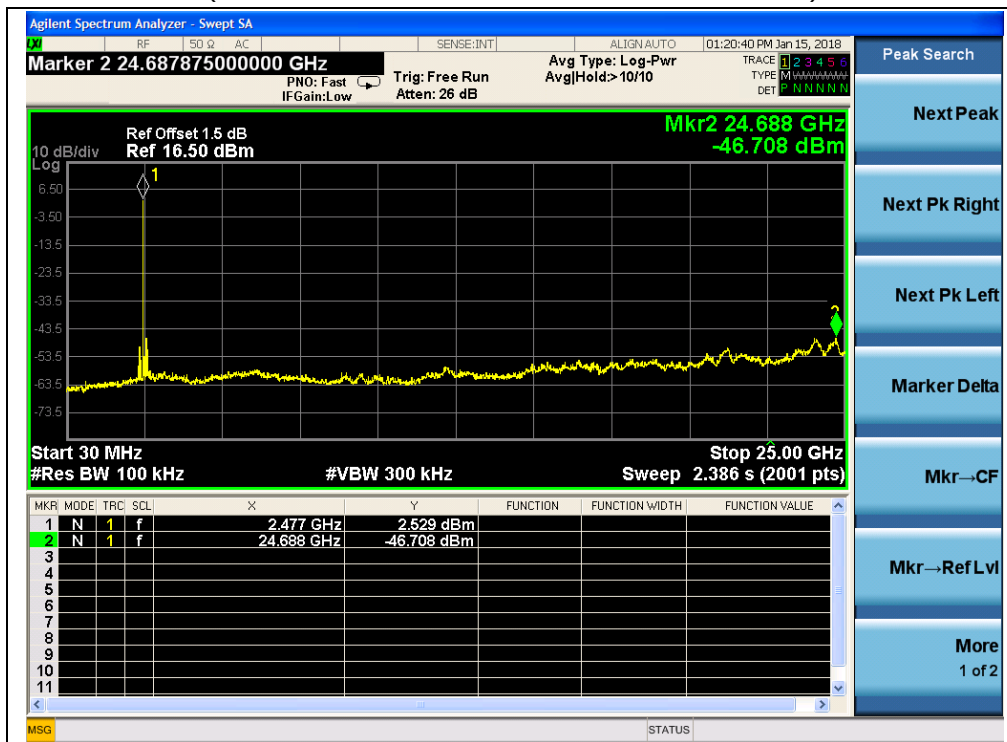

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

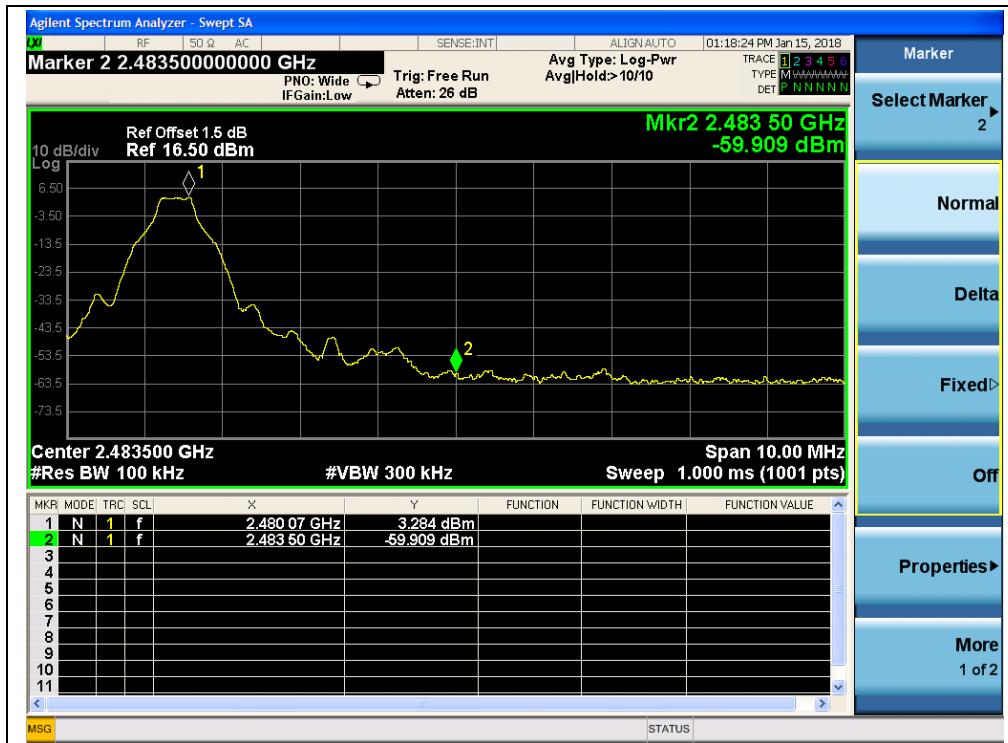

(Channel = 78, Band edge,GFSK Mode)



(Channel = 78, Band edge with hopping on, GFSK Mode)




2.7.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-46.40	-1.99	-21.99	PASS
39	2441	-46.78	-0.65	-20.65	PASS
78	2480	-49.06	-0.67	-20.67	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

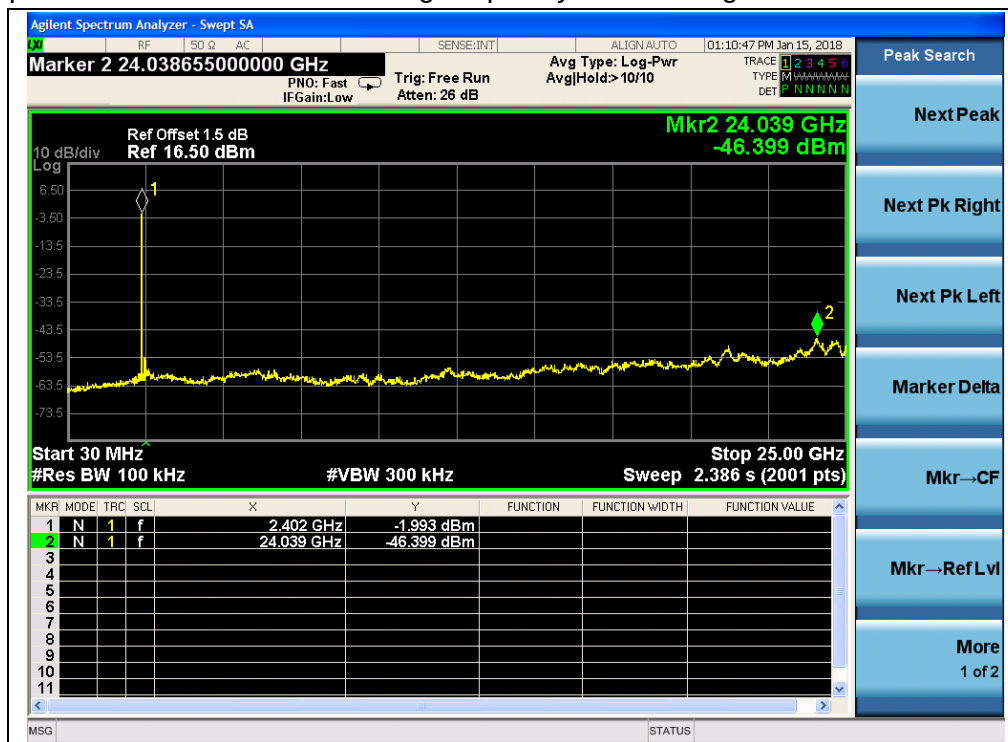



(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)

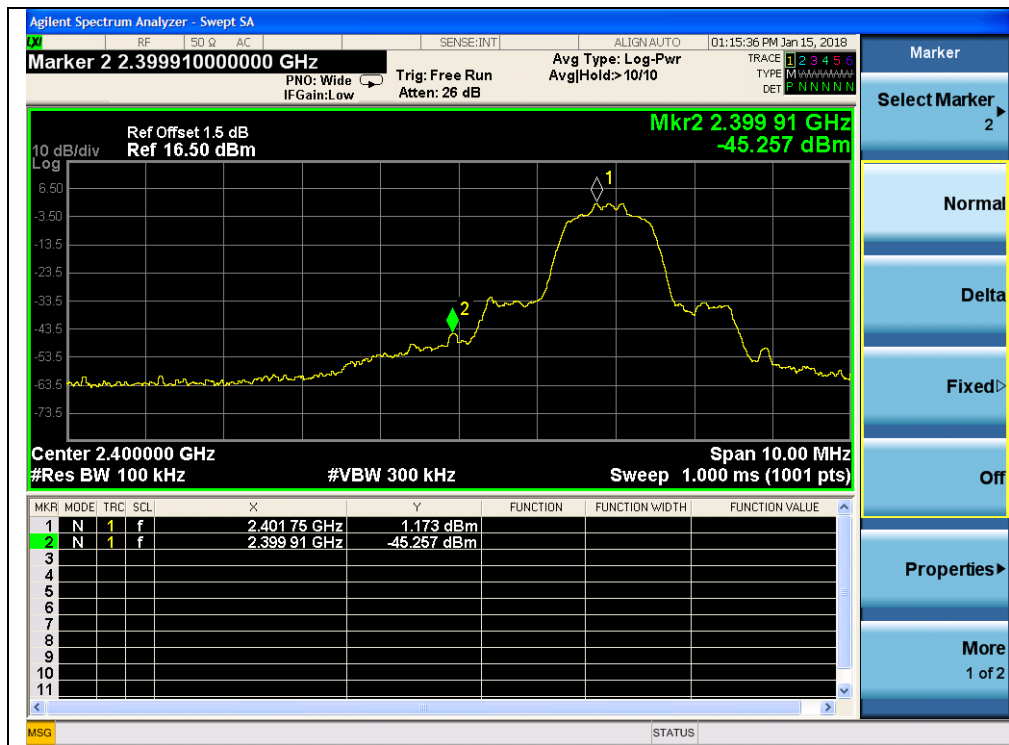

(Channel = 0, Band edge, $\pi/4$ -DQPSK)

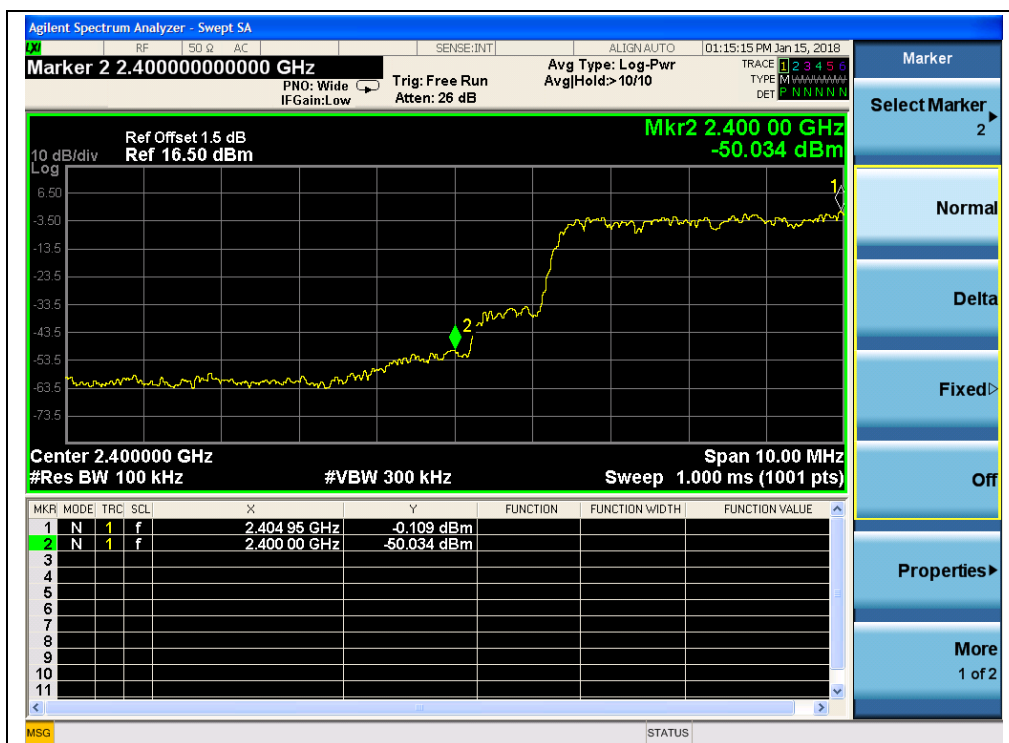


(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

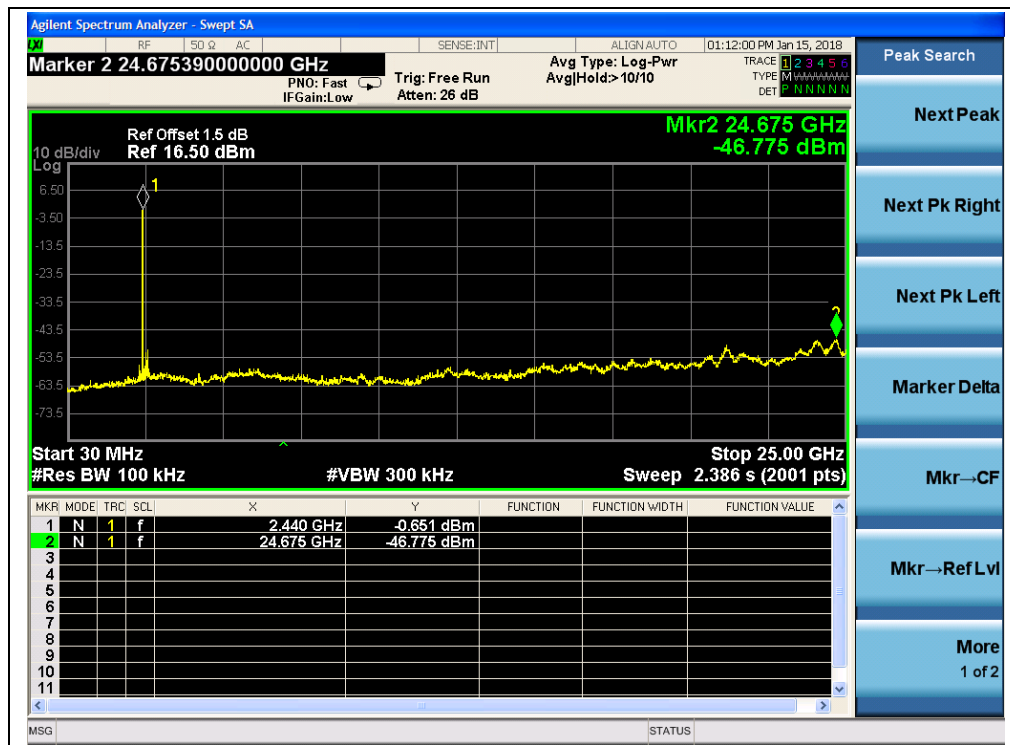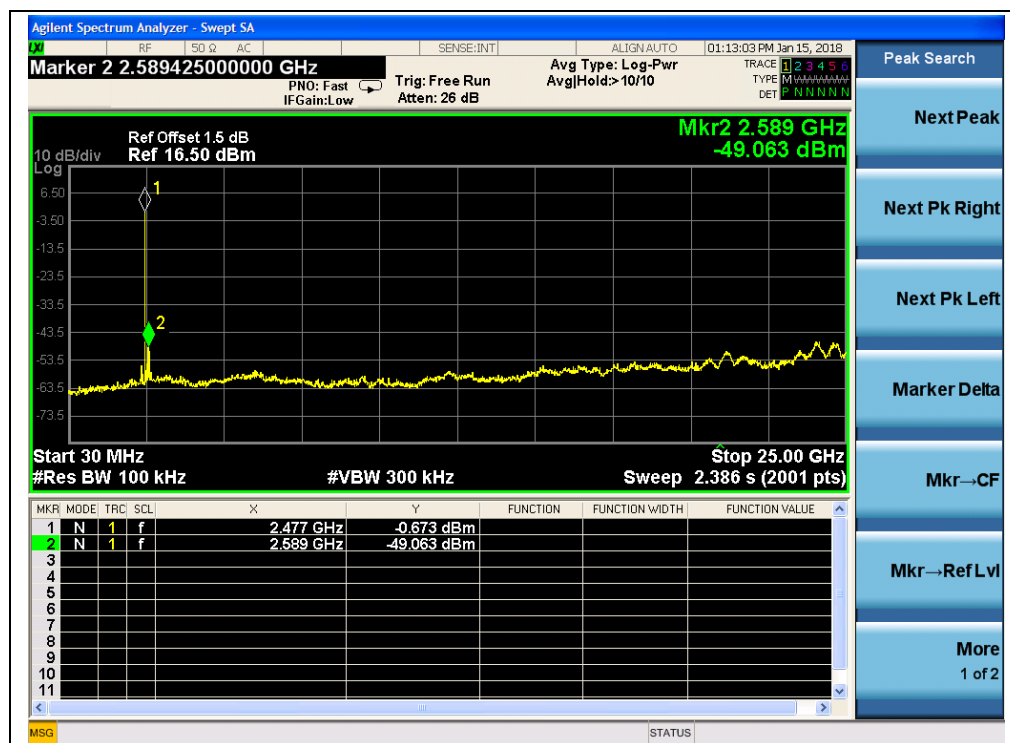(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)



(Channel = 78, Band edge, $\pi/4$ -DQPSK)

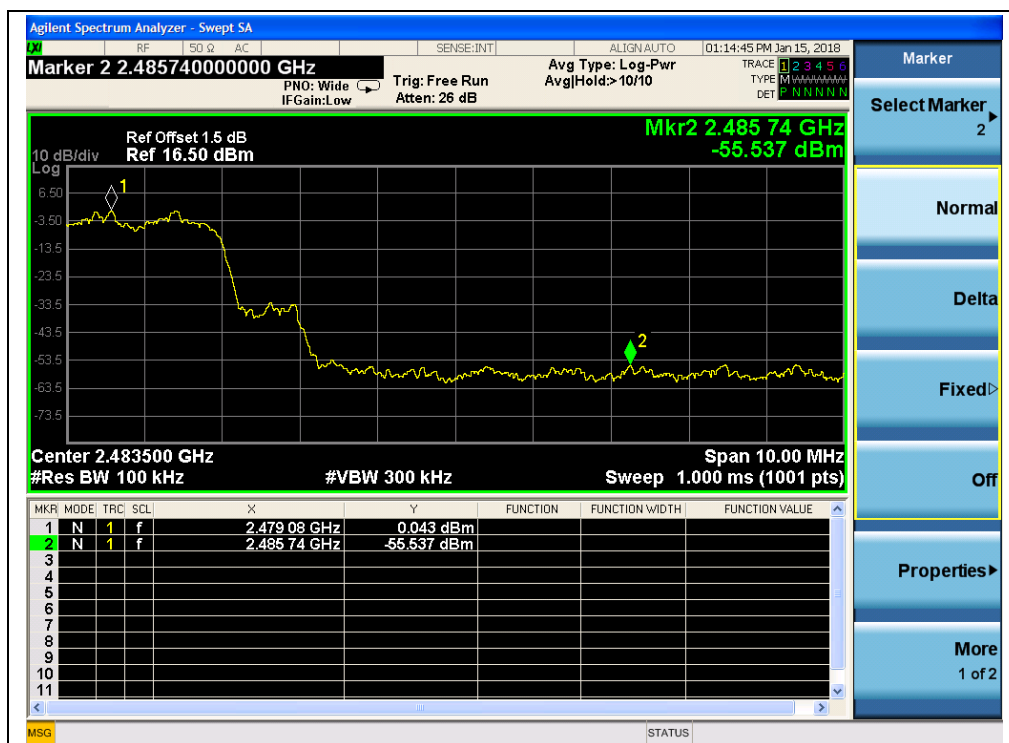

(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)




2.7.4.3 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-46.44	-0.28	-20.28	PASS
39	2441	-46.64	-1.60	-21.60	PASS
78	2480	-46.24	-2.71	-22.71	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

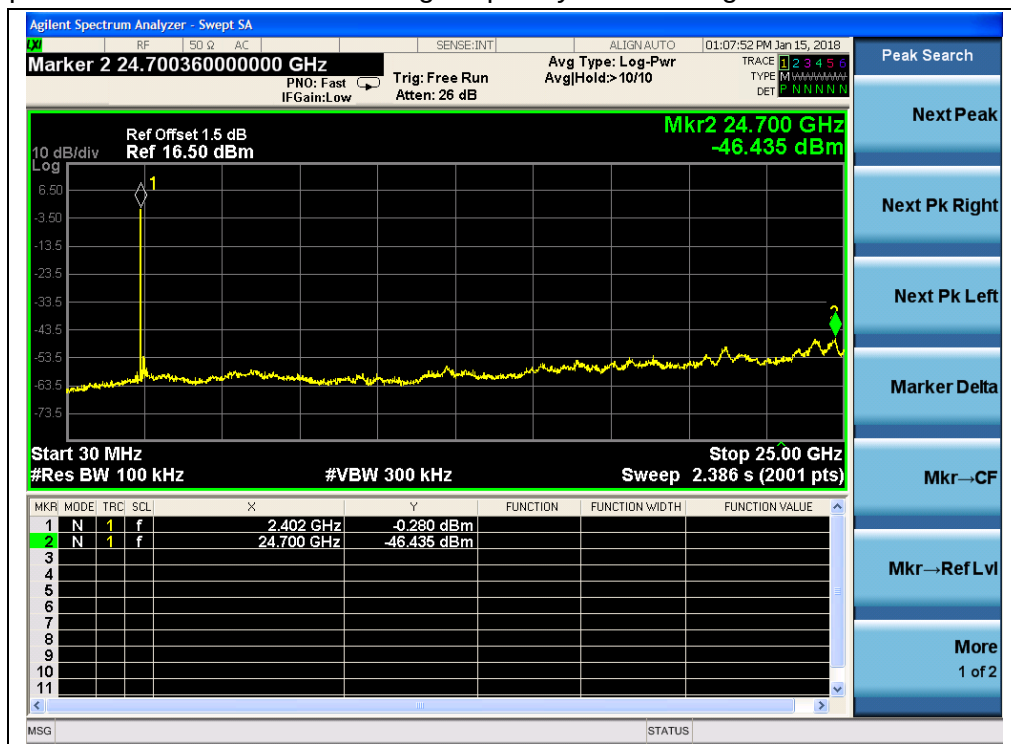


(Channel = 0, 30MHz to 25GH, 8-DPSK)

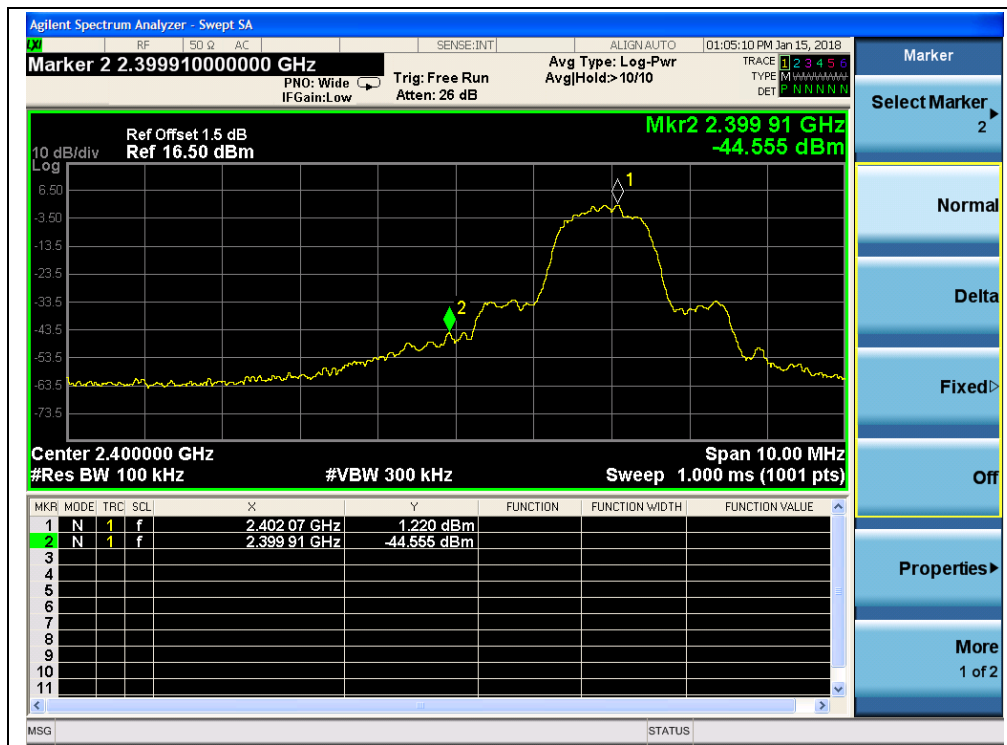


(Channel = 0, Band edge, 8-DPSK)



(Channel = 0, Band edge with hopping on, 8-DPSK)

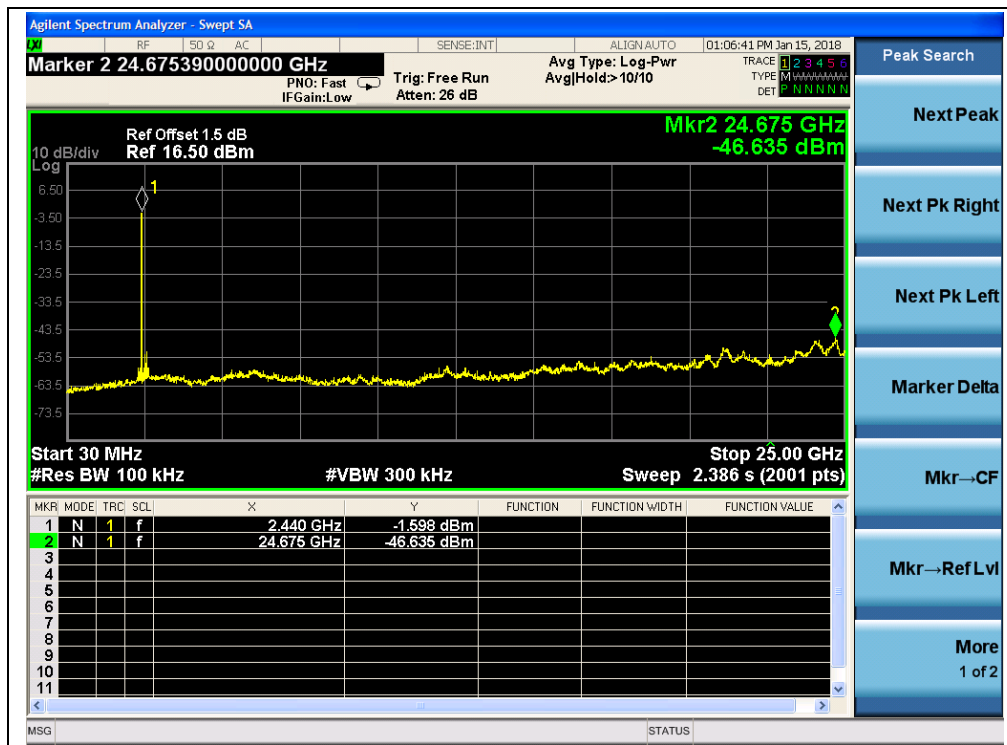


(Channel = 39, 30MHz to 25GHz, 8-DPSK)

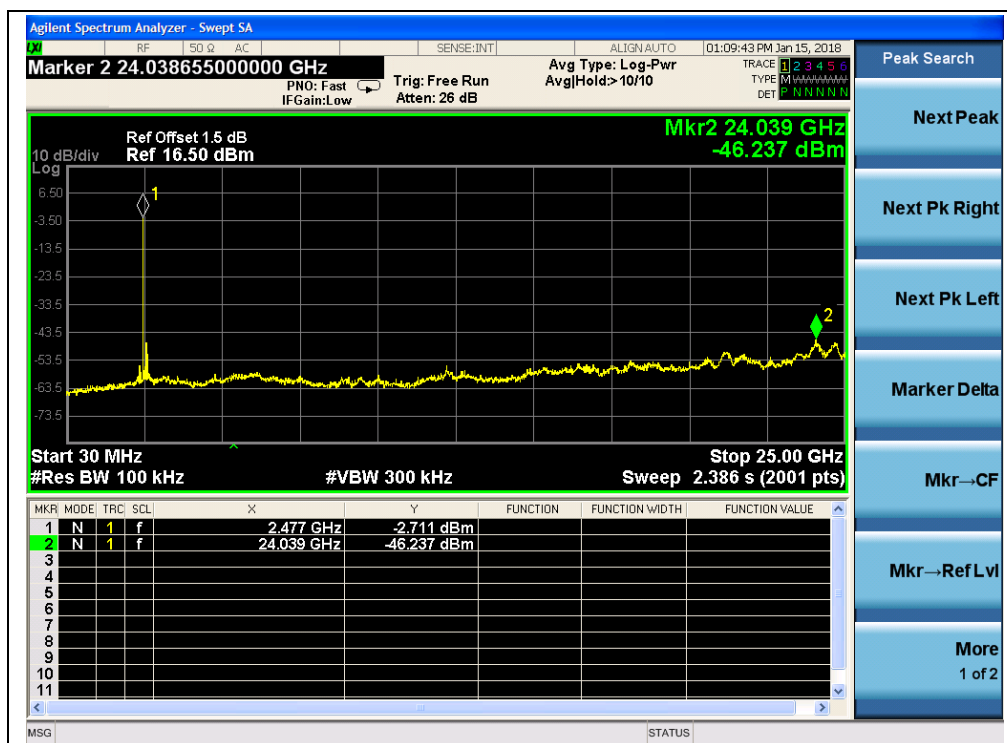

(Channel = 78, 30MHz to 25GH, 8-DPSK)



(Channel = 78, Band edg, 8-DPSK)

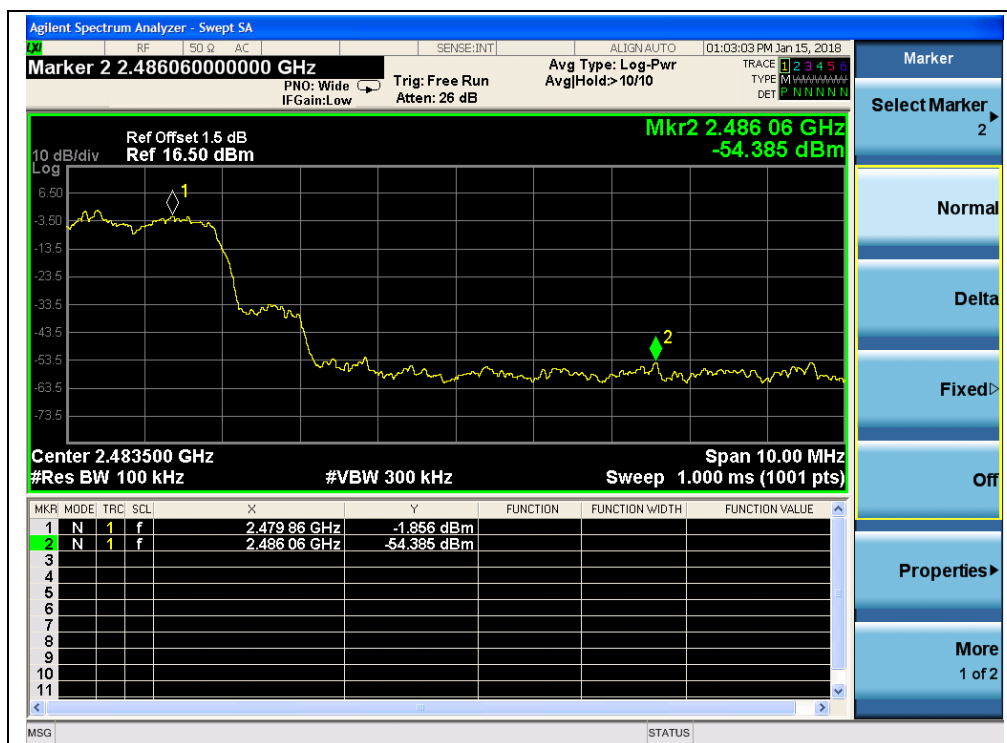

(Channel = 78, Band edge with hopping on, 8-DPSK)


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup:

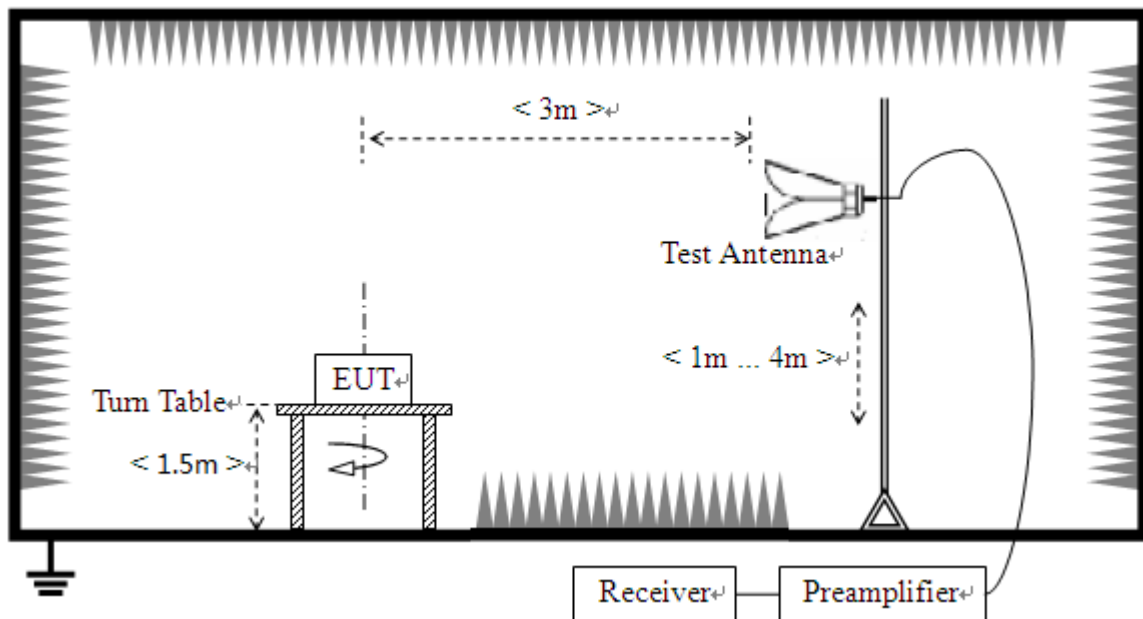

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.8.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.8.4.1 GFSK Mode**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2383.29	PK	45.68	-33.63	32.56	44.61	74	Pass
0	2380.81	AV	33.37	-33.63	32.56	32.30	54	Pass
78	2485.30	PK	46.55	-33.18	32.5	45.87	74	Pass
78	2485.57	AV	33.47	-33.18	32.5	32.79	54	Pass


B. Test Plots:




(Channel = 0, PEAK, GFSK)

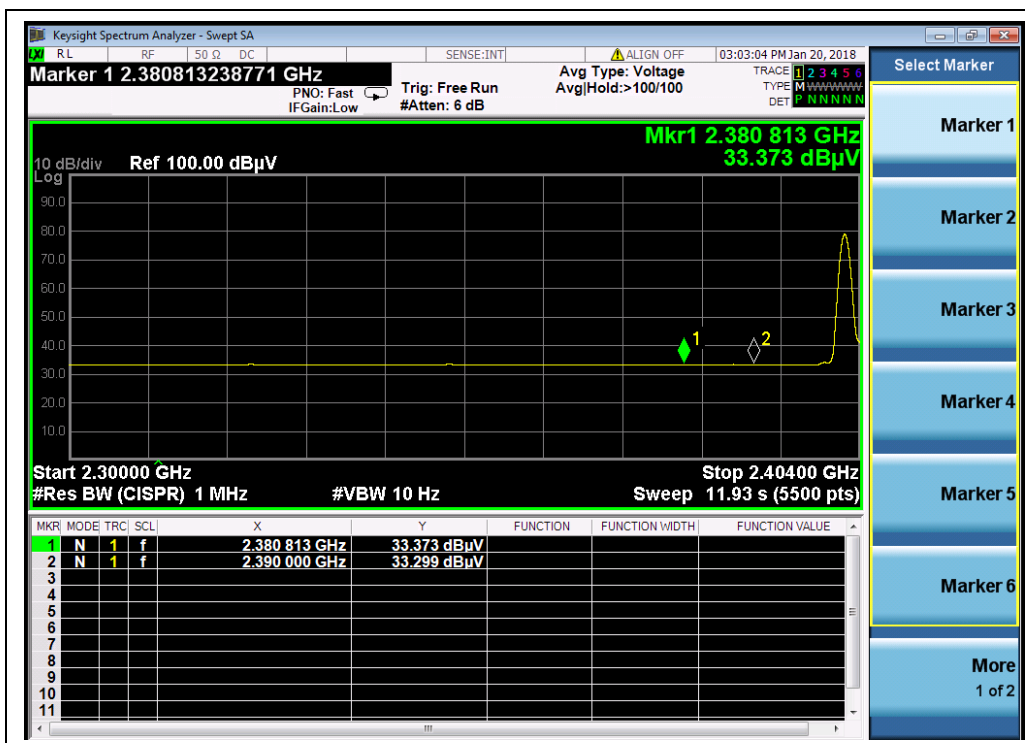

(Channel = 0, AVERAGE, GFSK)

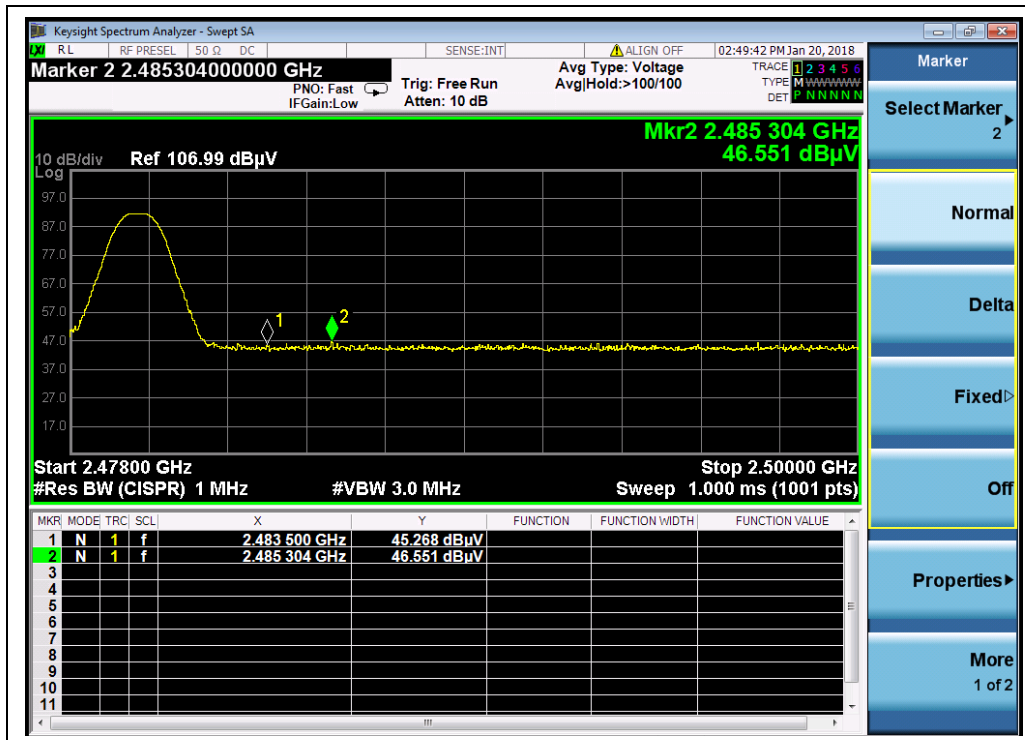

(Channel = 78, PEAK , GFSK)

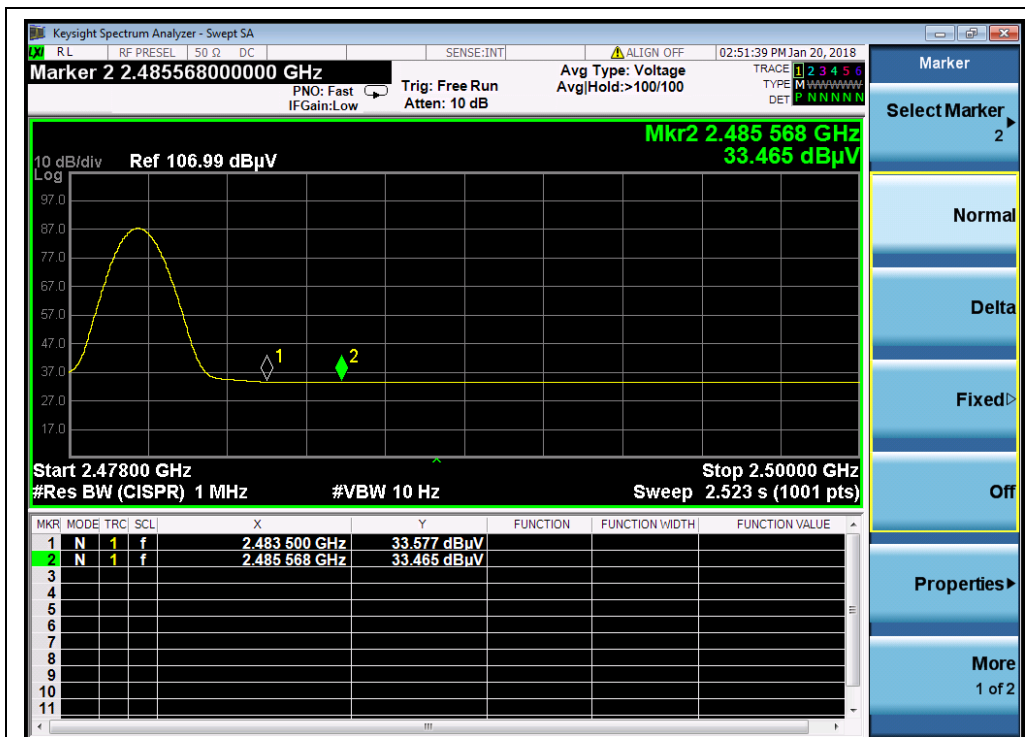

(Channel = 78, AVERAGE, GFSK)




2.8.4.2 $\pi/4$ -DQPSK Mode



A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2364.48	PK	43.74	-33.63	32.56	42.67	74	Pass
0	2369.58	AV	32.69	-33.63	32.56	31.62	54	Pass
78	2485.95	PK	44.74	-33.18	32.5	44.06	74	Pass
78	2484.01	AV	32.83	-33.18	32.5	32.15	54	Pass

B. Test Plots:

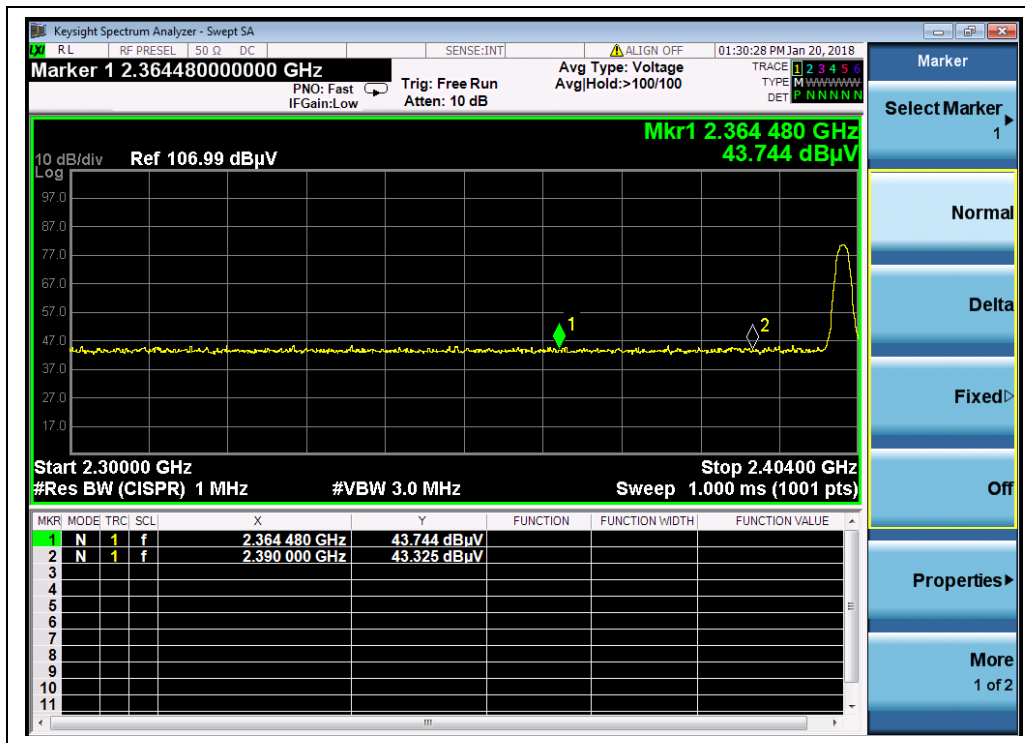

(Channel = 0, PEAK, $\pi/4$ -DQPSK)

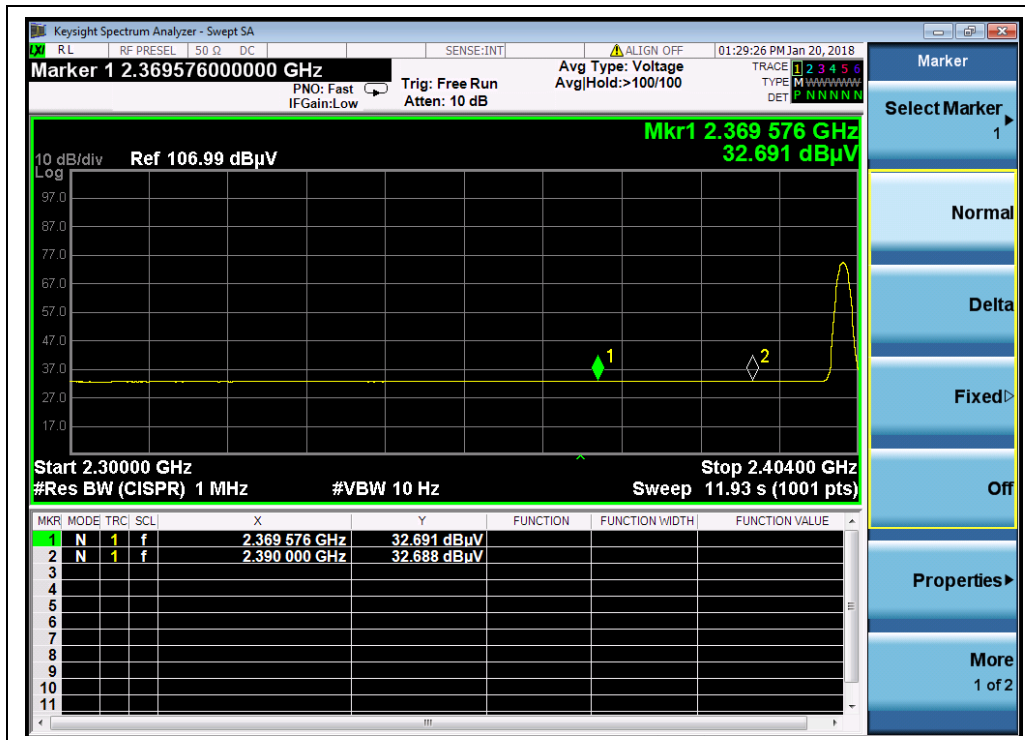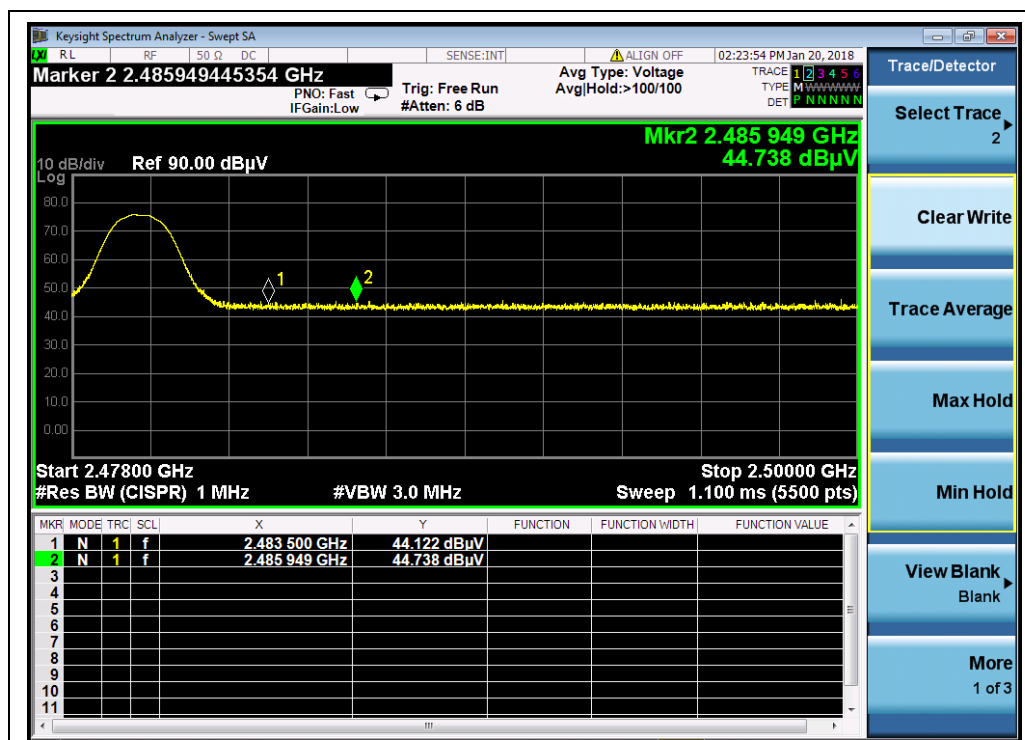(Channel = 0, AVERAGE, $\pi/4$ -DQPSK)(Channel = 78, PEAK, $\pi/4$ -DQPSK)




(Channel = 78, AVERAGE, $\pi/4$ -DQPSK)

2.8.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2363.86	PK	44.51	-33.63	32.56	43.44	74	Pass
0	2370.93	AV	32.72	-33.63	32.56	31.65	54	Pass
78	2484.28	PK	44.80	-33.18	32.5	44.12	74	Pass
78	2483.71	AV	33.50	-33.18	32.5	32.82	54	Pass


B. Test Plots:

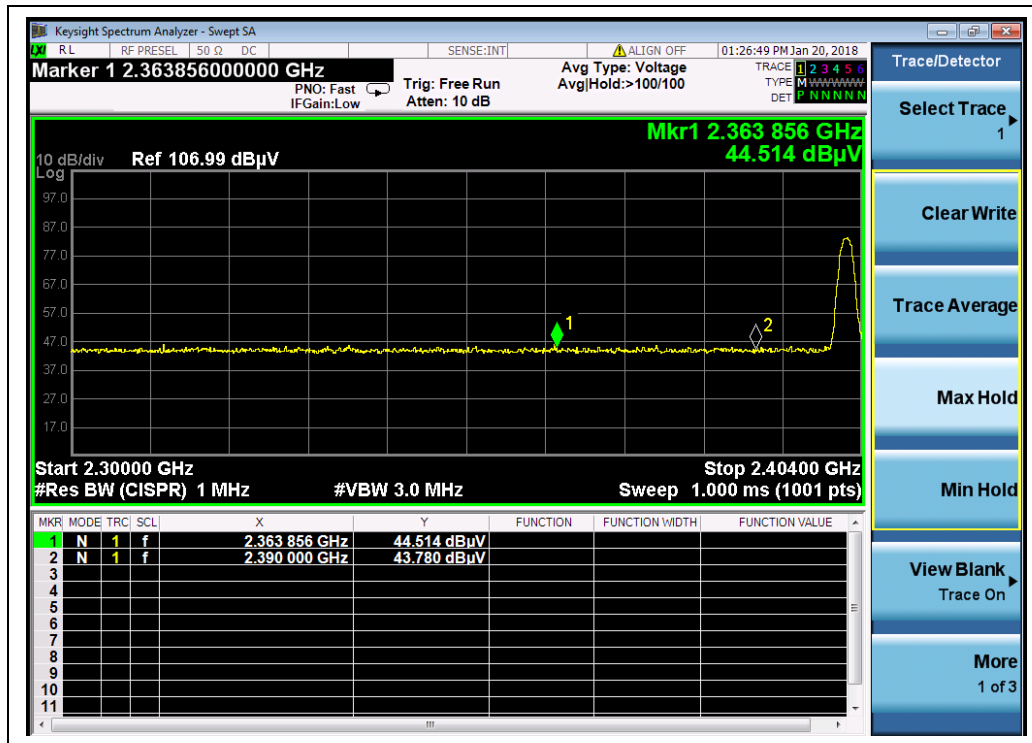


(Channel = 0, PEAK, 8-DPSK)

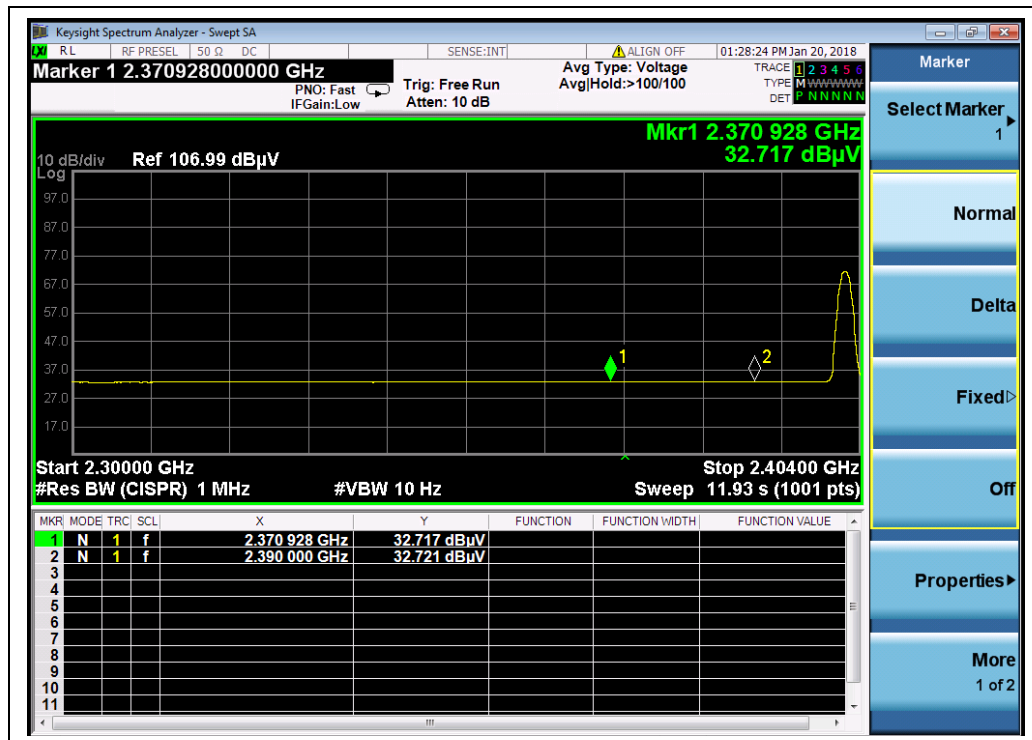

(Channel = 0, AVERAGE, 8-DPSK)

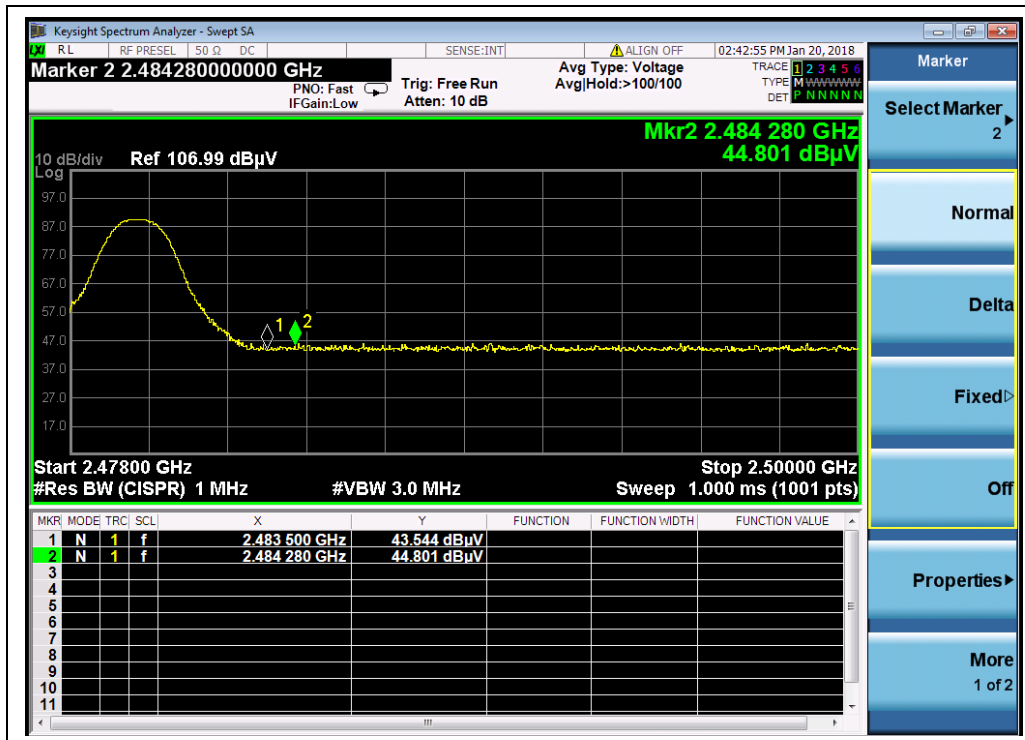

(Channel = 78, PEAK, 8-DPSK)

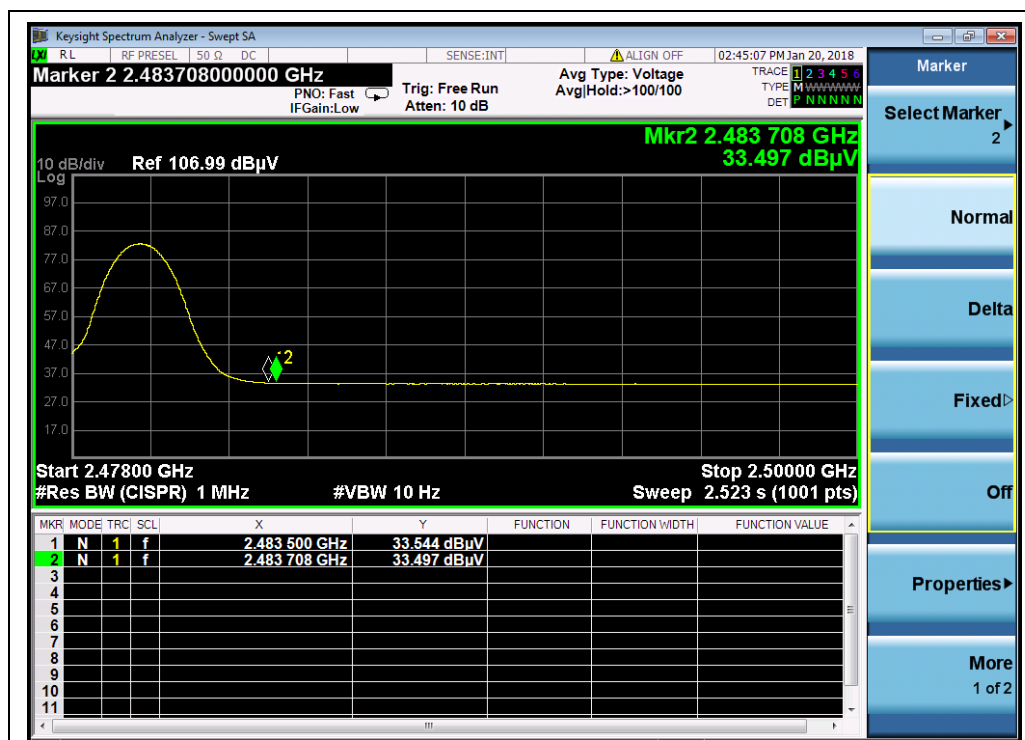

(Channel = 78, AVERAGE, 8-DPSK)

2.9. Conducted Emission

2.9.1. Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2. Test Description

A. Test Setup:

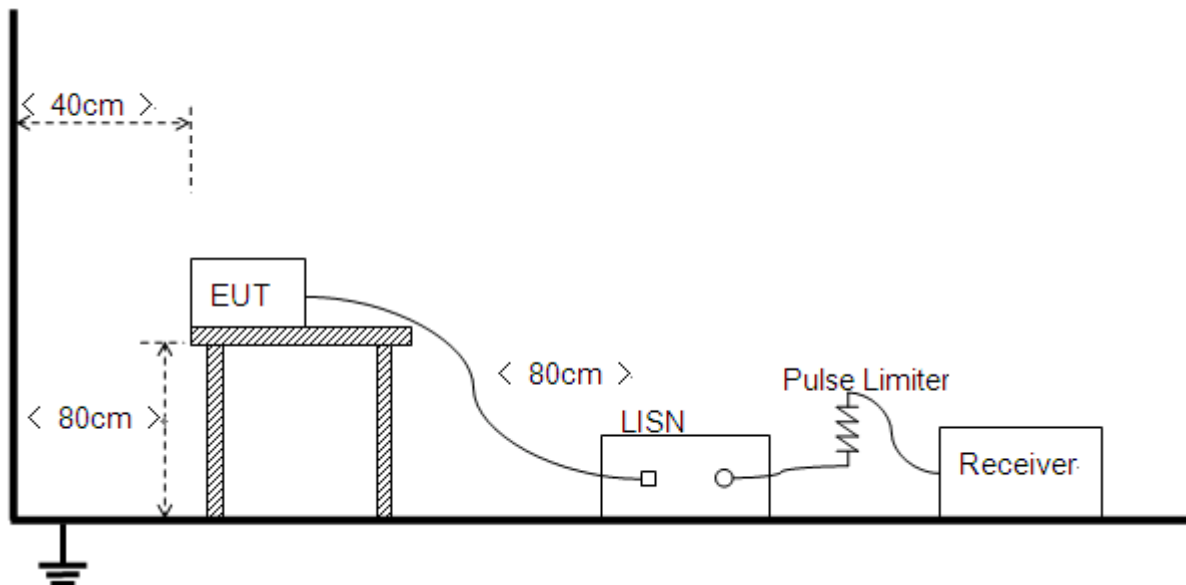

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth



EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.9.3. Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

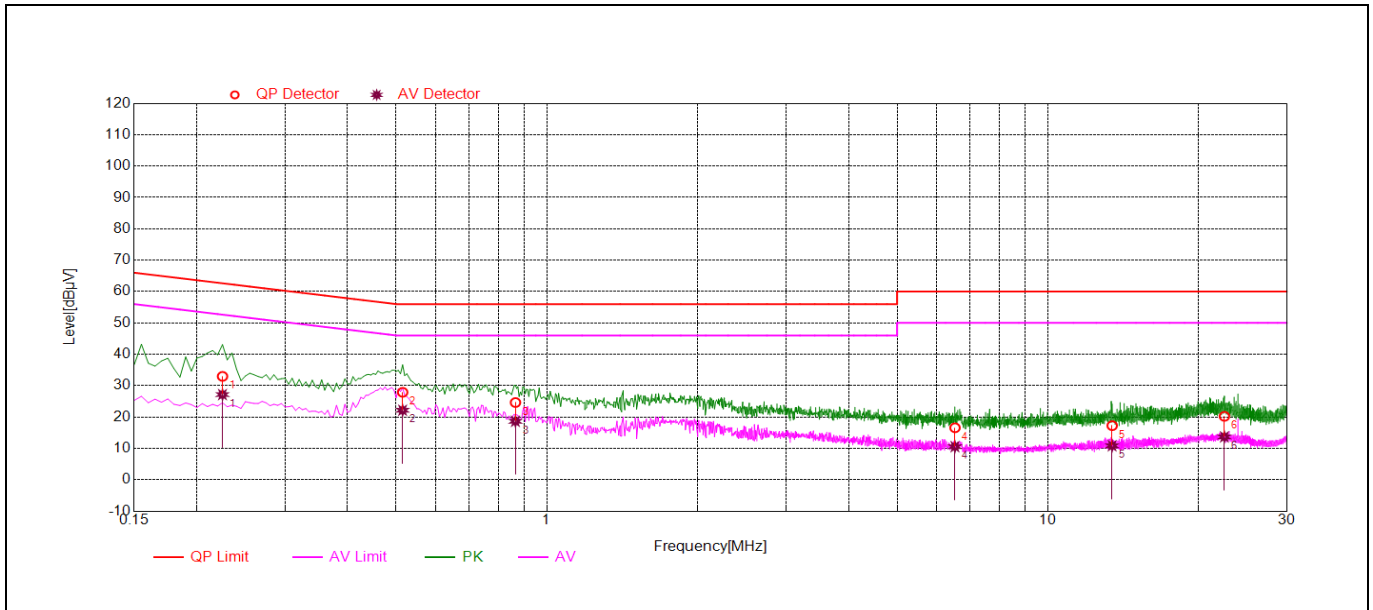

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.22	32.96	27.15	62.63	52.63	Line	PASS
2	0.51	27.89	22.16	56.00	46.00		PASS
3	0.87	24.62	18.63	56.00	46.00		PASS
4	6.52	16.58	10.54	60.00	50.00		PASS
5	13.44	17.25	10.84	60.00	50.00		PASS
6	22.52	20.22	13.66	60.00	50.00		PASS

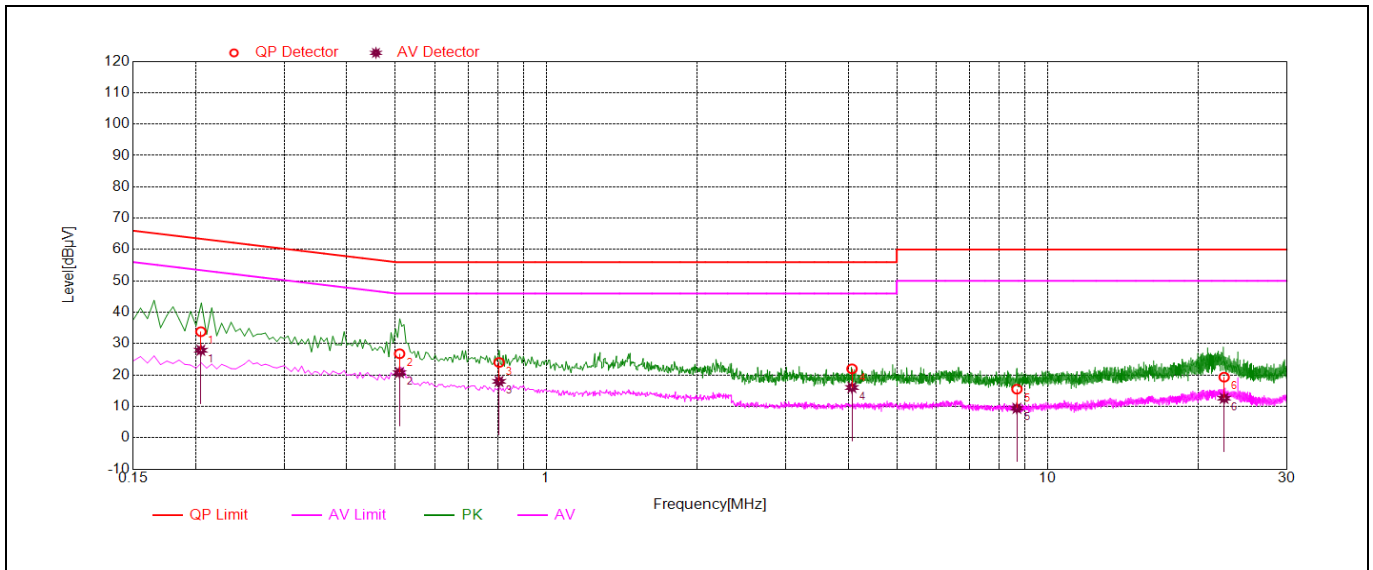

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.20	33.81	27.89	63.43	53.43	Neutral	PASS
2	0.51	26.79	20.77	56.00	46.00		PASS
3	0.80	24.01	17.97	56.00	46.00		PASS
4	4.07	21.97	16.02	56.00	46.00		PASS
5	8.69	15.49	9.39	60.00	50.00		PASS
6	22.50	19.31	12.58	60.00	50.00		PASS

2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

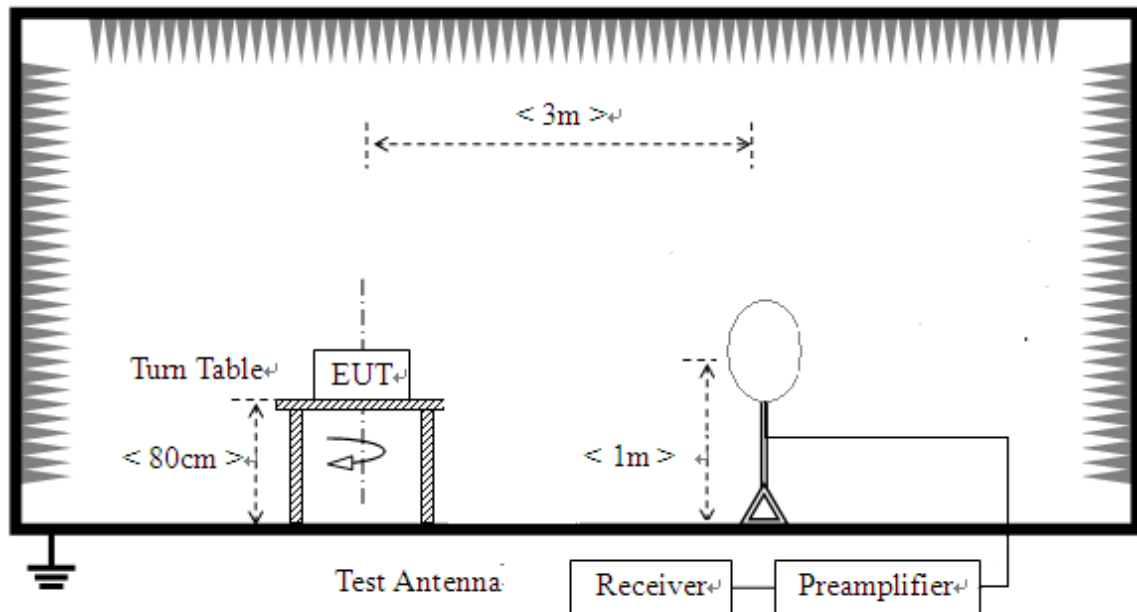

- 2) For radiated emissions from 30MHz to 1GHz

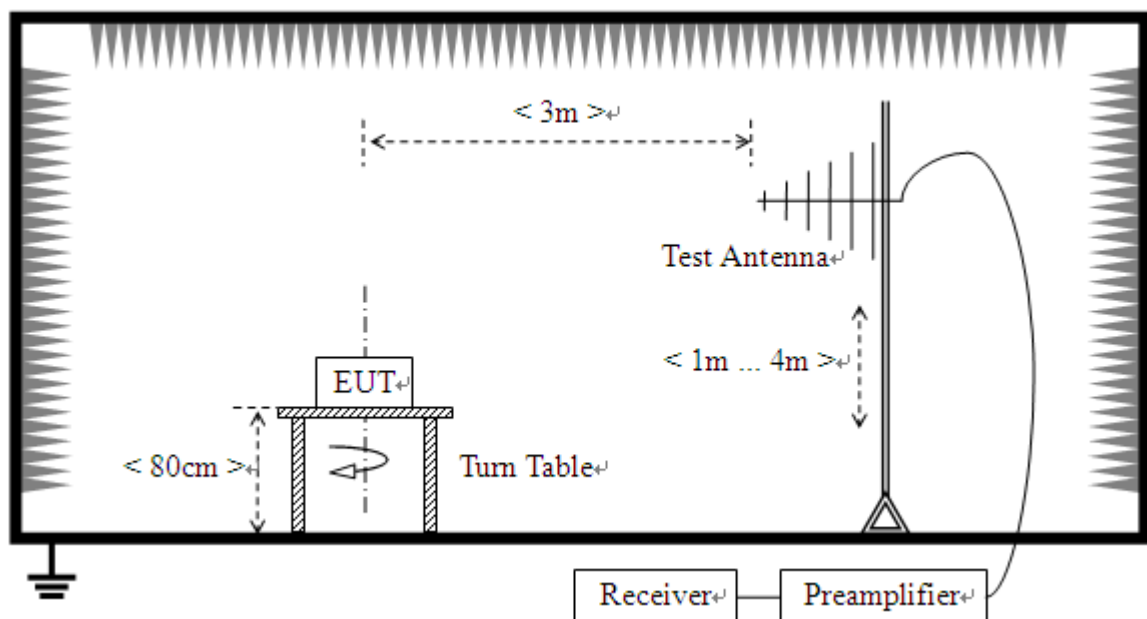

3) For radiated emissions above 1GHz

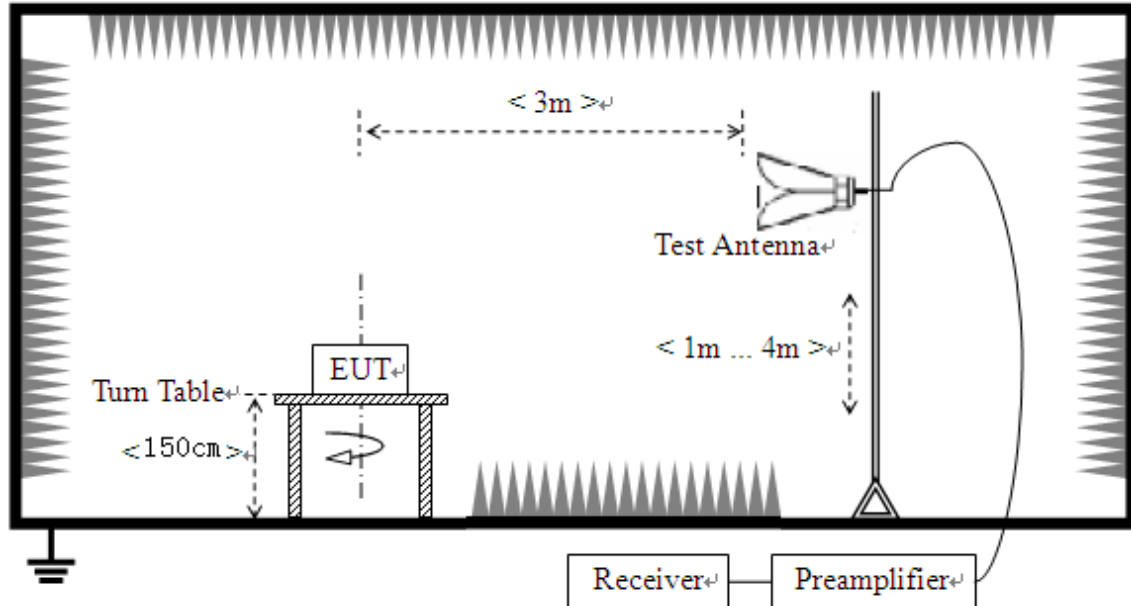

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please refer ANNEX A(1.5).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


2.10.4.1 GFSK Mode:

Plots for Channel = 0



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
197.534	28.25	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2290.116	45.77	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4804.100	55.68	N/A	49.10	74.0	N/A	54.00	Horizontal	PASS
8775.377	46.84	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12893.653	48.30	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
23949.045	50.45	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 0)

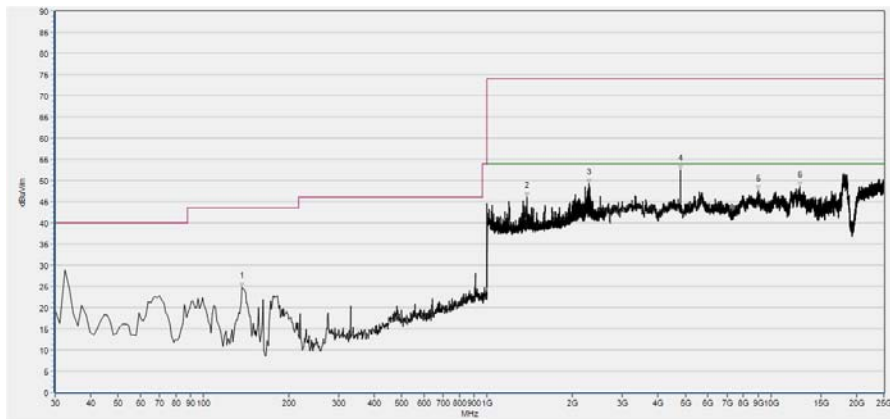

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
136.834	24.87	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1381.593	46.09	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
2289.476	49.20	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4803.800	52.31	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
9048.300	47.68	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
12649.245	48.50	N/A	N/A	74.0	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 0)

Plot for Channel = 39

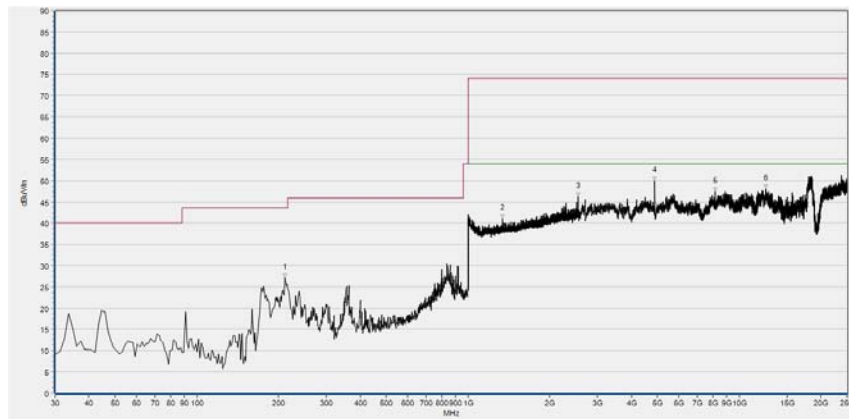

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
210.889	27.09	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1339.336	41.01	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
2544.938	46.18	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4881.142	49.99	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
8135.843	47.37	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12522.968	48.07	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 39)

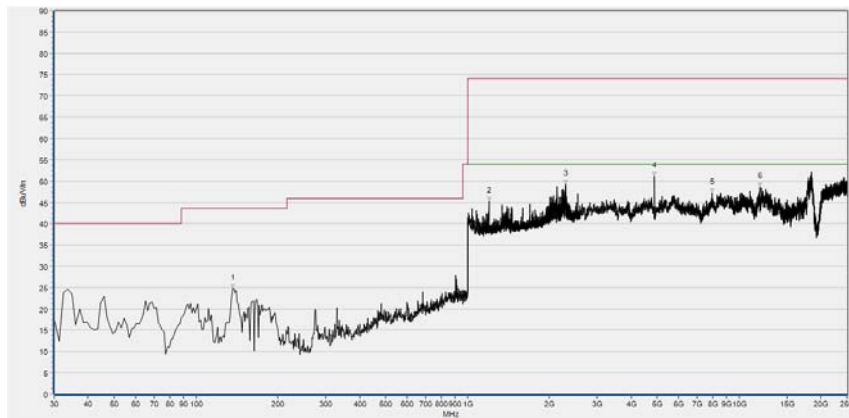


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
136.834	24.86	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1197.839	45.24	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2293.958	49.26	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4881.500	52.00	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
7940.316	47.18	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
11903.801	48.65	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical, GFSK, channel 39)




Plot for Channel = 78

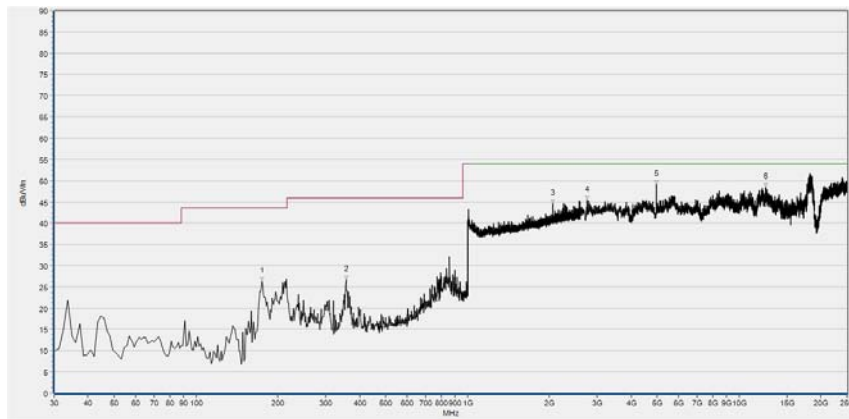

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
174.468	26.35	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
356.571	26.66	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2059.624	44.53	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
2758.865	45.38	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4958.538	49.09	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12531.115	48.45	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal, GFSK, channel 78)

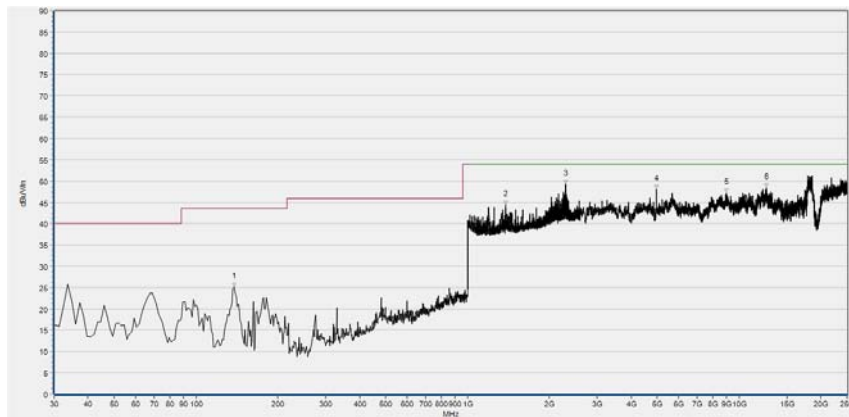


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
138.048	25.10	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1383.513	44.38	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
2294.598	49.29	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4958.538	48.06	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
8954.610	47.35	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
12641.098	48.43	N/A	N/A	74.0	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical, GFSK, channel 78)

2.10.4.2 $\pi/4$ -DQPSK Mode:

Plots for Channel = 0

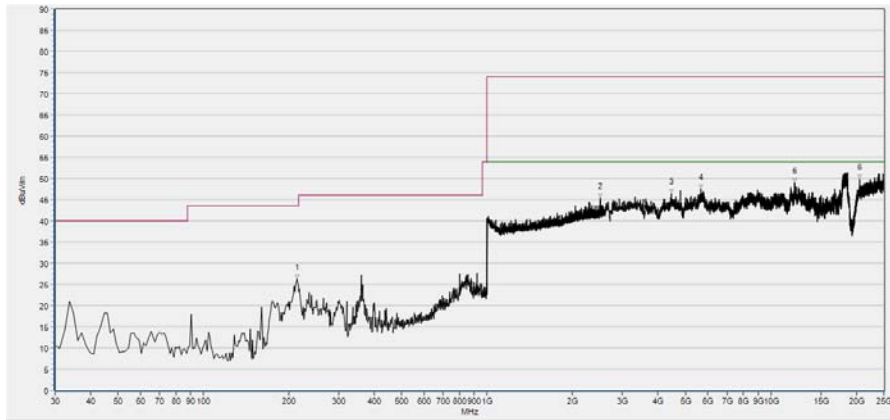

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
213.317	26.19	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2505.882	45.27	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4465.648	46.49	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5651.027	47.48	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12099.327	48.89	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
20535.479	49.82	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

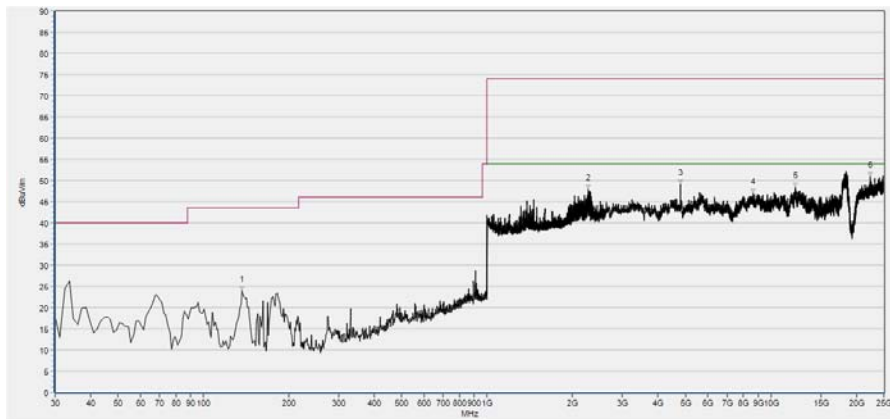
(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
136.834	23.96	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2271.549	47.93	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4803.746	49.18	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
8628.732	46.89	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
12229.678	48.38	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
22356.319	50.82	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)




Plot for Channel = 39

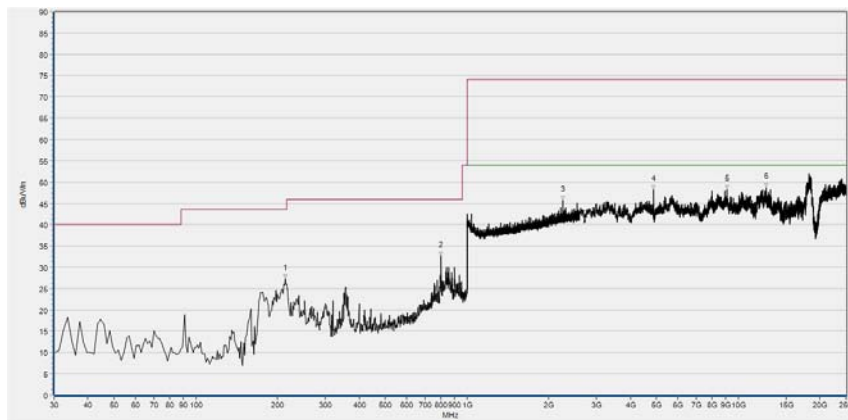

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
213.317	27.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
800.901	32.70	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2258.743	45.84	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4881.142	48.31	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
9109.402	48.19	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12653.319	48.76	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

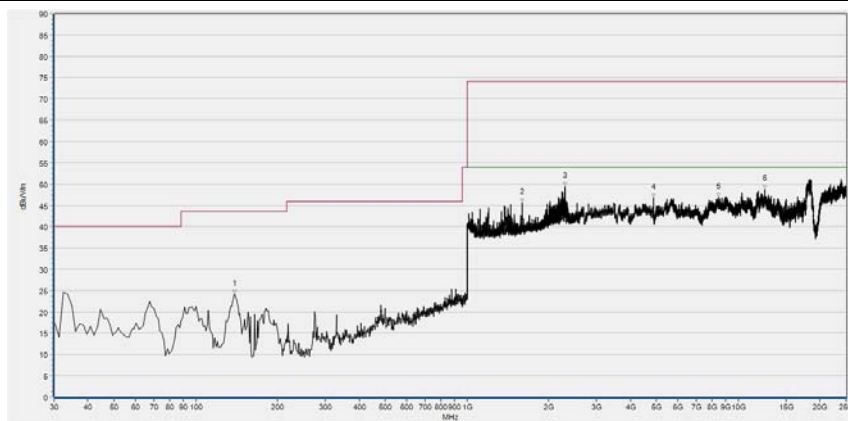


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
139.262	24.06	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1594.798	45.54	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
2293.958	49.44	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
4881.142	46.69	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
8441.353	46.85	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
12522.968	48.75	N/A	N/A	74.0	N/A	54.00	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)



Plot for Channel = 78

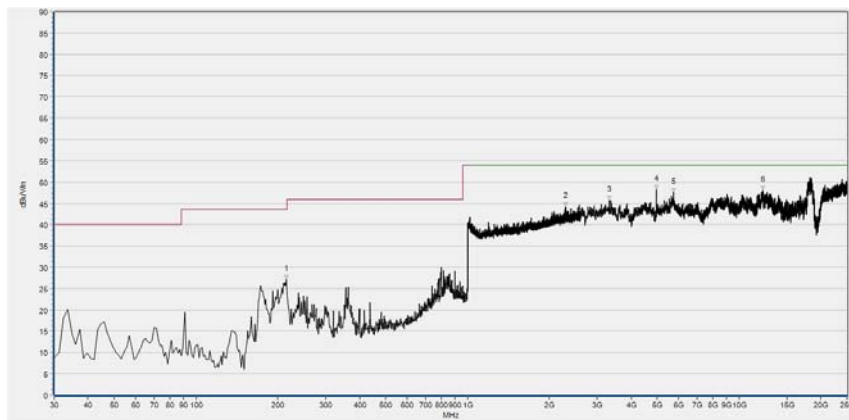

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
214.531	27.12	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2301.641	44.26	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
3325.077	45.70	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4958.538	48.22	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5732.497	47.56	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12217.458	48.07	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

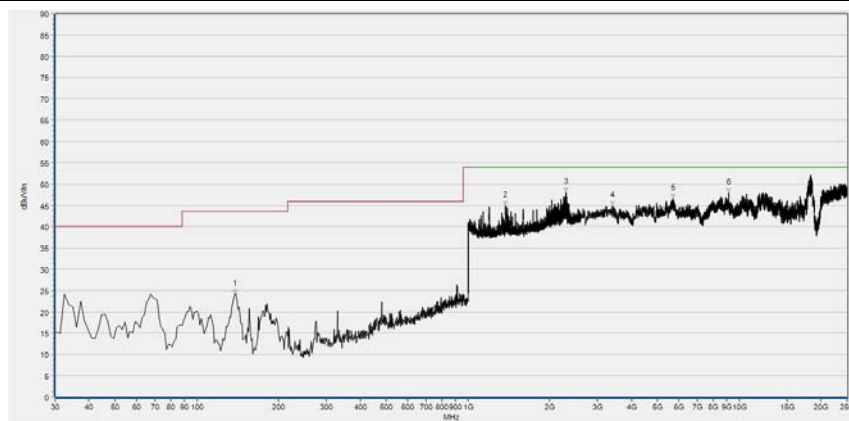
(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
138.048	24.14	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1375.830	45.00	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
2301.641	48.06	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
3406.547	44.90	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
5691.762	46.53	N/A	N/A	74.0	N/A	54.00	Vertical	PASS
9146.063	47.87	N/A	N/A	74.0	N/A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)


2.10.4.3 8-DPSK Mode:

Plots for Channel = 0

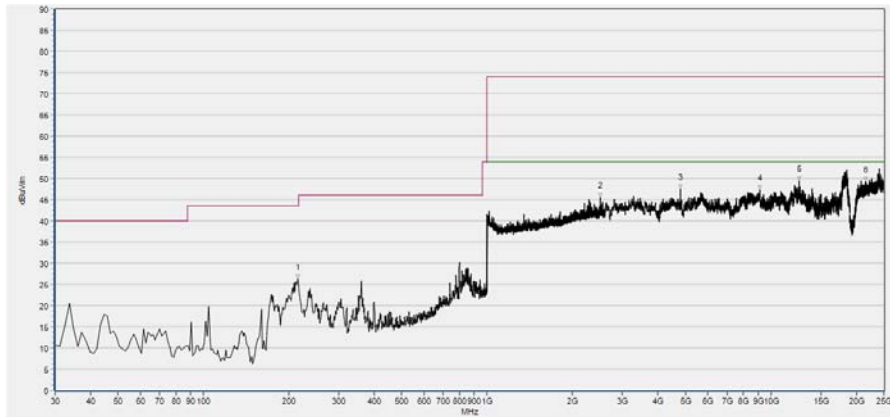

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
214.531	26.22	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2505.882	45.49	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4803.746	47.45	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
9129.769	47.27	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12539.262	49.42	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
21570.140	49.23	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)

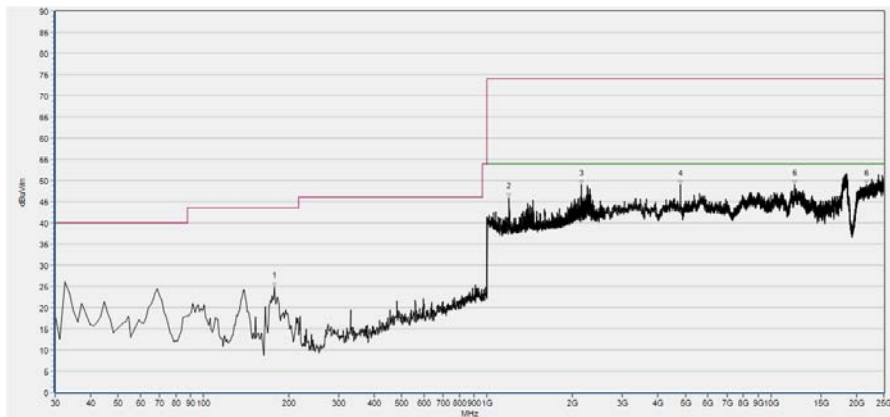


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
178.110	24.75	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1194.638	45.82	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
2147.339	48.95	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4803.746	48.94	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12123.768	48.85	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
21680.124	48.88	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 0)




Plot for Channel = 39

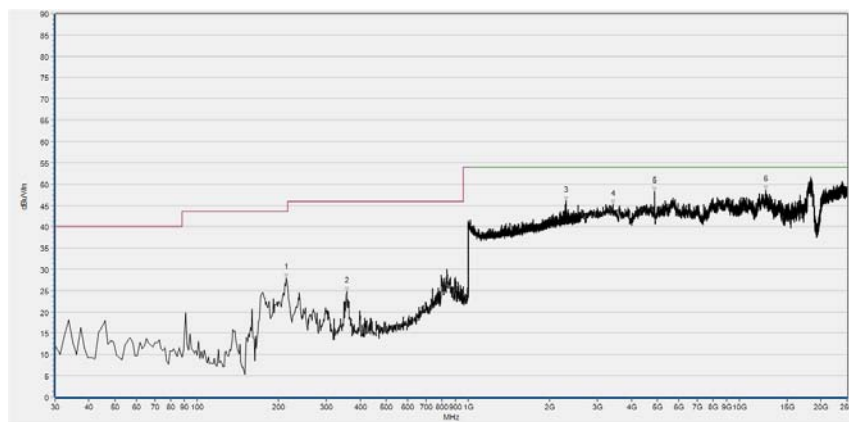

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
213.317	28.00	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
356.571	24.86	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2293.317	46.06	N/A	N/A	74.0	N/A	54.0	Horizontal	PASS
3426.914	45.28	N/A	N/A	74.0	N/A	54.0	Horizontal	PASS
4881.142	48.34	N/A	N/A	74.0	N/A	54.0	Horizontal	PASS
12514.821	48.66	N/A	N/A	74.0	N/A	54.0	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 39)

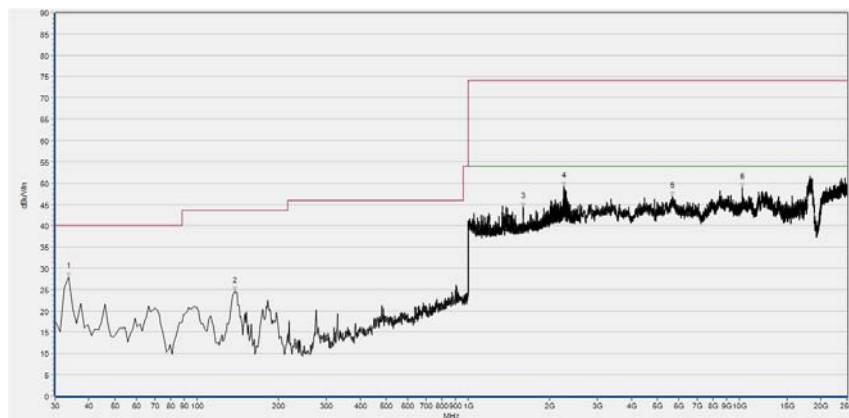

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.642	27.96	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
138.048	24.58	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1598.639	44.34	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
2258.103	49.22	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
5671.395	46.85	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
10278.487	48.98	N/A	N/A	74.0	N/A	54.0	Vertical	PASS


(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 39)

Plot for Channel = 78

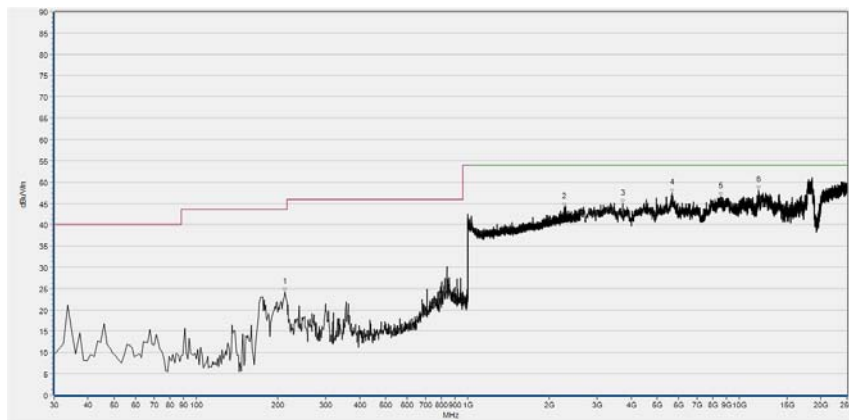

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
212.103	24.17	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2272.829	44.10	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
3720.204	44.88	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5679.542	47.37	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
8567.630	46.53	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
11773.450	48.06	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 78)

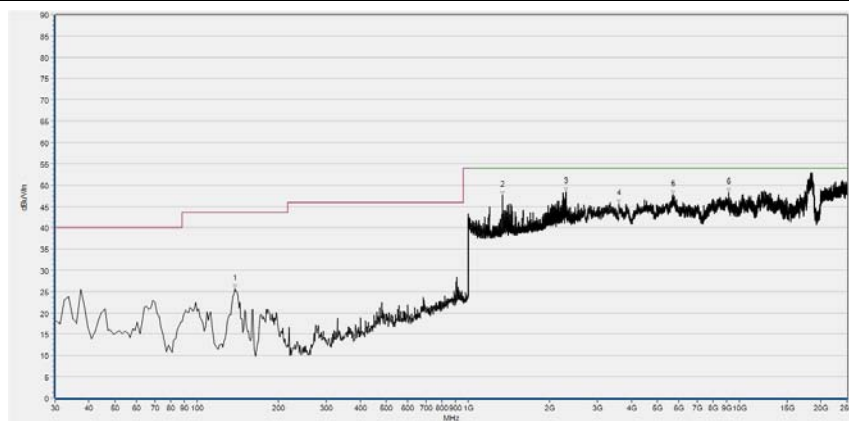

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
138.048	25.62	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1338.055	47.67	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
2291.397	48.45	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
3606.147	45.52	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
5683.615	47.80	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
9117.549	48.20	N/A	N/A	74.0	N/A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 78)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2017.05.24	2018.05.23
Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23
Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23
Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2017.07.13	2018.07.12
LISN	812744	NSLK 8127	Schwarzbeck	2017.05.17	2018.05.16
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2017.05.17	2018.05.16
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal. Due
Computer	T430i	Think Pad	Lenovo	N/A	N/A

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2017.05.17	2018.05.16
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2017.05.14	2018.05.13
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2017.03.07	2018.03.06
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT _____