



## FCC TEST REPORT

**FCC ID: 2AP2N-MAG4000W**

On Behalf of

**Shenzhen Esorun Technology Co., LTD**

**Magnetic Wireless Power Bank**

**Model No.: Mag4000W**

Prepared for

Address

: Shenzhen Esorun Technology Co., LTD  
: Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone, Taoyuan  
: Community, Dalang Street, Longhua District, Shenzhen

Prepared By

Address

: Shenzhen Alpha Product Testing Co., Ltd.  
: Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
: 518103, Shenzhen, Guangdong, China

Report Number : A2112281-C01-R08

Date of Receipt : January 10, 2022

Date of Test : January 11, 2022-January 20, 2022

Date of Report : January 20, 2022

Version Number : V0

## **TABLE OF CONTENTS**

<b>1. Test Result Summary .....</b>	<b>5</b>
<b>2. EUT Description.....</b>	<b>6</b>
2.1. DESCRIPTION OF DEVICE (EUT).....	6
2.2. ACCESSORIES OF DEVICE (EUT).....	8
2.3. TESTED SUPPORTING SYSTEM DETAILS .....	8
2.4. BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS .....	8
2.5. DESCRIPTION OF TEST MODES.....	8
2.6. TEST CONDITIONS .....	8
2.7. TEST FACILITY .....	9
2.8. MEASUREMENT UNCERTAINTY .....	9
<b>3. Test Results and Measurement Data .....</b>	<b>10</b>
3.1. RF EXPOSURE TEST.....	10
<b>4. Photos of test setup .....</b>	<b>14</b>

## TEST REPORT DECLARATION

Applicant : Shenzhen Esorun Technology Co., LTD  
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone,  
Taoyuan Community, Dalang Street, Longhua District, Shenzhen  
Manufacturer : Shenzhen Esorun Technology Co., LTD  
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone,  
Taoyuan Community, Dalang Street, Longhua District, Shenzhen  
EUT Description : Magnetic Wireless Power Bank  
(A) Model No. : Mag4000W  
(B) Trademark : ESORUN

Measurement Standard Used:

**FCC CFR Title 47 Part 15 Subpart C**

**FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness test. Also, this report shows that the EUT is technically compliant with the KDB 680106 D01 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang  
Project Engineer



Approved by (name + signature).....: Simple Guan  
Project Manager



Date of issue.....: January 20, 2022

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	January 20, 2022	Initial released Issue	Lucas Pang

## 1. Test Result Summary

Requirement	CFR 47 Section	Result
RF EXPOSURE	§1.1307(b)(1) & KDB680106	PASS

**Note:**

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

## 2. EUT Description

### 2.1. Description of Device (EUT)

EUT Name : Magnetic Wireless Power Bank

Model No. : Mag4000W

DIFF. : N/A

Trademark : ESORUN

Power supply : Type-C Input : DC 5V/2.1A, DC 9V/2A  
Type-C Output : DC 5V/2A, DC 9V/2A, DC 12V/1.5A  
Wireless Output : DC 5V/1A(5W) , 9V/1.12A(10W)  
Simultaneous output: DC 5V/3A(15W)

Operation frequency : 125~205KHz

Modulation : MSK

Antenna Type : Coil Antenna, Maximum Gain is 0dBi(This value is supplied by applicant).

Connector cable loss : 0.5dB (This value is supplied by applicant).

Software version : V1.0

Hardware version : V1.0

Conditions requirement	Answers
Power transfer frequency is less than 1MHz.	After measuring the product the transfer frequency is 125-205KHz
Output power from each primary coil is less than or equal to 15 watts.	After measuring the product the each primary coil power is 10 watts
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	The transfer system includes only single primary.
Client device is placed directly in contact with the transmitter.	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Mobile exposure conditions only.
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	After measuring the product the Max H-field Strength is <b>0.513A/m</b> and the Max E-field Strength is <b>2.456V/m</b> . Far less than 50% of the MPE limit.


## 2.2. Accessories of Device (EUT)

Accessories1	:	/
Manufacturer	:	/
Model	:	/
Ratings	:	/

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	Adapter	Huoniu	HNFCQC3024UU	--	--
2	Load	--	--	--	--

## 2.4. Block Diagram of connection between EUT and simulators

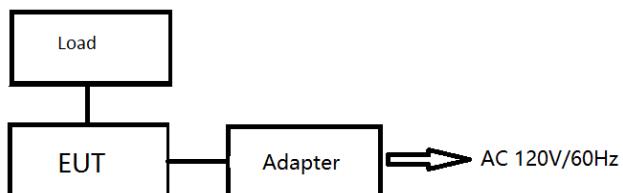

## 2.5. Description of Test Modes

Channel	Frequency (KHz)
1	147

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35 °C	24 °C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
Registration Number: 293961

July 15, 2019 Certificated by IC  
Registration Number: CN0085

## 2.8. Measurement Uncertainty


(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.39dB
Uncertainty for E-Field	2.45dB
Uncertainty for conducted RF Power	0.65dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

### 3. Test Results and Measurement Data

#### 3.1. RF EXPOSURE TEST

##### 3.1.1. Test Specification

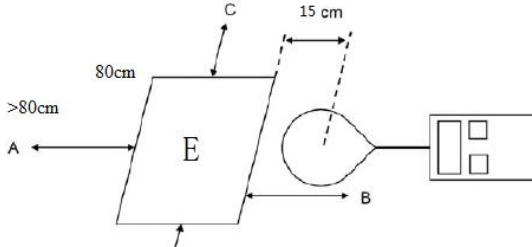Test Requirement:	FCC Rules and Regulations KDB680106
Test Method:	§1.1307(b)(1) & KDB680106
Limits:	According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03r01: RF Exposure Wireless Charging.
Test Setup:	 <p>E to position is 20cm.</p>
Test Mode:	Transmitting Mode
Test Procedure:	<ol style="list-style-type: none"> <li>1. The RF exposure test was carried out on a non-metallic table top 80cm high in the shielding darkroom.</li> <li>2. The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.</li> <li>3. The test time is maintained for more than one minute.</li> <li>4. The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.</li> <li>5. The EUT were measured according to the dictates of KDB 680106 D01v03r01.</li> </ol>
Test Result:	PASS

### 3.1.2. Test Instruments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Exposure Level Tester	narda	ELT-400	N-0231	2021.08.30	1 Year
2	Magnetic field probe 100cm <sup>2</sup>	narda	ELT probe 100cm <sup>2</sup>	M0675	2021.08.30	1 Year
3	Isotropic Electric Field Probe	narda	EP-601	511WX60706	2021.08.30	1 Year

### 3.1.3. Test data

For Full load mode:

E-Field Strength at 15 cm for position A, B, C, D, E 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.125-0.205	1.564	1.534	1.527	1.498	1.450	307	614

H-Field Strength at 0 cm for position A, B, C, D, E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.125-0.205	<b>0.513</b>	0.502	0.503	0.506	0.510	0.815	1.63

H-Field Strength at 15 cm for position A, B, C, D, E 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.125-0.205	0.198	0.192	0.194	0.196	0.189	0.815	1.63

For Half load mode:

E-Field Strength at 15 cm for position A, B, C, D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.125-0.205	1.325	1.332	1.351	1.351	1.348	307	614

H-Filed Strength at 0 cm for position A, B, C, D, E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.125-0.205	0.412	0.423	0.441	0.435	0.402	0.815	1.63

H-Filed Strength at 15 cm for position A, B, C, D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.125-0.205	0.182	0.178	0.183	0.180	0.181	0.815	1.63

For Null load mode:

E-Field Strength at 15 cm for position A, B, C, D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.125-0.205	1.210	1.112	1.216	1.220	1.158	307	614

H-Filed Strength at 0 cm for position A, B, C, D, E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.125-0.205	0.329	0.325	0.333	0.326	0.327	0.815	1.63

H-Filed Strength at 15 cm for position A, B, C, D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.125-0.205	0.177	0.176	0.181	0.174	0.173	0.815	1.63


H-Filed Strength at 0 cm for position A, B, C, D, E from the edges surrounding the EUT (A/m)

Note: uT to A/m: A/m = uT/1.25

Note: in the portable use state of the product, the magnetic fields of X, y and Z axes from 0 to 20cm have been tested, and only the worst data are retained.

#### 4. Photos of test setup

For Full load mode

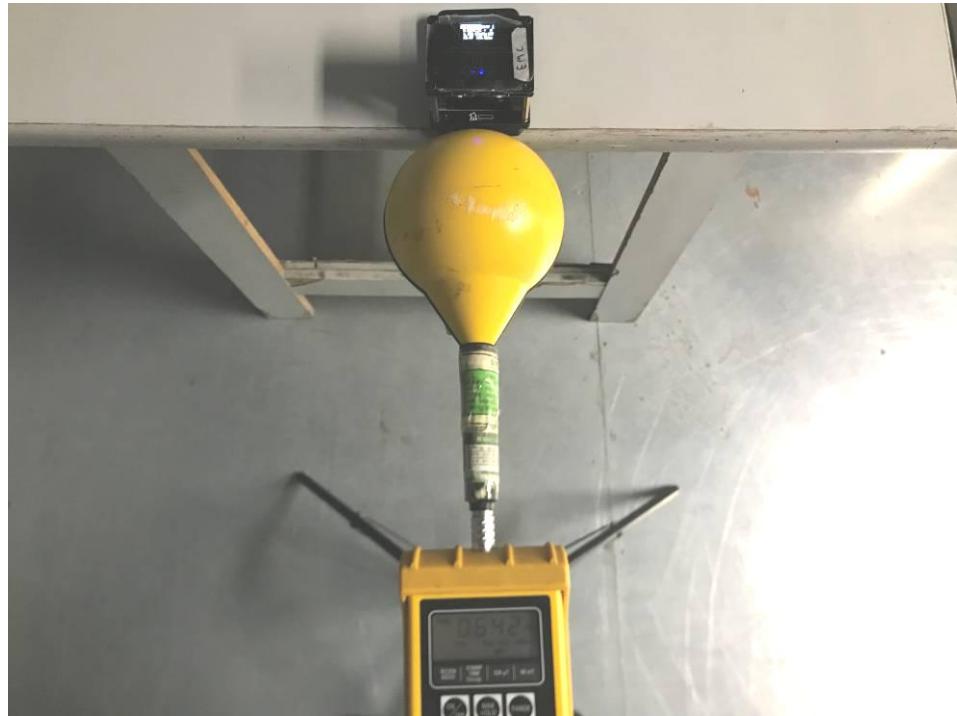

0cm

For No load mode



0cm

For Full load mode



15cm

For No load mode



15cm

For Full load mode



0cm

For No load mode




0cm

For Full load mode



15cm

For No load mode

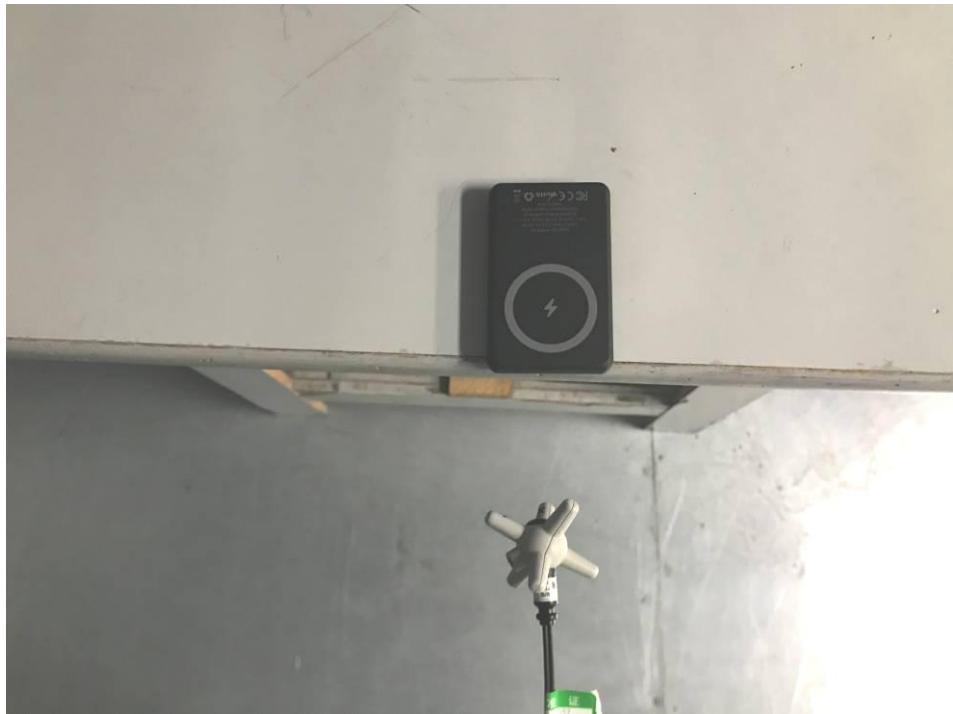

15cm

-----End-----