


Prüfbericht-Nr.: Test report no.:	60412010-002	Auftrags-Nr.: Order no.:	23870414 030	Seite 1 von 57 Page 1 of 57	
Kunden-Referenz-Nr.: Client reference no.:	1005969	Auftragsdatum: Order date:	2020.07.02		
Auftraggeber: Client:	Spotify USA Inc				
Prüfgegenstand: Test item:	Car Thing				
Bezeichnung / Typ-Nr.: Identification / Type no.:	IC ID: 24262-YX5H6679				
Auftrags-Inhalt: Order content:	Certified testing according to RSS-247				
Prüfgrundlage: Test specification:	RSS-247 issue 2, RSS-GEN Issue 5 ANSI C63.10: 2013				
Wareneingangsdatum: Date of sample receipt:	2020.07.02				
Prüfmuster-Nr.: Test sample no.:	See section 2.3				
Prüfzeitraum: Testing period:	2020.09.07 - 2020.11.11				
Ort der Prüfung: Place of testing:	Lund, Sweden				
Prüflaboratorium: Testing laboratory:	TÜV Rheinland Sweden				
Prüfergebnis*: Test result*:	Pass				
überprüft von: reviewed by:			genehmigt von: authorized by:		
Datum: 2020.11.16 Date:	Signed by: Niall Forrester		Datum: 2020.11.16 Date:	Signed by: Per Isacson	
Stellung / Position:	Senior Technical Expert		Stellung / Position:	Lab Manager	
Sonstiges / Other:	This report covers Bluetooth BDR/EDR only				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts.</i>					

Revision History60412010-00260412010-002

REVISION	DATE	REMARKS	AUTHOR
001	2020.10.08	First release	Niall Forrester
002	2020.11.16	Updated conducted radio results	Niall Forrester
Note: Latest revision report will replace all previous reports			
This report based on RSS-247 Template version 1.0			

Summary of Test Results

FCC 47 CFR Rule Part	Test Description	Applicability	Report Section	RESULT	REMARKS
RSS-GEN 8.8	AC Power Line Conducted Emissions (Radio Apparatus)	YES	4.1	N.P.	See BLE report for results
RSS-GEN 8.9	Radiated Emissions (Radio Apparatus)	YES	4.2	PASS	
RSS-247 5.5	Out of Band Emissions	YES	4.3	PASS	
RSS-247 5.5	Band Edge Compliance (Authorized Band)	YES	4.4	PASS	
RSS-247 5.5 RSS-GEN 8.10	Band Edge Compliance (Restricted Band)	YES	4.5	PASS	
RSS-247 5.1 (a) RSS-GEN 6.7	20dB Bandwidth 99% Emission Bandwidth	YES	4.6	PASS	
RSS-247 5.1 (b)	Carrier (Hopping Channel) Separation	YES	4.7	PASS	
RSS-247 5.1 (d)	Number of Hopping Channels	YES	4.8	PASS	
RSS-247 5.1 (d)	Time of Occupancy (Dwell Time)	YES	4.9	PASS	
RSS-247 5.2 (a) RSS-GEN 6.7	6dB Bandwidth 99% Emission Bandwidth	NO	4.10	N/A	BT supports freq. hopping
RSS-247 5.4	Peak Conducted Output Power	YES	4.11	PASS	
RSS-247 5.2 (b)	Power Spectral Density	NO	4.12	N.P.	BT supports freq. hopping
RSS-GEN 6.11	Transmitter Frequency Stability	NO	4.13	N/A	Not required for Bluetooth

Possible test case verdicts:

- | | |
|--|-----------------------|
| - Test case does not apply to the test object: | N/A |
| - Test object complies with the requirement: | PASS or COMPLIANT |
| - Test object does not meet the requirement: | FAIL or NOT COMPLIANT |
| - Test case not performed on the test object: | N.P. |

Table of Contents

1. GENERAL INFORMATION	4
1.1 Test Site.....	4
1.2 Client Information.....	4
2. PRODUCT INFORMATION.....	5
2.1 General Description.....	5
2.2 Device Characteristics.....	5
2.3 Test Samples	5
2.4 Wireless Technologies and Bands Supported by the EUT.....	5
2.5 Antenna Information.....	6
2.6 Wireless Technology Details	6
2.7 Ancillary Equipment.....	6
2.8 Emission Designators.....	6
2.9 EUT Diagrams.....	6
3. TEST METHODS	7
3.1 Test Standards.....	7
3.2 Additional references.....	7
3.3 Limits	8
3.4 Description of Test Methods and Equipment Setup	10
3.5 EUT Configuration During Test.....	15
3.6 EUT Operation Modes.....	15
3.7 Deviations from the Test Standard	15
3.8 Environmental Conditions.....	16
4. TEST RESULTS	17
4.1 Test Results – AC Power Line Conducted Emissions (Intentional Transmitter).....	17
4.2 Test Results – Radiated Emissions (Intentional Transmitter).....	18
4.3 Test Results – Out of Band Emissions	37
4.4 Test Results – Band Edge Compliance (Authorized Band).....	39
4.5 Test Results – Band Edge Compliance (Restricted Band).....	41
4.6 Test Results – 99% Emission Bandwidth.....	44
4.7 Test Results – Carrier (Hopping Channel) Separation	46
4.8 Test Results – Number of Hopping Channels.....	48
4.9 Test Results – Time of Occupancy (Dwell Time)	50
4.10 Test Results – 6dB Bandwidth.....	52
4.11 Test Results – Peak Conducted Output Power	53
4.12 Test Results – Power Spectral Density.....	54
4.13 Transmitter Frequency Stability	54
5. TEST EQUIPMENT STATUS.....	55
5.1 List of Hardware with Calibration Dates	55
5.2 Software / Firmware Versions.....	56
6. MEASUREMENT UNCERTAINTY	57
6.1 Measurement Uncertainty for CTE	57
6.2 Measurement Uncertainty for Conducted Emissions	57
6.3 Measurement Uncertainty for SAC 5 (Radiated Emissions & Band Edge)	57
7. PHOTOGRAPHS.....	57

Appendix 1 Photographs (separate document)

1. GENERAL INFORMATION

1.1 Test Site

Test Facility:	TÜV Rheinland Sweden AB
Address:	Mobilvägen 10
	223 62 Lund
	Sweden
Swedac Registration Number:	10325
FCC Test Firm Registration Number:	517458
ISED Test Site Registration Number:	24753

1.2 Client Information

Company Name:	Spotify USA Inc.
Address:	4 World Trade Center, 63 rd floor
	New York, NY 10007
	USA
Contact Person:	Daniel Bromand
Contact e-Mail / Telephone	Danielb@spotify.com / +1 (0) 646-512-0729

2. PRODUCT INFORMATION

2.1 General Description

Model name:	Car Thing
Manufacturer:	Spotify USA Inc.
HVIN:	YX5H6679
IC ID:	24262-YX5H6679
Description:	A voice controlled accessory for phone/Spotify App with supporting display and buttons. Bluetooth enabled for communication with the Car Head Unit. Powered from a 12V outlet.
Ancillary Equipment:	See section 0

2.2 Device Characteristics

Type of Power Supply	12V to 5V USB car charger
Nominal Supply Voltage	5V
Supply Voltage Range	4.75-5.25V
Operating Temperature Range	-20 + 45 deg C
Operating Air Humidity Range	N/A
Highest Internal Frequency Source	24 MHz XO, 2480 MHz radio

2.3 Test Samples

EUT #	EUT ID	Description	Used For:
1	A002893981-001	Standard Sample	Radiated emissions
2	A002893981-002	Sample with semi-rigid antenna and DUT Mode	Conducted radio tests

2.4 Wireless Technologies and Bands Supported by the EUT

Technology	Band	Frequency Range (Tx)	Evaluation Performed*
Bluetooth BDR/EDR	2.4 GHz	2402 MHz - 2480 MHz	YES
Bluetooth Low Energy	2.4 GHz	2402 MHz - 2480 MHz	NO

*This statement refers only to this report. Other wireless technologies may be covered by other reports.

2.5 Antenna Information

Technology	Band	Number of Antennas	Antenna Type(s)	Gain
Bluetooth BDR/EDR & Low Energy	2.4 GHz	1	Internal inverted F	-1.33

2.6 Wireless Technology Details

Technology	Band	Modulation Type(s)	No. of Channels	Channel Spacing	Adaptivity
Bluetooth BDR/EDR	2.4 GHz	GFSK, $\pi/4$ -DQPSK, 8-DPSK	79	1 MHz	N/A
Bluetooth Low Energy	2.4 GHz	GFSK	40	2 MHz	N/A

2.7 Ancillary Equipment

ID	Description	Manufacturer / Model	Hardware & Software Versions
A002893981-008	USB-A to USB-C Cable	-	-
A002893981-014	Dual Port USB Car Charger	IBD322 – 3.1A	-
A002893981-016	12V Car Charger Cable	-	-

2.8 Emission Designators

Technology	Band	Emission Designator
Bluetooth BDR/EDR	2.4 GHz	G1D
Bluetooth Low Energy	2.4 GHz	F1D

2.9 EUT Diagrams

N/A

3. TEST METHODS

3.1 Test Standards

Testing was performed according to the following standards / references

Standard	Version	Description
RSS-247	Issue 2	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local
RSS-GEN	Issue 5	General Requirements for Compliance of Radio Apparatus

3.2 Additional references

The following standards / references were also considered for the testing

Standard	Version	Description
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.3 Limits

ISED Rule Part	Test Description	Limit Reference (ISED Reference)
RSS-GEN 8.8	AC Power Line Conducted Emissions (Radio Apparatus)	RSS-GEN 8.8 See note 2
RSS-GEN 8.9	Radiated Emissions (Radio Apparatus)	RSS-GEN 8.9 See note 1,2
RSS-247 5.5	Out of Band Emissions	RSS-247 5.5
RSS-247 5.5	Band Edge Compliance (Authorized Band)	RSS-247 5.5 RSS-GEN 8.10
RSS-247 5.5 RSS-GEN 8.10	Band Edge Compliance (Restricted Band)	RSS-GEN 8.10 See note 2
RSS-247 5.1 (a) RSS-GEN 6.7	20dB Bandwidth 99% Emission Bandwidth	RSS-247 5.1 RSS-GEN 6.7
RSS-247 5.1 (b)	Carrier (Hopping Channel) Separation	RSS-247 5.1 (b)
RSS-247 5.1 (d)	Number of Hopping Channels	RSS-247 5.1 (d)
RSS-247 5.1 (d)	Time of Occupancy (Dwell Time)	RSS-247 5.1 (d)
RSS-247 5.2 (a) RSS-GEN 6.7	6dB Bandwidth 99% Emission Bandwidth	RSS-247 5.2 RSS-GEN 6.7
RSS-247 5.4	Peak Conducted Output Power	RSS-247 5.4
RSS-247 5.2 (b)	Power Spectral Density	RSS-247 5.2 (b)
RSS-GEN 6.11	Transmitter Frequency Stability	RSS-GEN 8.11 (central 80% requirement)

Interpretation of the measurement results has been performed in accordance with ANSI C63.10 section 1.3

Compliance with the requirements has been based on the results of the measurements compared to the specified limits, not taking into account measurement instrumentation uncertainty.

Measurement Uncertainty figures are stated in section 6

ISED – FCC Requirement Equivalencies

Some graphs in this report may contain references to FCC Limits. The table below lists equivalencies between FCC and ISED requirements

ISED Reference	FCC Reference	Description
RSS-GEN 8.8 Table 4	47 CFR 15.207 (a)	AC power-line conducted emissions limits
RSS-GEN 8.9 (Table 5)	47 CFR 15.209 (a)	Transmitter emission limits at frequencies >30MHz
RSS-GEN 8.9 (Table 6)	47 CFR 15.209 (a)	Transmitter emission limits at frequencies <30MHz

Note 1

Radiated Emissions limits in the tables from RSS-GEN 8.9 Table 6 are presented in $\mu\text{A/m}$ but measurements were made in $\text{dB}\mu\text{V/m}$. Conversion from $\mu\text{A/m}$ to $\mu\text{V/m}$ is done using a free space impedance of 377Ω , thus:

$$\text{Limit}_{\mu\text{V/m}} = 377 \times \text{Limit}_{\mu\text{A/m}}$$

Example: from RSS-GEN Table 6 the limit for 1.705MHz – 30MHz is $0.08\mu\text{A/m}$ at 30m

$$\text{Limit}_{\mu\text{V/m}} = 377 \times 0.08 = 30\mu\text{V/m at 30m}$$

Note 2

Radiated Emissions limits in the tables from RSS-GEN 8.9 Table 5 are presented in $\mu\text{V/m}$. Measurements on the test system are made in $\text{dB}\mu\text{V/m}$. To convert between these, the following adjustment is used:

$$\text{New Limit} = 20 \log \left(\frac{\text{Original Limit}}{10^6} \right) + 120$$

Example: from RSS-GEN Table 5 the limit for 30MHz – 88MHz is $100\mu\text{V/m}$ at 3m. This gives:

$$\text{New Limit} = 20 \log \left(\frac{100}{10^6} \right) + 120 = 40\text{dB}\mu\text{V/m at 3m}$$

In some cases testing has been performed at distances other than those specified in the tables. When this has occurred, the limits have been adjusted in accordance with the requirements in RSS-GEN 6.5 and 6.6, using an extrapolation factor of 40dB/decade at frequencies below 30MHz and 20dB/decade at or above 30MHz

Example: from RSS-GEN Table 5 the limit for 1GHz – 18GHz is $500\mu\text{V/m}$ (=53.98 $\text{dB}\mu\text{V/m}$) at 3m

$$\text{Limit@1m} = \text{Limit@3m} + 20 \log \left(\frac{3}{1} \right) = 53.98 + 9.54 = 63.52 \text{ dB}\mu\text{V/m at 1m}$$

Example: from RSS-GEN Table 6 the limit for 1.705MHz – 30MHz is $0.08\mu\text{A/m}$ (=29.54 $\text{dB}\mu\text{V/m}$) at 30m

$$\text{Limit@3m} = \text{Limit@30m} + 40 \log \left(\frac{30}{3} \right) = 29.54 + 40.00 = 69.54 \text{ dB}\mu\text{V/m at 3m}$$

3.4 Description of Test Methods and Equipment Setup

3.4.1 General Description

Testing was performed in accordance with the various requirements of ANSI C63.4 and ANSI C63.10. Any deviations from the test methods are described in section 3.7

Where different arrangements of equipment were used for different types of measurements, these are tabulated in section 3.4.2 and details of each arrangement are included in subsequent sections

3.4.2 Test Equipment Setup Used by Test Type

FCC 47 CFR Rule Part	Test Description	Test Equipment Used
RSS-GEN 8.8	AC Power Line Conducted Emissions (Radio Apparatus)	N.P.
RSS-GEN 8.9	Radiated Emissions (Radio Apparatus)	SAC5
RSS-247 5.5	Out of Band Emissions	CTE
RSS-247 5.5	Band Edge Compliance (Authorized Band)	CTE
RSS-247 5.5 RSS-GEN 8.10	Band Edge Compliance (Restricted Band)	SAC 5
RSS-247 5.1 (a) RSS-GEN 6.7	20dB Bandwidth 99% Emission Bandwidth	CTE
RSS-247 5.1 (b)	Carrier (Hopping Channel) Separation	CTE
RSS-247 5.1 (d)	Number of Hopping Channels	CTE
RSS-247 5.1 (d)	Time of Occupancy (Dwell Time)	CTE
RSS-247 5.2 (a) RSS-GEN 6.7	6dB Bandwidth 99% Emission Bandwidth	CTE
RSS-247 5.4	Peak Conducted Output Power	CTE
RSS-247 5.2 (b)	Power Spectral Density	CTE
RSS-GEN 6.11	Transmitter Frequency Stability	N/A


3.4.3 Test Equipment Setup – CTE System

The Comprehensive Test Environment (CTE) system consists of a number of instruments (see section 5.1.1) mounted in a rack together with automated relays and interconnecting hardware. The instruments and other equipment are controlled from a standard PC running software provided by the manufacturer. The RF output of the EUT is connected to the test system via a coaxial cable.

Tests are in the form of pre-defined scripts that can be loaded on the PC. The scripts, as well as the hardware setup, have been verified for conformance with the relevant test specifications.

Losses in the cables and interconnects have been measured using the system's own automated routines and are compensated for automatically. Any additional loss in RF adapter cables supplied together with the EUT can be compensated for using the known characteristics of that adapter.


CTE Block Diagram

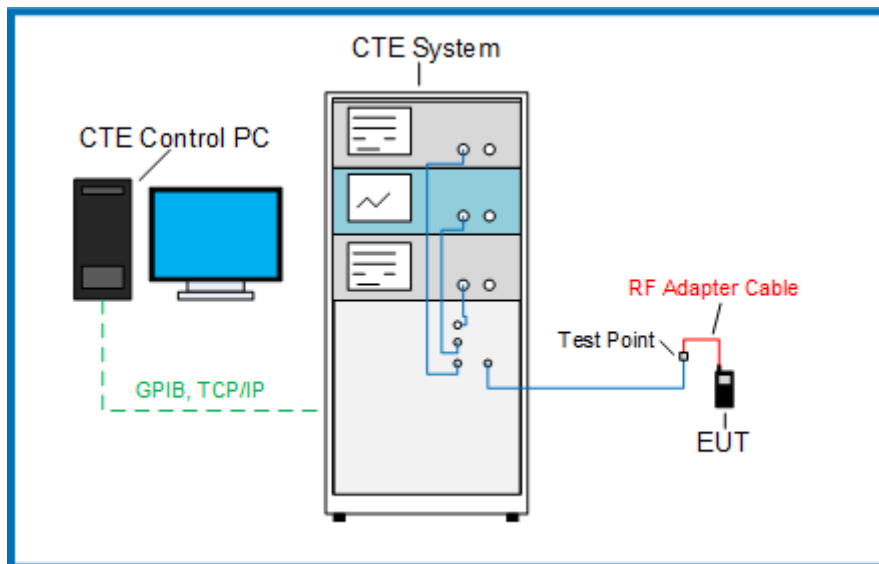

For frequency stability tests, the EUT is connected directly to the Network Emulator or Spectrum Analyser, and frequency measurements made directly on that instrument.

3.4.4 Test Equipment Setup – Conducted Emissions


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The LISNs provide $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument.
- The lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10 dB under the prescribed limits could not be reported.

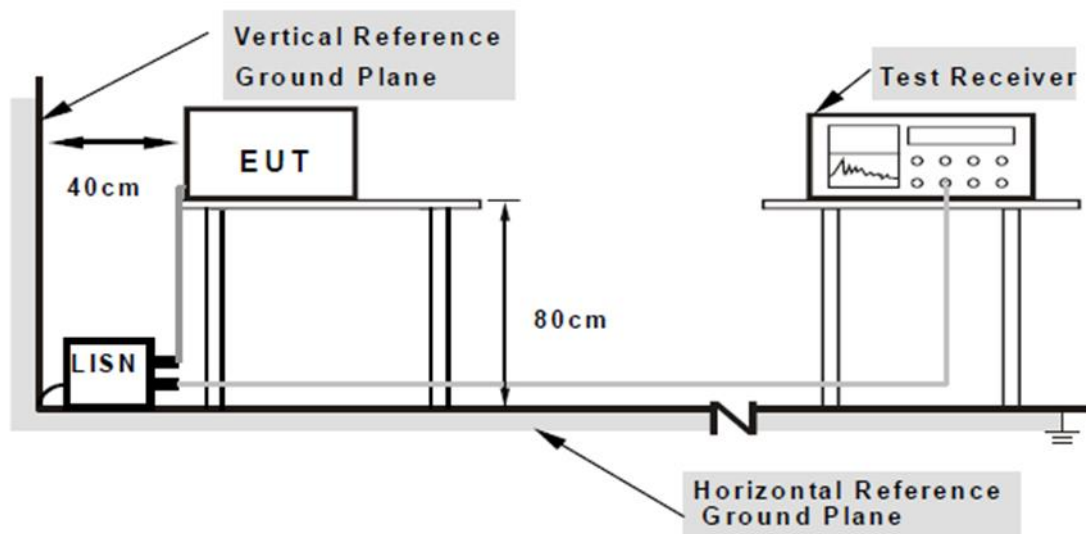


3.4.5 Test Equipment Setup – SAC 5 (Radiated Emissions and Restricted Band Edge)

- For frequency range 30MHz-1GHz Log-Periodic Antenna was used. Antenna elevated from 100 cm from floor to 400 cm from floor, and was placed at 3 m from center of turntable in tilted position. The equipment under test (EUT) was placed at the middle of the turntable at 150 cm height from floor. The antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.
- For frequency range 1GHz-18GHz horn Antenna was used. Antenna elevated from 100 cm from floor to 200 cm from floor, and was placed at 3 m from center of turntable. The equipment under test (EUT) was placed at the middle of the turntable at 150 cm height from floor. The antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.
- For frequency range 18GHz-40GHz double horn Antenna was used. Antenna's height was adjusted to 150 cm from floor, and 1 m distance to center of turntable. The equipment under test (EUT) was placed at the middle of the turntable on at 150 cm height from floor.
- For all frequency ranges the turntable was rotated 360° for obtaining the maximum emission.


SAC 5 Test Setup Configuration 30MHz – 1GHz

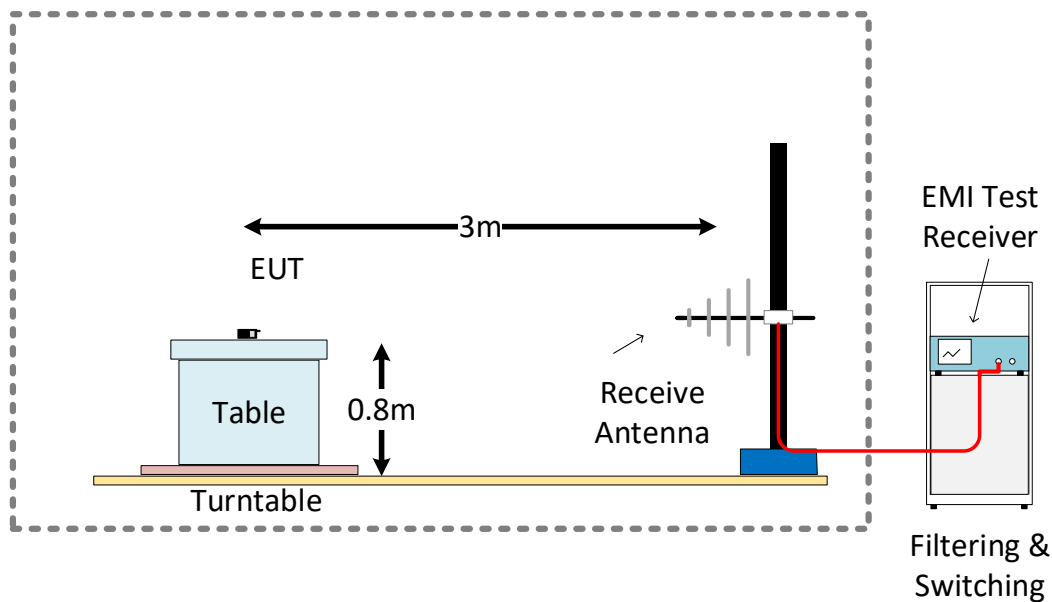

SAC 5 Test Setup Configuration 1GHz – 18GHz

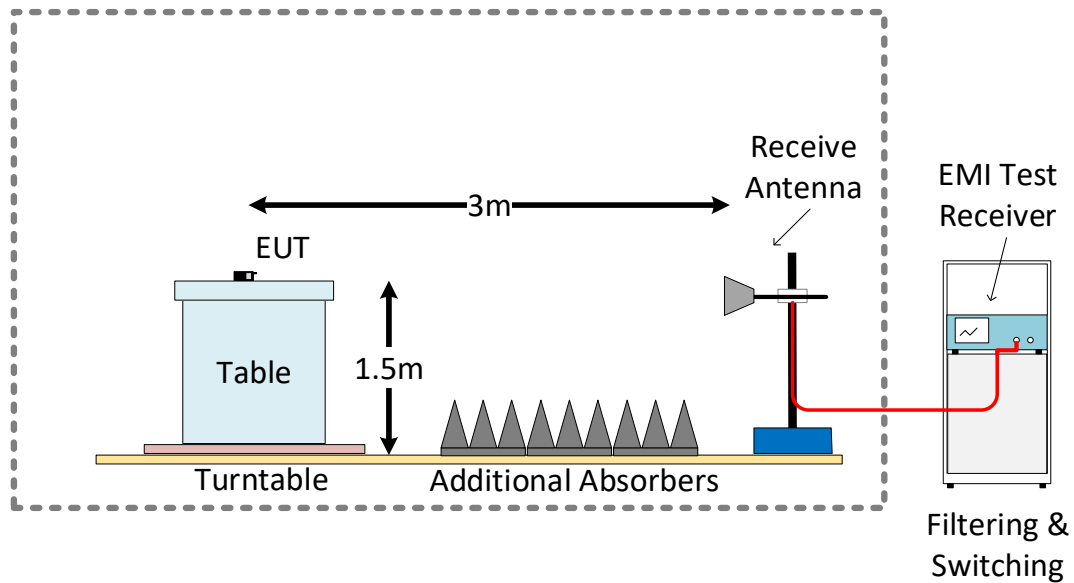

SAC 5 Test Setup Configuration 18GHz – 40GHz

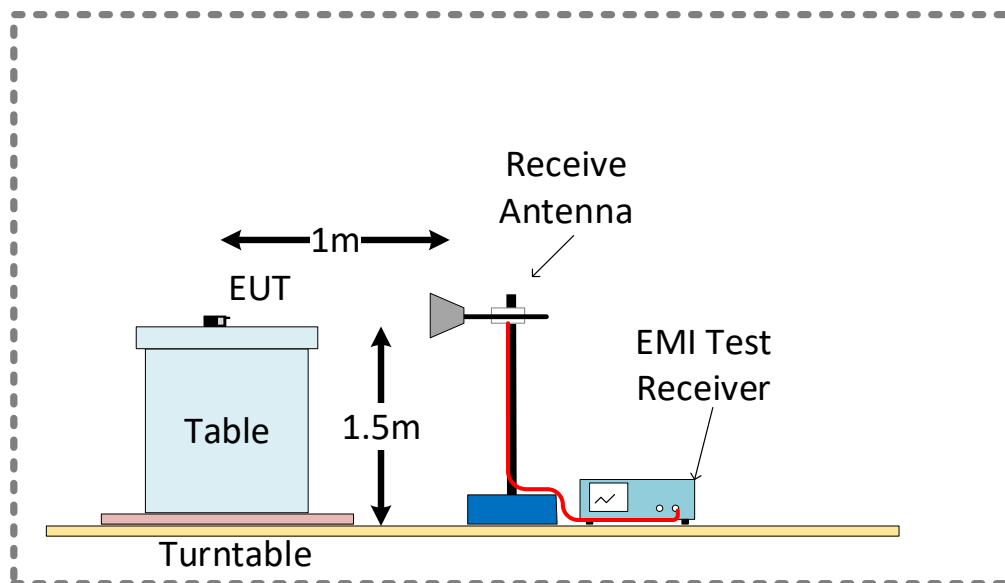

3.5 EUT Configuration During Test

See individual tests

3.6 EUT Operation Modes

Operation mode	Description
1	Continuous Transmit – Device is set to transmit random data continuously
2	Test Mode – Device is controlled by the test equipment using Bluetooth Test Mode (DUT Mode)

3.7 Deviations from the Test Standard

None

3.8 Environmental Conditions

3.8.1 Environmental Conditions – CTE System

Environmental Conditions Log - CTE

Date	Time	Temperature (°C)	Relative Humidity (%)
2020/11/10	07:35	19.7	43 %
2020/11/11	08:10	21.7	36 %

3.8.2 Environmental Conditions – SAC5 (Radiated Emissions)

Environmental Conditions Log – SAC5

Date	Time	Temperature (°C)	Relative Humidity (%)
2020/09/10	09:03	18.7	62 %
2020/09/11	08:16	18.8	58 %
2020/09/14	10:25	18.4	63 %
2020/09/15	07:53	18.6	63 %
2020/09/16	07:33	18.9	65 %
2020/09/17	07:41	19.3	62 %
2020/09/18	08:00	18.6	56 %
2020/09/19	12:20	18.7	65 %
2020/09/20	11:50	20.0	58 %
2020/09/21	07:11	18.4	61 %
2020/09/22	07:18	18.5	61 %

4. TEST RESULTS

4.1 Test Results – AC Power Line Conducted Emissions (Intentional Transmitter)

4.1.1 AC Power Line Conducted Emissions (Intentional) – Test Summary

Testing performed with device in Bluetooth Low Energy mode. Please see results in corresponding report

4.2 Test Results – Radiated Emissions (Intentional Transmitter)

4.2.1 Radiated Emissions (Intentional) – Test Summary


Test Specification		RSS-GEN 8.9	
Test Engineer & Date		Joel Efraimsson Niall Forrester Sam Ebadeh Fariborz Abasi	2020.09.10 – 2020.09.22
EUT and Ancillary Equipment IDs		A002893981-001	A002893981-008 A002893981-014 A002893981-016
EUT Operation Mode(s)		Continuous Transmit	
EUT Wireless Configuration(s)		Bluetooth BDR EDR 3-DH5 (8-DPSK Low / Mid / High channels)	
EUT Hardware Configuration(s)		Power from USB Charger connected to 12V DC	
Overall Result		PASS	

Test Parameter	Wireless Configuration	Frequency Range	Result
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	9 kHz – 30 MHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	30 MHz – 1 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	1 GHz – 18 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	18 GHz – 40 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Mid Ch. (8-DPSK 2441 MHz)	9 kHz – 30 MHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Mid Ch. (8-DPSK 2441 MHz)	30 MHz – 1 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Mid Ch. (8-DPSK 2441 MHz)	1 GHz – 18 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 Mid Ch. (8-DPSK 2441 MHz)	18 GHz – 40 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	9 kHz – 30 MHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	30 MHz – 1 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	1 GHz – 18 GHz	PASS
Radiated Emissions	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	18 GHz – 40 GHz	PASS


4.2.2 Radiated Emissions (Intentional) – Test Details

Low Channel 9kHz – 30MHz –Parallel to Axis

Test mode condition	Bluetooth 3-DH5 Low Channel (2402 MHz)	
Antenna orientation	Loop Antenna Parallel to Axis	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Joel Efraimsson	Date: 2020-09-19
Chamber details	Chamber: SAC 5	

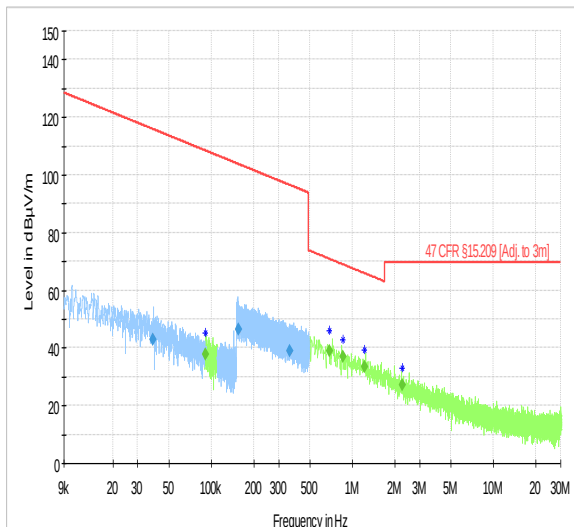

PreviewResult 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 (Adj. to 3m)
 Final_Result QPK
 PreviewResult 1-AVG
 Critical_Freqs AVG
 Final_Result AVG

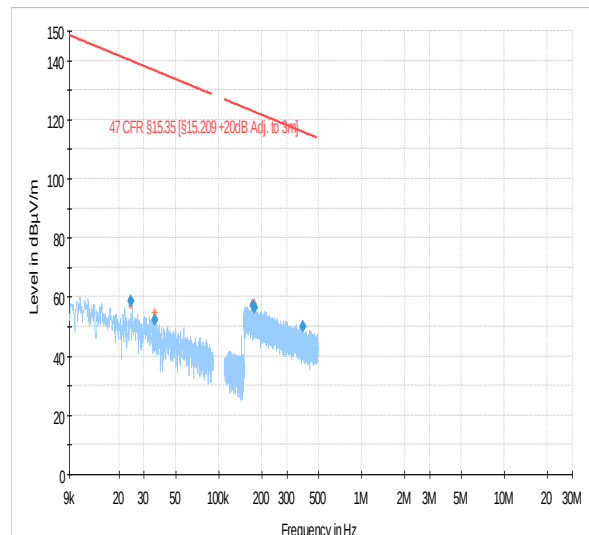


PreviewResult 1-PK+
 47 CFR §15.35 (S15.209+20dB Adj. to 3m)
 MaxPeak-PK+ (Single)
 Critical_Freqs PK+
 Final_Result PK+


Frequency (MHz)	Average (dBμV/m)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.038489	43.10	---	---	115.90	72.79	1000.0	0.200	100.0	H	281.0
0.090646	---	37.99	---	108.46	70.47	1000.0	0.200	100.0	H	49.0
0.156547	46.50	---	---	103.71	57.21	1000.0	9.000	100.0	H	127.0
0.359569	39.05	---	---	96.49	57.44	1000.0	9.000	100.0	H	315.0
0.686140	---	39.08	---	70.88	31.80	1000.0	9.000	100.0	H	205.0
0.860367	---	36.85	---	68.91	32.06	1000.0	9.000	100.0	H	25.0
1.213534	---	33.36	---	65.92	32.57	1000.0	9.000	100.0	H	244.0
2.254051	---	27.00	---	69.54	42.54	1000.0	9.000	100.0	H	11.0
0.024200			58.81	139.93	81.11	1000.0	0.200	100.0	H	177.0
0.035510			52.23	136.60	84.37	1000.0	0.200	100.0	H	88.0
0.173509			57.16	122.82	65.66	1000.0	9.000	100.0	H	-15.0
0.176985			56.50	122.65	66.14	1000.0	9.000	100.0	H	-15.0
0.387616			49.84	115.84	66.00	1000.0	9.000	100.0	H	165.0

Low Channel 9kHz – 30MHz –Perpendicular to Axis

Test mode condition	Bluetooth 3-DH5 Low Channel (2402 MHz)	
Antenna orientation	Loop Antenna Perpendicular to Axis	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Joel Efraimsson	Date: 2020-09-10
Chamber details	Chamber: SAC 5	

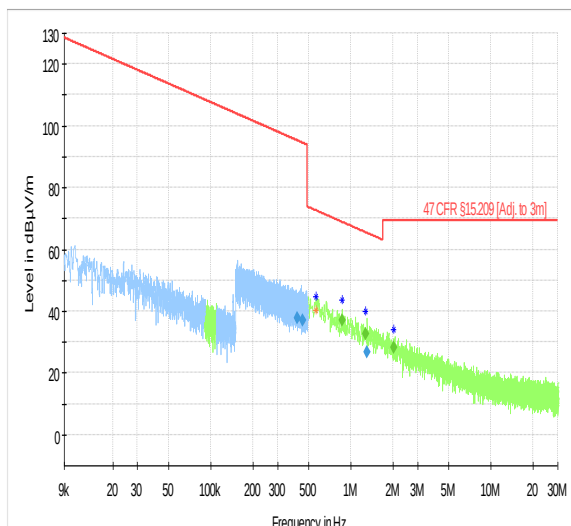

PreviewResult2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 (Adj. to 3m)
 Final_Result QPK
 PreviewResult1-AVG
 Critical_Freqs AVG
 Final_Result AVG

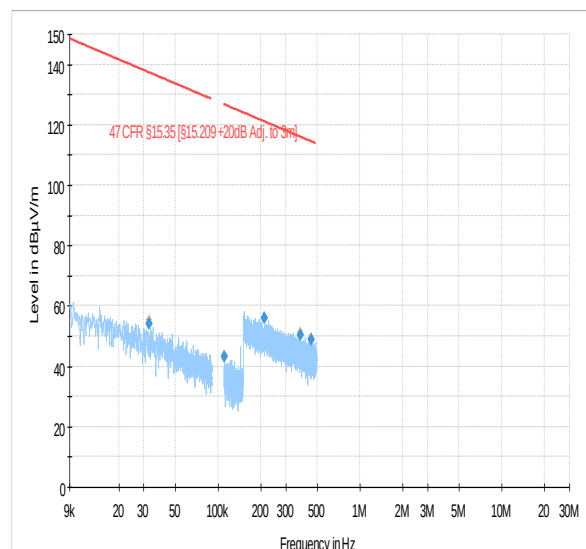


PreviewResult1-PK+
 47 CFR §15.35 (S15.209+20dB Adj. to 3m)
 MaxPeak-PK+ (Single)
 Critical_Freqs PK+
 Final_Result PK+


Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.412532	37.78	---	---	95.30	57.52	1000.0	9.000	100.0	H	293.0
0.454120	37.01	---	---	94.46	57.45	1000.0	9.000	100.0	H	225.0
0.862689	---	36.85	---	68.89	32.03	1000.0	9.000	100.0	H	45.0
1.279231	---	32.79	---	65.47	32.67	1000.0	9.000	100.0	H	45.0
1.304476	26.59	---	---	65.30	38.71	1000.0	9.000	100.0	H	-26.0
2.024761	---	28.19	---	69.54	41.35	1000.0	9.000	100.0	H	281.0
0.032572	---	---	54.05	137.35	83.29	1000.0	0.200	100.0	H	113.0
0.111037	---	---	43.25	126.70	83.45	1000.0	0.200	100.0	H	45.0
0.211161	---	---	55.98	121.11	65.13	1000.0	9.000	100.0	H	214.0
0.378736	---	---	50.27	116.04	65.76	1000.0	9.000	100.0	H	45.0
0.453435	---	---	48.77	114.47	65.71	1000.0	9.000	100.0	H	304.0

Low Channel 9kHz – 30MHz –Parallel to Floor

Test mode condition	Bluetooth 3-DH5 Low Channel (2402 MHz)	
Antenna orientation	Loop Antenna Parallel to Floor	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Joel Efraimsson	Date: 2020-09-20
Chamber details	Chamber: SAC 5	

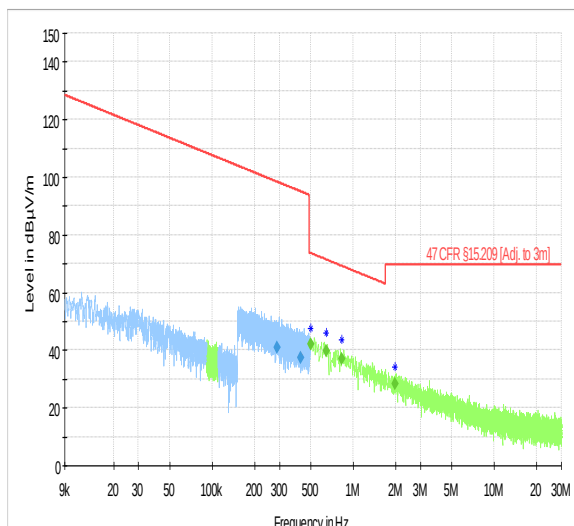

— PreviewResult 2-PK+
+ Critical_Freqs PK+
— 47 CFR §15.209 (Adj. to 3m)
♦ Final_Result QPK
— PreviewResult 1-AVG
+ Critical_Freqs AVG
♦ Final_Result AVG

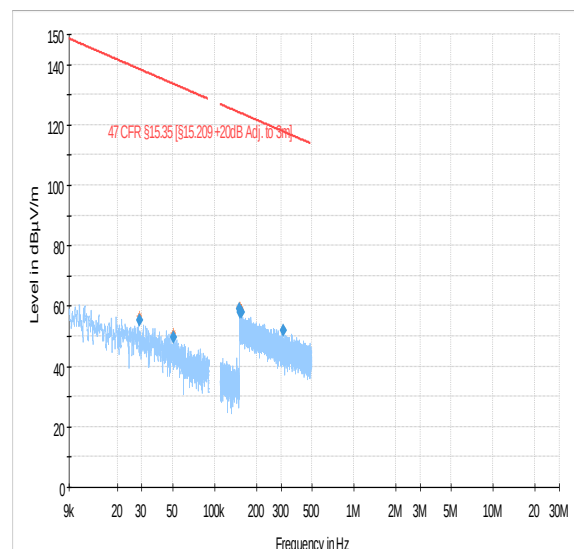


— PreviewResult 1-PK+
— 47 CFR §15.35 (S15.209+20dB Adj. to 3m)
x MaxPeak-PK+ (Single)
+ Critical_Freqs PK+
♦ Final_Result PK+

Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.288434	40.87	---	---	98.40	57.53	1000.0	9.000	100.0	H	192.0
0.425139	37.59	---	---	95.03	57.44	1000.0	9.000	100.0	H	49.0
0.499746	---	42.11	---	73.63	31.52	1000.0	9.000	100.0	H	24.0
0.644387	---	39.66	---	71.42	31.76	1000.0	9.000	100.0	H	-41.0
0.831191	---	37.20	---	69.21	32.01	1000.0	9.000	100.0	H	217.0
1.981348	---	28.23	---	69.54	41.32	1000.0	9.000	100.0	H	315.0
0.029016	---	---	55.44	138.35	82.91	1000.0	0.200	100.0	H	45.0
0.050834	---	---	49.77	133.48	83.71	1000.0	0.200	100.0	H	22.0
0.151032	---	---	59.03	124.02	65.00	1000.0	9.000	100.0	H	-27.0
0.151891	---	---	57.96	123.97	66.02	1000.0	9.000	100.0	H	223.0
0.155086	---	---	58.00	123.79	65.80	1000.0	9.000	100.0	H	255.0
0.310024	---	---	52.01	117.78	65.77	1000.0	9.000	100.0	H	315.0

Low Channel 30MHz – 1GHz

Test mode condition	Bluetooth 3-DH5 Low Channel (2402 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	30 MHz – 1 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-16
Chamber details	Chamber: SAC 5	

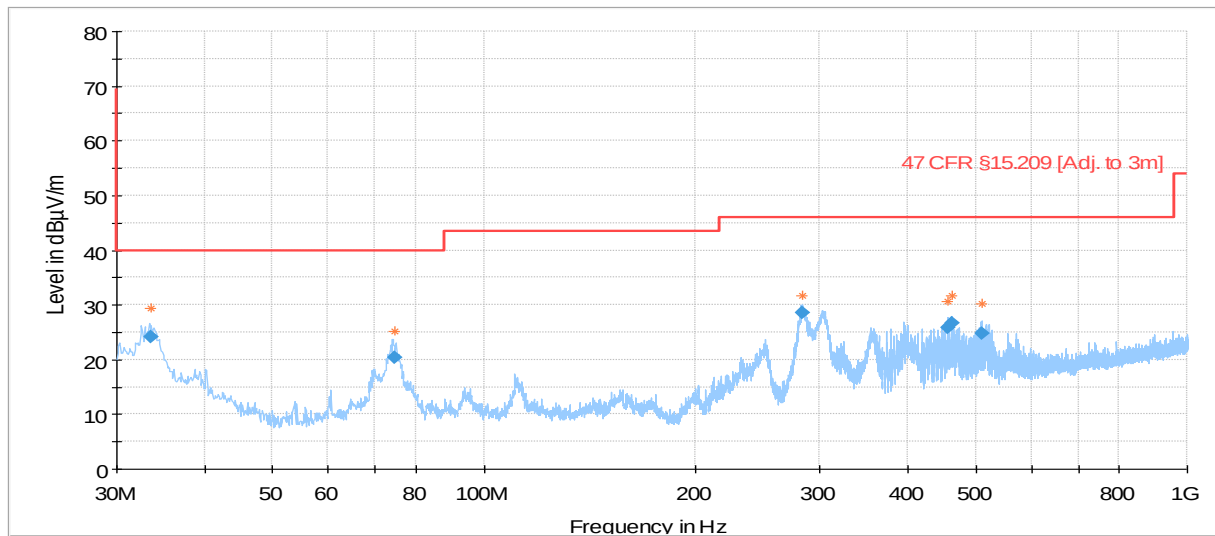


— PreviewResult 2-AVG
* Critical_Freqs AVG
— 47 CFR §15.209 [Adj. to 3m]
◆ Final_Result AVG

— PreviewResult 1-PK+
* Critical_Freqs PK+
◆ Final_Result QPK

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.545240	24.21	---	40.00	15.79	1000.0	120.000	100.0	V	202.0
74.498000	20.31	---	40.00	19.69	1000.0	120.000	125.0	V	-4.0
284.013480	28.59	---	46.02	17.43	1000.0	120.000	125.0	V	-18.0
456.213640	25.88	---	46.02	20.14	1000.0	120.000	100.0	H	112.0
462.335600	26.73	---	46.02	19.29	1000.0	120.000	100.0	H	112.0
511.511240	24.76	---	46.02	21.26	1000.0	120.000	270.0	H	112.0

Low Channel 1GHz – 18GHz

Test mode condition	Bluetooth 3-DH5 Low Channel (2402 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-14
Chamber details	Chamber: SAC 5	

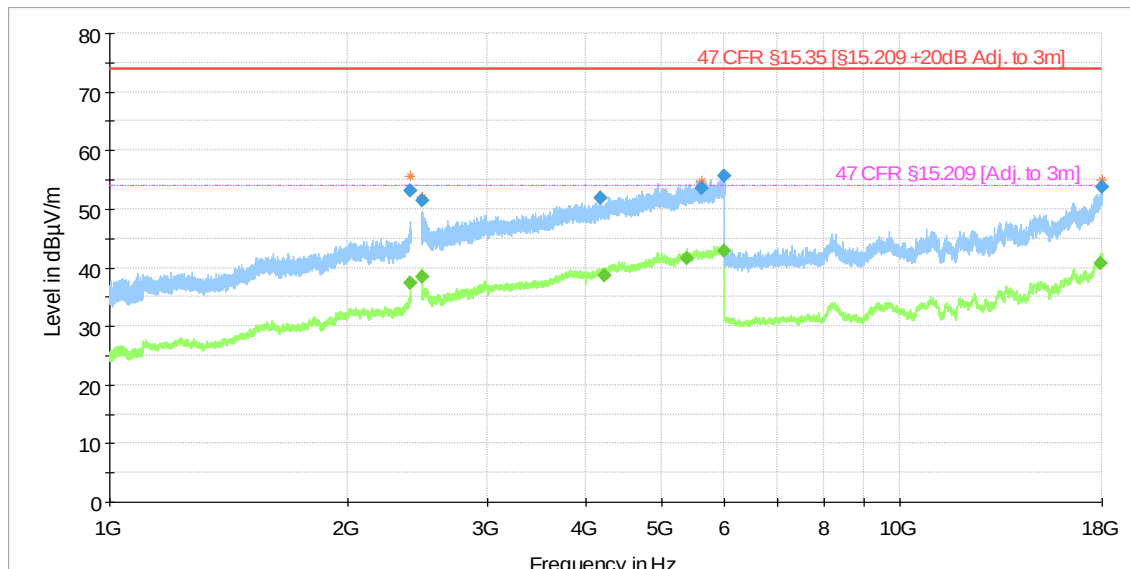


— PreviewResult 2-AVG
— PreviewResult 1-PK+
* Critical_Freqs AVG
* Critical_Freqs PK+
— 47 CFR §15.35 [§15.209 +20dB Adj. to 3m]
— 47 CFR §15.209 [Adj. to 3m]
◆ Final_Result PK+
◆ Final_Result AVG

Frequency (MHz)	MaxPeak (dBm)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2399.979500	---	37.36	53.98	16.62	1000.0	1000.000	148.0	H	-18.0
2483.543500	---	38.40	53.98	15.58	1000.0	1000.000	147.0	H	155.0
4234.240000	---	38.70	53.98	15.28	1000.0	1000.000	175.0	V	158.0
5372.049000	---	41.51	53.98	12.47	1000.0	1000.000	175.0	H	-18.0
5978.940000	---	42.90	53.98	11.08	1000.0	1000.000	125.0	V	280.0
17930.780000	---	40.80	53.98	13.18	1000.0	1000.000	206.0	V	26.0

Low Channel 18GHz – 40GHz

Test mode condition	Bluetooth 3-DH5 Low Channel (2402 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	18 GHz – 40 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-22
Chamber details	Chamber: SAC 5	

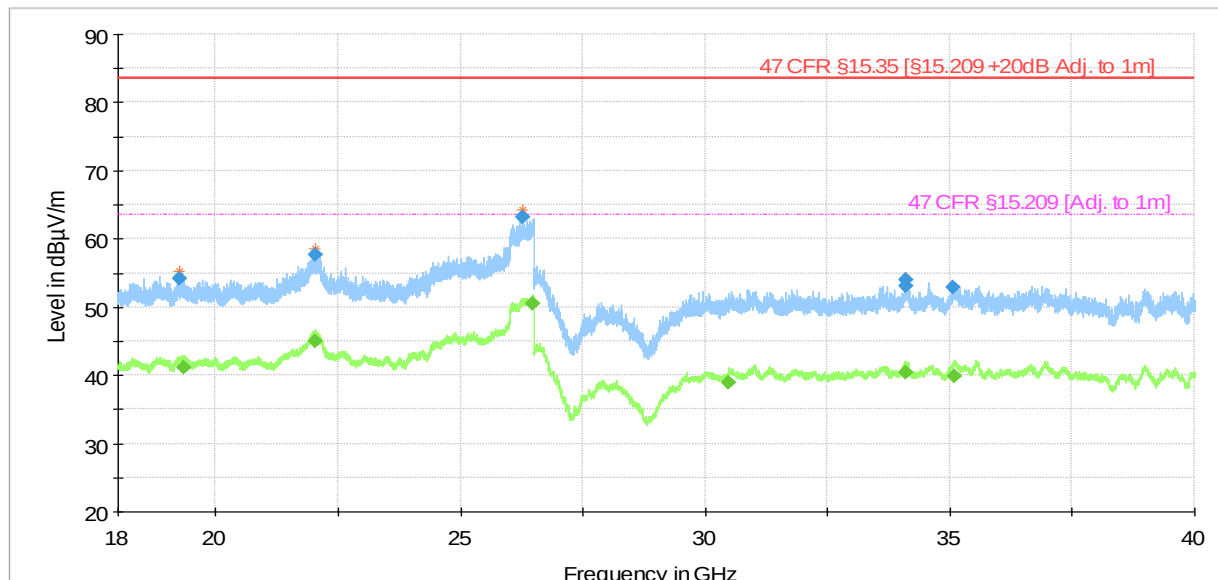



— PreviewResult 2-AVG
* Critical_Freqs AVG
— 47 CFR §15.35 [S15.209 +20dB Adj. to 1m]
◆ Final_Result PK+

— PreviewResult 1-PK+
* Critical_Freqs PK+
— 47 CFR §15.209 [Adj. to 1m]
◆ Final_Result AVG

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
19244.026000	54.15	---	83.52	29.37	1000.0	1000.000	155.0	H	116.0
19352.844000	---	41.11	63.52	22.41	1000.0	1000.000	155.0	H	98.0
22025.350000	---	44.97	63.52	18.55	1000.0	1000.000	155.0	H	312.0
22030.103000	57.72	---	83.52	25.80	1000.0	1000.000	155.0	H	162.0
26259.291000	63.16	---	83.52	20.36	1000.0	1000.000	155.0	V	338.0
26470.876000	---	50.48	63.52	13.04	1000.0	1000.000	155.0	H	128.0
30474.559000	---	38.89	63.52	24.63	1000.0	1000.000	155.0	V	292.0
34098.534000	---	40.37	63.52	23.15	1000.0	1000.000	155.0	V	158.0
34103.064000	53.15	---	83.52	30.37	1000.0	1000.000	155.0	H	306.0
34103.551000	53.96	---	83.52	29.56	1000.0	1000.000	155.0	H	308.0
35068.704000	52.94	---	83.52	30.58	1000.0	1000.000	155.0	H	52.0
35103.742000	---	39.91	63.52	23.62	1000.0	1000.000	155.0	V	308.0

Mid Channel 9kHz – 30MHz –Parallel to Axis



Test mode condition	Bluetooth 3-DH5 Mid Channel (2440 MHz)	
Antenna orientation	Loop Antenna Parallel to Axis	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Joel Efraimsson	Date: 2020-09-19
Chamber details	Chamber: SAC 5	

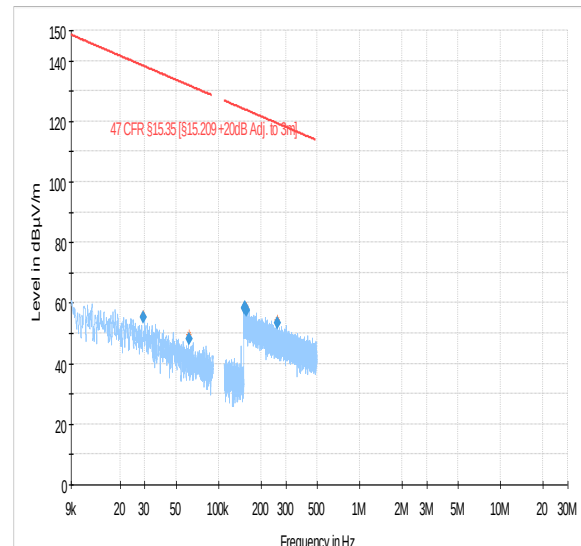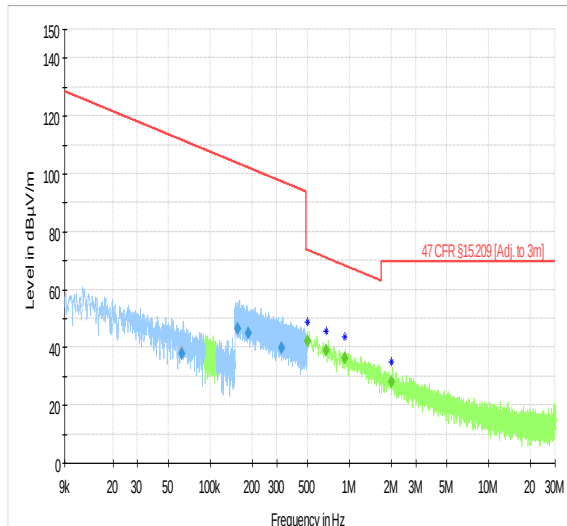

Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.062740	37.95	---	---	111.65	73.70	1000.0	0.200	100.0	H	89.0
0.157159	46.49	---	---	103.68	57.19	1000.0	9.000	100.0	H	281.0
0.187660	44.99	---	---	102.14	57.15	1000.0	9.000	100.0	H	315.0
0.325363	39.85	---	---	97.36	57.50	1000.0	9.000	100.0	H	256.0
0.497245	---	42.14	---	73.67	31.54	1000.0	9.000	100.0	H	76.0
0.678973	---	39.10	---	70.97	31.87	1000.0	9.000	100.0	H	101.0
0.929022	---	36.12	---	68.24	32.12	1000.0	9.000	100.0	H	49.0
1.998891	---	28.10	---	69.54	41.44	1000.0	9.000	100.0	H	217.0
0.029066	---	---	55.41	138.34	82.93	1000.0	0.200	100.0	H	315.0
0.061561	---	---	47.98	131.82	83.84	1000.0	0.200	100.0	H	225.0
0.152674	---	---	58.34	123.93	65.58	1000.0	9.000	100.0	H	113.0
0.153421	---	---	58.51	123.89	65.38	1000.0	9.000	100.0	H	313.0
0.157477	---	---	57.43	123.66	66.23	1000.0	9.000	100.0	H	124.0
0.261873	---	---	53.43	119.24	65.82	1000.0	9.000	100.0	H	223.0

Mid Channel 9kHz – 30MHz –Perpendicular to Axis


Test mode condition	Bluetooth 3-DH5 Mid Channel (2440 MHz)	
Antenna orientation	Loop Antenna Perpendicular to Axis	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Fariborz Abasi	Date: 2020-09-10
Chamber details	Chamber: SAC 5	

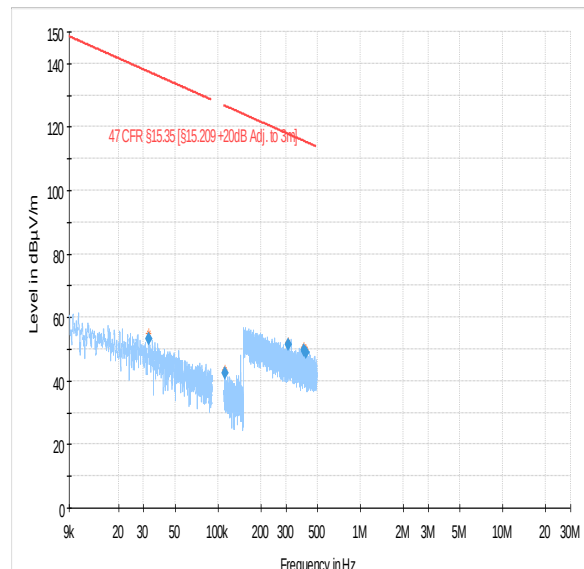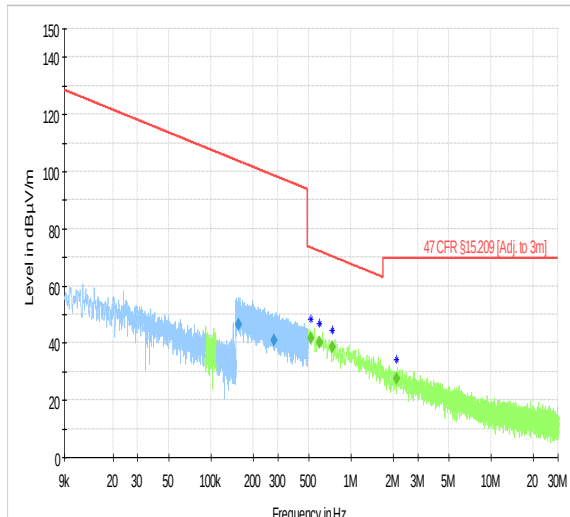


Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.157317	46.51	---	---	103.67	57.16	1000.0	9.000	100.0	H	225.0
0.282643	41.07	---	---	98.58	57.51	1000.0	9.000	100.0	H	216.0
0.519330	---	41.80	---	73.30	31.49	1000.0	9.000	100.0	H	49.0
0.596254	---	40.23	---	72.10	31.87	1000.0	9.000	100.0	H	101.0
0.736758	---	38.51	---	70.26	31.75	1000.0	9.000	100.0	H	315.0
2.110271	---	27.68	---	69.54	41.86	1000.0	9.000	100.0	H	45.0
0.032660	---	---	53.27	137.32	84.06	1000.0	0.200	100.0	H	191.0
0.112017	---	---	42.57	126.62	84.05	1000.0	0.200	100.0	H	135.0
0.312876	---	---	51.53	117.70	66.17	1000.0	9.000	100.0	H	223.0
0.403025	---	---	49.69	115.50	65.81	1000.0	9.000	100.0	H	75.0
0.414743	---	---	49.09	115.25	66.16	1000.0	9.000	100.0	H	223.0

Mid Channel 9kHz – 30MHz –Parallel to Floor

Test mode condition	Bluetooth 3-DH5 Mid Channel (2440 MHz)	
Antenna orientation	Loop Antenna Parallel to Floor	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Joel Efraimsson	Date: 2020-09-20
Chamber details	Chamber: SAC 5	

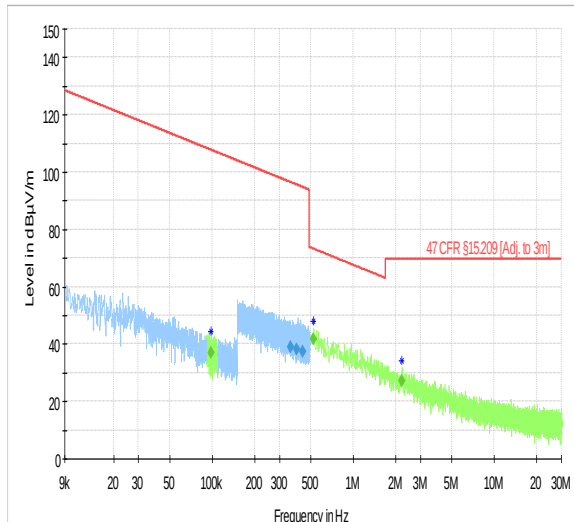

PreviewResult 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 (Adj. to 3m)
 Final_Result QPK
 PreviewResult 1-AVG
 Critical_Freqs AVG
 Final_Result AVG

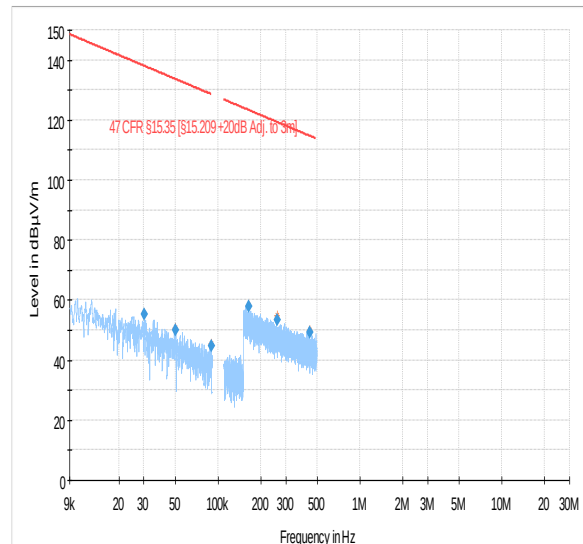


PreviewResult 1-PK+
 47 CFR §15.35 (S15.209+20dB Adj. to 3m)
 MaxPeak-PK+ (Single)
 Critical_Freqs PK+
 Final_Result PK+

Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.098494	---	37.03	---	107.74	70.70	1000.0	0.200	100.0	H	-13.0
0.360813	38.90	---	---	96.46	57.56	1000.0	9.000	100.0	H	315.0
0.398117	38.09	---	---	95.60	57.52	1000.0	9.000	100.0	H	179.0
0.436571	37.33	---	---	94.80	57.47	1000.0	9.000	100.0	H	-45.0
0.520589	---	41.78	---	73.27	31.49	1000.0	9.000	100.0	H	281.0
2.206200	---	27.06	---	69.54	42.48	1000.0	9.000	100.0	H	-41.0
0.030355	---	---	55.21	137.96	82.75	1000.0	0.200	100.0	H	23.0
0.050031	---	---	49.85	133.62	83.77	1000.0	0.200	100.0	H	88.0
0.089534	---	---	44.57	128.56	83.99	1000.0	0.200	100.0	H	-14.0
0.164550	---	---	57.79	123.28	65.48	1000.0	9.000	100.0	H	243.0
0.260282	---	---	53.29	119.30	66.01	1000.0	9.000	100.0	H	135.0
0.443453	---	---	49.24	114.67	65.42	1000.0	9.000	100.0	H	225.0

Mid Channel 30MHz – 1GHz

Test mode condition	Bluetooth 3-DH5 Mid Channel (2440 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	30 MHz – 1 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-17
Chamber details	Chamber: SAC 5	

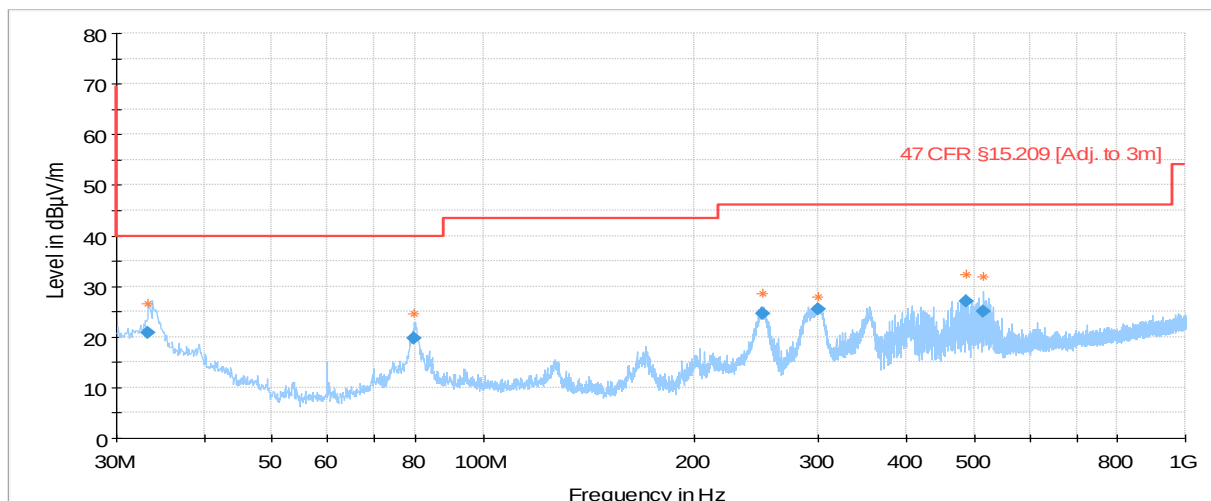


PreviewResult 2-AVG	PreviewResult 1-PK+
* Critical_Freqs AVG	* Critical_Freqs PK+
47 CFR §15.209 [Adj. to 3m]	◆ Final_Result QPK
◆ Final_Result AVG	× MaxPeak-PK+ (Single)
+ QuasiPeak-QPK (Single)	× Average-AVG (Single)

Frequency (MHz)	QuasiPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.316680	20.73	---	40.00	19.27	1000.0	120.000	108.0	V	109.0
79.787520	19.71	---	40.00	20.29	1000.0	120.000	125.0	V	322.0
250.213160	24.50	---	46.02	21.52	1000.0	120.000	108.0	H	292.0
299.718600	25.38	---	46.02	20.64	1000.0	120.000	100.0	V	72.0
486.910200	27.13	---	46.02	18.89	1000.0	120.000	133.0	V	22.0
514.545240	25.10	---	46.02	20.92	1000.0	120.000	233.0	H	72.0

Mid Channel 1GHz – 18GHz

Test mode condition	Bluetooth 3-DH5 Mid Channel (2440 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-15
Chamber details	Chamber: SAC 5	

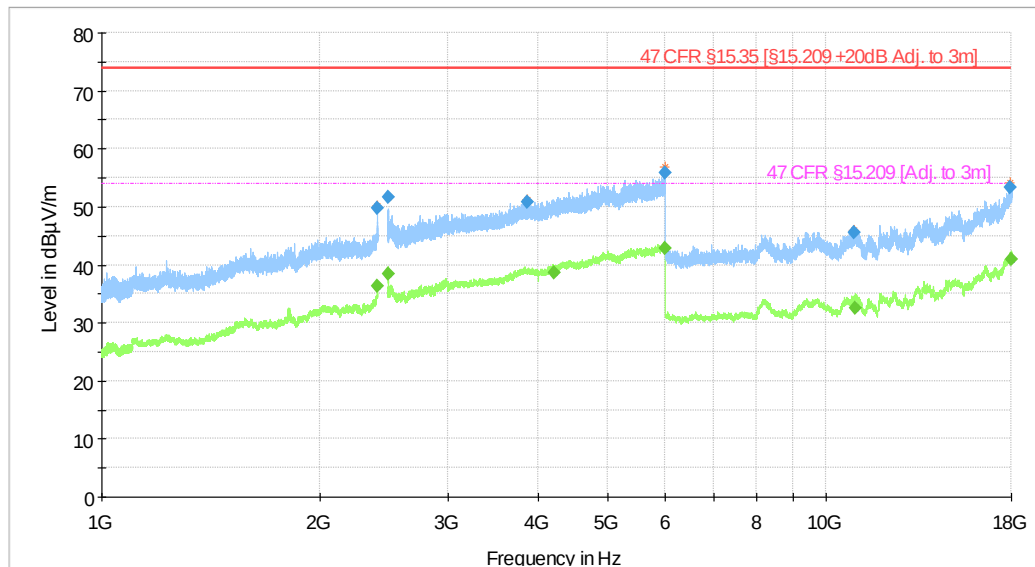


— PreviewResult 2-AVG
— PreviewResult 1-PK+
* Critical_Freqs AVG
* Critical_Freqs PK+
— 47 CFR §15.35 [§15.209 +20dB Adj. to 3m]
— 47 CFR §15.209 [Adj. to 3m]
◆ Final_Result PK+
◆ Final_Result AVG

Frequency (MHz)	MaxPeak (dBm)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2399.963064	---	36.23	53.98	17.75	1000.0	1000.000	112.0	H	112.0
2483.525258	---	38.49	53.98	15.49	1000.0	1000.000	125.0	V	68.0
4204.818000	---	38.69	53.98	15.29	1000.0	1000.000	177.0	H	116.0
5985.162000	55.86	---	73.98	18.12	1000.0	1000.000	210.0	V	290.0
5988.140000	---	42.76	53.98	11.22	1000.0	1000.000	112.0	H	112.0
17991.665000	---	40.84	53.98	13.14	1000.0	1000.000	100.0	V	10.0

Mid Channel 18GHz – 40GHz

Test mode condition	Bluetooth 3-DH5 Mid Channel (2440 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	18 GHz – 40 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-22
Chamber details	Chamber: SAC 5	

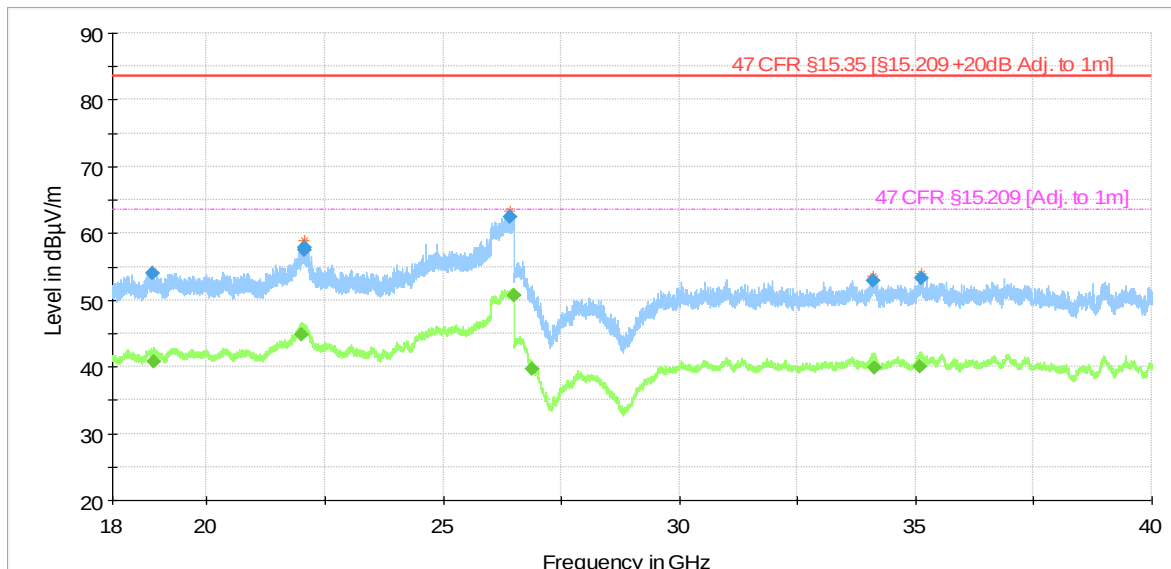


— PreviewResult 2-AVG
— PreviewResult 1-PK+
* Critical_Freqs AVG
* Critical_Freqs PK+
— 47 CFR §15.35 [\$15.209 +20dB Adj. to 1m]
— 47 CFR §15.209 [Adj. to 1m]
♦ Final_Result PK+
♦ Final_Result AVG


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
18840.381000	54.00	---	83.52	29.52	1000.0	1000.000	155.0	V	202.0
18878.111000	---	40.76	63.52	22.76	1000.0	1000.000	155.0	V	262.0
22005.023000	---	44.86	63.52	18.67	1000.0	1000.000	155.0	V	158.0
22049.380000	57.77	---	83.52	25.75	1000.0	1000.000	155.0	H	8.0
22053.611000	57.43	---	83.52	26.09	1000.0	1000.000	155.0	H	-8.0
26409.917000	62.46	---	83.52	21.07	1000.0	1000.000	155.0	V	102.0
26499.821080	---	50.65	63.52	12.87	1000.0	1000.000	155.0	H	322.0
26886.526000	---	39.61	63.52	23.91	1000.0	1000.000	155.0	H	338.0
34091.594000	52.86	---	83.52	30.66	1000.0	1000.000	155.0	V	156.0
34125.553000	---	39.85	63.52	23.67	1000.0	1000.000	155.0	V	232.0
35096.169000	---	40.01	63.52	23.51	1000.0	1000.000	155.0	V	188.0
35132.372000	53.28	---	83.52	30.24	1000.0	1000.000	155.0	H	338.0

High Channel 9kHz – 30MHz –Parallel to Axis

Test mode condition	Bluetooth 3-DH5 High Channel (2480 MHz)	
Antenna orientation	Loop Antenna Parallel to Axis	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Joel Efraimsson	Date: 2020-09-19
Chamber details	Chamber: SAC 5	

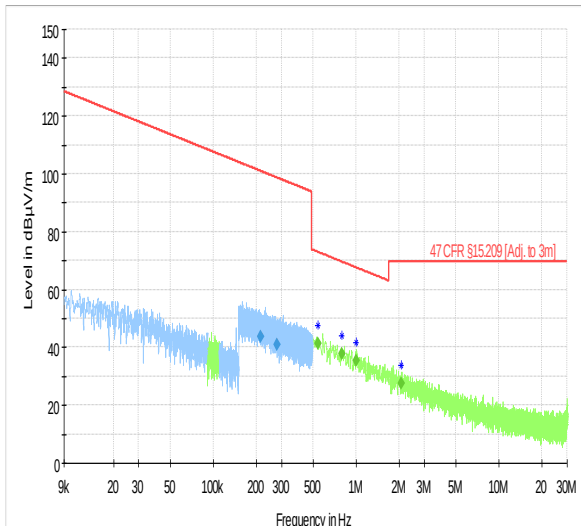

— PreviewResult 2-PK+
+ Critical_Freqs PK+
— 47 CFR §15.209 (Adj. to 3m)
♦ Final_Result QPK
— PreviewResult 1-AVG
+ Critical_Freqs AVG
♦ Final_Result AVG


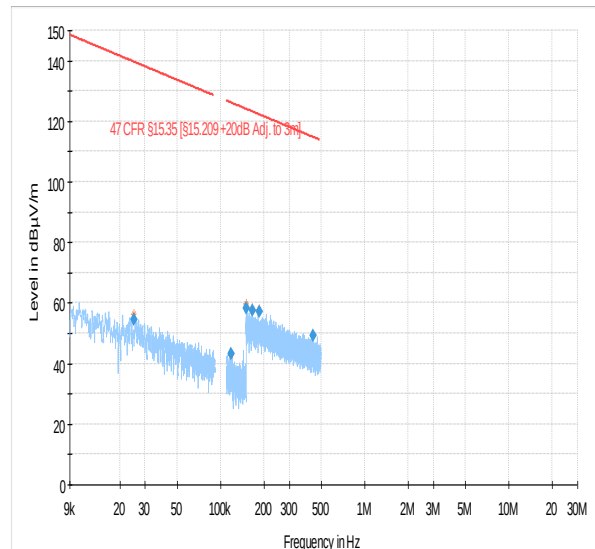


— PreviewResult 1-PK+
— 47 CFR §15.35 (S15.209+20dB Adj. to 3m)
x MaxPeak-PK+ (Single)
+ Critical_Freqs PK+
♦ Final_Result PK+

Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.213188	43.85	---	---	101.03	57.18	1000.0	9.000	100.0	H	217.0
0.279792	41.11	---	---	98.67	57.56	1000.0	9.000	100.0	H	195.0
0.542385	---	41.46	---	72.92	31.46	1000.0	9.000	100.0	H	229.0
0.790351	---	37.70	---	69.65	31.95	1000.0	9.000	100.0	H	101.0
1.004446	---	35.41	---	67.57	32.16	1000.0	9.000	100.0	H	139.0
2.062888	---	27.75	---	69.54	41.79	1000.0	9.000	100.0	H	135.0
0.025030	---	---	54.63	139.64	85.00	1000.0	0.200	100.0	H	202.0
0.118174	---	---	43.18	126.15	82.97	1000.0	0.200	100.0	H	135.0
0.150455	---	---	58.31	124.06	65.75	1000.0	9.000	100.0	H	-45.0
0.167061	---	---	57.48	123.15	65.67	1000.0	9.000	100.0	H	135.0
0.185440	---	---	57.29	122.24	64.95	1000.0	9.000	100.0	H	225.0
0.439766	---	---	49.42	114.74	65.32	1000.0	9.000	100.0	H	100.0

High Channel 9kHz – 30MHz –Perpendicular to Axis


Test mode condition	Bluetooth 3-DH5 High Channel (2480 MHz)	
Antenna orientation	Loop Antenna Perpendicular to Axis	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Fariborz Abasi	Date: 2020-09-10
Chamber details	Chamber: SAC 5	

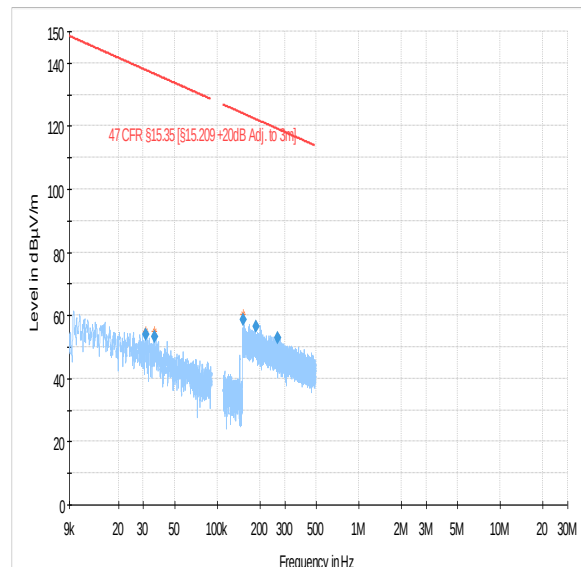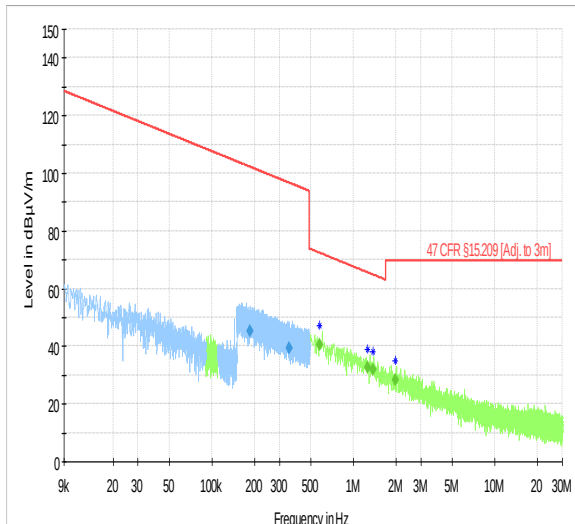


Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.184941	45.11	---	---	102.26	57.15	1000.0	9.000	100.0	H	11.0
0.351662	39.20	---	---	96.68	57.48	1000.0	9.000	100.0	H	45.0
0.578036	---	40.56	---	72.37	31.80	1000.0	9.000	100.0	H	135.0
1.264794	---	32.79	---	65.56	32.78	1000.0	9.000	100.0	H	45.0
1.373618	---	32.03	---	64.85	32.82	1000.0	9.000	100.0	H	271.0
1.987784	---	28.28	---	69.54	41.26	1000.0	9.000	100.0	H	23.0
0.031350	---	---	53.95	137.68	83.73	1000.0	0.200	100.0	H	43.0
0.036033	---	---	53.19	136.47	83.28	1000.0	0.200	100.0	H	243.0
0.151841	---	---	58.55	123.98	65.43	1000.0	9.000	100.0	H	165.0
0.187356	---	---	56.58	122.15	65.57	1000.0	9.000	100.0	H	315.0
0.268436	---	---	52.76	119.03	66.26	1000.0	9.000	100.0	H	10.0

High Channel 9kHz – 30MHz –Parallel to Floor

Test mode condition	Bluetooth 3-DH5 High Channel (2480 MHz)	
Antenna orientation	Loop Antenna Parallel to Floor	
Sweep frequency	9 kHz – 30 MHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Joel Efraimsson	Date: 2020-09-20
Chamber details	Chamber: SAC 5	

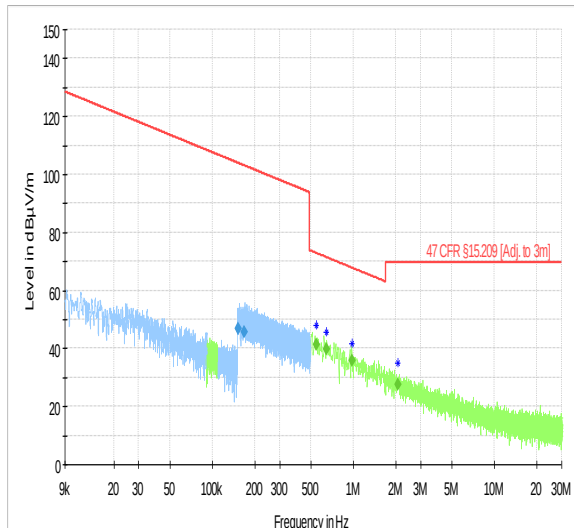

— PreviewResult 2-PK+
+ Critical_Freqs PK+
— 47 CFR §15.209 (Adj. to 3m)
♦ Final_Result QPK

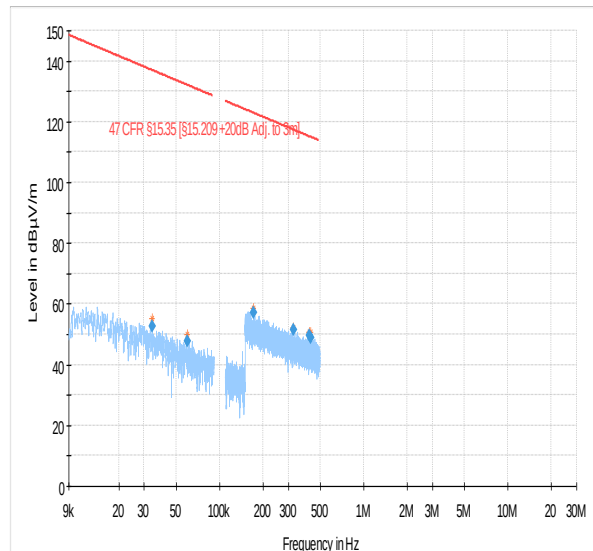


— PreviewResult 1-PK+
— 47 CFR §15.35 (S15.209+20dB Adj. to 3m)
x MaxPeak-PK+ (Single)

Frequency (MHz)	Average (dBµV/m)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.151894	46.76	---	---	103.97	57.21	1000.0	9.000	100.0	H	127.0
0.168422	45.86	---	---	103.08	57.22	1000.0	9.000	100.0	H	179.0
0.544502	---	41.25	---	72.88	31.64	1000.0	9.000	100.0	H	45.0
0.642363	---	39.66	---	71.45	31.79	1000.0	9.000	100.0	H	-41.0
0.982479	---	35.76	---	67.76	31.99	1000.0	9.000	100.0	H	225.0
2.072711	---	27.75	---	69.54	41.79	1000.0	9.000	100.0	H	45.0
0.034110	---	---	52.55	136.95	84.40	1000.0	0.200	100.0	H	293.0
0.060045	---	---	47.73	132.04	84.30	1000.0	0.200	100.0	H	124.0
0.171089	---	---	57.21	122.94	65.73	1000.0	9.000	100.0	H	229.0
0.325216	---	---	51.58	117.36	65.79	1000.0	9.000	100.0	H	243.0
0.417333	---	---	49.49	115.20	65.71	1000.0	9.000	100.0	H	255.0
0.430015	---	---	48.95	114.94	65.99	1000.0	9.000	100.0	H	139.0

High Channel 30MHz – 1GHz

Test mode condition	Bluetooth 3-DH5 High Channel (2480 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	30 MHz – 1 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Sam Ebadeh	Date: 2020-09-17
Chamber details	Chamber: SAC 5	

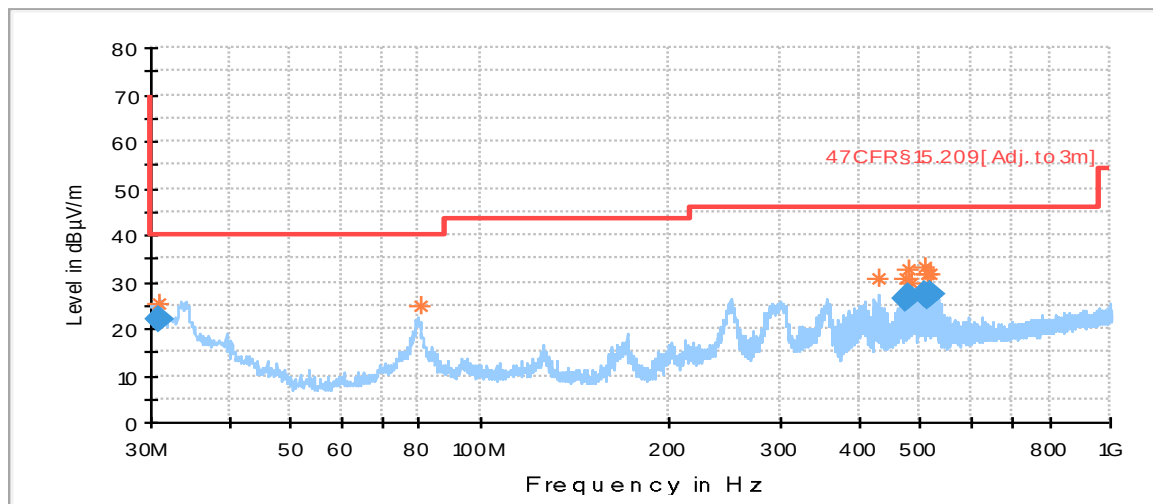


	Preview Result 2-AVG		Preview Result 1-PK+
	Critical_Freqs AVG		Critical_Freqs PK+
	47CFR§15.209[Adj. to 3m]		Final_Result QPK
	Final_Result AVG		

Frequency (MHz)	QuasiPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.316680	20.73	---	40.00	19.27	1000.0	120.000	108.0	V	109.0
79.787520	19.71	---	40.00	20.29	1000.0	120.000	125.0	V	322.0
250.213160	24.50	---	46.02	21.52	1000.0	120.000	108.0	H	292.0
299.718600	25.38	---	46.02	20.64	1000.0	120.000	100.0	V	72.0
486.910200	27.13	---	46.02	18.89	1000.0	120.000	133.0	V	22.0
514.545240	25.10	---	46.02	20.92	1000.0	120.000	233.0	H	72.0

High Channel 1GHz – 18GHz

Test mode condition	Bluetooth 3-DH5 High Channel (2480 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-14
Chamber details	Chamber: SAC 5	

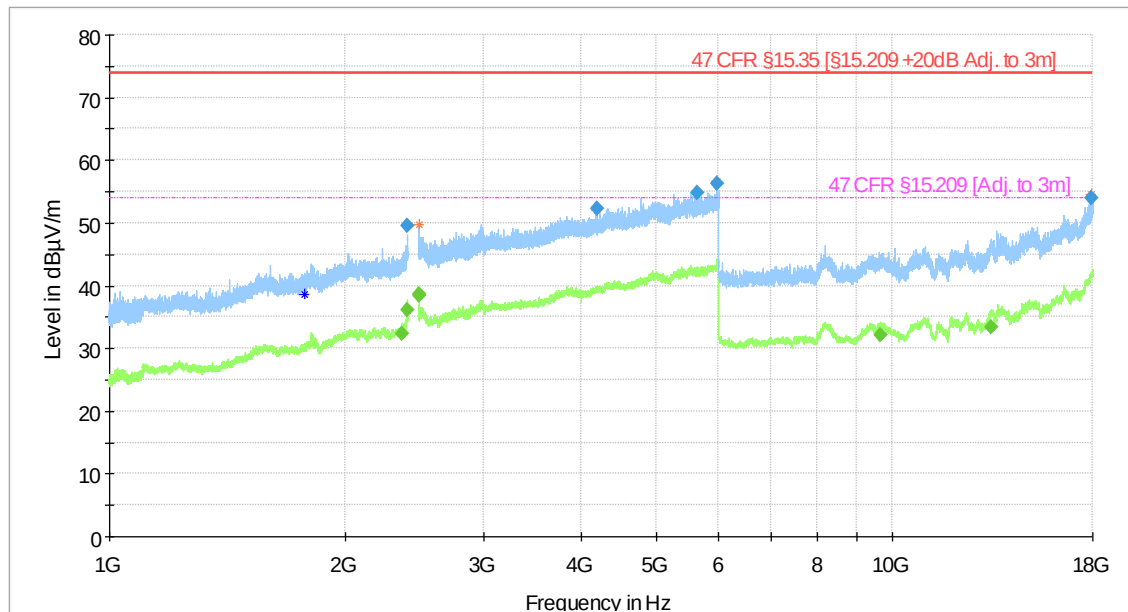


— PreviewResult 2-AVG
* Critical_Freqs AVG
— 47 CFR §15.35 [§15.209 +20dB Adj. to 3m]
◆ Final_Result PK+

— PreviewResult 1-PK+
* Critical_Freqs PK+
— 47 CFR §15.209 [Adj. to 3m]
◆ Final_Result AVG

Frequency (MHz)	MaxPeak (dBm)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2399.934336	---	36.16	53.98	17.82	1000.0	1000.000	175.0	V	162.0
2483.518744	---	38.58	53.98	15.40	1000.0	1000.000	125.0	H	68.0
2483.556500	---	38.42	53.98	15.56	1000.0	1000.000	140.0	V	116.0
5637.912000	54.87	---	73.98	19.10	1000.0	1000.000	170.0	H	338.0
5977.507000	56.29	---	73.98	17.69	1000.0	1000.000	177.0	V	292.0
17932.523000	53.99	---	73.98	19.99	1000.0	1000.000	175.0	V	338.0

High Channel 18GHz – 40GHz

Test mode condition	Bluetooth 3-DH5 High Channel (2480 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	18 GHz – 40 GHz	
Standard	FCC part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020-09-22
Chamber details	Chamber: SAC 5	

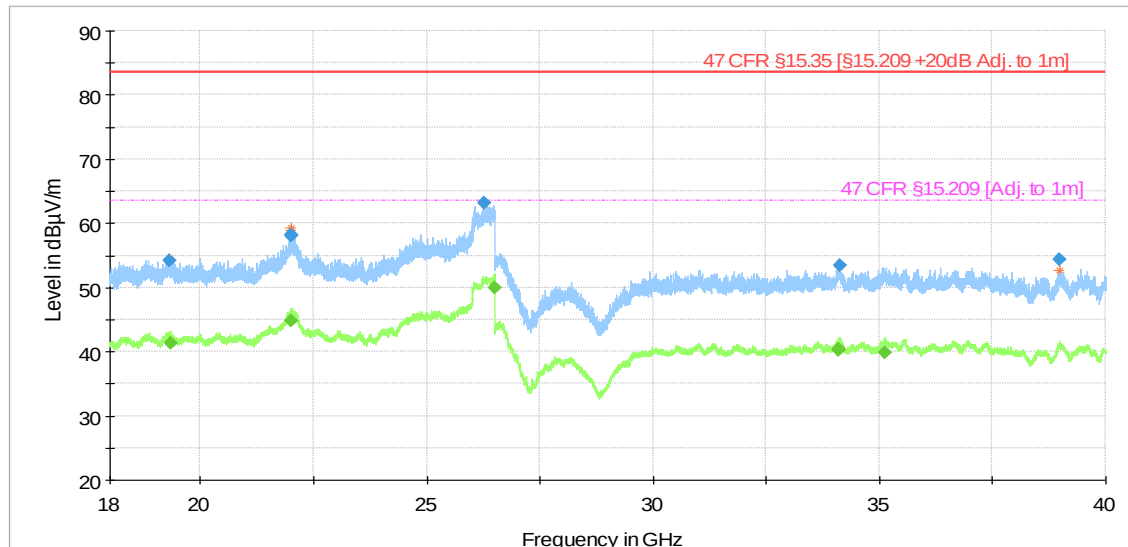

— PreviewResult 2-AVG
— PreviewResult 1-PK+
* Critical_Freqs AVG
* Critical_Freqs PK+
— 47 CFR §15.35 [§15.209 +20dB Adj. to 1m]
— 47 CFR §15.209 [Adj. to 1m]
♦ Final_Result PK+
♦ Final_Result AVG

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
19303.561000	54.19	---	83.52	29.33	1000.0	1000.000	155.0	V	202.0
19338.907000	---	41.29	63.52	22.23	1000.0	1000.000	155.0	V	262.0
22003.931000	57.99	---	83.52	25.54	1000.0	1000.000	155.0	V	202.0
22004.002000	---	44.88	63.52	18.64	1000.0	1000.000	155.0	V	142.0
22007.774000	58.14	---	83.52	25.38	1000.0	1000.000	155.0	V	206.0
26279.334000	63.25	---	83.52	20.27	1000.0	1000.000	155.0	V	142.0
26498.477500	---	49.99	63.52	13.54	1000.0	1000.000	155.0	V	68.0
34100.890000	---	40.38	63.52	23.14	1000.0	1000.000	155.0	V	22.0
34107.879000	---	40.18	63.52	23.34	1000.0	1000.000	155.0	V	22.0
34126.928000	53.39	---	83.52	30.13	1000.0	1000.000	155.0	H	86.0
35109.185000	---	39.88	63.52	23.64	1000.0	1000.000	155.0	V	27.0
38976.228000	54.34	---	83.52	29.18	1000.0	1000.000	155.0	H	146.0


4.3 Test Results – Out of Band Emissions

4.3.1 Out of Band Emissions – Test Summary

Test Specification		RSS-247 5.5			
Test Engineer & Date		Niall Forrester		2020.11.10	
EUT and Ancillary Equipment IDs		A002893981-002			
EUT Operation Mode(s)		Test Mode			
EUT Wireless Configuration(s)		Bluetooth BDR DER (See below for details)			
EUT Hardware Configuration(s)		Power from lab power supply via modified USB cable			
Overall Result		PASS			

Test Parameter	Wireless Configuration	Tx Pwr (dBm)	Measured Lvl (dBm)	Limit (dBm)	Result
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR DH5 (GFSK Hopping)	4.65	-50.61	-15.35	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 2-DH5 ($\pi/4$ -DQPSK Hopping)	3.00	-50.80	-17.00	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 3-DH5 (8-DPSK Hopping)	3.81	-50.34	-16.19	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR DH5 Low Ch. (GFSK 2402 MHz)	3.33	-49.42	-16.67	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 2-DH5 Low Ch. ($\pi/4$ -DQPSK 2402 MHz)	2.97	-50.07	-17.03	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	3.22	-50.26	-16.78	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR DH5 Low Ch. (GFSK 2441 MHz)	3.70	-50.19	-16.30	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 2-DH5 Mid Ch. ($\pi/4$ -DQPSK 2441 MHz)	2.10	-50.01	-17.90	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 3-DH5 Mid Ch. (8-DPSK 2441 MHz)	2.51	-50.57	-17.49	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR DH5 High Ch. (GFSK 2480 MHz)	1.94	-49.55	-18.06	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 2-DH5 High Ch. ($\pi/4$ -DQPSK 2480 MHz)	1.46	-50.29	-18.54	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	1.68	-50.35	-18.32	PASS

4.3.2 Out of Band Emissions – Test Details (Worst Case Plot)

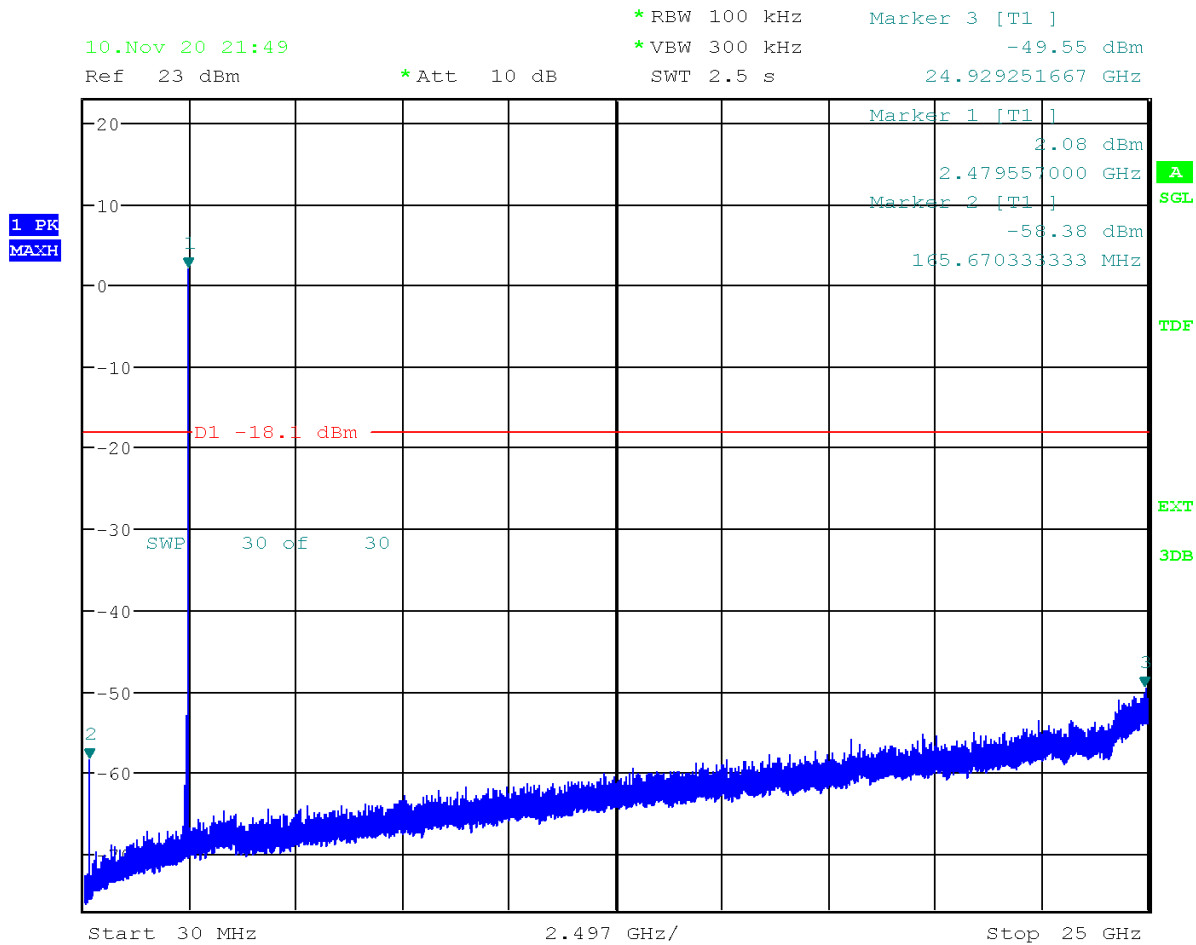

Date: 10.NOV.2020 21:49:50


4.4 Test Results – Band Edge Compliance (Authorized Band)

4.4.1 Band Edge Compliance (Authorized Band) – Test Summary

Test Specification		RSS-247 5.5		
Test Engineer & Date		Niall Forrester	2020.11.10	
EUT and Ancillary Equipment IDs		A002893981-002		
EUT Operation Mode(s)		Test Mode		
EUT Wireless Configuration(s)		Bluetooth BDR DER (See below for details)		
EUT Hardware Configuration(s)		Power from lab power supply via modified USB cable		
Overall Result		PASS		

Test Parameter	Wireless Configuration	Measured Level (dBm)	Limit (dBm)	Result
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth BDR EDR DH5 (GFSK Hopping)	-47.09	-17.23	PASS
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth BDR EDR 2-DH5 ($\pi/4$ -DQPSK Hopping)	-49.76	-17.59	PASS
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth BDR EDR 3-DH5 (8-DPSK Hopping)	-48.69	-17.70	PASS
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth BDR EDR DH5 Low Ch. (GFSK 2402 MHz)	-52.39	-16.79	PASS
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth BDR EDR 2-DH5 Low Ch. ($\pi/4$ -DQPSK 2402 MHz)	-50.23	-17.05	PASS
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	-50.81	-16.89	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth BDR EDR DH5 (GFSK Hopping)	-51.32	-18.80	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth BDR EDR 2-DH5 ($\pi/4$ -DQPSK Hopping)	-51.33	-19.02	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth BDR EDR 3-DH5 (8-DPSK Hopping)	-52.34	-19.01	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth BDR EDR DH5 High Ch. (GFSK 2480 MHz)	-52.25	-18.19	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth BDR EDR 2-DH5 High Ch. ($\pi/4$ -DQPSK 2480 MHz)	-53.24	-18.38	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	-52.02	-18.52	PASS

4.4.2 Band Edge Compliance (Authorized Band) – Test Details (Worst Case Plot)

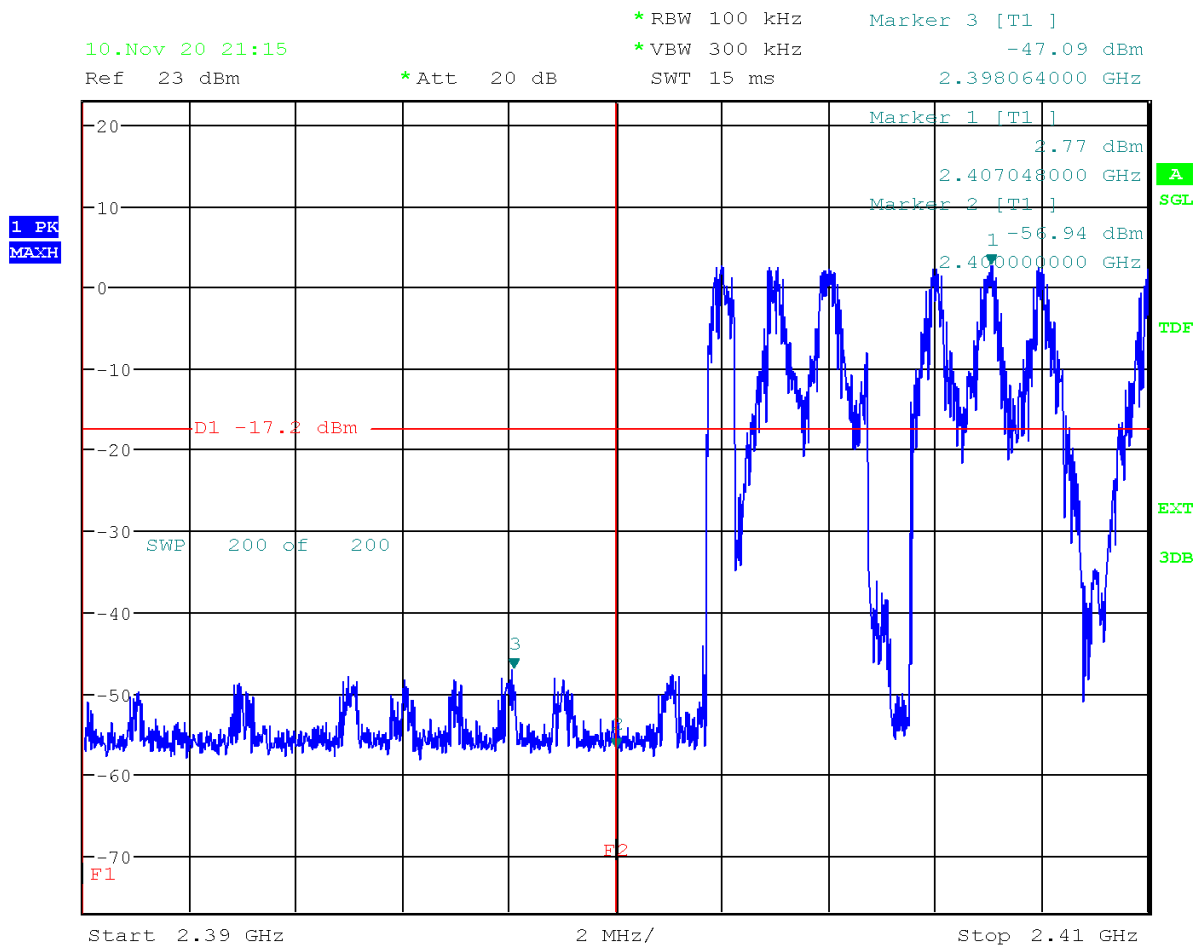

Date: 10.NOV.2020 21:15:59

4.5 Test Results – Band Edge Compliance (Restricted Band)

4.5.1 Band Edge Compliance (Restricted Band) – Test Summary


Test Specification	RSS-247 5.5 RSS-GEN 8.10	
Test Engineer & Date	Niall Forrester	2020.09.14
EUT and Ancillary Equipment IDs	A002893981-001	A002893981-008 A002893981-014 A002893981-016
EUT Operation Mode(s)	Continuous Transmit	
EUT Wireless Configuration(s)	Bluetooth BDR EDR 3-DH5 (8-DPSK Low and High channels)	
EUT Hardware Configuration(s)	Power from USB Charger connected to 12V DC	
Overall Result	PASS	
Test Parameter	Wireless Configuration	Result*
Emissions at Band Edge (Rest. Band – Low Edge)	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	PASS
Emissions at Band Edge (Rest. Band – High Edge)	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	PASS

* For detailed measurements, see tables and graphs in sections below

4.5.2 Band Edge Compliance (Restricted Band) – Test Details

Restricted Band – Low Edge

Test mode condition	Bluetooth BDR EDR 3-DH5 Low Channel (2402 MHz)	
Antenna orientation	Horizontal and vertical	
Sweep frequency	1 GHz – 18 GHz Lower Band Edge	
Standard	47 CFR Part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020.09.14
Chamber details	Chamber: SAC 5	

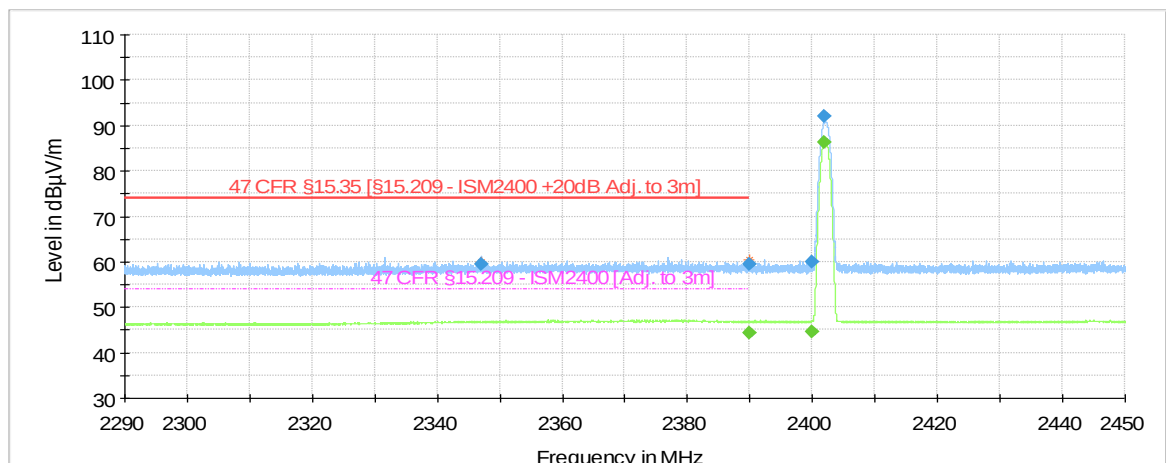


- PreviewResult 2-AVG
- PreviewResult 1-PK+
- Critical_Freqs AVG
- Critical_Freqs PK+
- 47 CFR §15.35 [§15.209 - ISM2400 +20dB Adj. to 3m]
- 47 CFR §15.209 - ISM2400 [Adj. to 3m]
- Final_Result PK+
- Final_Result AVG

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2347.120000	59.52	---	73.98	14.45	1000.0	1000.000	101.0	V	264.0
2390.000000	---	44.45	53.98	9.53	1000.0	1000.000	159.0	V	31.0
2390.000000	59.38	---	73.98	14.60	1000.0	1000.000	181.0	V	178.0
2400.000000	---	44.57	---	---	1000.0	1000.000	145.0	V	240.0
2400.000000	59.86	---	---	---	1000.0	1000.000	182.0	V	0.0
2402.000000	---	86.33	---	---	1000.0	1000.000	100.0	V	291.0
2402.000000	92.06	---	---	---	1000.0	1000.000	101.0	V	301.0

Restricted Band – High Edge

Test mode condition	Bluetooth BDR EDR 3-DH5 High Channel (2480 MHz)	
Antenna orientation	Horizontal and vertical	
Sweep frequency	1 GHz – 18 GHz Upper Band Edge	
Standard	47 CFR Part 15 subpart C	
EUT	A002893981-001	
Ancillary Equipment	A002893981-014, A002893981-008, A002893981-016 12VDC Power Supply	
Test Engineer	Niall Forrester	Date: 2020.09.14
Chamber details	Chamber: SAC 5	

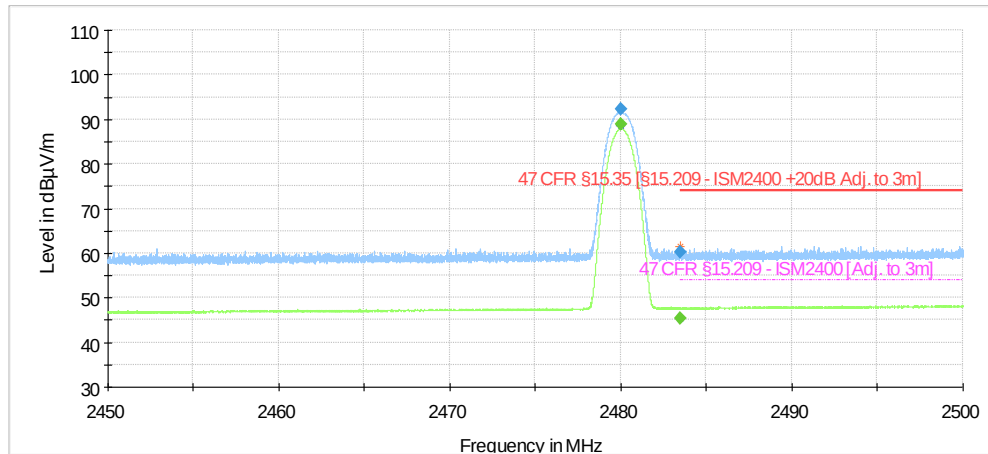

- PreviewResult 2-AVG
- PreviewResult 1-PK+
- Critical_Freqs AVG
- Critical_Freqs PK+
- 47 CFR §15.35 [§15.209 - ISM2400 +20dB Adj. to 3m]
- 47 CFR §15.209 - ISM2400 [Adj. to 3m]
- Final_Result PK+
- Final_Result AVG

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2480.000000	---	88.76	---	---	1000.0	1000.000	100.0	V	290.0
2480.005000	92.29	---	---	---	1000.0	1000.000	100.0	V	290.0
2483.500000	---	45.27	53.98	8.71	1000.0	1000.000	101.0	V	277.0
2483.500000	60.36	---	73.98	13.62	1000.0	1000.000	122.0	V	204.0


4.6 Test Results – 99% Emission Bandwidth

4.6.1 99% Bandwidth – Test Summary

Test Specification		RSS-247 5.1 (a) RSS-GEN 6.7		
Test Engineer & Date		Niall Forrester	2020.11.10	
EUT and Ancillary Equipment IDs		A002893981-002		
EUT Operation Mode(s)		Test Mode		
EUT Wireless Configuration(s)		Bluetooth BDR DER (See below for details)		
EUT Hardware Configuration(s)		Power from lab power supply via modified USB cable		
Overall Result		PASS		

Test Parameter	Wireless Configuration	Bandwidth (kHz)	Limit Max (kHz)	Result
99% Bandwidth	Bluetooth BDR EDR DH5 Low Ch. (GFSK 2402 MHz)	904.80	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR 2-DH5 Low Ch. ($\pi/4$ -DQPSK 2402 MHz)	1216.80	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	1219.20	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR DH5 Mid Ch. (GFSK 2441 MHz)	892.80	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR 2-DH5 Mid Ch. ($\pi/4$ -DQPSK 2441 MHz)	1214.40	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR 3-DH5 Mid Ch. (8-DPSK 2441 MHz)	1327.20	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR DH5 High Ch. (GFSK 2480 MHz)	890.40	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR 2-DH5 High Ch. ($\pi/4$ -DQPSK 2480 MHz)	1212.00	2000.0	PASS
99% Bandwidth	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	1341.60	2000.0	PASS

4.6.2 99% Bandwidth – Test Details (Example Plot)

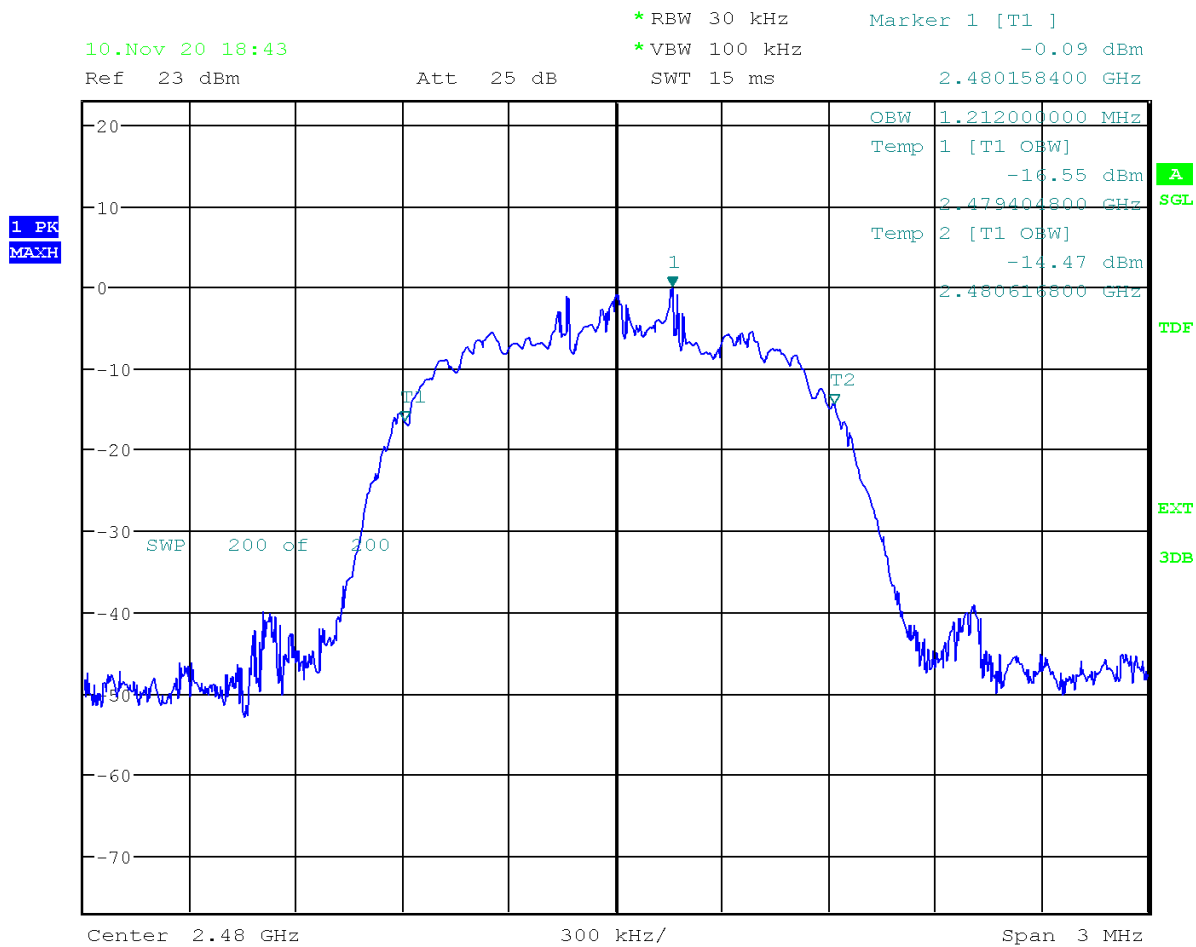

Date: 10.NOV.2020 18:43:05


4.7 Test Results – Carrier (Hopping Channel) Separation

4.7.1 Carrier (Hopping Channel) Separation – Test Summary

Test Specification		RSS-247 5.1 (b)		
Test Engineer & Date		Niall Forrester	2020.11.10	
EUT and Ancillary Equipment IDs		A002893981-002		
EUT Operation Mode(s)		Test Mode		
EUT Wireless Configuration(s)		Bluetooth BDR DER (See below for details)		
EUT Hardware Configuration(s)		Power from lab power supply via modified USB cable		
Overall Result		PASS		

Test Parameter	Wireless Configuration	Separation (kHz)	Limit Min (kHz)	Result
Carrier Frequency Separation 2401-2404MHz	Bluetooth BDR EDR DH1 (GFSK Hopping)	1082.40	544.00	PASS
Carrier Frequency Separation 2401-2404MHz	Bluetooth BDR EDR 2-DH1 ($\pi/4$ -DQPSK Hopping)	979.20	846.60	PASS
Carrier Frequency Separation 2401-2404MHz	Bluetooth BDR EDR 3-DH1 (8-DPSK Hopping)	931.20	875.20	PASS
Carrier Frequency Separation 2440-2443MHz	Bluetooth BDR EDR DH1 (GFSK Hopping)	962.40	537.60	PASS
Carrier Frequency Separation 2440-2443MHz	Bluetooth BDR EDR 2-DH1 ($\pi/4$ -DQPSK Hopping)	1012.80	864.00	PASS
Carrier Frequency Separation 2440-2443MHz	Bluetooth BDR EDR 3-DH1 (8-DPSK Hopping)	998.40	870.40	PASS

4.7.2 Carrier (Hopping Channel) Separation – Test Details (Worst Case Plot)

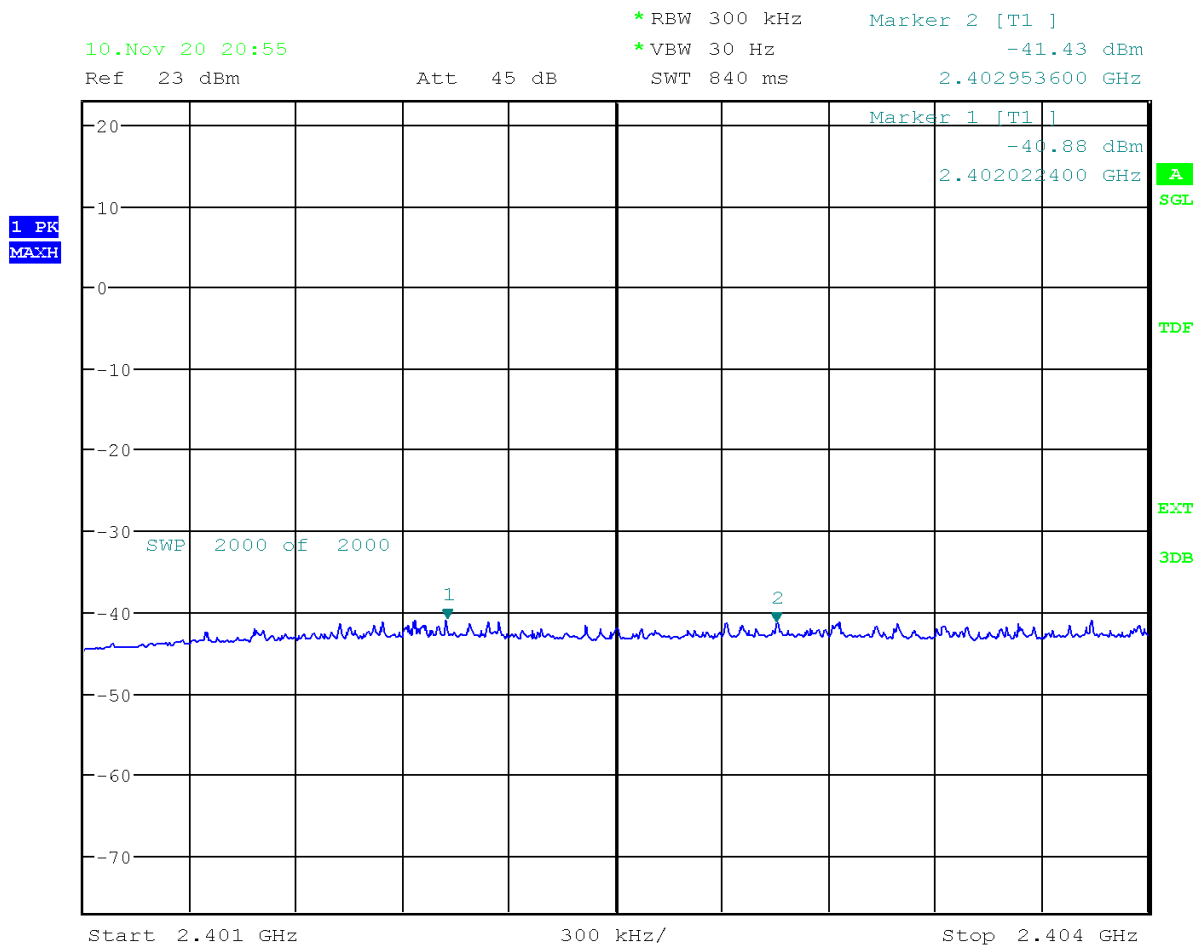


Date: 10.NOV.2020 20:55:02

4.8 Test Results – Number of Hopping Channels

4.8.1 Number of Hopping Channels – Test Summary

Test Specification		RSS-247 5.1 (d)		
Test Engineer & Date		Niall Forrester	2020.11.10	
EUT and Ancillary Equipment IDs		A002893981-002		
EUT Operation Mode(s)		Test Mode		
EUT Wireless Configuration(s)		Bluetooth BDR DER (See below for details)		
EUT Hardware Configuration(s)		Power from lab power supply via modified USB cable		
Overall Result		PASS		
Test Parameter	Wireless Configuration	Measured Number	Limit (Min)	Result
Number of Hopping Channels	Bluetooth BDR EDR DH1 (GFSK Hopping)	79	15	PASS

4.8.2 Number of Hopping Channels – Test Details

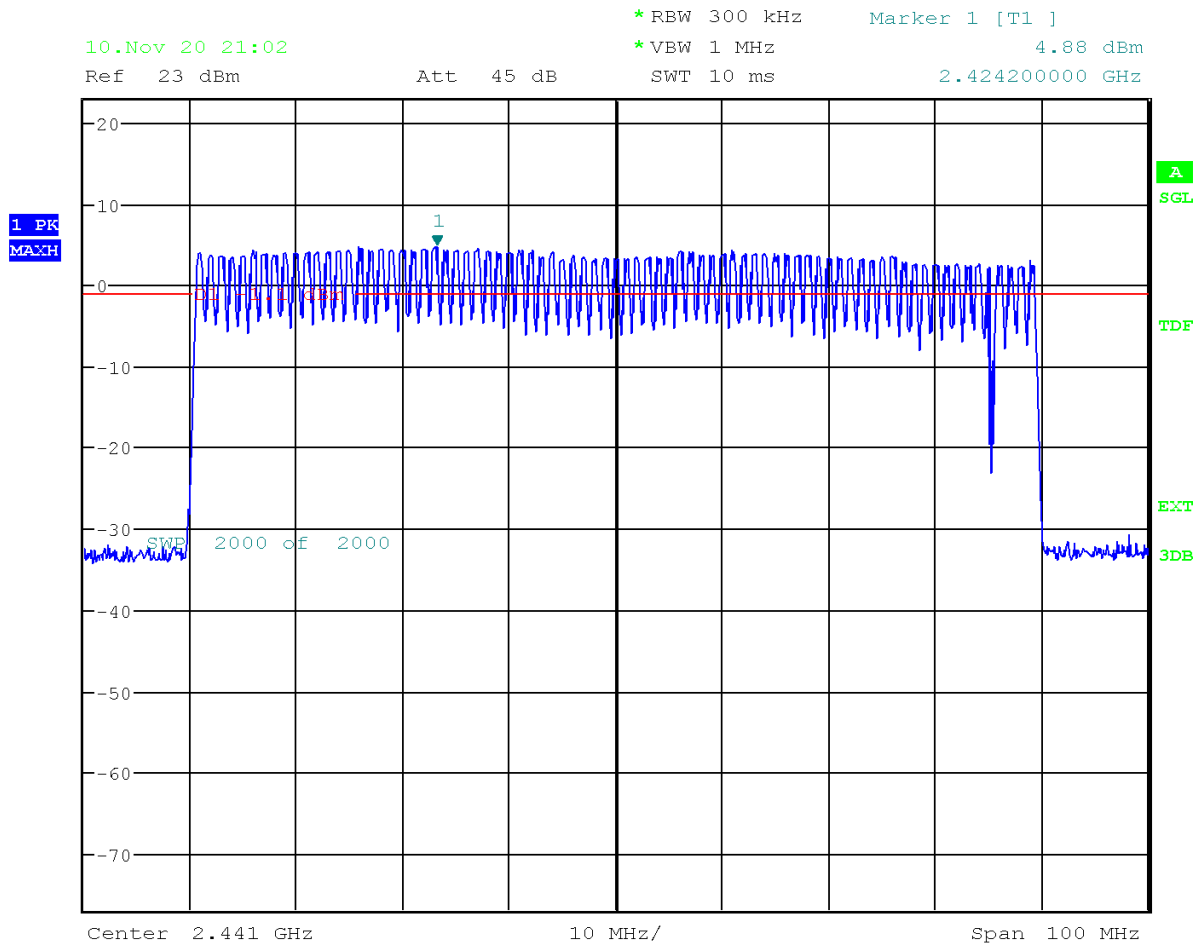

Date: 10.NOV.2020 21:02:25


4.9 Test Results – Time of Occupancy (Dwell Time)

4.9.1 Time of Occupancy (Dwell Time) – Test Summary


Test Specification		RSS-247 5.1 (d)		
Test Engineer & Date		Niall Forrester	2020.11.10	
EUT and Ancillary Equipment IDs		A002893981-002		
EUT Operation Mode(s)		Test Mode		
EUT Wireless Configuration(s)		Bluetooth BDR DER (See below for details)		
EUT Hardware Configuration(s)		Power from lab power supply via modified USB cable		
Overall Result		PASS		

Test Parameter	Wireless Configuration	Measured Time (ms)	Limit (ms)	Result
Dwell Time	Bluetooth BDR EDR DH1 (GFSK Hopping)	132.693	400	PASS
Dwell Time	Bluetooth BDR EDR 2-DH1 ($\pi/4$ -DQPSK Hopping)	139.012	400	PASS
Dwell Time	Bluetooth BDR EDR 3-DH1 (8-DPSK Hopping)	132.693	400	PASS
Dwell Time	Bluetooth BDR EDR DH3 (GFSK Hopping)	195.881	400	PASS
Dwell Time	Bluetooth BDR EDR 2-DH3 ($\pi/4$ -DQPSK Hopping)	195.881	400	PASS
Dwell Time	Bluetooth BDR EDR 3-DH3 (8-DPSK Hopping)	202.200	400	PASS
Dwell Time	Bluetooth BDR EDR DH5 (GFSK Hopping)	176.925	400	PASS
Dwell Time	Bluetooth BDR EDR 2-DH5 ($\pi/4$ -DQPSK Hopping)	164.287	400	PASS
Dwell Time	Bluetooth BDR EDR 3-DH5 (8-DPSK Hopping)	151.650	400	PASS

4.9.2 Time of Occupancy (Dwell Time) – Test Details (Worst Case Plots)

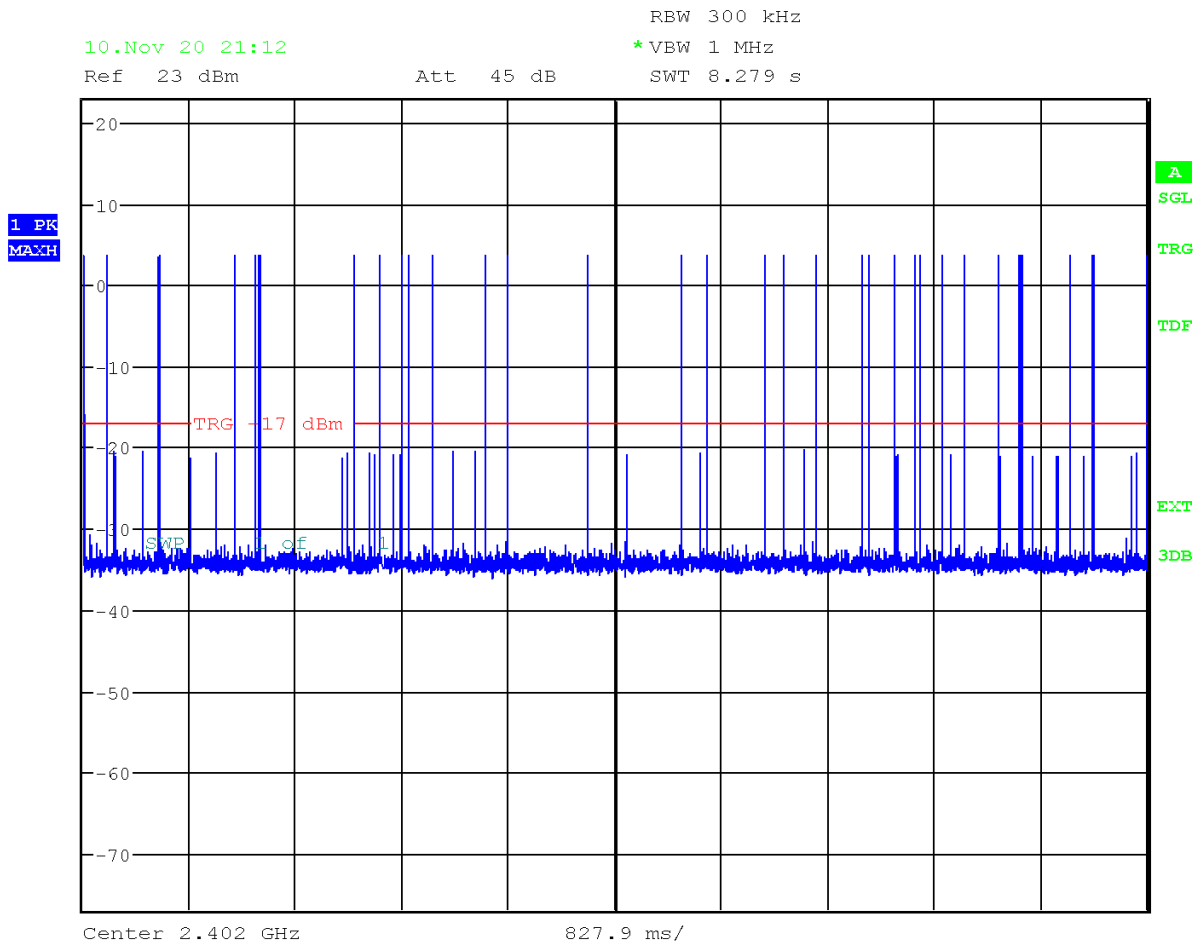

Date: 10.NOV.2020 21:12:44

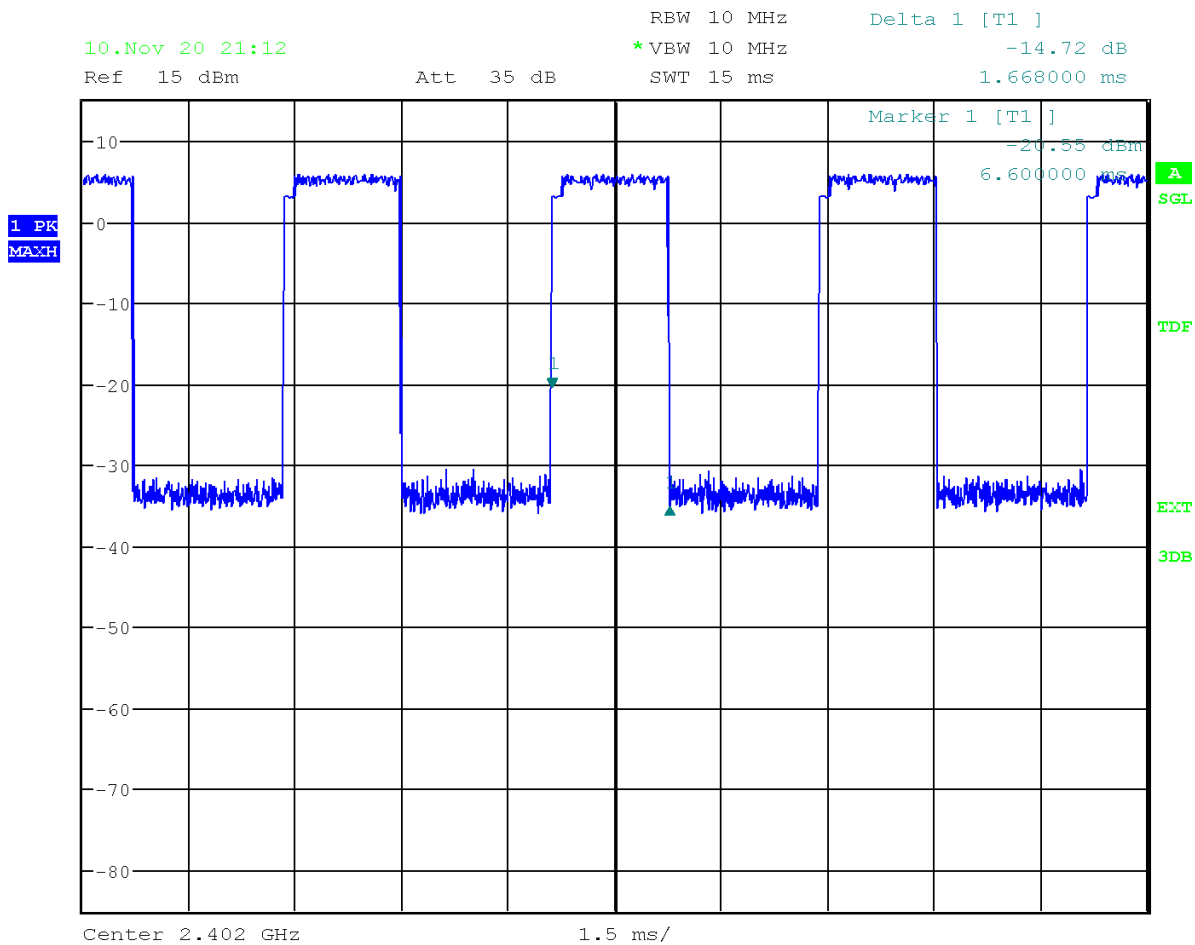

Date: 10.NOV.2020 21:12:22

4.10 Test Results – 6dB Bandwidth

4.10.1 6dB Bandwidth – Test Summary


Requirement is not applicable as the device supports frequency hopping

4.11 Test Results – Peak Conducted Output Power

4.11.1 Peak Conducted Output Power – Test Summary

Test Specification		RSS-247 5.4				
Test Engineer & Date		Niall Forrester		2020.11.10 – 2020.11.11		
EUT and Ancillary Equipment IDs		A002893981-002				
EUT Operation Mode(s)		Test Mode				
EUT Wireless Configuration(s)		Bluetooth BDR DER (See below for details)				
EUT Hardware Configuration(s)		Power from lab power supply via modified USB cable				
Overall Result		PASS				
Test Parameter	Wireless Configuration	Measured Level (dBm)			Limit (dBm)	Result
		Low 4.75V	Nom 5.00V	High 5.25V		
Peak Conducted Output Power	Bluetooth BDR EDR DH5 Low Ch. (GFSK 2402 MHz)	3.75	3.68	3.78	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR 2-DH5 Low Ch. ($\pi/4$ -DQPSK 2402 MHz)	5.89	5.80	5.89	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR 3-DH5 Low Ch. (8-DPSK 2402 MHz)	6.38	6.24	6.35	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR DH5 Low Ch. (GFSK 2441 MHz)	3.47	3.43	3.49	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR 2-DH5 Mid Ch. ($\pi/4$ -DQPSK 2441 MHz)	5.45	5.32	5.35	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR 3-DH5 Mid Ch. (8-DPSK 2441 MHz)	5.92	5.78	5.91	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR DH5 High Ch. (GFSK 2480 MHz)	2.46	2.28	2.42	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR 2-DH5 High Ch. ($\pi/4$ -DQPSK 2480 MHz)	4.40	4.31	4.43	30	PASS
Peak Conducted Output Power	Bluetooth BDR EDR 3-DH5 High Ch. (8-DPSK 2480 MHz)	4.89	4.79	4.85	30	PASS

4.11.2 Peak Conducted Output Power – Test Details (Worst Case Plot)

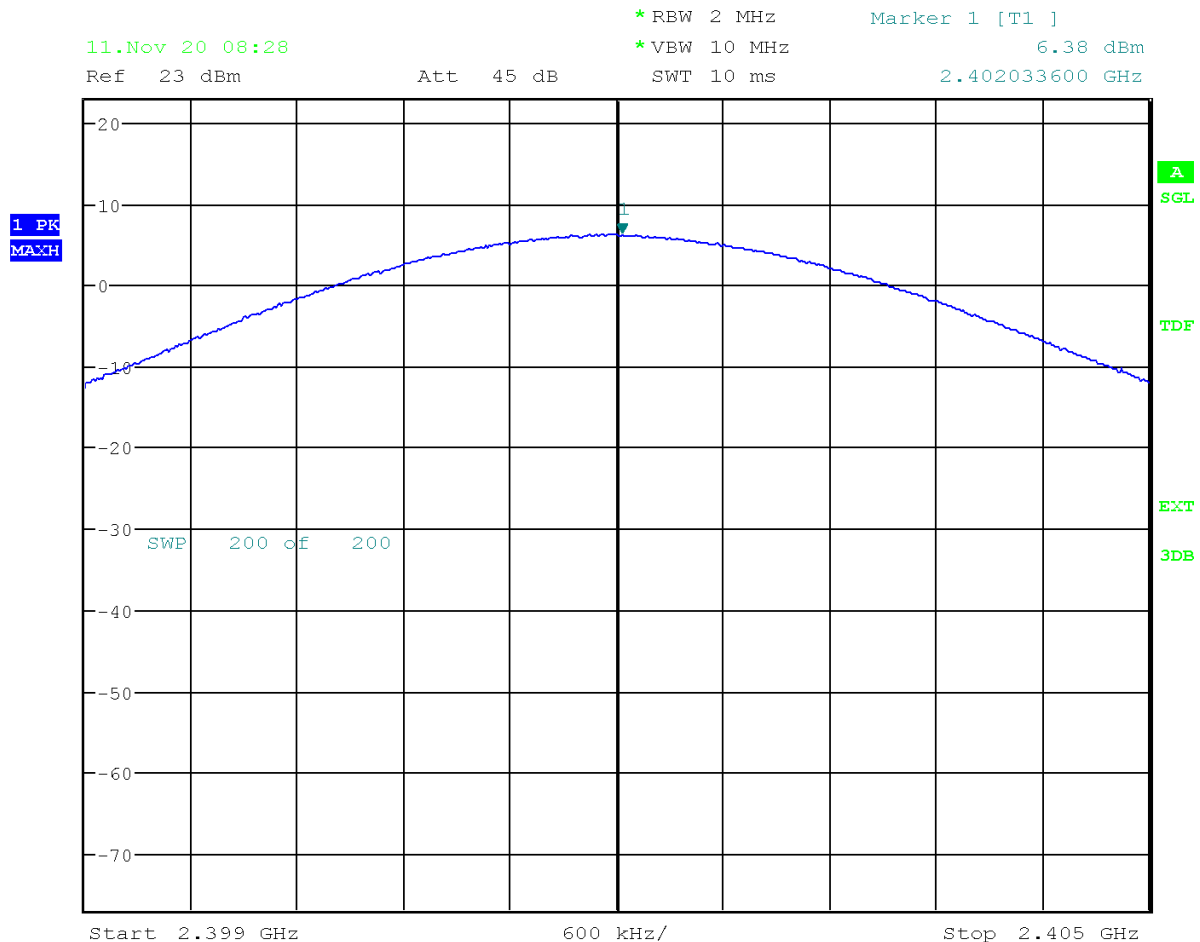

Date: 11.NOV.2020 08:28:37

4.12 Test Results – Power Spectral Density

4.12.1 Power Spectral Density – Test Summary

Requirement is not applicable as the device supports frequency hopping

4.13 Transmitter Frequency Stability

4.13.1 Transmitter Frequency Stability – Test Summary

Testing not required for Bluetooth devices

5. TEST EQUIPMENT STATUS

5.1 List of Hardware with Calibration Dates

5.1.1 Hardware List – CTE System

Type	Manufacturer	Model	Serial Number / ID	Calibration Date	Calibration Due
Comprehensive Testing Environment	TÜV Rheinland LGA Products	HWE 6000	00139	N/A	N/A
Bluetooth Signaling Unit	Rohde & Schwarz	CMW500	163750 2711468	16.07.2020	16.07.2021
Spectrum Analyzer	Rohde & Schwarz	FSU26	100308 2704108	14.07.2020	14.07.2021
Vector Signal Generator	Rohde & Schwarz	SMU200A	101584 2704111	04.08.2020	04.08.2021
Power Supply	Keithley	2303	1198722 2717714	24.07.2020	24.07.2021
Multimeter	Keithley	2700	1035251 2704115	09.07.2020	09.07.2021
Average Power Sensor	Rohde & Schwarz	NRP-Z31	102145 2704104	17.07.2020	17.07.2021
Temperature Chamber	Vötsch	VT4002	58566081940010 2717693	N/A	N/A
Temp. & Humidity Logger	Lufft	Opus 20	113.0118.0802.033 2771025	31.07.2020	31.07.2022

5.1.2 Hardware List – SAC5 System

Type	Manufacturer	Model	Serial Number / ID	Calibration Date	Calibration Due
EMI Test Receiver	Rohde & Schwarz	ESW44	101760 2881044	17.07.2020	17.07.2021
Ultra Broadband Antenna	Rohde & Schwarz	HL562E	100988 2823181	23.07.2019	23.07.2021
Double Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF907	102678 2823164	15.07.2019	15.07.2021
Loop Antenna	EMCO	6502	9206-2775 2759035	16.07.2020	16.07.2021
Horn Antenna – 40GHz	ETS Lindgren	UG-600A/U	20623 2814834	27.07.2020	27.07.2022
Horn Antenna	ETS Lindgren	UG-596A/U	20898 2814839	27.07.2020	27.07.2022
Control Device	Maturo	NCD	NCD/393/2372.01	N/A	N/A
Open Switch & Control Unit	Rohde & Schwarz	OSP150	100081 2884198	04.08.2020	04.08.2021
Open Switch & Control Unit	Rohde & Schwarz	OSP120	100084 2761253	04.08.2020	04.08.2021
Shielded Filter Unit	Rohde & Schwarz	OSP-F Extension	101333 2761265	04.08.2020	04.08.2021
Shielded Filter Unit	Rohde & Schwarz	OSP-F Extension	101335 2761266	04.08.2020	04.08.2021
Shielded Filter Unit	Rohde & Schwarz	OSP-F Base Unit	101330 2761262	04.08.2020	04.08.2021
Temp. & Humidity Logger	Lufft	Opus 20	126.0118.0802.033 2771042	31.07.2020	31.07.2022

5.2 Software / Firmware Versions

Equipment	Software / Firmware Name	Version
Comprehensive Testing Environment (CTE)	CTE – TMF	V47.5
SAC 5	EMC 32	V10.60.10

6. MEASUREMENT UNCERTAINTY

6.1 Measurement Uncertainty for CTE

Parameter	Uncertainty (Coverage Factor k=2)
Maximum Output Power (15.247b)	±0.51 dB
6dB / 20dB Channel Bandwidth & 99% Occupied bandwidth (15.247a)	<5%
Carrier Frequency Separation (15.247a)	N/A
Number of Hopping Channels (15.247a)	N/A
Time of Occupancy – Dwell Time (15.247a)	N/A
Band Edge Compliance of Conducted Emissions (15.247a)	±1.04 dB
Conducted Spurious Emissions (15.247d)	±2.98 dB
Power Spectral Density (15.247e)	±0.51 dB

6.2 Measurement Uncertainty for Conducted Emissions

Parameter	Uncertainty (Coverage Factor k=2)
Conducted emissions with LISN 150KHz to 30 MHz	2.98 dB

6.3 Measurement Uncertainty for SAC 5 (Radiated Emissions & Band Edge)

Parameter	Uncertainty (Coverage Factor k=2)
Field Strength 10 Hz -9 kHz	3.38 dB
Field Strength 9 kHz -30 MHz	3.38 dB
Field Strength 30 MHz -1000 MHz	3.38 dB
Field Strength 1 GHz -18 GHz	4.88 dB
Field Strength 18 GHz - 40 GHz	5.14 dB

7. PHOTOGRAPHS

See appendix 1