

FCC REPORT

Applicant: Eaglerise Electric & Electronic(China) CO.,Ltd.

Address of Applicant: A3 Guicheng Science & Technology Park, Jianping Road, Nanhai, Foshan, China

Manufacturer: Eaglerise Electric & Electronic(China) CO.,Ltd.

Address of Manufacturer: A3 Guicheng Science & Technology Park, Jianping Road, Nanhai, Foshan, China

Equipment Under Test (EUT)

Product Name: LED mirror luminaire

Model No.: See section 5.1

FCC ID: 2AP4Y-MIR3009A

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: May 25, 2018

Date of Test: May 26, 2018-June 08, 2018

Date of report issued: June 11, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	June 11, 2018	Original

Prepared By:




Date:

June 11, 2018

Project Engineer

Check By:



Date:

June 11, 2018

Reviewer

3 Contents

Page

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
4.1	MEASUREMENT UNCERTAINTY	4
5	GENERAL INFORMATION	5
5.1	GENERAL DESCRIPTION OF EUT	5
5.2	TEST MODE	8
5.3	DESCRIPTION OF SUPPORT UNITS	8
5.4	TEST FACILITY	8
5.5	TEST LOCATION	8
6	TEST INSTRUMENTS LIST	9
7	TEST RESULTS AND MEASUREMENT DATA	10
7.1	ANTENNA REQUIREMENT	10
7.2	CONDUCTED EMISSIONS	11
7.3	RADIATED EMISSION METHOD	14
7.3.1	Field Strength of The Fundamental Signal	16
7.3.2	Spurious emissions	17
7.3.3	Bandedge emissions	22
7.4	20dB OCCUPY BANDWIDTH	23
8	TEST SETUP PHOTO	26
9	EUT CONSTRUCTIONAL DETAILS	28

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of $k=2$ and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	LED mirror luminaire
Description	The product covered by this report is a wall mounted mirror luminaire suitable for damp location and household use only. The RF parameters and RF modules of all series models are the same.
Model No.:	MIR3009.followed by NL or 00;followed by DF or 00;followed by BT or 00;followed by CT or 00;followed by D or 0;followed by L or T. MIR3011.followed by NL or 00;followed by DF or 00;followed by BT or 00;followed by CT or 00;followed by D or 0;followed by L or T. MIR3013.followed by NL or 00;followed by DF or 00;followed by BT or 00;followed by CT or 00;followed by D or 0;followed by L or T.
Model Similarity	The products covered by this report have similar electrical and mechanical construct, except the numbers of LED, wattage, outer pattern. For series models.Where "*" = number or letter. For all series model with below suffix: "NL" denoted the Night light function. "DF" denoted the function of going out fog. "BT" denoted the bluetooth function. "CT" denoted the color temperature change function. "D" denoted the color temperature adjustment function. "L"or"T" denoted the different installation methods. "0" or "00" denoted the without function. Model MIR3009.NL 00 00 00 0 L is identical with MIR3009A, except model number. Model MIR3009.NL DF 00 00 0 L is identical with MIR3009B, except model number. Model MIR3009.NL DF BT 00 0 L is identical with MIR3009C, except model number. Model MIR3011.00 DF BT CT 0 L is identical with MIR3011A,except model number. Model MIR3013.00 00 00 00 0 L is identical with MIR3013BA,except model number. Model MIR3013.00 DF 00 00 0 L is identical with MIR3013BB,except model number. Model MIR3013.00 DF BT 00 0 L is identical with MIR3013BC,except model number.
Test Model No:	MIR3011

Ratings							
Model no.	Input voltage	Current Max(mA)	Wattage (W)	LED driver	Mounting	Weight(Kg)	Outline size(mm)
MIR3009.** ** ** *	120V~,60Hz	0.42	35	GZD024V0 240LBAS	Wall	7.36	600x800
MIR3011.** ** ** *	120V~,60Hz	0.24	23	GZD018V0 120LBWS	Wall	5.6	D605x700
MIR3013.** ** ** *	120V~,60Hz	0.38	27	GZD024V0 240LBAS	Wall	9.5	600x800

Serial No.:	970206
Test sample(s) ID:	GTS201805000183-1
Sample(s) Status	Engineered sample
Hardware Version:	V1.1
Software Version:	V1.1.0
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK
Antenna Type:	PCB antenna
Antenna gain:	0dBi(declare by applicant)
Power supply:	AC120V 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Pre-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	93.41	94.20	92.24

Final Test Mode:

The EUT was tested in GFSK, $\pi/4$ -DQPSK modulation, and found the GFSK modulation is the worst case.

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup”:

Y axis (see the test setup photo)

5.3 Description of Support Units

None

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	Zhinan	ZN30900A	GTS215	June. 28 2017	June. 27 2018

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

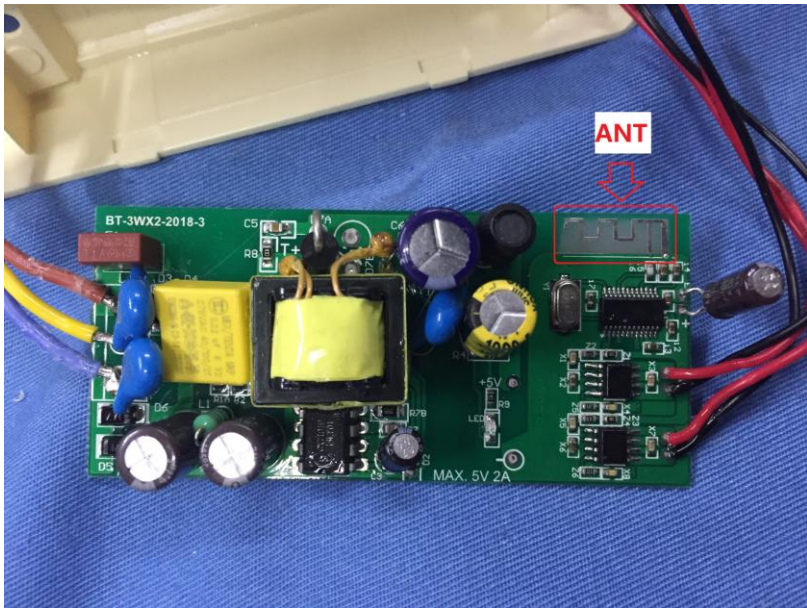Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
<i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi</i> 	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test setup:	Reference Plane <i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m																
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test results:	Pass																

Measurement data


The EUT was tested in GFSK, $\pi/4$ -DQPSK modulation, and found the GFSK modulation is the worst case.

Test mode:	Transmitting mode	Phase Polarity:	Line
Temp.:	35℃	Humidity:	55%

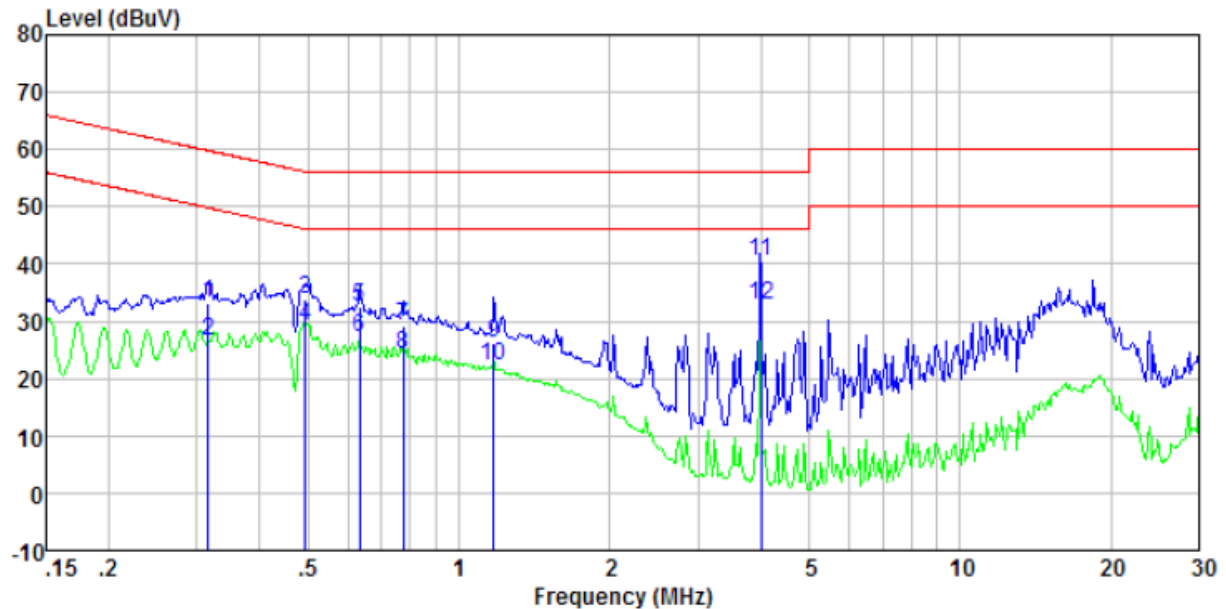

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.32	32.69	0.39	0.10	33.18	59.80	-26.62	QP
0.32	26.05	0.39	0.10	26.54	49.80	-23.26	Average
0.49	33.27	0.32	0.11	33.70	56.10	-22.40	QP
0.49	28.78	0.32	0.11	29.21	46.10	-16.89	Average
0.63	31.97	0.28	0.12	32.37	56.00	-23.63	QP
0.63	26.78	0.28	0.12	27.18	46.00	-18.82	Average
0.78	28.71	0.24	0.14	29.09	56.00	-26.91	QP
0.78	23.88	0.24	0.14	24.26	46.00	-21.74	Average
1.17	25.80	0.20	0.16	26.16	56.00	-29.84	QP
1.17	21.75	0.20	0.16	22.11	46.00	-23.89	Average
4.00	40.12	0.20	0.18	40.50	56.00	-15.50	QP
4.00	32.42	0.20	0.18	32.80	46.00	-13.20	Average

Test mode:	Transmitting mode	Phase Polarity:	Neutral
Temp.:	35℃	Humidity:	55%

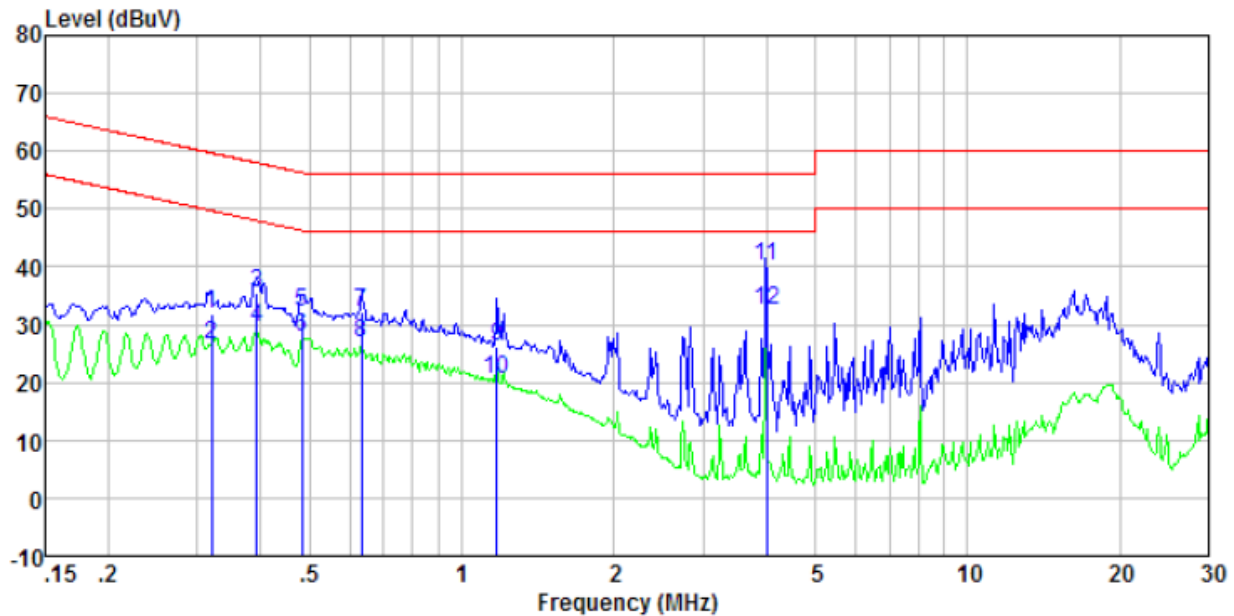



Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.32	31.24	0.39	0.10	31.73	59.71	-27.98	QP
0.32	25.90	0.39	0.10	26.39	49.71	-23.32	Average
0.39	35.01	0.35	0.11	35.47	57.99	-22.52	QP
0.39	29.10	0.35	0.11	29.56	47.99	-18.43	Average
0.48	31.69	0.32	0.11	32.12	56.27	-24.15	QP
0.48	27.35	0.32	0.11	27.78	46.27	-18.49	Average
0.63	31.87	0.28	0.12	32.27	56.00	-23.73	QP
0.63	26.42	0.28	0.12	26.82	46.00	-19.18	Average
1.17	25.97	0.20	0.16	26.33	56.00	-29.67	QP
1.17	20.34	0.20	0.16	20.70	46.00	-25.30	Average
4.00	39.61	0.20	0.18	39.99	56.00	-16.01	QP
4.00	32.01	0.20	0.18	32.39	46.00	-13.61	Average

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

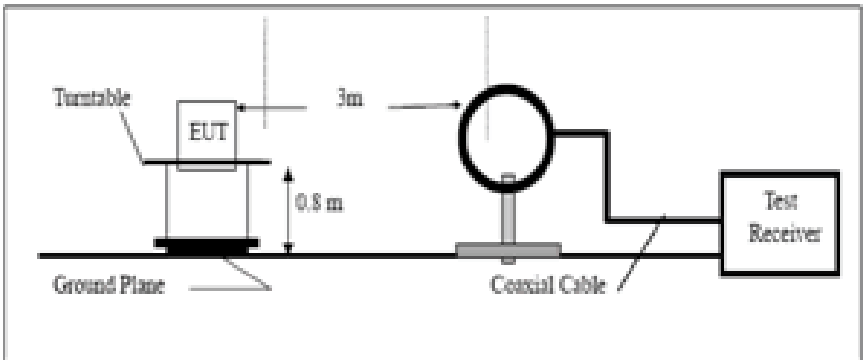Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
			5000 @3m		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz 				

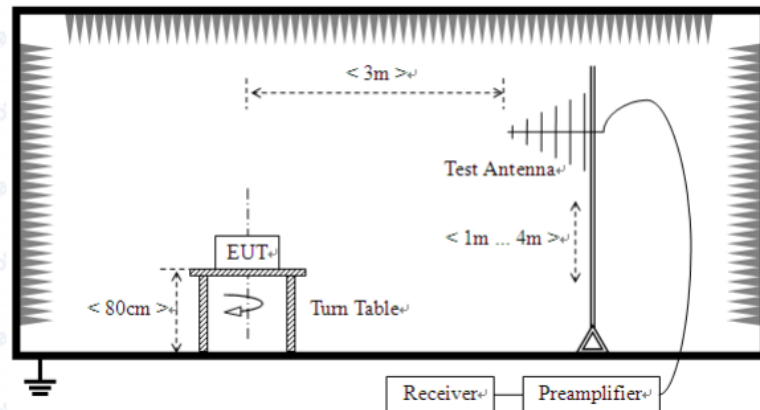

Above 1GHz

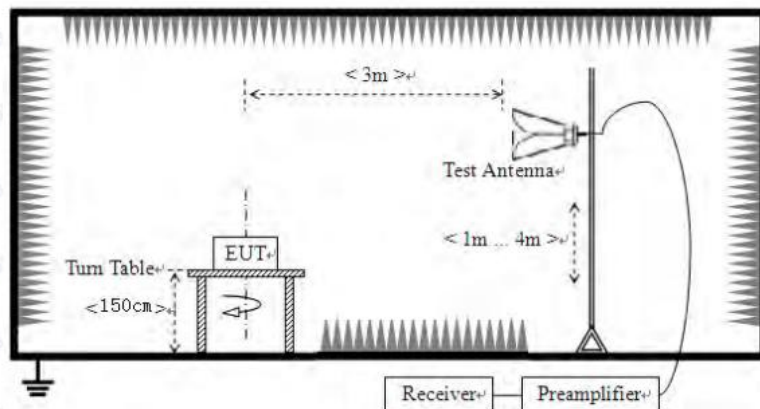

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	90.13	27.58	5.39	30.18	92.92	114.00	-21.08	Vertical
2402.00	87.88	27.58	5.39	30.18	90.67	114.00	-23.33	Horizontal
2441.00	88.62	27.55	5.43	30.06	91.54	114.00	-22.46	Vertical
2441.00	86.92	27.55	5.43	30.06	89.84	114.00	-24.16	Horizontal
2480.00	91.14	27.52	5.47	29.93	94.20	114.00	-19.80	Vertical
2480.00	88.24	27.52	5.47	29.93	91.30	114.00	-22.70	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	79.07	27.58	5.39	30.18	81.86	94.00	-12.14	Vertical
2402.00	76.89	27.58	5.39	30.18	79.68	94.00	-14.32	Horizontal
2441.00	77.39	27.55	5.43	30.06	80.31	94.00	-13.69	Vertical
2441.00	74.58	27.55	5.43	30.06	77.50	94.00	-16.50	Horizontal
2480.00	80.05	27.52	5.47	29.93	83.11	94.00	-10.89	Vertical
2480.00	77.22	27.52	5.47	29.93	80.28	94.00	-13.72	Horizontal


The EUT was tested in GFSK, $\pi/4$ -DQPSK modulation, and found the GFSK modulation is the worst case.

7.3.2 Spurious emissions

- The EUT was tested in GFSK, $\pi/4$ -DQPSK modulation, and found the GFSK modulation is the worst case.
- Below 30MHz
The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

Test mode:	Transmitting mode	Antenna Polarity:	Horizontal
Temp.:	35℃	Humidity:	54%

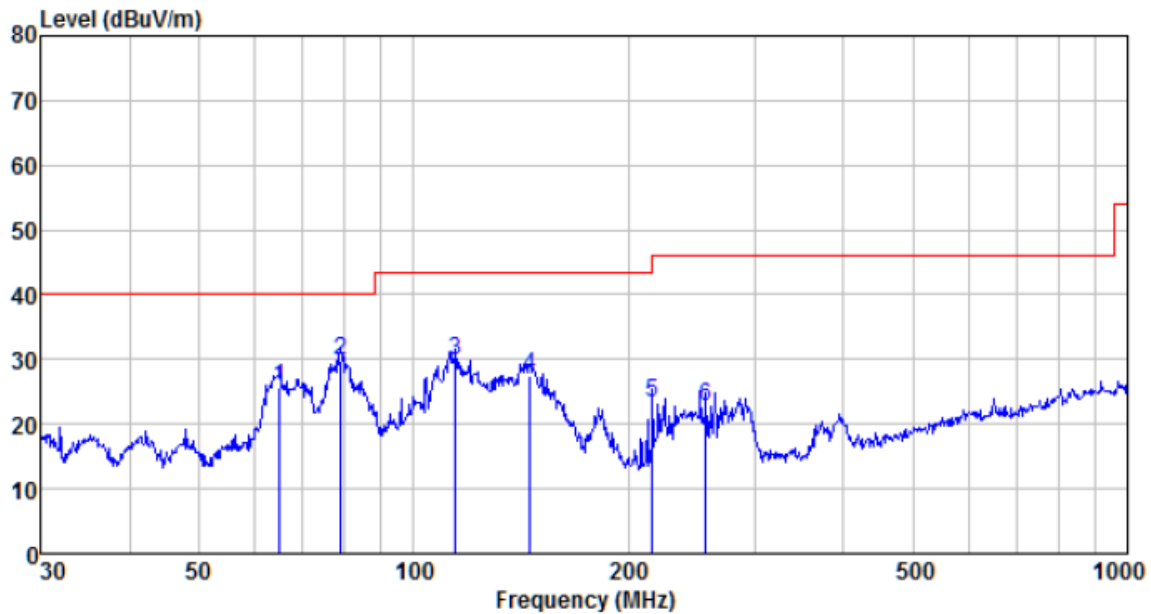

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
64.887	51.77	9.34	0.90	36.38	25.63	40.00	-14.37	QP
78.965	57.89	7.41	1.02	36.54	29.78	40.00	-10.22	QP
114.515	54.89	10.34	1.31	36.84	29.70	43.50	-13.80	QP
145.351	55.37	7.51	1.54	37.05	27.37	43.50	-16.13	QP
216.024	47.71	11.02	1.93	37.35	23.31	46.00	-22.69	QP
256.521	45.67	12.36	2.16	37.39	22.80	46.00	-23.20	QP

Test mode:	Transmitting mode	Antenna Polarity:	Vertical
Temp.:	35°C	Humidity:	54%

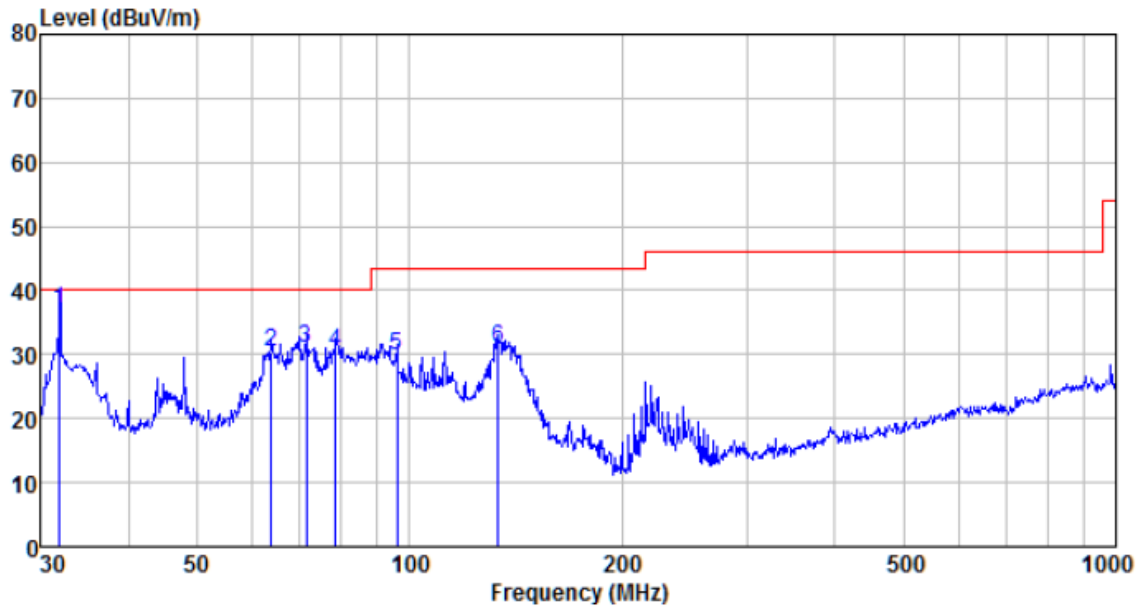

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
32.000	60.32	11.24	0.57	35.15	36.98	40.00	-3.02	QP
63.759	55.96	9.80	0.89	36.37	30.28	40.00	-9.72	QP
71.330	59.00	7.49	0.95	36.46	30.98	40.00	-9.02	QP
78.689	58.65	7.41	1.02	36.53	30.55	40.00	-9.45	QP
96.099	53.60	11.65	1.16	36.69	29.72	43.50	-13.78	QP
133.619	58.55	7.92	1.46	36.98	30.95	43.50	-12.55	QP

■ Above 1GHz

Test mode:	Transmitting mode
Temp. & Humidity. :	35℃, 54%
Test channel:	Lowest channel

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	35.56	31.78	8.60	32.09	43.85	74.00	-30.15	Vertical
7206.00	30.67	36.15	11.65	32.00	46.47	74.00	-27.53	Vertical
9608.00	30.44	37.95	14.14	31.62	50.91	74.00	-23.09	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	39.49	31.78	8.60	32.09	47.78	74.00	-26.22	Horizontal
7206.00	32.27	36.15	11.65	32.00	48.07	74.00	-25.93	Horizontal
9608.00	29.69	37.95	14.14	31.62	50.16	74.00	-23.84	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.70	31.78	8.60	32.09	32.99	54.00	-21.01	Vertical
7206.00	19.56	36.15	11.65	32.00	35.36	54.00	-18.64	Vertical
9608.00	18.74	37.95	14.14	31.62	39.21	54.00	-14.79	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.74	31.78	8.60	32.09	37.03	54.00	-16.97	Horizontal
7206.00	21.61	36.15	11.65	32.00	37.41	54.00	-16.59	Horizontal
9608.00	18.33	37.95	14.14	31.62	38.80	54.00	-15.20	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	35.10	31.85	8.67	32.12	43.50	74.00	-30.50	Vertical
7323.00	30.37	36.37	11.72	31.89	46.57	74.00	-27.43	Vertical
9764.00	30.17	38.35	14.25	31.62	51.15	74.00	-22.85	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	38.94	31.85	8.67	32.12	47.34	74.00	-26.66	Horizontal
7323.00	31.93	36.37	11.72	31.89	48.13	74.00	-25.87	Horizontal
9764.00	29.38	38.35	14.25	31.62	50.36	74.00	-23.64	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	24.34	31.85	8.67	32.12	32.74	54.00	-21.26	Vertical
7323.00	19.31	36.37	11.72	31.89	35.51	54.00	-18.49	Vertical
9764.00	18.52	38.35	14.25	31.62	39.50	54.00	-14.50	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	28.32	31.85	8.67	32.12	36.72	54.00	-17.28	Horizontal
7323.00	21.33	36.37	11.72	31.89	37.53	54.00	-16.47	Horizontal
9764.00	18.07	38.35	14.25	31.62	39.05	54.00	-14.95	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4960.00	34.82	31.93	8.73	32.16	43.32	74.00	-30.68	Vertical
7440.00	30.18	36.59	11.79	31.78	46.78	74.00	-27.22	Vertical
9920.00	30.00	38.81	14.38	31.88	51.31	74.00	-22.69	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	38.59	31.93	8.73	32.16	47.09	74.00	-26.91	Horizontal
7440.00	31.71	36.59	11.79	31.78	48.31	74.00	-25.69	Horizontal
9920.00	29.19	38.81	14.38	31.88	50.50	74.00	-23.50	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4960.00	24.11	31.93	8.73	32.16	32.61	54.00	-21.39	Vertical
7440.00	19.15	36.59	11.79	31.78	35.75	54.00	-18.25	Vertical
9920.00	18.38	38.81	14.38	31.88	39.69	54.00	-14.31	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.06	31.93	8.73	32.16	36.56	54.00	-17.44	Horizontal
7440.00	21.16	36.59	11.79	31.78	37.76	54.00	-16.24	Horizontal
9920.00	17.91	38.81	14.38	31.88	39.22	54.00	-14.78	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

7.3.3 Bandedge emissions

- The EUT was tested in GFSK, $\pi/4$ -DQPSK modulation, and found the GFSK modulation is the worst case. All of the restriction bands were tested, and only the data of worst case was exhibited.

Test mode:	Transmitting mode
Temp. & Humidity. :	35°C, 54%
Test channel:	Lowest channel

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.85	27.59	5.38	30.18	38.64	74.00	-35.36	Horizontal
2400.00	51.64	27.58	5.39	30.18	54.43	74.00	-19.57	Horizontal
2390.00	35.73	27.59	5.38	30.18	38.52	74.00	-35.48	Vertical
2400.00	52.92	27.58	5.39	30.18	55.71	74.00	-18.29	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	27.99	27.59	5.38	30.18	30.78	54.00	-23.22	Horizontal
2400.00	38.81	27.58	5.39	30.18	41.60	54.00	-12.40	Horizontal
2390.00	27.43	27.59	5.38	30.18	30.22	54.00	-23.78	Vertical
2400.00	39.79	27.58	5.39	30.18	42.58	54.00	-11.42	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.12	27.53	5.47	29.93	40.19	74.00	-33.81	Horizontal
2500.00	37.63	27.55	5.49	29.93	40.74	74.00	-33.26	Horizontal
2483.50	36.79	27.53	5.47	29.93	39.86	74.00	-34.14	Vertical
2500.00	37.96	27.55	5.49	29.93	41.07	74.00	-32.93	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	30.73	27.53	5.47	29.93	33.80	54.00	-20.20	Horizontal
2500.00	29.74	27.55	5.49	29.93	32.85	54.00	-21.15	Horizontal
2483.50	31.36	27.53	5.47	29.93	34.43	54.00	-19.57	Vertical
2500.00	29.08	27.55	5.49	29.93	32.19	54.00	-21.81	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

7.4 20dB Occupy Bandwidth

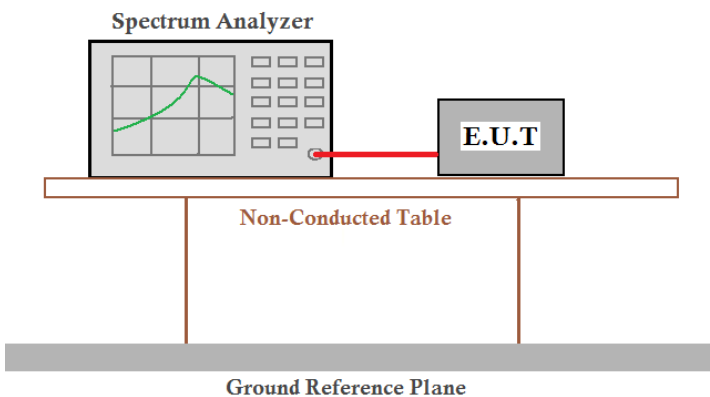
Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Modulation type:	Test channel	20dB bandwidth(MHz)	Result
GFSK	Lowest	0.914	Pass
	Middle	0.885	Pass
	Highest	0.871	Pass
$\pi/4$ -DQPSK	Lowest	1.118	Pass
	Middle	1.118	Pass
	Highest	1.119	Pass

Test plot as follows:


Modulation type: GFSK

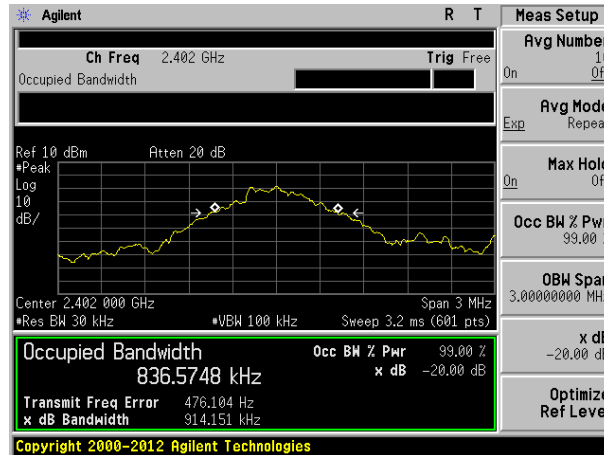

Lowest channel

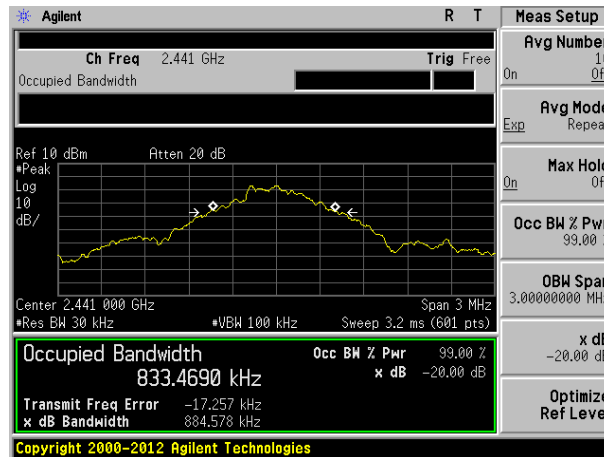


Middle channel

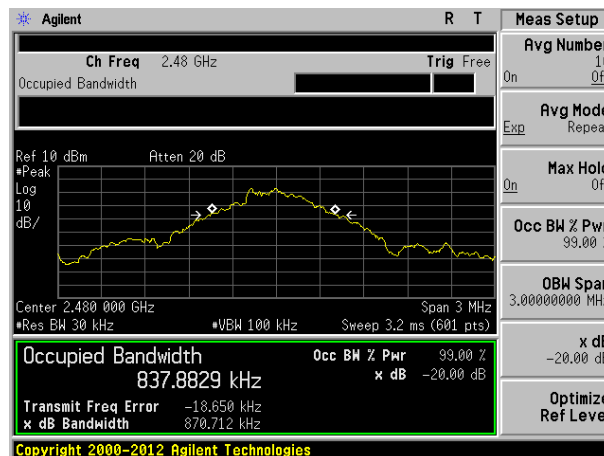


Highest channel


Modulation type: $\pi/4$ -DQPSK

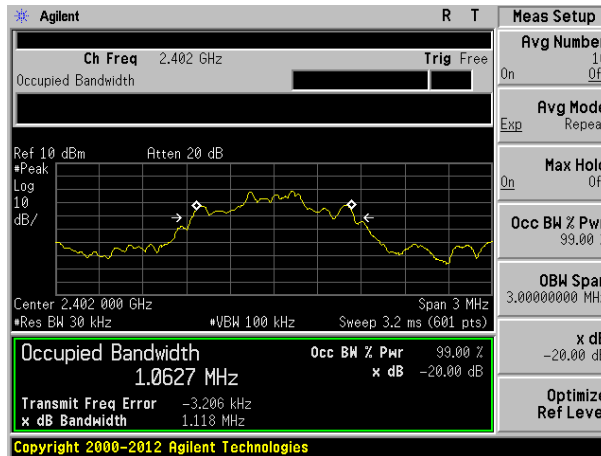

Lowest channel

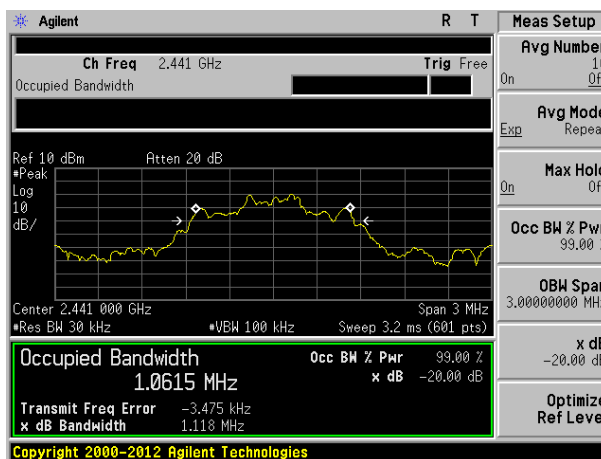



Middle channel

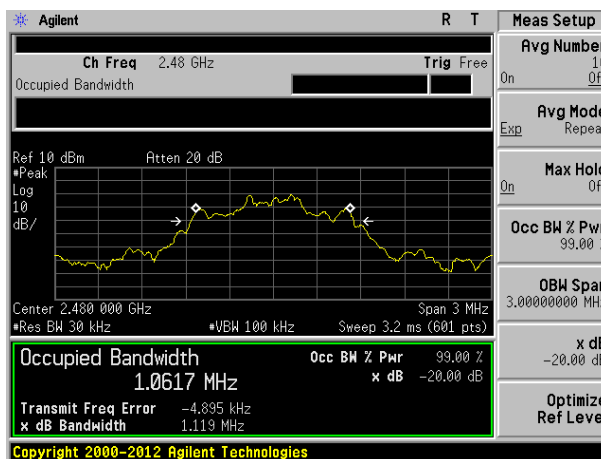

Highest channel

8 Test Setup Photo

Radiated Emission

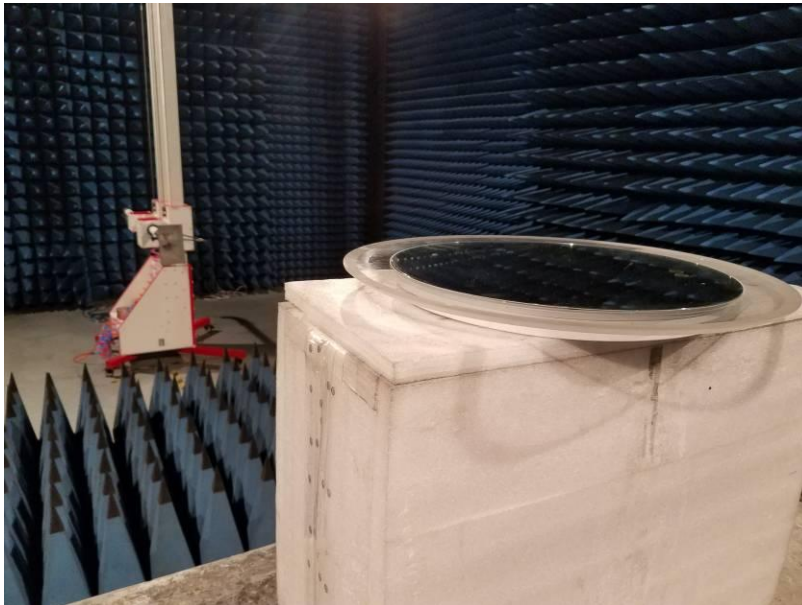
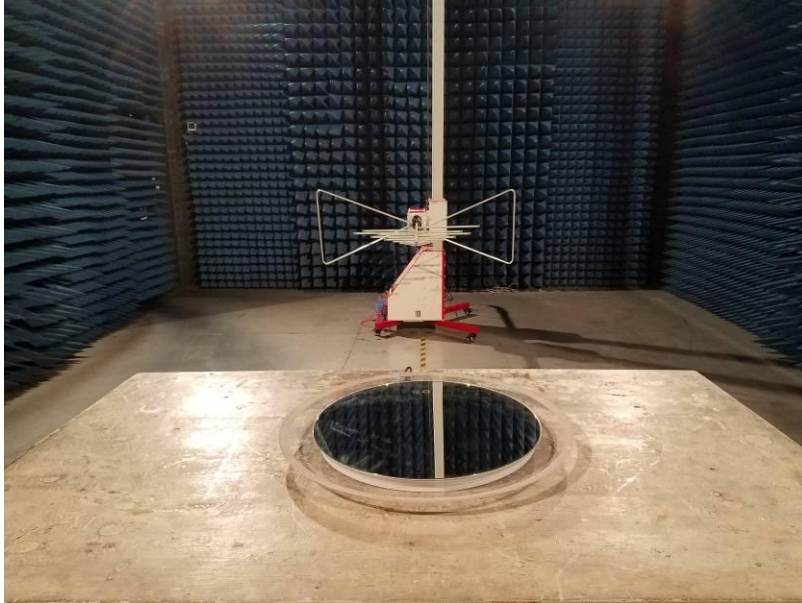



Conducted Emission




9 EUT Constructional Details



Model number: MIR3013

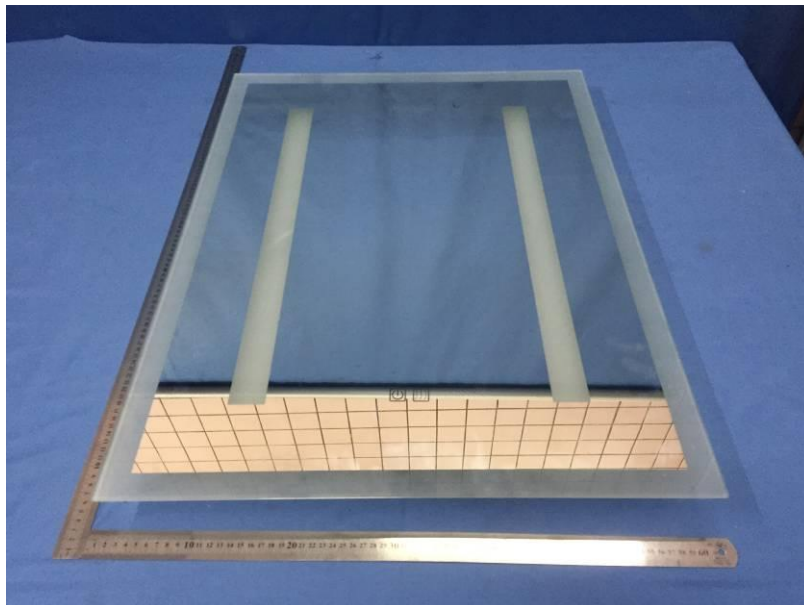
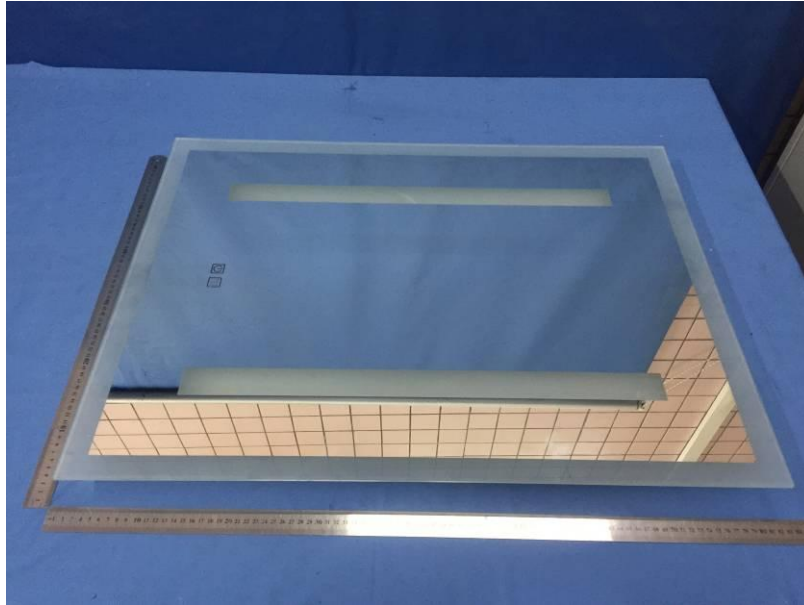



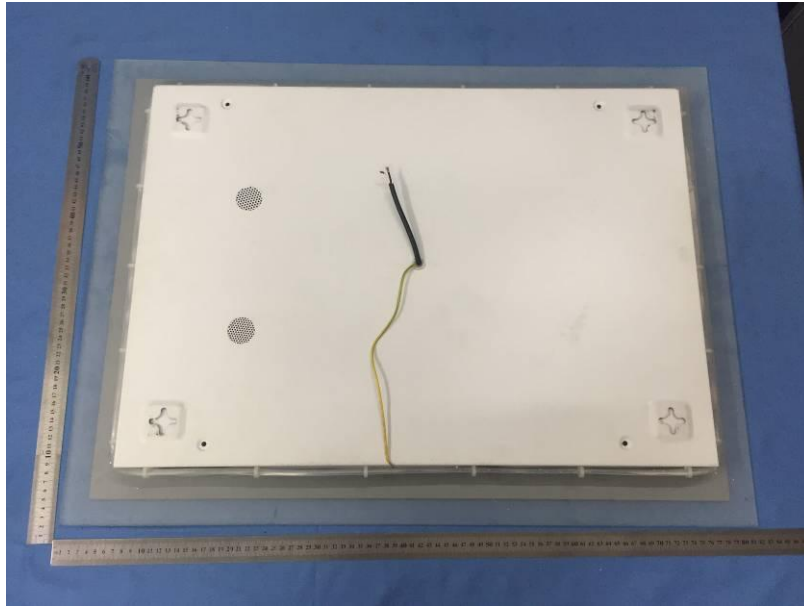




Model number: MIR3011


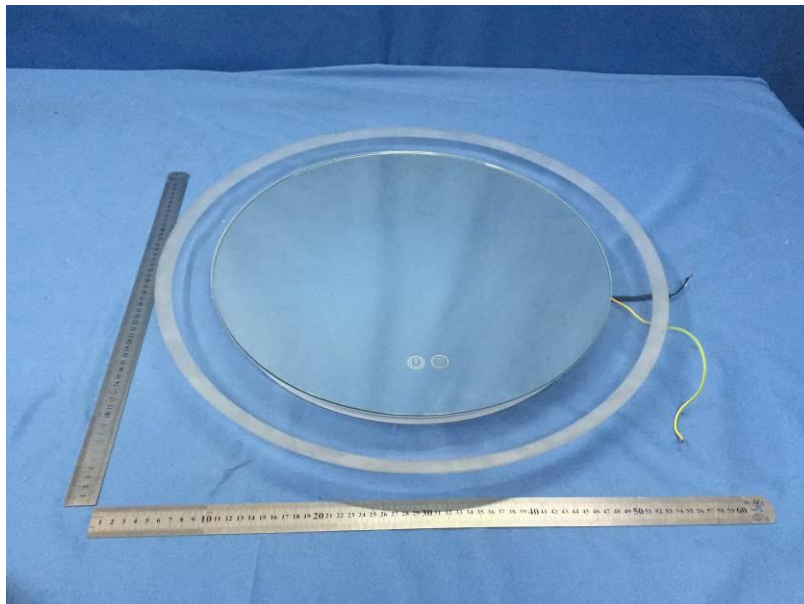


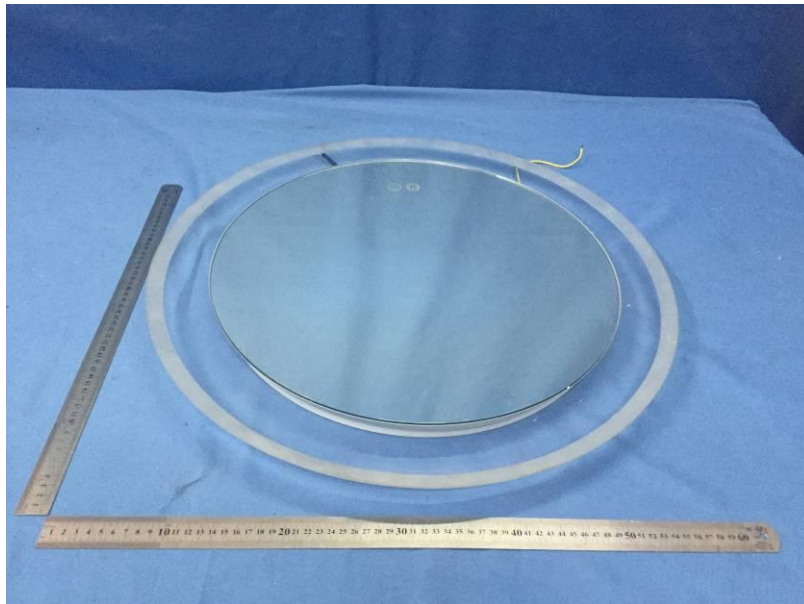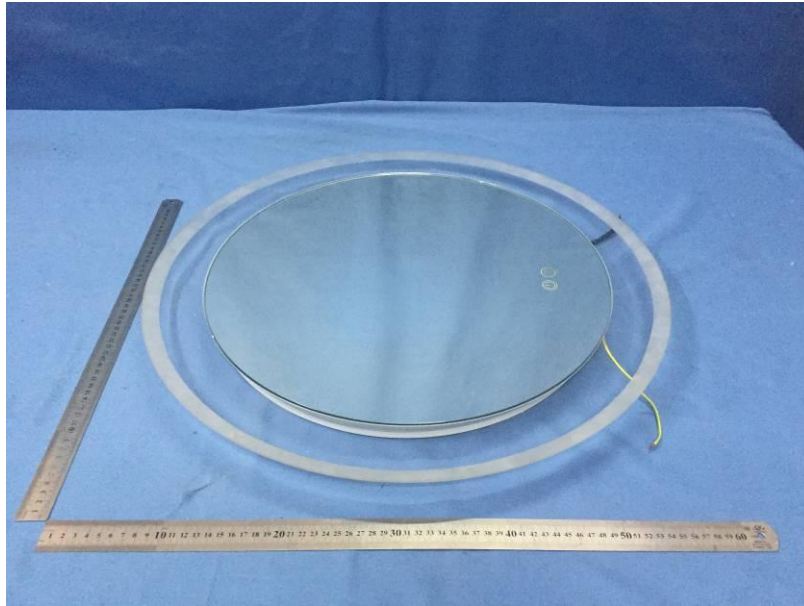


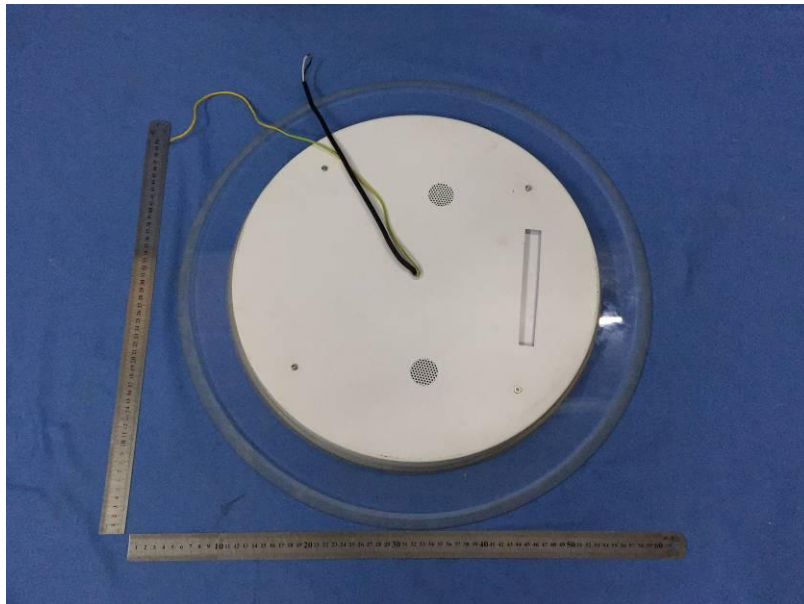
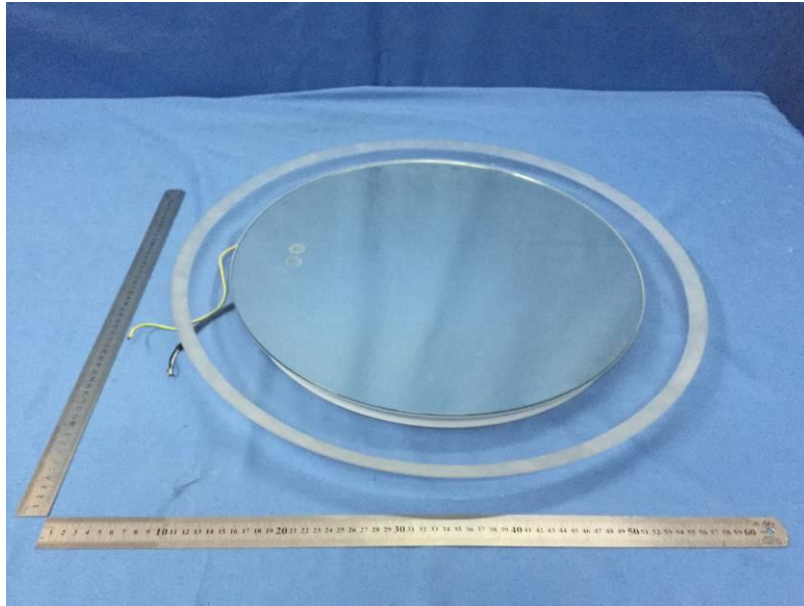


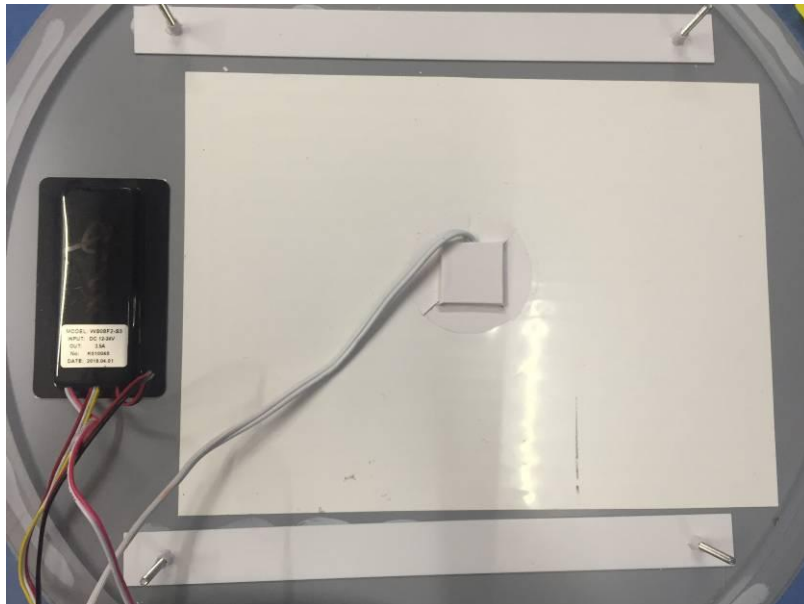
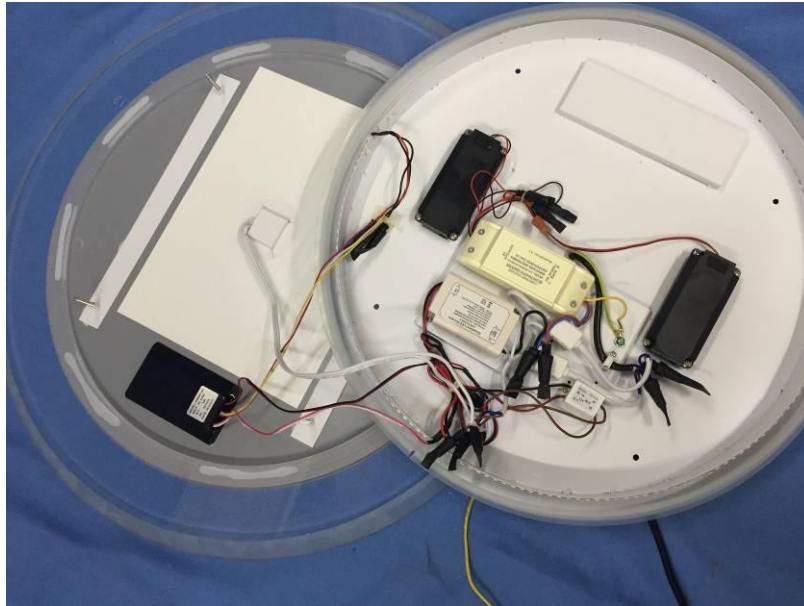


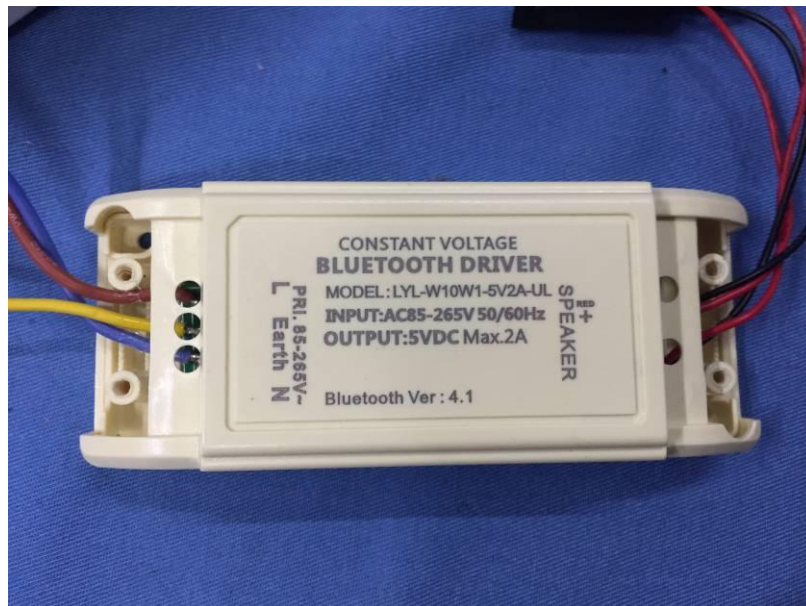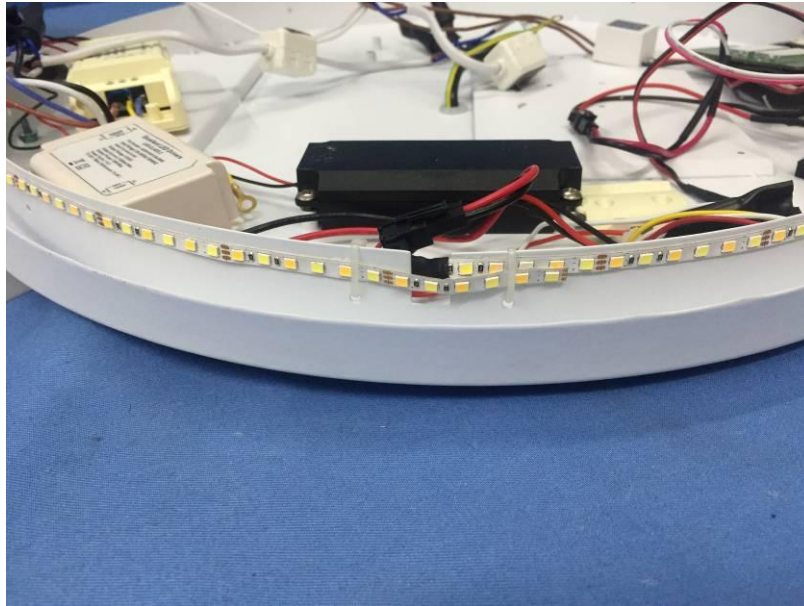


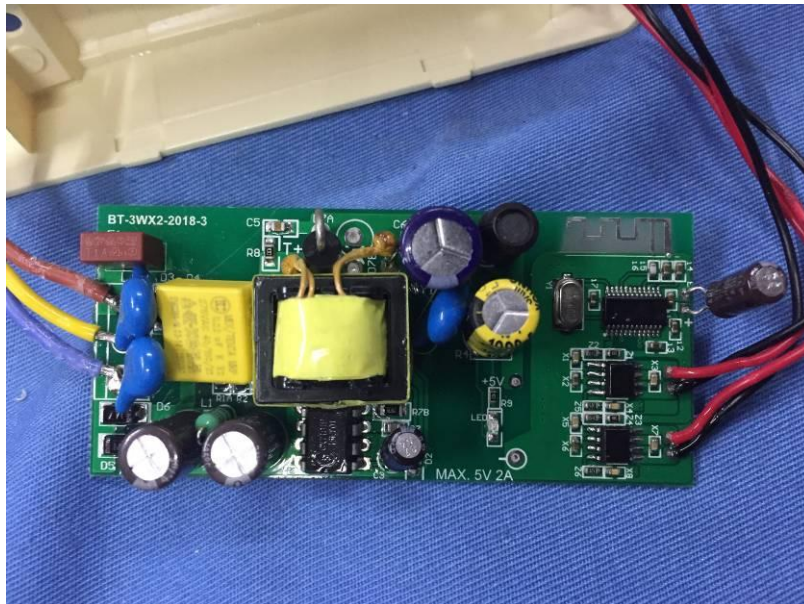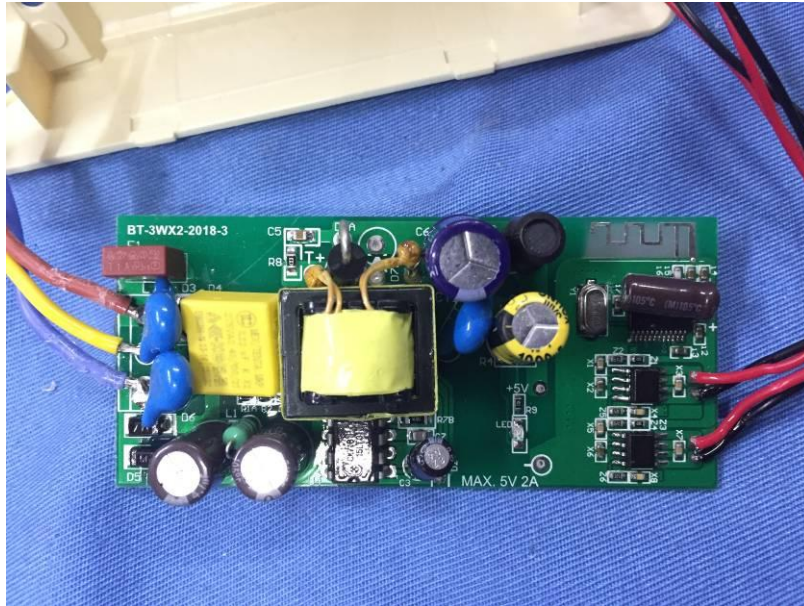

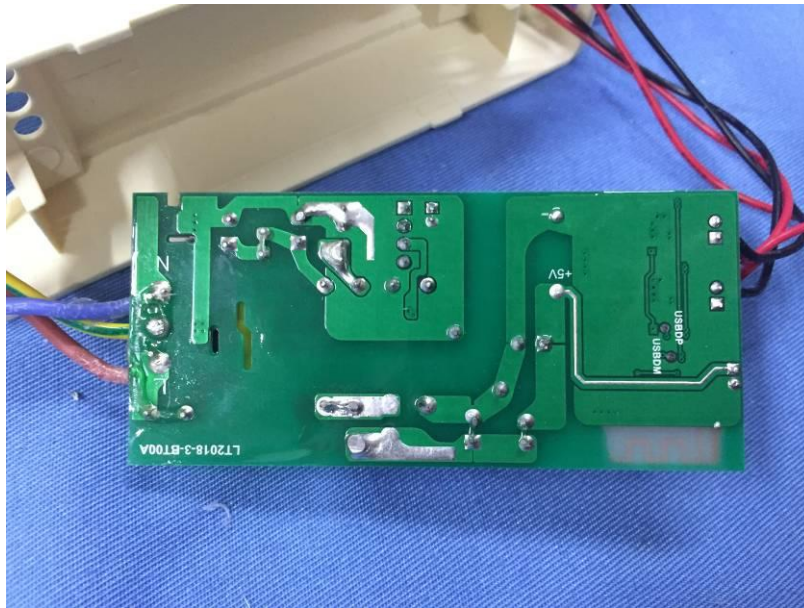

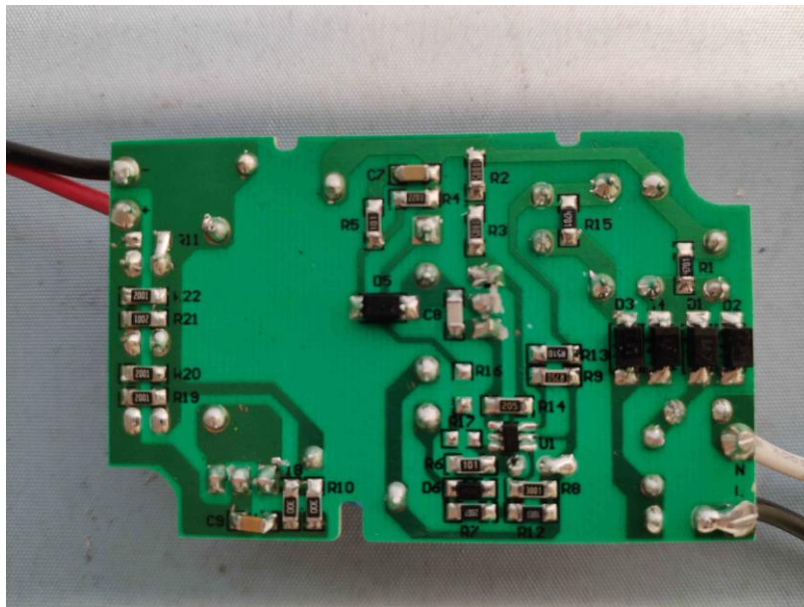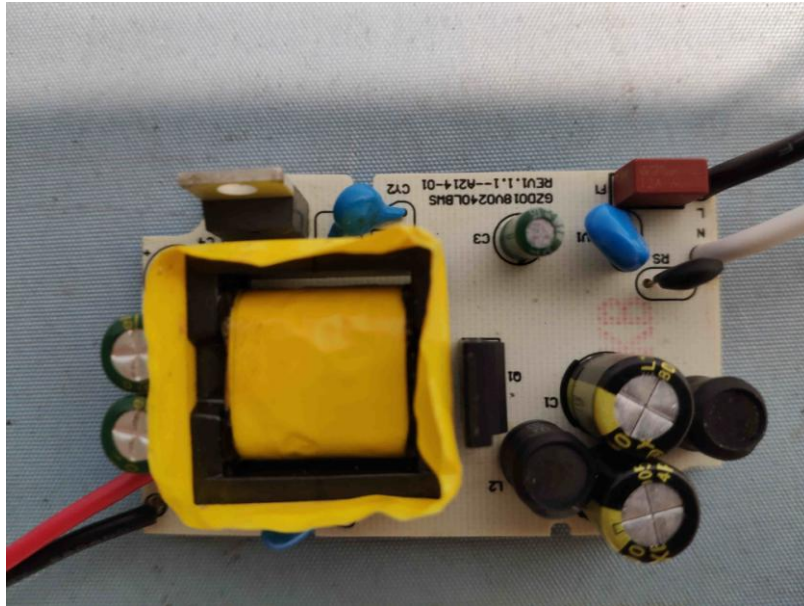

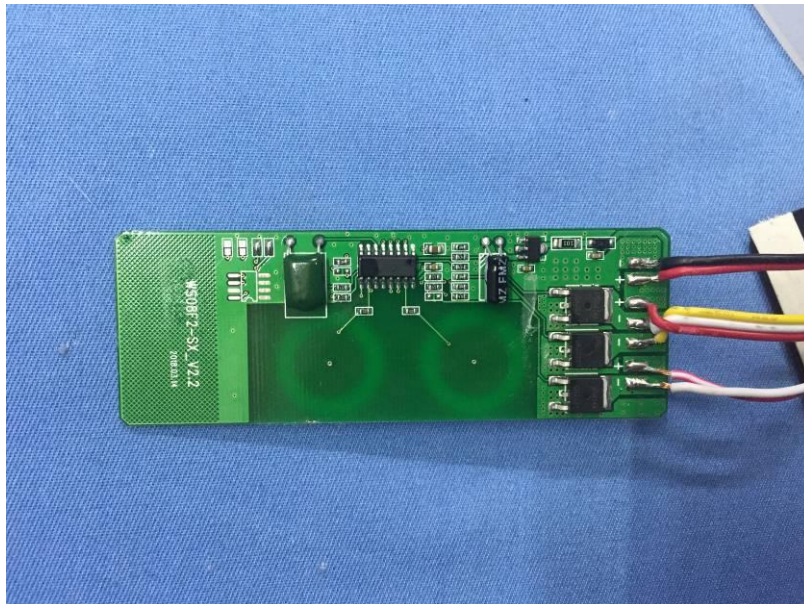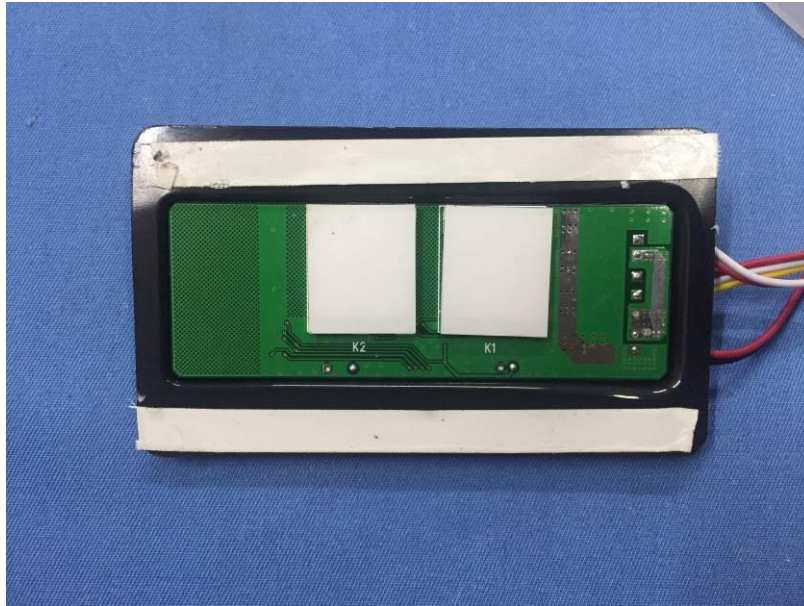

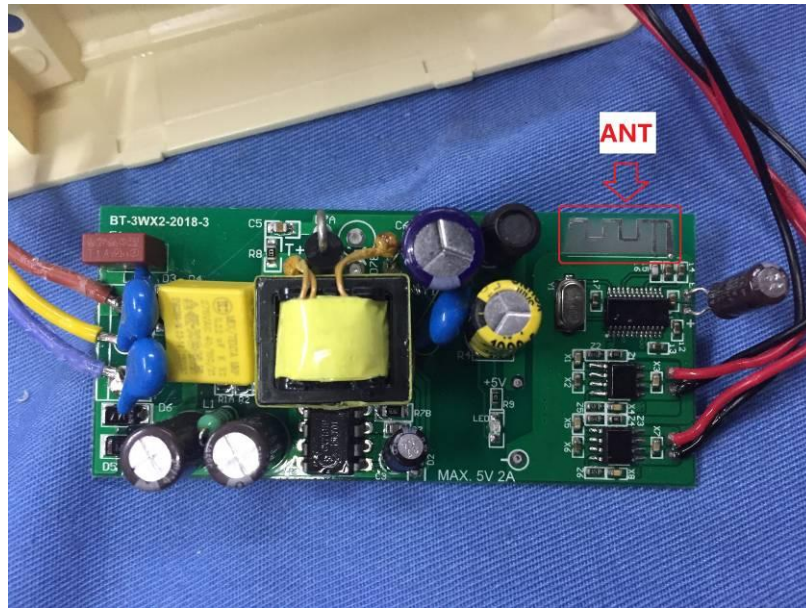

-----End-----