

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-192-RWD-035

AGR No. : A191A-106

Applicant : CHIPSEN. Co., Ltd

Address : B1 C-17,15, Gyeongin-ro 53-gil, Guro-gu, Seoul, Republic of Korea

Manufacturer : CHIPSEN. Co., Ltd

Address : B1 C-17,15, Gyeongin-ro 53-gil, Guro-gu, Seoul, Republic of Korea

Type of Equipment : Bluetooth Dual Mode Serial Adapter

FCC ID. : 2APB6-BPORT-232

Model Name : BPORT-232

Multiple Model Name: N/A

Serial number : N/A

Total page of Report : 74 pages (including this page)

Date of Incoming : January 14, 2019

Date of issue : February 27, 2019

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Jae-Ho Lee / Chief Engineer
ONETECH Corp.

Approved by:



Keun-Young, Choi / Vice President
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	8
3. GENERAL INFORMATION.....	9
3.1 PRODUCT DESCRIPTION.....	9
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	9
4. EUT MODIFICATIONS.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1 JUSTIFICATION.....	10
5.2 PERIPHERAL EQUIPMENT	10
5.3 MODE OF OPERATION DURING THE TEST	11
5.4 CONFIGURATION OF TEST SYSTEM.....	11
5.5 ANTENNA REQUIREMENT	11
6. PRELIMINARY TEST	12
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	12
6.2 GENERAL RADIATED EMISSIONS TESTS	12
7. MINIMUM 20 DB BANDWIDTH.....	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 TEST EQUIPMENT USED	13
7.4 TEST DATA FOR 1 MBPS	14
7.5 TEST DATA FOR 2 MBPS	16
7.6 TEST DATA FOR 3 MBPS	18
8. HOPPING FREQUENCY SEPARATION.....	20
8.1 OPERATING ENVIRONMENT	20
8.2 TEST SET-UP	20
8.3 TEST EQUIPMENT USED.....	20

8.4 TEST DATA FOR 1 MBPS	21
8.5 TEST DATA FOR 2 MBPS	22
8.6 TEST DATA FOR 3 MBPS	23
9. NUMBER OF HOPPING CHANNELS	24
9.1 OPERATING ENVIRONMENT	24
9.2 TEST SET-UP	24
9.3 TEST EQUIPMENT USED	24
9.4 TEST DATA FOR 1 MBPS	25
9.5 TEST DATA FOR 2 MBPS	28
9.6 TEST DATA FOR 3 MBPS	31
10. TIME OF OCCUPANCY	34
10.1 OPERATING ENVIRONMENT	34
10.2 TEST SET-UP	34
10.3 TEST EQUIPMENT USED	34
10.4 TEST DATA FOR 1 MBPS	35
10.5 TEST DATA FOR 2 MBPS	38
10.6 TEST DATA FOR 3 MBPS	41
11. MAXIMUM PEAK OUTPUT POWER	44
11.1 OPERATING ENVIRONMENT	44
11.2 TEST SET-UP	44
11.3 TEST EQUIPMENT USED	44
11.4 TEST DATA FOR 1 MBPS	45
11.5 TEST DATA FOR 2 MBPS	47
11.6 TEST DATA FOR 3 MBPS	49
12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	51
12.1 OPERATING ENVIRONMENT	51
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	51
12.3 TEST SET-UP FOR RADIATED MEASUREMENT	51
12.4 TEST EQUIPMENT USED	51
12.5 TEST DATA FOR CONDUCTED EMISSION	52
12.5.1 Test data for 1 Mbps	52
12.5.2 Test data for 2 Mbps	57
12.5.3 Test data for 3 Mbps	62
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	67
12.6.1 Radiated Emission which fall in the Restricted Band	67
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz	70

12.6.3 Spurious Radiated Emission.....	73
---	-----------

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
OT-192-RWD-035	February 27, 2019	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

APPLICANT : CHIPSEN. Co., Ltd
 ADDRESS : B1 C-17,15, Gyeongin-ro 53-gil, Guro-gu, Seoul, Republic of Korea
 CONTACT PERSON : Choi, JongWook / Manager
 TELEPHONE NO : +82-70-8708-5990
 FCC ID : 2APB6-BPORT-232
 MODEL NAME : BPORT-232
 SERIAL NUMBER : N/A
 DATE : February 27, 2019

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	Bluetooth Dual Mode Serial Adapter
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	N/A
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The CHIPSEN. Co., Ltd, Model BPORT-232 (referred to as the EUT in this report) is a Bluetooth Dual Mode Serial Adapter. The product specification described herein was obtained from product data sheet or user's manual.

Device Type	Bluetooth Dual Mode Serial Adapter	
Operating Frequency	2 402 MHz ~ 2 480 MHz	
RF Output Power	1 Mbps	6.34 dBm
	2 Mbps	1.92 dBm
	3 Mbps	2.42 dBm
Number of Channel	79 Channels	
Modulation Type	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3Mbps	
Antenna Type	Mini Omni Antenna	
Antenna Gain	1.5 dBi	
List of each Osc. or crystal Freq.(Freq. $\geq$ 1 MHz)	16 MHz, 26 MHz	
Rated Supply Voltage	DC 5.0 V	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	-

5.2 Peripheral equipment

Model	Manufacturer	Description	Connected to
Ideapad 320	LENOVO	Notebook PC	EUT, AC/DC Adapter
ADL45WCE	LENOVO	AC/DC Adapter	Notebook PC

5.3 Mode of operation during the test

For Bluetooth function testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. The EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz) with each data transfer rate, 1 Mbps, 2 Mbps, and 3 Mbps. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this test report.

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in a Charging & Transmitting mode. The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: The EUT was tested in a Charging & Transmitting mode. Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a Mini Omni Antenna. Though this antenna type is SMA, It's using adhesive named LOCTITE 271 according to the FCC rules and regulations. And that adhesive will be applied at the factory (prior to shipment). So no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

As this product is only using DC power, AC conducted emission test has not been performed.

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Charging & Transmitting mode.	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

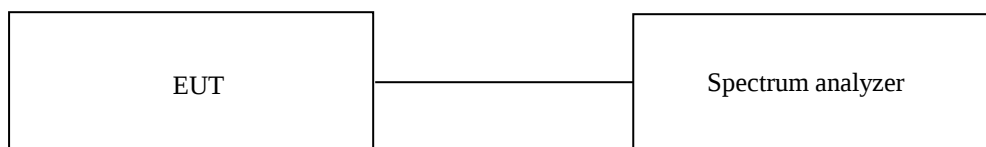

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.


7.4 Test data for 1 Mbps


-. Test Date : January 22, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	764.20
Middle	2 441	759.20
High	2 480	764.20




Tested by: Yu-Seog, Sim / Assistant Manager

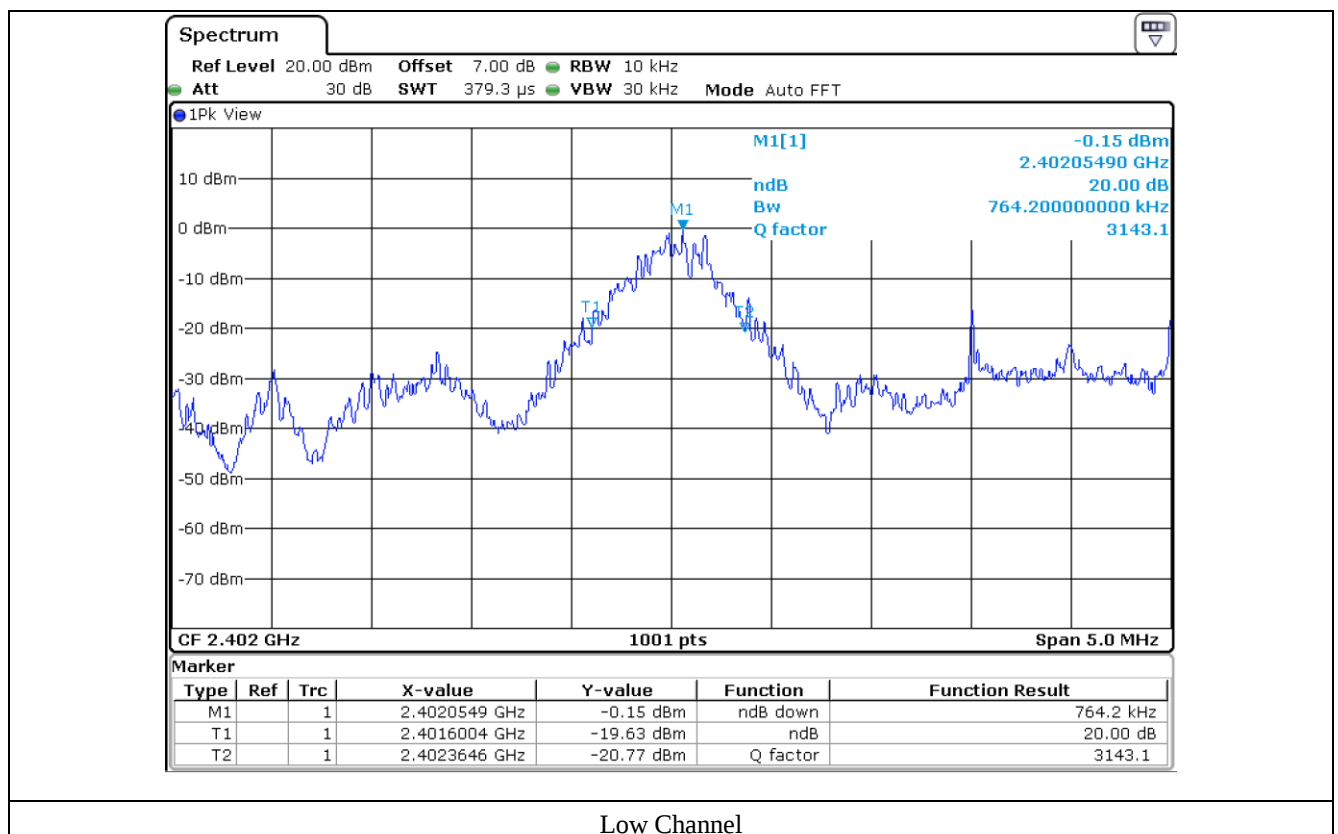

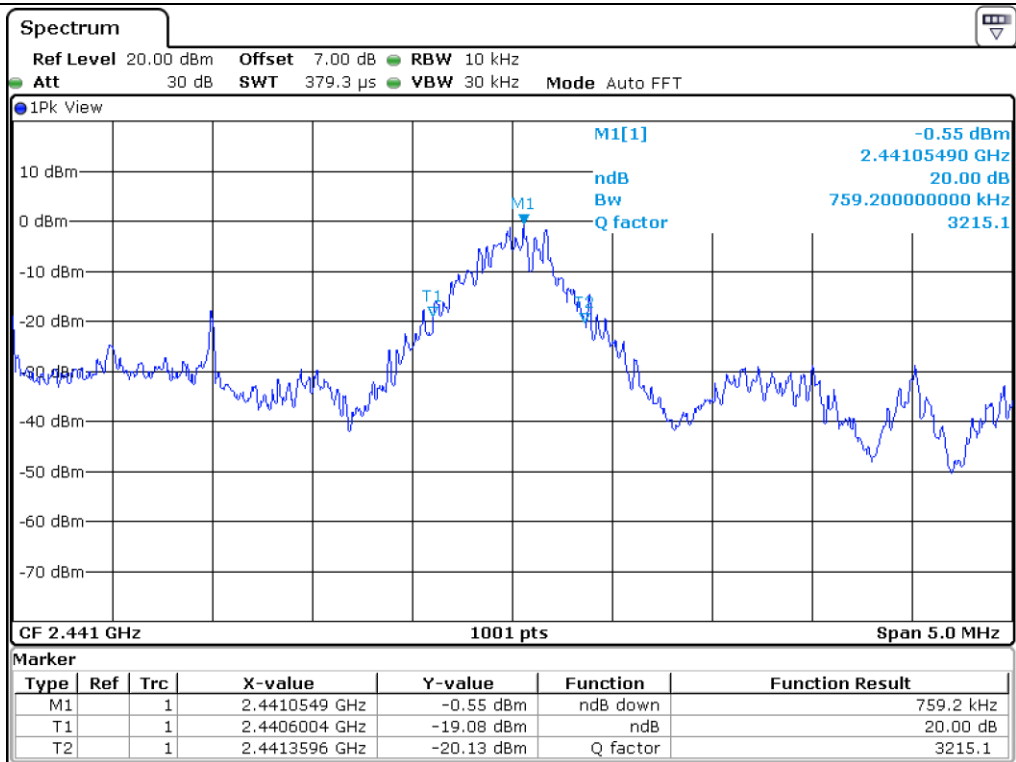

Middle Channel

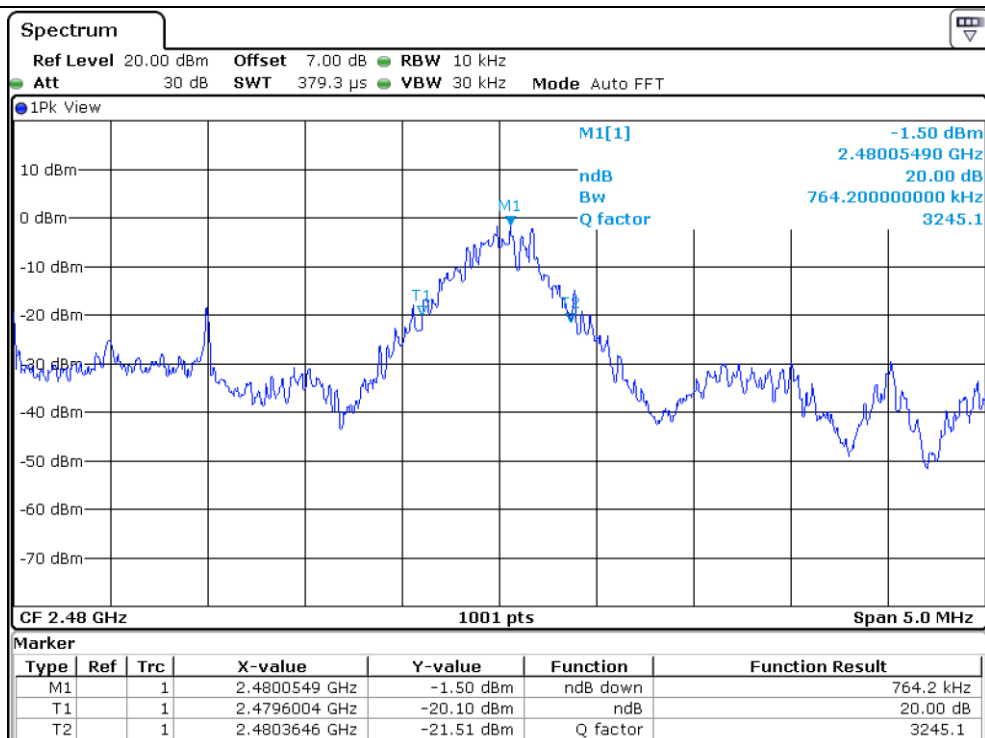

High Channel


7.5 Test data for 2 Mbps


-. Test Date : January 22, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1253.70
Middle	2 441	1253.70
High	2 480	1258.70




Tested by: Yu-Seog, Sim / Assistant Manager

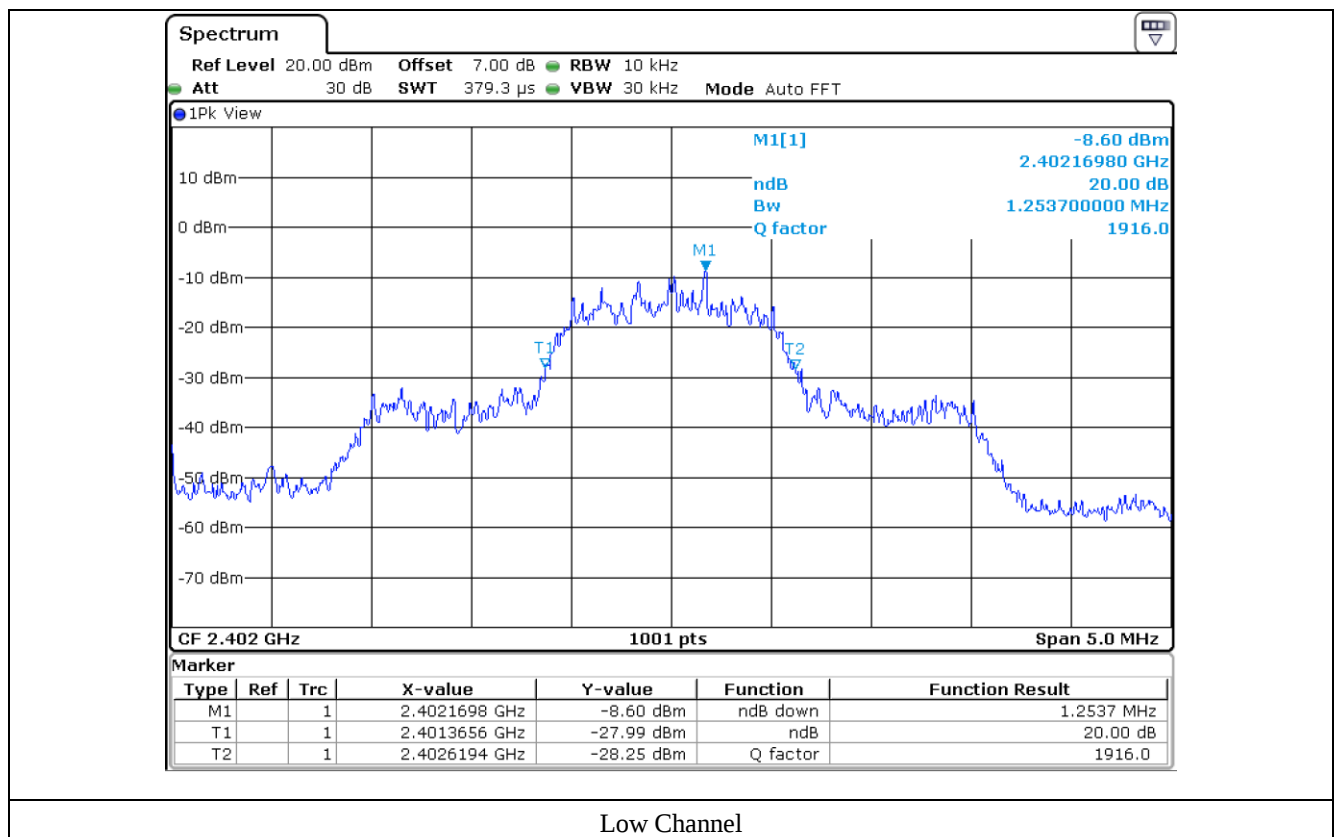

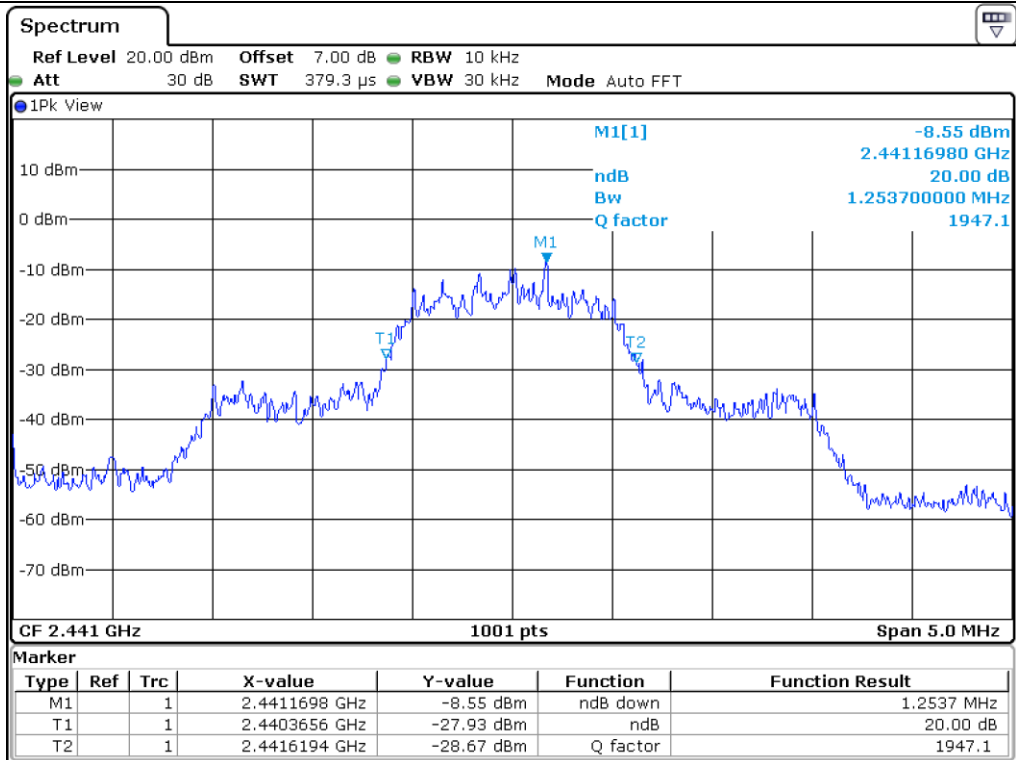

Middle Channel

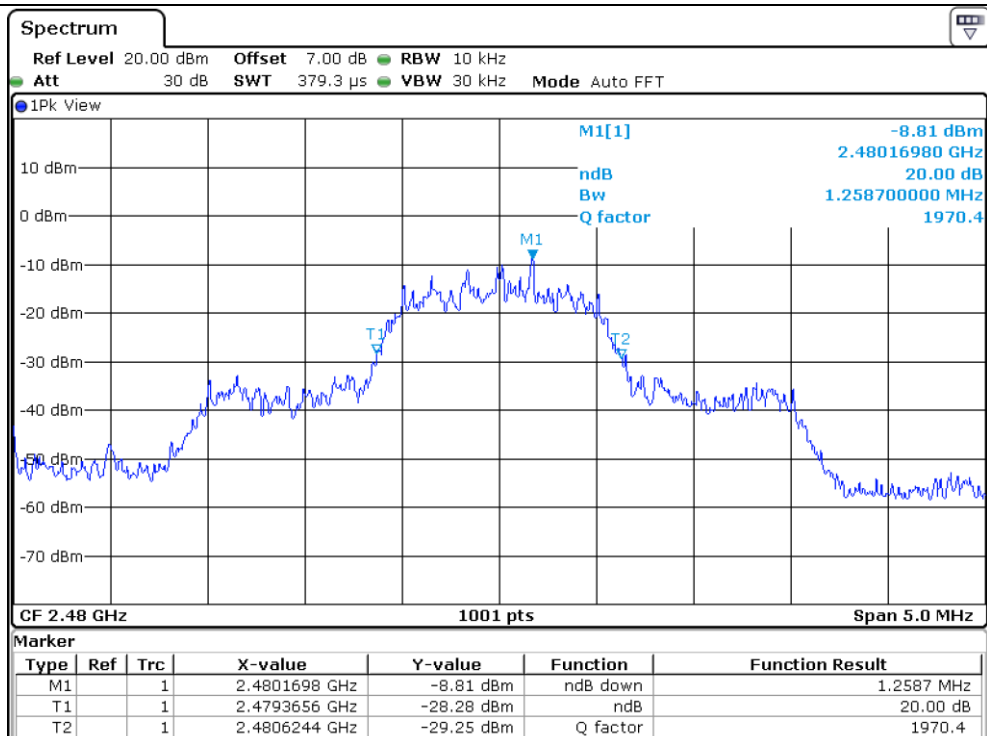

High Channel


7.6 Test data for 3 Mbps


-. Test Date : January 22, 2019

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1258.70
Middle	2 441	1263.20
High	2 480	1258.30




Tested by: Yu-Seog, Sim / Assistant Manager

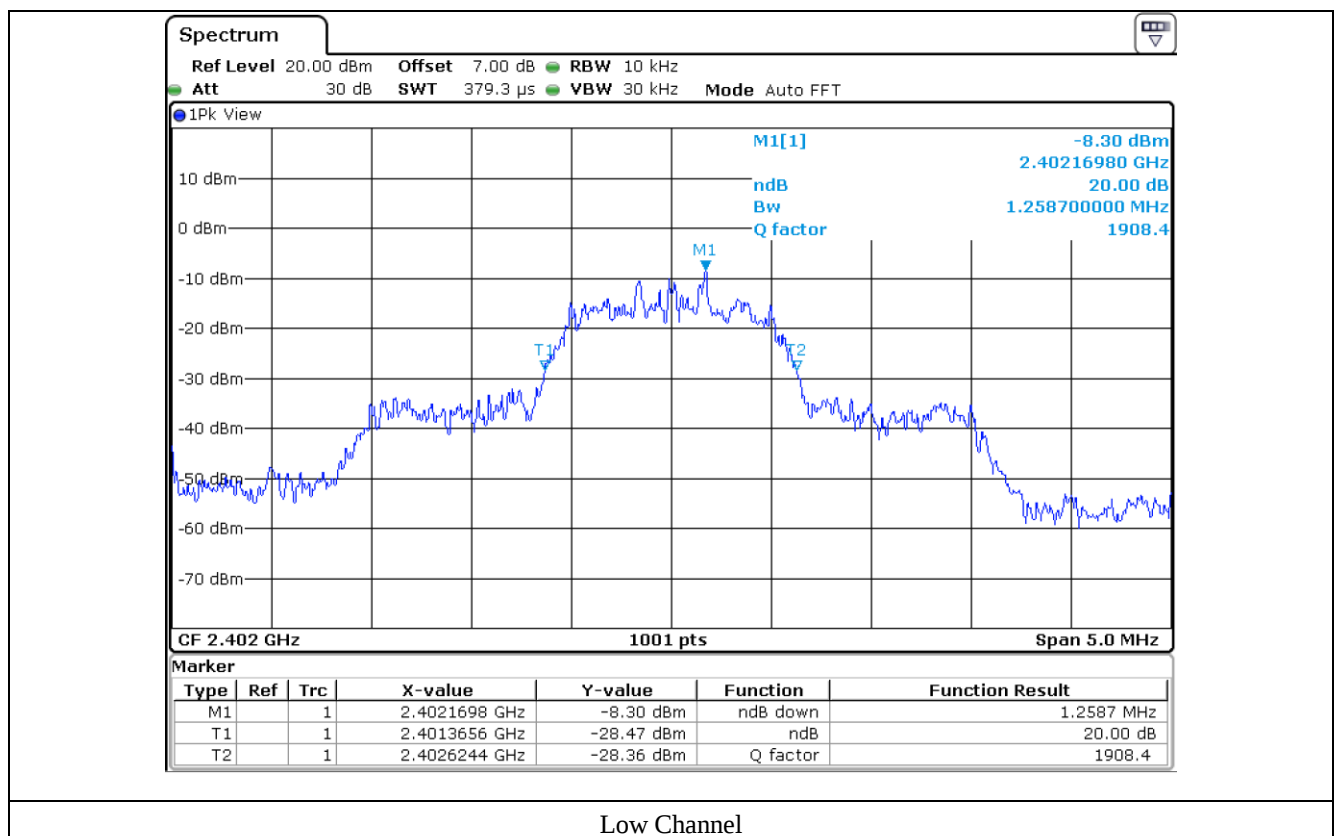

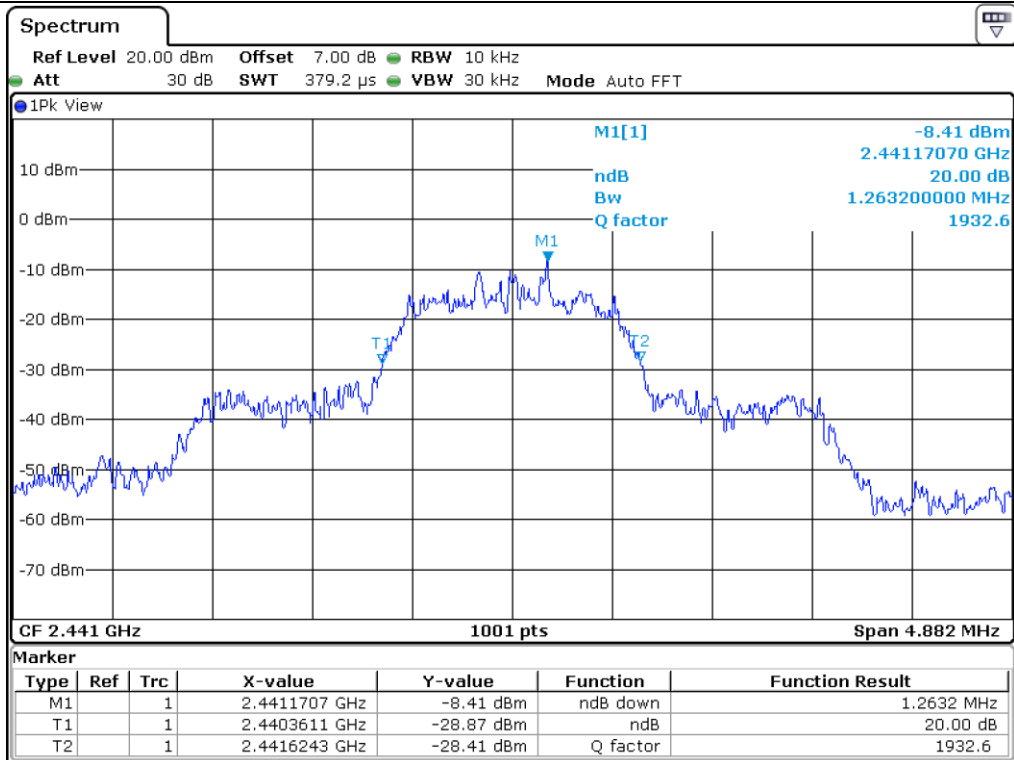

Middle Channel

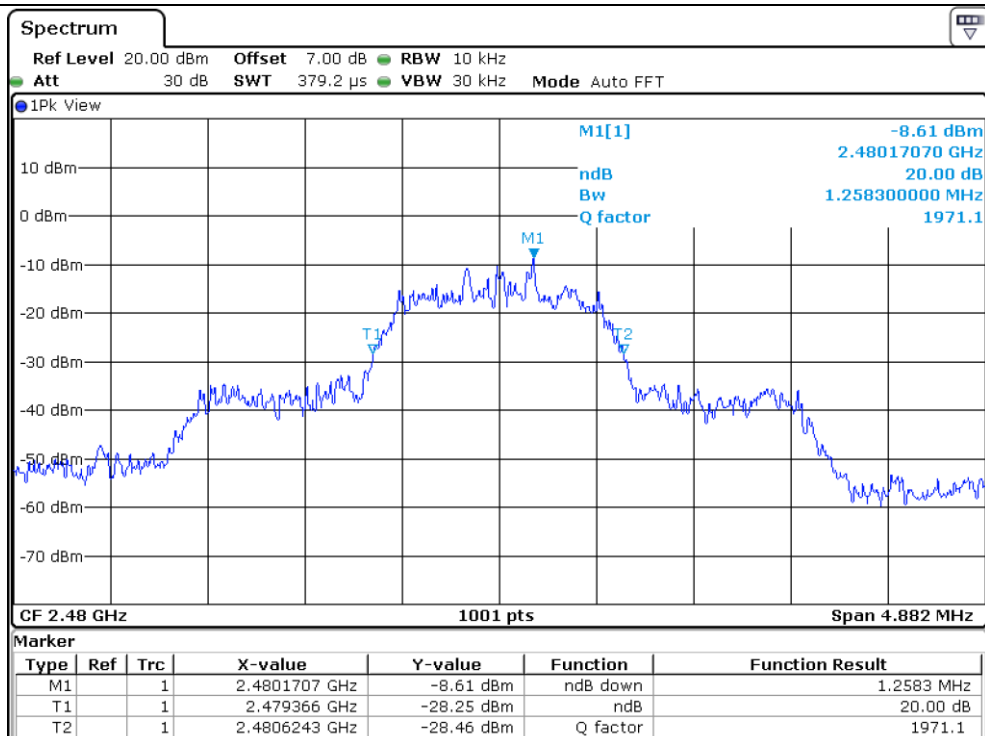

High Channel


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

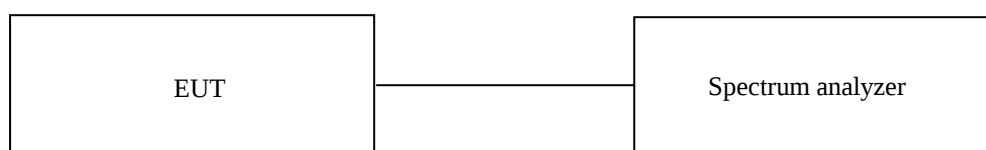

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 1 Mbps


-. Test Date : January 22, 2019

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
994.00	506.13	Separated by a minimum of 25 kHz



Tested by: Yu-Seog, Sim / Assistant Manager

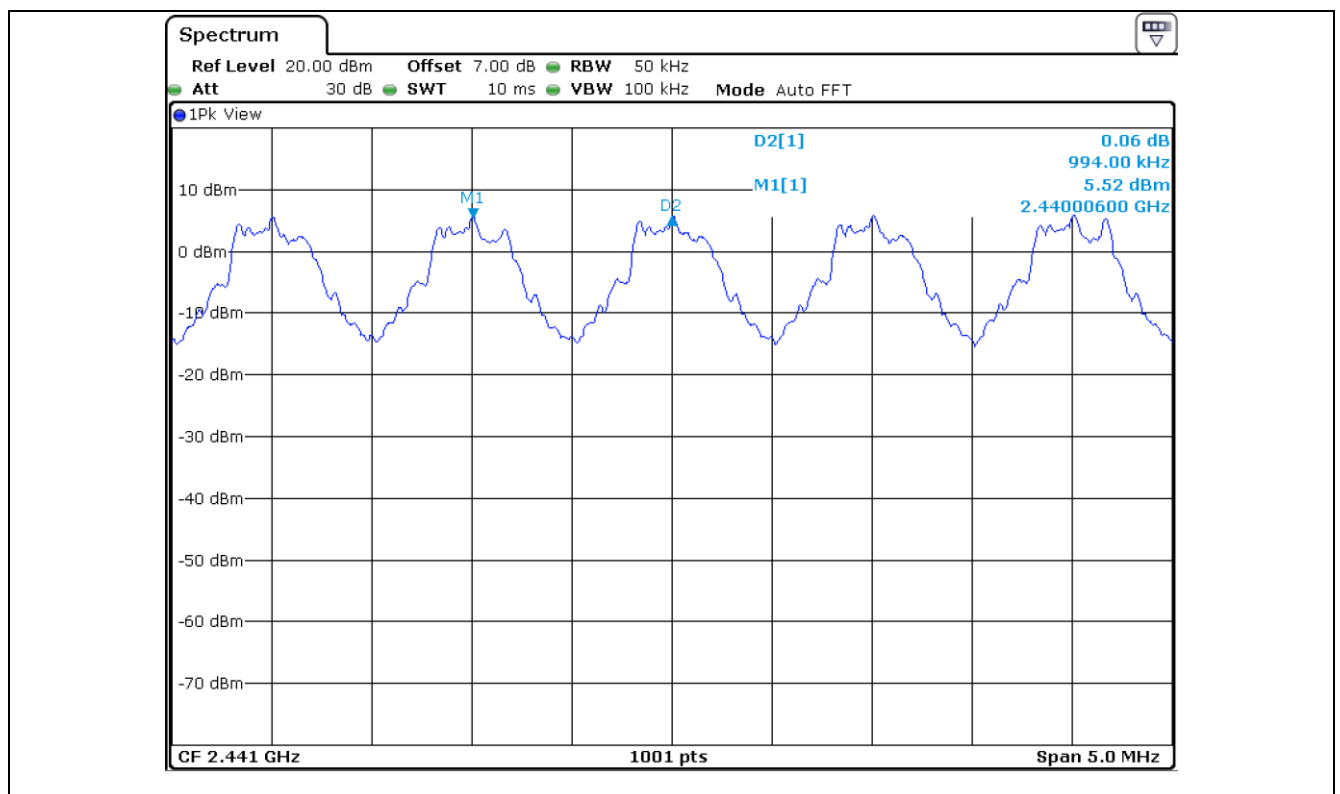

-. Test Result : Pass

523

Spectrum

Ref Level 20.00 dBm Offset 7.00 dB RBW 50 kHz
 Att 30 dB SWT 10 ms VBW 100 kHz Mode Auto FFT

1Pk View

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

D2[1] 0.06 dB
M1[1] 999.00 kHz
-0.55 dBm
2.44000100 GHz

M1
D2

CF 2.441 GHz 1001 pts Span 5.0 MHz

8.6 Test data for 3 Mbps


-. Test Date : January 22, 2019

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1004.00	835.87	Separated by a minimum of 25 kHz



Tested by: Yu-Seog, Sim / Assistant Manager

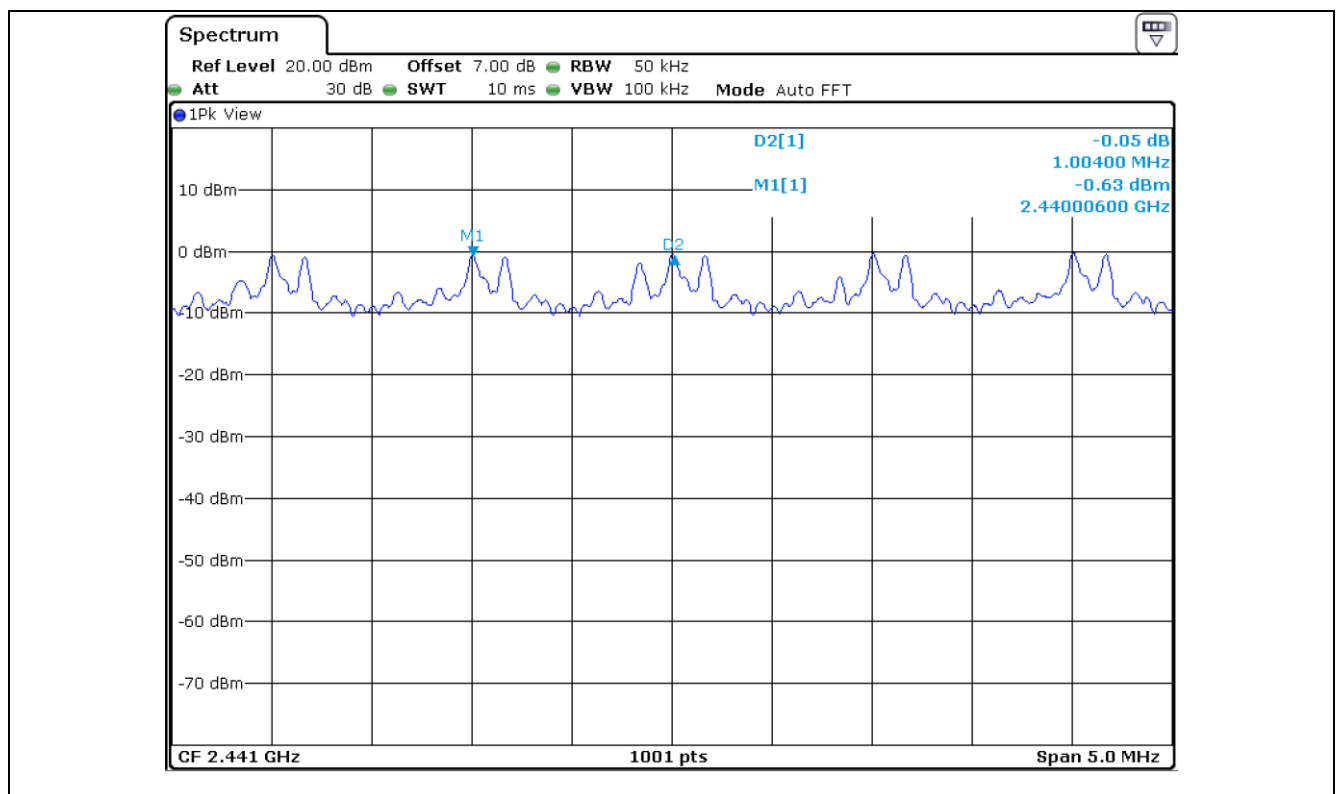


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to frequency band of operation and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

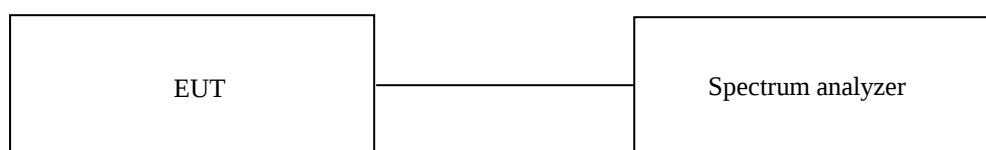

9.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

9.4 Test data for 1 Mbps


-. Test Date : January 22, 2019


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64




Tested by: Yu-Seog, Sim / Assistant Manager

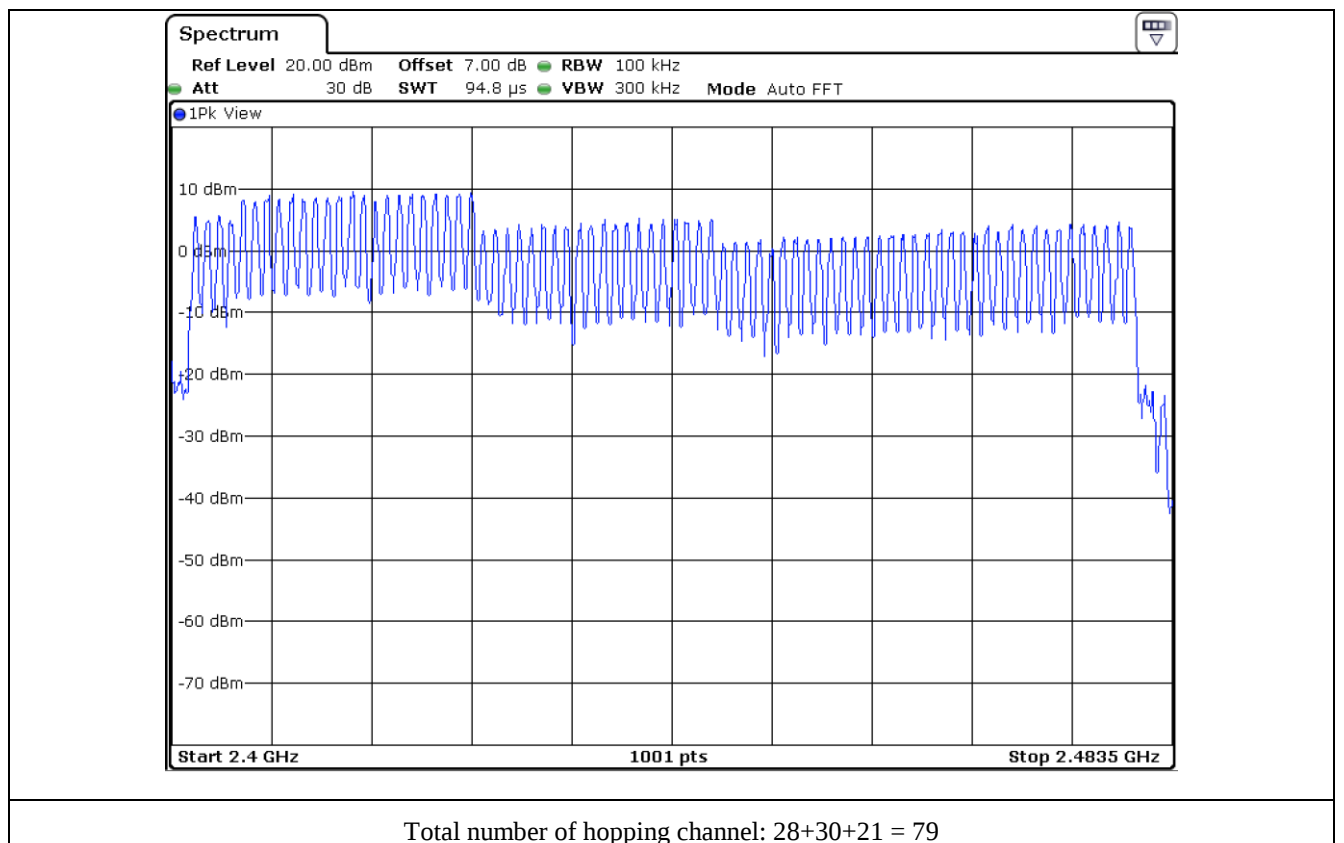


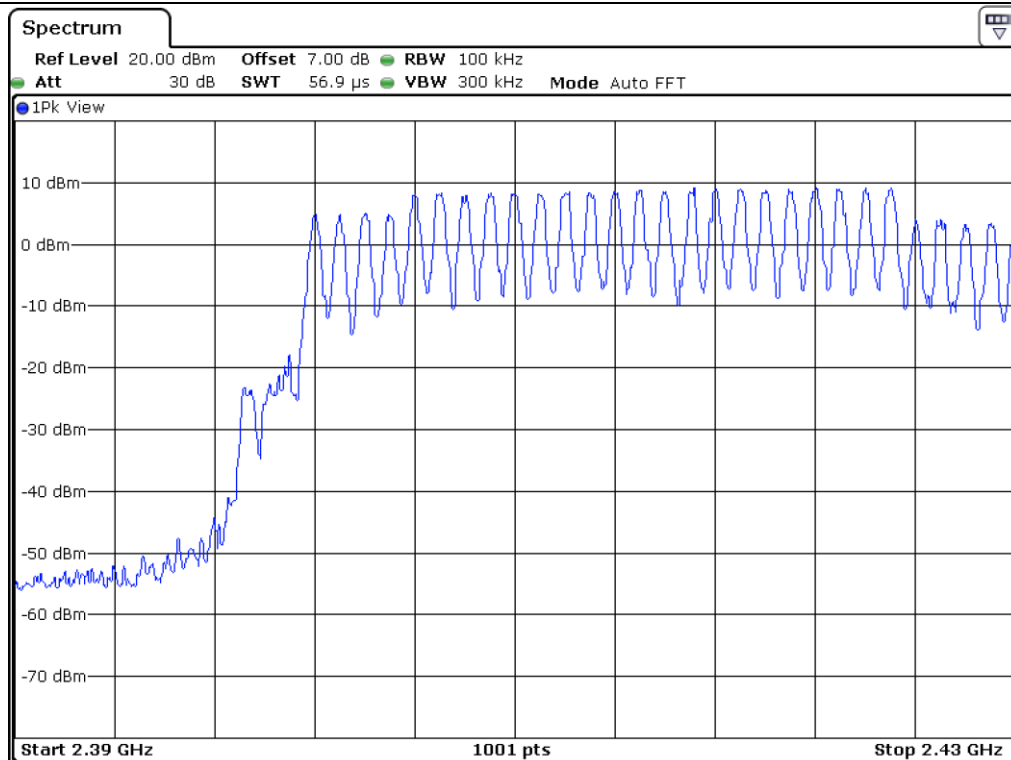

Number of hopping channel: 28

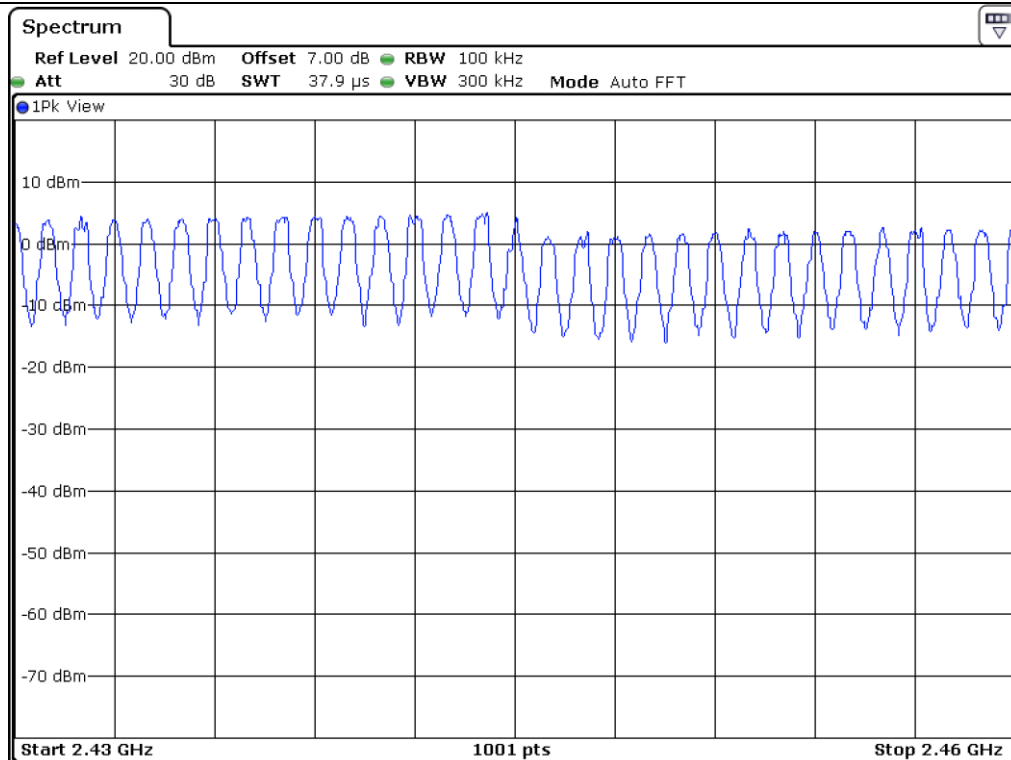

Number of hopping channel: 30

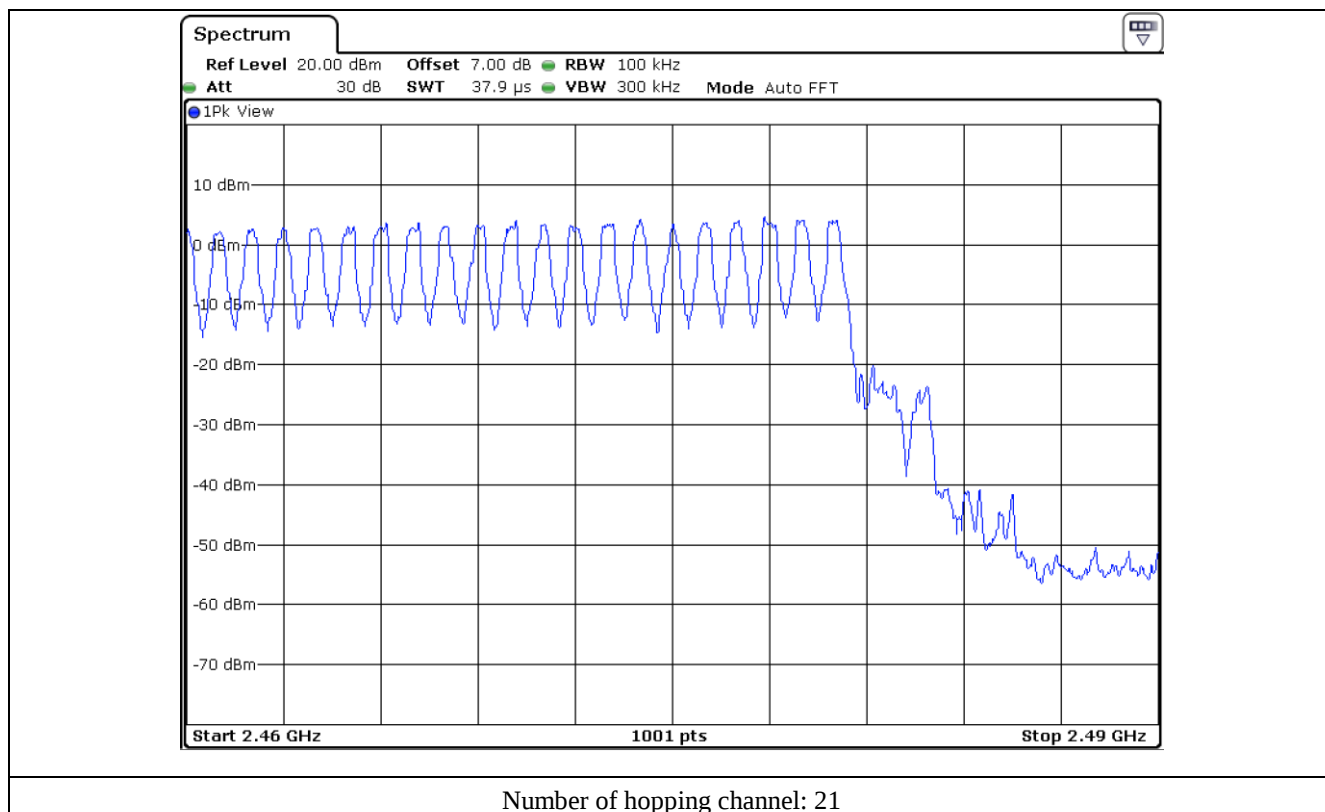

9.5 Test data for 2 Mbps


-. Test Date : January 22, 2019


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64




Tested by: Yu-Seog, Sim / Assistant Manager

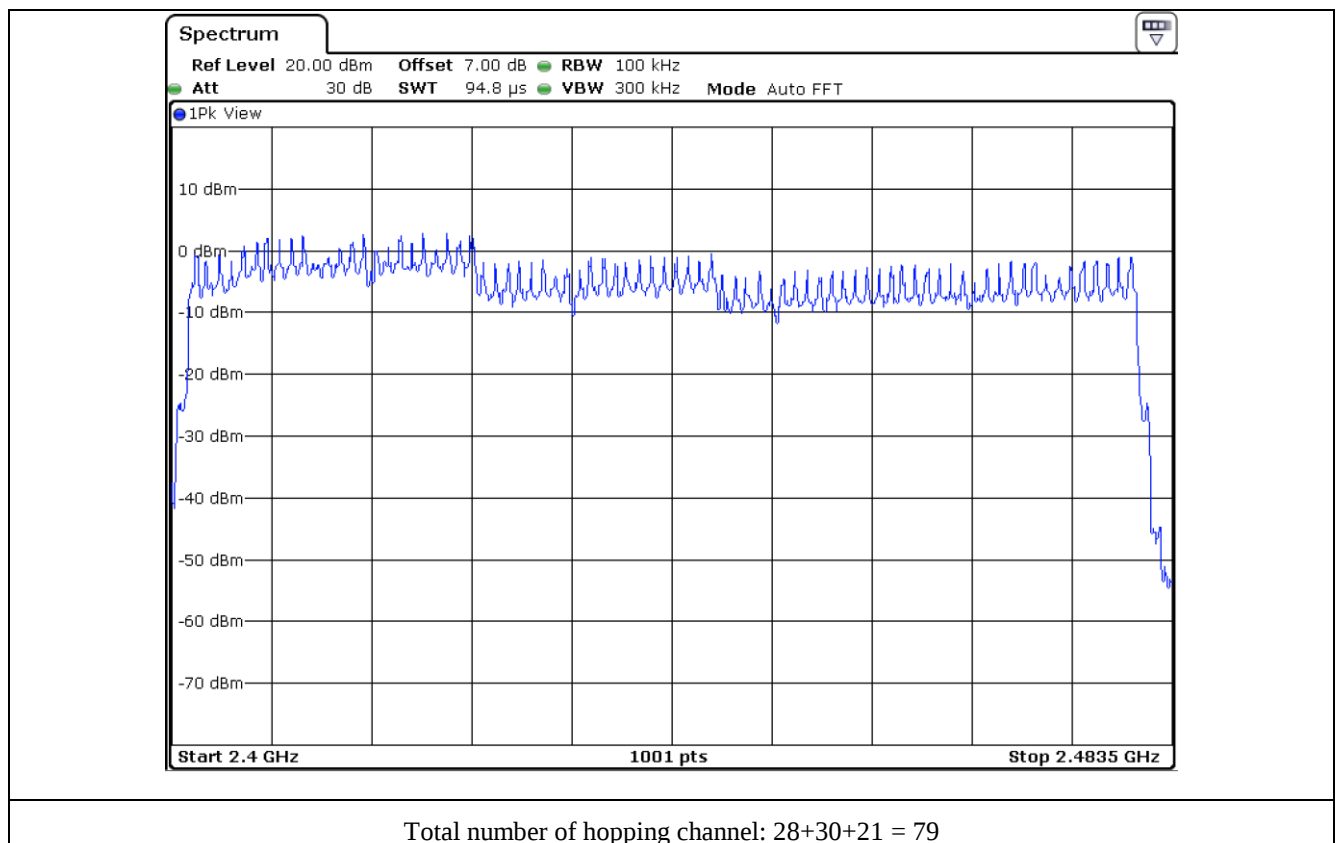


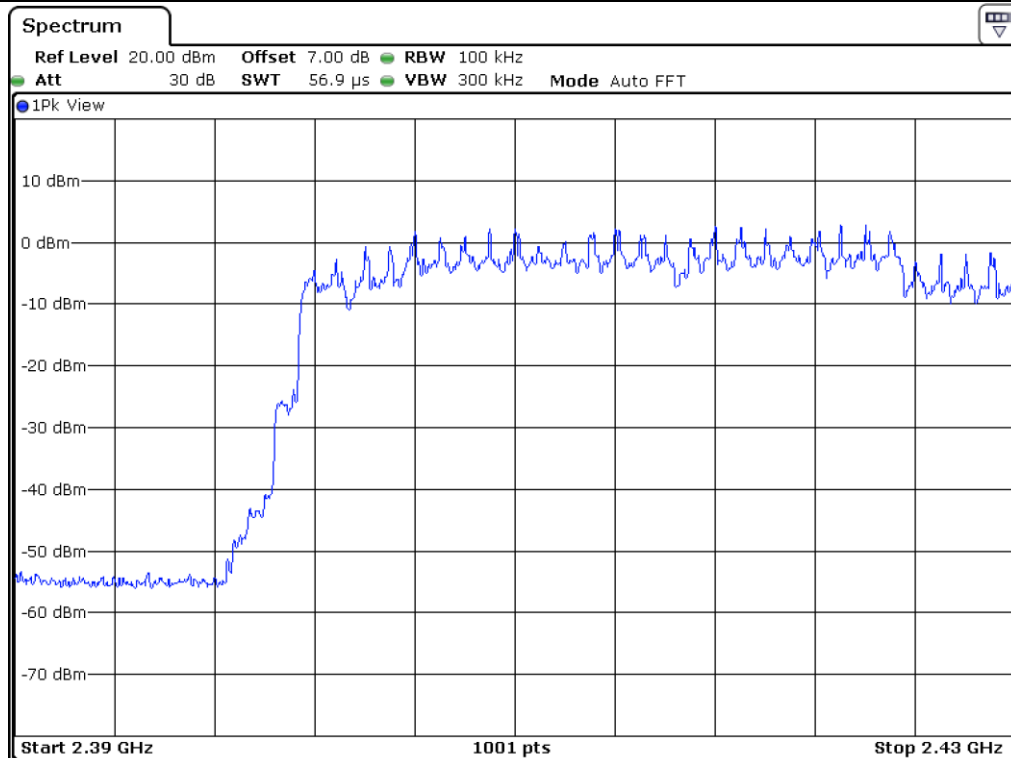

Number of hopping channel: 28

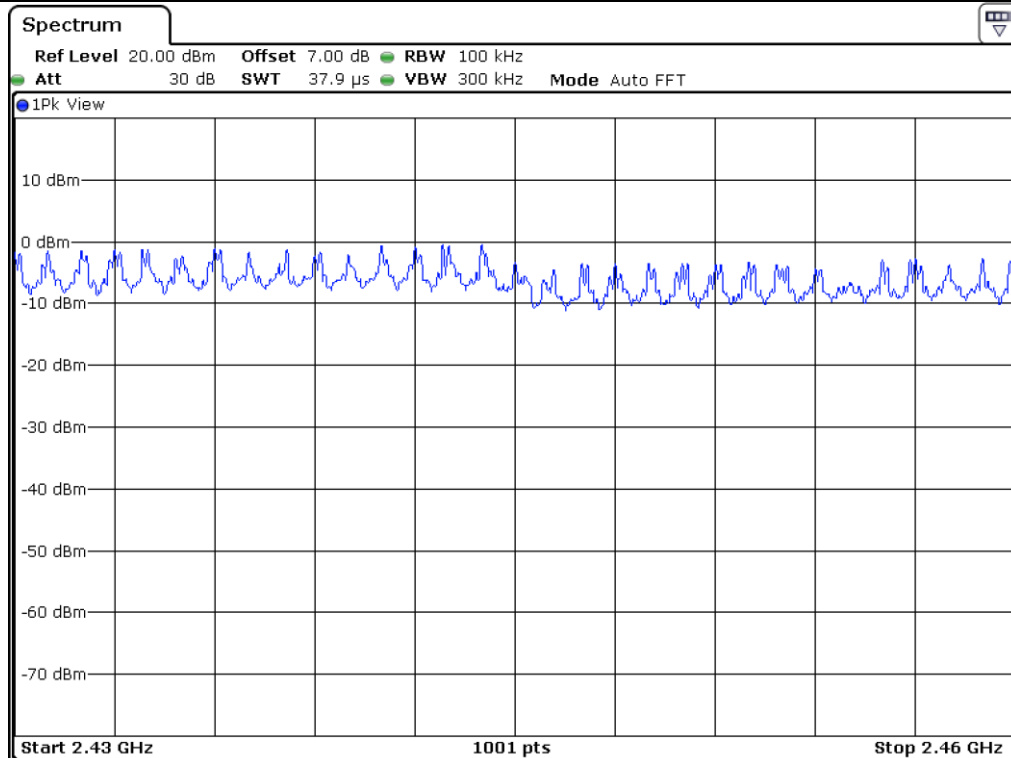

Number of hopping channel: 30

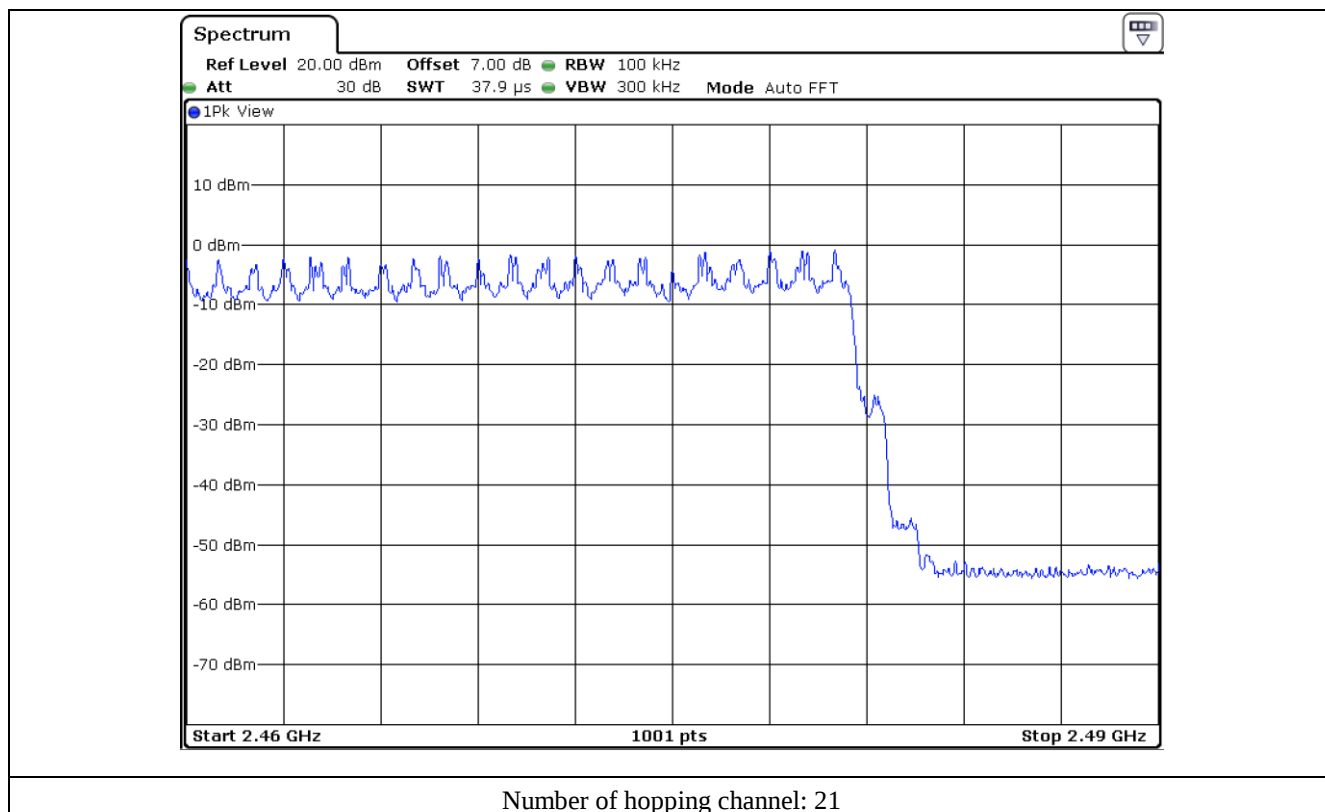

9.6 Test data for 3 Mbps


-. Test Date : January 22, 2019


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64




Tested by: Yu-Seog, Sim / Assistant Manager

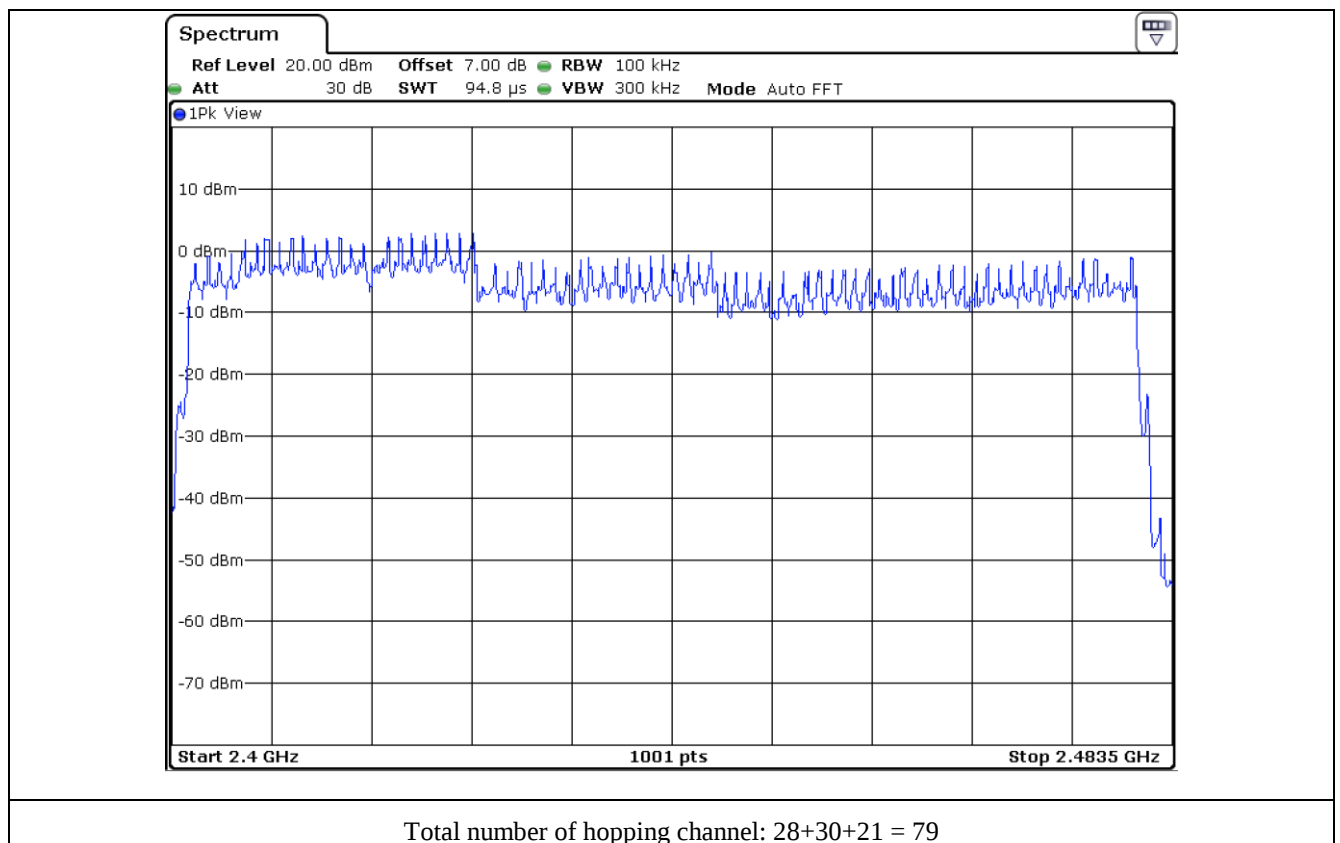


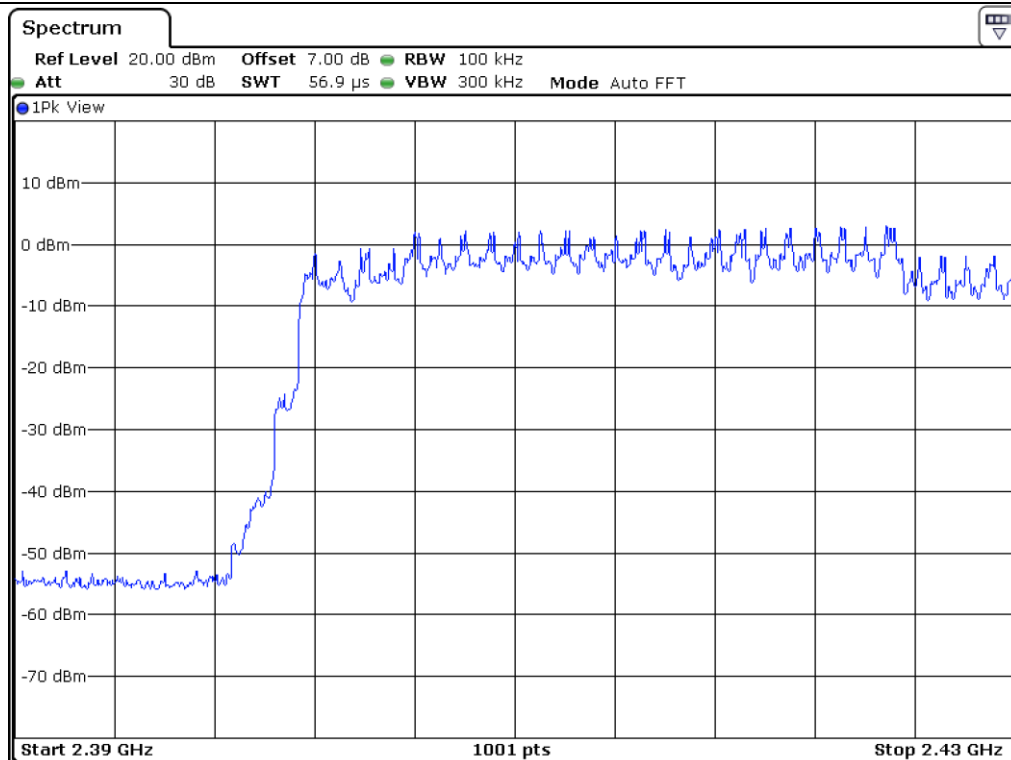

Number of hopping channel: 28

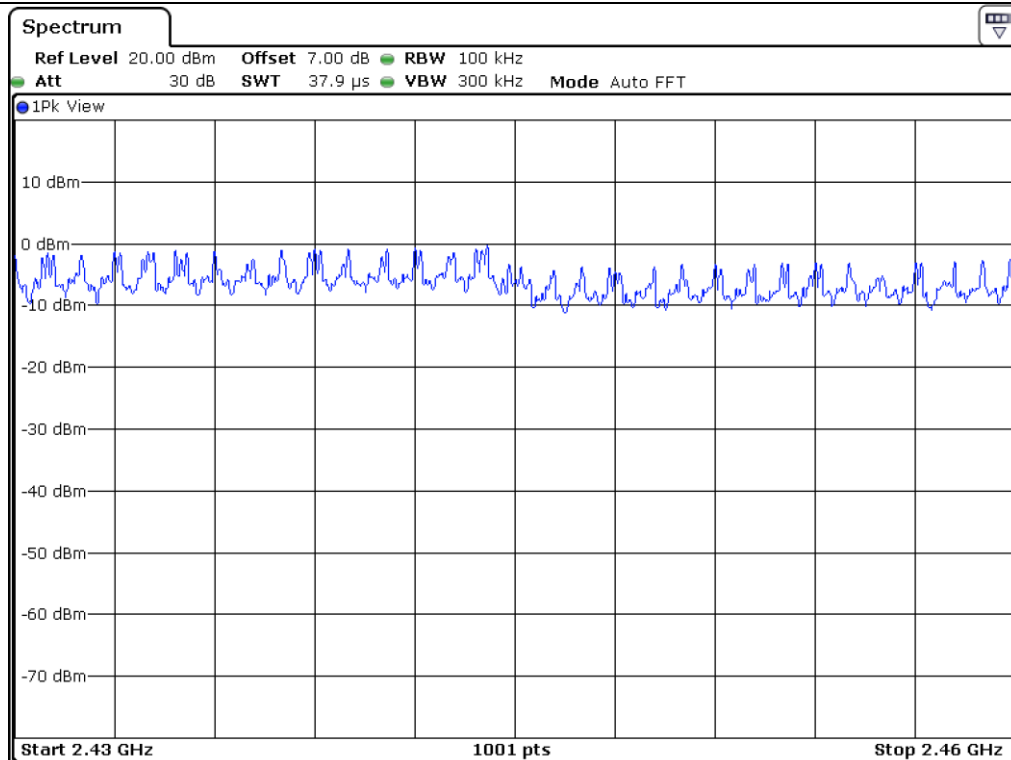

Number of hopping channel: 30

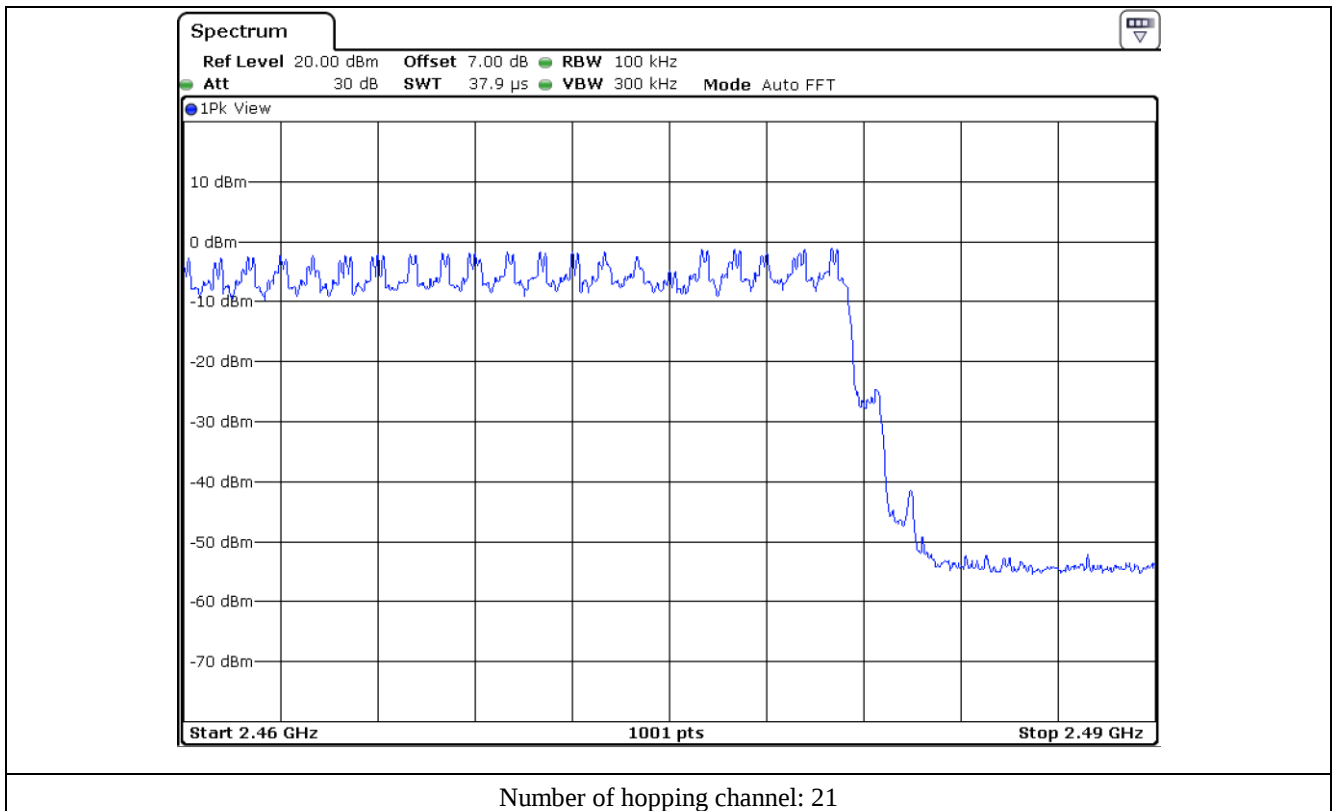


10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

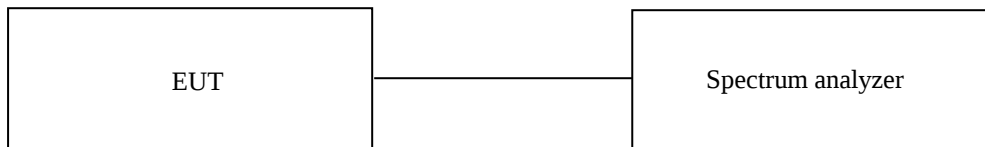

10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data for 1 Mbps

-. Test Date : January 22, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.380	10.13	31.6	121.64	400	PASS
DH3	1.640	5.060	31.6	262.23	400	
DH5	2.890	3.38	31.6	308.68	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Yu-Seog, Sim / Assistant Manager

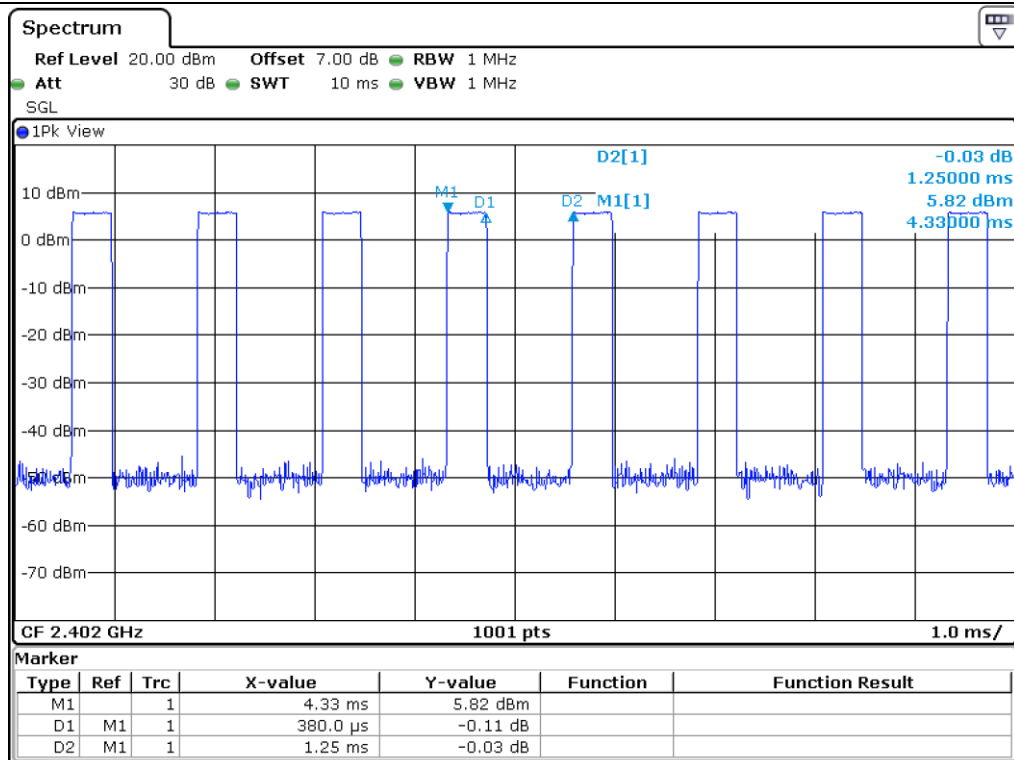

DH1

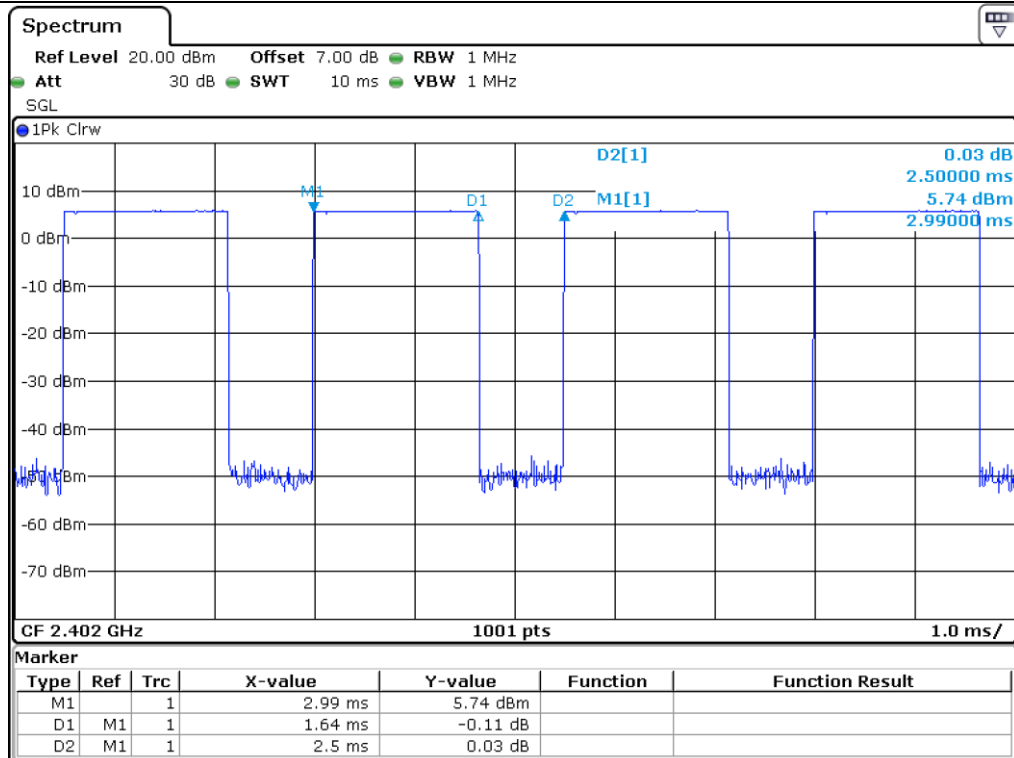

DH3

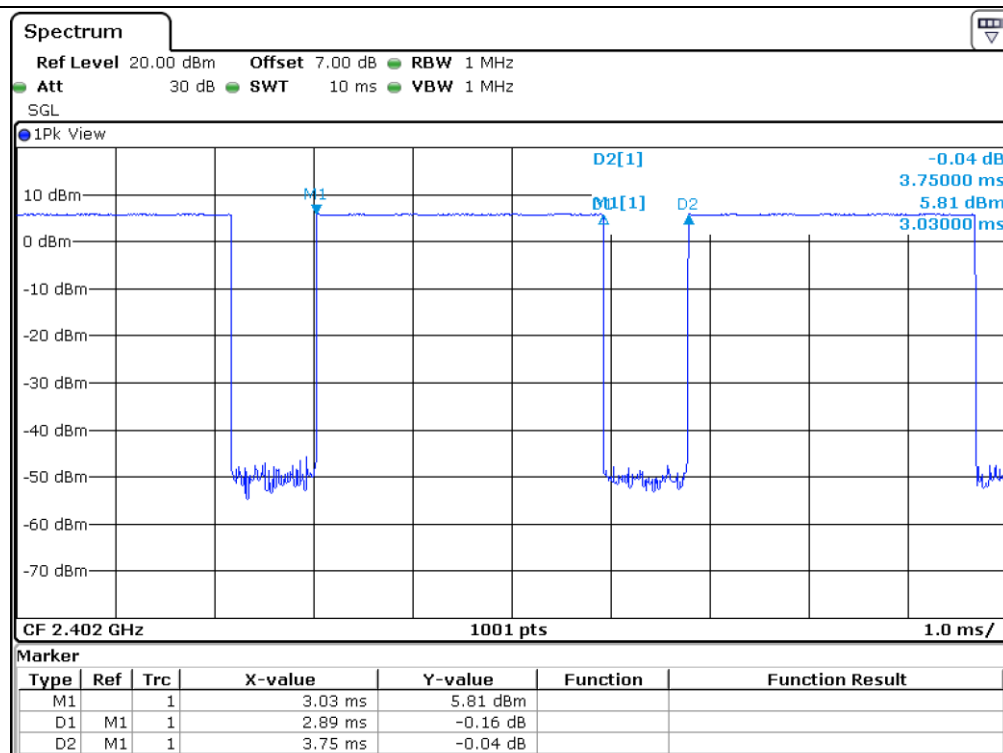

DH5

10.5 Test data for 2 Mbps

-. Test Date : January 22, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For 2-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 2-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 2-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for 2-DH1, and 5.06 times ($= 1\,600/4/79$) for 2-DH3, and 3.38 times ($= 1\,600/6/79$) for 2-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
2-DH1	0.390	10.13	31.6	124.84	400	PASS
2-DH3	1.640	5.060	31.6	262.23	400	
2-DH5	2.880	3.38	31.6	307.61	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Yu-Seog, Sim / Assistant Manager

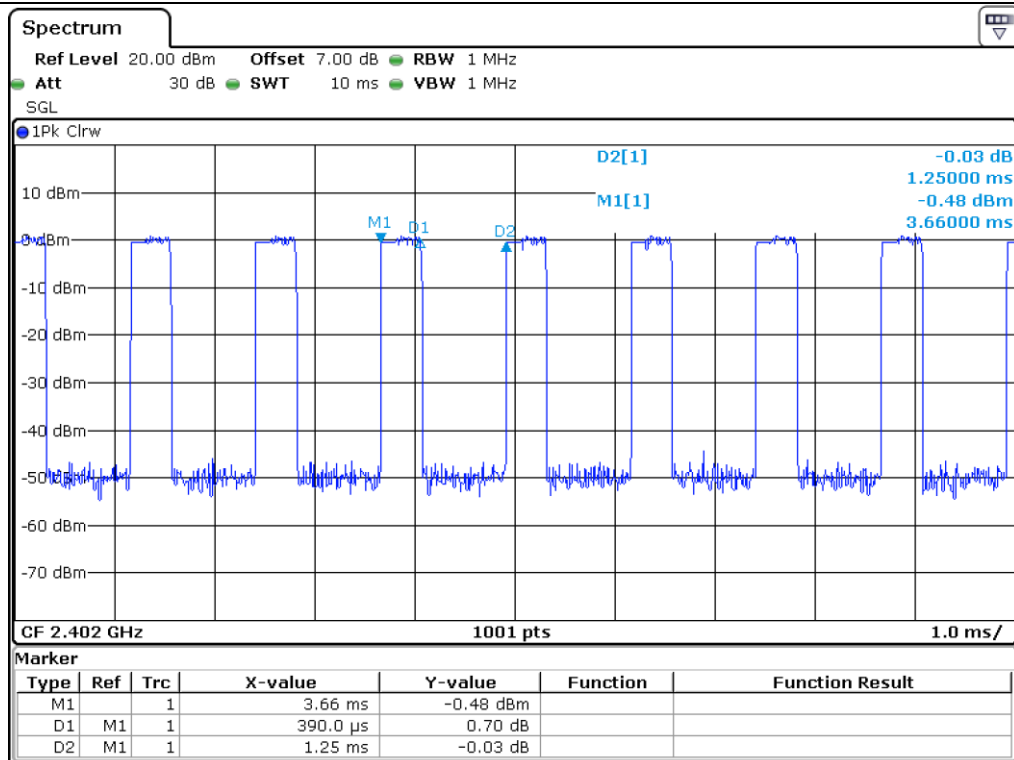

2-DH1

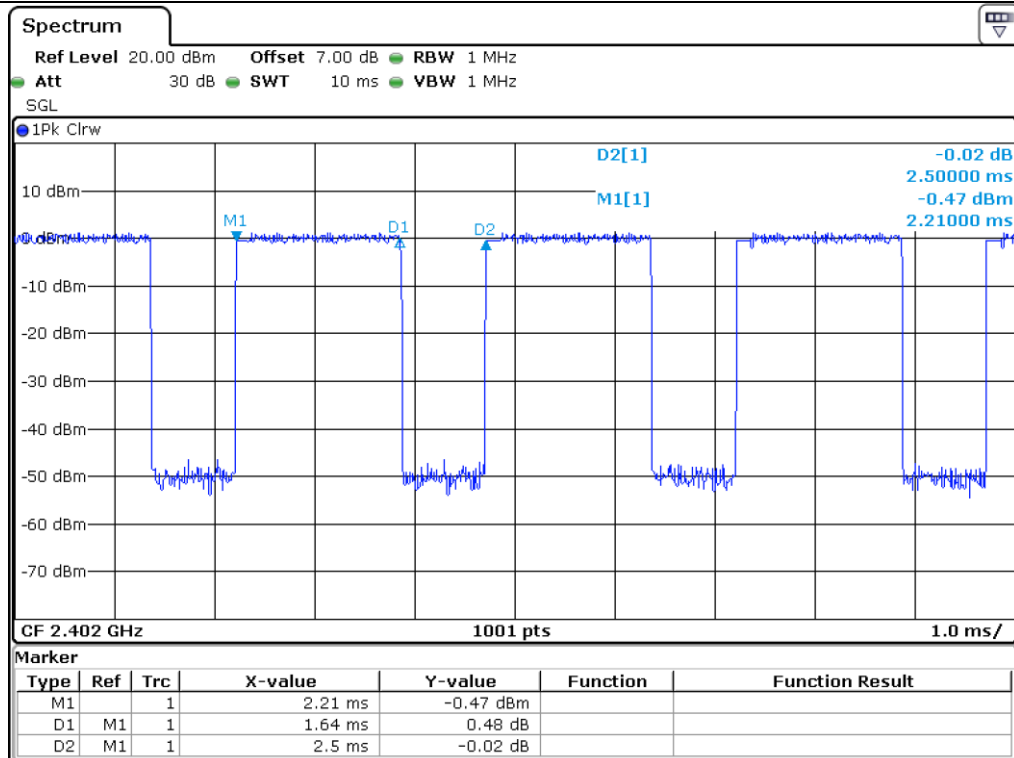

2-DH3

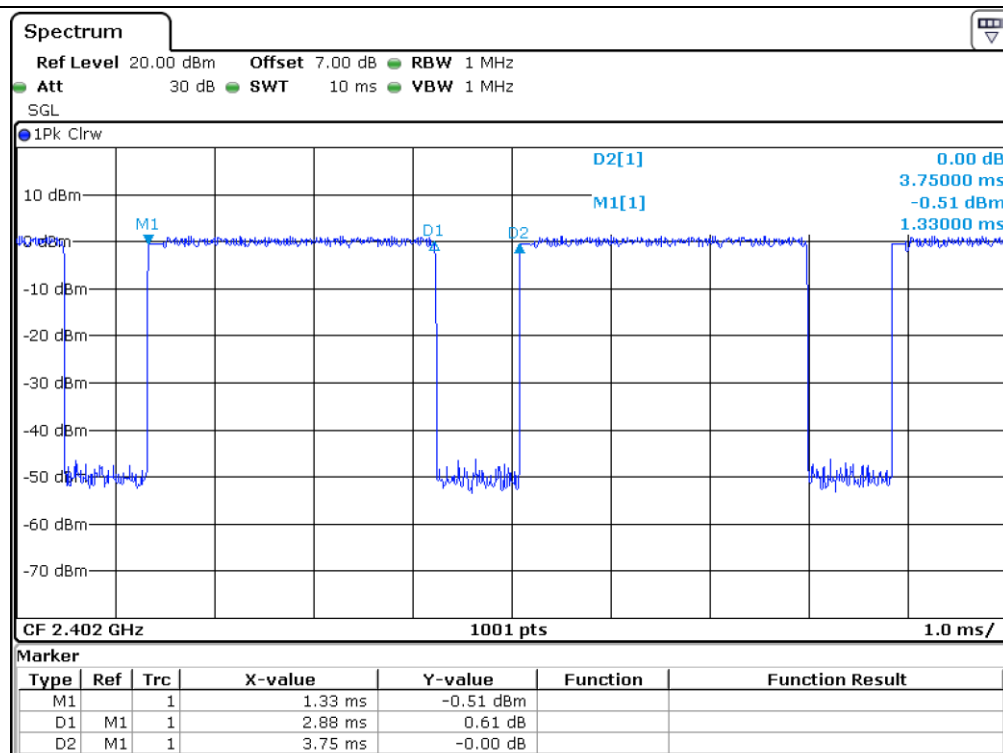

2-DH5

10.6 Test data for 3 Mbps

-. Test Date : January 22, 2019

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For 3-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 3-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 3-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for 3-DH1, and 5.06 times ($= 1\,600/4/79$) for 3-DH3, and 3.38 times ($= 1\,600/6/79$) for 3-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
3-DH1	0.380	10.13	31.6	121.64	400	PASS
3-DH3	1.640	5.060	31.6	262.23	400	
3-DH5	2.900	3.38	31.6	309.74	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time * Hops per second with channels * period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Yu-Seog, Sim / Assistant Manager

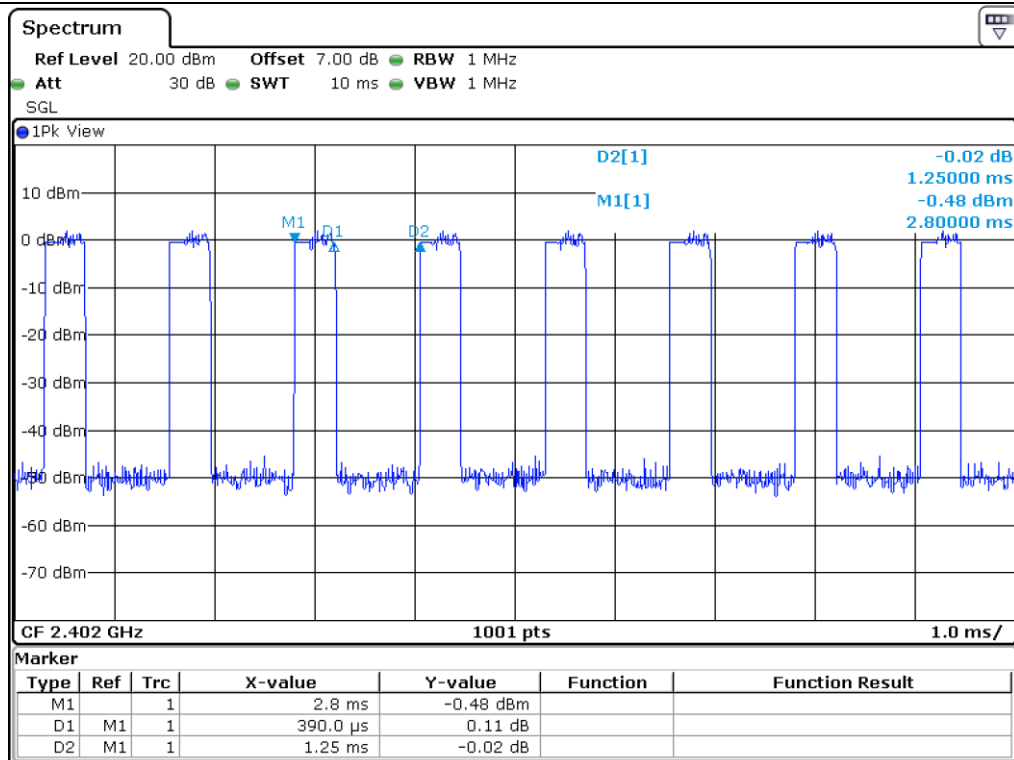

3-DH1

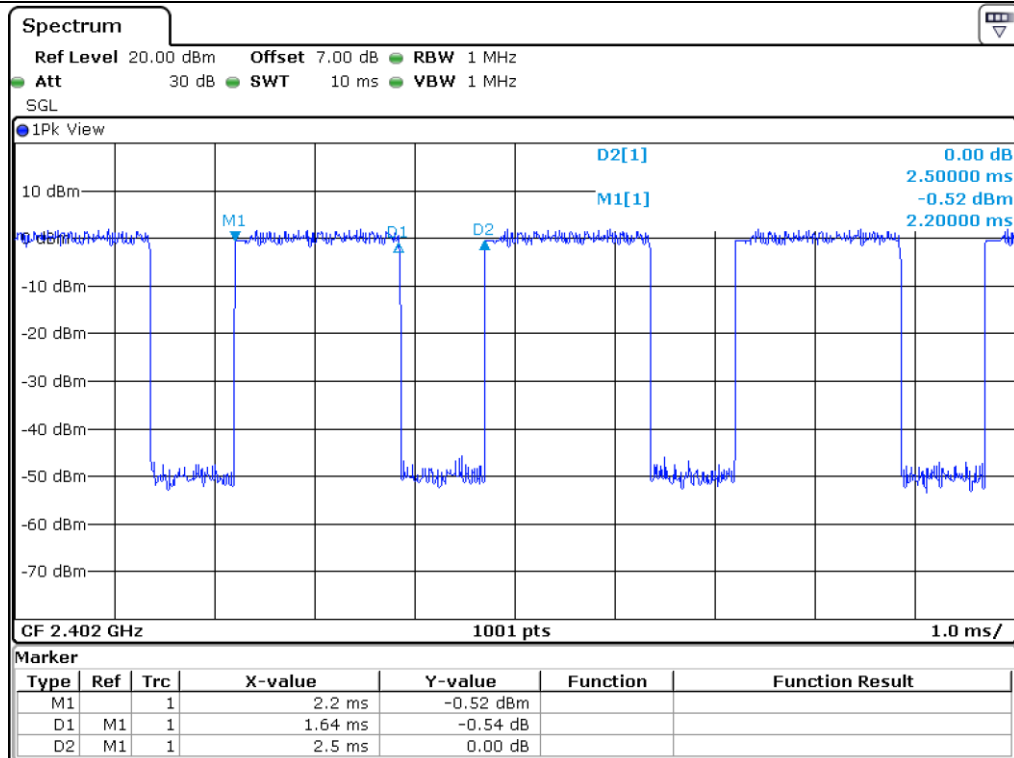

3-DH3

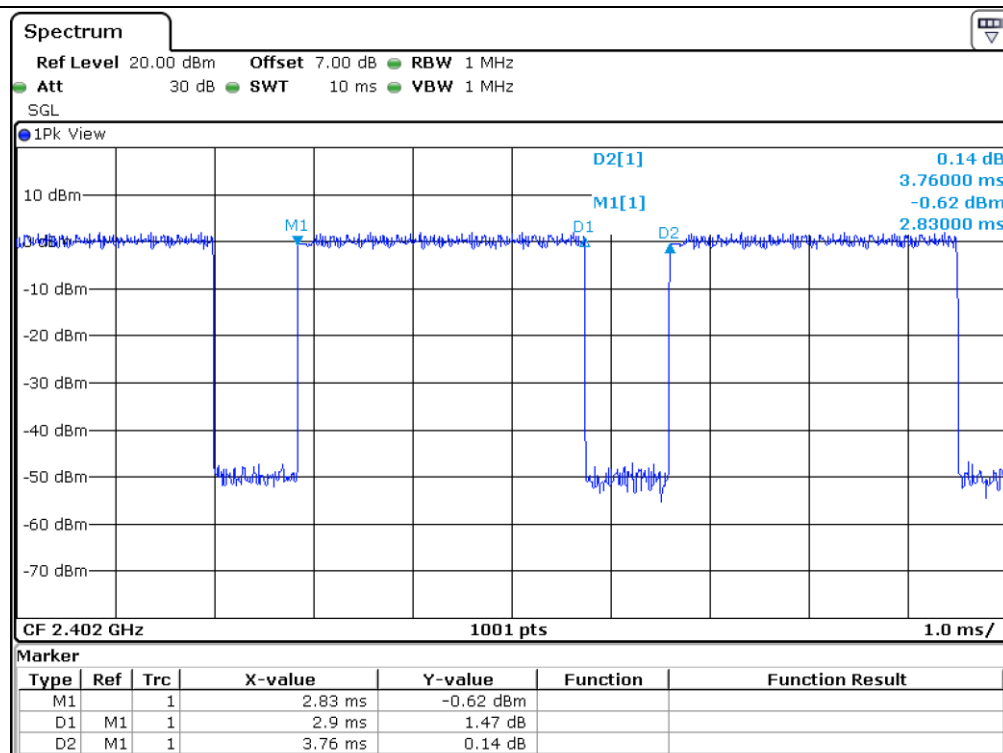

3-DH5


11. MAXIMUM PEAK OUTPUT POWER

11.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H

11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT.
The EUT was operating in transmit mode at the appropriate center frequency.

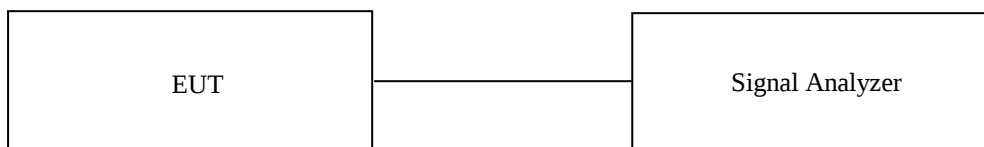

11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for 1 Mbps

-. Test Date : January 22, 2019


-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2402.00	6.34	21.00	14.66
MIDDLE	2441.00	5.96	21.00	15.04
HIGH	2480.00	5.51	21.00	15.49


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Yu-Seog, Sim / Assistant Manager

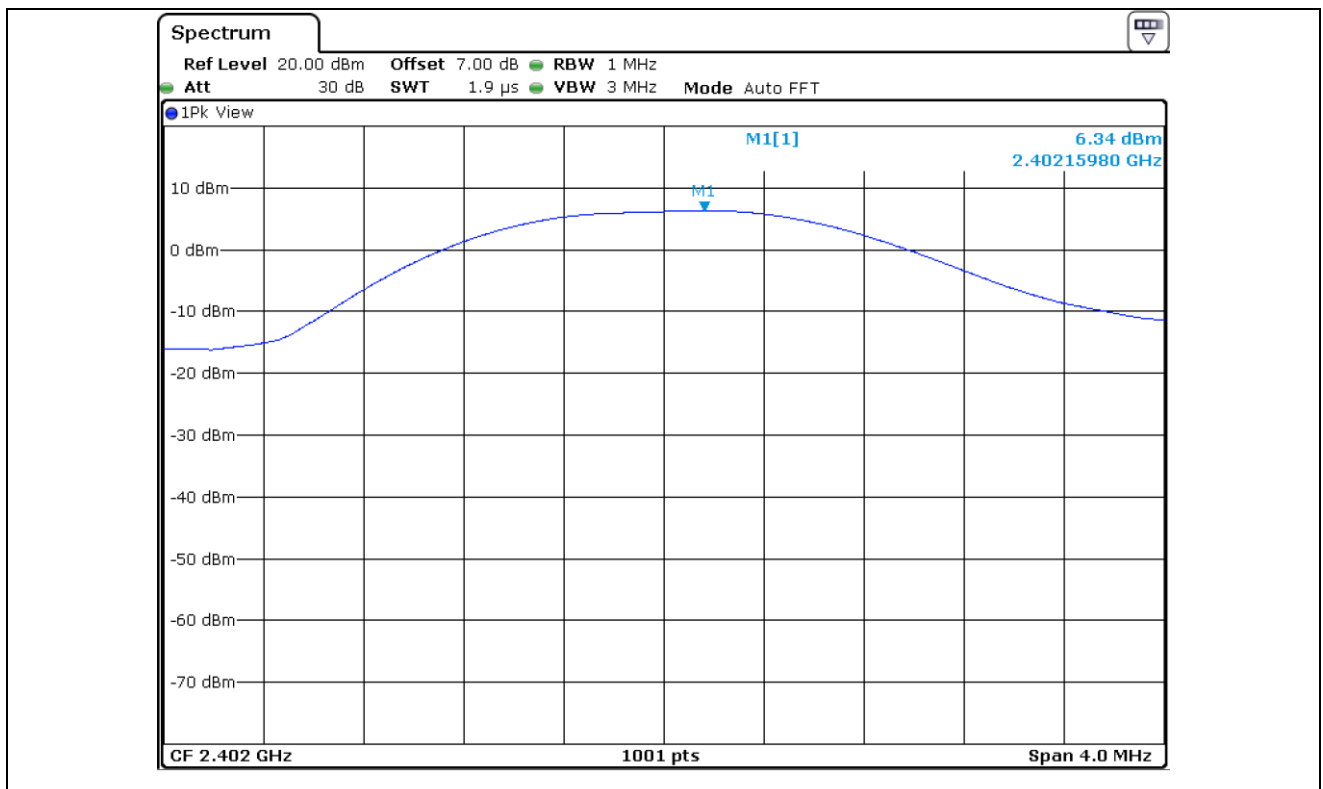

Low Channel

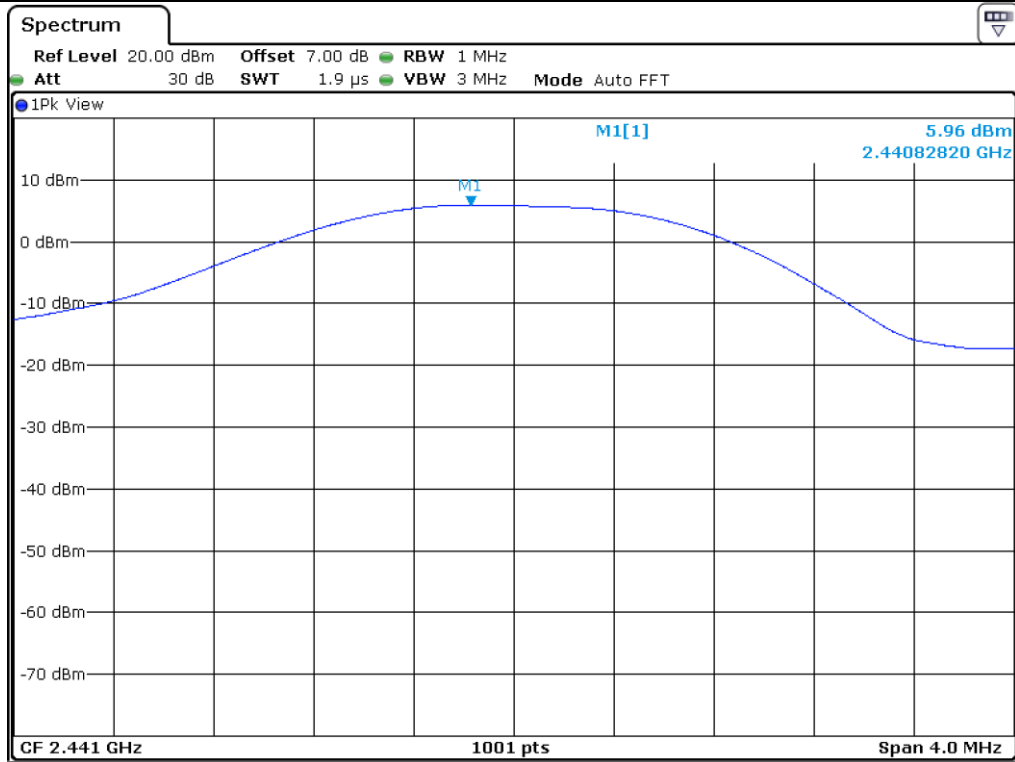

Middle Channel

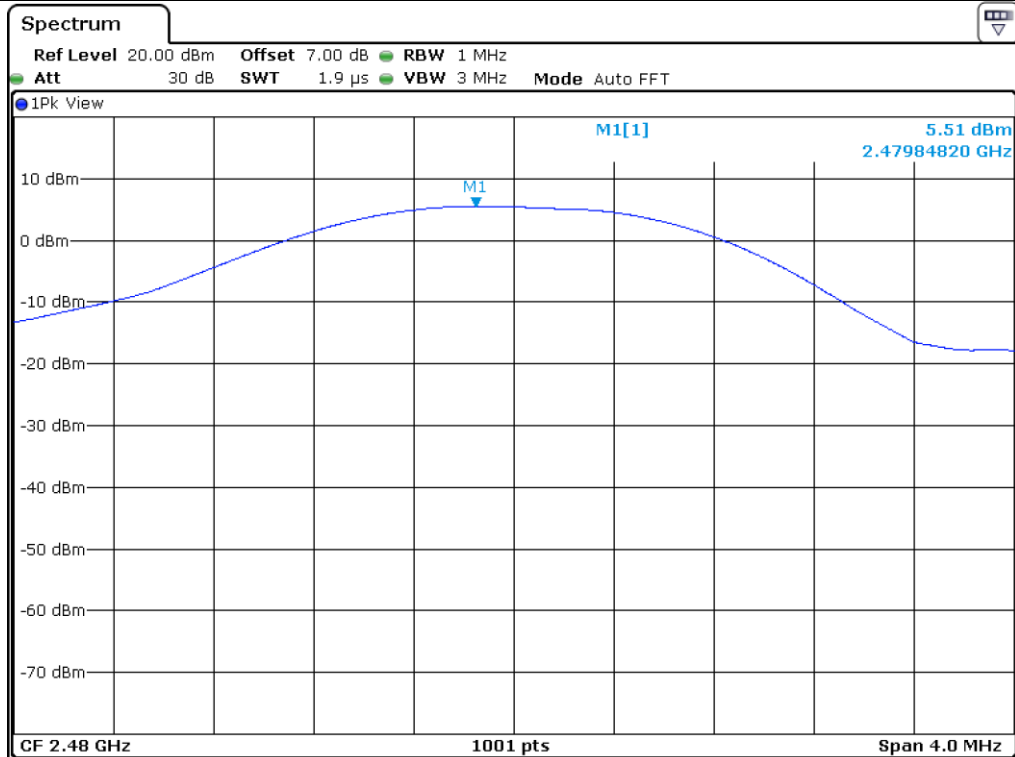

High Channel

11.5 Test data for 2 Mbps

-. Test Date : January 22, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2402.00	1.92	21.00	19.08
MIDDLE	2441.00	1.81	21.00	19.19
HIGH	2480.00	1.46	21.00	19.54

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Yu-Seog, Sim / Assistant Manager

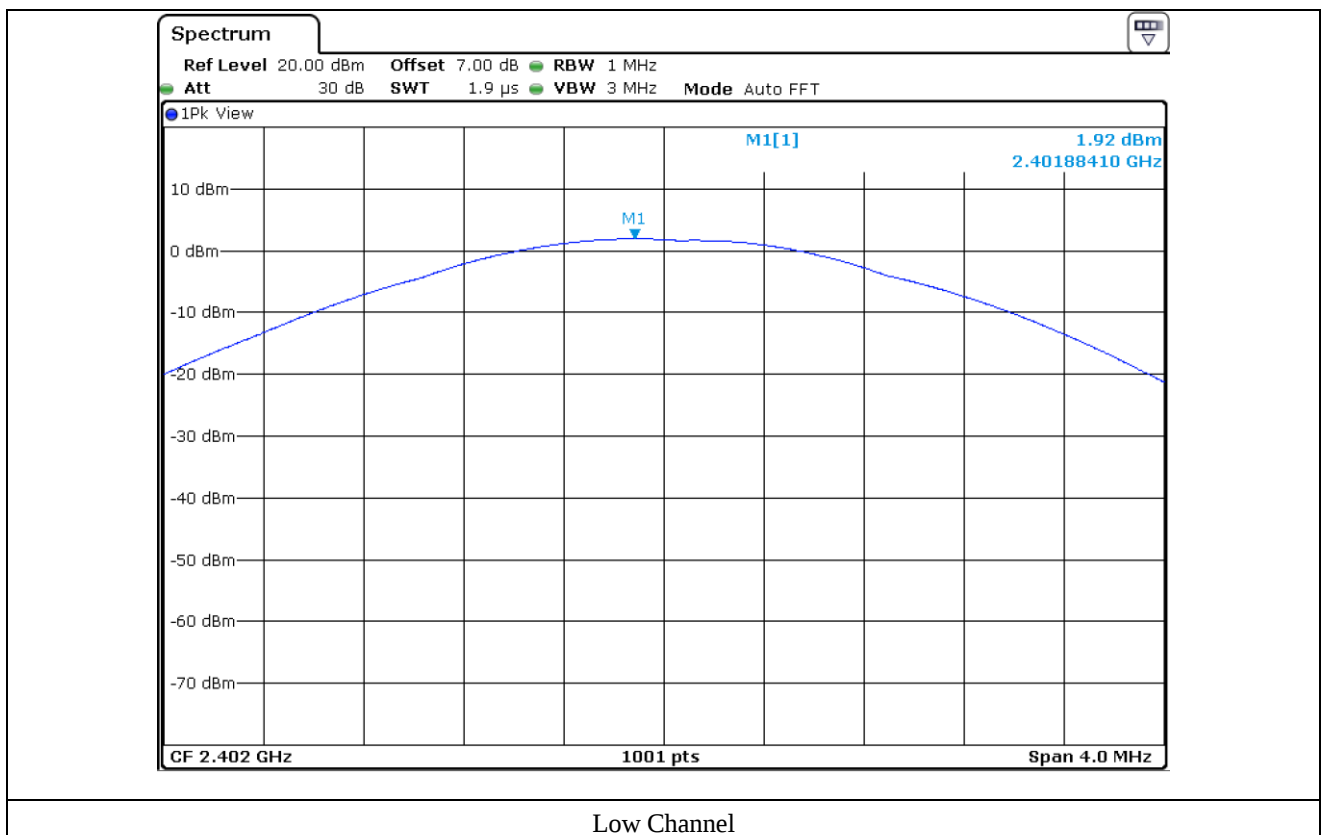

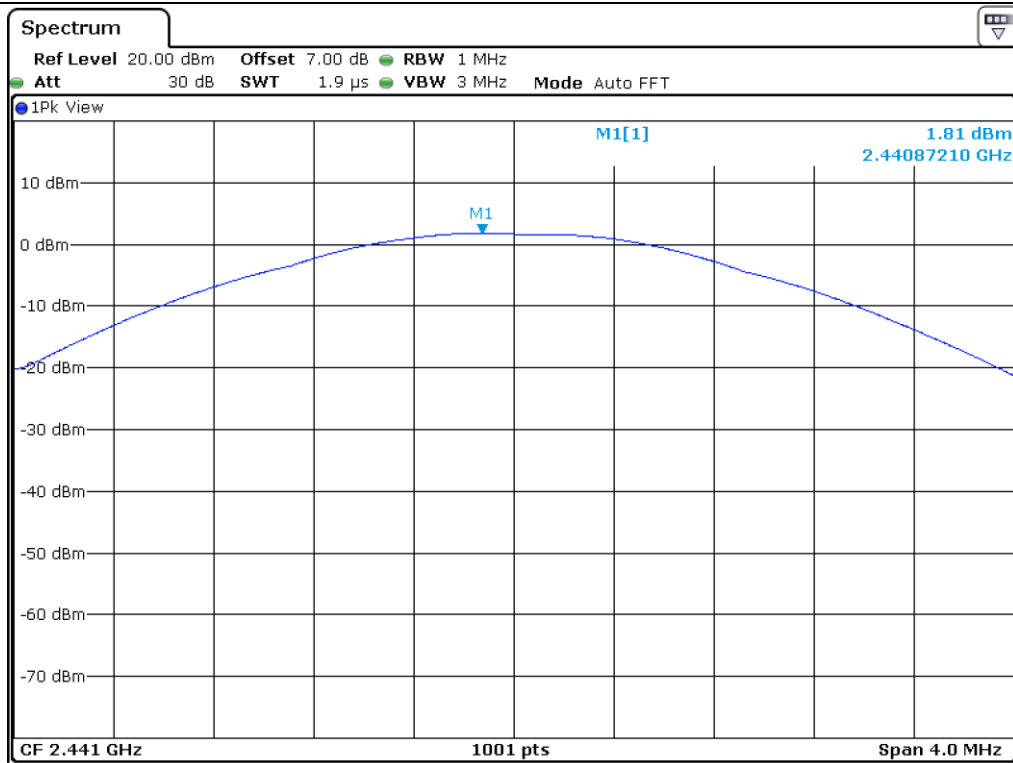

Middle Channel

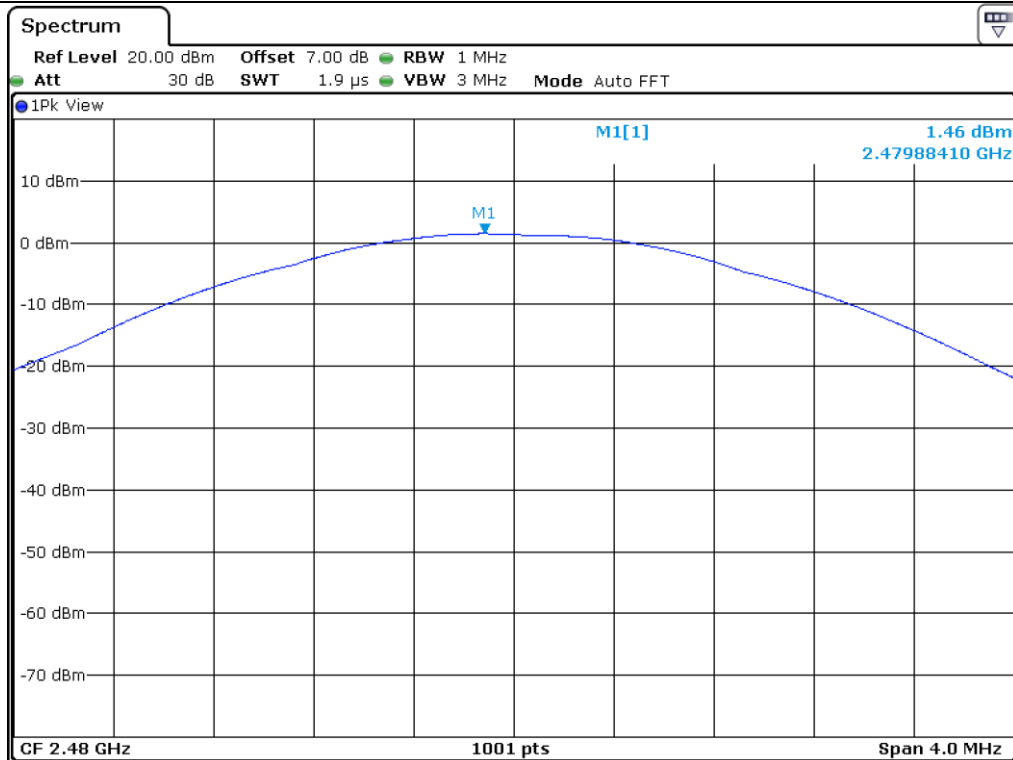

High Channel

11.6 Test data for 3 Mbps

-. Test Date : January 22, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2402.00	2.42	21.00	18.58
MIDDLE	2441.00	2.33	21.00	18.67
HIGH	2480.00	2.05	21.00	18.95

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Yu-Seog, Sim / Assistant Manager

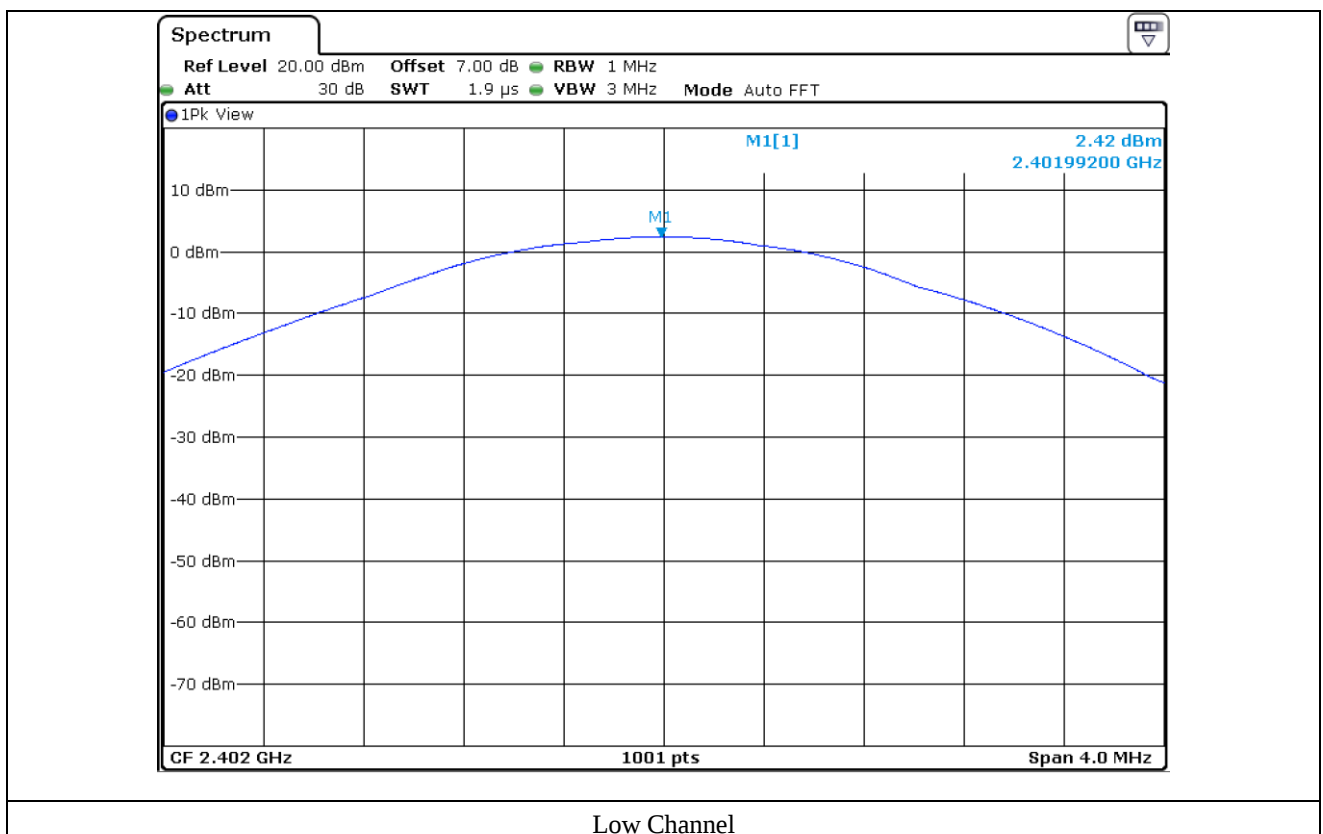

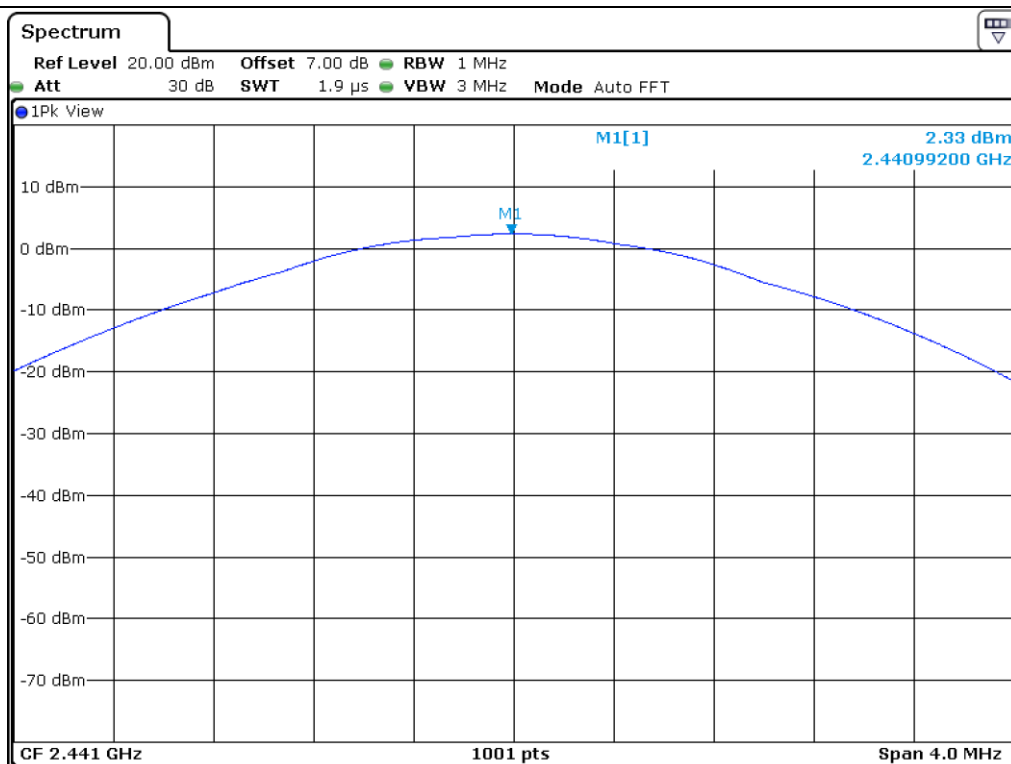

Middle Channel

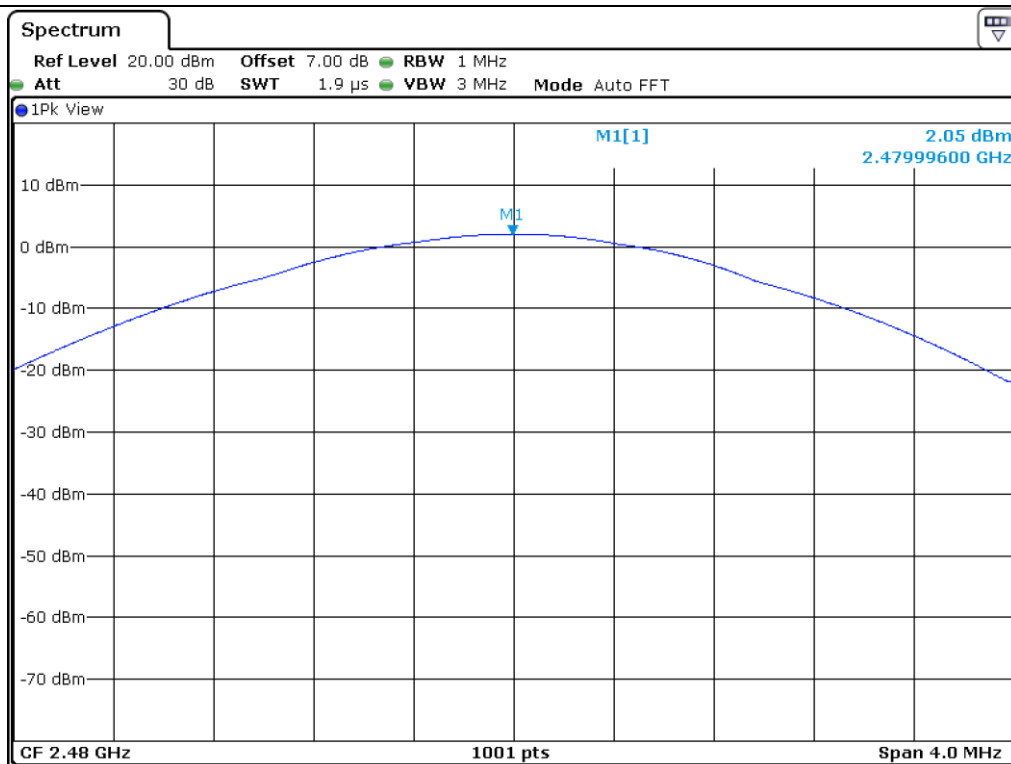

High Channel


12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

12.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H

12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

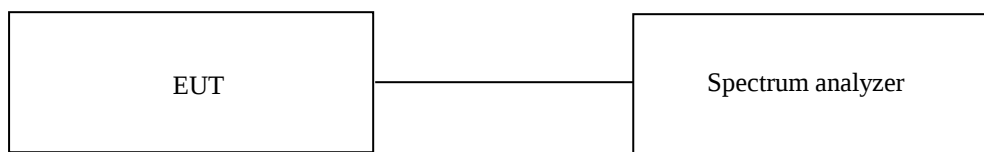

12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


12.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
□ -	ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Oct. 22, 2018 (1Y)
■ -	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2018 (1Y)
□ -	FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Aug. 23, 2018 (1Y)
■ -	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 28, 2018 (1Y)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)
■ -	SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Aug. 24, 2018 (1Y)
■ -	MA-4000XPET	Innco Systems GmbH	Antenna Master	MA4000/509	N/A
□ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DT3000-3t	Innco Systems GmbH	Turn Table	N/A	N/A
□ -	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	Jun 05, 2018 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA91700179	Jul. 28, 2017 (2Y)
■ -	SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	May. 15, 2018 (1Y)


All test equipment used is calibrated on a regular basis.

12.5 Test data for conducted emission


12.5.1 Test data for 1 Mbps

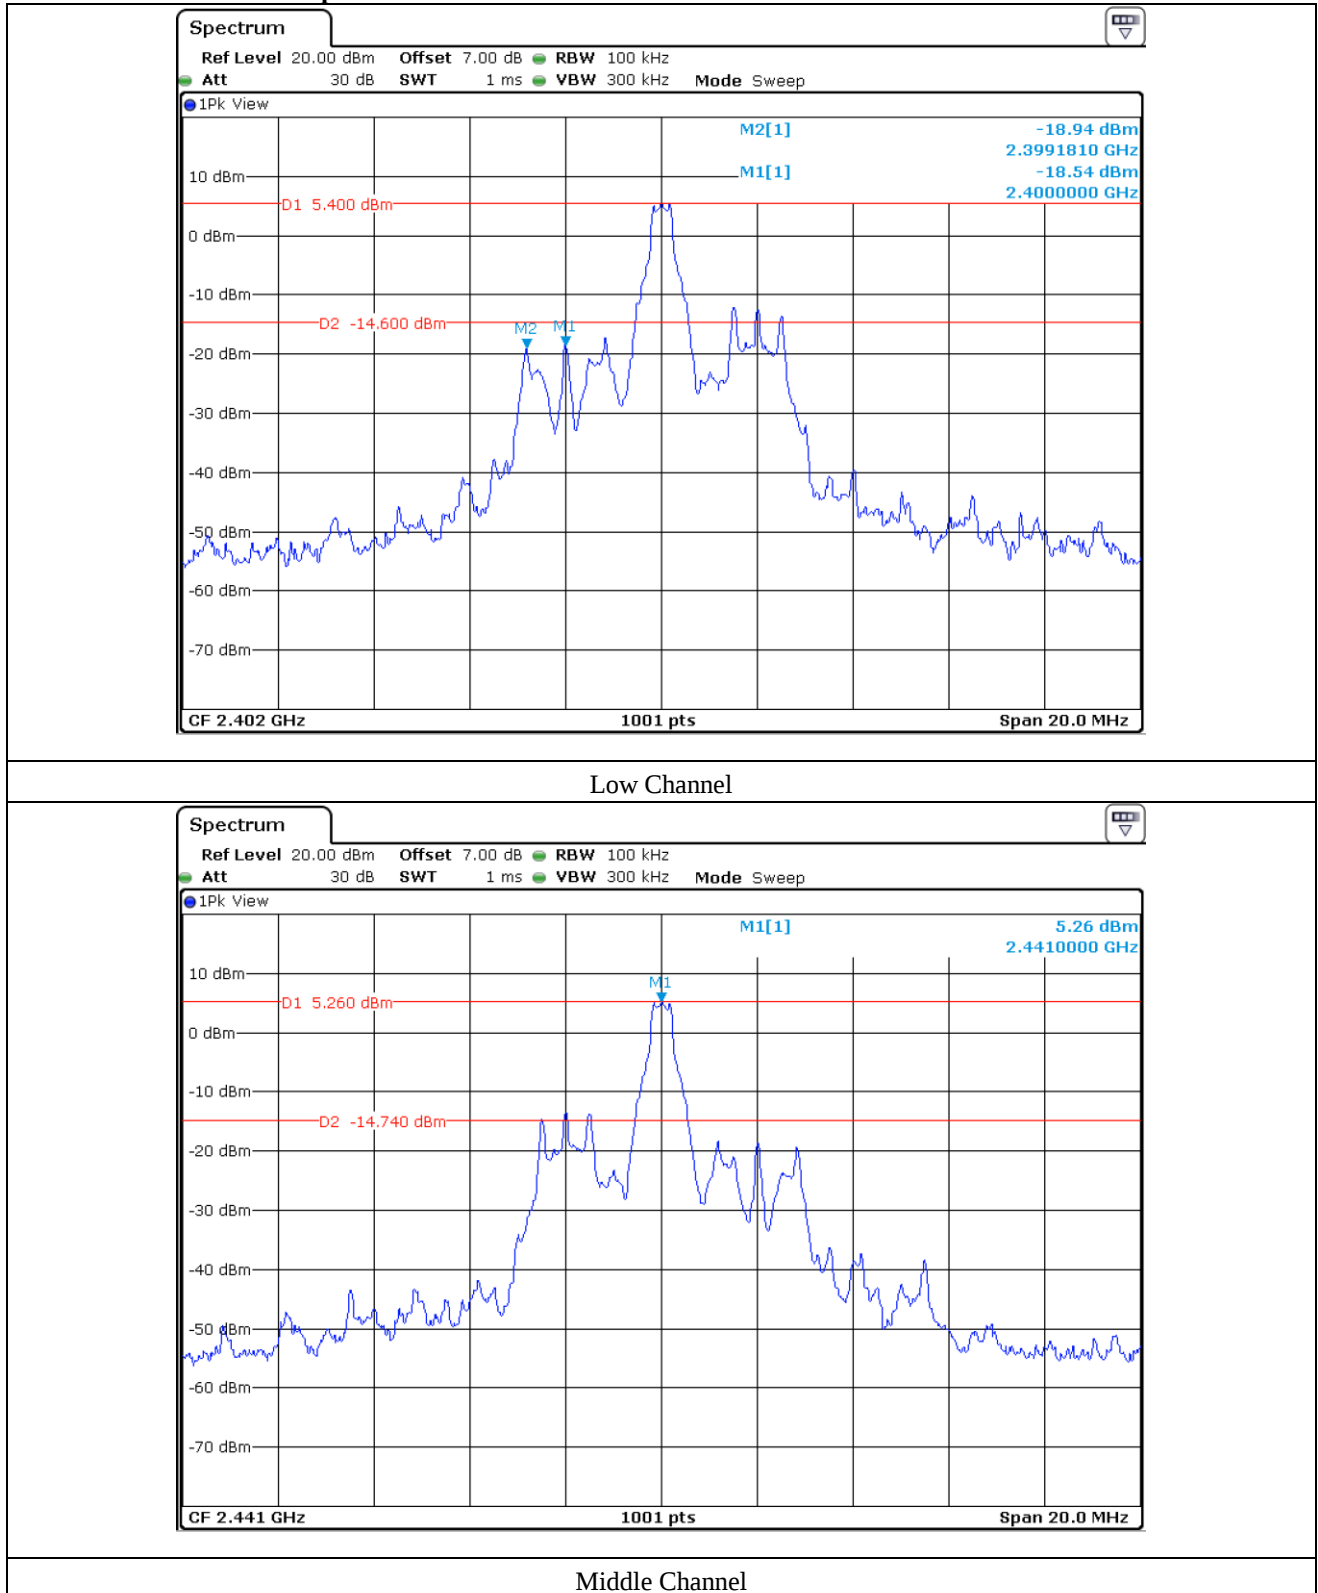

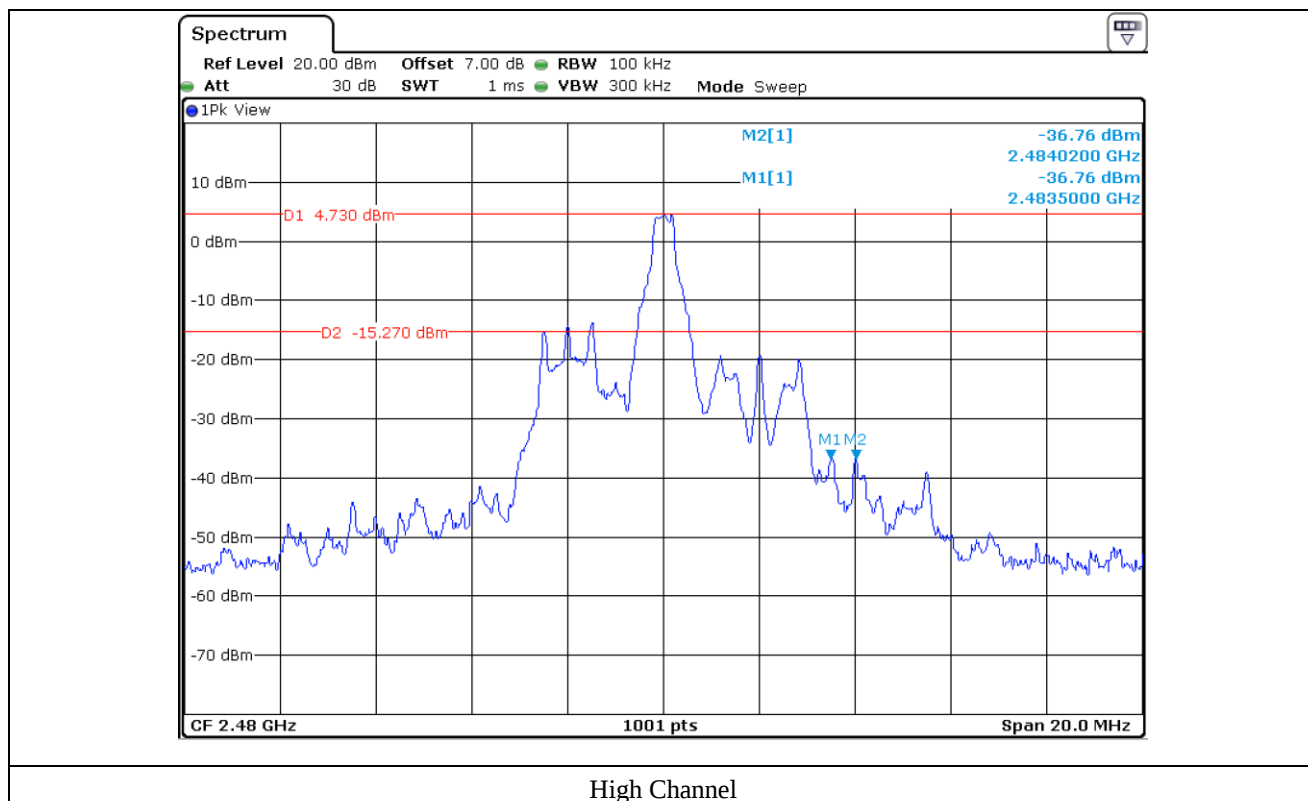


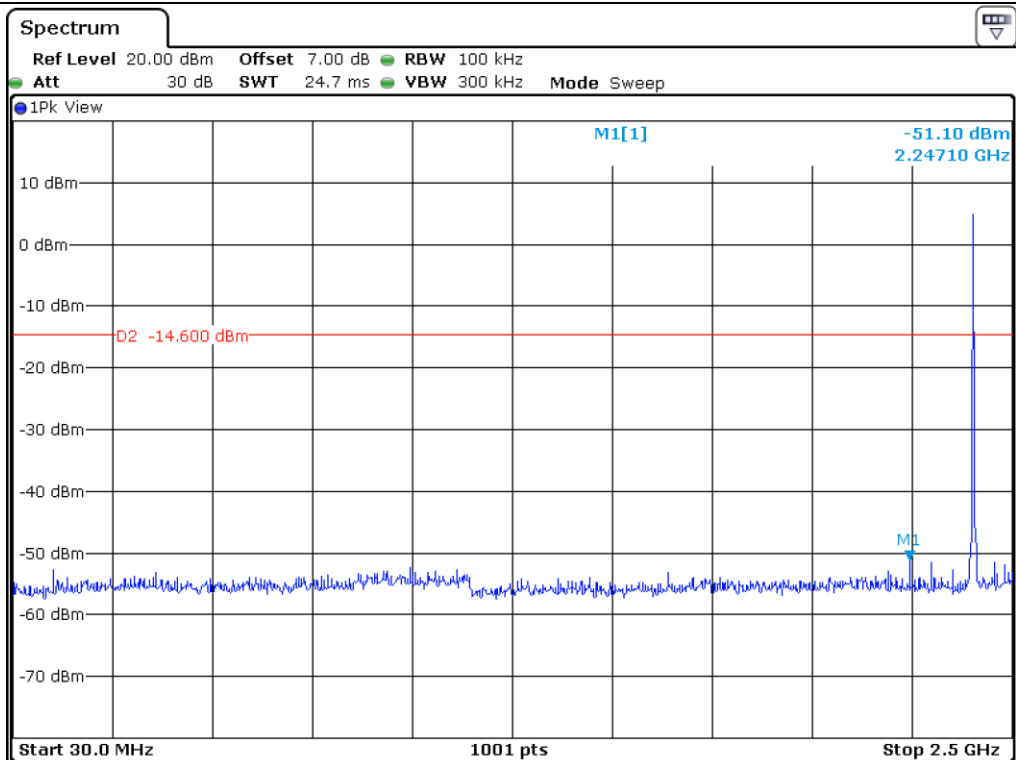


Low Channel

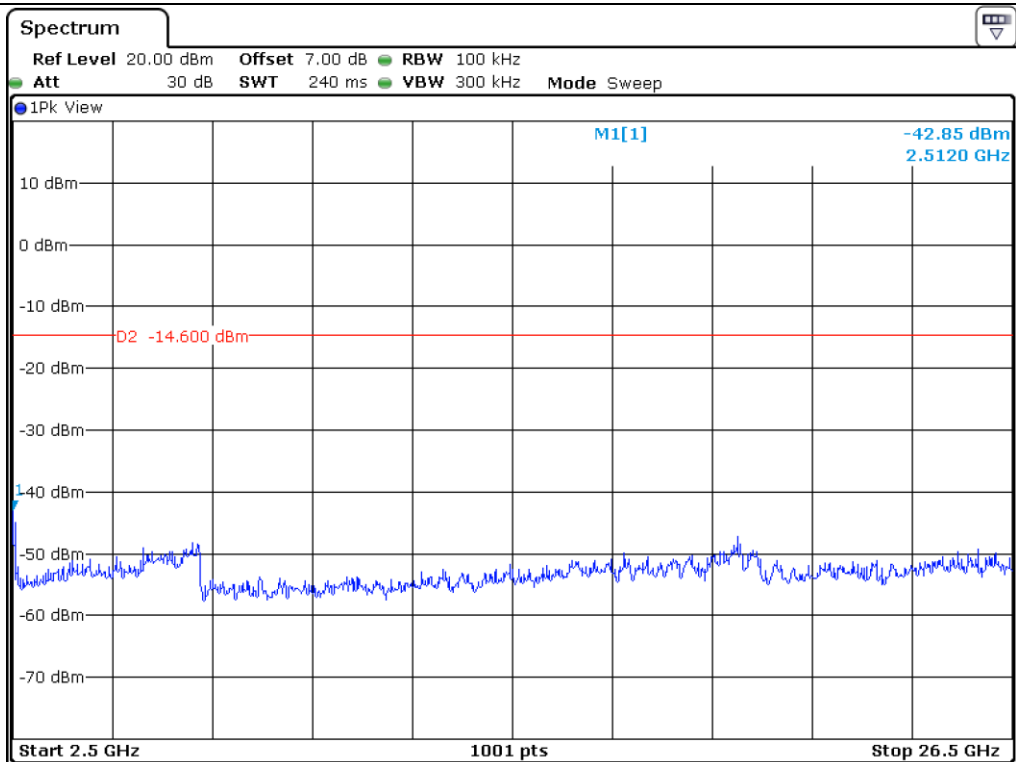


Low Channel

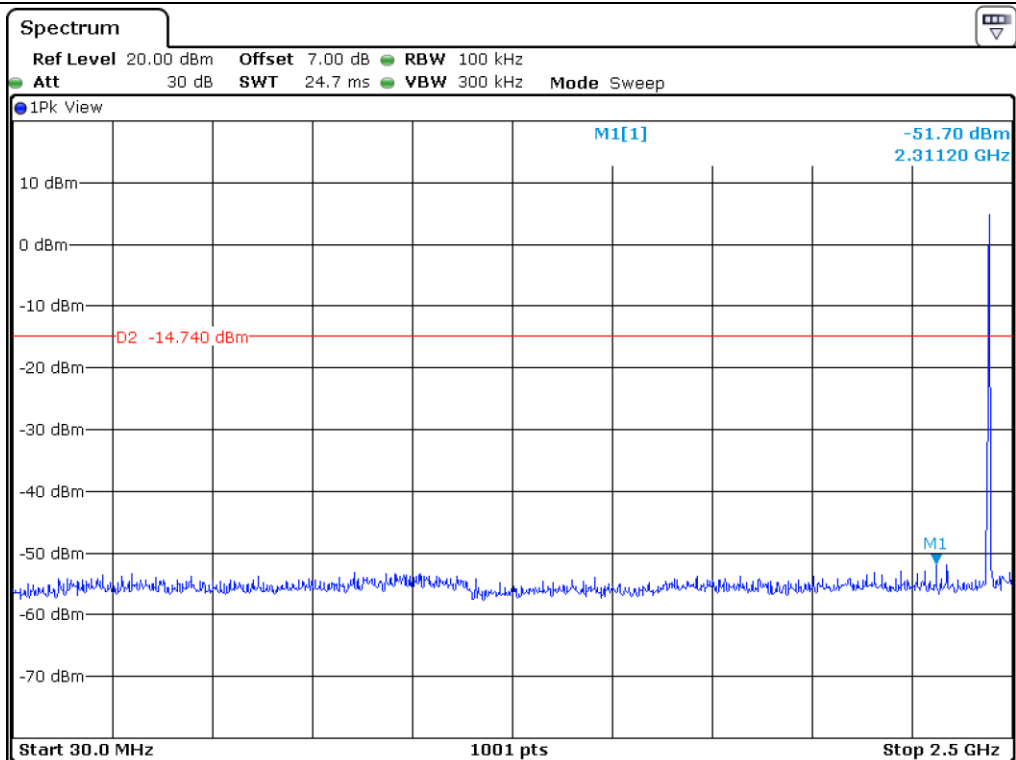


Middle Channel

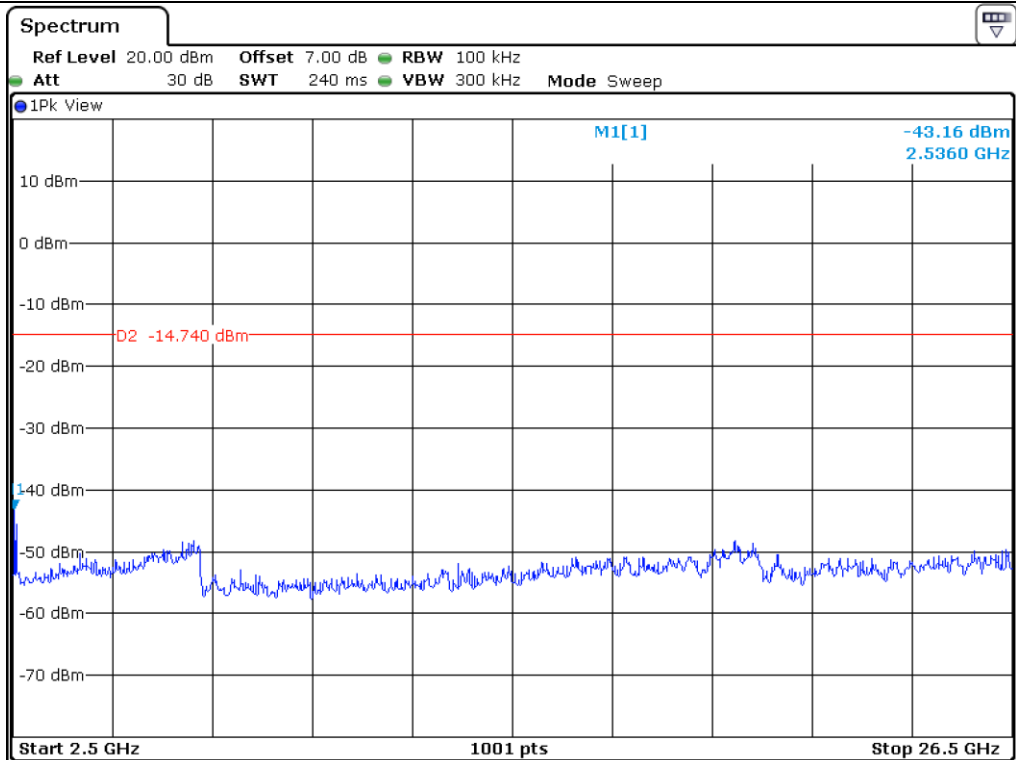

Middle Channel

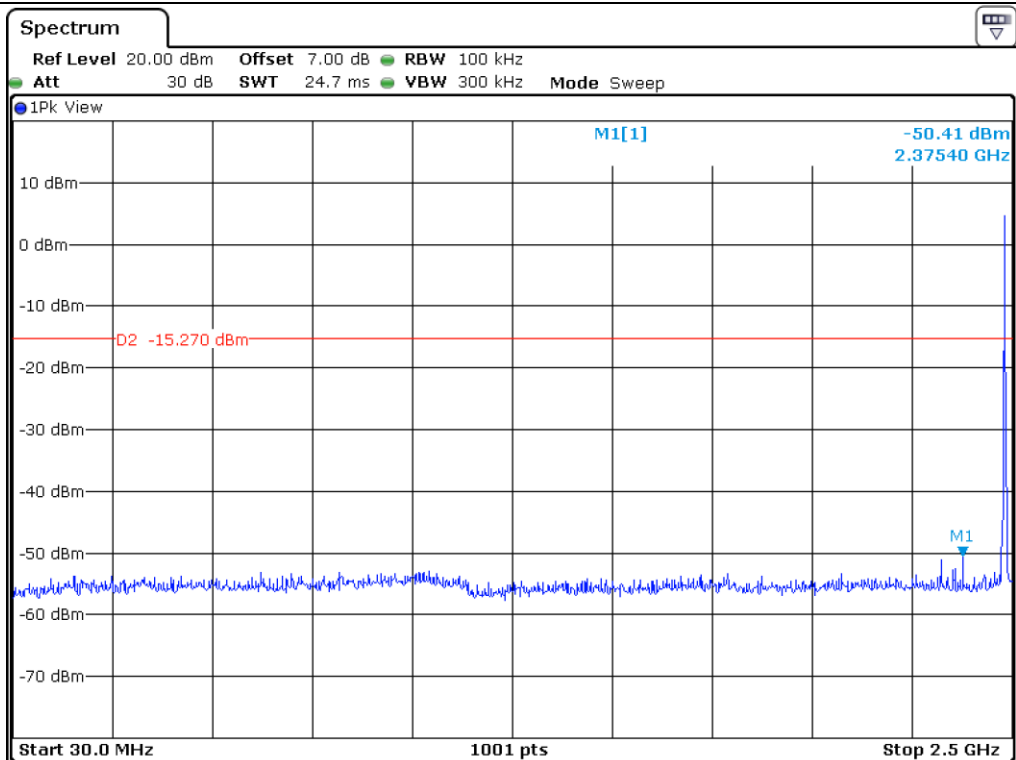


High Channel

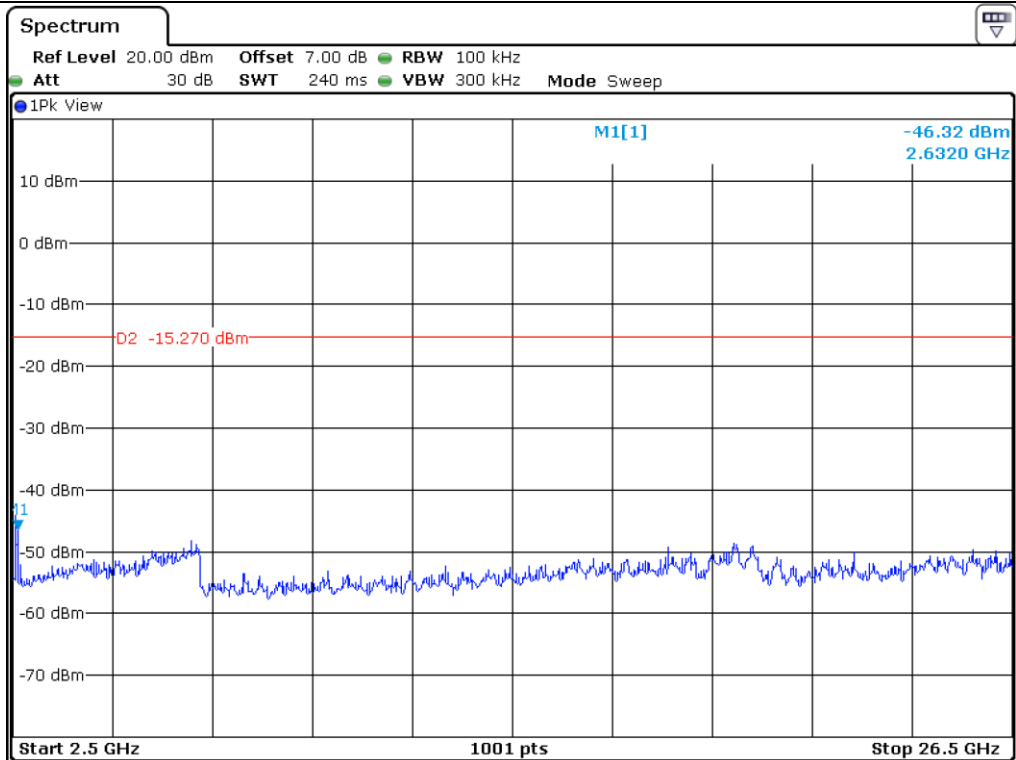


High Channel


12.5.2 Test data for 2 Mbps

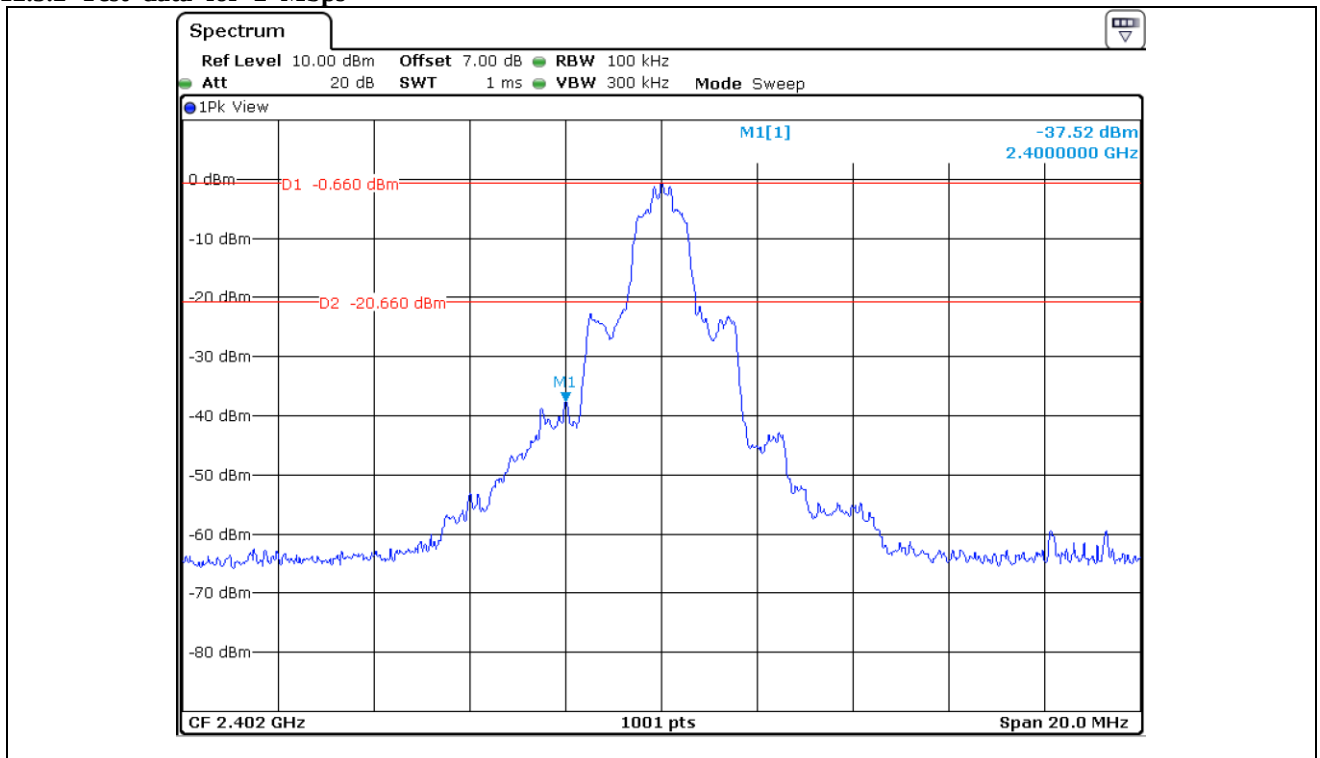


Low Channel

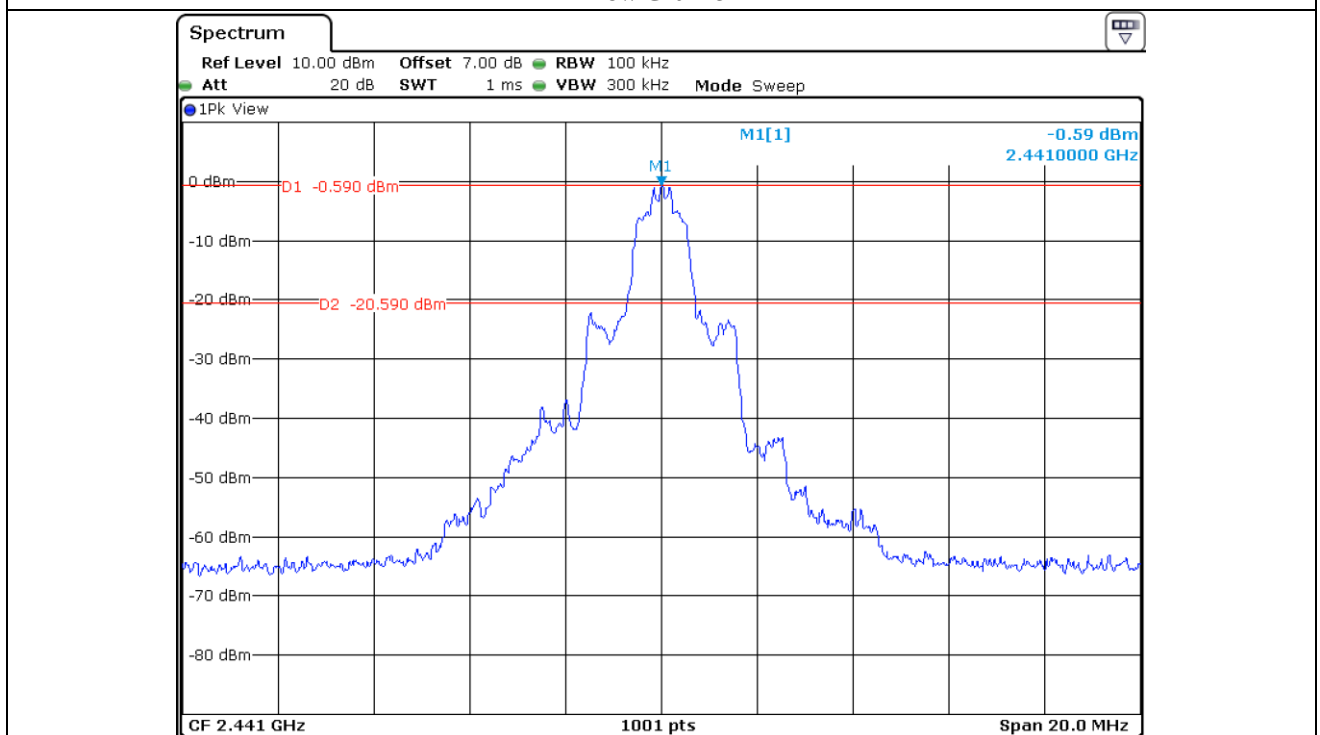


Middle Channel

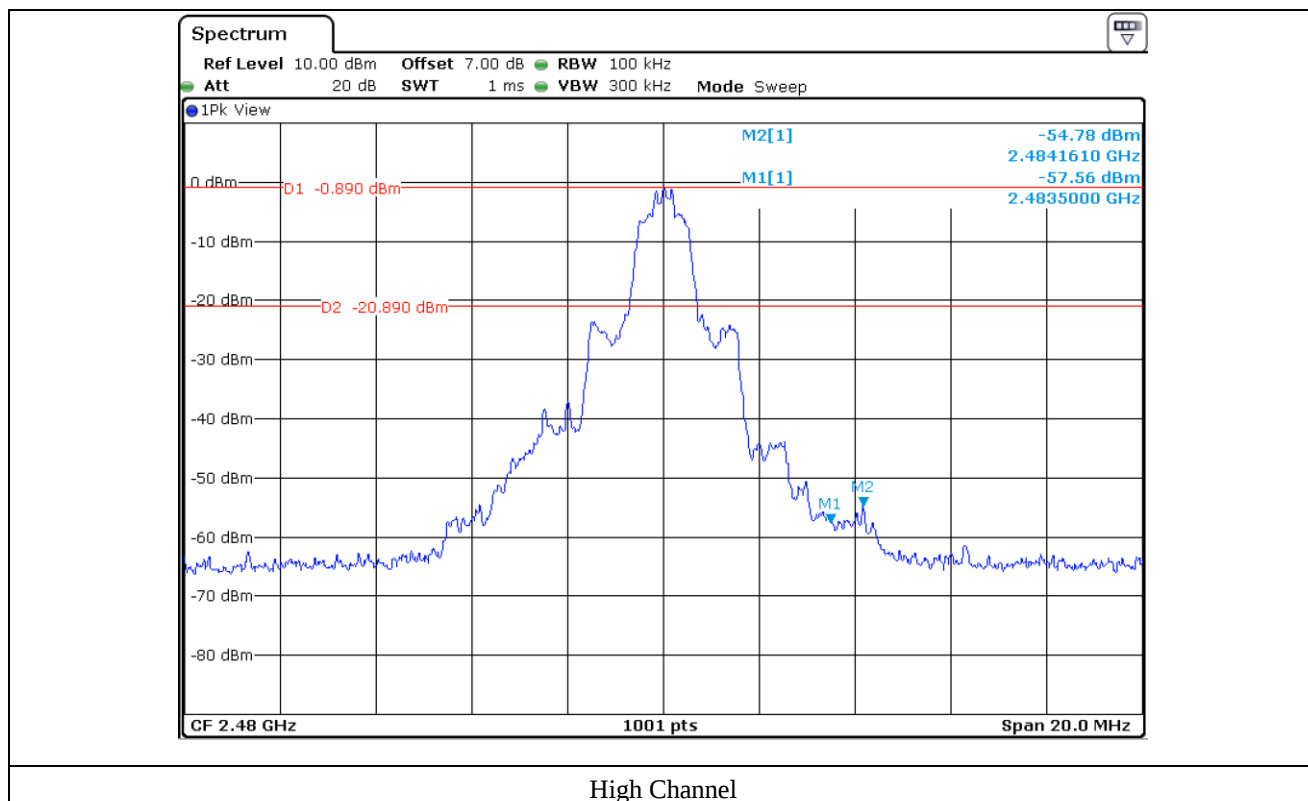


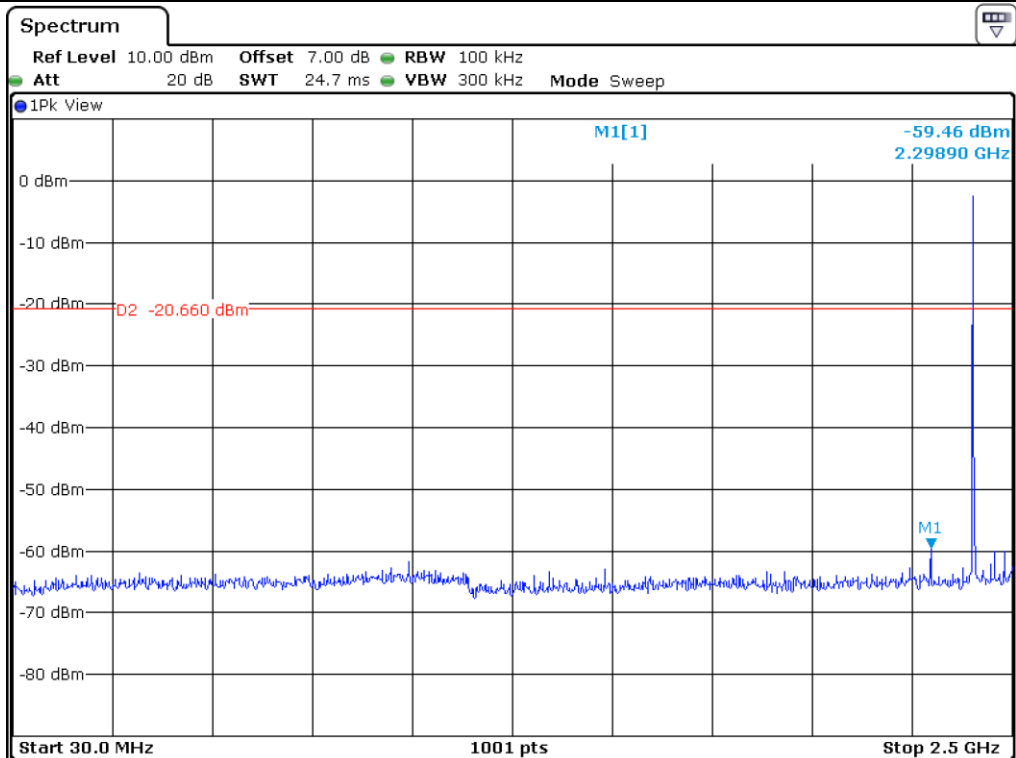


Low Channel

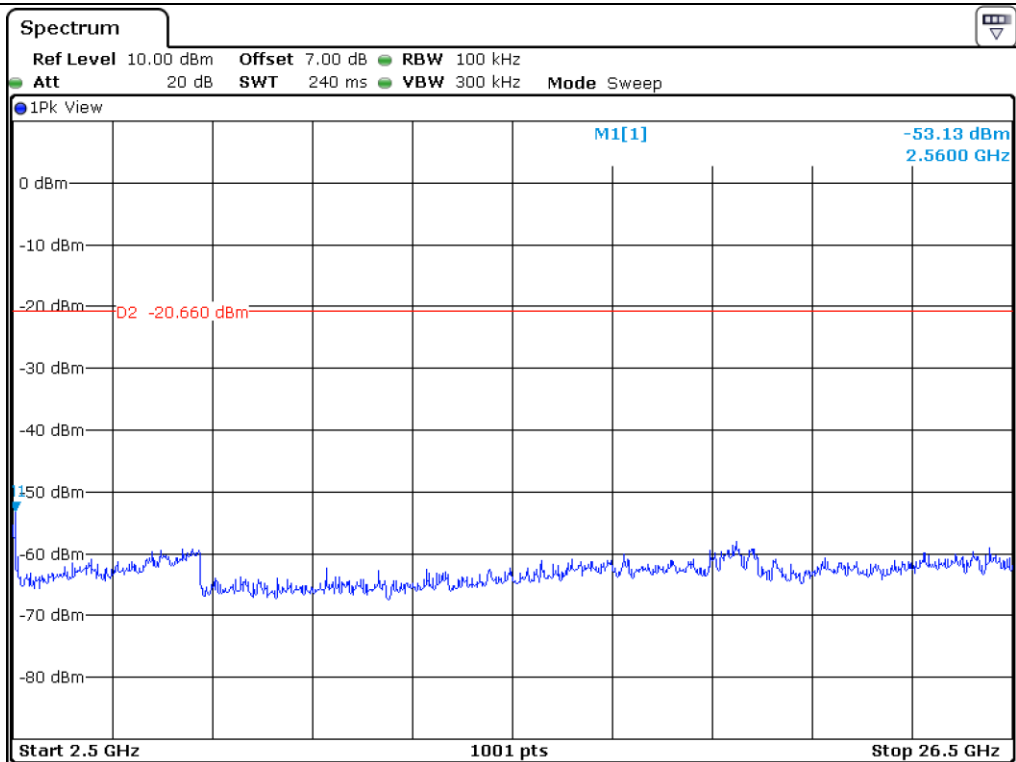


Low Channel

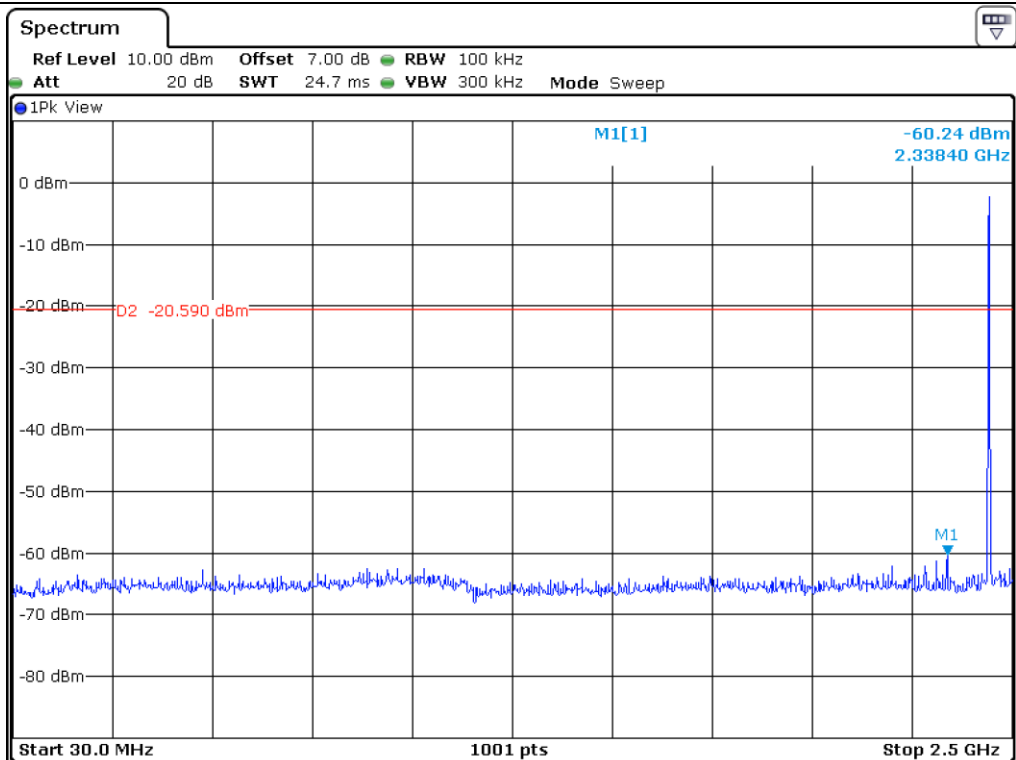


Middle Channel

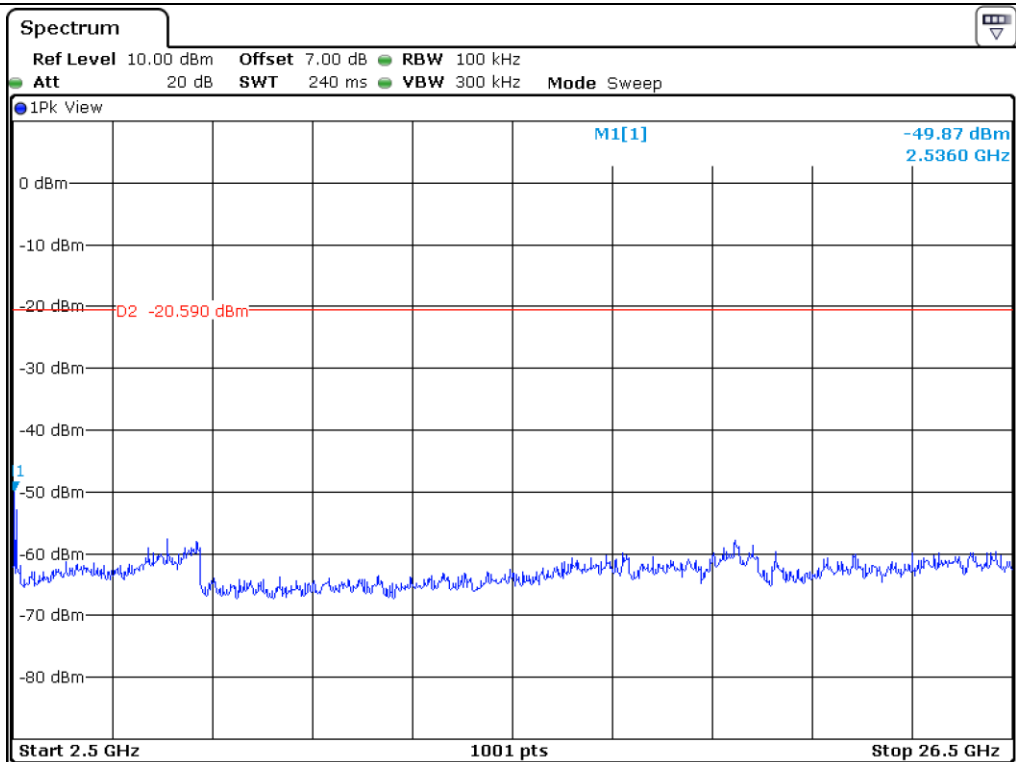

Middle Channel

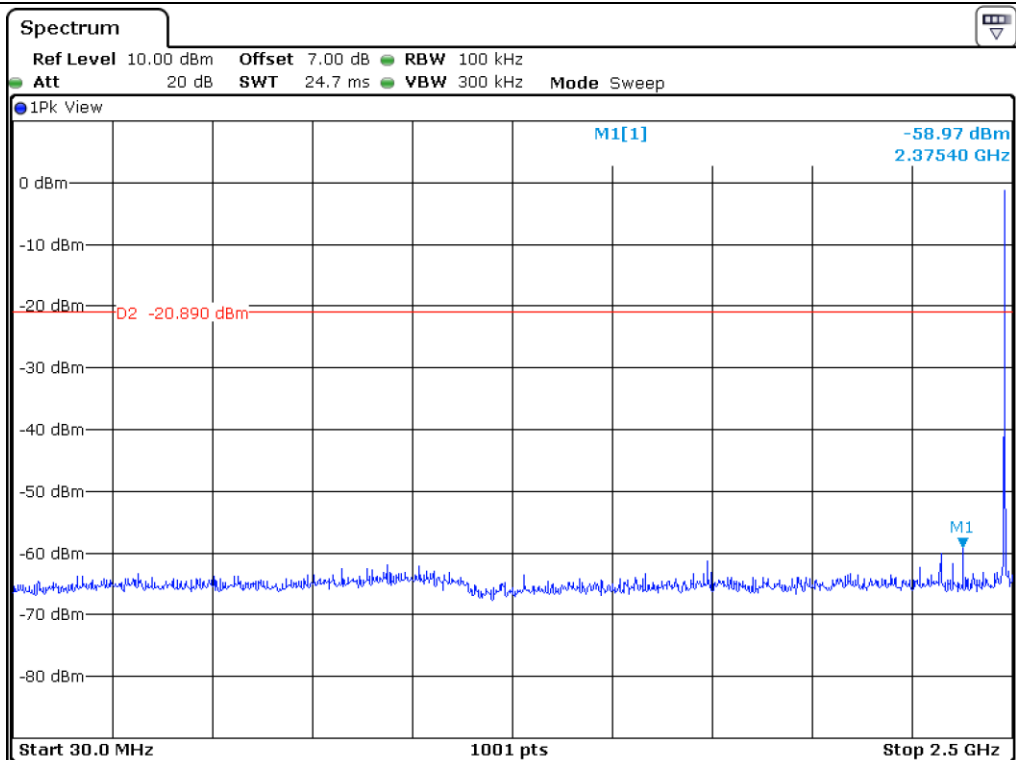



High Channel

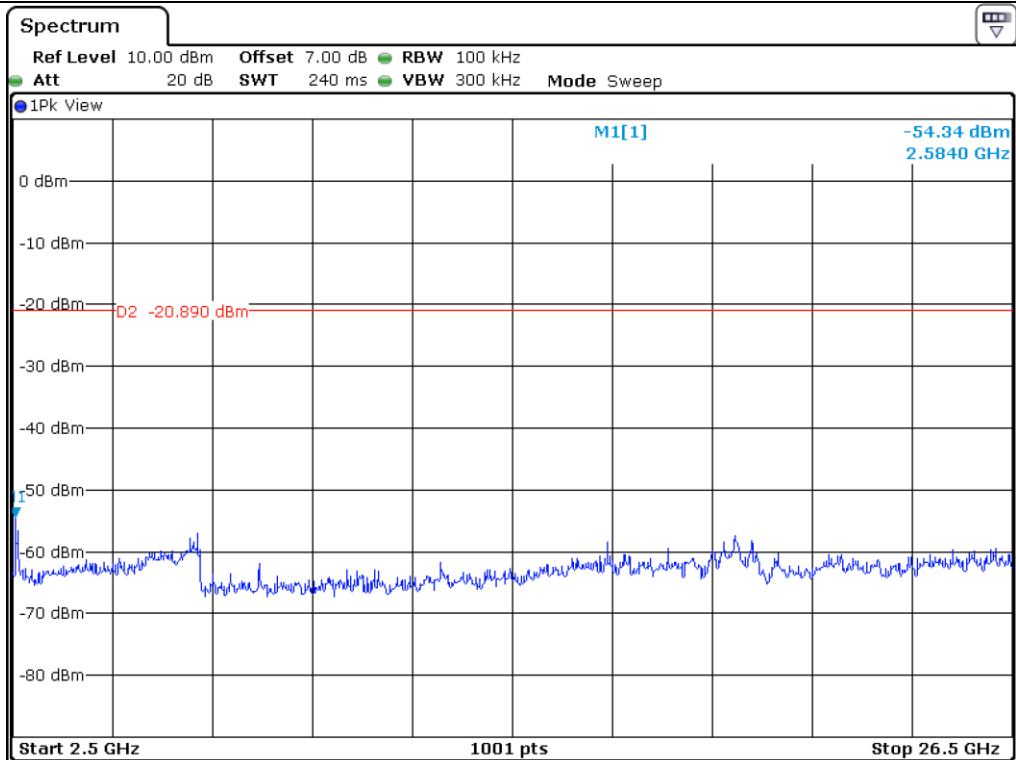


High Channel


12.5.3 Test data for 3 Mbps

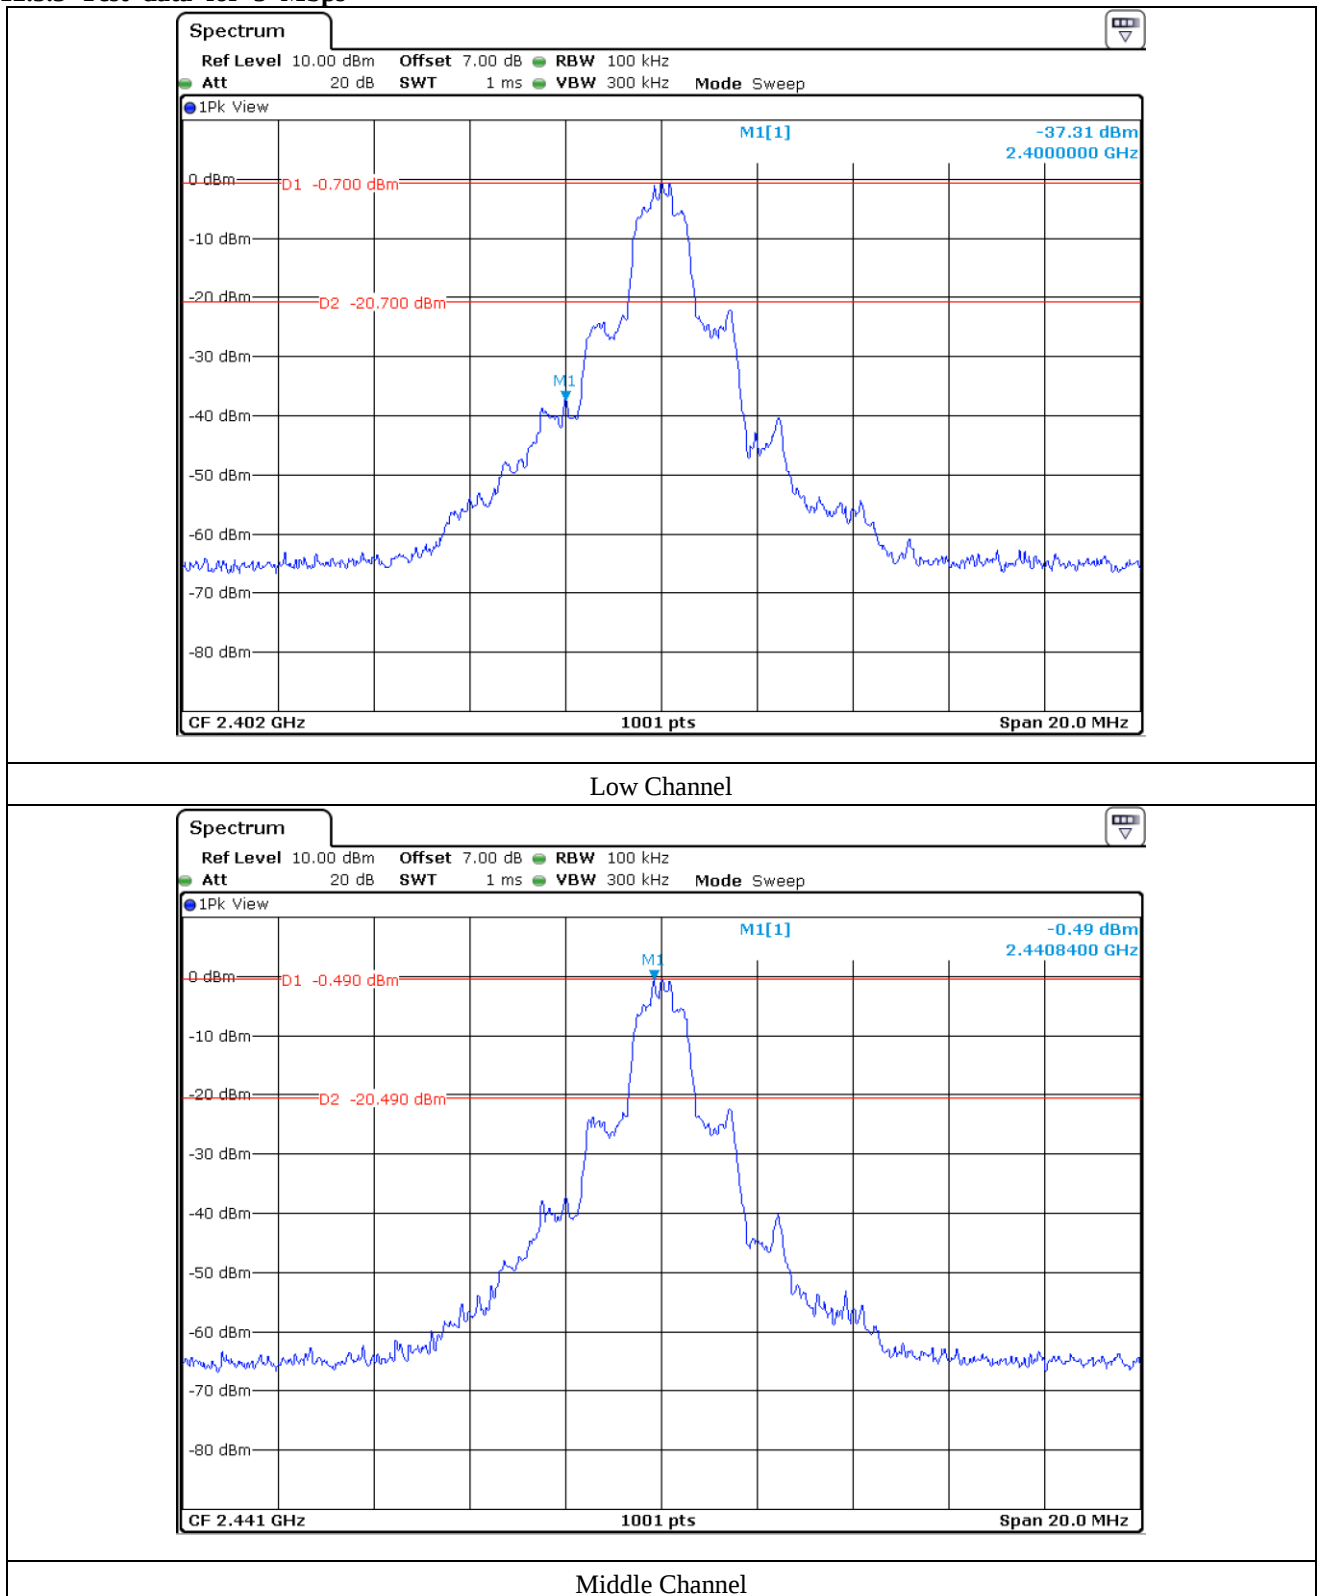

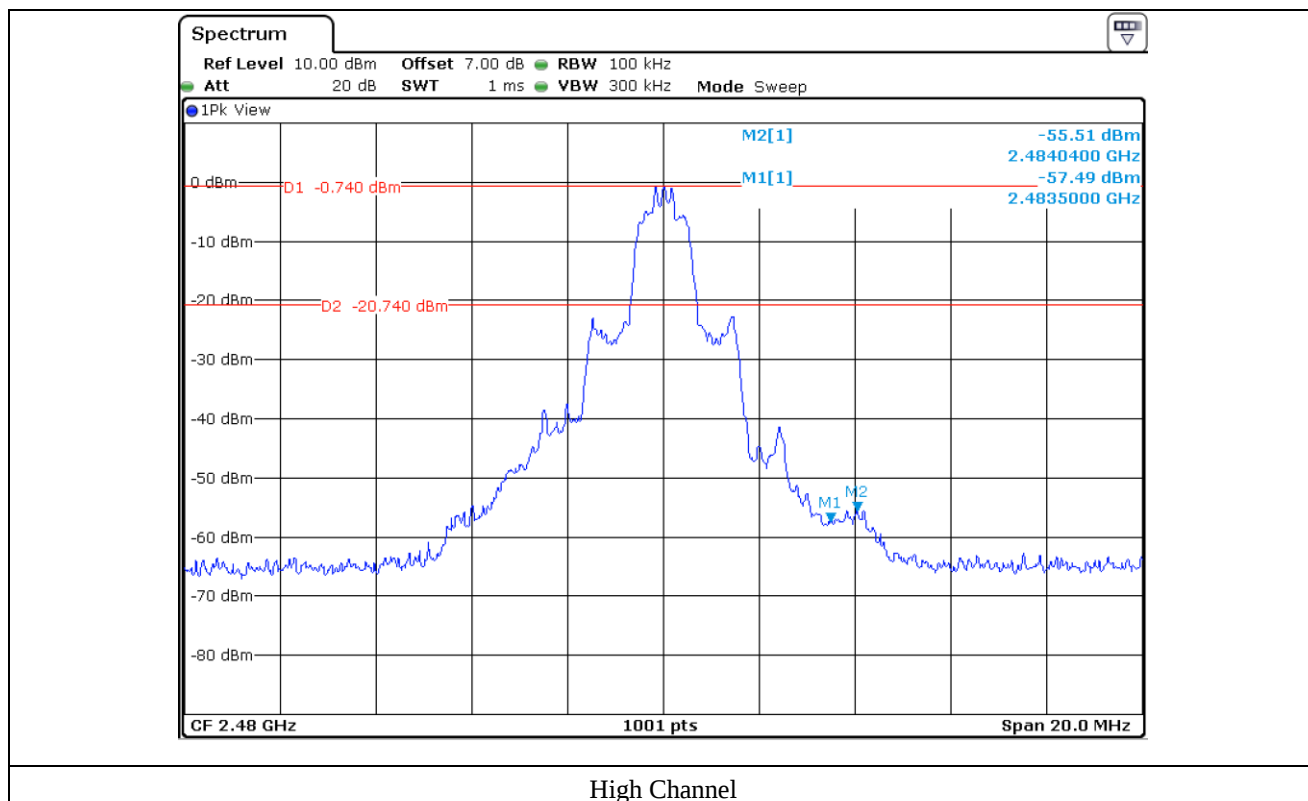


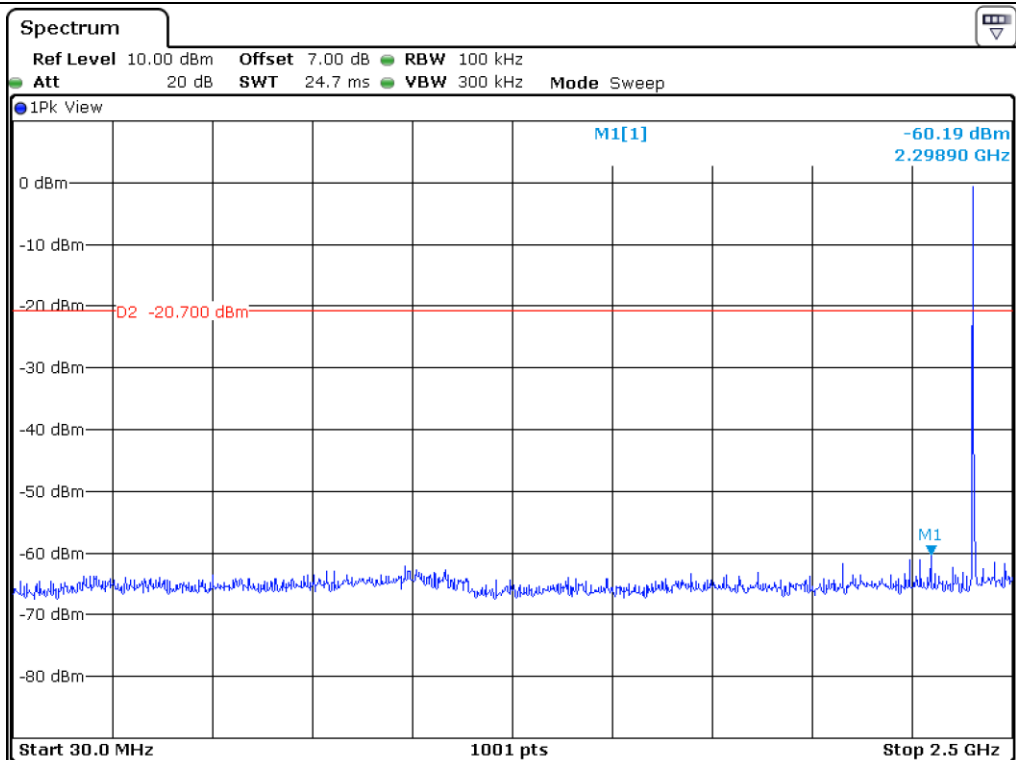


Low Channel

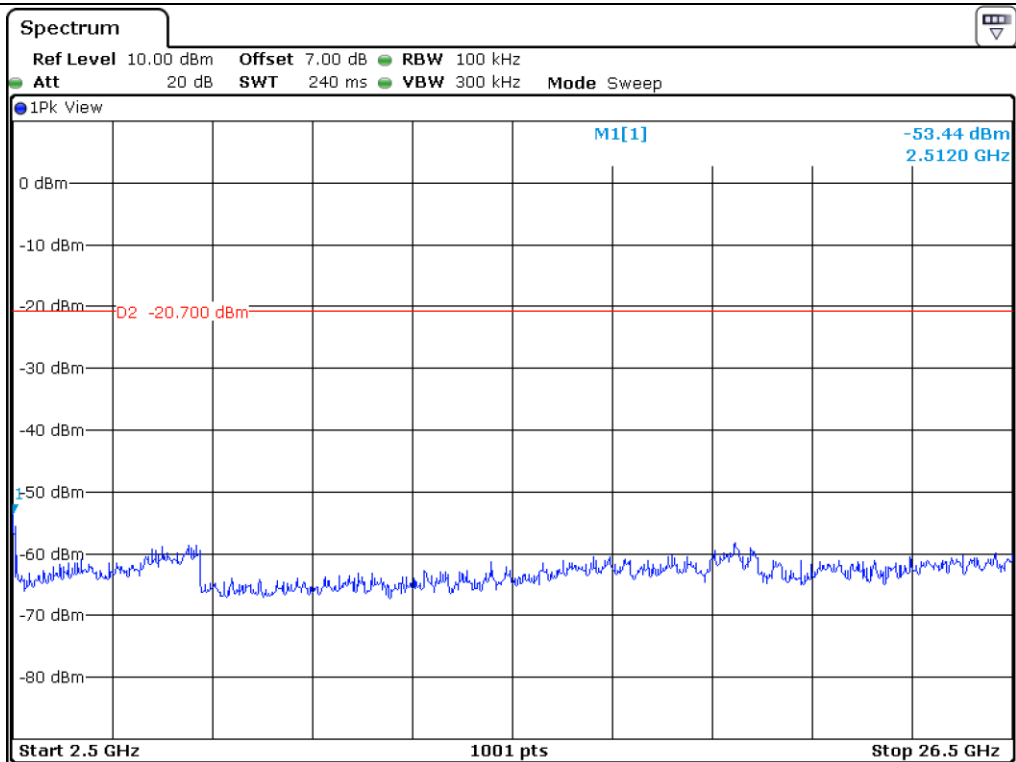


Low Channel

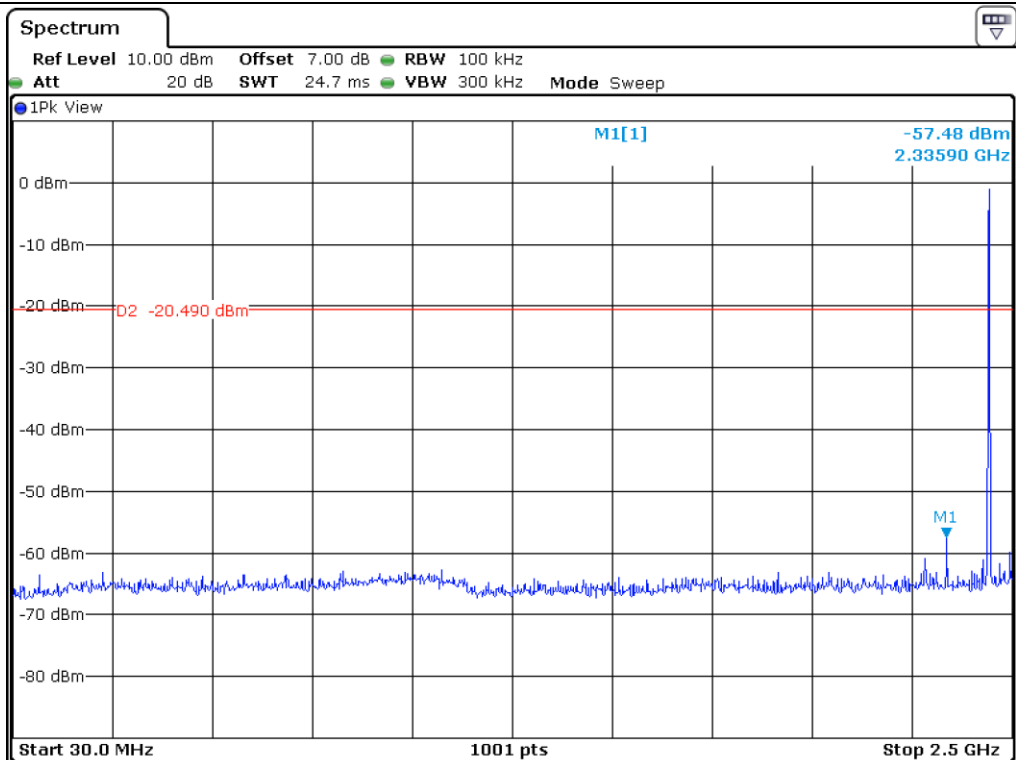


Middle Channel

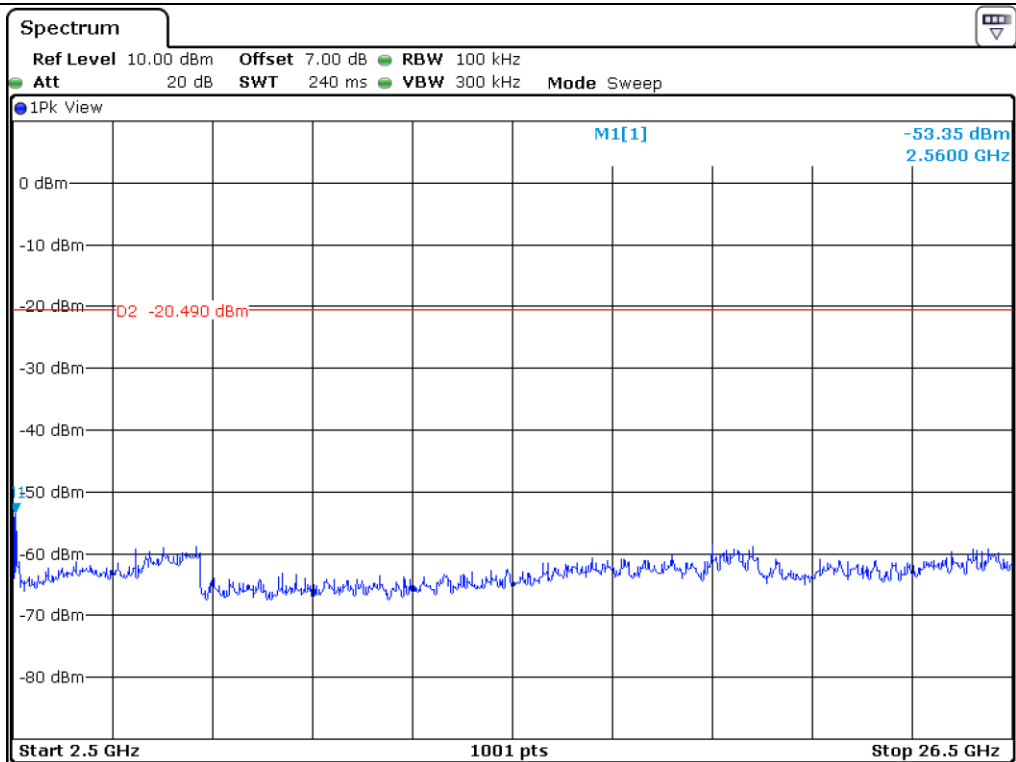

Middle Channel

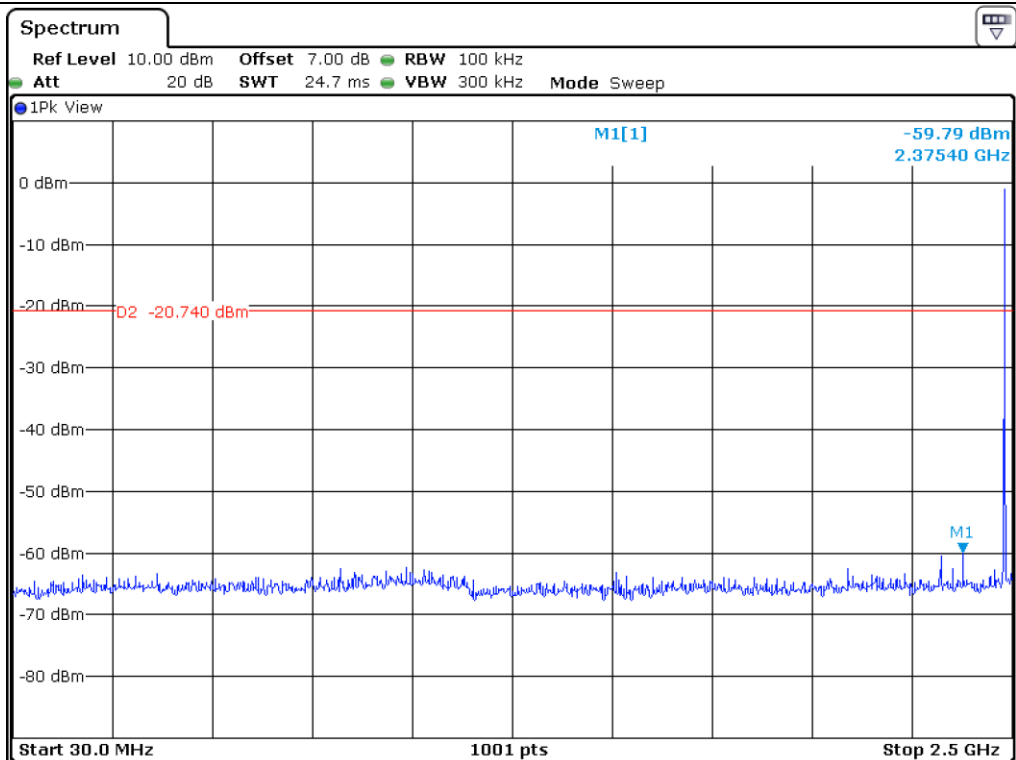

High Channel

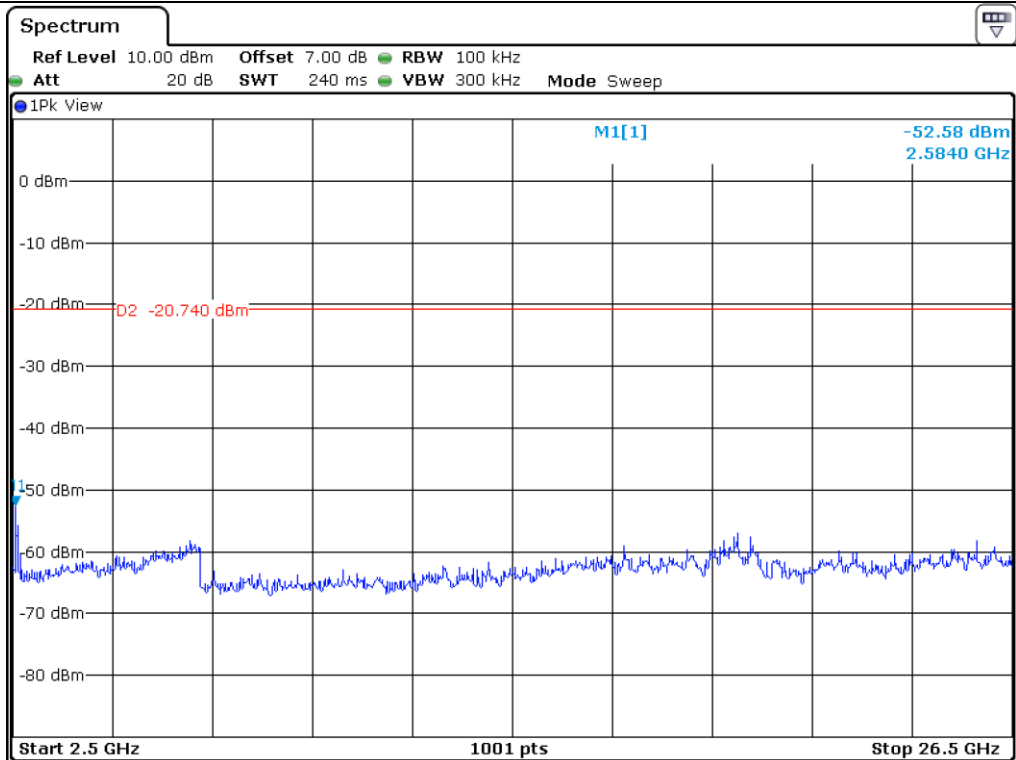

High Channel

12.6 Test data for Transmitting Mode radiated emission

12.6.1 Radiated Emission which fall in the Restricted Band

12.6.1.1 Test data for 1 Mbps

- . Test Date : January 19, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode (Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2376.28	44.96	Peak	H	27.60	11.40	34.29	49.67	74.00	24.33
2389.94	32.10	Average	H				36.81	54.00	17.19
2345.48	44.06	Peak	V				48.77	74.00	25.23
2338.89	30.82	Average	V				35.53	54.00	18.47
Test Data for High Channel									
2483.51	61.59	Peak	H	27.80	11.40	34.46	66.33	74.00	7.67
2483.51	45.81	Average	H				50.55	54.00	3.45
2483.51	51.83	Peak	V				56.57	74.00	17.43
2486.51	32.51	Average	V				37.25	54.00	16.75

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Yu-Seog, Sim / Assistant Manager

12.6.1.2 Test data for 2 Mbps

- . Test Date : January 19, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2375.59	43.72	Peak	H	27.60	11.40	34.29	48.43	74.00	25.57
2339.58	31.20	Average	H				35.91	54.00	18.09
2383.00	43.19	Peak	V				47.90	74.00	26.10
2344.79	30.67	Average	V				35.38	54.00	18.62
Test Data for High Channel									
2483.51	61.08	Peak	H	27.80	11.40	34.46	65.82	74.00	8.18
2483.51	41.25	Average	H				45.99	54.00	8.01
2483.51	52.67	Peak	V				57.41	74.00	16.59
2483.51	32.23	Average	V				36.97	54.00	17.03

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Yu-Seog, Sim / Assistant Manager

12.6.1.3 Test data for 3 Mbps

- Test Date : January 19, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2350.12	42.98	Peak	H	27.60	11.40	34.29	47.69	74.00	26.31
2338.89	30.82	Average	H				35.53	54.00	18.47
2363.78	42.90	Peak	V				47.61	74.00	26.39
2342.71	31.07	Average	V				35.78	54.00	18.22
Test Data for High Channel									
2483.51	62.36	Peak	H	27.80	11.40	34.46	67.10	74.00	6.90
2483.51	40.40	Average	H				45.14	54.00	8.86
2483.51	51.77	Peak	V				56.51	74.00	17.49
2483.51	34.07	Average	V				38.81	54.00	15.19

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Yu-Seog, Sim / Assistant Manager

12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz

12.6.2.1 Test data for 1 Mbps

- . Test Date : January 19, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	44.54	Peak	H	31.00	16.10	35.23	56.41	74.00	17.59
	30.52	Average	H				42.39	54.00	11.61
	44.73	Peak	V				56.60	74.00	17.40
	31.02	Average	V				42.89	54.00	11.11
Test Data for Middle Channel									
4 882.00	44.37	Peak	H	31.10	16.10	35.27	56.30	74.00	17.70
	31.23	Average	H				43.16	54.00	10.84
	44.95	Peak	V				56.88	74.00	17.12
	30.97	Average	V				42.90	54.00	11.10
Test Data for High Channel									
4 960.00	45.37	Peak	H	31.20	16.10	35.28	57.39	74.00	16.61
	31.36	Average	H				43.38	54.00	10.62
	46.26	Peak	V				58.28	74.00	15.72
	31.27	Average	V				43.29	54.00	10.71

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Yu-Seog, Sim / Assistant Manager

12.6.2.2 Test data for 2 Mbps

- Test Date : January 19, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	44.23	Peak	H	31.00	16.10	35.23	56.10	74.00	17.90
	30.49	Average	H				42.36	54.00	11.64
	44.42	Peak	V				56.29	74.00	17.71
	30.81	Average	V				42.68	54.00	11.32
Test Data for Middle Channel									
4 882.00	45.73	Peak	H	31.10	16.10	35.27	57.66	74.00	16.34
	31.07	Average	H				43.00	54.00	11.00
	44.58	Peak	V				56.51	74.00	17.49
	30.72	Average	V				42.65	54.00	11.35
Test Data for High Channel									
4 960.00	45.89	Peak	H	31.20	16.10	35.28	57.91	74.00	16.09
	31.25	Average	H				43.27	54.00	10.73
	44.06	Peak	V				56.08	74.00	17.92
	31.59	Average	V				43.61	54.00	10.39

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Yu-Seog, Sim / Assistant Manager

12.6.2.3 Test data for 3 Mbps

- Test Date : January 19, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	44.40	Peak	H	31.00	16.10	35.23	56.27	74.00	17.73
	31.17	Average	H				43.04	54.00	10.96
	44.27	Peak	V				56.14	74.00	17.86
	31.05	Average	V				42.92	54.00	11.08
Test Data for Middle Channel									
4 882.00	44.18	Peak	H	31.10	16.10	35.27	56.11	74.00	17.89
	31.03	Average	H				42.96	54.00	11.04
	44.23	Peak	V				56.16	74.00	17.84
	30.71	Average	V				42.64	54.00	11.36
Test Data for High Channel									
4 960.00	44.39	Peak	H	31.20	16.10	35.28	56.41	74.00	17.59
	31.30	Average	H				43.32	54.00	10.68
	44.64	Peak	V				56.66	74.00	17.34
	31.59	Average	V				43.61	54.00	10.39

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band



Tested by: Yu-Seog, Sim / Assistant Manager

12.6.3 Spurious Radiated Emission

12.6.3.1 Test Data for 30 MHz ~ 1 GHz

Humidity Level : 47 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Bluetooth Dual Mode Serial Adapter

Date: January 19, 2019

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

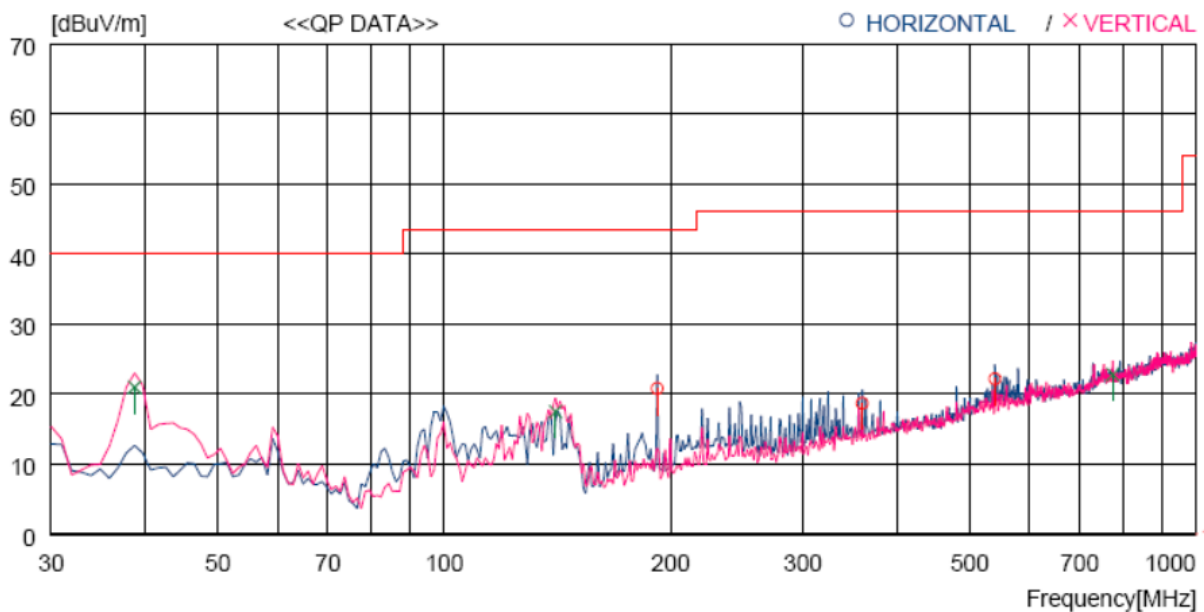

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
---- Horizontal ----										
1	191.990	39.7	10.6	3.6	33.1	20.8	43.5	22.7	100	359
2	359.800	32.5	14.4	4.9	33.1	18.7	46.0	27.3	100	173
3	540.220	31.9	17.5	6.1	33.3	22.2	46.0	23.8	200	131
---- Vertical ----										
4	38.730	39.4	13.1	1.6	33.1	21.0	40.0	19.0	100	63
5	140.580	39.3	8.0	3.1	32.9	17.5	43.5	26.0	100	0
6	774.953	28.0	20.7	7.4	33.3	22.8	46.0	23.2	100	103

Tested by: Yu-Seog, Sim / Assistant Manager

12.6.3.2 Test Data for Below 30 MHz

- . Test Date : January 19, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emissions observed were 20dB below the limit and thus not reported								

12.6.3.3 Test Data for above 1 GHz

- . Test Date : January 19, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating Condition : Highest Output Power Transmitting Mode
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emissions observed were 20dB below the limit and thus not reported								



Tested by: Yu-Seog, Sim / Assistant Manager