

Shenzhen SKYLink Technology Co.,Ltd

Antenna Specification for Approval

Customer Name: _____

Product Name: _____ 2.4G _____

Part NO. : _____ WF87A-C113-95B-102650-211 _____

Write By: _____ Zhengfeng Fang _____

Issued Date: _____ 2023-6-27 _____

Customer

R&D Dept	Business Dept	Approved By

SKYLink

R&D Dept	Engineer Dept	Approval

● Specification Summary

A. Electrical Characteristics	
Frequency	2400MHz ~2500MHz
Log Mag	<-10dB
Efficiency	>55%
Peak Gain	1.81dbi
Impedance	50 Ohm
Polarization	Line
B. Material & Mechanical Characteristics	
Material of Radiator	Cu
Cable Type	1.13mm Black
Connector Type	/
Dimension	At Attachment
Heat-durability	280±5°C, 10sec.
C. Environmental Characteristics	
Operation Temperature	- 20 °C ~ + 80 °C
Storage Temperature	- 30 °C ~ + 85 °C

● Test Equipment & Conditions





1. Network Analyzers :



Agilent 8753D 5071B

Communications Test Set:

Agilent E5515C CMW500

2. 3D Chamber Test System

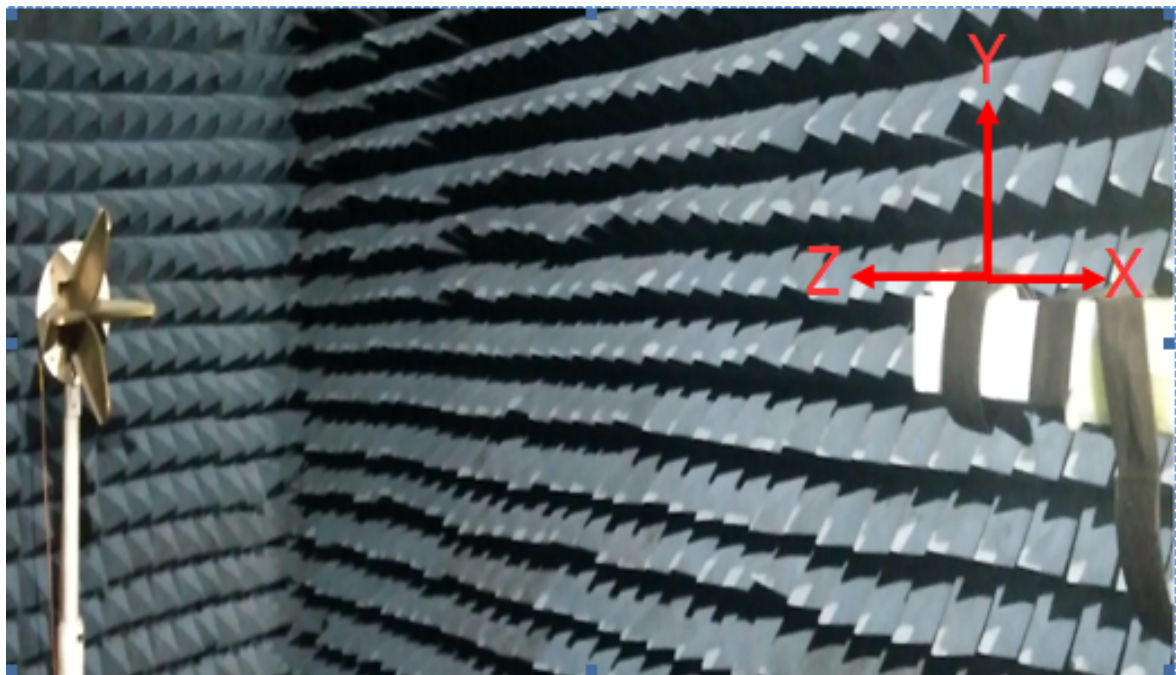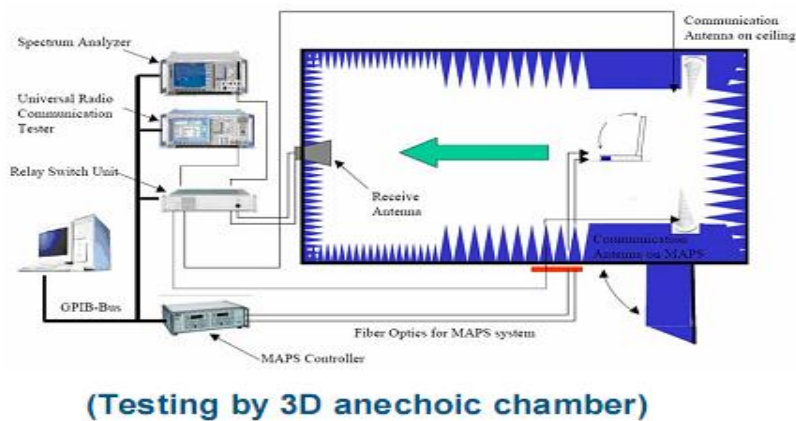


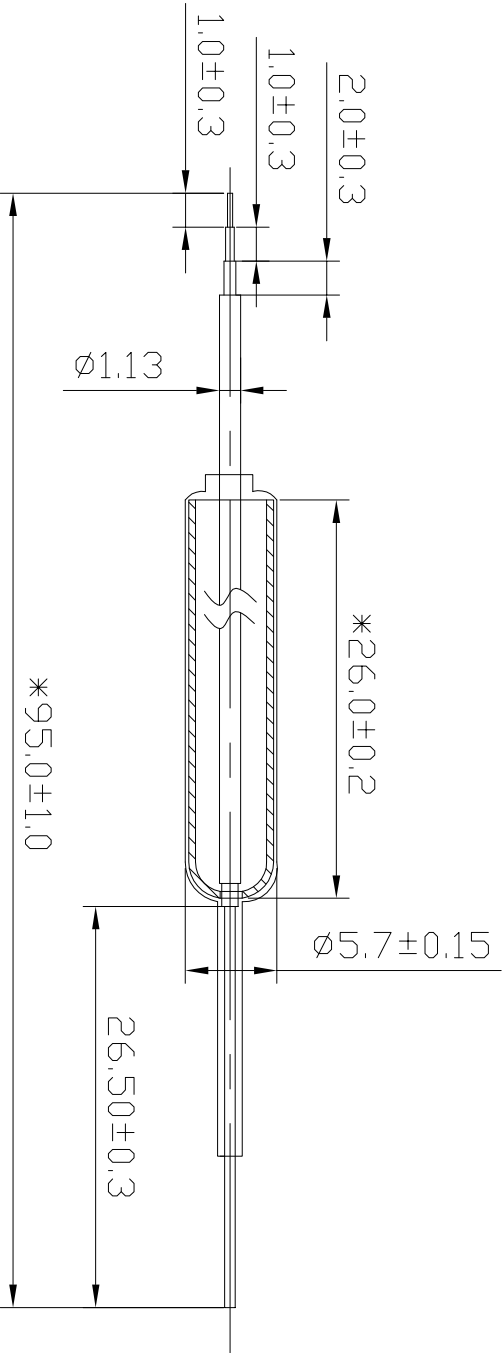

										SHEN ZHEN SKYLINK CO., LTD																	
												Third Angle		Project		Date		2023-06-27									
										0~10		± 0.05		○		0.02		Part Name		Designed by							
										10~18		± 0.10		◎		0.03		Part No. WT87A-C113-95B-102650-211		MD							
										18~30		± 0.12		┴		0.02		Material		Checked by		RF					
										30~40		± 0.15				0.04		DWG No.		Approved by							
										40~		± 0.20		Angle $\pm 0.5^\circ$													
Rev										Description		Date		Remark		Location				Unit		mm		Scale 1:1		Rev A	

Rev	Description		Date	Remark			
1							

◆ Return Loss

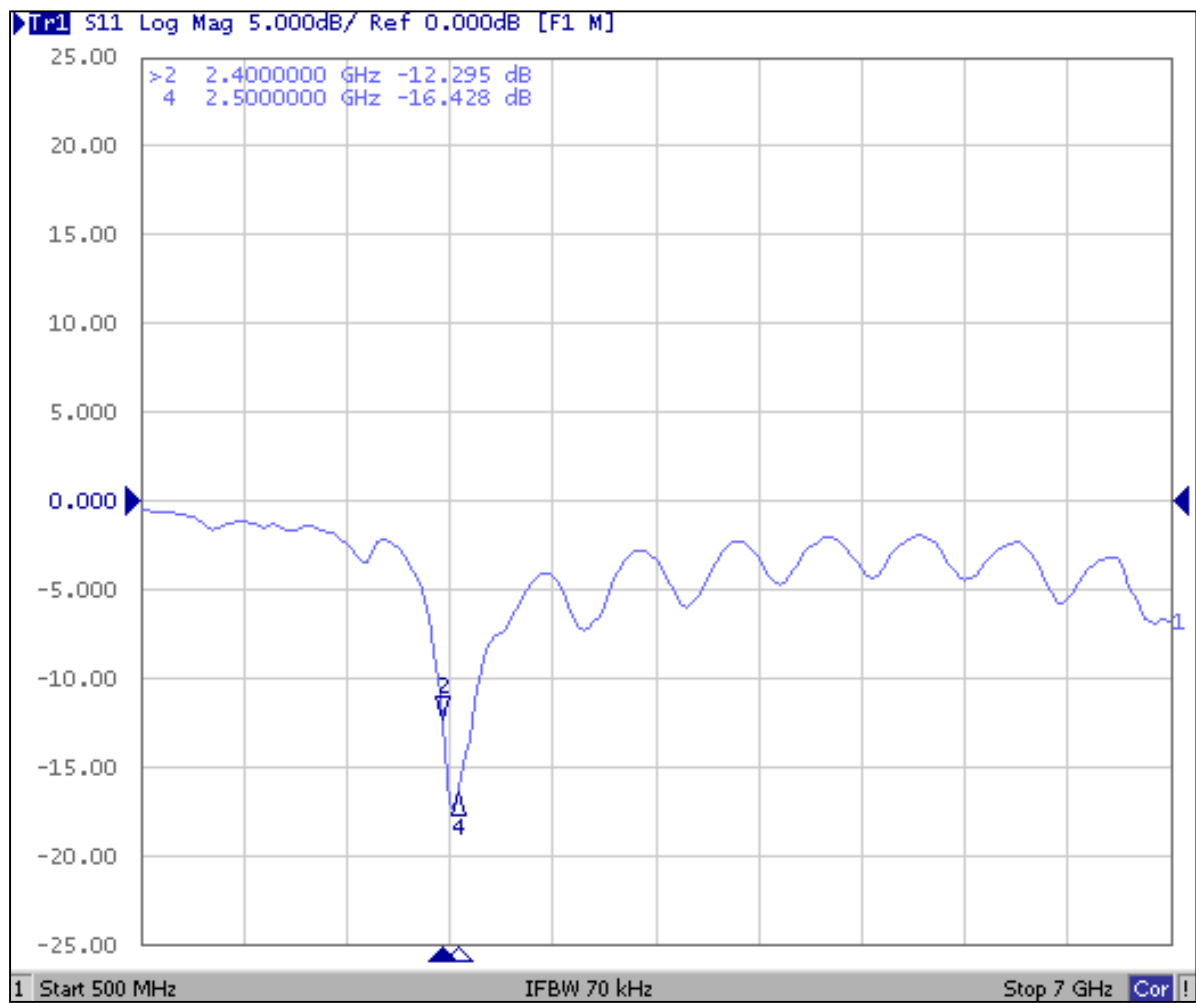


◆ Gain & Efficiency


Freq (MHz)	Effi (%)	Gain (dBi)
2400	67.72	1.77
2410	66.38	1.69
2420	67.63	1.75
2430	68.07	1.75
2440	65.66	1.57
2450	59.88	1.29
2460	58.58	1.43
2470	60	1.6
2480	60.96	1.69
2490	63.94	1.81
2500	62	1.77

◆ Radiation Pattern


2400.000MHz

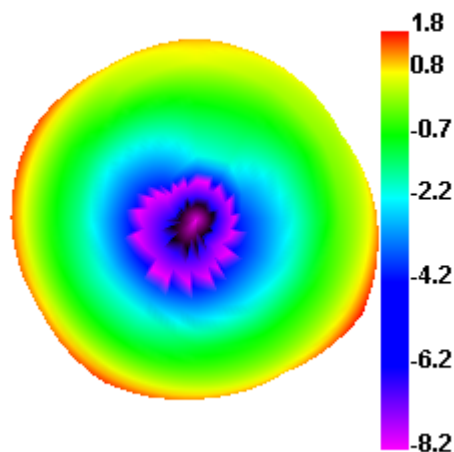


2400.000MHz H

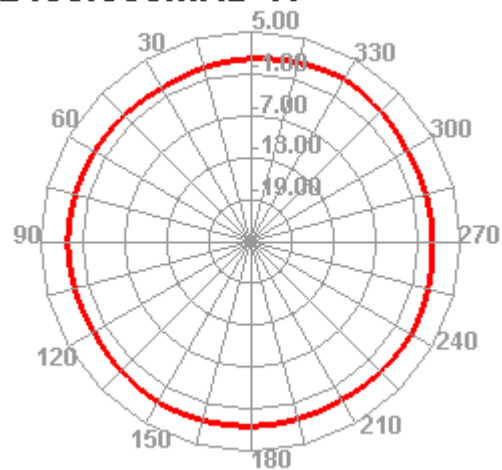


2400.000MHz E1

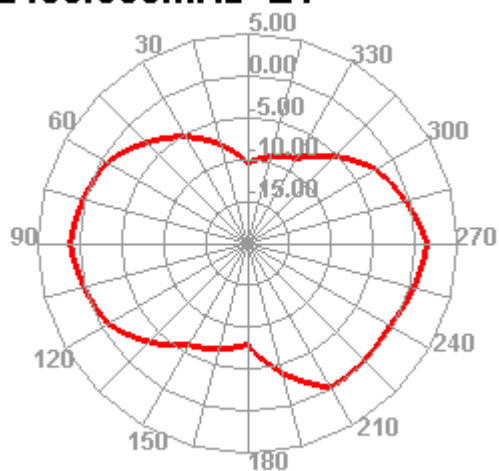


2400.000MHz E2

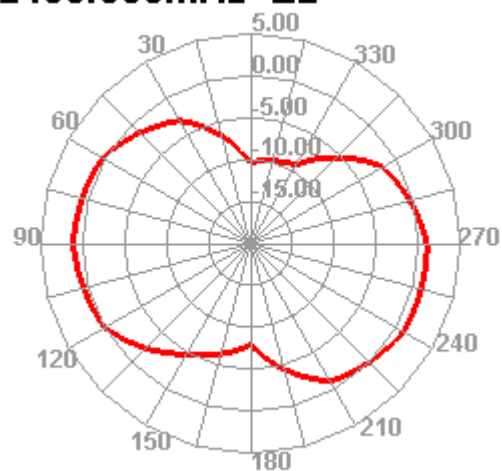


2450.000MHz

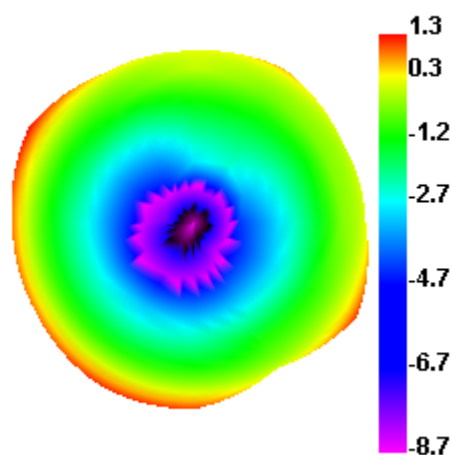


2450.000MHz H

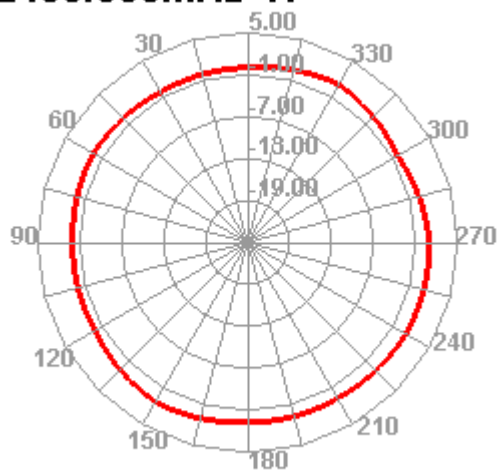


2450.000MHz E1

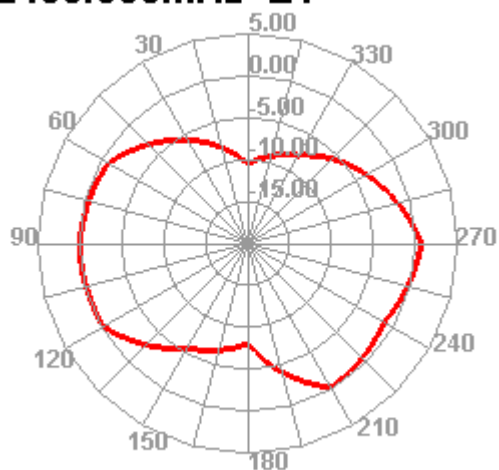


2450.000MHz E2

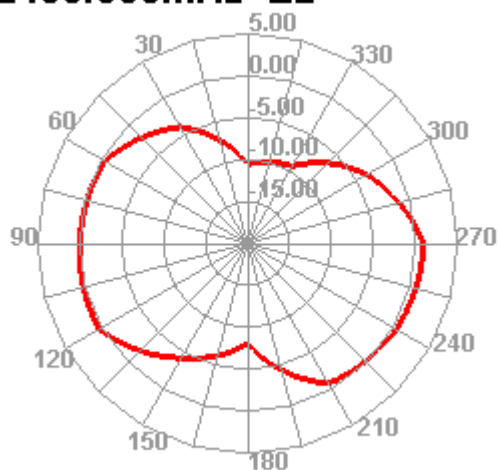


2500.000MHz

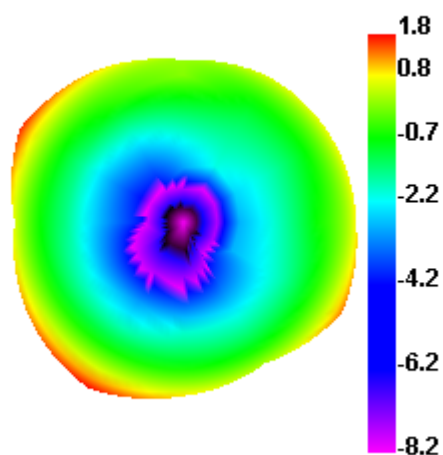


2500.000MHz H

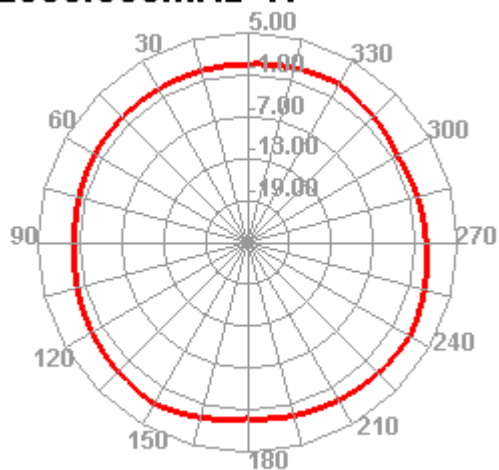

2500.000MHz E1

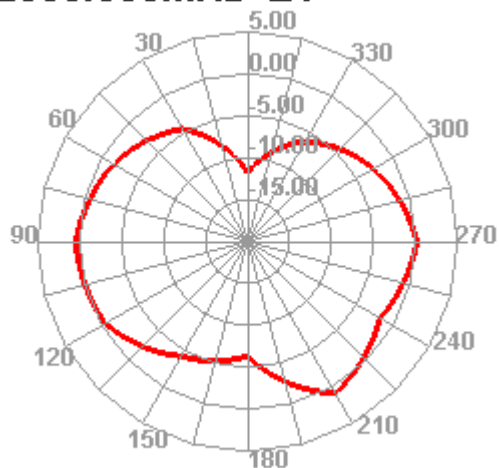

2500.000MHz E2

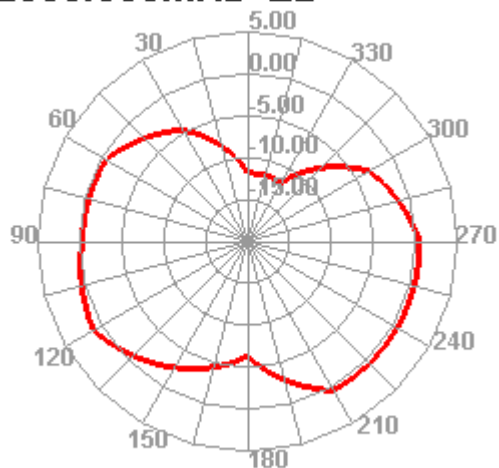

◆ Antenna Picture



◆ Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
2	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃,test antenna after 2 hours.	Temp.&Humi. Tester	No material deformation is allowed. Electronic Performance is ok .	PASS
3	Salt-Spray 6 pray Test	Placing antenna in the Salt-Spray Tester ,set the test condition , Temp: $35\pm 2^{\circ}\text{C}$ Humidity: 85% NaCl salt spray :$5\pm 1\%$.PH value :6.5~7.2 Test time:24hours	Salt-Spray Tester	No color change No appear rusting	PASS