


TEST REPORT

Applicant: MeiG Smart Technology Co., Ltd
Address: 2nd Floor, Office Building, No.5 Lingxia Road,
Fenghuang, Fuyong Street, Bao'an District,
Shenzhen City. China
Equipment Type: Smart Module
Model Name: SNM932
Brand Name: MEIGLink
FCC ID: 2APJ4-SNM932
ISED Number: 23860-SNM932
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 3
(refer to section 3.1)
Sample Arrival Date: Jun. 30, 2025
Test Date: Jul. 04, 2025 - Jul. 15, 2025
Date of Issue: Aug. 27, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Yang Wenxuan**Checked by:** Ye Hongji**Approved by:** Sunny Zou
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Aug. 27, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Test Verdict	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Software List	10
4.4	Measurement Uncertainty	10
4.5	Description of Test Setup	11
4.6	Measurement Results Explanation Example	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.2	Output Power	16
5.3	Occupied Bandwidth	18
5.4	Conducted Spurious Emission	19
5.5	Band Edge (Authorized-band band-edge)	21

5.6	Conducted Emission	23
5.7	Radiated Spurious Emission	24
5.8	Band Edge (Restricted-band band-edge).....	29
5.9	Power Spectral density (PSD).....	30
ANNEX A	TEST RESULT	31
A.1	Output Power	31
A.2	Occupied Bandwidth	46
A.3	Conducted Spurious Emissions	51
A.4	Band Edge (Authorized-band band-edge).....	60
A.5	Conducted Emissions.....	64
A.6	Radiated Emission	66
A.7	Band Edge (Restricted-band band-edge).....	80
A.8	Power Spectral Density (PSD)	83
ANNEX B	TEST SETUP PHOTOS	92
ANNEX C	EUT EXTERNAL PHOTOS	92
ANNEX D	EUT INTERNAL PHOTOS	92

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	MeiG Smart Technology Co., Ltd
Address	2nd Floor, Office Building, No.5 Lingxia Road, Fenghuang, Fuyong Street, Bao'an District, Shenzhen City. China

2.2 Manufacturer Information

Manufacturer	MeiG Smart Technology Co., Ltd
Address	2nd Floor, Office Building, No.5 Lingxia Road, Fenghuang, Fuyong Street, Bao'an District, Shenzhen City. China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Smart Module
Model Name Under Test	SNM932
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	M9328GABYF021500022
Hardware Version	V1.02
Software Version	V01_T06
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac and 802.11ax
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.	
Modulation Technology	DSSS, OFDM, OFDMA	
Product Type	☒ Mobile ☐ Portable ☐ Fix Location	
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11b/g Multi Input Multi Output (MIMO) for 802.11n	
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated for 802.11b/g Categorization as Uncorrelated for 802.11n	
Antenna Type	ANT0 ANT1	Dipole Antenna
Antenna Gain	ANT0 ANT1	3.95 dBi
Total directional gain	For power spectral density (PSD) measurements	Correlated: 6.96 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 3.95 dBi Formulas: Directional gain = G_{ANT}
	For power measurements	Correlated: 6.96 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 3.95 dBi Formulas: Directional gain = G_{ANT}
	For Conducted Out-of-Band and Spurious Measurem	Correlated: 6.96 dBi Formulas: Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi Uncorrelated: 3.95 dBi Formulas: Directional gain = G_{ANT}

	ents	
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.	

Mode	Antenna		
	ANT0	ANT1	MIMO
802.11b	√	√	√
802.11g	√	√	√
802.11n20	√	√	√
802.11n40	√	√	√
Note: All the configurations were tested, but only the worst data was shown in this report.			

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40 MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Occupied Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 3	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
5	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
6	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Test Verdict

No.	Description	FCC PART No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	Pass ^{Note 1}
2	Output Power	15.247 (b)	RSS-247, 5.4 (d)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247 (a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	RSS-247, 5.5	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	RSS-GEN, 8.9; RSS-247, 5.5	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	RSS-247, 5.5	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	RSS-247, 5.5	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	RSS-247, 5.2 (b)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	RSS-Gen, 7.3	N/A	N/A ^{Note 2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	47% to 67%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.3℃ to +24.8℃
Working Voltage of the EUT	NV (Normal Voltage)	3.80 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY56060183	2024.08.01	2025.07.31
Spectrum Analyzer	KEYSIGHT	N9020A	MY46471071	2024.07.04	2025.07.03
				2025.06.16	2026.06.15
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2024.07.04	2025.07.03
				2025.06.16	2026.06.15
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2024.08.01	2025.07.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2025.04.28	2026.04.27
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2025.02.22	2028.02.21
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2025.09.03
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2024.08.01	2025.07.31
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2024.12.05	2025.12.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2024.08.01	2025.07.31
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-01162	2023.08.04	2026.08.03
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2024.07.13	2027.07.12
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2025.04.29	2026.04.28
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2025.02.14	2028.02.13

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

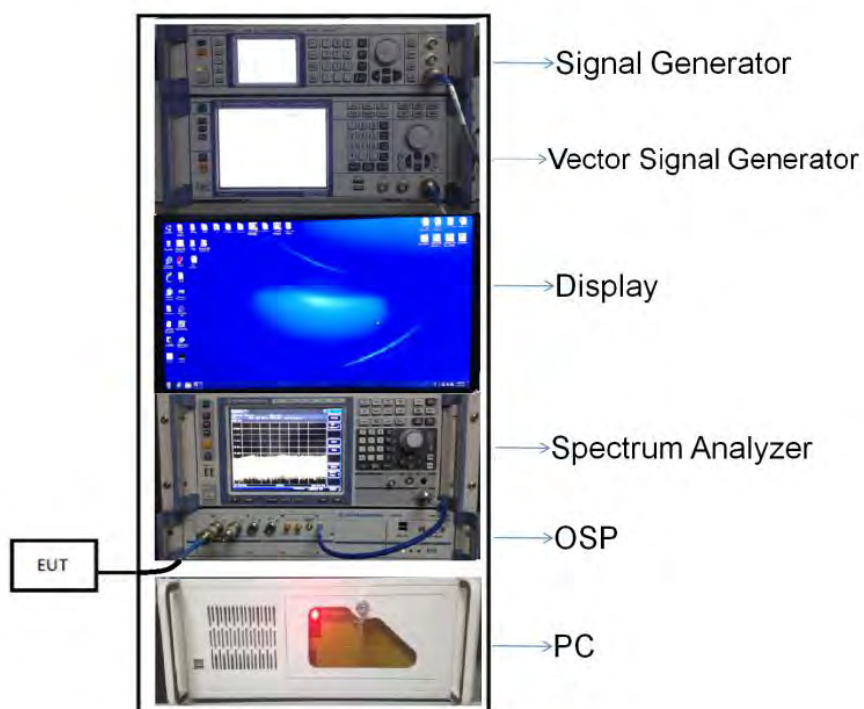


(Diagram 1)

4.5.2 For AC Power Supply Port Test

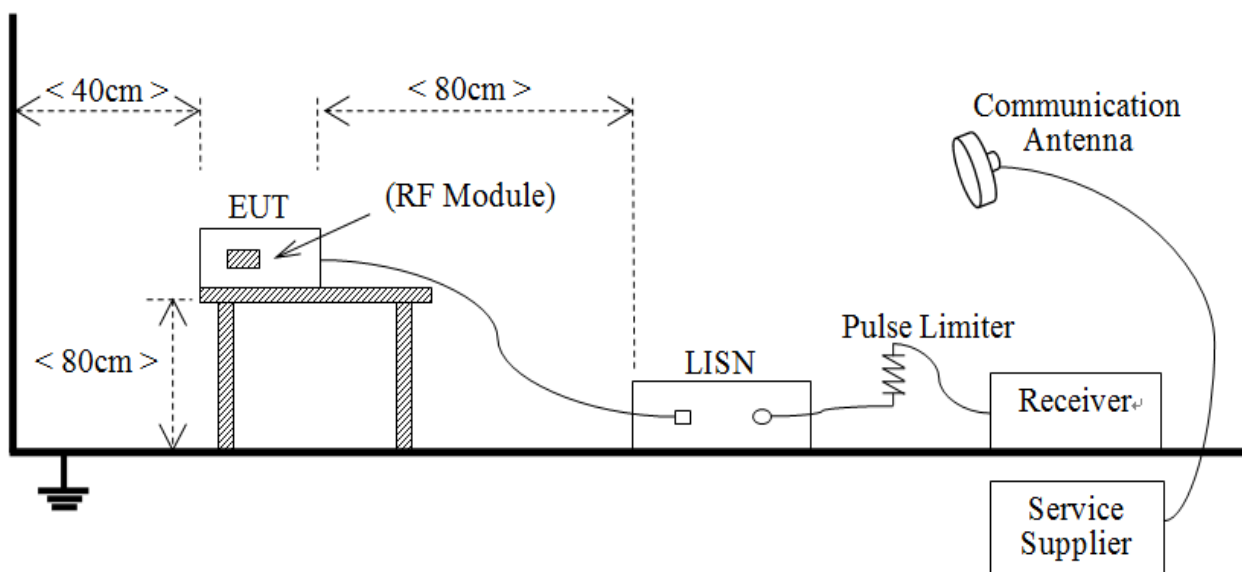


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

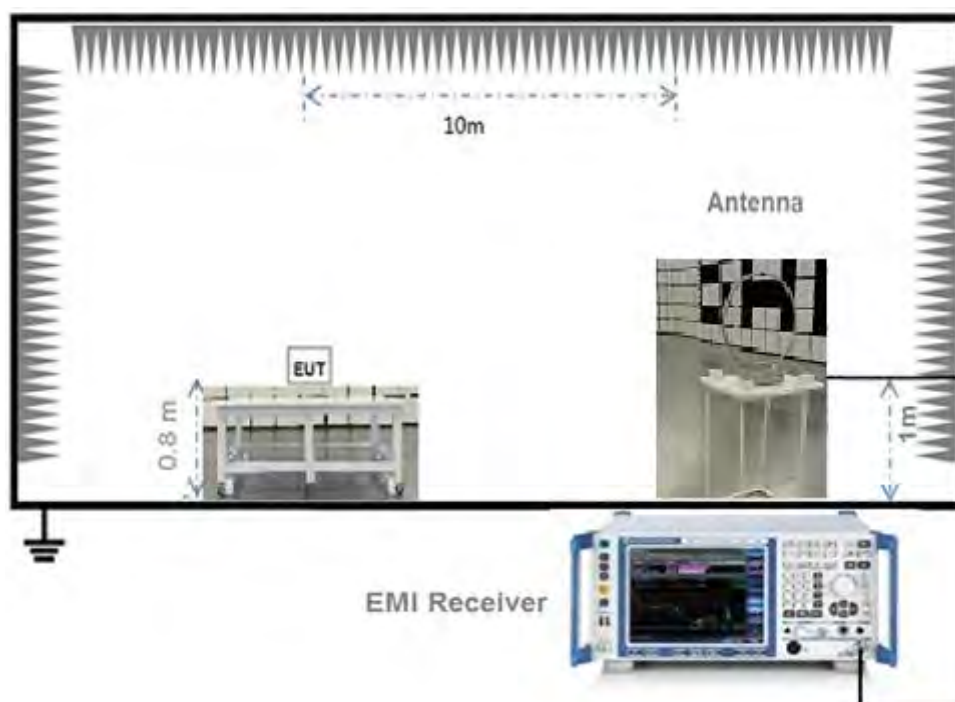


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

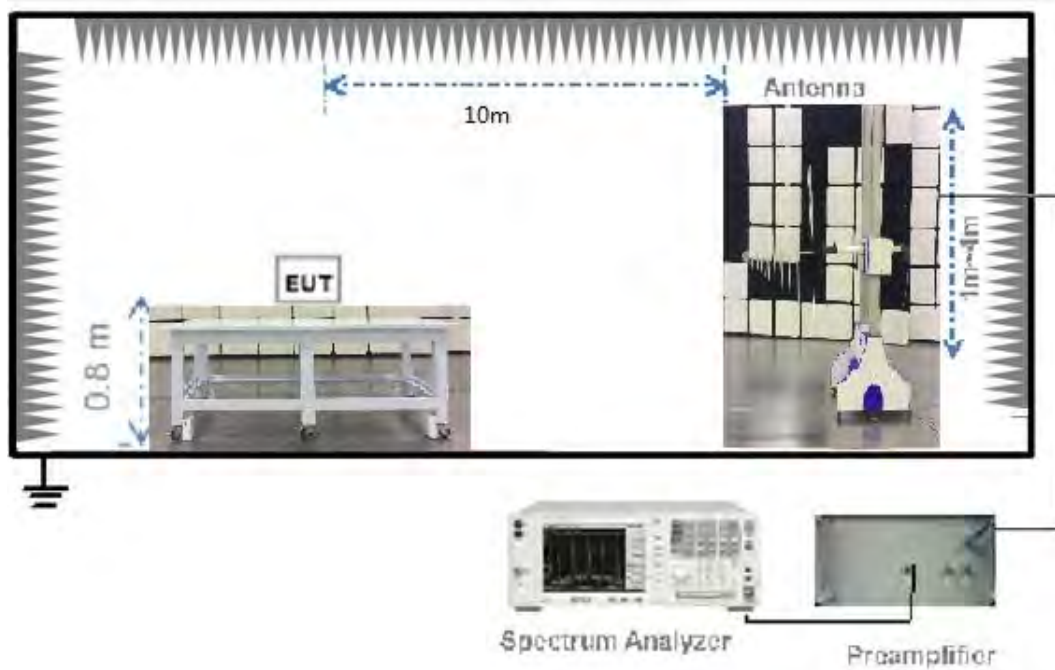

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

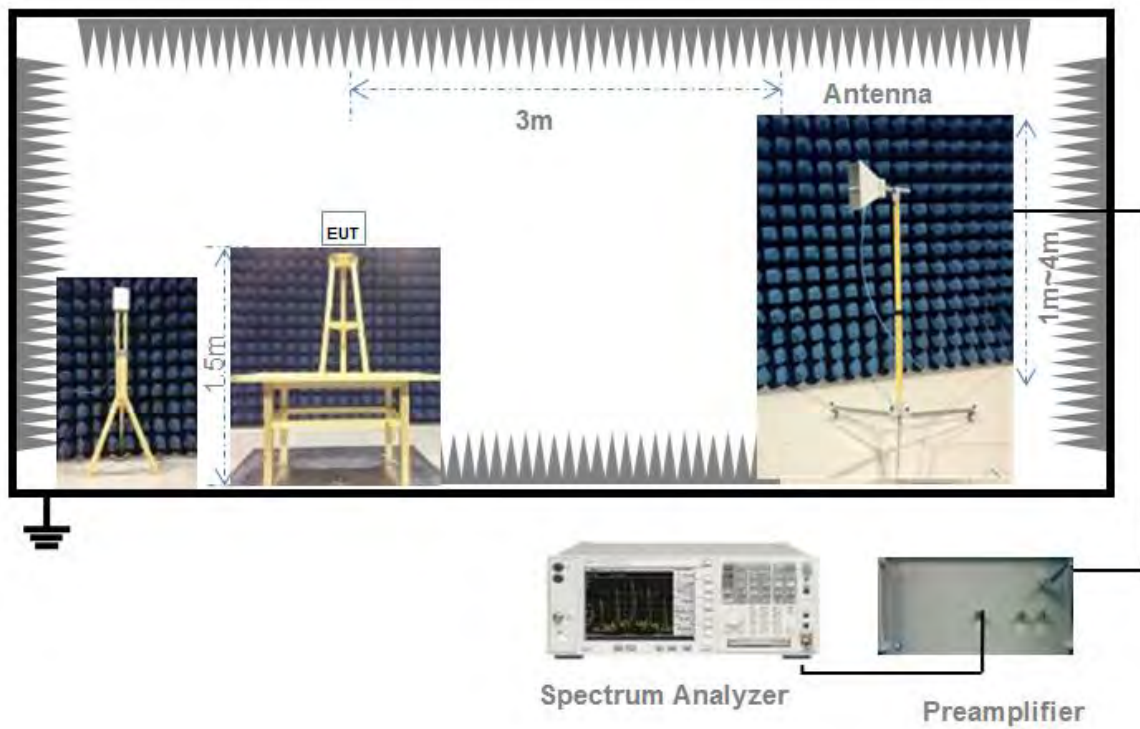

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203; RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (d)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The EUT shall be transmitted at its maximum power control level.

EIRP= Maximum peak conducted output power +Antenna Gain.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.7; RSS-247, 5.2 (a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be

longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle	Duty Factor
802.11b	0.6624	0.6762	97.96%	0.09
802.11g	2.0920	2.1120	99.05%	0.04
802.11n-20 MHz	5.3900	5.4100	99.63%	0.02
802.11n-40 MHz	5.1840	5.2110	99.48%	0.02

Peak Power Test Data

SISO-ANT0

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.40	109.65	30	1000	Pass
Middle	20.57	114.02			Pass
High	20.41	109.90			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.99	397.19	30	1000	Pass
Middle	25.90	389.05			Pass
High	26.10	407.38			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.89	388.15	30	1000	Pass
Middle	26.10	407.38			Pass
High	25.82	381.94			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.97	395.37	30	1000	Pass
Middle	26.28	424.62			Pass
High	26.00	398.11			Pass

SISO-ANT1

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.24	105.68	30	1000	Pass
Middle	20.67	116.68			Pass
High	20.25	105.93			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.75	375.84	30	1000	Pass
Middle	25.79	379.31			Pass
High	25.98	396.28			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	26.08	405.51	30	1000	Pass
Middle	26.05	402.72			Pass
High	25.84	383.71			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	26.09	406.44	30	1000	Pass
Middle	25.86	385.48			Pass
High	26.14	411.15			Pass

MIMO-ANT0

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.06	50.82	30	1000	Pass
Middle	17.07	50.93			Pass
High	17.02	50.35			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.76	188.80	30	1000	Pass
Middle	22.70	186.21			Pass
High	22.69	185.78			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.52	178.65	30	1000	Pass
Middle	22.61	182.39			Pass
High	22.33	171.00			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.71	186.64	30	1000	Pass
Middle	22.83	191.87			Pass
High	22.56	180.30			Pass

MIMO-ANT1

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.95	49.55	30	1000	Pass
Middle	17.35	54.33			Pass
High	16.78	47.64			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.31	170.22	30	1000	Pass
Middle	22.46	176.20			Pass
High	22.50	177.83			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.80	190.55	30	1000	Pass
Middle	22.58	181.13			Pass
High	22.42	174.58			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.82	191.43	30	1000	Pass
Middle	22.64	183.65			Pass
High	22.68	185.35			Pass

MIMO

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.02	100.36	30	1000	Pass
Middle	20.22	105.26			Pass
High	19.91	97.99			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.55	359.01	30	1000	Pass
Middle	25.59	362.41			Pass
High	25.61	363.61			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.67	369.19	30	1000	Pass
Middle	25.60	363.52			Pass
High	25.39	345.58			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	25.78	378.06	30	1000	Pass
Middle	25.75	375.52			Pass
High	25.63	365.65			Pass

Average Power Test DataSISO-ANT0

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.48	55.98	30	1000	Pass
Middle	17.65	58.21			Pass
High	17.45	55.59			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.65	58.21	30	1000	Pass
Middle	17.54	56.75			Pass
High	17.73	59.29			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.33	54.08	30	1000	Pass
Middle	17.59	57.41			Pass
High	17.29	53.58			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.30	53.70	30	1000	Pass
Middle	17.63	57.94			Pass
High	17.34	54.20			Pass

SISO-ANT1

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.35	54.33	30	1000	Pass
Middle	17.66	58.34			Pass
High	17.32	53.95			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.41	55.08	30	1000	Pass
Middle	17.45	55.59			Pass
High	17.64	58.08			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.57	57.15	30	1000	Pass
Middle	17.51	56.36			Pass
High	17.21	52.60			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.46	55.72	30	1000	Pass
Middle	17.17	52.12			Pass
High	17.44	55.46			Pass

MIMO-ANT0**802.11b Mode:**

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.23	26.49	30	1000	Pass
Middle	14.21	26.36			Pass
High	14.12	25.82			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.16	26.06	30	1000	Pass
Middle	14.14	25.94			Pass
High	14.35	27.23			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.94	24.77	30	1000	Pass
Middle	14.25	26.61			Pass
High	13.81	24.04			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.91	24.60	30	1000	Pass
Middle	14.38	27.42			Pass
High	13.92	24.66			Pass

MIMO-ANT1**802.11b Mode:**

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	13.88	24.43	30	1000	Pass
Middle	14.19	26.24			Pass
High	13.84	24.21			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.02	25.23	30	1000	Pass
Middle	14.19	26.24			Pass
High	14.20	26.30			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.32	27.04	30	1000	Pass
Middle	14.16	26.06			Pass
High	13.89	24.49			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.03	25.29	30	1000	Pass
Middle	13.75	23.71			Pass
High	14.14	25.94			Pass

MIMO

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.98	50.92	30	1000	Pass
Middle	17.12	52.61			Pass
High	16.90	50.03			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.06	51.30	30	1000	Pass
Middle	17.14	52.18			Pass
High	17.25	53.53			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	17.12	51.81	30	1000	Pass
Middle	17.20	52.67			Pass
High	16.84	48.53			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.96	49.90	30	1000	Pass
Middle	17.07	51.13			Pass
High	17.02	50.60			Pass

E.I.R.P Test Data (For ISED)SISO-ANT0

802.11b Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	24.35	272.27	36	4	Pass
Middle	24.52	283.14			Pass
High	24.36	272.90			Pass

802.11g Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	29.94	986.28	36	4	Pass
Middle	29.85	966.05			Pass
High	30.05	1011.58			Pass

802.11n-20 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	29.84	963.83	36	4	Pass
Middle	30.05	1011.58			Pass
High	29.77	948.42			Pass

802.11n-40 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	29.92	981.75	36	4	Pass
Middle	30.23	1054.39			Pass
High	29.95	988.55			Pass

SISO-ANT1

802.11b Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	24.19	262.42	36	4	Pass
Middle	24.62	289.73			Pass
High	24.20	263.03			Pass

802.11g Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	29.70	933.25	36	4	Pass
Middle	29.74	941.89			Pass
High	29.93	984.01			Pass

802.11n-20 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	30.03	1006.93	36	4	Pass
Middle	30.00	1000.00			Pass
High	29.79	952.80			Pass

802.11n-40 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	30.04	1009.25	36	4	Pass
Middle	29.81	957.19			Pass
High	30.09	1020.94			Pass

MIMO-ANT0

802.11b Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	21.01	126.18	36	4	Pass
Middle	21.02	126.47			Pass
High	20.97	125.03			Pass

802.11g Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	26.71	468.81	36	4	Pass
Middle	26.65	462.38			Pass
High	26.64	461.32			Pass

802.11n-20 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	26.47	443.61	36	4	Pass
Middle	26.56	452.90			Pass
High	26.28	424.62			Pass

802.11n-40 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	26.66	463.45	36	4	Pass
Middle	26.78	476.43			Pass
High	26.51	447.71			Pass

MIMO-ANT1**802.11b Mode:**

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	20.90	123.03	36	4	Pass
Middle	21.30	134.90			Pass
High	20.73	118.30			Pass

802.11g Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	26.26	422.67	36	4	Pass
Middle	26.41	437.52			Pass
High	26.45	441.57			Pass

802.11n-20 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	26.75	473.15	36	4	Pass
Middle	26.53	449.78			Pass
High	26.37	433.51			Pass

802.11n-40 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	26.77	475.34	36	4	Pass
Middle	26.59	456.04			Pass
High	26.63	460.26			Pass

MIMO

802.11b Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	23.97	249.46	36	4	Pass
Middle	24.17	261.22			Pass
High	23.86	243.22			Pass

802.11g Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	29.50	891.25	36	4	Pass
Middle	29.54	899.50			Pass
High	29.56	903.65			Pass

802.11n-20 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	29.62	916.22	36	4	Pass
Middle	29.55	901.57			Pass
High	29.34	859.01			Pass

802.11n-40 MHz Mode:

Channel	E.I.R.P		Limit		Verdict
	dBm	mW	dBm	W	
Low	29.73	939.72	36	4	Pass
Middle	29.70	933.25			Pass
High	29.58	907.82			Pass

A.2 Occupied Bandwidth

Note: All antenna were pre tested, but only the worst case has been reported in this report.

Test Data

SISO-ANT1

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	7.700000	13.264000	≥ 500
Middle	7.800000	13.205000	≥ 500
High	7.300000	13.140000	≥ 500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.300000	16.569000	≥ 500
Middle	15.300000	16.551000	≥ 500
High	15.300000	16.546000	≥ 500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	15.200000	17.722000	≥ 500
Middle	15.300000	17.714000	≥ 500
High	15.200000	17.657000	≥ 500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	35.200000	35.818000	≥ 500
Middle	35.200000	35.957000	≥ 500
High	35.200000	35.868000	≥ 500

Test Plots

SISO-ANT1

6 dB Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL



802.11g MIDDLE CHANNEL



802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL



802.11n-20 MHz MIDDLE CHANNEL



802.11n-20 MHz HIGH CHANNEL



802.11n-40 MHz LOW CHANNEL



802.11n-40 MHz MIDDLE CHANNEL



802.11n-40 MHz HIGH CHANNEL



99% Bandwidth

802.11b LOW CHANNEL



802.11b MIDDLE CHANNEL



802.11b HIGH CHANNEL



802.11g LOW CHANNEL




802.11g MIDDLE CHANNEL




802.11g HIGH CHANNEL



802.11n-20 MHz LOW CHANNEL

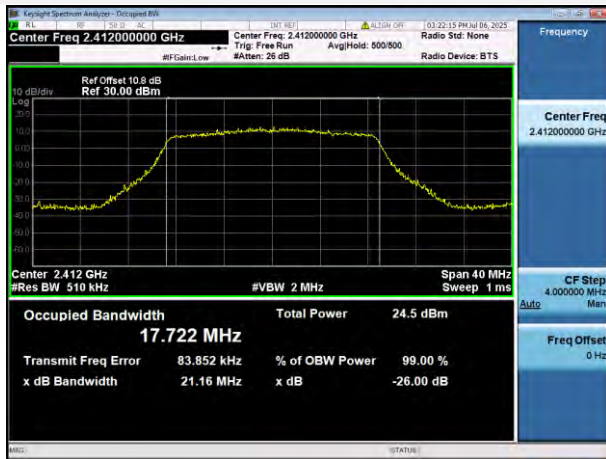


802.11n-20 MHz MIDDLE CHANNEL

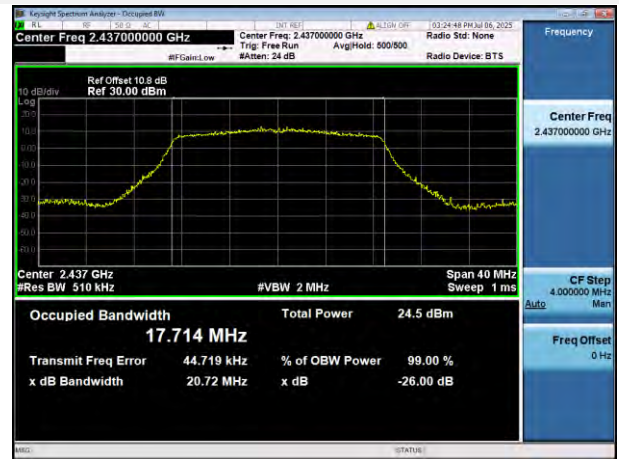


802.11n-20 MHz HIGH CHANNEL



802.11n-40 MHz LOW CHANNEL

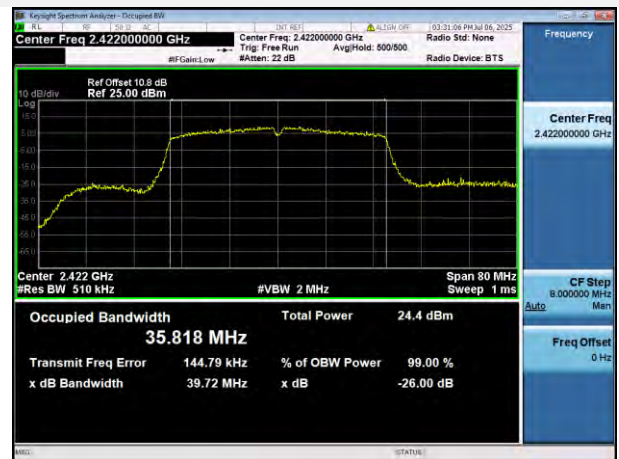

802.11n-40 MHz MIDDLE CHANNEL

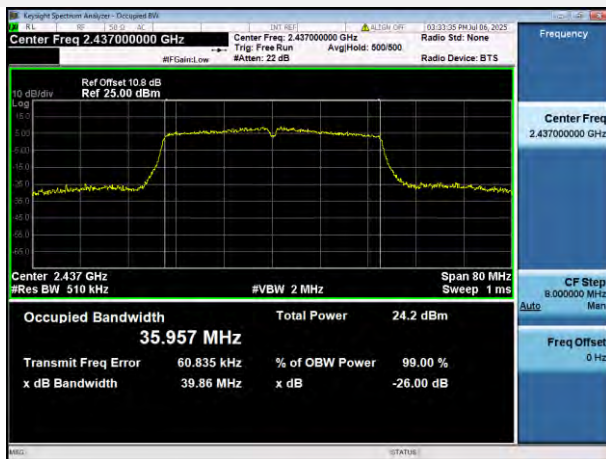

802.11n-40 MHz HIGH CHANNEL



A.3 Conducted Spurious Emissions

Note: All antenna were pre tested, but only the worst case has been reported in this report.

Test Data

SISO-ANT1

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-47.54	8.82	-11.18	Pass
Middle	-43.28	9.31	-10.69	Pass
High	-43.50	9.31	-10.69	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-44.60	7.59	-12.41	Pass
Middle	-44.89	7.35	-12.65	Pass
High	-47.72	8.51	-11.49	Pass

802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-44.08	6.20	-13.80	Pass
Middle	-45.43	7.64	-12.36	Pass
High	-43.88	8.40	-11.60	Pass

802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-45.84	4.35	-15.65	Pass
Middle	-44.28	4.00	-16.00	Pass
High	-43.45	4.23	-15.77	Pass


Test Plots

SISO-ANT1

802.11b LOW CHANNEL CARRIER LEVEL



802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

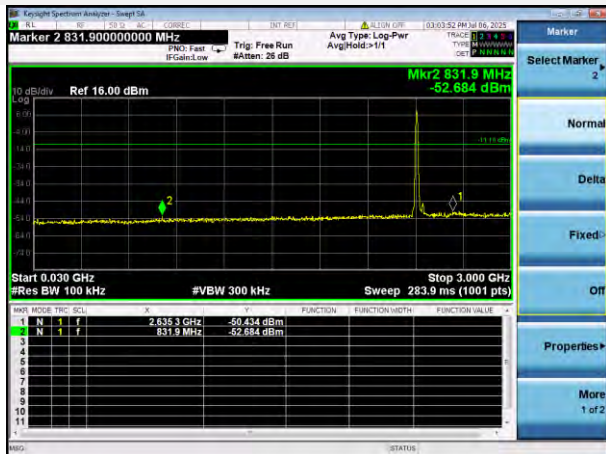


802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




802.11b MIDDLE CHANNEL CARRIER LEVEL



802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

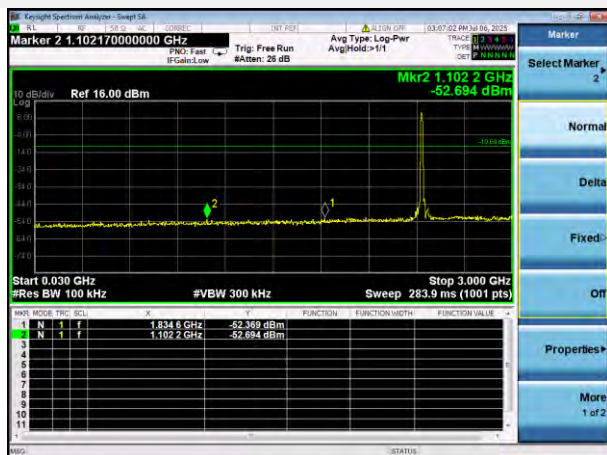


802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

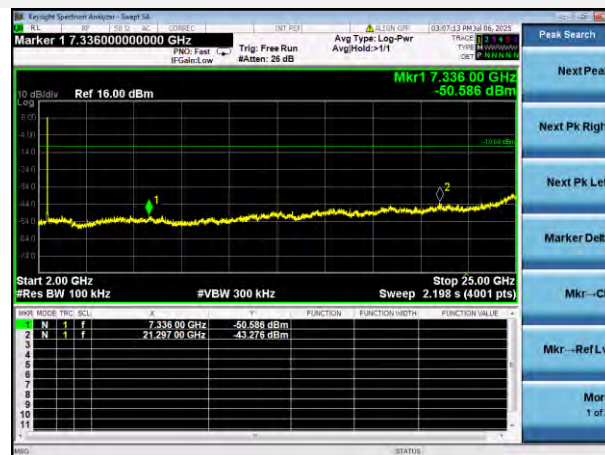


802.11b HIGH CHANNEL CARRIER LEVEL



802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

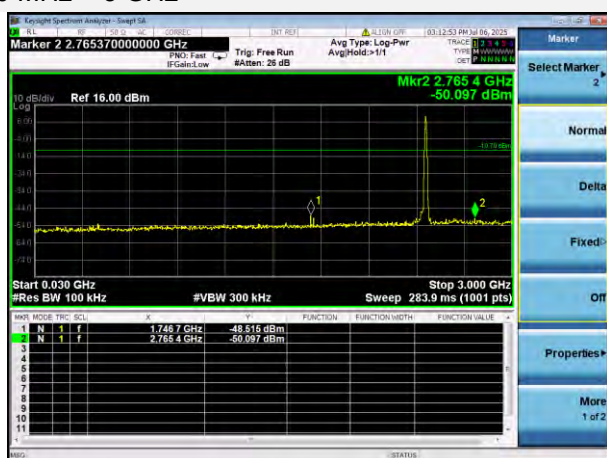



802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

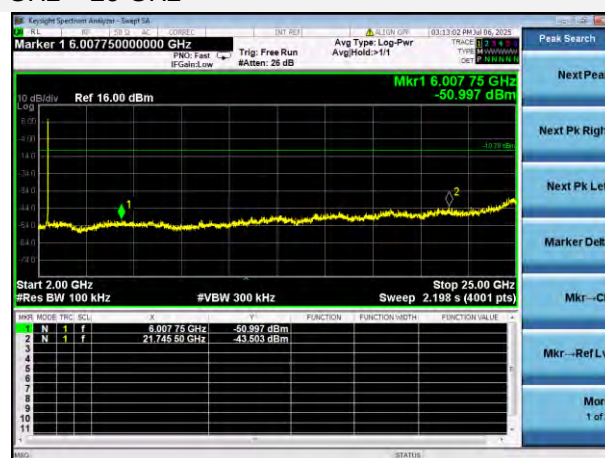


802.11g LOW CHANNEL CARRIER LEVEL




802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

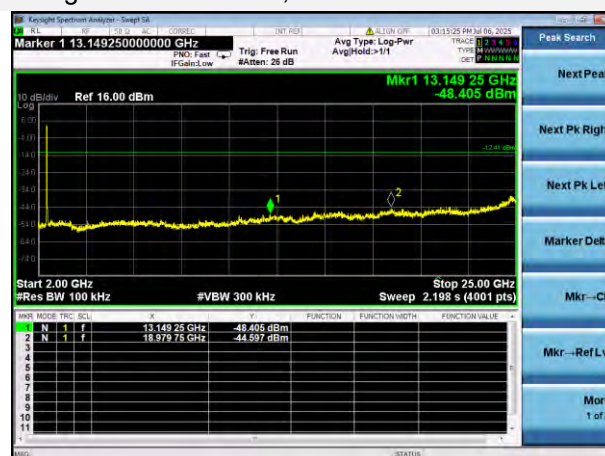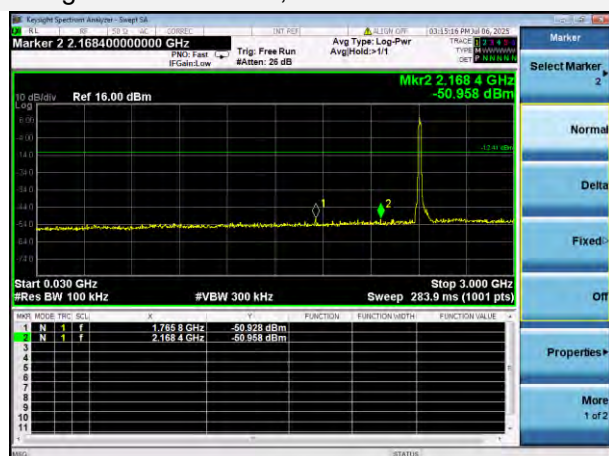


802.11g MIDDLE CHANNEL CARRIER LEVEL

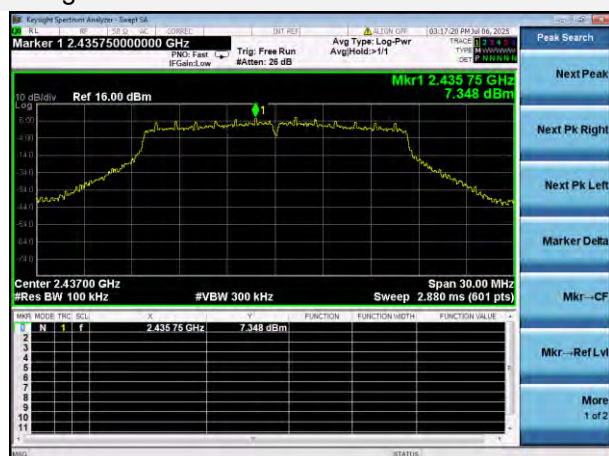


802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

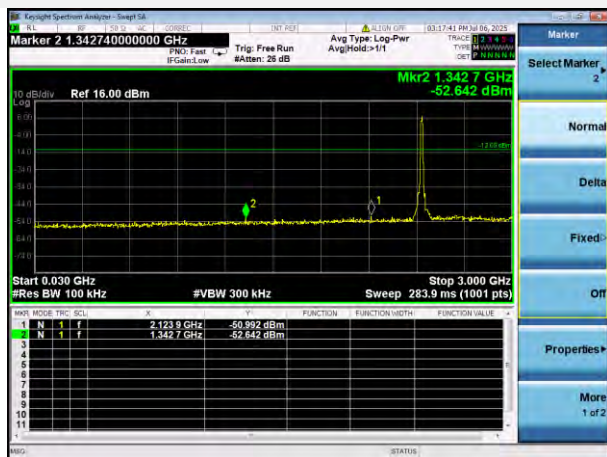


802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

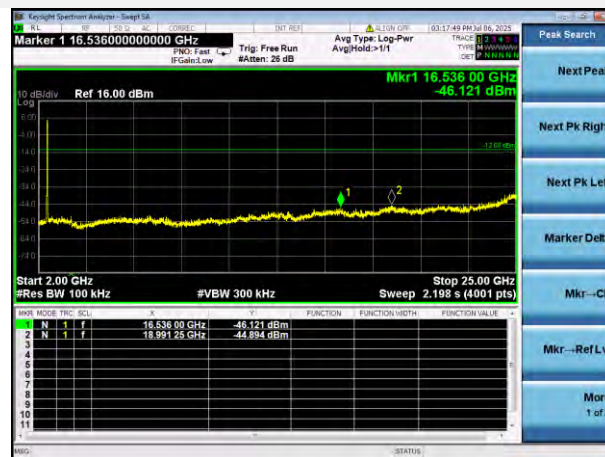


802.11g HIGH CHANNEL CARRIER LEVEL

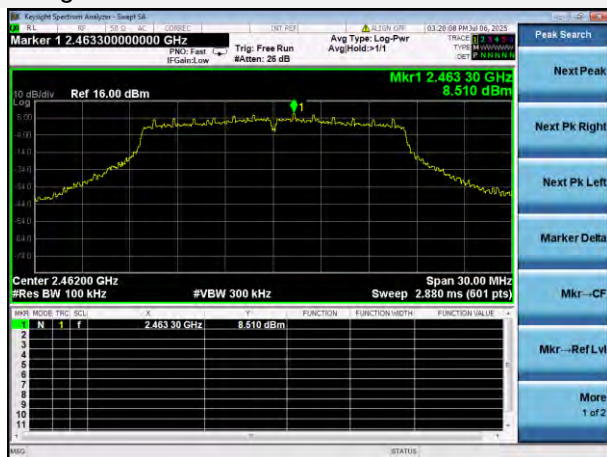



802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

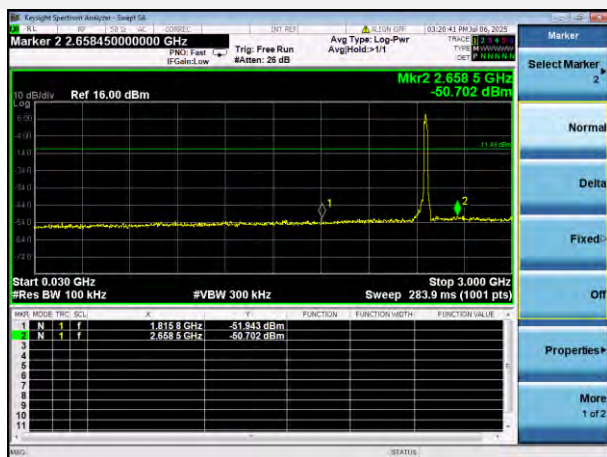


802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

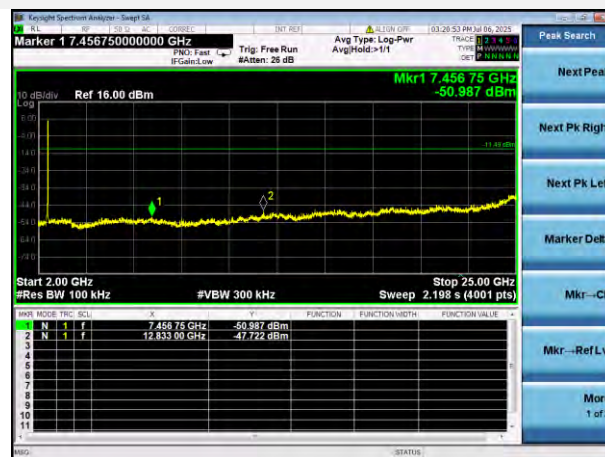


802.11n-20 MHz LOW CHANNEL CARRIER LEVEL

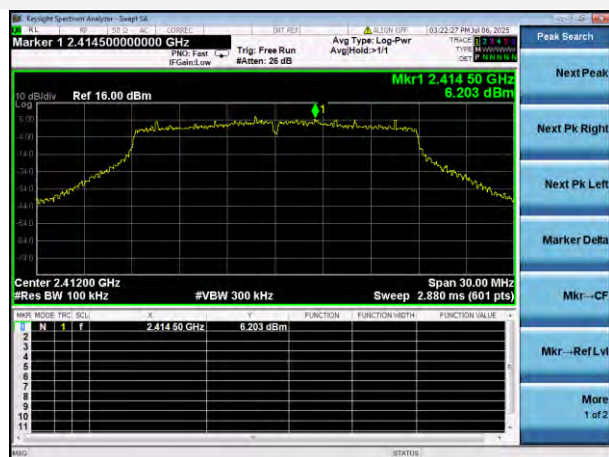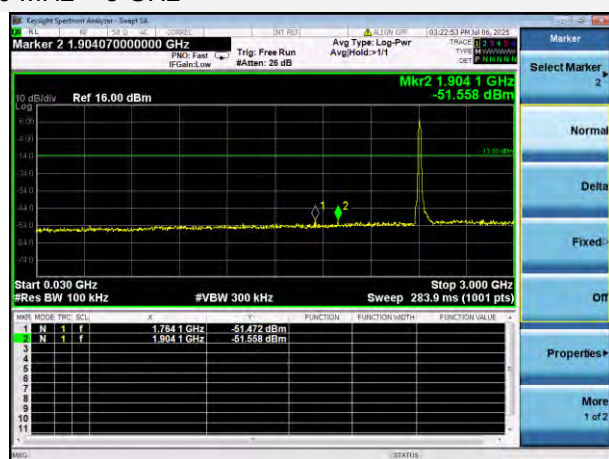802.11n-20 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-20 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-20 MHz MIDDLE CHANNEL CARRIER LEVEL

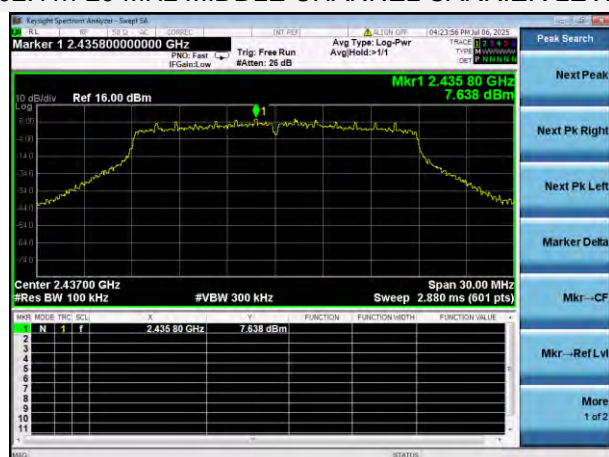


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

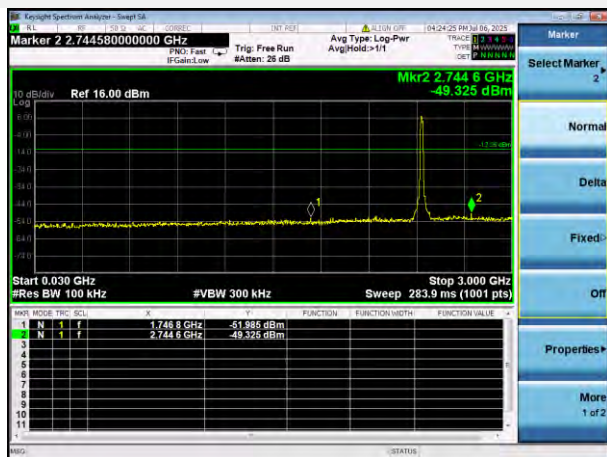


802.11n-20 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

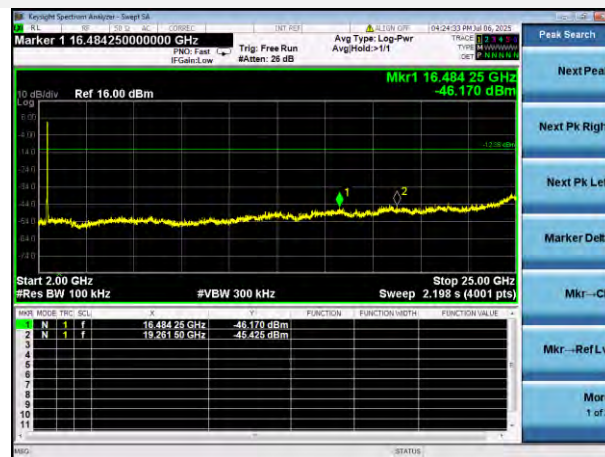


802.11n-20 MHz HIGH CHANNEL CARRIER LEVEL

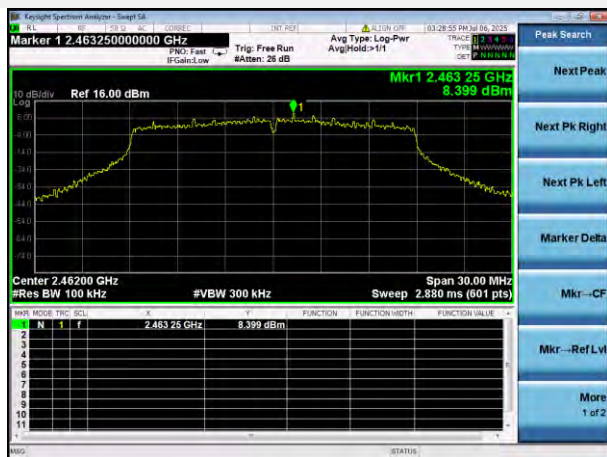




802.11n-20 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

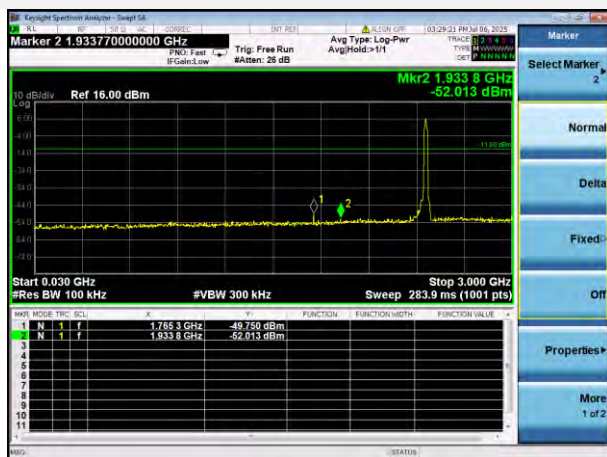


802.11n-20 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

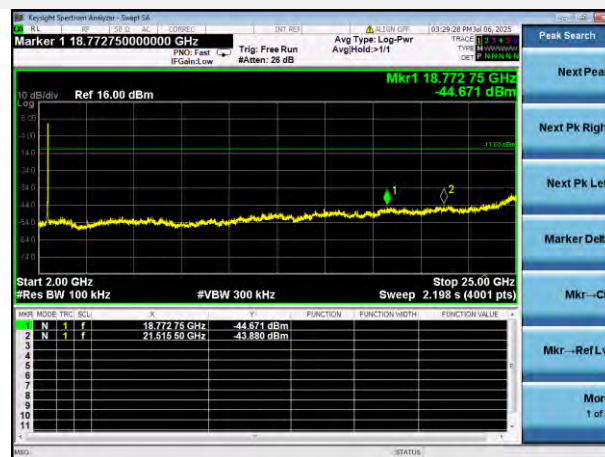


802.11n-40 MHz LOW CHANNEL CARRIER LEVEL

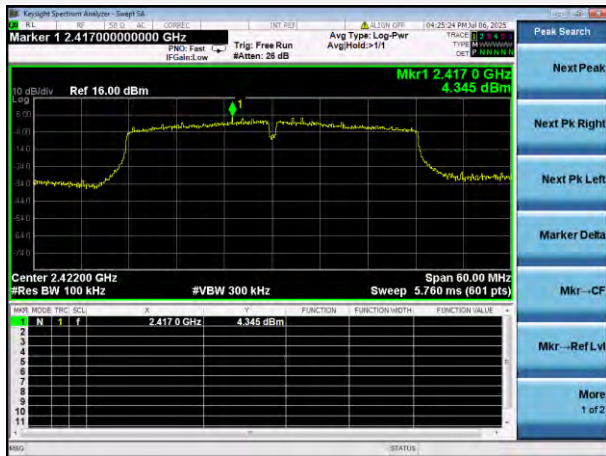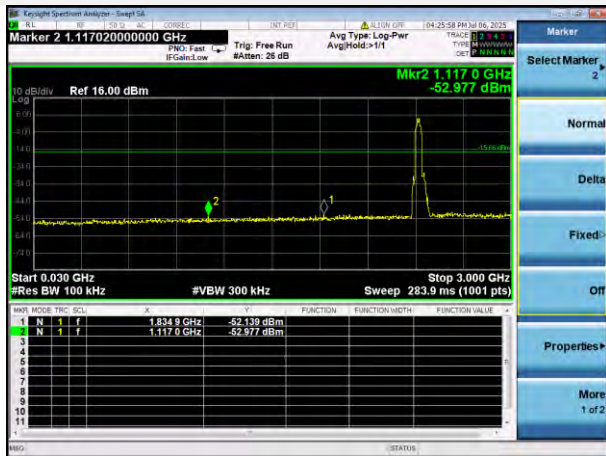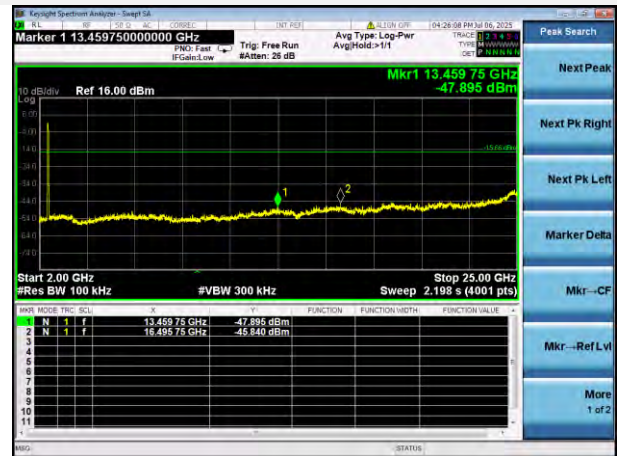802.11n-40 MHz LOW CHANNEL, SPURIOUS
30 MHz ~ 3 GHz802.11n-40 MHz LOW CHANNEL, SPURIOUS
2 GHz ~ 25 GHz


802.11n-40 MHz MIDDLE CHANNEL CARRIER LEVEL

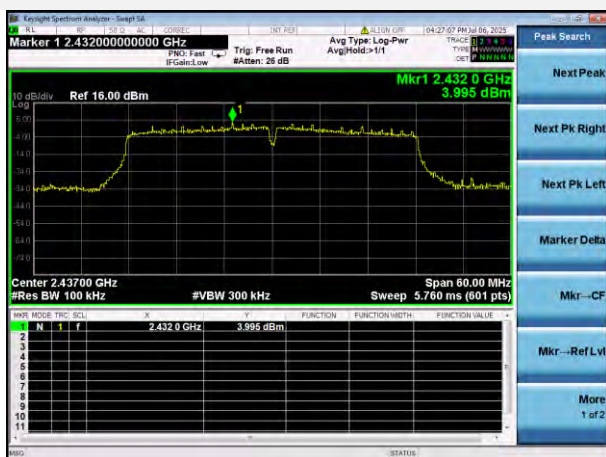


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

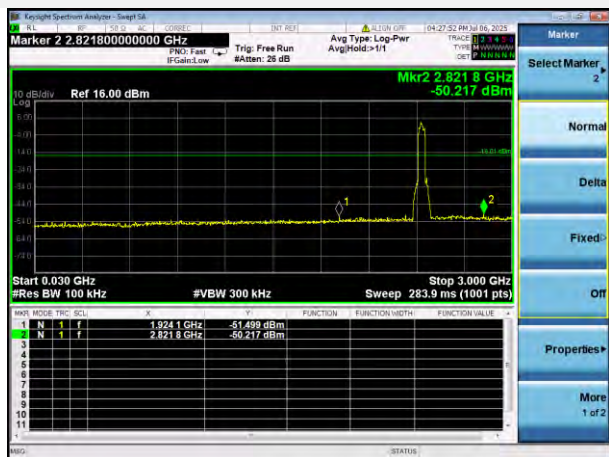


802.11n-40 MHz MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

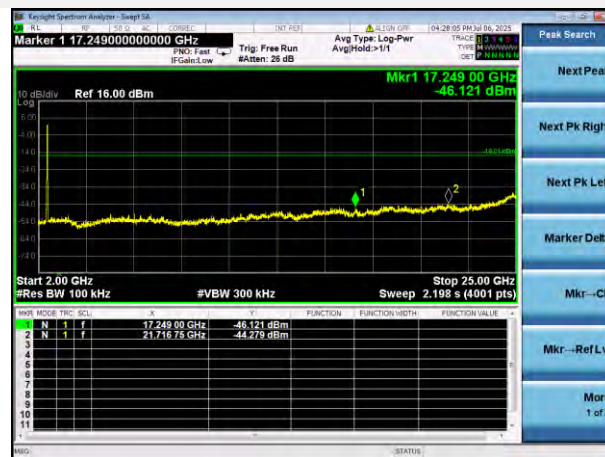


802.11n-40 MHz HIGH CHANNEL CARRIER LEVEL

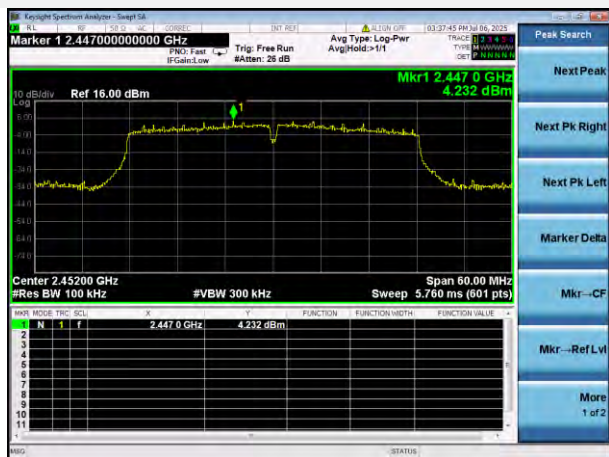

802.11n-40 MHz HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

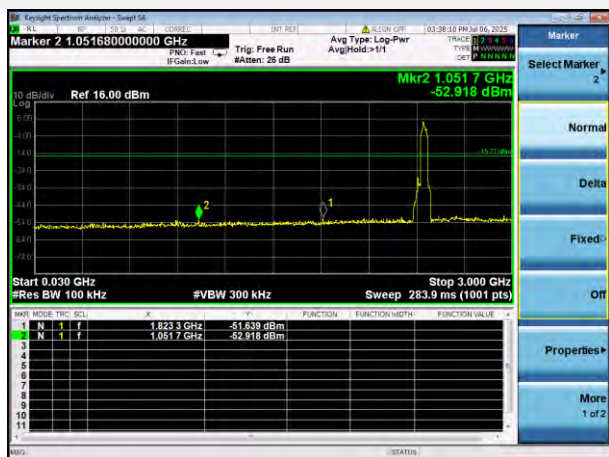

802.11n-40 MHz HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

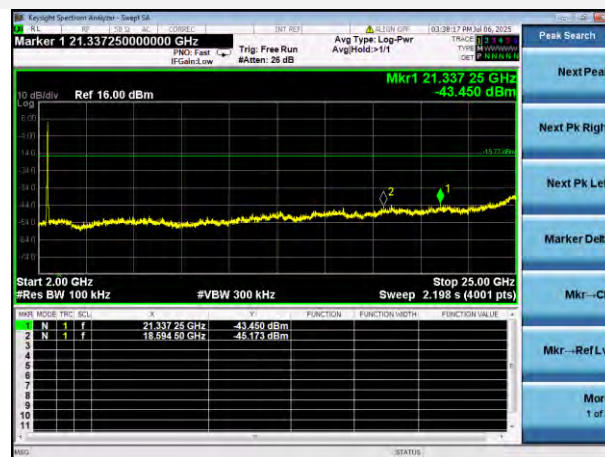

A.4 Band Edge (Authorized-band band-edge)

Note ¹: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

Note ²: All antenna were pre tested, but only the worst case has been reported in this report.

Test Data

SISO-ANT1

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-44.29	8.82	-11.18	Pass
High Channel	-49.17	9.31	-10.69	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-33.69	7.59	-12.41	Pass
High Channel	-40.82	8.51	-11.49	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-30.74	6.20	-13.80	Pass
High Channel	-41.34	8.40	-11.60	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-31.98	4.35	-15.65	Pass
High Channel	-31.02	4.23	-15.77	Pass

Test Plots

SISO-ANT1

802.11b LOW CHANNEL, CARRIER LEVEL




802.11b LOW CHANNEL, BAND EDGE



802.11b HIGH CHANNEL, CARRIER LEVEL



802.11b HIGH CHANNEL, BAND EDGE

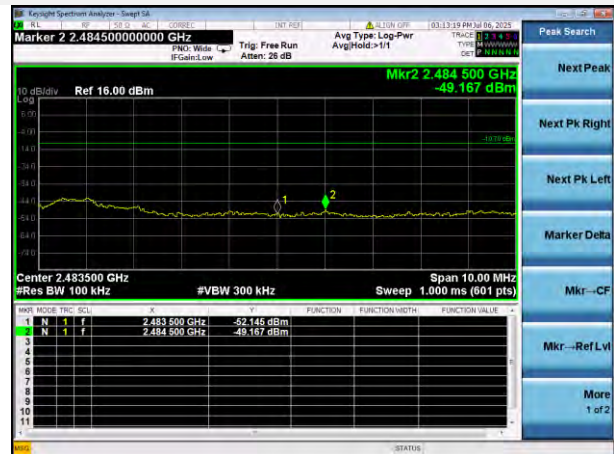


802.11g LOW CHANNEL, CARRIER LEVEL




802.11g LOW CHANNEL, BAND EDGE




802.11g HIGH CHANNEL, CARRIER LEVEL

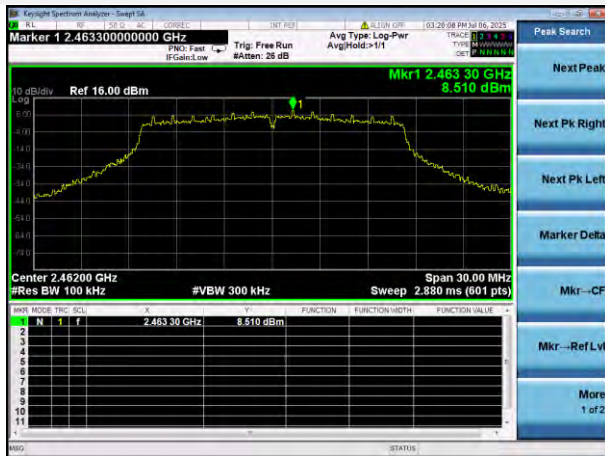

802.11g HIGH CHANNEL, BAND EDGE

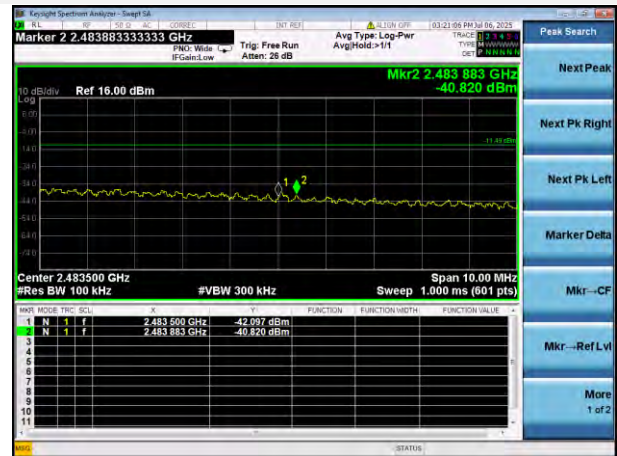


802.11n-20 MHz LOW CHANNEL, CARRIER LEVEL

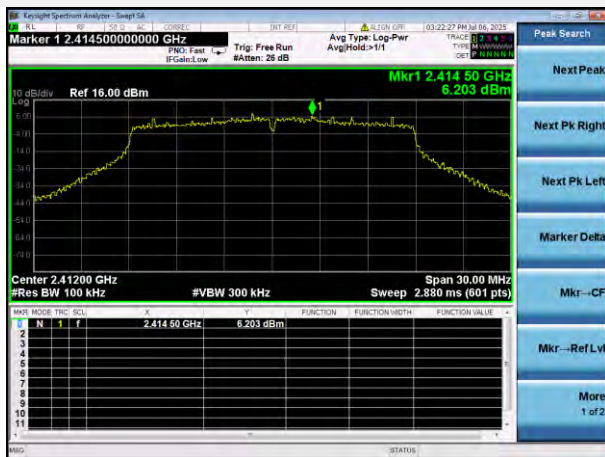


802.11n-20 MHz LOW CHANNEL, BAND EDGE




802.11n-20 MHz HIGH CHANNEL, CARRIER LEVEL

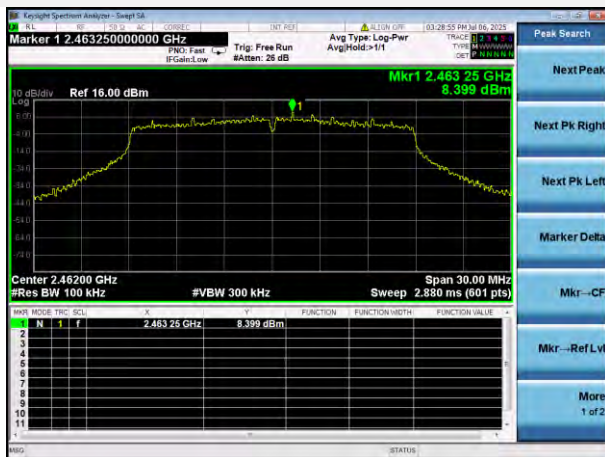

802.11n-20 MHz HIGH CHANNEL, BAND EDGE

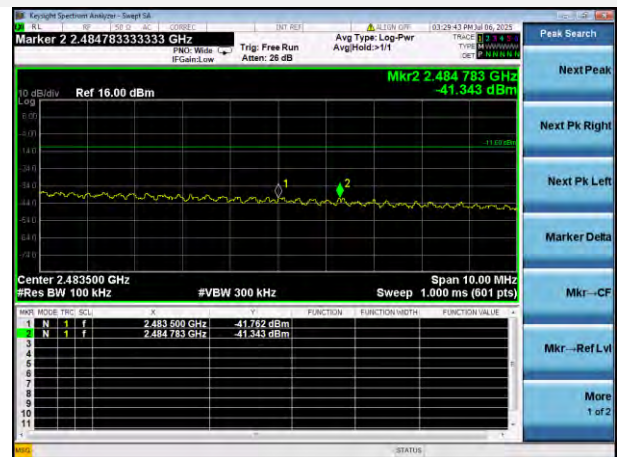


802.11n-40 MHz LOW CHANNEL, CARRIER LEVEL

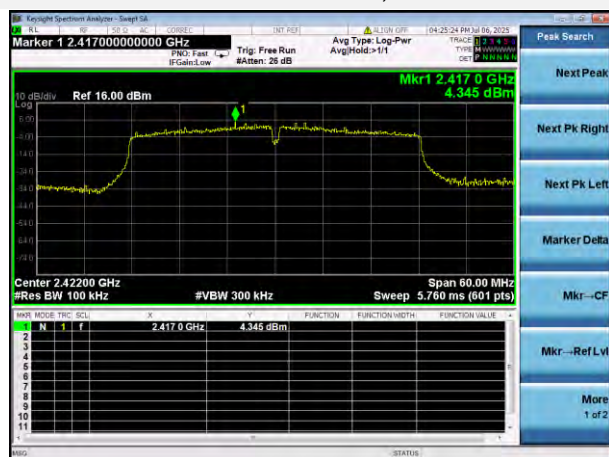


802.11n-40 MHz LOW CHANNEL, BAND EDGE



802.11n-40 MHz HIGH CHANNEL, CARRIER LEVEL

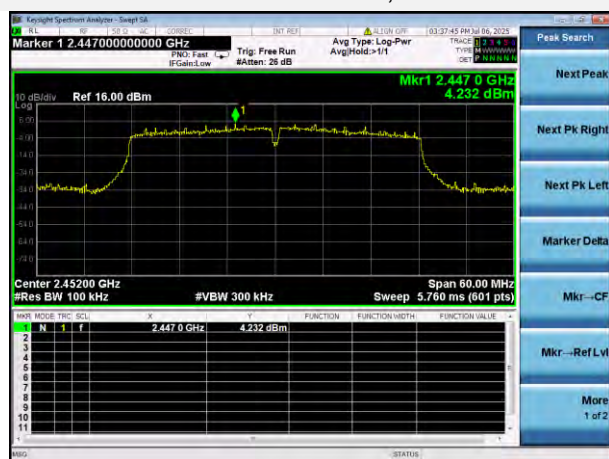

802.11n-40 MHz HIGH CHANNEL, BAND EDGE

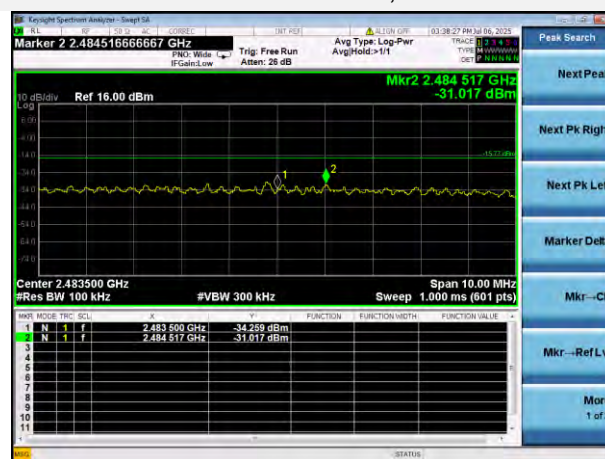

A.5 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

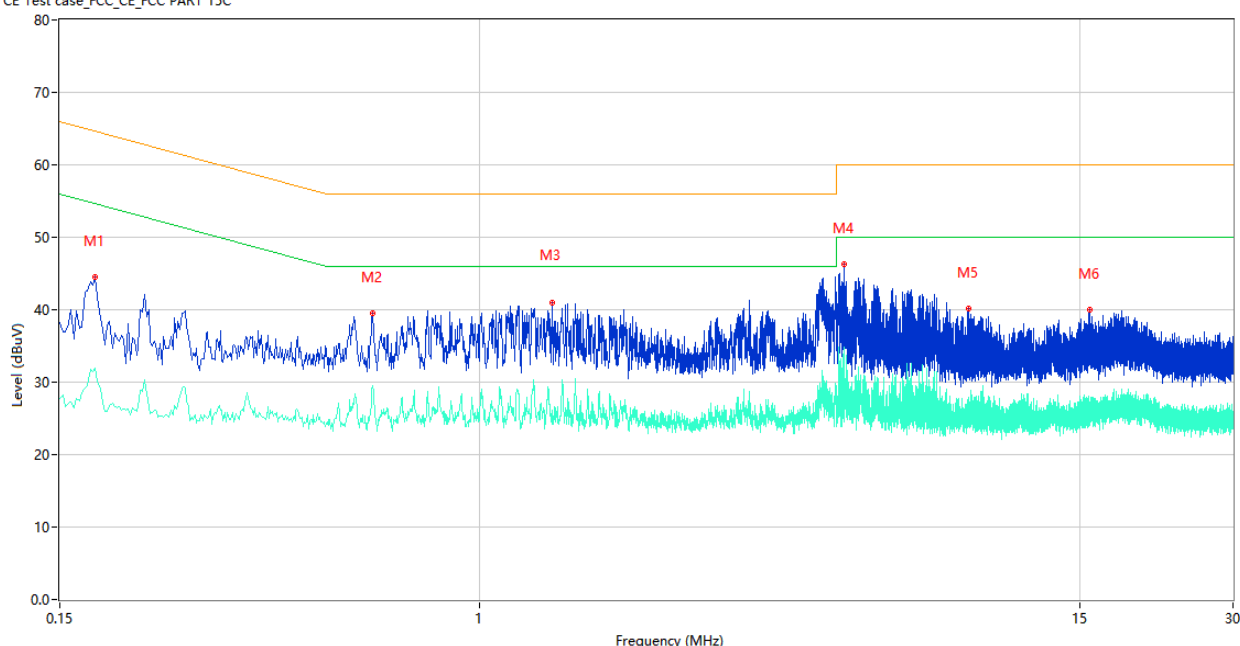

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.176	44.49	9.85	64.67	20.18	Peak	L	Pass
1**	0.176	31.96	9.85	54.67	22.71	AV	L	Pass
2	0.616	39.52	10.24	56.00	16.48	Peak	L	Pass
2**	0.616	29.48	10.24	46.00	16.52	AV	L	Pass
3	1.386	41.01	9.86	56.00	14.99	Peak	L	Pass
3**	1.386	24.14	9.86	46.00	21.86	AV	L	Pass
4	5.184	46.26	10.27	60.00	13.74	Peak	L	Pass
4**	5.184	28.34	10.27	50.00	21.66	AV	L	Pass
5	9.094	40.14	10.29	60.00	19.86	Peak	L	Pass
5**	9.094	27.91	10.29	50.00	22.09	AV	L	Pass
6	15.694	40.01	10.72	60.00	19.99	Peak	L	Pass
6**	15.694	25.14	10.72	50.00	24.86	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

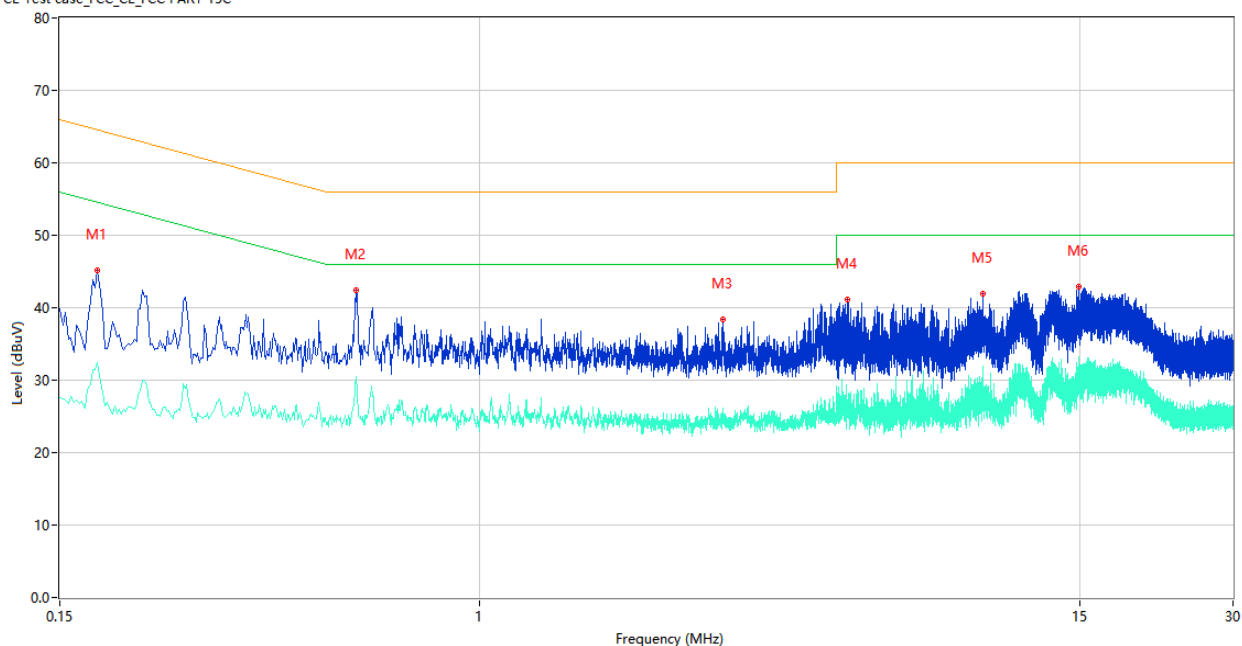

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.178	45.10	9.85	64.58	19.48	Peak	N	Pass
1**	0.178	32.35	9.85	54.58	22.23	AV	N	Pass
2	0.572	42.45	10.15	56.00	13.55	Peak	N	Pass
2**	0.572	30.44	10.15	46.00	15.56	AV	N	Pass
3	3.000	38.43	10.33	56.00	17.57	Peak	N	Pass
3**	3.000	24.00	10.33	46.00	22.00	AV	N	Pass
4	5.270	41.08	10.46	60.00	18.92	Peak	N	Pass
4**	5.270	26.16	10.46	50.00	23.84	AV	N	Pass
5	9.708	41.86	10.57	60.00	18.14	Peak	N	Pass
5**	9.708	31.91	10.57	50.00	18.09	AV	N	Pass
6	14.926	42.90	11.11	60.00	17.10	Peak	N	Pass
6**	14.926	33.22	11.11	50.00	16.78	AV	N	Pass

A.6 Radiated Emission

Note¹: The symbol of “--” in the table which means not application.

Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

30 MHz to 1 GHz, ANT H


10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

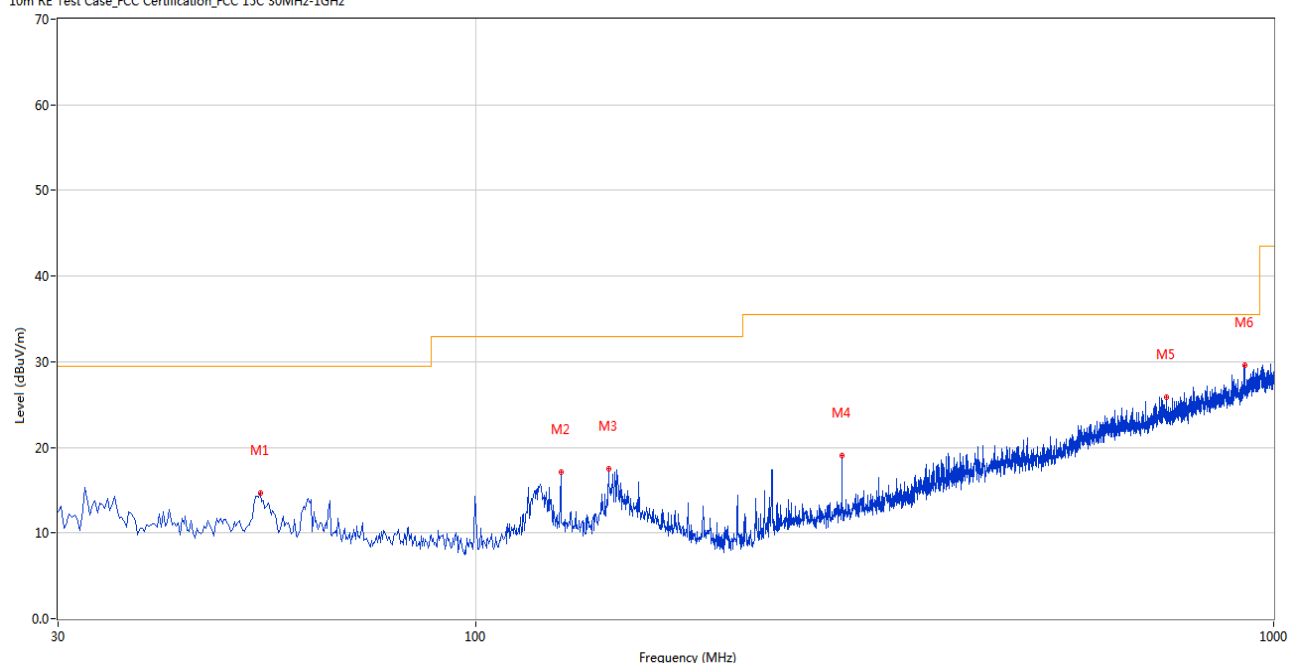

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.759	14.65	-27.06	29.5	14.85	Peak	221.00	100	Horizontal	Pass
2	127.946	17.10	-27.47	33.0	15.90	Peak	237.00	100	Horizontal	Pass
3	146.856	17.53	-26.20	33.0	15.47	Peak	253.00	200	Horizontal	Pass
4	287.956	19.06	-25.91	35.5	16.44	Peak	58.00	200	Horizontal	Pass
5	733.317	25.93	-13.95	35.5	9.57	Peak	323.00	200	Horizontal	Pass
6	919.025	29.65	-10.36	35.5	5.85	Peak	75.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15C 30MHz-1GHz

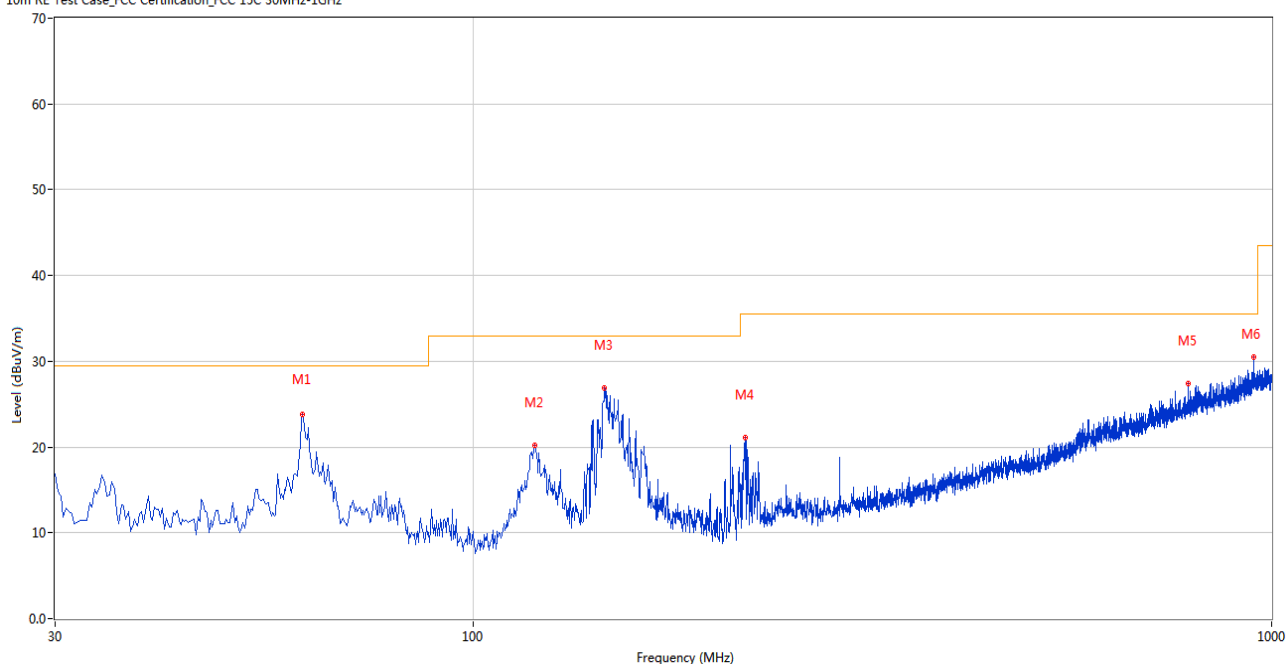

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	61.275	23.83	-27.61	29.5	5.67	Peak	286.00	100	Vertical	Pass
2	119.460	20.26	-28.12	33.0	12.74	Peak	0.00	200	Vertical	Pass
3	146.128	26.89	-26.29	33.0	6.11	Peak	302.00	100	Vertical	Pass
4	219.588	21.07	-29.26	35.5	14.43	Peak	275.00	100	Vertical	Pass
5	785.441	27.36	-12.69	35.5	8.14	Peak	356.00	200	Vertical	Pass
6	949.330	30.51	-9.61	35.5	4.99	Peak	349.00	200	Vertical	Pass

Note ¹: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note ²: The spurious above 18G is noise only, do not show on the report.

Note ³: All antenna were pre tested, but only the worst case has been reported in this report.

SISO-ANT1

1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.185	44.14	74.0	29.86	Peak	134.00	100	Horizontal	Pass
1**	1327.185	37.11	54.0	16.89	AV	134.00	100	Horizontal	Pass
2	2993.780	52.78	74.0	21.22	Peak	243.00	100	Horizontal	Pass
2**	2993.780	43.70	54.0	10.30	AV	243.00	100	Horizontal	Pass
3	4931.958	50.43	74.0	23.57	Peak	262.00	200	Horizontal	Pass
3**	4931.958	44.30	54.0	9.70	AV	262.00	200	Horizontal	Pass
4	6807.248	55.34	74.0	18.66	Peak	81.00	100	Horizontal	Pass
4**	6807.248	42.73	54.0	11.27	AV	81.00	100	Horizontal	Pass
5	13411.692	58.03	74.0	15.97	Peak	288.00	400	Horizontal	Pass
5**	13411.692	48.90	54.0	5.10	AV	288.00	400	Horizontal	Pass
6	17428.696	54.79	74.0	19.21	Peak	275.00	400	Horizontal	Pass
6**	17428.696	48.71	54.0	5.29	AV	275.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.946	42.68	74.0	31.32	Peak	353.00	100	Vertical	Pass
1**	1332.946	35.24	54.0	18.76	AV	353.00	100	Vertical	Pass
2	2984.675	51.12	74.0	22.88	Peak	245.00	300	Vertical	Pass
2**	2984.675	39.71	54.0	14.29	AV	245.00	300	Vertical	Pass
3	4852.156	51.43	74.0	22.57	Peak	96.00	200	Vertical	Pass
3**	4852.156	41.88	54.0	12.12	AV	96.00	200	Vertical	Pass
4	6605.619	53.53	74.0	20.47	Peak	0.00	200	Vertical	Pass
4**	6605.619	45.47	54.0	8.53	AV	0.00	200	Vertical	Pass
5	13434.381	55.76	74.0	18.24	Peak	86.00	200	Vertical	Pass
5**	13434.381	47.63	54.0	6.37	AV	86.00	200	Vertical	Pass
6	17413.222	54.44	74.0	19.56	Peak	148.00	300	Vertical	Pass
6**	17413.222	44.68	54.0	9.32	AV	148.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.743	45.84	74.0	28.16	Peak	326.00	300	Horizontal	Pass
1**	1329.743	37.34	54.0	16.66	AV	326.00	300	Horizontal	Pass
2	2993.387	47.59	74.0	26.41	Peak	46.00	200	Horizontal	Pass
2**	2993.387	43.35	54.0	10.65	AV	46.00	200	Horizontal	Pass
3	4935.520	54.32	74.0	19.68	Peak	32.00	200	Horizontal	Pass
3**	4935.520	43.08	54.0	10.92	AV	32.00	200	Horizontal	Pass
4	6808.940	54.91	74.0	19.09	Peak	357.00	200	Horizontal	Pass
4**	6808.940	43.94	54.0	10.06	AV	357.00	200	Horizontal	Pass
5	13412.249	56.03	74.0	17.97	Peak	153.00	300	Horizontal	Pass
5**	13412.249	43.68	54.0	10.32	AV	153.00	300	Horizontal	Pass
6	17428.269	58.05	74.0	15.95	Peak	135.00	300	Horizontal	Pass
6**	17428.269	47.62	54.0	6.38	AV	135.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.630	46.90	74.0	27.10	Peak	135.00	100	Vertical	Pass
1**	1331.630	36.61	54.0	17.39	AV	135.00	100	Vertical	Pass
2	2978.715	50.36	74.0	23.64	Peak	40.00	400	Vertical	Pass
2**	2978.715	38.90	54.0	15.10	AV	40.00	400	Vertical	Pass
3	4856.130	48.79	74.0	25.21	Peak	190.00	200	Vertical	Pass
3**	4856.130	39.60	54.0	14.40	AV	190.00	200	Vertical	Pass
4	6606.446	53.55	74.0	20.45	Peak	47.00	200	Vertical	Pass
4**	6606.446	44.41	54.0	9.59	AV	47.00	200	Vertical	Pass
5	13435.299	55.49	74.0	18.51	Peak	130.00	100	Vertical	Pass
5**	13435.299	44.38	54.0	9.62	AV	130.00	100	Vertical	Pass
6	17417.418	58.00	74.0	16.00	Peak	58.00	400	Vertical	Pass
6**	17417.418	46.59	54.0	7.41	AV	58.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1326.997	43.00	74.0	31.00	Peak	269.00	400	Horizontal	Pass
1**	1326.997	35.12	54.0	18.88	AV	269.00	400	Horizontal	Pass
2	2996.668	52.72	74.0	21.28	Peak	339.00	200	Horizontal	Pass
2**	2996.668	43.07	54.0	10.93	AV	339.00	200	Horizontal	Pass
3	4931.038	53.19	74.0	20.81	Peak	354.00	200	Horizontal	Pass
3**	4931.038	44.59	54.0	9.41	AV	354.00	200	Horizontal	Pass
4	6804.873	57.34	74.0	16.66	Peak	94.00	100	Horizontal	Pass
4**	6804.873	46.64	54.0	7.36	AV	94.00	100	Horizontal	Pass
5	13407.654	57.06	74.0	16.94	Peak	341.00	300	Horizontal	Pass
5**	13407.654	44.29	54.0	9.71	AV	341.00	300	Horizontal	Pass
6	17422.753	55.43	74.0	18.57	Peak	112.00	400	Horizontal	Pass
6**	17422.753	46.33	54.0	7.67	AV	112.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.703	47.70	74.0	26.30	Peak	25.00	100	Vertical	Pass
1**	1330.703	36.17	54.0	17.83	AV	25.00	100	Vertical	Pass
2	2984.344	47.70	74.0	26.30	Peak	258.00	200	Vertical	Pass
2**	2984.344	43.01	54.0	10.99	AV	258.00	200	Vertical	Pass
3	4857.328	52.36	74.0	21.64	Peak	271.00	200	Vertical	Pass
3**	4857.328	43.61	54.0	10.39	AV	271.00	200	Vertical	Pass
4	6607.356	56.86	74.0	17.14	Peak	48.00	200	Vertical	Pass
4**	6607.356	45.96	54.0	8.04	AV	48.00	200	Vertical	Pass
5	13433.562	57.53	74.0	16.47	Peak	357.00	100	Vertical	Pass
5**	13433.562	48.17	54.0	5.83	AV	357.00	100	Vertical	Pass
6	17417.419	59.89	74.0	14.11	Peak	101.00	200	Vertical	Pass
6**	17417.419	48.26	54.0	5.74	AV	101.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.767	43.06	74.0	30.94	Peak	115.00	400	Horizontal	Pass
1**	1327.767	36.27	54.0	17.73	AV	115.00	400	Horizontal	Pass
2	2997.284	50.05	74.0	23.95	Peak	23.00	100	Horizontal	Pass
2**	2997.284	38.89	54.0	15.11	AV	23.00	100	Horizontal	Pass
3	4932.906	49.88	74.0	24.12	Peak	188.00	200	Horizontal	Pass
3**	4932.906	40.88	54.0	13.12	AV	188.00	200	Horizontal	Pass
4	6806.165	53.06	74.0	20.94	Peak	266.00	200	Horizontal	Pass
4**	6806.165	42.15	54.0	11.85	AV	266.00	200	Horizontal	Pass
5	13412.720	55.44	74.0	18.56	Peak	217.00	300	Horizontal	Pass
5**	13412.720	44.01	54.0	9.99	AV	217.00	300	Horizontal	Pass
6	17423.307	57.69	74.0	16.31	Peak	304.00	200	Horizontal	Pass
6**	17423.307	44.80	54.0	9.20	AV	304.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.956	44.14	74.0	29.86	Peak	4.00	400	Vertical	Pass
1**	1328.956	38.68	54.0	15.32	AV	4.00	400	Vertical	Pass
2	2983.868	49.65	74.0	24.35	Peak	197.00	300	Vertical	Pass
2**	2983.868	44.39	54.0	9.61	AV	197.00	300	Vertical	Pass
3	4854.799	51.66	74.0	22.34	Peak	161.00	200	Vertical	Pass
3**	4854.799	39.26	54.0	14.74	AV	161.00	200	Vertical	Pass
4	6610.218	51.99	74.0	22.01	Peak	110.00	100	Vertical	Pass
4**	6610.218	44.02	54.0	9.98	AV	110.00	100	Vertical	Pass
5	13431.246	53.46	74.0	20.54	Peak	186.00	400	Vertical	Pass
5**	13431.246	47.45	54.0	6.55	AV	186.00	400	Vertical	Pass
6	17416.673	54.41	74.0	19.59	Peak	13.00	400	Vertical	Pass
6**	17416.673	47.78	54.0	6.22	AV	13.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.350	45.15	74.0	28.85	Peak	319.00	300	Horizontal	Pass
1**	1330.350	34.30	54.0	19.70	AV	319.00	300	Horizontal	Pass
2	2999.158	52.34	74.0	21.66	Peak	155.00	400	Horizontal	Pass
2**	2999.158	42.69	54.0	11.31	AV	155.00	400	Horizontal	Pass
3	4932.195	50.52	74.0	23.48	Peak	248.00	200	Horizontal	Pass
3**	4932.195	40.64	54.0	13.36	AV	248.00	200	Horizontal	Pass
4	6806.512	53.20	74.0	20.80	Peak	132.00	100	Horizontal	Pass
4**	6806.512	43.52	54.0	10.48	AV	132.00	100	Horizontal	Pass
5	13412.606	54.36	74.0	19.64	Peak	196.00	100	Horizontal	Pass
5**	13412.606	44.09	54.0	9.91	AV	196.00	100	Horizontal	Pass
6	17428.777	57.58	74.0	16.42	Peak	333.00	300	Horizontal	Pass
6**	17428.777	45.76	54.0	8.24	AV	333.00	300	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.381	44.24	74.0	29.76	Peak	321.00	300	Vertical	Pass
1**	1335.381	40.67	54.0	13.33	AV	321.00	300	Vertical	Pass
2	2980.247	50.86	74.0	23.14	Peak	124.00	100	Vertical	Pass
2**	2980.247	43.05	54.0	10.95	AV	124.00	100	Vertical	Pass
3	4857.919	51.56	74.0	22.44	Peak	114.00	200	Vertical	Pass
3**	4857.919	40.84	54.0	13.16	AV	114.00	200	Vertical	Pass
4	6604.645	55.16	74.0	18.84	Peak	355.00	100	Vertical	Pass
4**	6604.645	45.81	54.0	8.19	AV	355.00	100	Vertical	Pass
5	13436.775	56.67	74.0	17.33	Peak	247.00	200	Vertical	Pass
5**	13436.775	49.09	54.0	4.91	AV	247.00	200	Vertical	Pass
6	17416.615	59.97	74.0	14.03	Peak	21.00	400	Vertical	Pass
6**	17416.615	47.88	54.0	6.12	AV	21.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.459	42.00	74.0	32.00	Peak	354.00	100	Horizontal	Pass
1**	1332.459	34.39	54.0	19.61	AV	354.00	100	Horizontal	Pass
2	2995.611	52.52	74.0	21.48	Peak	25.00	300	Horizontal	Pass
2**	2995.611	39.99	54.0	14.01	AV	25.00	300	Horizontal	Pass
3	4937.943	53.47	74.0	20.53	Peak	141.00	200	Horizontal	Pass
3**	4937.943	40.59	54.0	13.41	AV	141.00	200	Horizontal	Pass
4	6808.821	57.39	74.0	16.61	Peak	175.00	100	Horizontal	Pass
4**	6808.821	43.88	54.0	10.12	AV	175.00	100	Horizontal	Pass
5	13410.626	55.45	74.0	18.55	Peak	152.00	200	Horizontal	Pass
5**	13410.626	45.27	54.0	8.73	AV	152.00	200	Horizontal	Pass
6	17428.847	57.94	74.0	16.06	Peak	59.00	400	Horizontal	Pass
6**	17428.847	45.97	54.0	8.03	AV	59.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.182	45.45	74.0	28.55	Peak	328.00	200	Vertical	Pass
1**	1330.182	38.03	54.0	15.97	AV	328.00	200	Vertical	Pass
2	2978.924	48.51	74.0	25.49	Peak	131.00	400	Vertical	Pass
2**	2978.924	39.22	54.0	14.78	AV	131.00	400	Vertical	Pass
3	4855.487	49.27	74.0	24.73	Peak	167.00	200	Vertical	Pass
3**	4855.487	38.49	54.0	15.51	AV	167.00	200	Vertical	Pass
4	6603.268	55.98	74.0	18.02	Peak	55.00	400	Vertical	Pass
4**	6603.268	46.57	54.0	7.43	AV	55.00	400	Vertical	Pass
5	13431.011	58.08	74.0	15.92	Peak	55.00	200	Vertical	Pass
5**	13431.011	44.58	54.0	9.42	AV	55.00	200	Vertical	Pass
6	17419.926	58.69	74.0	15.31	Peak	153.00	400	Vertical	Pass
6**	17419.926	48.92	54.0	5.08	AV	153.00	400	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.776	42.99	74.0	31.01	Peak	204.00	400	Horizontal	Pass
1**	1331.776	33.84	54.0	20.16	AV	204.00	400	Horizontal	Pass
2	2992.908	50.11	74.0	23.89	Peak	139.00	300	Horizontal	Pass
2**	2992.908	39.85	54.0	14.15	AV	139.00	300	Horizontal	Pass
3	4934.490	49.03	74.0	24.97	Peak	43.00	200	Horizontal	Pass
3**	4934.490	38.82	54.0	15.18	AV	43.00	200	Horizontal	Pass
4	6808.896	53.36	74.0	20.64	Peak	246.00	300	Horizontal	Pass
4**	6808.896	45.58	54.0	8.42	AV	246.00	300	Horizontal	Pass
5	13410.493	54.55	74.0	19.45	Peak	244.00	400	Horizontal	Pass
5**	13410.493	43.84	54.0	10.16	AV	244.00	400	Horizontal	Pass
6	17425.061	53.96	74.0	20.04	Peak	100.00	100	Horizontal	Pass
6**	17425.061	49.23	54.0	4.77	AV	100.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1335.661	44.51	74.0	29.49	Peak	230.00	100	Vertical	Pass
1**	1335.661	36.14	54.0	17.86	AV	230.00	100	Vertical	Pass
2	2980.124	48.85	74.0	25.15	Peak	60.00	100	Vertical	Pass
2**	2980.124	40.50	54.0	13.50	AV	60.00	100	Vertical	Pass
3	4851.248	50.54	74.0	23.46	Peak	320.00	200	Vertical	Pass
3**	4851.248	38.08	54.0	15.92	AV	320.00	200	Vertical	Pass
4	6605.491	54.51	74.0	19.49	Peak	353.00	200	Vertical	Pass
4**	6605.491	45.82	54.0	8.18	AV	353.00	200	Vertical	Pass
5	13438.221	53.96	74.0	20.04	Peak	327.00	200	Vertical	Pass
5**	13438.221	48.38	54.0	5.62	AV	327.00	200	Vertical	Pass
6	17416.147	56.73	74.0	17.27	Peak	6.00	300	Vertical	Pass
6**	17416.147	46.14	54.0	7.86	AV	6.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.918	43.10	74.0	30.90	Peak	145.00	300	Horizontal	Pass
1**	1331.918	39.43	54.0	14.57	AV	145.00	300	Horizontal	Pass
2	2996.413	51.63	74.0	22.37	Peak	340.00	400	Horizontal	Pass
2**	2996.413	41.48	54.0	12.52	AV	340.00	400	Horizontal	Pass
3	4932.825	49.24	74.0	24.76	Peak	259.00	200	Horizontal	Pass
3**	4932.825	41.55	54.0	12.45	AV	259.00	200	Horizontal	Pass
4	6806.266	53.95	74.0	20.05	Peak	129.00	400	Horizontal	Pass
4**	6806.266	45.58	54.0	8.42	AV	129.00	400	Horizontal	Pass
5	13409.429	54.69	74.0	19.31	Peak	55.00	300	Horizontal	Pass
5**	13409.429	47.46	54.0	6.54	AV	55.00	300	Horizontal	Pass
6	17429.912	57.80	74.0	16.20	Peak	144.00	200	Horizontal	Pass
6**	17429.912	47.21	54.0	6.79	AV	144.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.777	45.75	74.0	28.25	Peak	79.00	100	Vertical	Pass
1**	1333.777	38.38	54.0	15.62	AV	79.00	100	Vertical	Pass
2	2978.483	49.21	74.0	24.79	Peak	24.00	300	Vertical	Pass
2**	2978.483	40.38	54.0	13.62	AV	24.00	300	Vertical	Pass
3	4857.696	52.18	74.0	21.82	Peak	166.00	200	Vertical	Pass
3**	4857.696	38.12	54.0	15.88	AV	166.00	200	Vertical	Pass
4	6606.444	54.78	74.0	19.22	Peak	143.00	300	Vertical	Pass
4**	6606.444	42.70	54.0	11.30	AV	143.00	300	Vertical	Pass
5	13435.014	57.24	74.0	16.76	Peak	349.00	300	Vertical	Pass
5**	13435.014	43.48	54.0	10.52	AV	349.00	300	Vertical	Pass
6	17413.512	58.02	74.0	15.98	Peak	102.00	200	Vertical	Pass
6**	17413.512	49.33	54.0	4.67	AV	102.00	200	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.208	42.78	74.0	31.22	Peak	309.00	100	Horizontal	Pass
1**	1333.208	35.93	54.0	18.07	AV	309.00	100	Horizontal	Pass
2	3000.042	48.93	74.0	25.07	Peak	132.00	400	Horizontal	Pass
2**	3000.042	39.08	54.0	14.92	AV	132.00	400	Horizontal	Pass
3	4931.560	53.98	74.0	20.02	Peak	121.00	200	Horizontal	Pass
3**	4931.560	39.72	54.0	14.28	AV	121.00	200	Horizontal	Pass
4	6808.100	55.28	74.0	18.72	Peak	135.00	200	Horizontal	Pass
4**	6808.100	42.84	54.0	11.16	AV	135.00	200	Horizontal	Pass
5	13412.208	55.18	74.0	18.82	Peak	222.00	100	Horizontal	Pass
5**	13412.208	44.14	54.0	9.86	AV	222.00	100	Horizontal	Pass
6	17422.705	58.29	74.0	15.71	Peak	100.00	100	Horizontal	Pass
6**	17422.705	49.89	54.0	4.11	AV	100.00	100	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.165	43.80	74.0	30.20	Peak	159.00	200	Vertical	Pass
1**	1329.165	34.80	54.0	19.20	AV	159.00	200	Vertical	Pass
2	2981.429	52.05	74.0	21.95	Peak	37.00	200	Vertical	Pass
2**	2981.429	43.82	54.0	10.18	AV	37.00	200	Vertical	Pass
3	4852.348	47.81	74.0	26.19	Peak	217.00	200	Vertical	Pass
3**	4852.348	40.72	54.0	13.28	AV	217.00	200	Vertical	Pass
4	6608.649	52.01	74.0	21.99	Peak	295.00	200	Vertical	Pass
4**	6608.649	43.48	54.0	10.52	AV	295.00	200	Vertical	Pass
5	13438.565	54.08	74.0	19.92	Peak	179.00	300	Vertical	Pass
5**	13438.565	46.63	54.0	7.37	AV	179.00	300	Vertical	Pass
6	17420.316	56.55	74.0	17.45	Peak	322.00	300	Vertical	Pass
6**	17420.316	44.67	54.0	9.33	AV	322.00	300	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.536	42.33	74.0	31.67	Peak	126.00	200	Horizontal	Pass
1**	1332.536	38.39	54.0	15.61	AV	126.00	200	Horizontal	Pass
2	2999.844	47.50	74.0	26.50	Peak	350.00	100	Horizontal	Pass
2**	2999.844	40.68	54.0	13.32	AV	350.00	100	Horizontal	Pass
3	4931.365	53.32	74.0	20.68	Peak	33.00	200	Horizontal	Pass
3**	4931.365	44.53	54.0	9.47	AV	33.00	200	Horizontal	Pass
4	6810.195	53.17	74.0	20.83	Peak	107.00	100	Horizontal	Pass
4**	6810.195	46.00	54.0	8.00	AV	107.00	100	Horizontal	Pass
5	13412.890	54.03	74.0	19.97	Peak	194.00	200	Horizontal	Pass
5**	13412.890	43.93	54.0	10.07	AV	194.00	200	Horizontal	Pass
6	17428.940	55.36	74.0	18.64	Peak	287.00	200	Horizontal	Pass
6**	17428.940	48.86	54.0	5.14	AV	287.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.898	47.59	74.0	26.41	Peak	52.00	200	Vertical	Pass
1**	1333.898	36.49	54.0	17.51	AV	52.00	200	Vertical	Pass
2	2979.707	50.56	74.0	23.44	Peak	331.00	100	Vertical	Pass
2**	2979.707	39.10	54.0	14.90	AV	331.00	100	Vertical	Pass
3	4851.573	48.71	74.0	25.29	Peak	34.00	200	Vertical	Pass
3**	4851.573	42.95	54.0	11.05	AV	34.00	200	Vertical	Pass
4	6608.144	52.10	74.0	21.90	Peak	178.00	100	Vertical	Pass
4**	6608.144	42.39	54.0	11.61	AV	178.00	100	Vertical	Pass
5	13434.000	56.04	74.0	17.96	Peak	179.00	100	Vertical	Pass
5**	13434.000	44.35	54.0	9.65	AV	179.00	100	Vertical	Pass
6	17420.733	54.98	74.0	19.02	Peak	253.00	100	Vertical	Pass
6**	17420.733	49.08	54.0	4.92	AV	253.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.871	41.62	74.0	32.38	Peak	297.00	100	Horizontal	Pass
1**	1328.871	36.37	54.0	17.63	AV	297.00	100	Horizontal	Pass
2	2995.711	48.77	74.0	25.23	Peak	210.00	400	Horizontal	Pass
2**	2995.711	44.34	54.0	9.66	AV	210.00	400	Horizontal	Pass
3	4933.956	50.45	74.0	23.55	Peak	202.00	200	Horizontal	Pass
3**	4933.956	40.48	54.0	13.52	AV	202.00	200	Horizontal	Pass
4	6805.448	55.10	74.0	18.90	Peak	297.00	400	Horizontal	Pass
4**	6805.448	41.83	54.0	12.17	AV	297.00	400	Horizontal	Pass
5	13412.283	53.99	74.0	20.01	Peak	228.00	200	Horizontal	Pass
5**	13412.283	48.67	54.0	5.33	AV	228.00	200	Horizontal	Pass
6	17428.982	57.44	74.0	16.56	Peak	235.00	200	Horizontal	Pass
6**	17428.982	47.43	54.0	6.57	AV	235.00	200	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.688	46.63	74.0	27.37	Peak	22.00	200	Vertical	Pass
1**	1332.688	39.30	54.0	14.70	AV	22.00	200	Vertical	Pass
2	2982.303	52.18	74.0	21.82	Peak	2.00	400	Vertical	Pass
2**	2982.303	43.78	54.0	10.22	AV	2.00	400	Vertical	Pass
3	4851.714	48.86	74.0	25.14	Peak	274.00	200	Vertical	Pass
3**	4851.714	43.31	54.0	10.69	AV	274.00	200	Vertical	Pass
4	6610.911	52.03	74.0	21.97	Peak	48.00	300	Vertical	Pass
4**	6610.911	47.46	54.0	6.54	AV	48.00	300	Vertical	Pass
5	13438.569	55.66	74.0	18.34	Peak	8.00	100	Vertical	Pass
5**	13438.569	47.78	54.0	6.22	AV	8.00	100	Vertical	Pass
6	17418.799	58.34	74.0	15.66	Peak	134.00	100	Vertical	Pass
6**	17418.799	45.28	54.0	8.72	AV	134.00	100	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.830	42.81	74.0	31.19	Peak	209.00	300	Horizontal	Pass
1**	1330.830	33.98	54.0	20.02	AV	209.00	300	Horizontal	Pass
2	3000.433	49.33	74.0	24.67	Peak	258.00	100	Horizontal	Pass
2**	3000.433	40.59	54.0	13.41	AV	258.00	100	Horizontal	Pass
3	4933.425	49.43	74.0	24.57	Peak	357.00	200	Horizontal	Pass
3**	4933.425	43.36	54.0	10.64	AV	357.00	200	Horizontal	Pass
4	6809.728	55.77	74.0	18.23	Peak	69.00	200	Horizontal	Pass
4**	6809.728	46.92	54.0	7.08	AV	69.00	200	Horizontal	Pass
5	13407.279	55.16	74.0	18.84	Peak	304.00	100	Horizontal	Pass
5**	13407.279	46.24	54.0	7.76	AV	304.00	100	Horizontal	Pass
6	17426.370	53.16	74.0	20.84	Peak	27.00	400	Horizontal	Pass
6**	17426.370	48.25	54.0	5.75	AV	27.00	400	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.158	47.69	74.0	26.31	Peak	316.00	100	Vertical	Pass
1**	1333.158	40.55	54.0	13.45	AV	316.00	100	Vertical	Pass
2	2983.829	47.51	74.0	26.49	Peak	4.00	300	Vertical	Pass
2**	2983.829	44.04	54.0	9.96	AV	4.00	300	Vertical	Pass
3	4856.267	47.69	74.0	26.31	Peak	60.00	200	Vertical	Pass
3**	4856.267	43.61	54.0	10.39	AV	60.00	200	Vertical	Pass
4	6611.138	55.74	74.0	18.26	Peak	240.00	100	Vertical	Pass
4**	6611.138	46.64	54.0	7.36	AV	240.00	100	Vertical	Pass
5	13432.477	53.57	74.0	20.43	Peak	299.00	300	Vertical	Pass
5**	13432.477	43.56	54.0	10.44	AV	299.00	300	Vertical	Pass
6	17419.631	56.31	74.0	17.69	Peak	342.00	100	Vertical	Pass
6**	17419.631	48.03	54.0	5.97	AV	342.00	100	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: All antenna were pre tested, but only the worst case has been reported in this report.

Test DataSISO-ANT1

802.11b LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2383.764	58.4	74.0	15.60	Peak	164.00	300	Horizontal	Pass
1**	2383.764	48.24	54.0	5.76	AV	164.00	300	Horizontal	Pass
2	2390.000	56.99	74.0	17.01	Peak	127.00	300	Horizontal	Pass
2**	2390.000	44.51	54.0	9.49	AV	127.00	300	Horizontal	Pass

802.11b HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	55.35	74.0	18.65	Peak	1.00	200	Horizontal	Pass
1**	2483.500	47.83	54.0	6.17	AV	1.00	200	Horizontal	Pass
2	2488.253	58.34	74.0	15.66	Peak	326.00	200	Horizontal	Pass
2**	2488.253	44.28	54.0	9.72	AV	326.00	200	Horizontal	Pass

802.11g LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2386.151	59.81	74.0	14.19	Peak	237.00	200	Horizontal	Pass
1**	2386.151	49.54	54.0	4.46	AV	237.00	200	Horizontal	Pass
2	2390.000	56.36	74.0	17.64	Peak	233.00	300	Horizontal	Pass
2**	2390.000	45.66	54.0	8.34	AV	233.00	300	Horizontal	Pass

802.11g HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.52	74.0	16.48	Peak	333.00	100	Horizontal	Pass
1**	2483.500	45.55	54.0	8.45	AV	333.00	100	Horizontal	Pass
2	2488.496	60.08	74.0	13.92	Peak	297.00	300	Horizontal	Pass
2**	2488.496	46.37	54.0	7.63	AV	297.00	300	Horizontal	Pass

802.11n20 LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2383.668	59.99	74.0	14.01	Peak	166.00	300	Horizontal	Pass
1**	2383.668	48.52	54.0	5.48	AV	166.00	300	Horizontal	Pass
2	2390.000	54.49	74.0	19.51	Peak	152.00	200	Horizontal	Pass
2**	2390.000	44.01	54.0	9.99	AV	152.00	200	Horizontal	Pass

802.11n20 HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.52	74.0	16.48	Peak	138.00	300	Horizontal	Pass
1**	2483.500	48.1	54.0	5.90	AV	138.00	300	Horizontal	Pass
2	2488.364	56.33	74.0	17.67	Peak	49.00	100	Horizontal	Pass
2**	2488.364	47.71	54.0	6.29	AV	49.00	100	Horizontal	Pass

802.11n40 LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2384.577	58.17	74.0	15.83	Peak	67.00	200	Horizontal	Pass
1**	2384.577	48.23	54.0	5.77	AV	67.00	200	Horizontal	Pass
2	2390.000	57.07	74.0	16.93	Peak	82.00	200	Horizontal	Pass
2**	2390.000	46.9	54.0	7.10	AV	82.00	200	Horizontal	Pass

802.11n40 HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	56.3	74.0	17.70	Peak	140.00	300	Horizontal	Pass
1**	2483.500	45.14	54.0	8.86	AV	140.00	300	Horizontal	Pass
2	2486.542	60.18	74.0	13.82	Peak	284.00	200	Horizontal	Pass
2**	2486.542	46.14	54.0	7.86	AV	284.00	200	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data

SISO-ANT0

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-6.69	8
Middle	-6.06	8
High	-6.33	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-6.79	8
Middle	-7.61	8
High	-5.69	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-7.12	8
Middle	-5.40	8
High	-6.86	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.56	8
Middle	-9.57	8
High	-10.19	8

SISO-ANT1

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-6.05	8
Middle	-5.74	8
High	-4.64	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-8.22	8
Middle	-7.82	8
High	-6.70	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-7.67	8
Middle	-6.45	8
High	-7.30	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-9.93	8
Middle	-10.94	8
High	-10.32	8

MIMO-ANT0**802.11b Mode:**

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-9.99	8
Middle	-9.44	8
High	-9.62	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.02	8
Middle	-11.07	8
High	-8.97	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.42	8
Middle	-8.79	8
High	-10.15	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-14.04	8
Middle	-13.07	8
High	-13.41	8

MIMO-ANT1**802.11b Mode:**

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-9.44	8
Middle	-9.02	8
High	-8.12	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-11.57	8
Middle	-11.08	8
High	-10.05	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.88	8
Middle	-9.75	8
High	-10.72	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-13.21	8
Middle	-14.25	8
High	-13.54	8

MIMO

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-6.70	8
Middle	-6.22	8
High	-5.79	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-7.72	8
Middle	-8.06	8
High	-6.46	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-7.64	8
Middle	-6.23	8
High	-7.41	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-10.59	8
Middle	-10.61	8
High	-10.46	8

Test Plots

SISO-ANT0

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

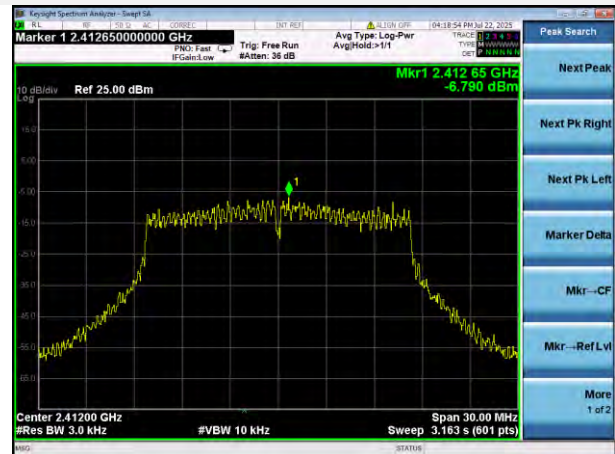


802.11g MIDDLE CHANNEL

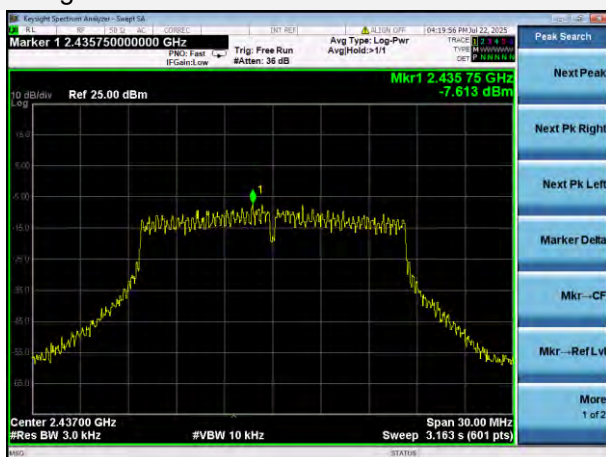


802.11g HIGH CHANNEL

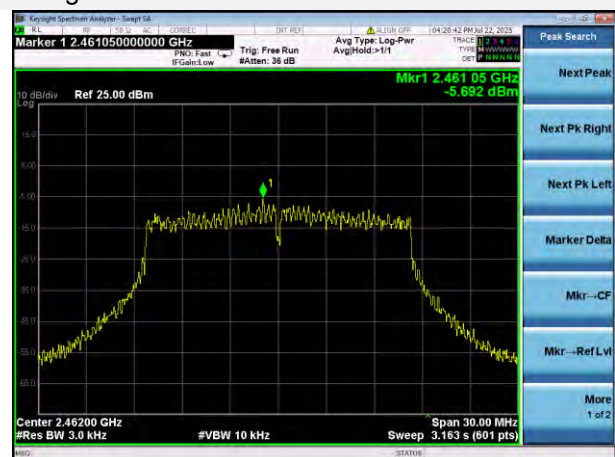


802.11n-20 MHz LOW CHANNEL

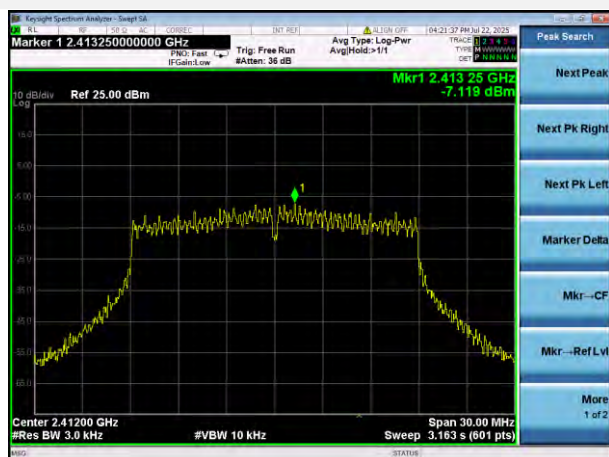


802.11n-20 MHz MIDDLE CHANNEL

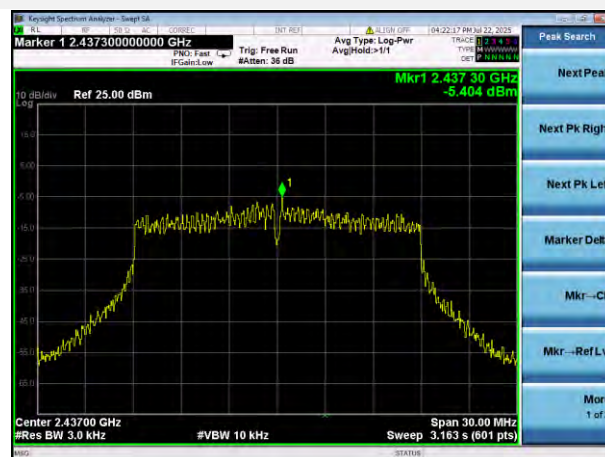


802.11n-20 MHz HIGH CHANNEL

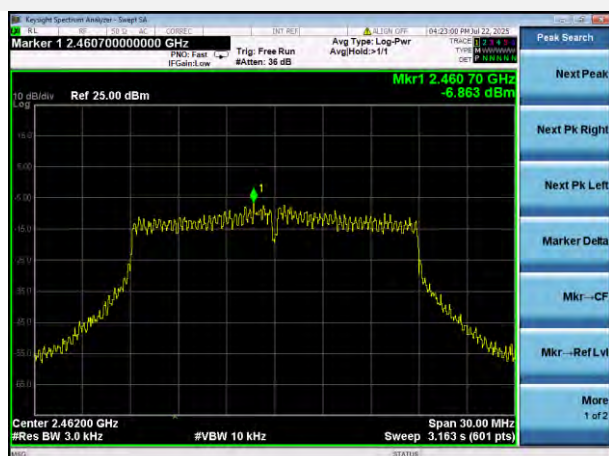


802.11n-40 MHz LOW CHANNEL

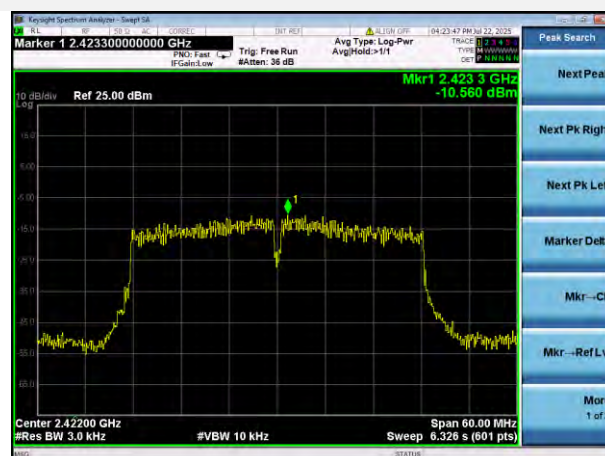

802.11n-40 MHz MIDDLE CHANNEL

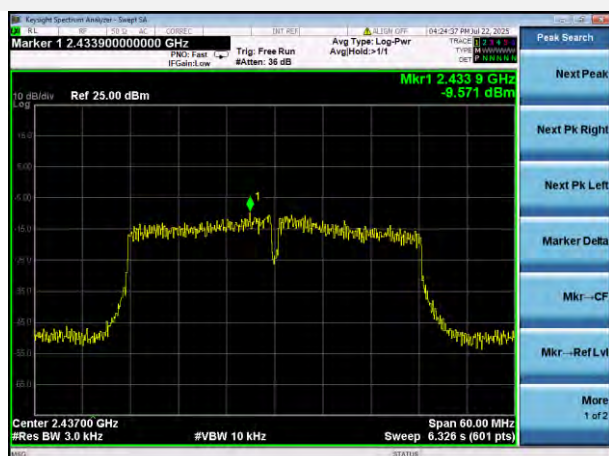

802.11n-40 MHz HIGH CHANNEL

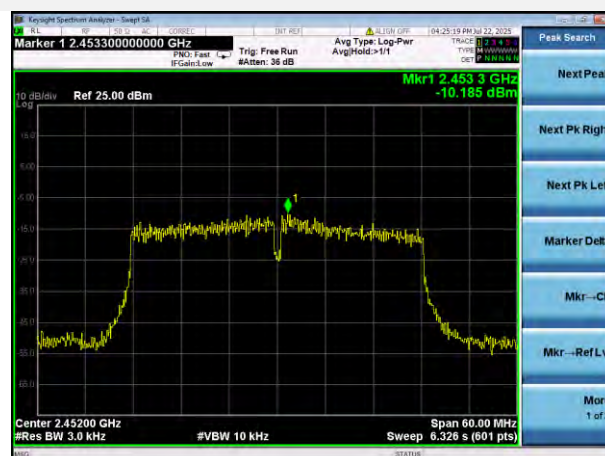

SISO-ANT1

802.11b LOW CHANNEL




802.11b MIDDLE CHANNEL




802.11b HIGH CHANNEL




802.11g LOW CHANNEL

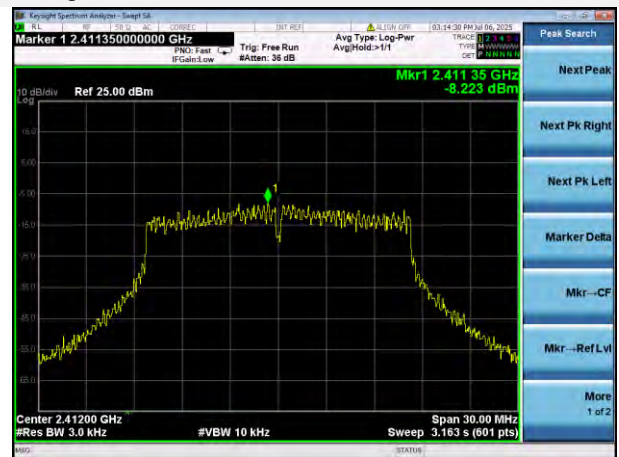


802.11g MIDDLE CHANNEL

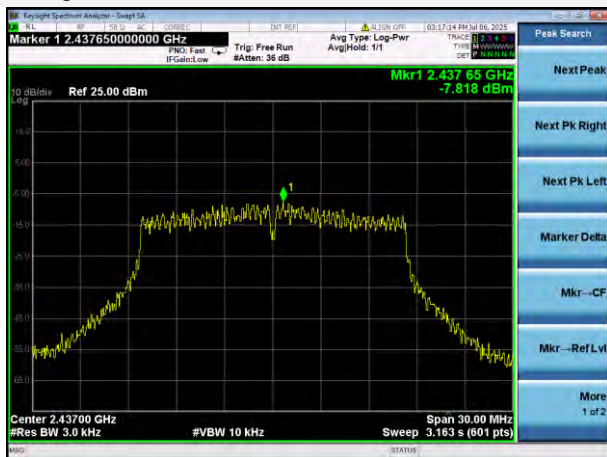


802.11g HIGH CHANNEL

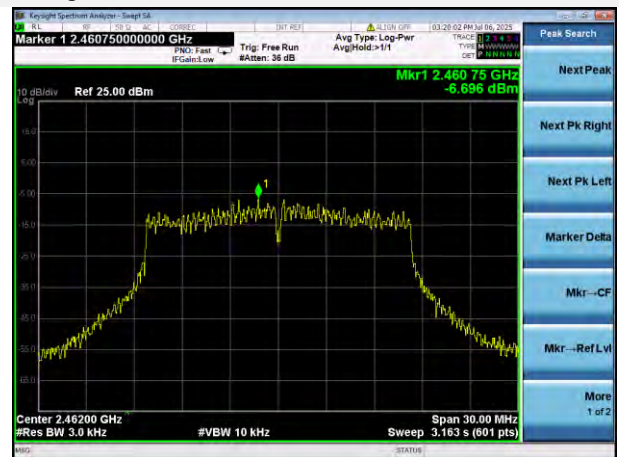


802.11n-20 MHz LOW CHANNEL

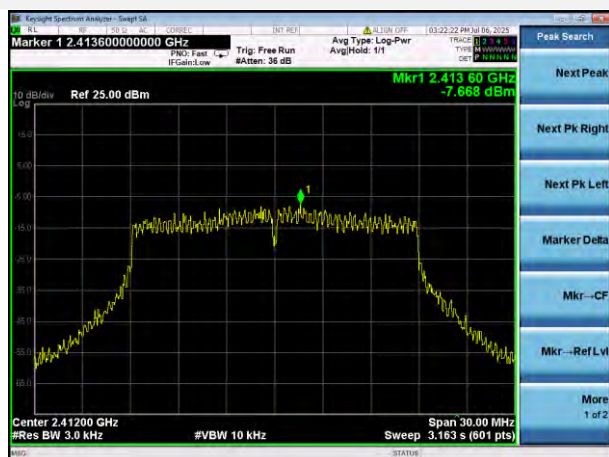


802.11n-20 MHz MIDDLE CHANNEL

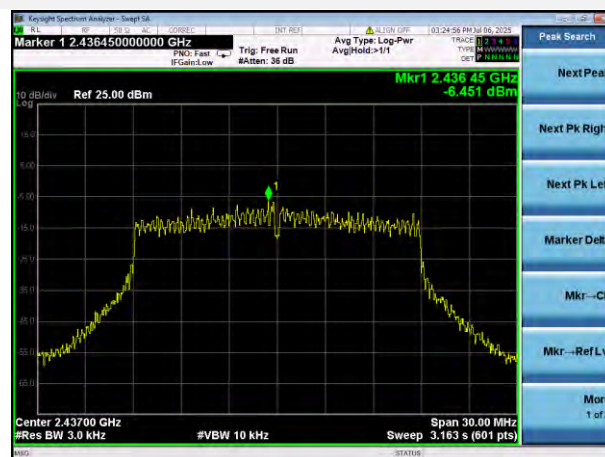


802.11n-20 MHz HIGH CHANNEL

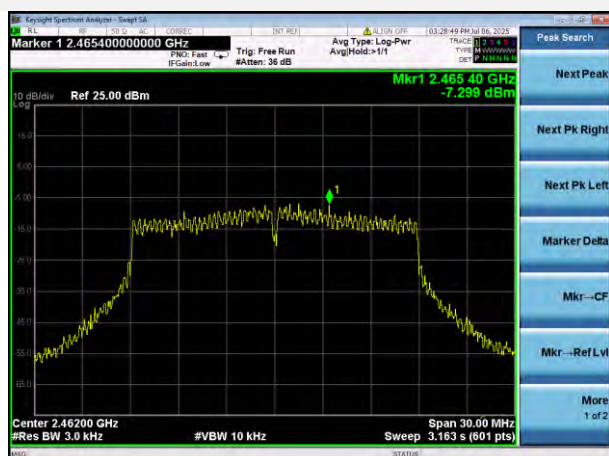


802.11n-40 MHz LOW CHANNEL

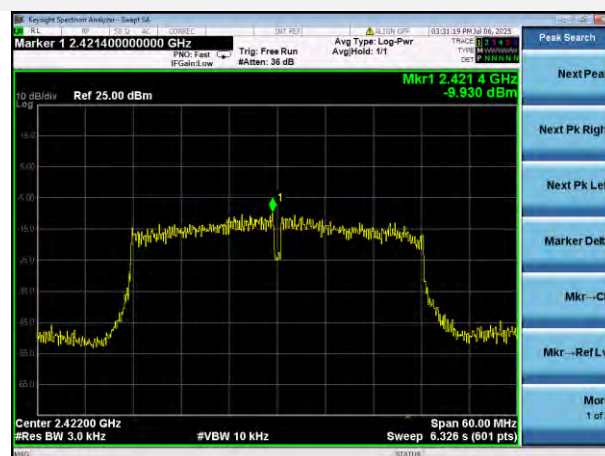

802.11n-40 MHz MIDDLE CHANNEL

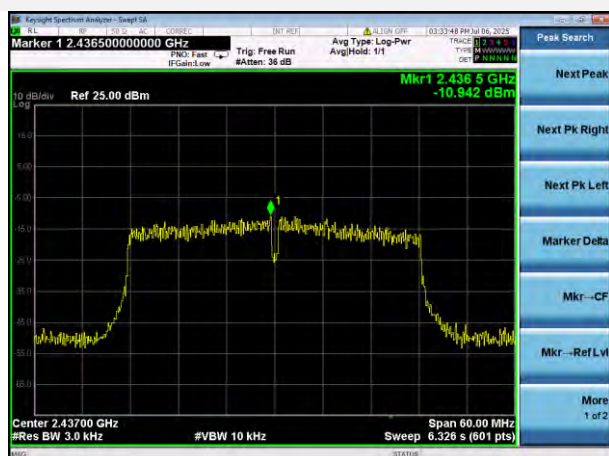

802.11n-40 MHz HIGH CHANNEL

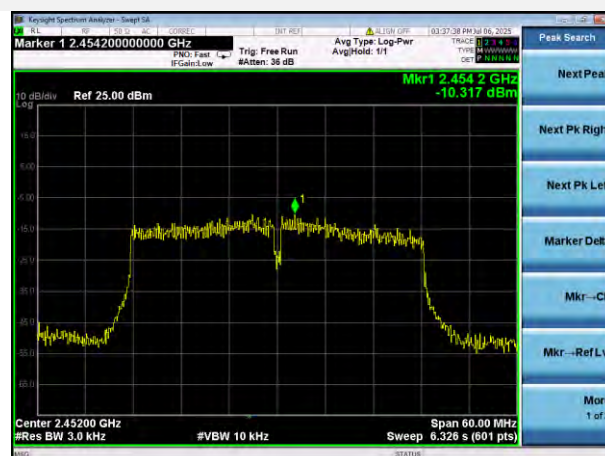

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2561486-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2561486-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2561486-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--