

FCC PART 15.231

TEST REPORT

For

Shenzhen Sonoff Technologies Co.,Ltd.

1001, BLDG8, Lianhua Industrial Park, Shenzhen, GD, China

FCC ID: 2APN5BRIDGER2

Report Type: Original Report	Product Type: RF BridgeR2
Report Number: RDG210222002-00B	
Report Date: 2021-02-09	
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	3
TEST FACILITY	4
DECLARATIONS.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.203 - ANTENNA REQUIREMENT.....	8
APPLICABLE STANDARD	8
ANTENNA CONNECTOR CONSTRUCTION	8
FCC §15.207 (A)– AC LINE CONDUCTED EMISSIONS	9
APPLICABLE STANDARD	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST DATA	11
FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST DATA	16
FCC §15.231(C) – 20 DB BANDWIDTH TESTING.....	23
REQUIREMENT	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.231(A) - DEACTIVATION TESTING	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	RF BridgeR2
EUT Model:	RF BridgeR2
Operation Frequency:	433.92MHz
Modulation Type:	ASK
Rated Input Voltage:	DC 5V from USB Port
Serial Number:	RDG210222002-RF-S1
EUT Received Date:	2021.02.23
EUT Received Status:	Good

Objective

This report is prepared on behalf of **Shenzhen Sonoff Technologies Co.,Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A, and C of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209, and 15.231 rules.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured in testing mode which was provided by manufacturer.

The device operation frequency is 433.92 MHz.

Equipment Modifications

No modifications were made to the unit tested.

EUT Exercise Software

No software was used in test.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Huajin	adapter	A1	A1-1

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter Cable	No	No	1.5	Adapter	EUT

Block Diagram of Test Setup

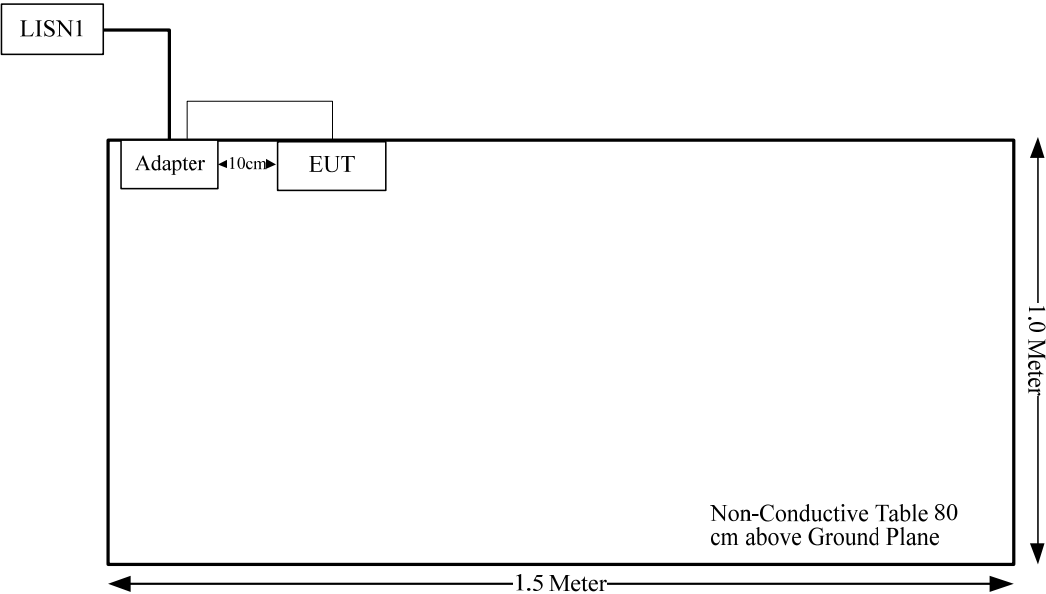

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.231 (b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Bandwidth	Compliance
§15.231 (a)	Deactivation Testing	Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connector Construction

The EUT has two internal antennas, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

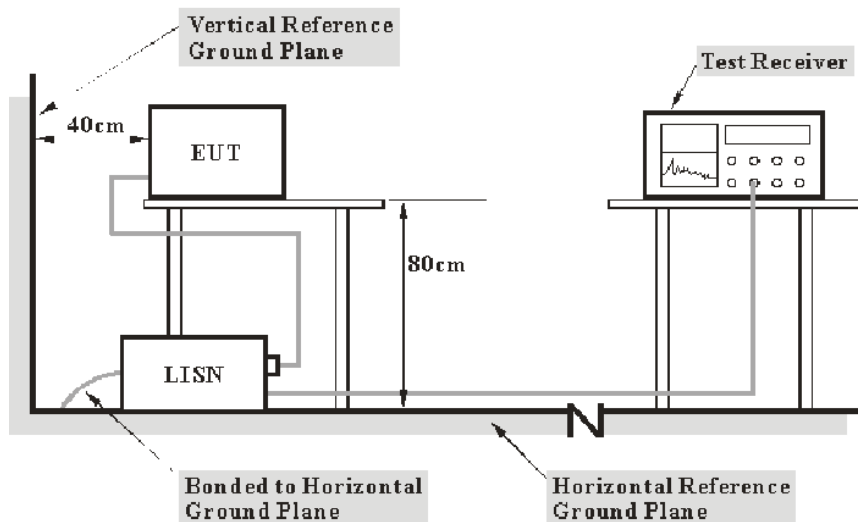

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Test Item:	Conducted emissions
Relative Humidity:	63%
ATM Pressure:	102.0kPa
Tester:	Walker Chen
Test Date:	2021-03-19

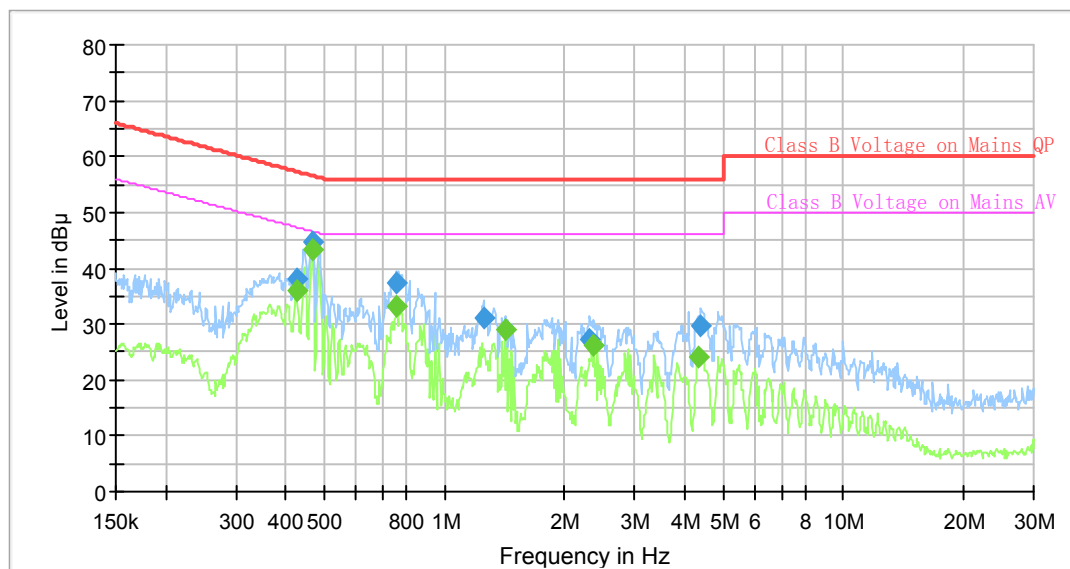Test Mode: Transmitting**Test Result:** Compliance. Please refer to following table and plots:**AC120 V, 60 Hz, Line:****Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.425401	---	35.82	47.34	11.52	9.000	L1	9.6
0.425401	37.99	---	57.34	19.35	9.000	L1	9.6
0.465358	---	43.31	46.60	3.29	9.000	L1	9.6
0.465358	44.68	---	56.60	11.92	9.000	L1	9.6
0.758685	---	33.02	46.00	12.98	9.000	L1	9.7
0.758685	37.28	---	56.00	18.72	9.000	L1	9.7
1.255549	31.14	---	56.00	24.86	9.000	L1	9.7
1.415204	---	28.90	46.00	17.10	9.000	L1	9.7
2.318778	27.33	---	56.00	28.67	9.000	L1	9.7
2.365502	---	26.33	46.00	19.67	9.000	L1	9.7
4.346933	---	24.15	46.00	21.85	9.000	L1	9.7
4.390511	29.58	---	56.00	26.42	9.000	L1	9.7

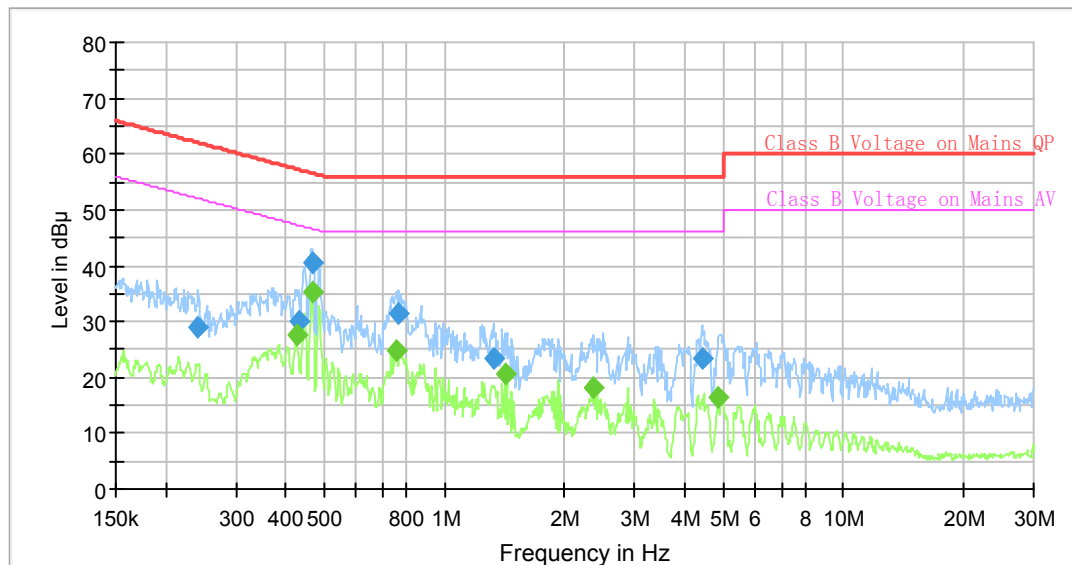AC120 V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.240917	29.01	---	62.06	33.05	9.000	N	9.6
0.425401	---	27.58	47.34	19.76	9.000	N	9.6
0.429665	30.13	---	57.26	27.13	9.000	N	9.6
0.465358	---	35.12	46.60	11.48	9.000	N	9.6
0.465358	40.51	---	56.60	16.09	9.000	N	9.6
0.758685	---	24.84	46.00	21.16	9.000	N	9.6
0.770122	31.46	---	56.00	24.54	9.000	N	9.6
1.326356	23.46	---	56.00	32.54	9.000	N	9.6
1.415204	---	20.45	46.00	25.55	9.000	N	9.6
2.365502	---	18.11	46.00	27.89	9.000	N	9.6
4.412464	23.32	---	56.00	32.68	9.000	N	9.6
4.851056	---	16.55	46.00	29.45	9.000	N	9.6

FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS**Applicable Standard**

FCC §15.205, §15.209, §15.231 (b)

(b) In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹Linear interpolations.


(1) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(2) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in §15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.


(3) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

EUT Setup

Below 1 GHz:

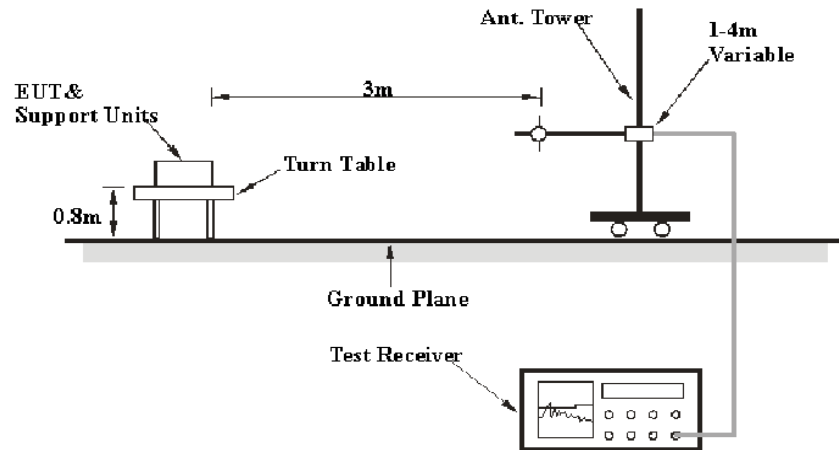

Above 1 GHz:

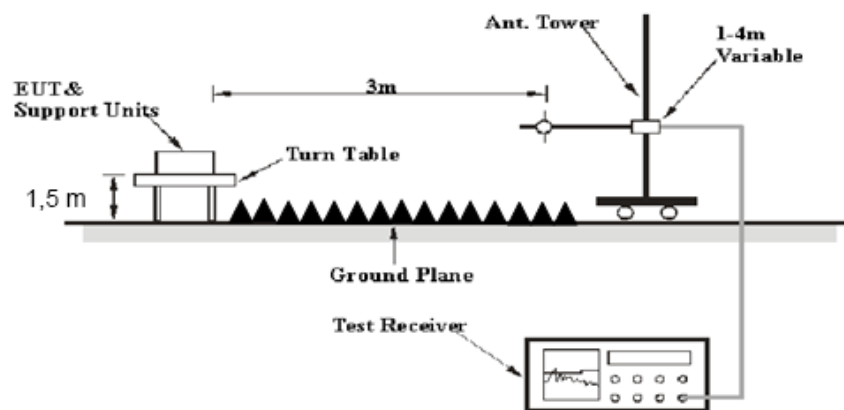

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	100 kHz	PK
1 GHz – 5 GHz	1 MHz	3 MHz	/	PK

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2020-06-27	2021-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

According to §15.231, Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	25.2°C	26 °C
Relative Humidity:	62 %	51 %
ATM Pressure:	101.2 kPa	101.6 kPa
Tester:	Jalon Liu	Lee li
Test Date:	2021.03.16	2021.03.21

*Test mode: Transmitting***Field Strength (Peak)**

Frequency (MHz)	Receiver Reading (dBμV)	Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
		Polar (H/V)	Factor (dB/m)					
Operating Frequency: 433.92 MHz								
433.92	75.41	H	16.48	2.27	26.54	67.62	100.83	33.21
433.92	70.79	V	16.48	2.27	26.54	63.00	100.83	37.83
867.84	57.06	H	21.76	3.15	26.68	55.29	80.83	25.54
867.84	58.81	V	21.76	3.15	26.68	57.04	80.83	23.79
1301.76	43.88	H	24.53	1.57	26.15	43.83	74.00	30.17
1301.76	43.22	V	24.53	1.57	26.15	43.17	74.00	30.83
1735.68	39.84	H	26.19	1.65	25.81	41.87	80.83	38.96
1735.68	38.69	V	26.19	1.65	25.81	40.72	80.83	40.11
2169.60	44.44	H	27.64	1.74	25.54	48.28	80.83	32.55
2169.60	42.91	V	27.64	1.74	25.54	46.75	80.83	34.08
2603.52	38.58	H	28.67	1.88	26.19	42.94	80.83	37.89
2603.52	38.12	V	28.67	1.88	26.19	42.48	80.83	38.35
3037.44	47.77	H	30.19	2.18	26.00	54.14	80.83	26.69
3037.44	44.88	V	30.19	2.18	26.00	51.25	80.83	29.58
3471.36	37.81	H	31.23	2.39	25.88	45.55	80.83	35.28
3471.36	37.24	V	31.23	2.39	25.88	44.98	80.83	35.85
3905.28	47.34	H	32.19	2.58	25.77	56.34	74.00	17.66
3905.28	44.57	V	32.19	2.58	25.77	53.57	74.00	20.43
4339.20	43.08	H	32.33	2.85	25.74	52.52	74.00	21.48
4339.20	38.27	V	32.33	2.85	25.74	47.71	74.00	26.29



Field Strength (Average)

Frequency (MHz)	Peak Measurement@3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Average Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Operating Frequency: 433.92 MHz						
433.92	67.62	H	-9.29	58.33	80.83	22.5
433.92	63.00	V	-9.29	53.71	80.83	27.12
867.84	55.29	H	-9.29	46	60.83	14.83
867.84	57.04	V	-9.29	47.75	60.83	13.08
1301.76	43.83	H	-9.29	34.54	54.00	19.46
1301.76	43.17	V	-9.29	33.88	54.00	20.12
1735.68	41.87	H	-9.29	32.58	60.83	28.25
1735.68	40.72	V	-9.29	31.43	60.83	29.4
2169.60	48.28	H	-9.29	38.99	60.83	21.84
2169.60	46.75	V	-9.29	37.46	60.83	23.37
2603.52	42.94	H	-9.29	33.65	60.83	27.18
2603.52	42.48	V	-9.29	33.19	60.83	27.64
3037.44	54.14	H	-9.29	44.85	60.83	15.98
3037.44	51.25	V	-9.29	41.96	60.83	18.87
3471.36	45.55	H	-9.29	36.26	60.83	24.57
3471.36	44.98	V	-9.29	35.69	60.83	25.14
3905.28	56.34	H	-9.29	47.05	54.00	6.95
3905.28	53.57	V	-9.29	44.28	54.00	9.72
4339.20	52.52	H	-9.29	43.23	54.00	10.77
4339.20	47.71	V	-9.29	38.42	54.00	15.58


Duty cycle=Ton/Ton+off =(0.808*10+0.256*15)/34.72 =34.33%

Duty Cycle Correction Factor= 20*log(Duty cycle)= -9.29 dB


Please refer to the following plots for duty cycle test:

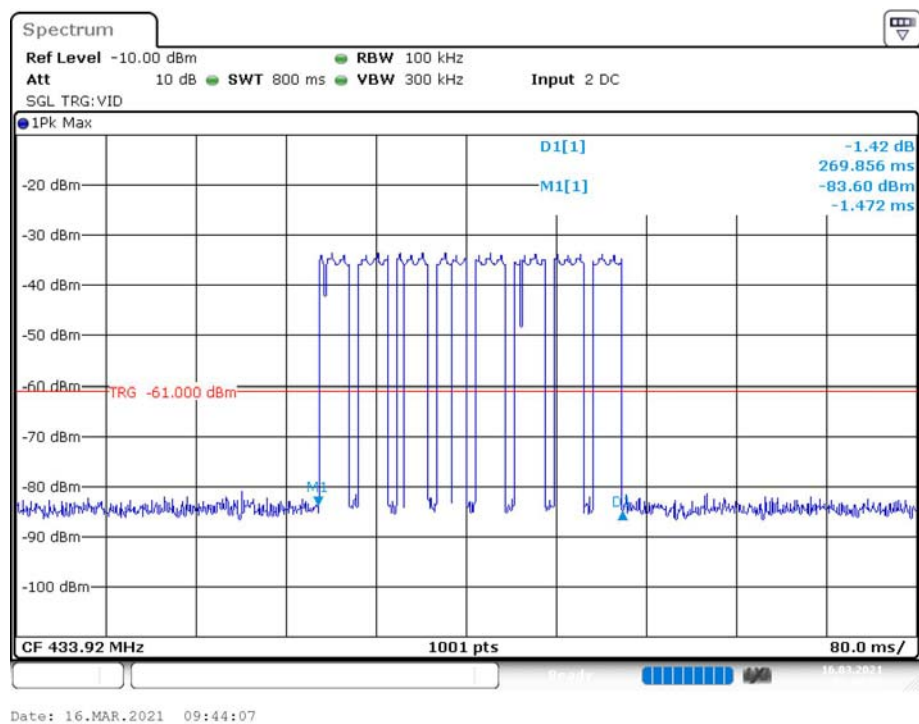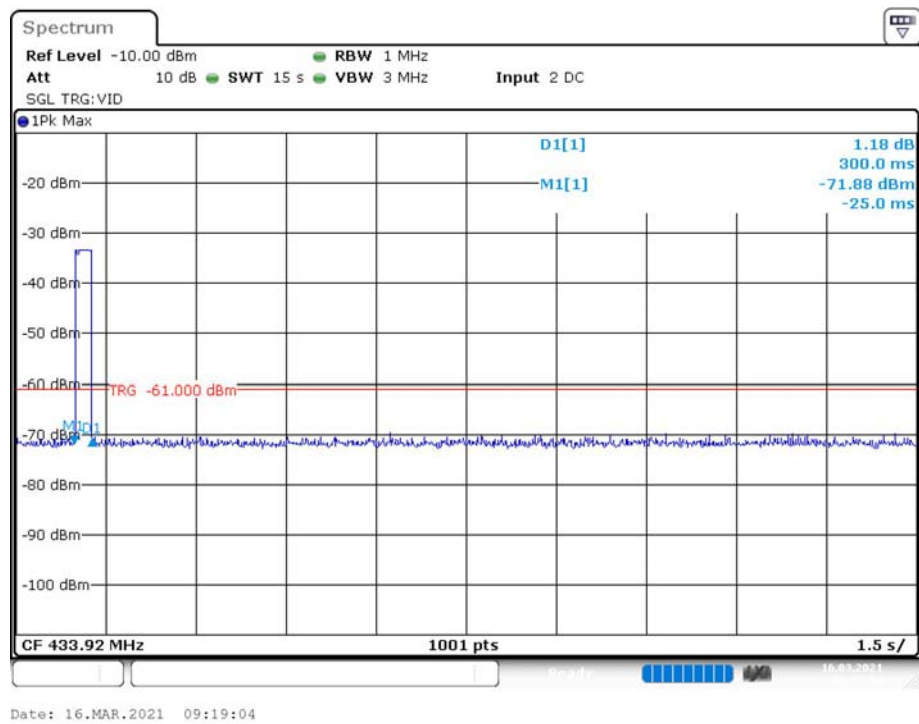


$$T_{on+off}=34.720ms$$

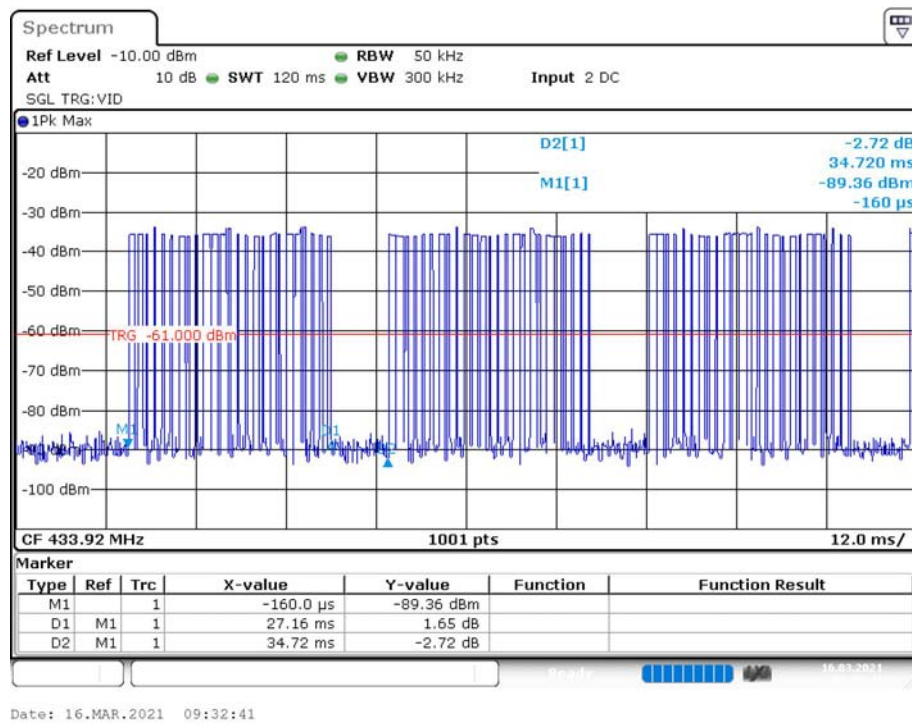


$$T_{on1}=10pcs, T_{on2}=15pcs$$

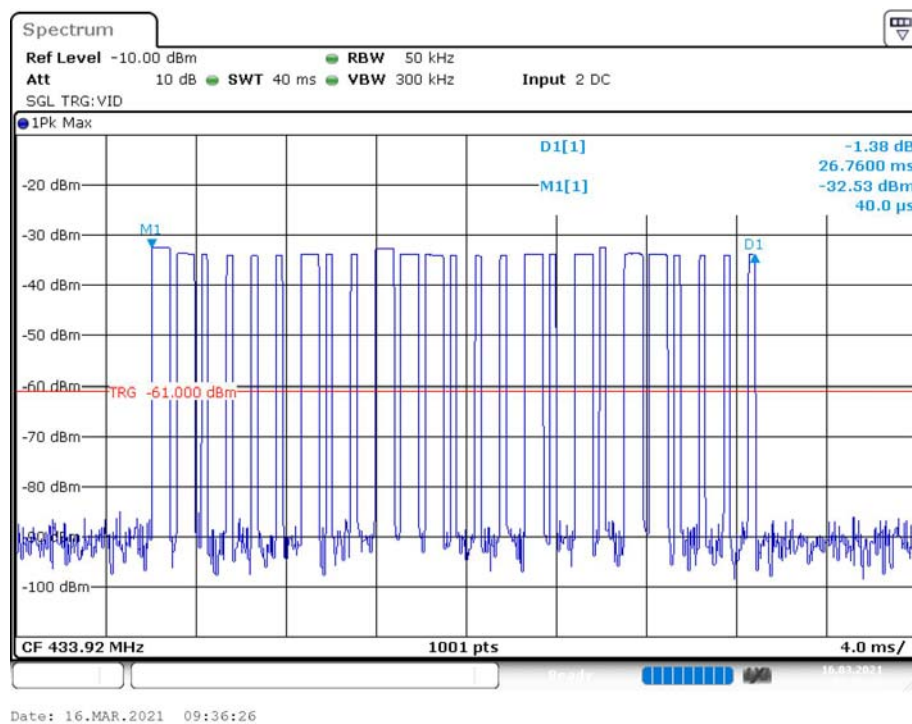

$$T_{on1} = 0.808ms$$

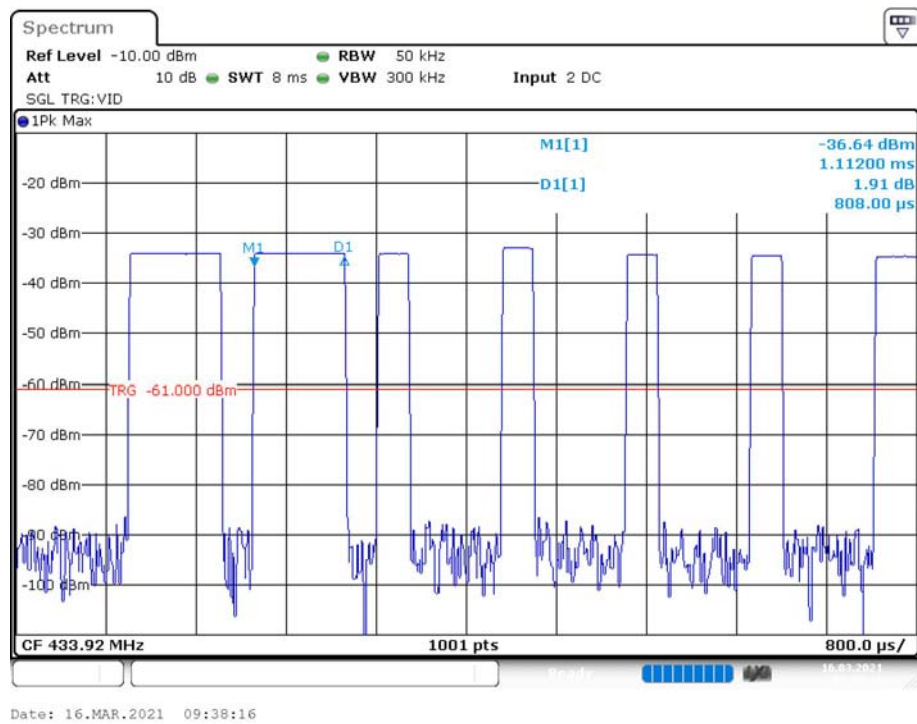


$$T_{on2} = 0.256ms$$

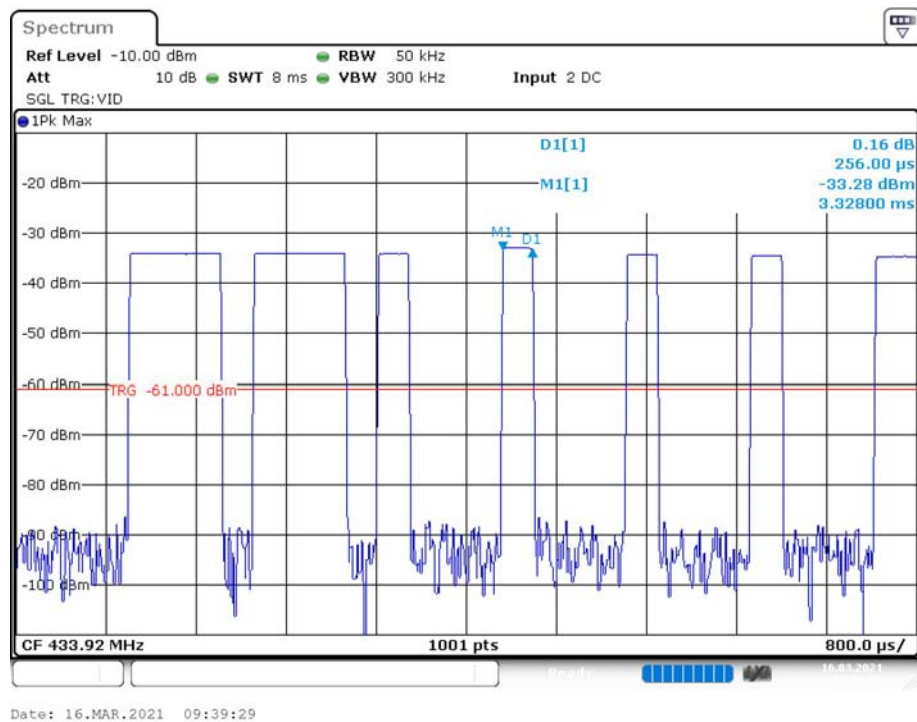

30MHz-1GHz


Horizontal:

80.0 dBuV/m

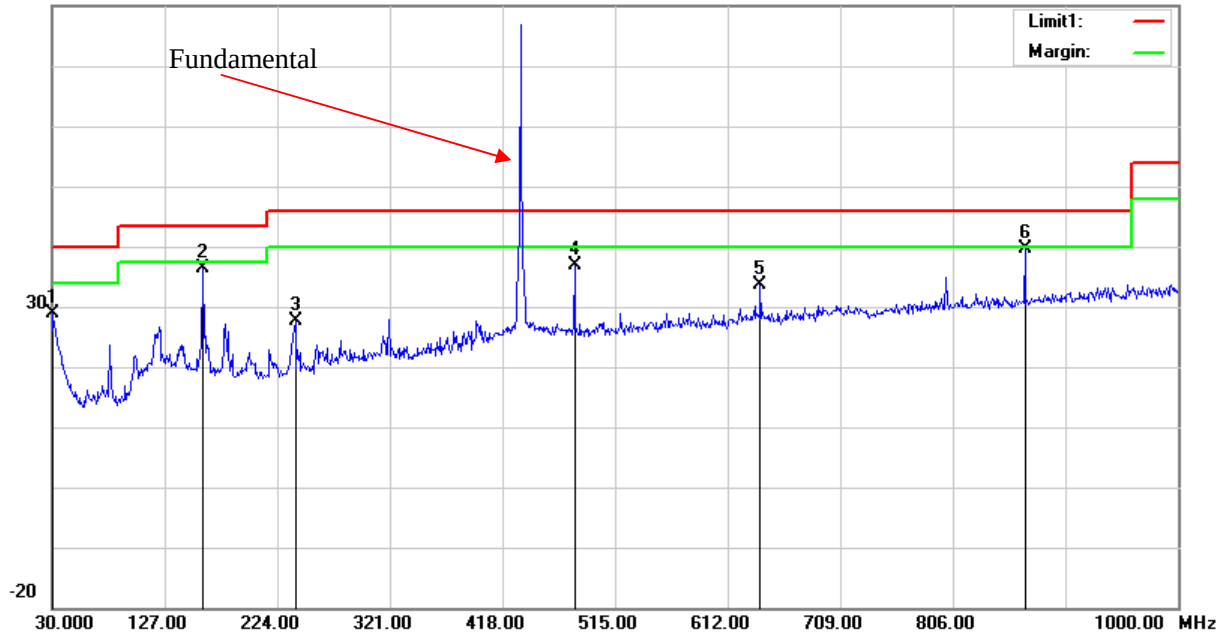

Vertical:


80.0 dBuV/m

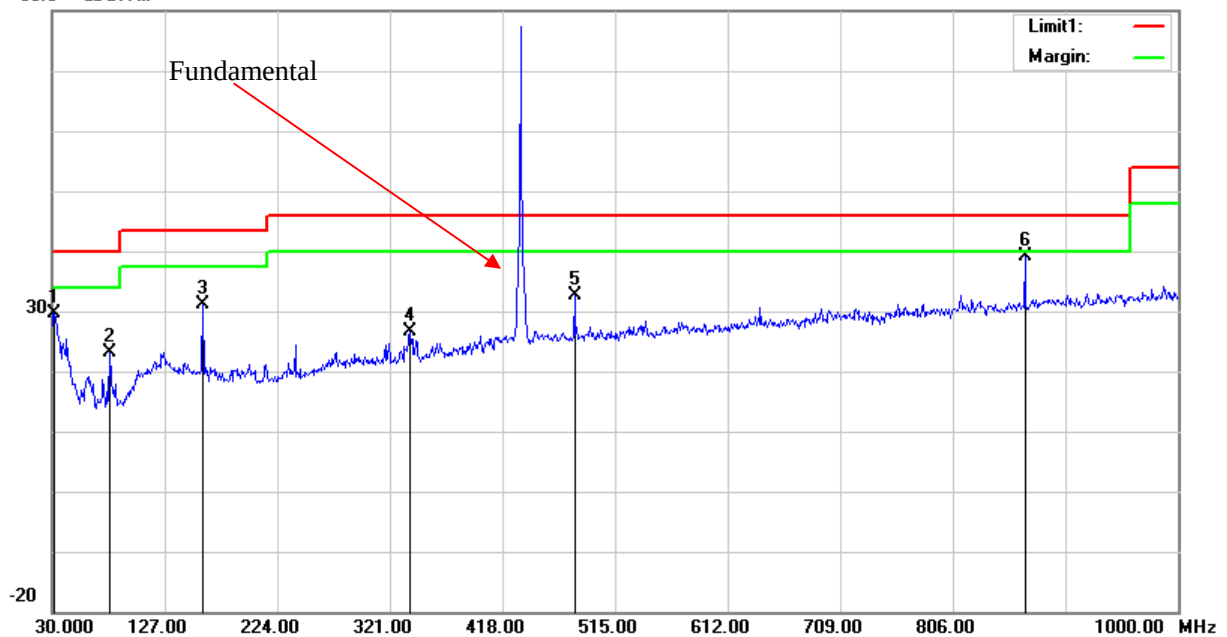

Above 1GHz:


Horizontal:

100.0 dBuV/m

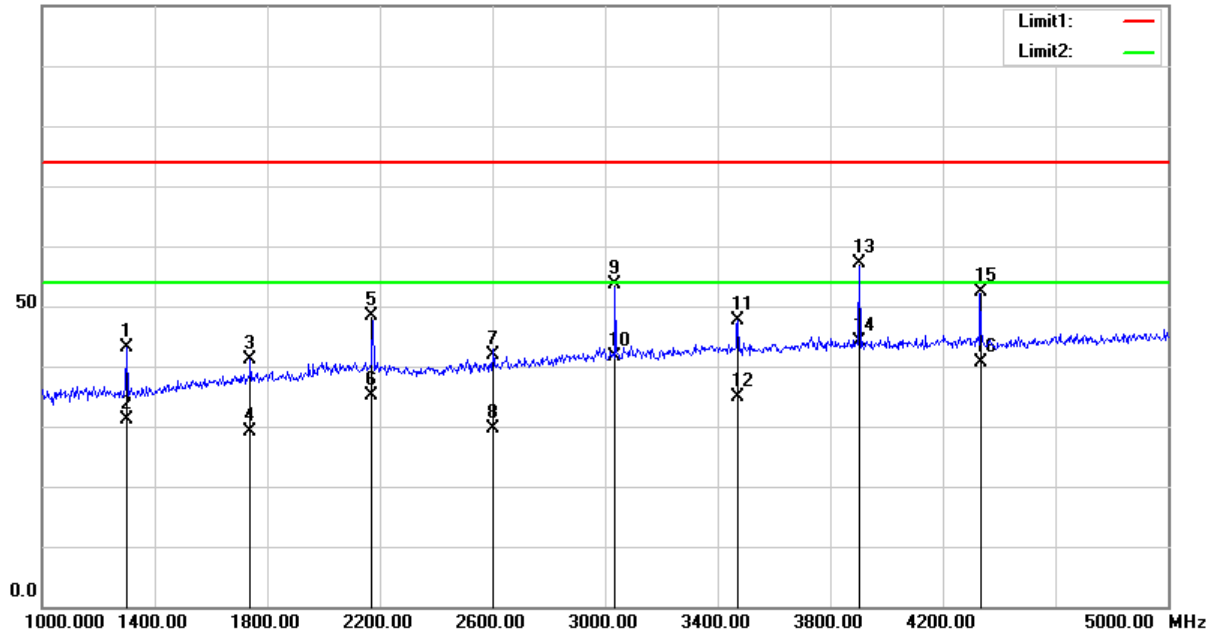

Vertical:

100.0 dBuV/m

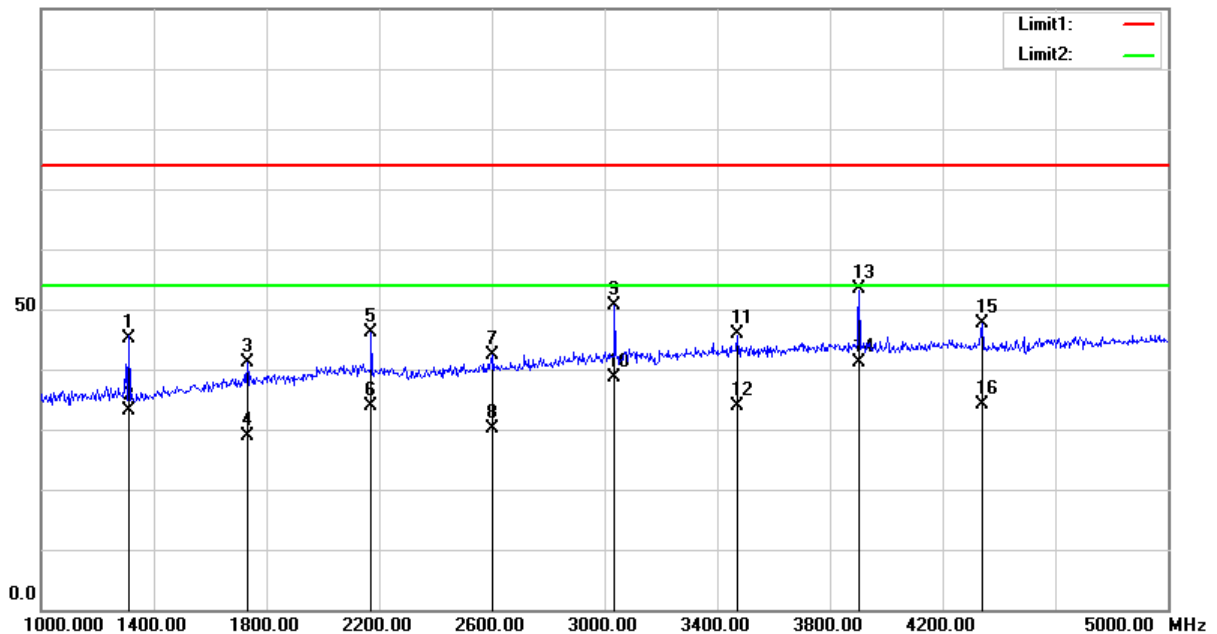

FCC §15.231(c) – 20 dB BANDWIDTH TESTING

Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The waveform was received by the spectrum analyzer/EMI Test Receiver, plot the 20 dB bandwidth.

Test Data

Environmental Conditions

Temperature:	25.2°C
Relative Humidity:	62 %
ATM Pressure:	101.2 kPa
Tester:	Jalon Liu
Test Date:	2021.03.16


Test Mode: Transmitting

Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (kHz)	Result
433.92	5.716	1084.8	Pass

Note: Limit = 0.25% * Center Frequency = 0.25%*433.92MHz = 1084.8 kHz

**20 dB Bandwidth
D3-D2=5.716 kHz**

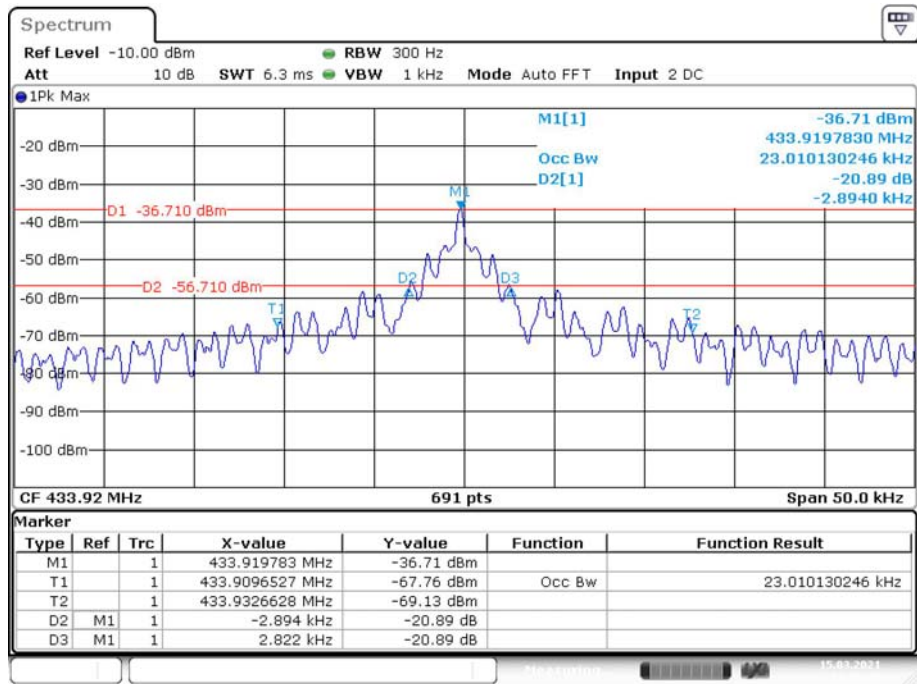

Date: 15.MAR.2021 14:09:47

FCC §15.231(a) - DEACTIVATION TESTING**Applicable Standard**

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	25.2°C
Relative Humidity:	62 %
ATM Pressure:	101.2 kPa
Tester:	Jalon Liu
Test Date:	2021.03.16

Test Mode: Transmitting

Test Result: Compliance. Please refer to following plot.

Maximum Deactivate Time (s)	Limit (s)	Result
0.29	<5	Pass

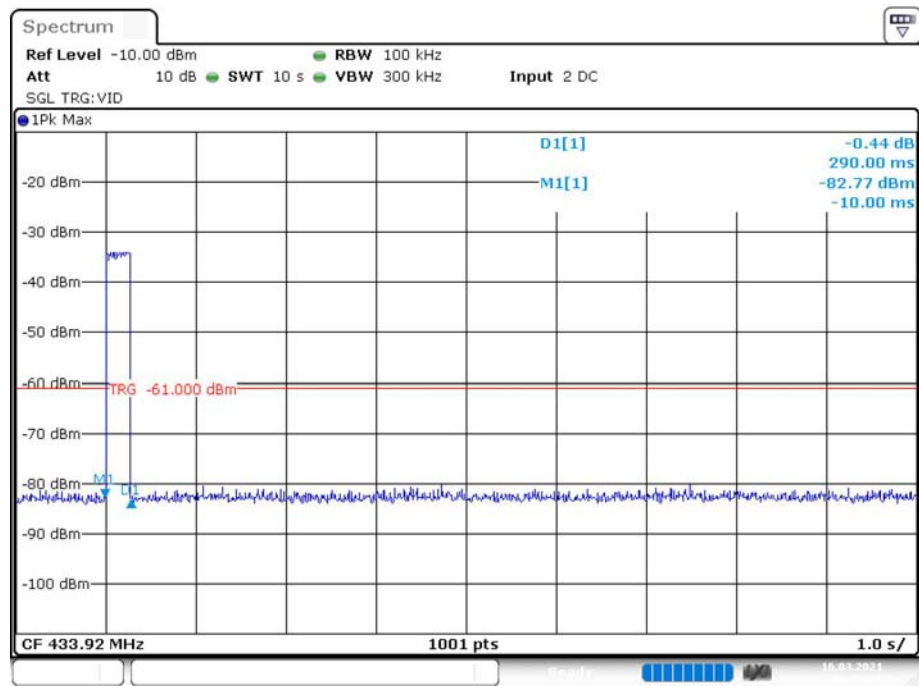

Date: 16.MAR.2021 09:16:21

*****END OF REPORT*****