



# RF TEST REPORT

**Report No.:** SET2021-04193

**Product Name:** Nightbuds

**IC:** 23838-K2V0W

**FCC ID:** 2APO8-K2V0W

**Model No. :** K2V0W

**Applicant:** Kokoon Technology Ltd.

**Address:** CC104, The Biscuit Factory, Drummond Road, LONDON, SE16 4DG, UNITED KINGDOM.

**Dates of Testing:** 04/01/2021 —04/23/2021

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of 37 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

## Test Report

**Product Name** ..... : Nightbuds

**Brand Name** ..... : Kokoon

**Trade Name** ..... : Kokoon

**Applicant** ..... : Kokoon Technology Ltd.

**Applicant Address** ..... : CC104, The Biscuit Factory, Drummond Road, LONDON, SE16 4DG, UNITED KINGDOM.

**Manufacturer** ..... : Dongguan Laccess Electronic Technology Co.,Ltd.

**Manufacturer Address** ..... : No. 2 Xiangyang Road, Tian Xin Huaxing Industrial Area, Qiaotou town, Dongguan City, China.

**Test Standards** ..... :  
47 CFR Part 15 Subpart C  
KDB558074 D01 DTS Meas Guidance v05r02  
IC RSS-Gen(Issue 5, March 2019)  
IC RSS-247(Issue 2, Feb. 2017)

**Test Result** ..... : PASS

**Tested by** ..... : *Vincent*

2021.04.23

Vincent, Test Engineer

**Reviewed by** ..... : *Chris You*

2021.04.23

Chris You, Senior Engineer

**Approved by** ..... : *Shuangwen Zhang*

2021.04.23

Shuangwen Zhang, Manager

## TABLE OF CONTENTS

<b>RF TEST REPORT .....</b>	<b>1</b>
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. EUT Description .....	4
1.2. Test Standards and Results.....	5
1.3. Table for Supporting Units.....	6
1.4. EUT Operation Test Setup .....	6
1.5. Facilities and Accreditations .....	7
<b>2. TEST REQUIREMENTS .....</b>	<b>8</b>
2.1. Antenna requirement.....	8
2.2. Peak Output Power and EIRP .....	9
2.3. 6dB and 99% Bandwidth .....	10
2.4. Conducted Band Edges and Spurious Emissions.....	11
2.5. Power spectral density (PSD) .....	13
2.6. Radiated Band Edge and Spurious Emission.....	15
2.7. Conducted Emission .....	23
<b>3. LIST OF MEASURING EQUIPMENT .....</b>	<b>27</b>
<b>4. UNCERTAINTY OF EVALUATION .....</b>	<b>28</b>
<b>APPENDIX A .....</b>	<b>29</b>

Change History		
Issue	Date	Reason for change
1.0	2021.04.23	First edition

## 1. General Information

### 1.1. EUT Description

EUT Type	Nightbuds	
Hardware Version	1.2	
Software Version	3.0.9	
Frequency Range	Bluetooth LE	2402MHz~2480MHz
Channel Number	Bluetooth LE	40
Bit Rate of Transmitter	Bluetooth LE	1Mbps
Modulation Type	Bluetooth LE	GFSK
Antenna Type	Internal	
Antenna Gain	0.45dBi	

Note 1: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Note 3: The antenna gain and RF adapter/cable insert loss provided by manufacturer.

## 1.2. Test Standards and Results

The objective of the report is to perform testing according to below standards for the EUT FCC ID/IC Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C 2017	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	RSS-Gen (Issue 5, March 2019)	General Requirements for Compliance of Radio Apparatus
4	RSS-247 (Issue 2, Feb. 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	IC Rules	Description	Result
1	15.203	RSS-Gen, 6.8	Antenna Requirement	PASS
2	15.247(b)	RSS-247, 5.4	Peak Output Power and EIRP	PASS
3	15.247(a)	RSS-GEN, 6.7 RSS-247, 5.2	6dB and 99% Occupied Bandwidth	PASS
4	15.247(d)	RSS-247, 5.5	Conducted Band Edges and Spurious Emission	PASS
5	15.247(e)	RSS-247, 5.2	Power spectral density (PSD)	PASS
6	15.207	RSS-GEN, 8.8	Conducted Emission	PASS
7	15.209 15.205 15.247(d)	RSS-247, 5.5	Radiated Band Edges and Spurious Emission	PASS

Note: the tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

These RF tests were performed according to the method of measurements prescribed in KDB 558074D01 v05r02.

### 40 channels are provided for Bluetooth LE

Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452

6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

	Test Items	Modulation	Channel
Bluetooth LE 4.2	Peak Conducted Output Power and EIRP Power Spectral Density 6dB and 99% Bandwidth Conducted and Spurious Emission Radiated and Spurious Emission	GFSK	0/20/39
	Band Edge	GFSK	0/39

### 1.3. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
1	Notebook	DELL	PP11L	DELL	H5914A03	FCC DOC

### 1.4. EUT Operation Test Setup

For RF test items, an engineering test program was provided and enable to make EUT transmitting.

## 1.5. Facilities and Accreditations

### 1.5.1. Facilities

#### FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until June 30th,2021

#### ISED Registration: 11185A-1

#### CAB identifier: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30th, 2021

#### A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.5.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	15 °C - 35 °C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

## 2. Test Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to RSSGEN 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

#### 2.1.2. Antenna Information

**Antenna Category:** Internal antenna

An Internal antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

#### Antenna General Information:

No.	EUT	Operating frequency range	Ant. Type	Ant. Gain
1	Nightbuds	2402-2480MHz	Internal	0.45dBi

Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

## 2.2. Peak Output Power and EIRP

### 2.2.1. Limit of Peak Output Power and EIRP


For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

The e.i.r.p. shall not exceed 4 W

### 2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.2.3. Test Setup

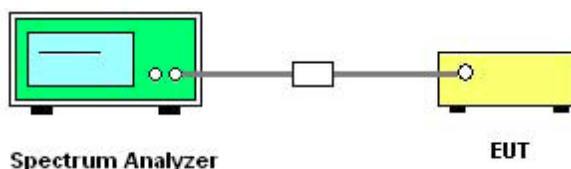

### 2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB 558074D01 v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings: Span  $\geq 3$ RBW;  
RBW  $\geq$  DTS bandwidth; VBW  $\geq 3$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Measure the conducted output power and record the results in the test report.

### 2.2.5. Test Result

Please refer to Appendix A for detail

## 2.3. 6dB and 99% Bandwidth


### 2.3.1. Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.3.3. Test Setup

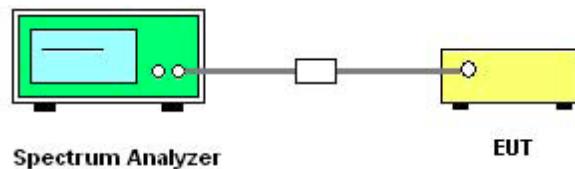

### 2.3.4. Test Procedures

1. The testing follows FCC KDB 558074D01 v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

### 2.3.5. Test Results of 6dB Bandwidth

Please refer to Appendix A for detail

## 2.4. Conducted Band Edges and Spurious Emissions


### 2.4.1. Limit of Conducted Band Edges and Spurious Emissions

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

### 2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.4.3. Test Setup

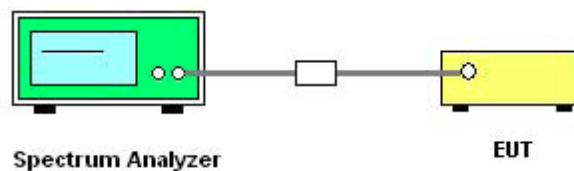

### 2.4.4. Test Procedure

1. The testing follows FCC KDB 558074D01 v05r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 2.4.5. Test Results of Conducted Band Edges

Please refer to Appendix A for detail

## 2.5. Power spectral density (PSD)


### 2.5.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

### 2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.5.3. Test Setup

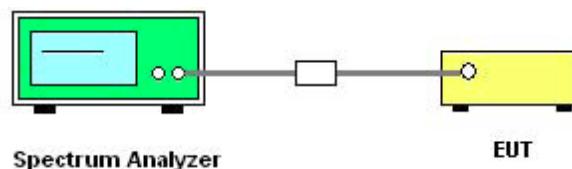

### 2.5.4. Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB 558074D01 v05r02.

2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

3. Set to the maximum power setting and enable the EUT transmit continuously.

4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz.

Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)

5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.

6. Measure and record the results in the test report.

7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limitline for Conducted Band Edges and Conducted Spurious Emission.

### 2.5.5. Test Results of Power spectral density

Please refer to Appendix A for detail

## 2.6. Radiated Band Edge and Spurious Emission

### 2.6.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Note: Wireless charger configuration was evaluated.


Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



### 2.6.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.6.3. Test Setup

For radiated emissions from 9 KHz to 30 MHz

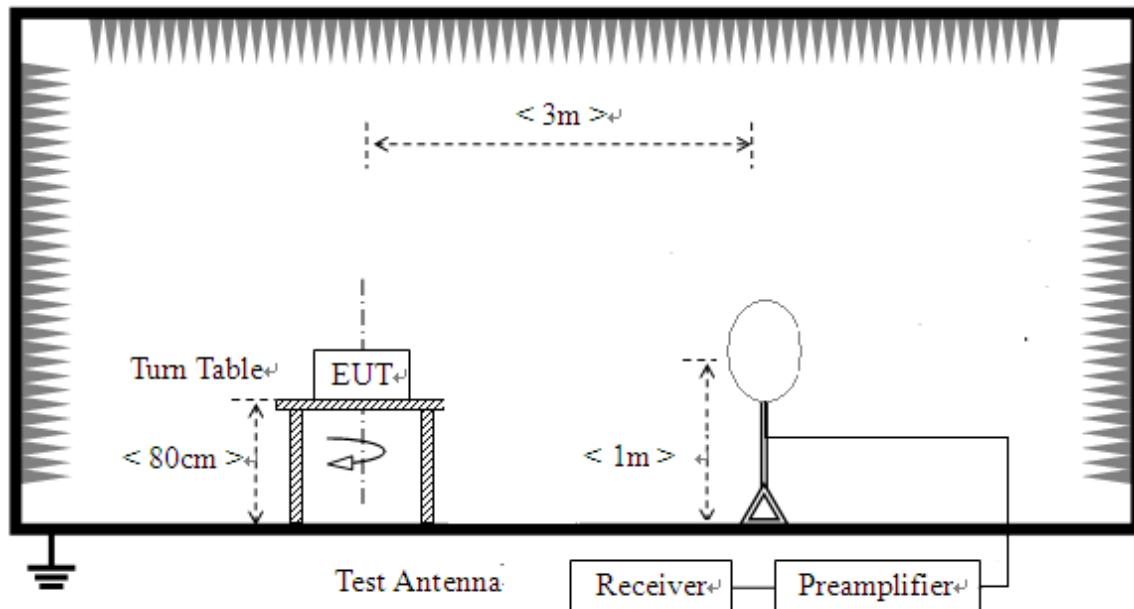

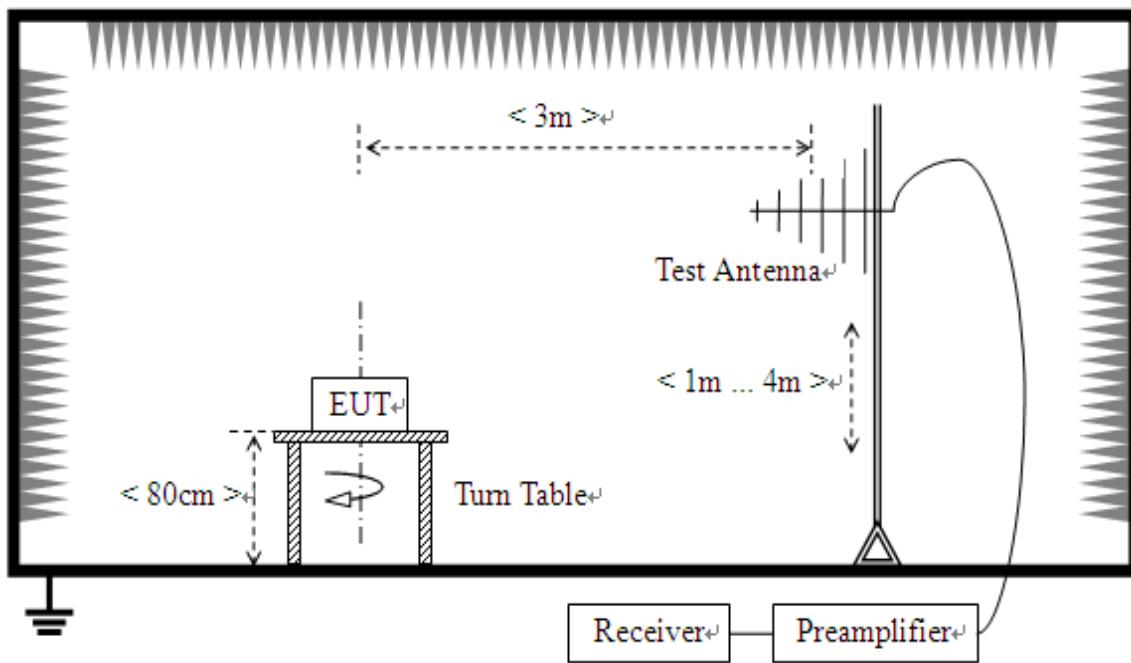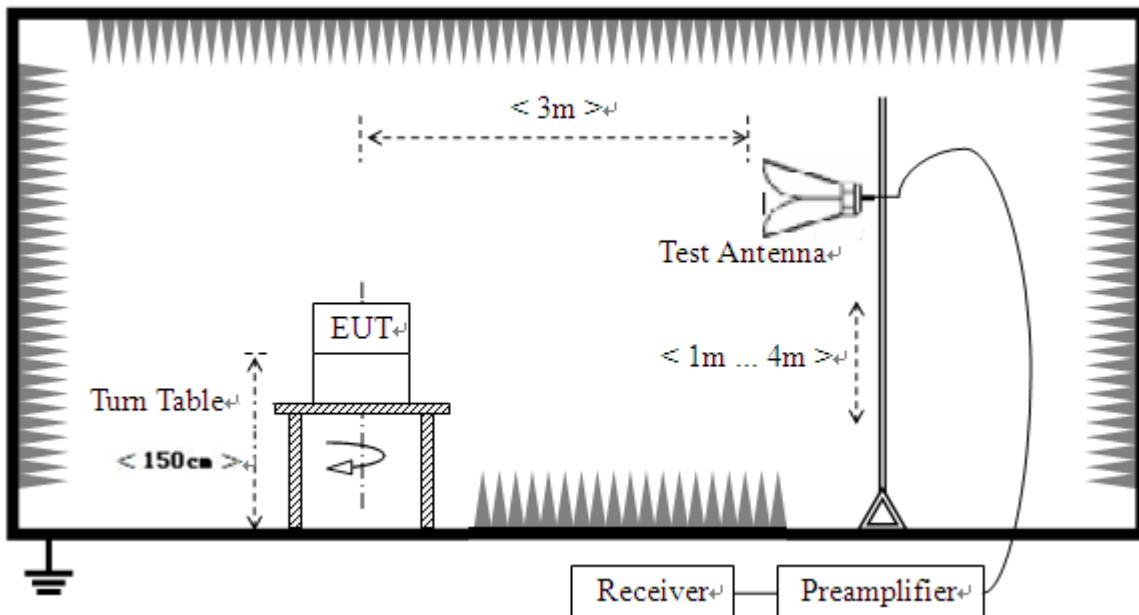**For radiated emissions from 30MHz to 1GHz****For radiated emissions above 1GHz**

#### 2.6.4. Test Procedures

1. The EUT was placed on a turntable 0.8m below 1GHz and 1.5m above 1GHz above ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported.  
Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

##### NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $> 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

## 2.6.5. Test Results of Radiated Band Edge and Spurious Emission

### For 9KHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### For 30MHz to 1000 MHz

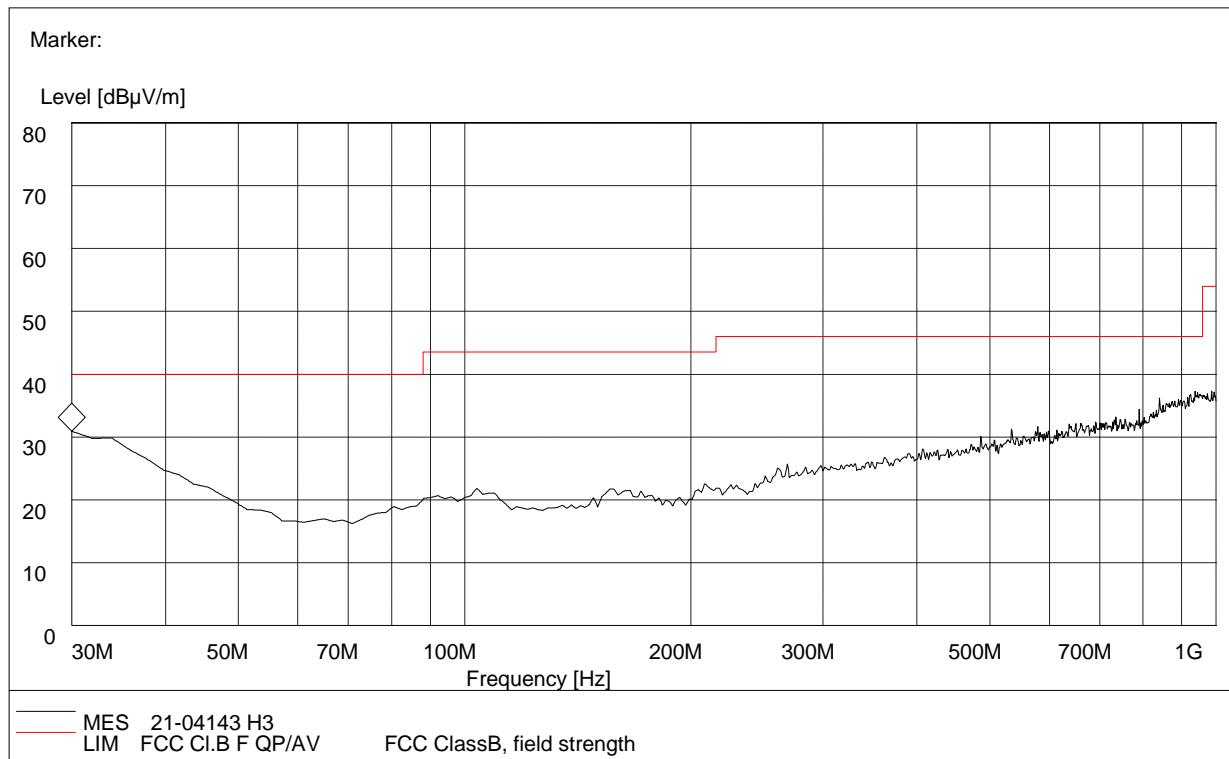

**Plot A: 30MHz to 1GHz, Antenna Horizontal**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Corr. Factor (dB/m)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin	Antenna	Verdict
30.000000	29.58	120.000	17.9	100.0	40.0	10.42	Horizontal	Pass
33.880000	28.36	120.000	13.7	100.0	40.0	11.64	Horizontal	Pass
103.710000	21.58	120.000	12.30	100.0	43.5	21.92	Horizontal	Pass
156.100000	20.57	120.000	17.50	100.0	43.5	22.93	Horizontal	Pass
208.420000	20.34	120.000	17.50	100.0	43.5	23.16	Horizontal	Pass
260.850000	24.05	120.000	23.9	100.0	46.0	21.95	Horizontal	Pass

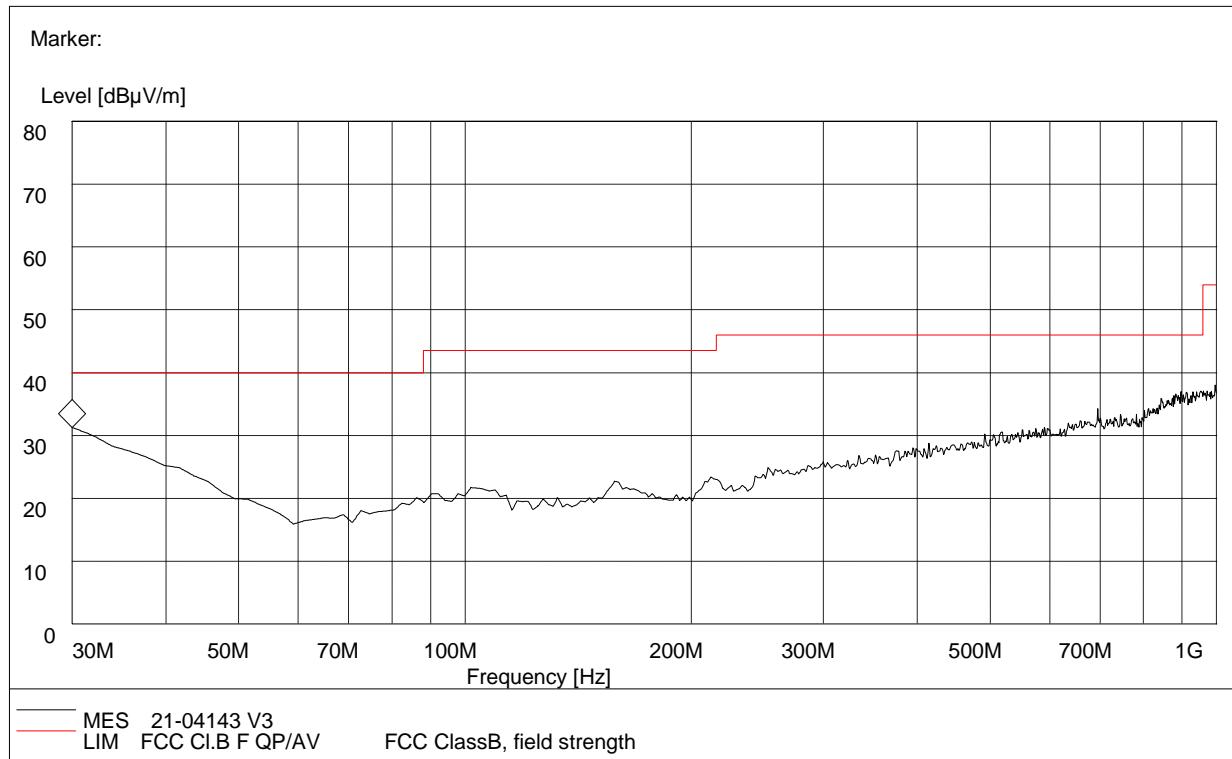

**Plot B: 30MHz to 1GHz, Antenna Vertical**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Corr. Factor (dB $\mu$ V/m)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin	Antenna	Verdict
30.000000	30.93	120.000	17.9	100.0	40.0	9.07	Vertical	Pass
39.700000	24.31	120.000	10.6	100.0	40.0	15.69	Vertical	Pass
85.300000	19.39	120.000	10.6	100.0	40.0	20.61	Vertical	Pass
101.750000	20.30	120.000	17.5	100.0	43.5	23.2	Vertical	Pass
158.040000	21.39	120.000	17.5	100.0	43.5	22.11	Vertical	Pass
212.360000	22.39	120.000	19.3	100.0	43.5	21.11	Vertical	Pass

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. Margin value = Limit value - Emission Level
4. The other emission levels were very low against the limit.

**For 1GHz to 25GHz**
**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (0CH\_2402MHz)**

No.	Fre. (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2390	48.65	PK	74.00	-25.35	1.5	260	47.35	5.2	28.60	32.5	1.3
2	2390	37.29	AV	54.00	-16.71	1.5	260	35.99	5.2	28.60	32.5	1.3
3	4804	50.33	PK	74.00	-23.67	1.5	260	43.93	7.4	30.40	31.4	6.4
4	4804	39.46	AV	54.00	-14.54	1.5	260	33.06	7.4	30.40	31.4	6.4
5	7206	51.29	PK	74.00	-22.71	1.5	260	41.99	9.9	31.50	32.1	9.3
6	7206	40.30	AV	54.00	-13.7	1.5	260	31	9.9	31.50	32.1	9.3

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (0CH\_2402MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2390	46.35	PK	74.00	-27.65	1.6	120	45.05	5.2	28.60	32.5	1.3
2	2390	36.24	AV	54.00	-17.76	1.6	120	34.94	5.2	28.60	32.5	1.3
3	4804	51.99	PK	74.00	-22.01	1.6	120	45.59	7.4	30.40	31.4	6.4
4	4804	41.91	AV	54.00	-12.09	1.6	120	35.51	7.4	30.40	31.4	6.4
5	7206	52.06	PK	74.00	-21.94	1.6	120	42.76	9.9	31.50	32.1	9.3
6	7206	41.74	AV	54.00	-12.26	1.6	120	32.44	9.9	31.50	32.1	9.3

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (19CH\_2440MHz)**

No.	Fre. (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	4880	47.95	PK	74	-26.05	1.7	200	42.55	6.7	31.2	31.5	6.4
2	4880	37.46	AV	54	-16.54	1.7	200	32.18	6.7	31.2	31.5	6.4
3	7320	52	PK	74	-22	1.7	200	45.94	6.7	31.2	31.5	6.4
4	7320	41.89	AV	54	-12.11	1.7	200	35.75	6.7	31.2	31.5	6.4

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (19CH\_2440MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	4880	46.52	PK	74	-27.48	1.6	280	44.77	6.7	31.2	31.5	6.4
2	4880	36.3	AV	54	-17.7	1.6	280	34.53	6.7	31.2	31.5	6.4
3	7320	51.99	PK	74	-22.01	1.6	280	45.97	6.7	31.2	31.5	6.4
4	7320	41.9	AV	54	-12.1	1.6	280	35.68	6.7	31.2	31.5	6.4

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (39CH\_2480MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.5	48.95	PK	74	-25.05	1.6	300	46.45	5.7	29.5	31.8	3.4
2	2483.5	37.65	AV	54	-16.35	1.6	300	36.23	5.7	29.5	31.8	3.4
3	4960	51.24	PK	74	-22.76	1.6	300	45.92	7	30.05	31.5	5.55
4	4960	41	AV	54	-13	1.6	300	35.74	7	30.05	31.5	5.55
5	7440	53.21	PK	74	-20.79	1.6	300	37.44	16	31.2	32	15.2
6	7440	42.86	AV	54	-11.14	1.6	300	27.19	16	31.2	32	15.2

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (39CH\_2480MHz)**

No.	Frequency (MHz)	Emssion Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.5	48.54	PK	74	-25.46	1.7	120	45.25	5.7	29.5	31.8	3.4
2	2483.5	36.48	AV	54	-17.52	1.7	120	35.1	5.7	29.5	31.8	3.4
3	4960	51.69	PK	74	-22.31	1.7	120	45.89	7	30.05	31.5	5.55
4	4960	40.62	AV	54	-13.38	1.7	120	35.07	7	30.05	31.5	5.55
5	7440	52.33	PK	74	-21.67	1.7	120	38.42	16	31.2	32	15.2
6	7440	41.96	AV	54	-12.04	1.7	120	28.07	16	31.2	32	15.2

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
  - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level - Limit value

## 2.7. Conducted Emission

### 2.7.1. Limit of Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radiofrequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

### 2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.7.3. Test Setup

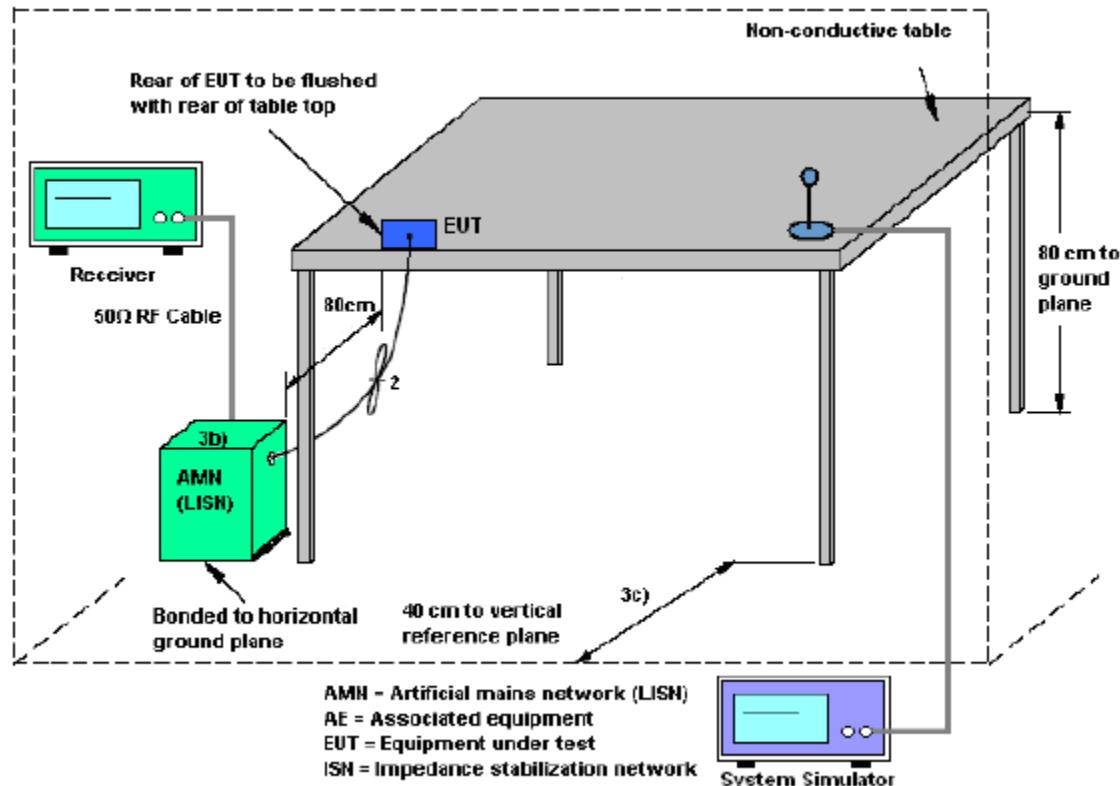


#### 2.7.4. Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

#### 2.7.5. Test Result

The EUT configuration of the emission tests is Bluetooth Link + USB Cable (Charging from Adapter)

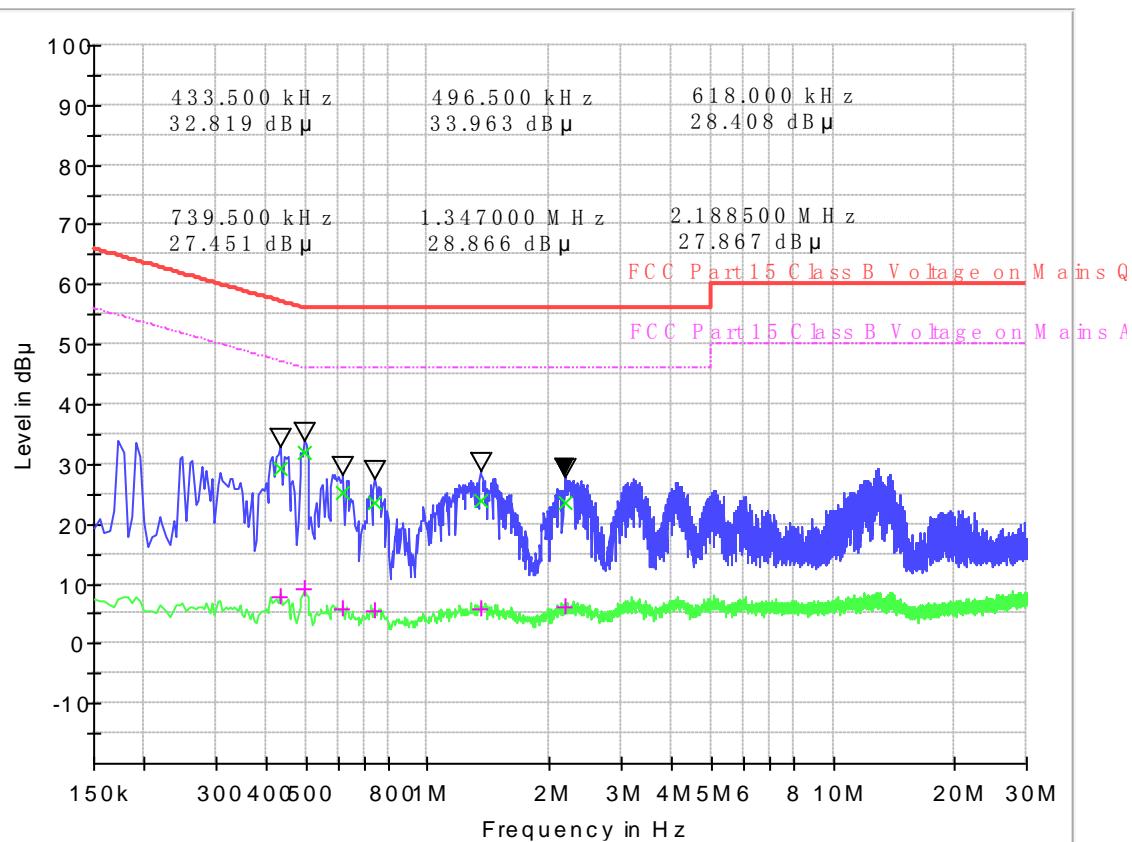

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB $\mu$ V)
0.433500	29.20	7.76	0.1	10.1	27.99	57.2	39.43	47.2
0.496500	32.06	9.27	0.1	10.1	24.00	56.1	36.79	46.1
0.618000	25.24	5.88	0.1	10.1	30.76	56.0	40.12	46.0
0.739500	23.70	5.48	0.1	10.1	32.30	56.0	40.52	46.0
1.347000	24.00	5.94	0.2	10.2	32.00	56.0	40.06	46.0
2.188500	23.72	6.04	0.2	10.2	32.28	56.0	39.96	46.0

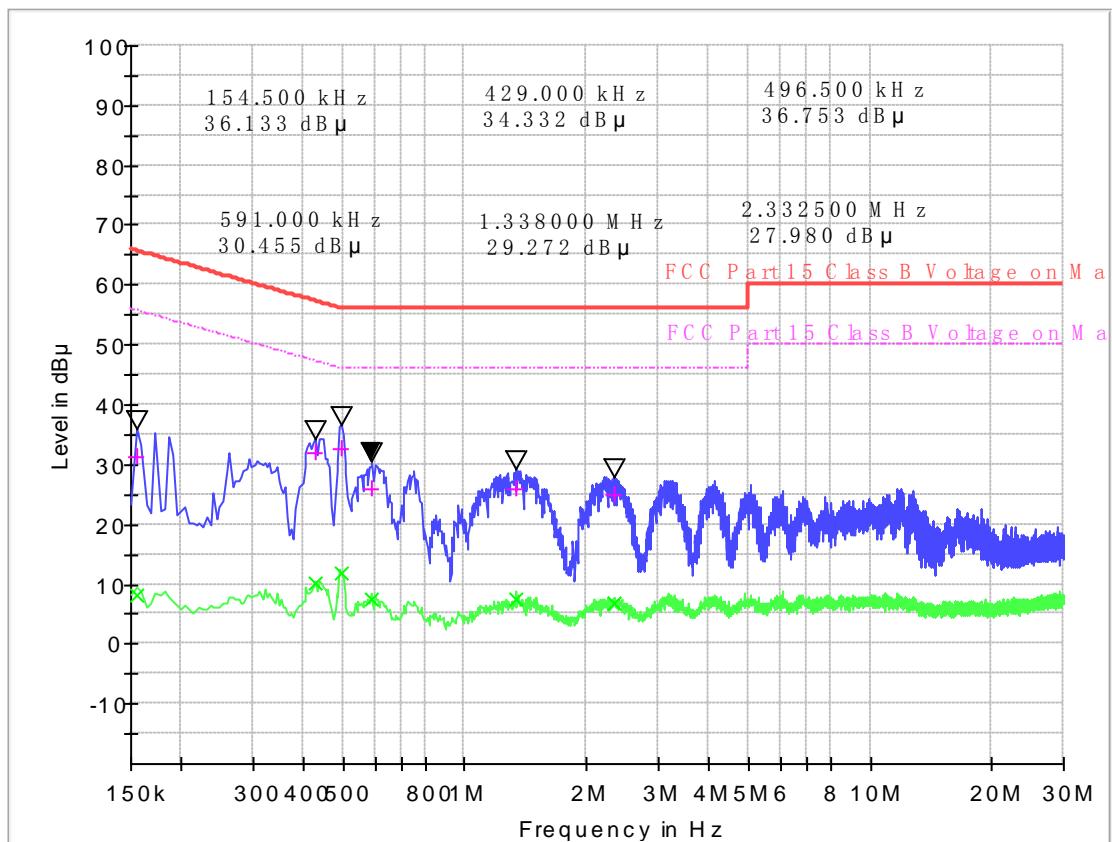

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μV)
0.154500	31.42	8.27	0.1	10.1	34.33	65.8	47.48	55.8
0.429000	31.93	10.18	0.1	10.1	25.34	57.3	37.09	47.3
0.496500	32.49	11.99	0.1	10.1	23.57	56.1	34.07	46.1
0.591000	25.99	7.61	0.1	10.1	30.01	56.0	38.39	46.0
1.338000	25.85	7.33	0.2	10.2	30.15	56.0	38.67	46.0
2.332500	24.84	6.85	0.2	10.2	31.16	56.0	39.15	46.0

**Test Result: PASS**
**Note: Correction factor=Cabel loss+ attenuation factor**  
**attenuation factor=10dB**

### 3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI TEST RECEIVER	KEYSIGHT	N9038A	A141202036	2020.09.21	2021.09.20
2	Power Meter	R&S	NRP-Z31	102872	2020.05.18	2021.05.17
3	TURNTABLE	ETS	2088	2149	N/A	N/A
4	ANTENNA MAST	ETS	2075	2346	N/A	N/A
5	EMI TEST Software	R&S	ESK1	N/A	N/A	N/A
6	Horn antenna (18GHz~26.5GHz)	AR	AT4003A	325306	2020.09.16	2022.09.15
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2021.01.26	2022.01.25
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/40 0	A160302517	2021.01.26	2022.01.25
9	High pass filter	Compliance Direction systems	BSU-6	34202	2020.11.10	2021.11.09
10	Horn Antenna	R&S	HF906	A0304225	2019.04.17	2022.04.16
11	Horn Antenna	R&S	ESIB7	A0501375	2020.06.24	2021.06.23
12	ULTRA-BROADBAND ANTENNA	SCHWARZBEC K	VULB9160	A0805560	2019.05.24	2022.05.23
13	Passive Loop Antenna	R&S	HFH2-Z2	100047	2019.04.26	2022.04.25
14	Temperature chamber	XSM	DNF810C	A0501375	2020.05.26	2021.05.25
15	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2020.05.18	2021.05.17
16	Power Supply	R&S	ESIB26	A0304218	2020.04.29	2021.04.28
17	LISN	ROHDE&SCH WARZ	ENV216	A140701847	2020.09.22	2021.09.21
18	Test software	ECIT	Eagle	V2.0	N/A	N/A

## 4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%(U=2Uc(y))	2.6dB
--	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2Uc(y))	2.4dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%(U=2Uc(y))	2.8dB
--	-------

## Appendix A

### Peak Output Power Test Result and Data


Test Frequency	Power(dBm)	Limit(dBm)	Result
2402	3.087	30	Pass
2440	3.643		Pass
2480	3.347		Pass

Test Frequency	EIRP(dBm)	Limit(dBm)	Result
2402	3.587	36	Pass
2440	4.143		Pass
2480	3.847		Pass


EIRP= Conducted Output Power+Antenna Gain

Antenna Gain: 0.5dBi

Output Power: 2402MHz

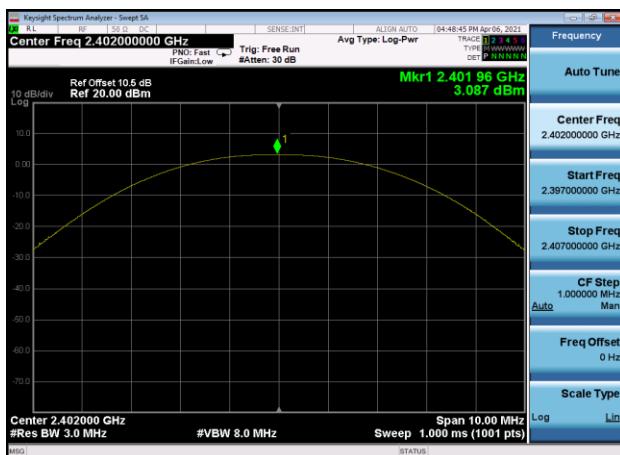

Output Power: 2440MHz

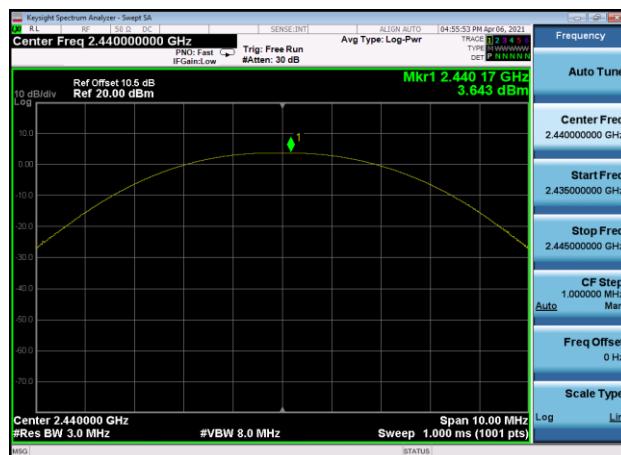


Output Power: 2480MHz



## Power Spectral Density

### Test Result and Data


Test Frequency	PSD(dBm/3KHz)	Limit(dBm/3KHz)	Result
2402	1.621		Pass
2440	2.190	8	Pass
2480	1.897		Pass

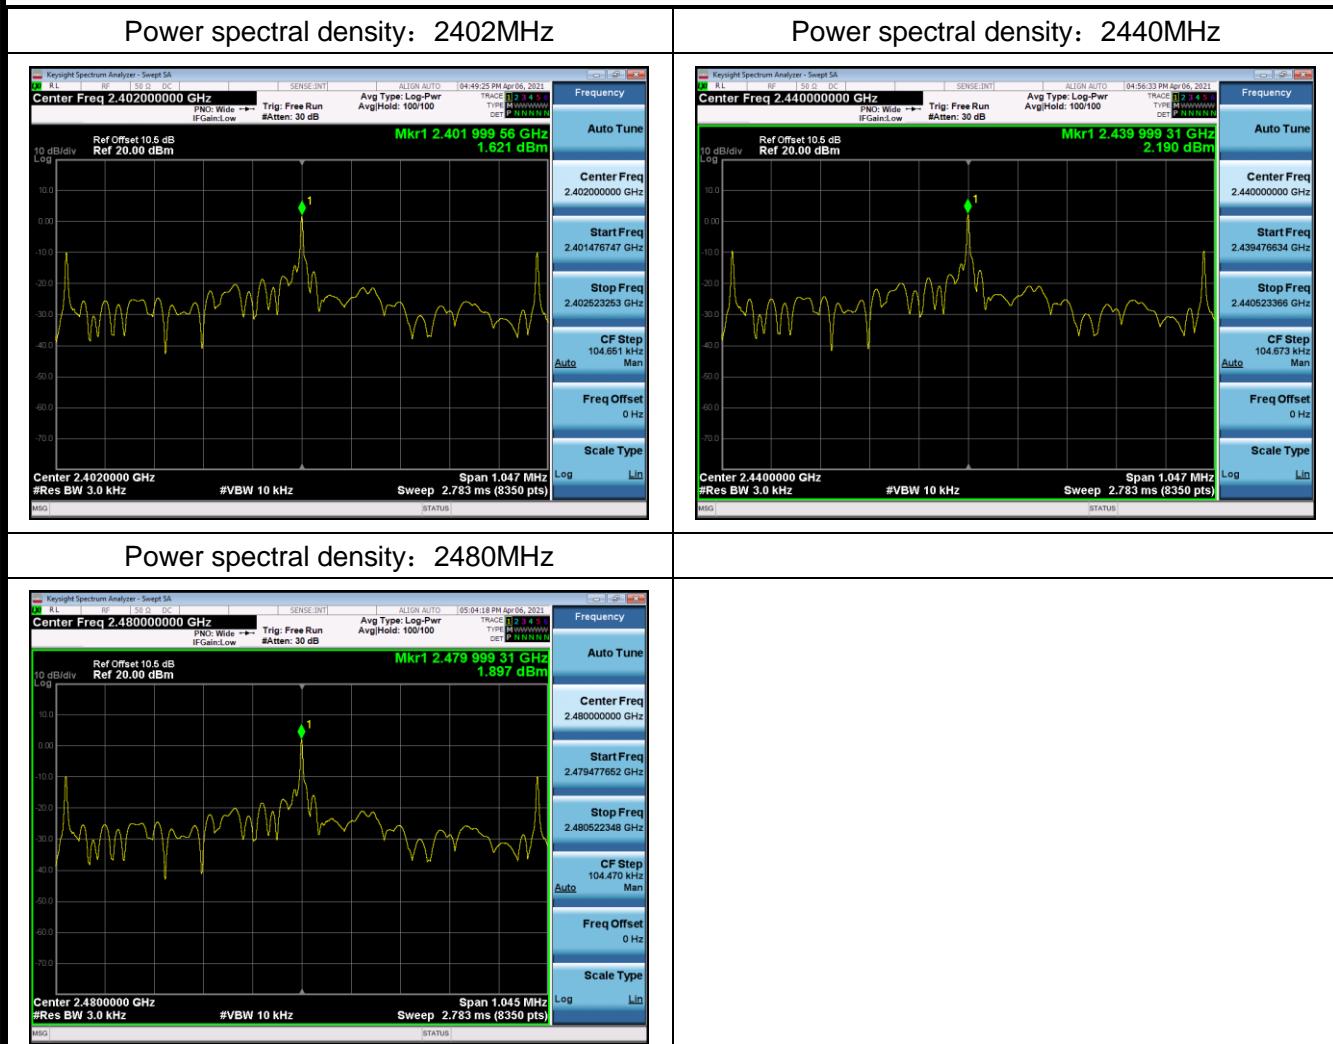

## 6dB BandWidth

### Test Result and Data

Test Frequency	6dB Occupy Bandwidth(Khz)	Min Limit(kHz)	Result
2402	697.67	500	Pass
2440	697.821		Pass
2480	696.464		Pass

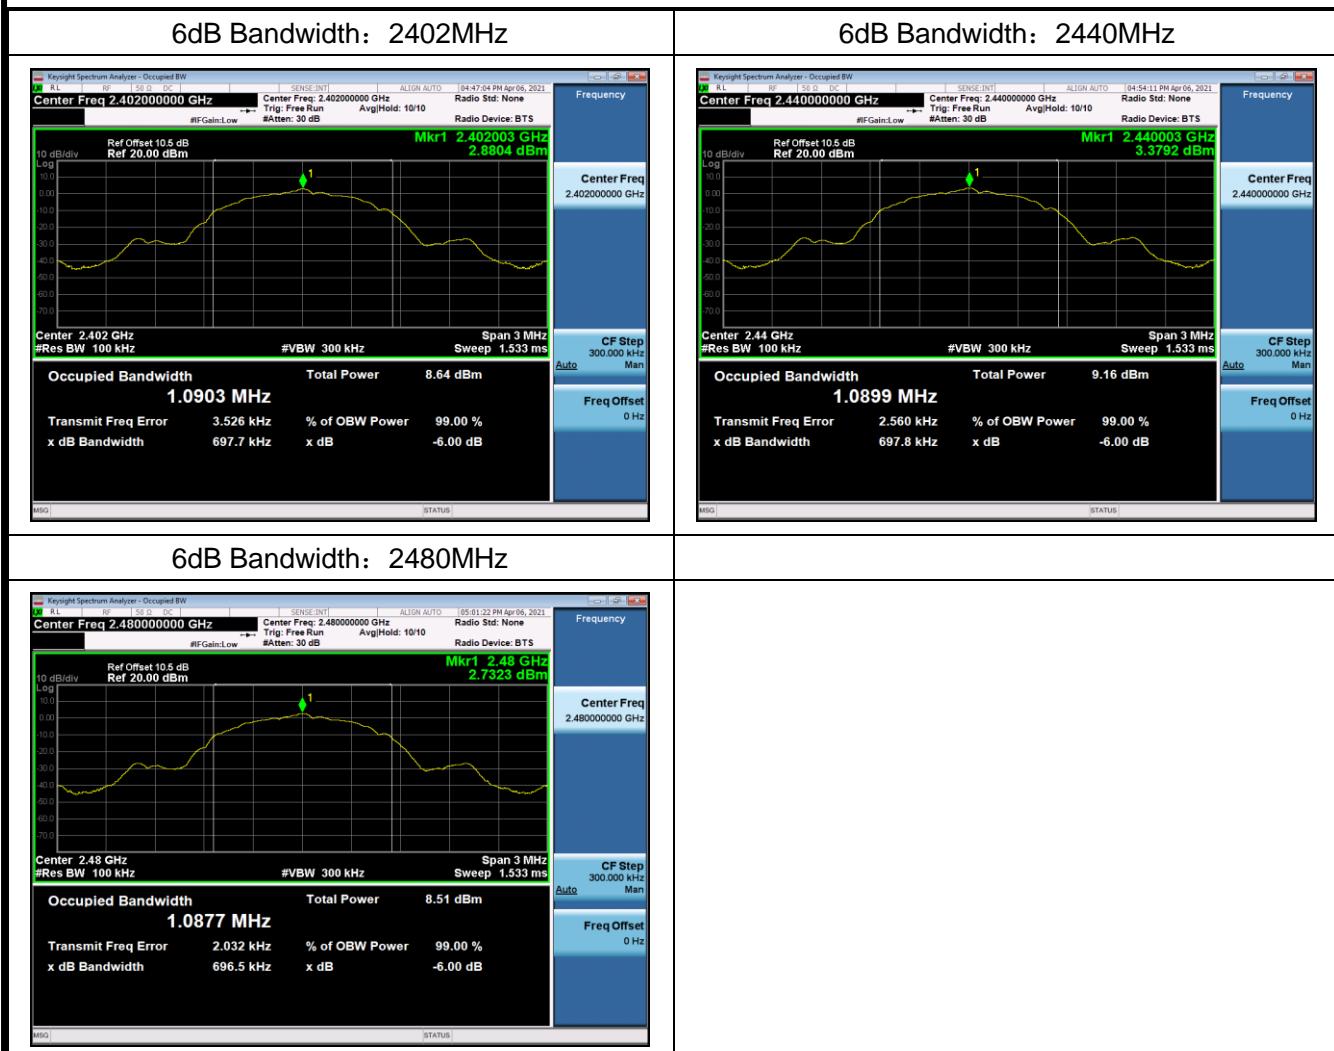

**99% BandWidth****Test Result and Data**

BLE 99% Occupied Bandwidth			
Test Frequency	99% Occupy Bandwidth (MHz)	Min Limit (MHz)	Result
2402	1.058	0.5	Pass
2440	1.058	0.5	Pass
2480	1.056	0.5	Pass

99% Bandwidth: 2402MHz



99% Bandwidth: 2440MHz



99% Bandwidth: 2480MHz




## Conducted Band Edges and Spurious Emissions

### Test Result and Data

,Plot ,1Transmitter Spurious Emission  
: 2402,Referecy Level




,Plot ,1Transmitter Spurious Emission  
: 2440,Referecy Level

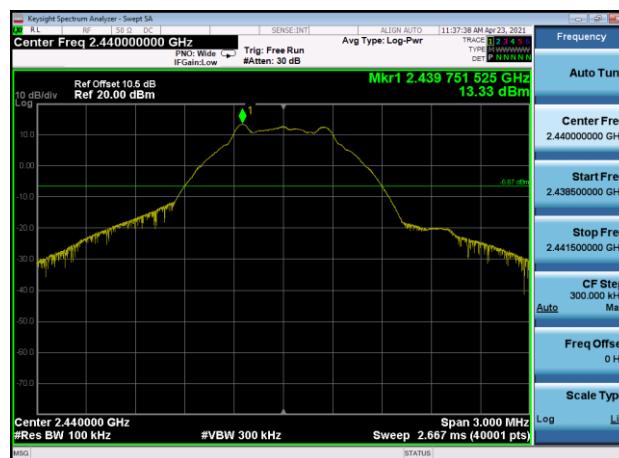


,Plot ,1Transmitter Spurious Emission  
: 2480,Referecy Level




,Plot ,2Conducted Emission: 2402  
,Band Edge

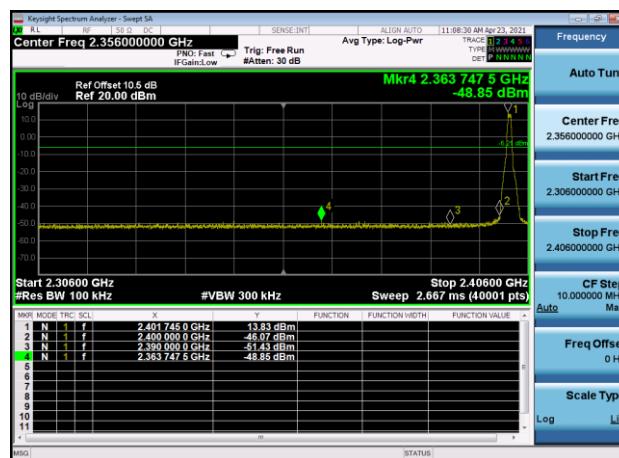


,Plot ,2Conducted Emission: 2440  
,Band Edge

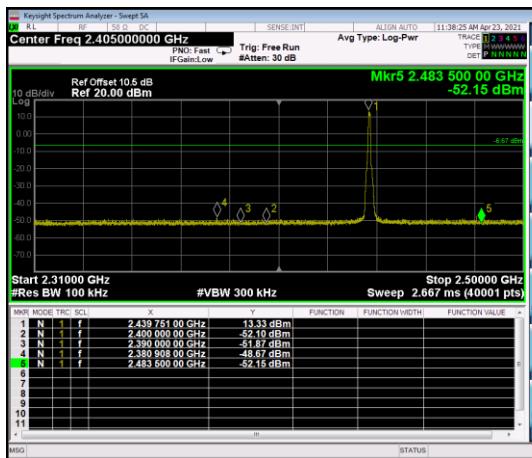


,Plot ,2Conducted Emission: 2480  
,Band Edge

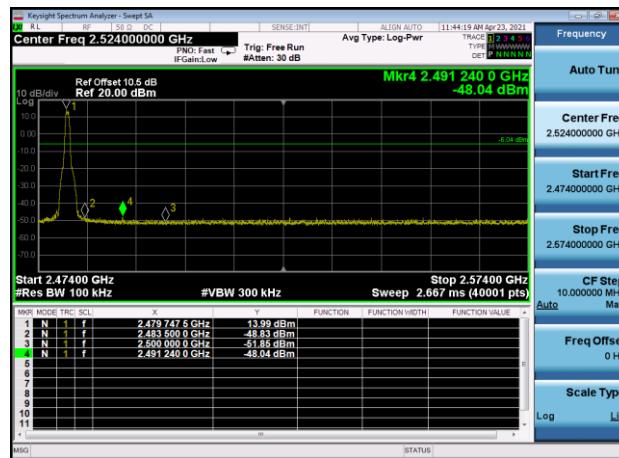


,Plot ,3Transmitter Spurious Emission  
: 2402,30MHz~1000MHz

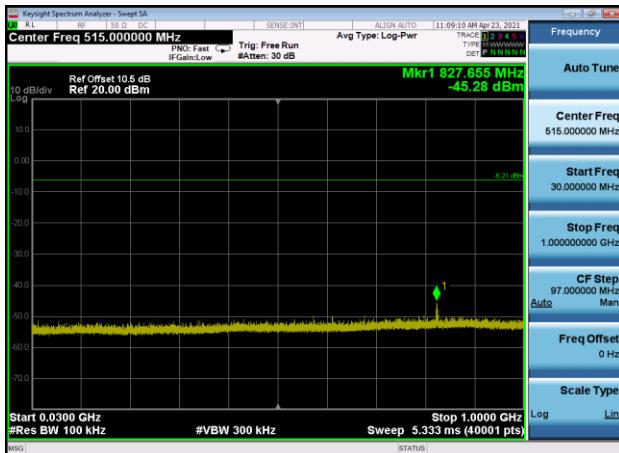


,Plot ,3Transmitter Spurious Emission  
: 2440,30MHz~1000MHz

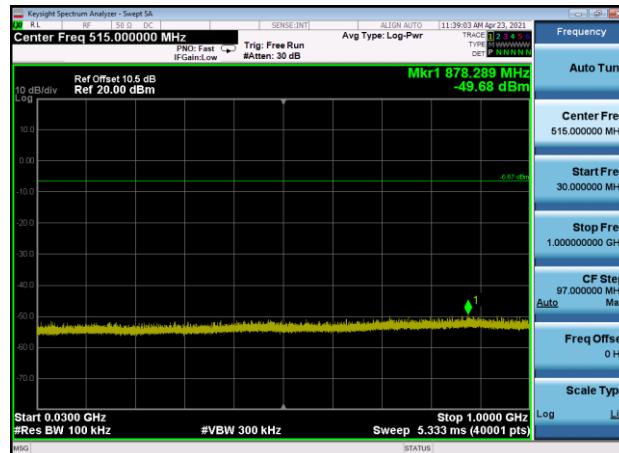


,Plot ,3Transmitter Spurious Emission  
: 2480,30MHz~1000MHz

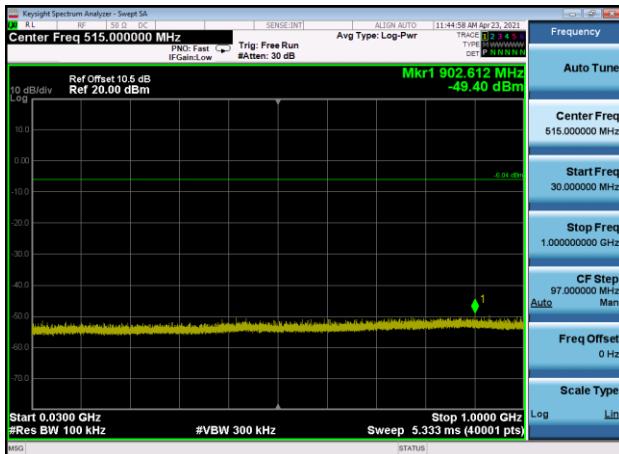

,Plot ,4Transmitter Spurious Emission  
: 2402,1000MHz~10000MHz

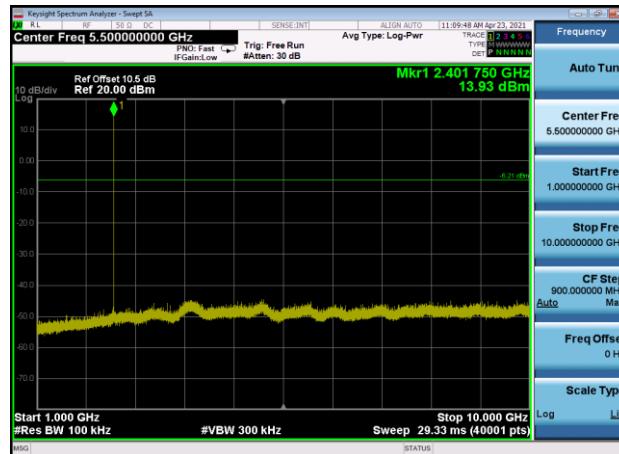


,Plot ,4Transmitter Spurious Emission  
: 2440,1000MHz~10000MHz

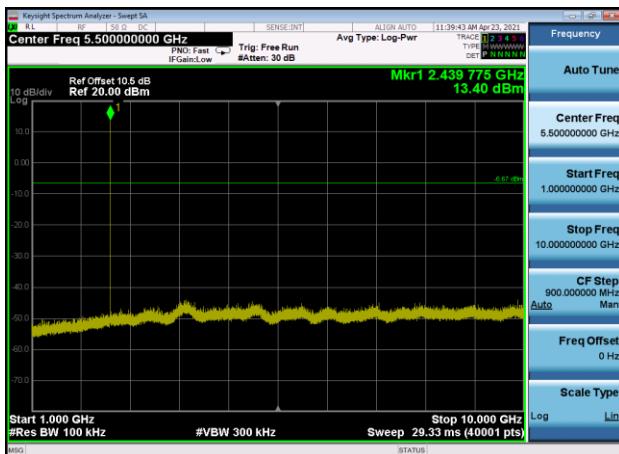


,Plot ,4Transmitter Spurious Emission  
: 2480,1000MHz~10000MHz




,Plot ,5Transmitter Spurious Emission  
: 2402,10000MHz~25000MHz

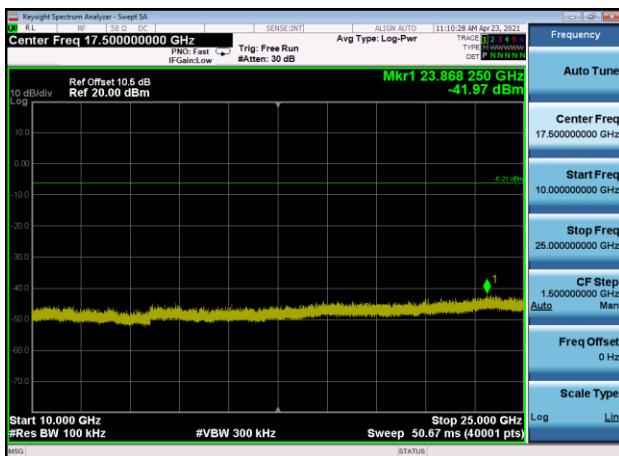

,Plot ,5Transmitter Spurious Emission  
: 2440,10000MHz~25000MHz

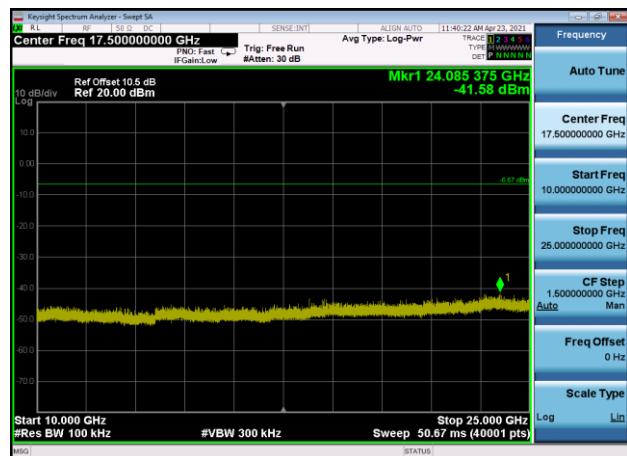

,Plot ,5Transmitter Spurious Emission  
: 2480,10000MHz~25000MHz

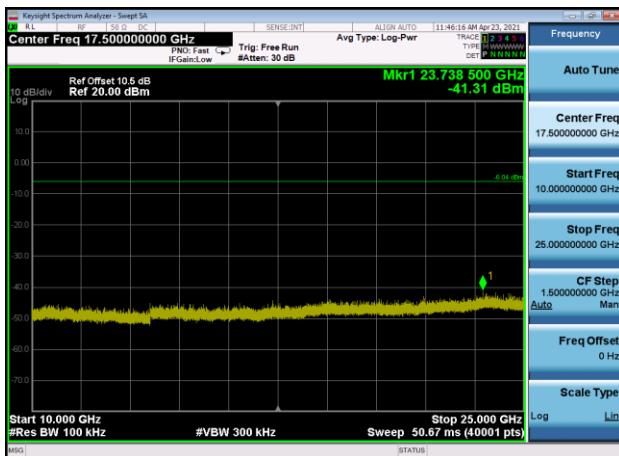

\*\* END OF REPORT \*\*