

TEST REPORT

Applicant Name: FCC: Fanvil Technology Co., LTD.
IC: Fanvil Technology Co., Ltd
Address: FCC: 10/F Block A, Dualshine Global Science Innovation Honglang
North 2nd Road, Bao'an District, Shenzhen, 518101, China
IC: 10/F Block A, Dualshine Global Science Innovation Center,
Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China
Report Number: 2401Y98834E-RF
FCC ID: 2APPZ-V62PRO
IC: 27176-V62PRO

Test Standard (s)

FCC PART 15.247;
RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247 ISSUE 3, AUGUST 2023

Sample Description


Product Type: IP Phone
Model No.: V62 Pro
Multiple Model(s) No.: J620 Pro, J640 Pro
Trade Mark: **Fanvil**
Date Received: 2024/10/17
Issue Date: 2024/12/14

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin
RF Engineer

Approved By:

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	12
TEST EQUIPMENT LIST	13
FCC 1.1307 (B) & §2.1091- MPE-BASED EXEMPTION	15
APPLICABLE STANDARD	15
RESULT	15
RSS-102 § 6.6 –FIELD REFERENCE LEVEL EXPOSURE EXEMPTION LIMITS	16
APPLICABLE STANDARD	16
RESULT	16
FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	18
FCC § 15.207 (A) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS	19
APPLICABLE STANDARD	19
EUT SETUP	20
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	20
FACTOR & OVER LIMIT CALCULATION.....	21
CORRECTED FACTOR & MARGIN CALCULATION	21
TEST DATA	21
FCC §15.209, §15.205 & §15.247(D), RSS-GEN § 8.10 & RSS-247 § 5.5 - UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS.....	32
APPLICABLE STANDARD	32
EUT SETUP	32
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	33
TEST PROCEDURE	34
FACTOR & OVER LIMIT/ MARGIN CALCULATION	34
TEST DATA	34

FCC §15.247(A) (2), RSS-GEN § 6.7 & RSS-247 § 5.2 (A) - 99% OCCUPIED BANDWIDTH & 6 DB EMISSION BANDWIDTH	84
STANDARD APPLICABLE	84
TEST PROCEDURE	85
TEST DATA	86
FCC §15.247(B) (3), RSS-247 §5.4 (D) - PEAK OUTPUT POWER MEASUREMENT	87
APPLICABLE STANDARD	87
TEST PROCEDURE	87
TEST DATA	88
FCC §15.247(E), RSS-247 §5.2 (B) – POWER SPECTRAL DENSITY	89
APPLICABLE STANDARD	89
TEST PROCEDURE	89
TEST DATA	90
FCC §15.247(D) & RSS-247 §5.5 - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	91
APPLICABLE STANDARD	91
TEST PROCEDURE	91
TEST DATA	92
DUTY CYCLE	93
DUTY CYCLE	93
TEST DATA	93
EUT PHOTOGRAPHS	94
TEST SETUP PHOTOGRAPHS	95
APPENDIX	96
APPENDIX A: DTS BANDWIDTH	96
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	100
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	104
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	107
APPENDIX E: BAND EDGE MEASUREMENTS	111
APPENDIX F: DUTY CYCLE	113

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y98834E-RF	Original Report	2024/12/14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	V62 Pro, J620 Pro, J640 Pro
FVIN	0.0.0.18
Product	IP Phone
Tested Model	V62 Pro
Multiple Model(s)	J620 Pro, J640 Pro
Frequency Range	BLE: 2402-2480MHz
Maximum Conducted Peak Output Power	BLE: -1.97dBm
Modulation Technique	BLE; GFSK
Antenna Specification [#]	5.2dBi (provided by the applicant)
Voltage Range	DC 5V from adapter or PoE 48V
Sample serial number	V62 Pro: 2SPR-7 for Conducted and Radiated Emissions Test 2SPR-5 for RF Conducted Test J640 Pro: 2SPR-11 for Conducted and Radiated Emissions Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: DCT12W050200US-A2 Input: 100-240V~50/60Hz 0.3A max Output: 5.0V, 2.0A Adapter 2 Model: F12L20-050200SPAU Input: 100-240V~50/60Hz 0.3A Output: 5.0V, 2.0A 10.0W

Note 1: The Multiple models are electrically identical with the test model except for model name, color, Screen size and key board. Please refer to the declaration letter[#] for more detail, which was provided by manufacturer.

Note 2: Based on the difference, V62 Pro was chosen for the full test, the AC line conducted emission and radiated emission below 1GHz for the model J640 Pro was added.

Objective

This report is in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209, 15.247 rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance ANSI C63.10-2013, RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	109.2kHz(k=2, 95% level of confidence)	
RF output power, conducted	0.86dB(k=2, 95% level of confidence)	
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
	Temperature	±1°C
Humidity		±1%
	Supply voltages	±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“BT-tool-v.1.1.2”[#] software was used to test and power level is 4. The software and power level was provided by the applicant.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SNOM	Handset	A310D	Unknown
Fanvil	Handset	Unknown	Unknown
Fanvil	Wireless Headset	BTH60	Unknown
DELL	PC	Latitude E7270	1JH13G2
TP-Link	PoE	TL-POE4824G	Unknown

External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded Detachable RJ45 Cable	2.0	EUT	PC/PoE
Unshielded detachable RJ45 cable	2.0	EUT	Internet
Unshielded Un-detachable headset Cable	1.2	EUT	Headset
Unshielded Un-detachable DC Cable	1.8	EUT	Adapter
Unshielded Detachable Handset Cable	1.8	EUT	Handset

Block Diagram of Test Setup**Power by the adapter**

For Conducted Emissions:

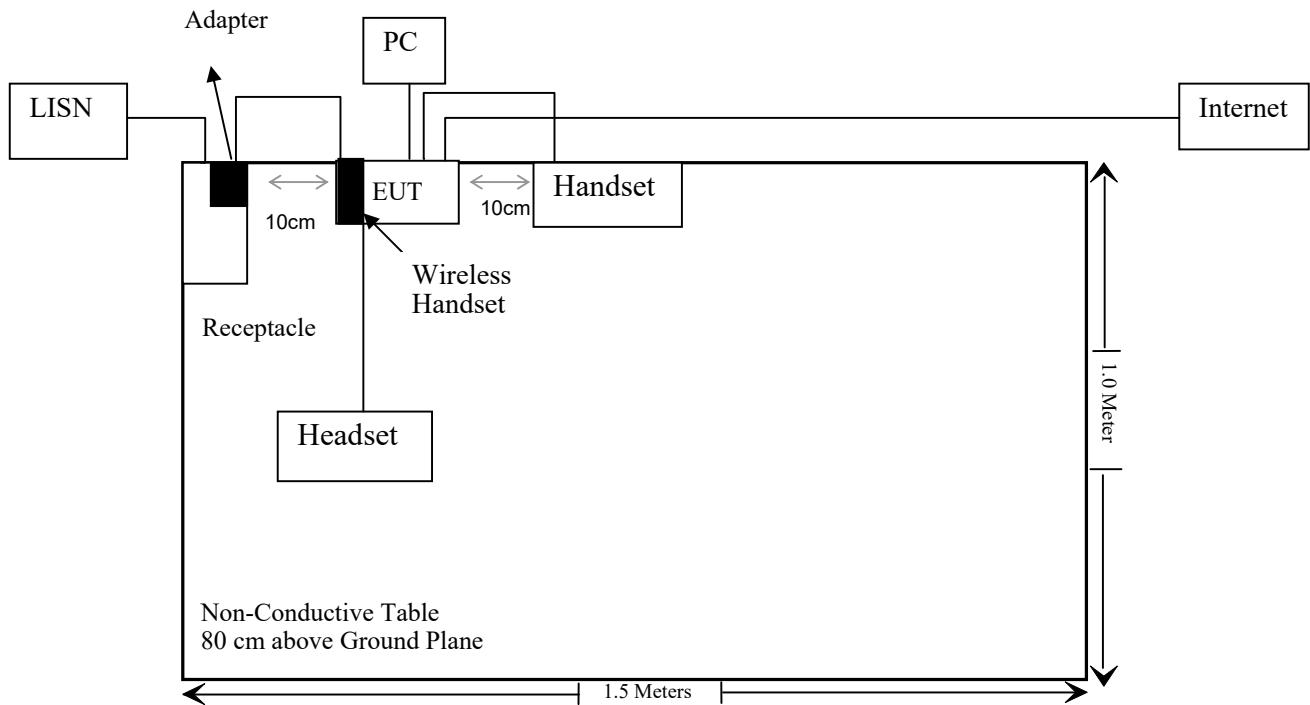


For Radiated Emissions below 1GHz:

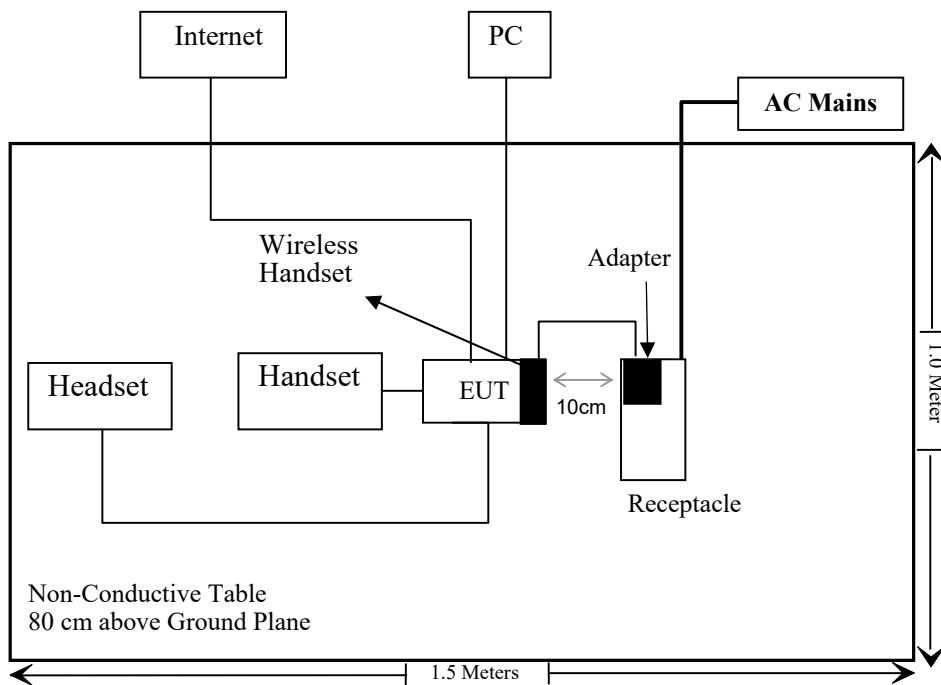


Power by PoE


For Conducted Emissions:

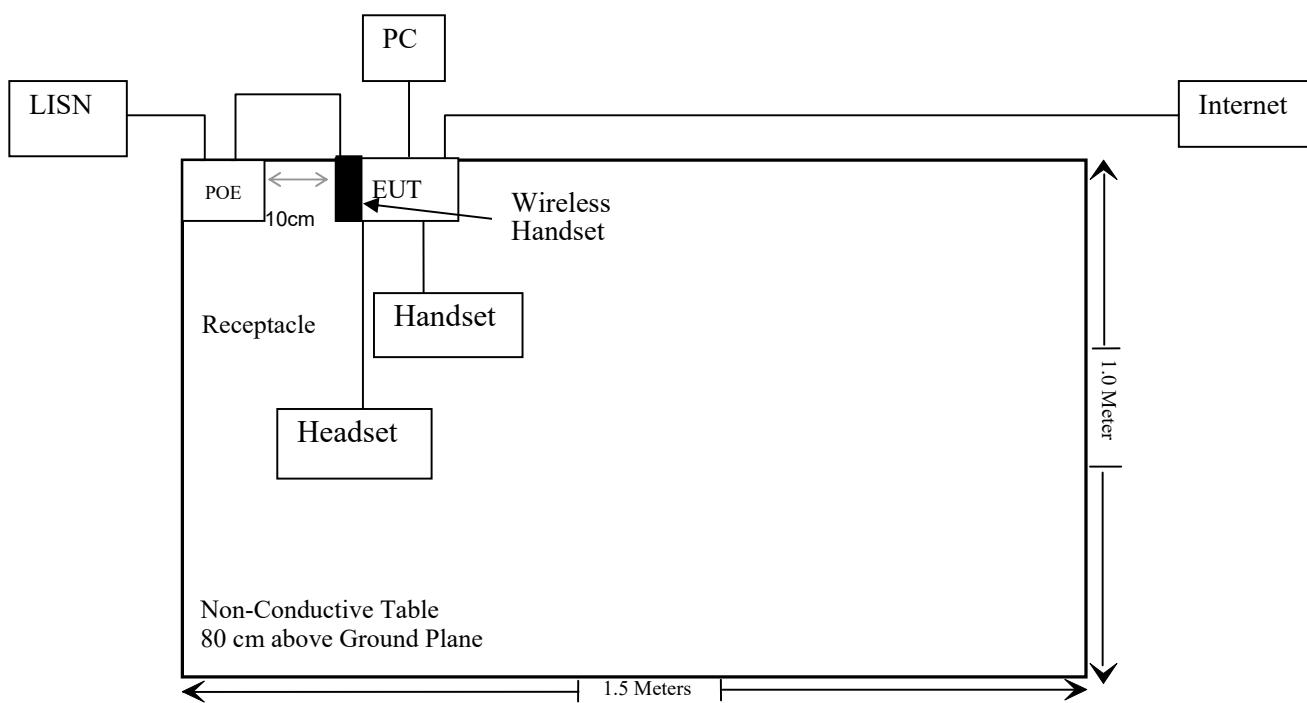

For Radiated Emissions below 1GHz:

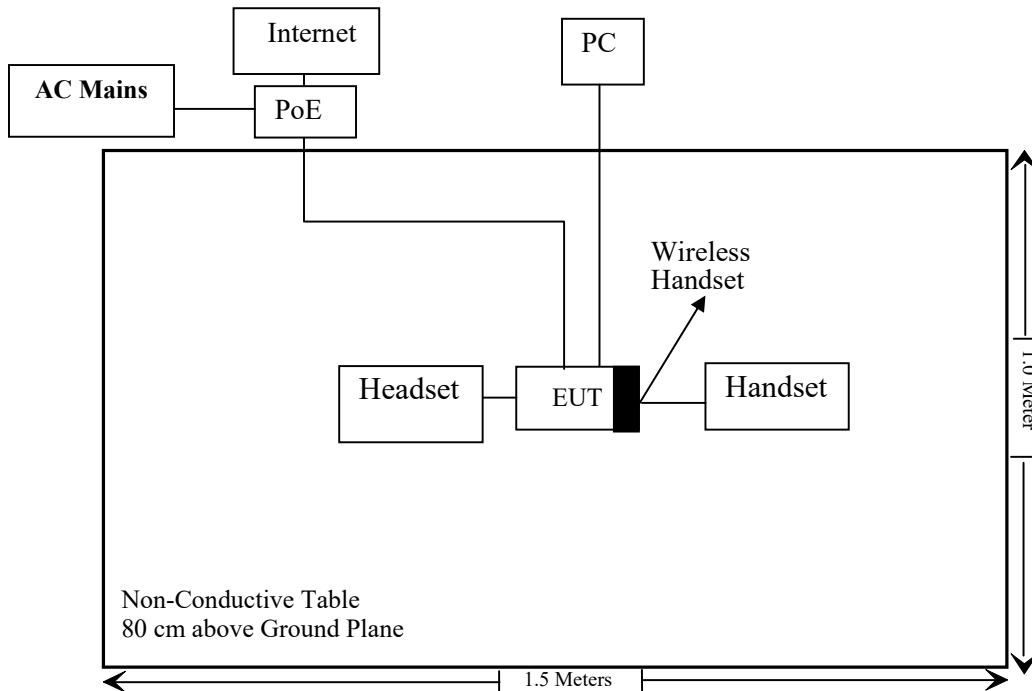

For Radiated Emissions above 1GHz:

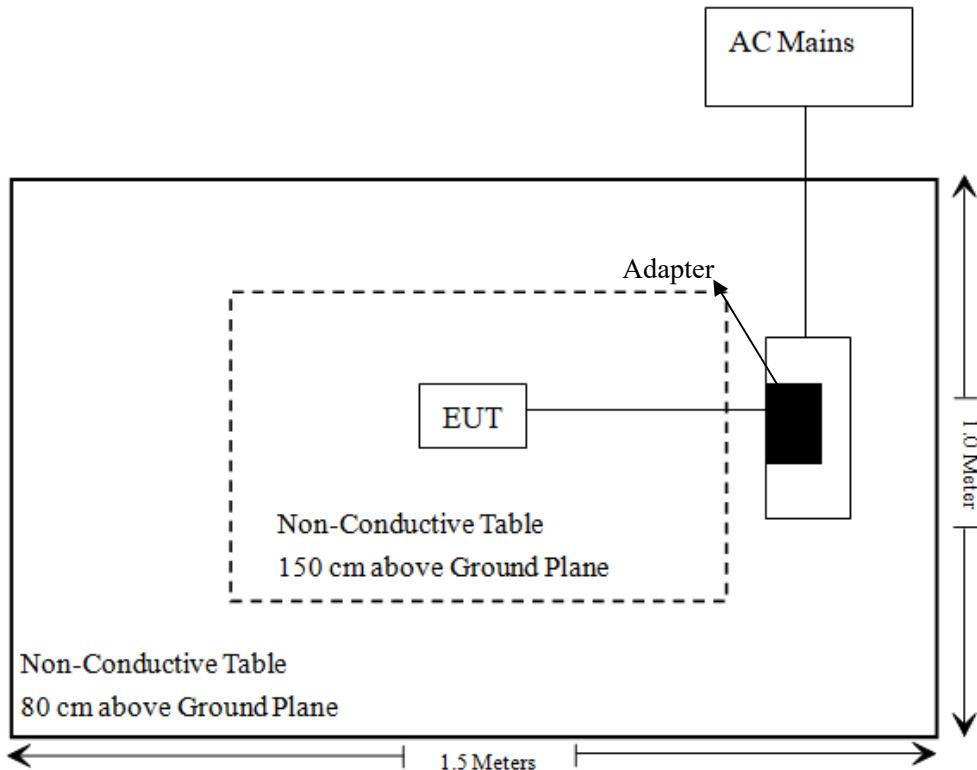

SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
§2.1091	/	MPE-Based Exemption	Compliant
/	RSS-102 § 6.6	Field Reference Level Exposure Exemption Limits	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	Compliant
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
/	/	Duty Cycle	/

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Rohde & Schwarz	EMC Measurement	EMC32	V8.53.0	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2024/08/06	2025/08/05
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	RF Cable	65475	01670515	2024/06/27	2025/06/26
MARCONI	10dB Attenuator	6534/3	2942	2024/06/27	2025/06/26

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC 1.1307 (B) & §2.1091- MPE-BASED EXEMPTION

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power (ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)		
2402-2480	-1.0	5.2	3.05	2.05	1.6	0.2	768

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant

RSS-102 § 6.6 –FIELD REFERENCE LEVEL EXPOSURE EXEMPTION LIMITS

Applicable Standard

According to RSS-102 Issue 6 § 6.6:

6.6 Field reference level exposure exemption limits

Field reference level (FRL) exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm (i.e. mobile devices), except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 1 W (adjusted for tune-up tolerance)
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $4.49/f^{0.5}W$ (adjusted for tune-up tolerance), where f is in MHz
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance)
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}W$ (adjusted for tune-up tolerance), where f is in MHz
- at or above 6 GHz and the source-based, time-averaged maximum EIRP of the device is equal to or less than 5 W (adjusted for tune-up tolerance)

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the EIRP was derived.

Result

For worst case:

Frequency (MHz)	Maximum tune-up conducted power [#] (dBm)	Antenna Gain [#] (dBi)	Maximum tune-up EIRP		Evaluation Distance (cm)	Limit (mW)
			(dBm)	(mW)		
2402-2480	-1.0	5.2	4.2	2.6	20	2676

Note: The tune up conducted power and antenna gain was declared by the applicant.

To maintain compliance with the IC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: The RF Exposure evaluation can be exempted.

FCC §15.203 & RSS-GEN §6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain[#] is 5.2dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain [#]	Impedance	Frequency Range
FPC	5.2dBi	50Ω	2.4~2.5GHz

Result: Compliant

FCC § 15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 - AC Power Lines Conducted Emission Limits


Frequency range (MHz)	Conducted limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

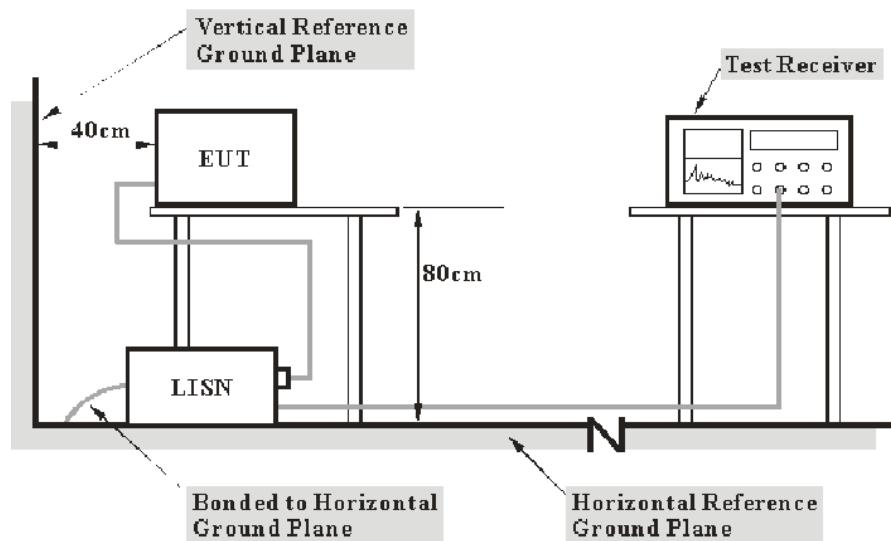

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Corrected Factor & Margin Calculation

The Corrected Factor (Corr.) is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor (Corr.)} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions

Temperature:	23.5~25.3 °C
Relative Humidity:	50~51 %
ATM Pressure:	101.1~101.6 kPa


The testing was performed by Macy Shi from 2024-12-10 to 2024-12-14.

EUT operation mode: Transmitting (Maximum output mode, BLE_1M Low Channel)

For Model: V62 Pro
For Adapter 1

AC 120V/60 Hz, Line

Project No.:	2401Y98834E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SPR-7	Tested By:	<i>Macy -shc</i>
Test Mode:	Maximum output mode, BLE_1M Low Channel	Date:	2024.12.10

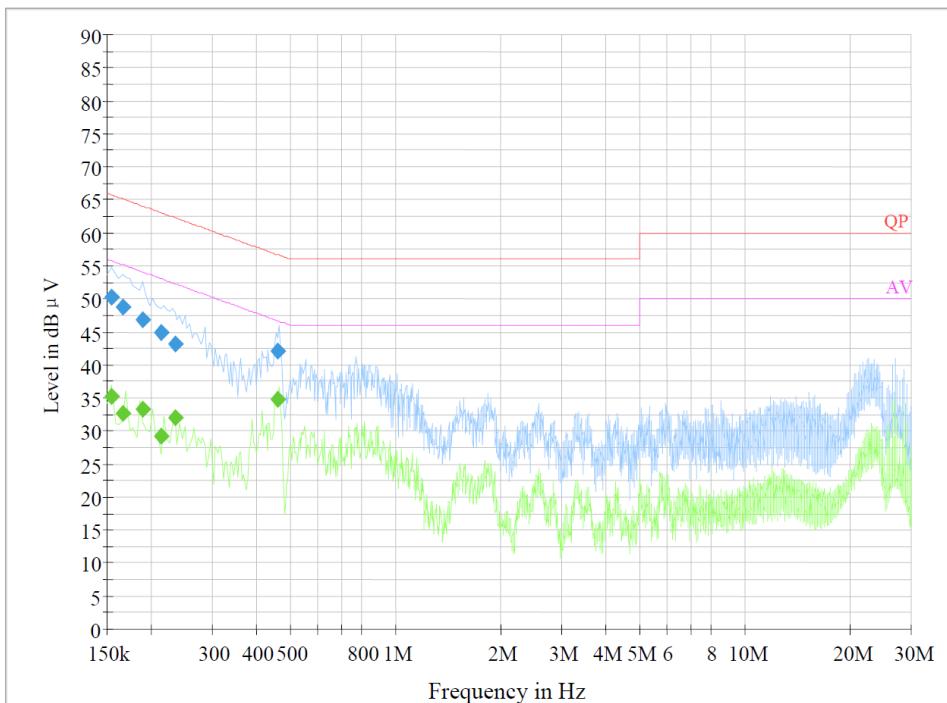

Final Result 1


Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.154000	50.2	9.000	L1	20.3	15.6	65.8
0.165500	48.7	9.000	L1	20.4	16.5	65.2
0.189500	46.8	9.000	L1	20.3	17.3	64.1
0.213500	44.8	9.000	L1	20.3	18.3	63.1
0.234500	43.1	9.000	L1	20.3	19.2	62.3
0.463010	42.2	9.000	L1	20.4	14.4	56.6

Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.154000	35.2	9.000	L1	20.3	20.6	55.8
0.165500	32.7	9.000	L1	20.4	22.5	55.2
0.189500	33.2	9.000	L1	20.3	20.9	54.1
0.213500	29.2	9.000	L1	20.3	23.9	53.1
0.234500	32.0	9.000	L1	20.3	20.3	52.3
0.463010	34.8	9.000	L1	20.4	11.9	46.6

AC 120V/60 Hz, Neutral

Project No.:	2401Y98834E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SPR-7	Tested By:	<i>Macy -shc</i>
Test Mode:	<i>Maximum output mode, BLE_1M Low Channel</i>	Date:	2024.12.10

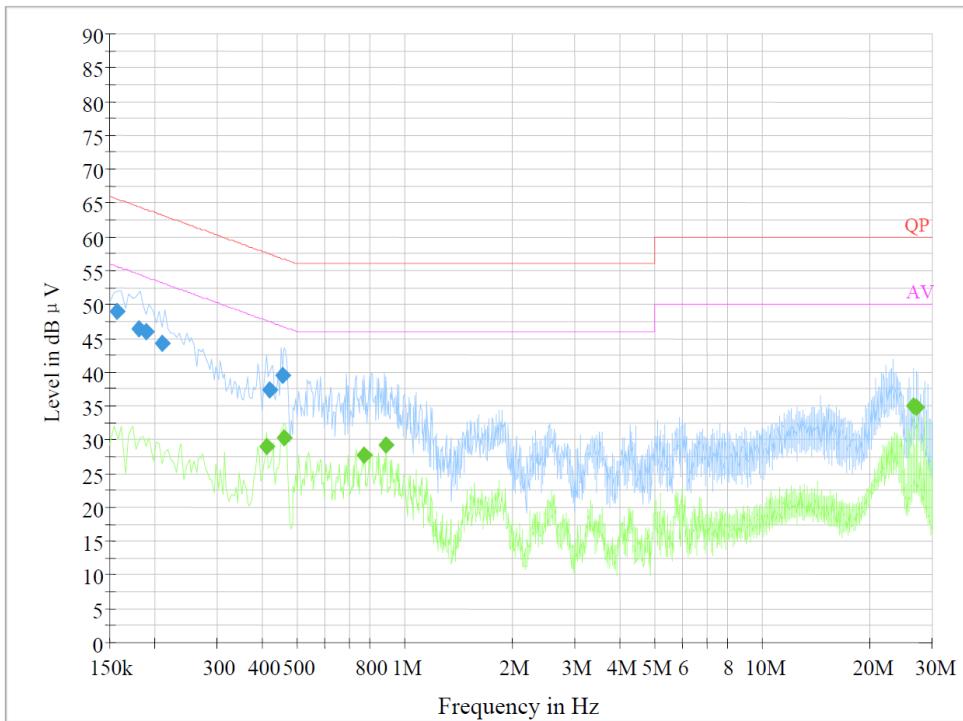**Final Result 1**


Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.157500	49.1	9.000	N	20.4	16.5	65.6
0.181500	46.4	9.000	N	20.4	18.0	64.4
0.189500	46.1	9.000	N	20.4	18.0	64.1
0.209500	44.2	9.000	N	20.4	19.0	63.2
0.419790	37.3	9.000	N	20.4	20.2	57.5
0.459070	39.5	9.000	N	20.4	17.2	56.7

Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.414000	29.0	9.000	N	20.4	18.6	47.6
0.462000	30.3	9.000	N	20.4	16.4	46.7
0.774000	27.8	9.000	N	20.4	18.2	46.0
0.890000	29.3	9.000	N	20.3	16.7	46.0
26.610000	35.1	9.000	N	19.7	14.9	50.0
27.158000	34.7	9.000	N	19.7	15.3	50.0

For Adapter 2
AC 120V/60 Hz, Line

Project No.:	2401Y98834E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SPR-7	Tested By:	<i>Macy -sh</i>
Test Mode:	<i>Maximum output mode, BLE_1M Low Channel</i>	Date:	2024.12.10

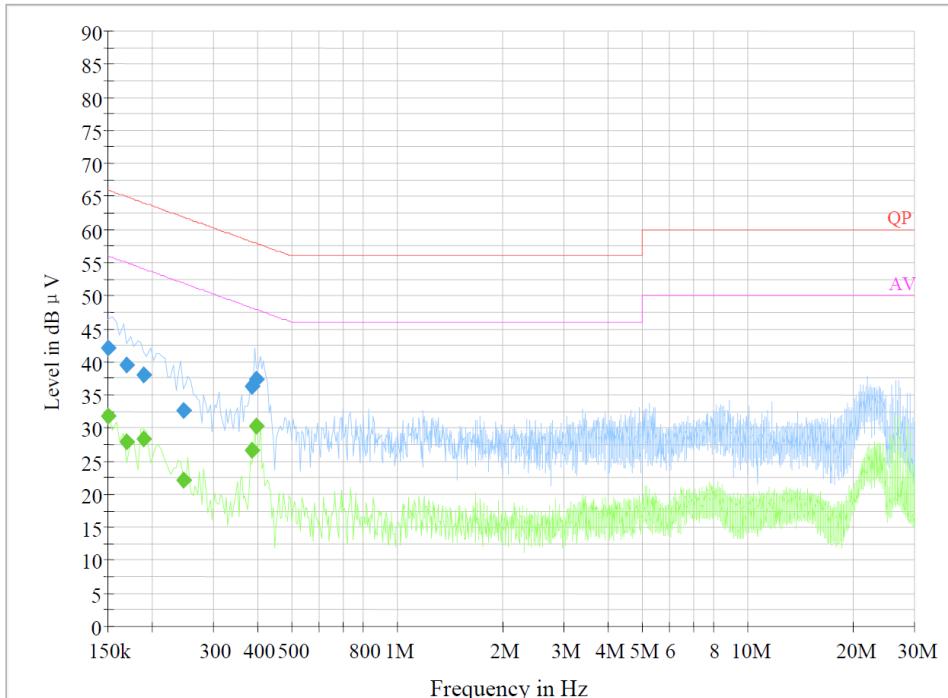

Final Result 1


Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.150000	42.0	0.200	L1	20.3	24.0	66.0
0.169500	39.4	9.000	L1	20.4	25.6	65.0
0.189500	37.9	9.000	L1	20.3	26.2	64.1
0.245500	32.7	9.000	L1	20.3	29.2	61.9
0.387730	36.3	9.000	L1	20.4	21.8	58.1
0.396090	37.3	9.000	L1	20.4	20.6	57.9

Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.150000	31.7	9.000	L1	20.3	24.3	56.0
0.169500	28.0	9.000	L1	20.4	27.0	55.0
0.189500	28.4	9.000	L1	20.3	25.6	54.1
0.245500	22.1	9.000	L1	20.3	29.8	51.9
0.387730	26.6	9.000	L1	20.4	21.5	48.1
0.396090	30.3	9.000	L1	20.4	17.6	47.9

AC 120V/60 Hz, Neutral

Project No.:	2401Y98834E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SPR-7	Tested By:	<i>Macy -shc</i>
Test Mode:	Maximum output mode, BLE_1M Low Channel	Date:	2024.12.10

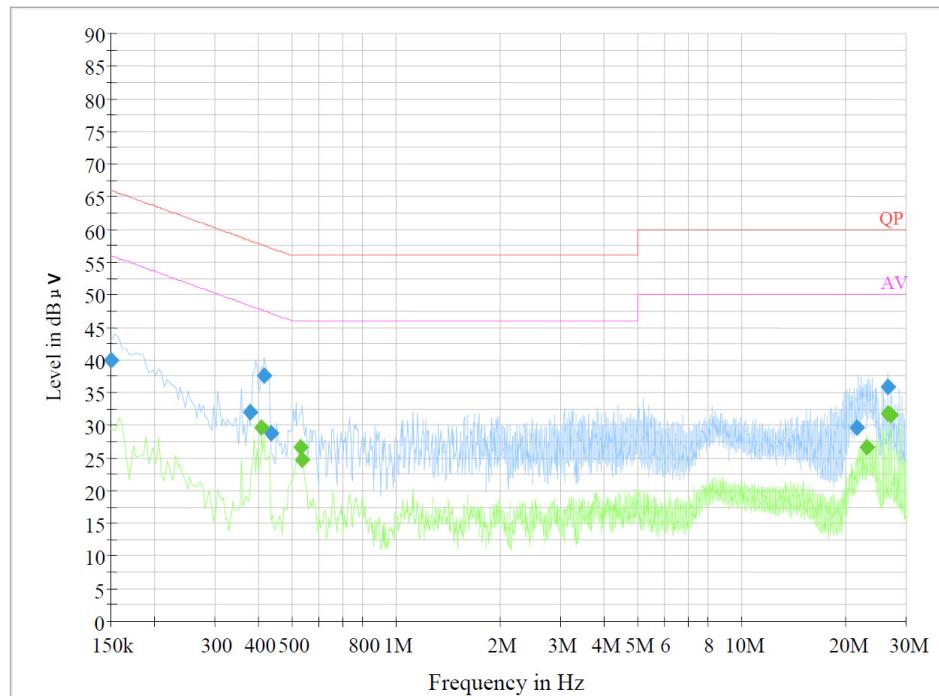
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.150000	40.0	0.200	N	20.3	26.0	66.0
0.380210	32.0	9.000	N	20.4	26.3	58.3
0.415730	37.7	9.000	N	20.4	19.8	57.5
0.435490	28.7	9.000	N	20.4	28.4	57.1
21.629590	29.6	9.000	N	19.9	30.4	60.0
26.608710	35.8	9.000	N	19.7	24.2	60.0

Final Result 2

Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.410000	29.6	9.000	N	20.4	18.0	47.6
0.530000	26.7	9.000	N	20.4	19.3	46.0
0.538000	24.8	9.000	N	20.4	21.2	46.0
23.130000	26.6	9.000	N	19.9	23.4	50.0
26.486000	31.9	9.000	N	19.7	18.1	50.0
27.158000	31.7	9.000	N	19.7	18.3	50.0


For PoE
AC 120V/60 Hz, Line

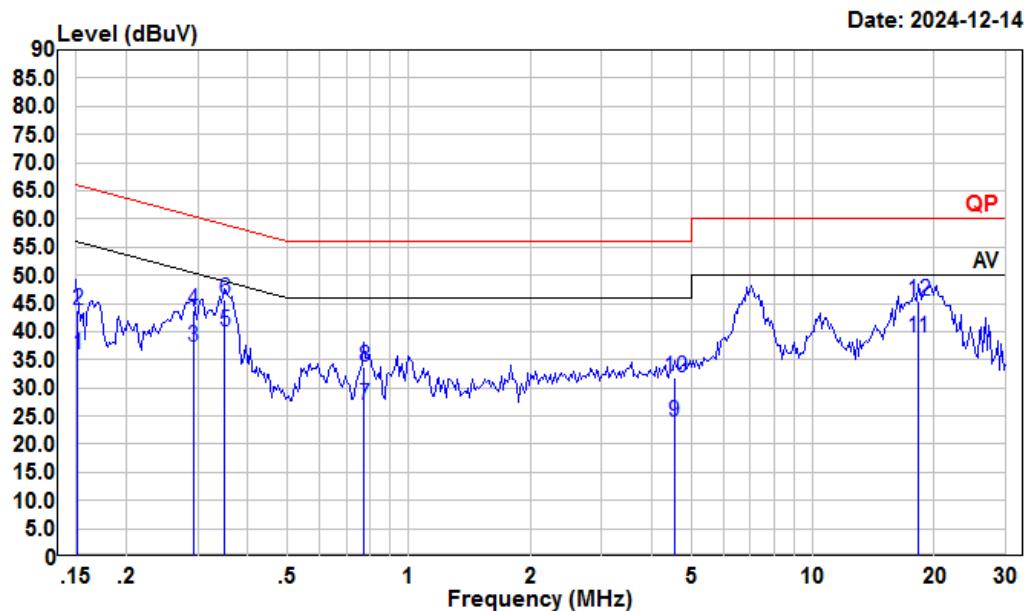

Condition: Line
Project : 2401Y98834E-RF
tester : Macy.shi
Note : Transmitting
Detector : RBW:9KHz VBW:Auto SWT:Auto

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Level	Factor	Loss	
1	0.152	14.79	35.82	10.90	10.13	55.91 -20.09 Average
2	0.152	22.70	43.73	10.90	10.13	65.91 -22.18 QP
3	0.292	16.60	37.39	10.68	10.11	50.46 -13.07 Average
4	0.292	22.89	43.68	10.68	10.11	60.46 -16.78 QP
5	0.350	19.27	40.01	10.62	10.12	48.96 -8.95 Average
6	0.350	25.06	45.80	10.62	10.12	58.96 -13.16 QP
7	0.775	6.39	26.99	10.47	10.13	46.00 -19.01 Average
8	0.775	13.14	33.74	10.47	10.13	56.00 -22.26 QP
9	4.549	3.47	24.01	10.35	10.19	46.00 -21.99 Average
10	4.549	11.36	31.90	10.35	10.19	56.00 -24.10 QP
11	18.232	18.00	38.99	10.80	10.19	50.00 -11.01 Average
12	18.232	24.42	45.41	10.80	10.19	60.00 -14.59 QP

AC 120V/60 Hz, Neutral

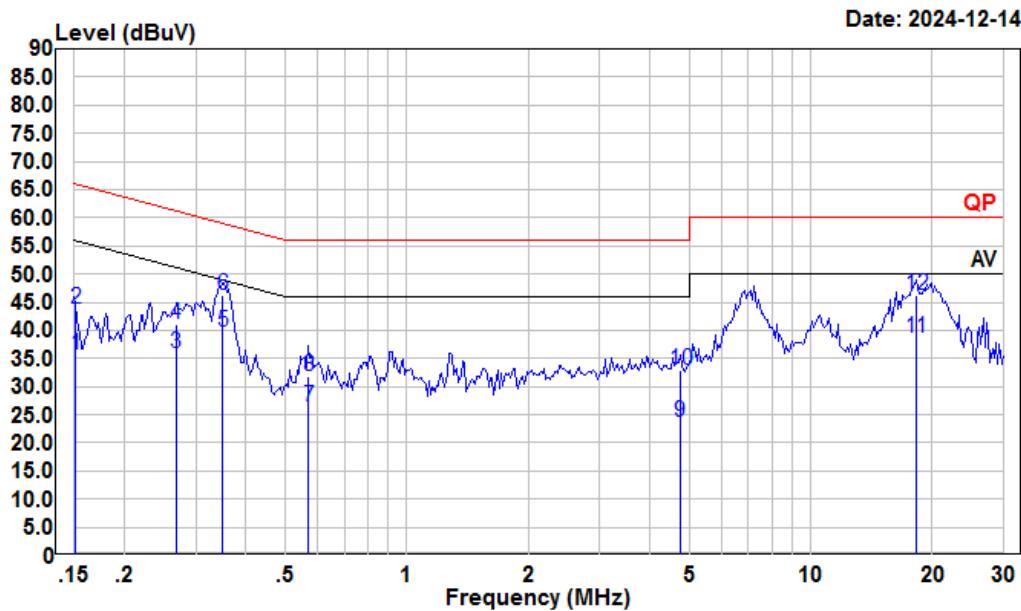

Condition: Neutral

Project : 2401Y98834E-RF

tester : Macy.shi


Note : Transmitting

Detector : RBW:9KHz VBW:Auto SWT:Auto

	Freq	Read Level	LISN Level	Cable Factor	Limit Loss	Line	Over Limit	Remark
	MHz	dBuV	dBuV		dB	dBuV		
1	0.152	14.83	35.55	10.59	10.13	55.91	-20.36	Average
2	0.152	23.14	43.86	10.59	10.13	65.91	-22.05	QP
3	0.269	15.22	35.81	10.50	10.09	51.16	-15.35	Average
4	0.269	20.57	41.16	10.50	10.09	61.16	-20.00	QP
5	0.350	19.05	39.75	10.58	10.12	48.96	-9.21	Average
6	0.350	25.62	46.32	10.58	10.12	58.96	-12.64	QP
7	0.570	5.66	26.49	10.70	10.13	46.00	-19.51	Average
8	0.570	10.86	31.69	10.70	10.13	56.00	-24.31	QP
9	4.746	2.98	23.66	10.49	10.19	46.00	-22.34	Average
10	4.746	12.17	32.85	10.49	10.19	56.00	-23.15	QP
11	18.232	17.62	38.54	10.73	10.19	50.00	-11.46	Average
12	18.232	25.38	46.30	10.73	10.19	60.00	-13.70	QP

For Model: J640 Pro (Worse case: adapter 1)
AC 120V/60 Hz, Line

Project No.:	2401Y98834E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SPR-7	Tested By:	<i>Macy -shc</i>
Test Mode:	Maximum output mode, BLE_1M Low Channel	Date:	2024.12.10

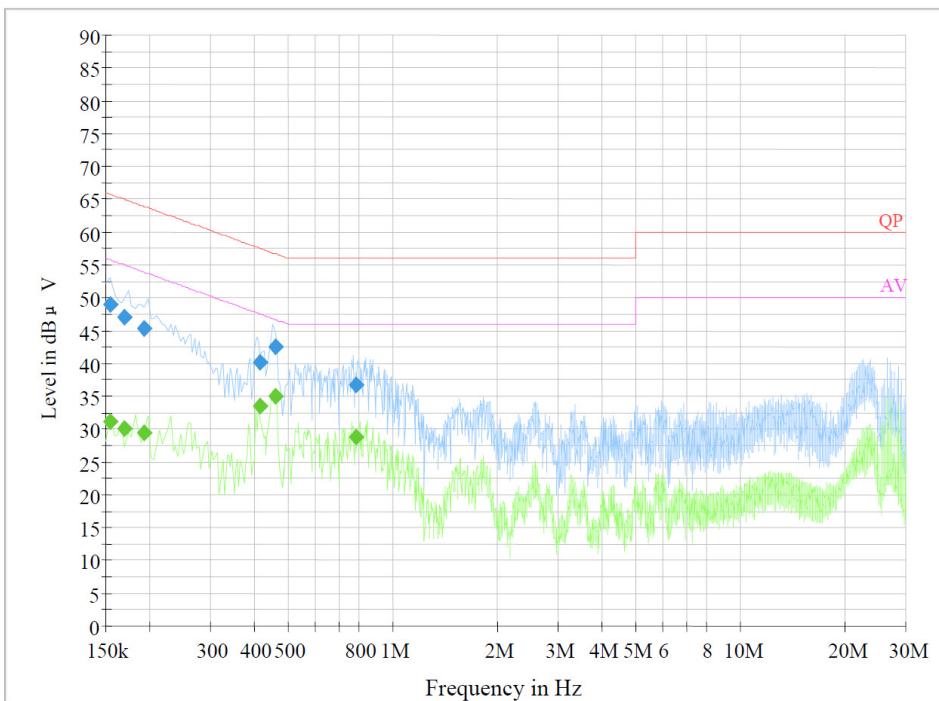

Final Result 1


Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154000	49.0	9.000	L1	20.3	16.8	65.8
0.169500	47.1	9.000	L1	20.4	17.8	65.0
0.193500	45.4	9.000	L1	20.3	18.5	63.9
0.415850	40.1	9.000	L1	20.4	17.4	57.5
0.460810	42.5	9.000	L1	20.4	14.2	56.7
0.785610	36.6	9.000	L1	20.5	19.4	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154000	31.1	9.000	L1	20.3	24.7	55.8
0.169500	30.0	9.000	L1	20.4	25.0	55.0
0.193500	29.5	9.000	L1	20.3	24.4	53.9
0.415850	33.6	9.000	L1	20.4	13.9	47.5
0.460810	35.1	9.000	L1	20.4	11.6	46.7
0.785610	28.7	9.000	L1	20.5	17.3	46.0

AC 120V/60 Hz, Neutral

Project No.:	2401Y98834E-RF	Environmental Conditions:	23.5°C 51%RH 101.1kPa
EUT Number:	2SPR-7	Tested By:	<i>Macy - Sh</i>
Test Mode:	<i>Maximum output mode, BLE_1M Low Channel</i>	Date:	2024.12.10

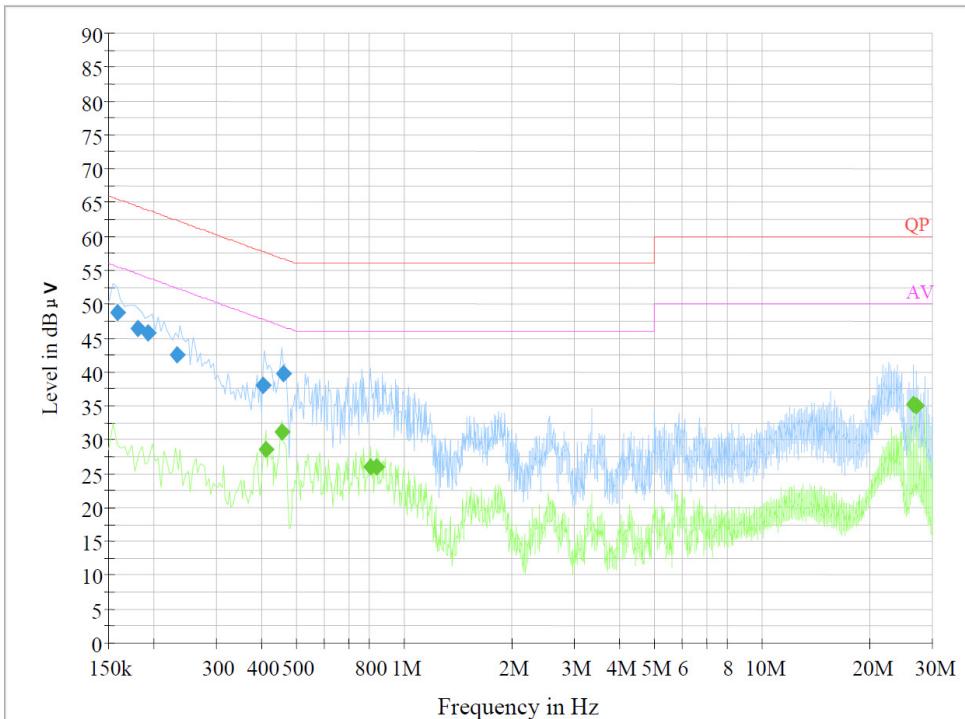


Final Result 1

Frequency (MHz)	QuasiPeak (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.158000	48.8	9.000	N	20.4	16.7	65.6
0.181500	46.4	9.000	N	20.4	18.0	64.4
0.193500	45.7	9.000	N	20.4	18.2	63.9
0.233500	42.5	9.000	N	20.4	19.8	62.3
0.403850	38.0	9.000	N	20.4	19.8	57.8
0.459130	39.7	9.000	N	20.4	17.0	56.7

Final Result 2


Frequency (MHz)	Average (dB μV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.414000	28.5	9.000	N	20.4	19.0	47.6
0.458000	31.0	9.000	N	20.4	15.7	46.7
0.810000	25.9	9.000	N	20.4	20.1	46.0
0.842000	26.1	9.000	N	20.4	19.9	46.0
26.610000	35.2	9.000	N	19.7	14.8	50.0
27.158000	34.9	9.000	N	19.7	15.1	50.0

For PoE
AC 120V/60 Hz, Line

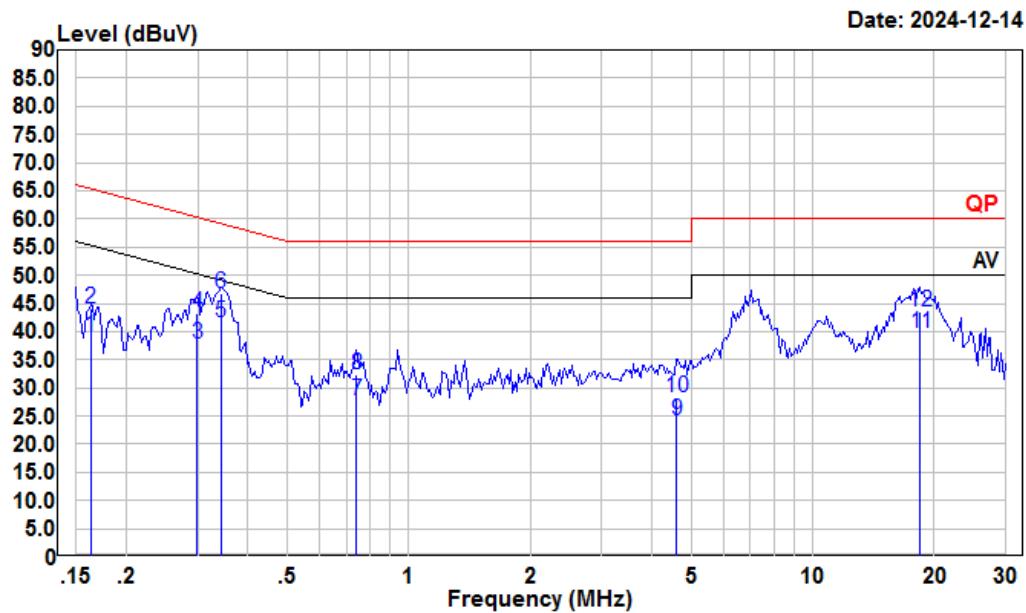

Condition: Line
Project : 2401Y98834E-RF
tester : Macy.shi
Note : Transmitting
Detector : RBW:9KHz VBW:Auto SWT:Auto

Freq	Read	LISN		Cable	Limit	Over	Remark
	Freq	Level	Level	Factor	Loss	Line	
1	0.163	18.18	39.16	10.87	10.11	55.30	-16.14 Average
2	0.163	23.16	44.14	10.87	10.11	65.30	-21.16 QP
3	0.299	16.97	37.75	10.67	10.11	50.28	-12.53 Average
4	0.299	22.52	43.30	10.67	10.11	60.28	-16.98 QP
5	0.343	20.88	41.62	10.62	10.12	49.13	-7.51 Average
6	0.343	25.98	46.72	10.62	10.12	59.13	-12.41 QP
7	0.743	7.06	27.68	10.48	10.14	46.00	-18.32 Average
8	0.743	11.88	32.50	10.48	10.14	56.00	-23.50 QP
9	4.598	3.62	24.16	10.35	10.19	46.00	-21.84 Average
10	4.598	7.69	28.23	10.35	10.19	56.00	-27.77 QP
11	18.426	18.77	39.77	10.81	10.19	50.00	-10.23 Average
12	18.426	22.47	43.47	10.81	10.19	60.00	-16.53 QP

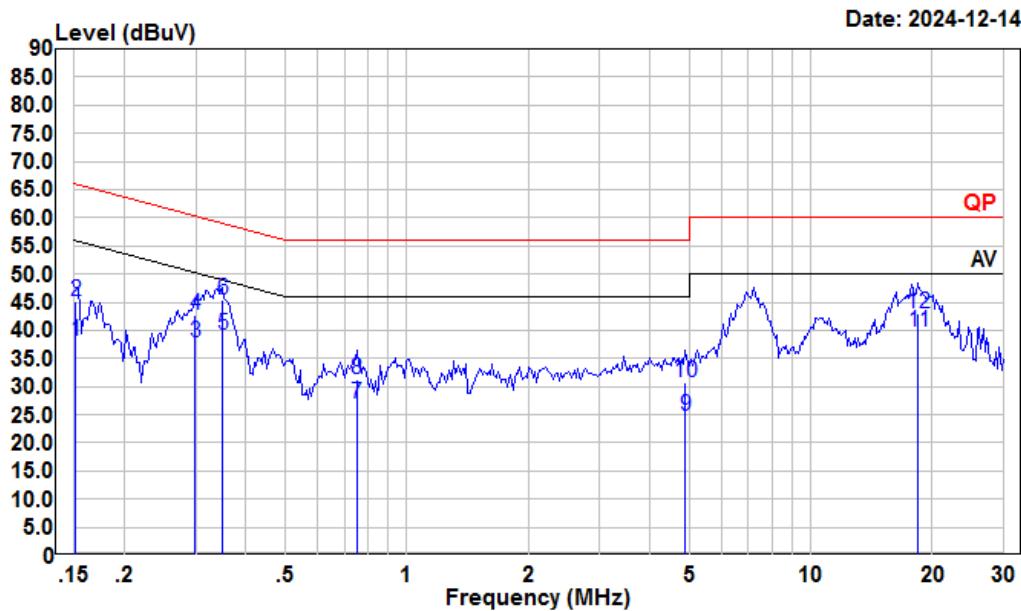AC 120V/60 Hz, Neutral

Condition: Neutral

Project : 2401Y98834E-RF

tester : Macy.shi

Note : Transmitting

Detector : RBW:9KHz VBW:Auto SWT:Auto


	Freq	Read Level	LISN Level	Cable Factor	Limit Loss	Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.152	17.47	38.19	10.59	10.13	55.91	-17.72	Average
2	0.152	24.29	45.01	10.59	10.13	65.91	-20.90	QP
3	0.299	17.12	37.76	10.53	10.11	50.28	-12.52	Average
4	0.299	21.93	42.57	10.53	10.11	60.28	-17.71	QP
5	0.350	18.57	39.27	10.58	10.12	48.96	-9.69	Average
6	0.350	24.73	45.43	10.58	10.12	58.96	-13.53	QP
7	0.751	6.19	27.06	10.74	10.13	46.00	-18.94	Average
8	0.751	10.28	31.15	10.74	10.13	56.00	-24.85	QP
9	4.900	4.02	24.71	10.51	10.18	46.00	-21.29	Average
10	4.900	9.93	30.62	10.51	10.18	56.00	-25.38	QP
11	18.426	18.88	39.80	10.73	10.19	50.00	-10.20	Average
12	18.426	22.18	43.10	10.73	10.19	60.00	-16.90	QP

FCC §15.209, §15.205 & §15.247(D), RSS-GEN § 8.10 & RSS-247 § 5.5 - UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205; RSS-247 §5.5, RSS-GEN §8.10.


EUT Setup

9 kHz-30MHz:

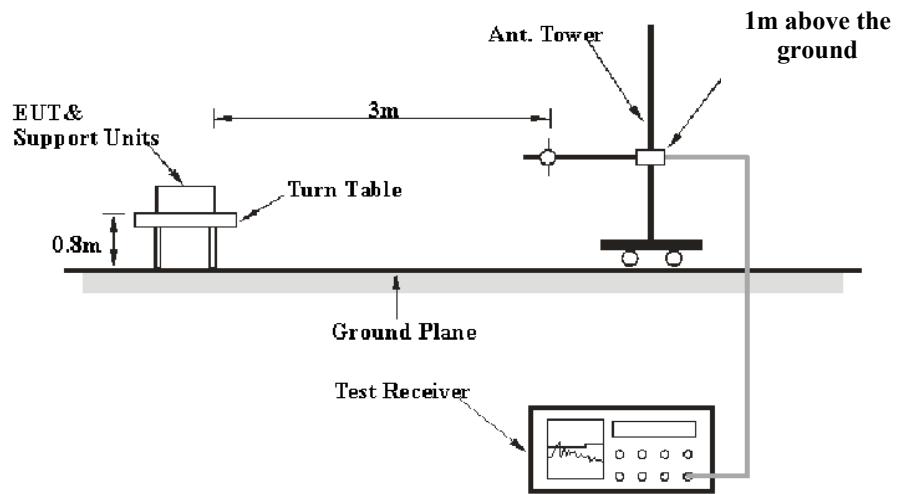

30MHz-1GHz:

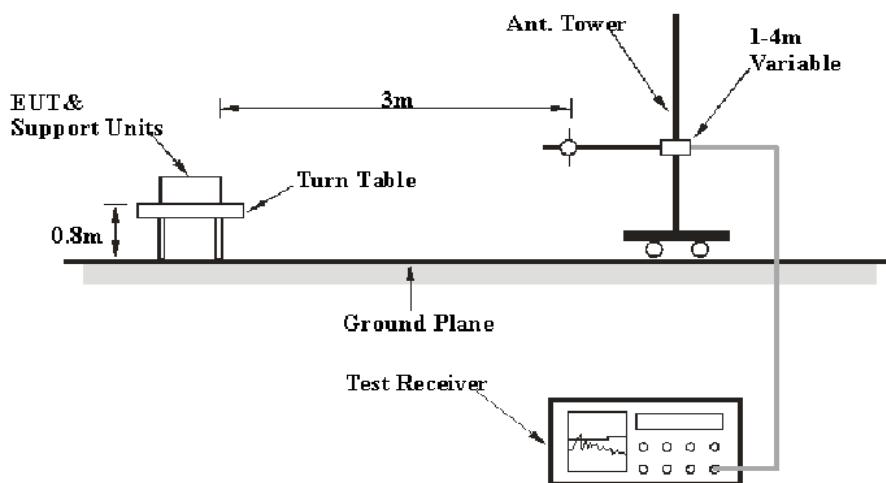

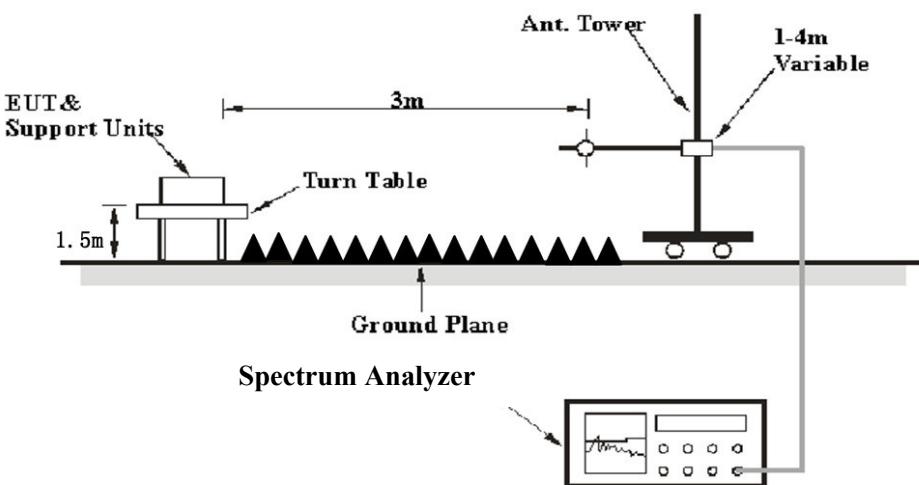Above 1GHz:

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247, RSS-Gen and RSS-247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25 GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T_{on}$

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/ Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22~24.2 °C
Relative Humidity:	51.2~54 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-11-13 and 2024-12-14 for below 1GHz and Dylan Yang on 2024-11-17 for above 1GHz.


EUT operation mode: Transmitting

The spurious emission from 9 kHz-30MHz of RSS-GEN standard, the unit of final result on the test plots are dB μ V/m, so the limit should be added by 51.5 dB from dB μ A/m to dB μ V/m.

For Model: V62 Pro
For Adapter 1


9 kHz-30MHz: (Maximum output power mode BLE IM, Low Channel)

Parallel (worst case)

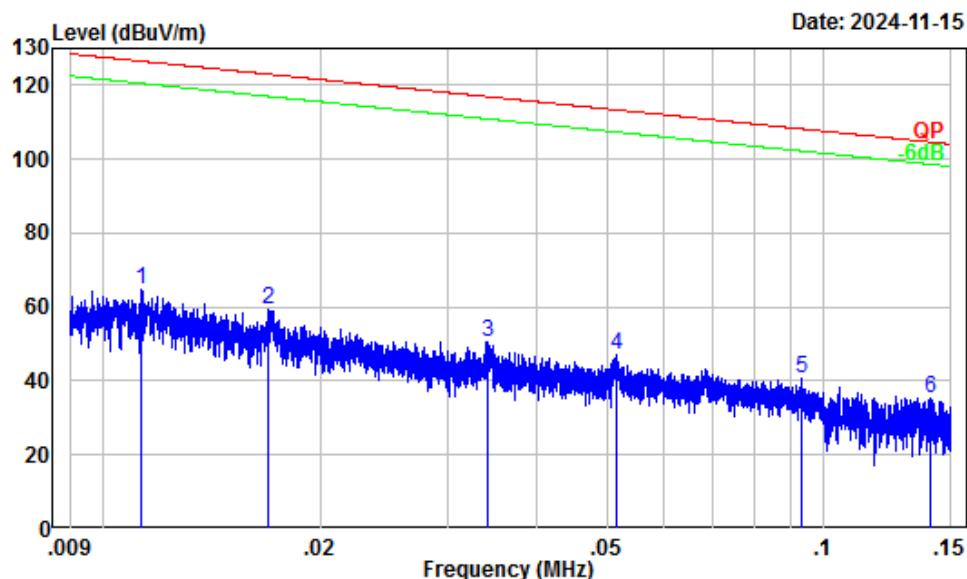


Site : Chamber A
Condition : 3m
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dB _{uV}	dB _{uV/m}		
1	0.01	37.01	27.83	64.84	126.52	-61.68	Peak
2	0.02	34.12	25.10	59.22	123.00	-63.78	Peak
3	0.03	26.54	24.12	50.66	116.91	-66.25	Peak
4	0.05	22.88	24.19	47.07	113.38	-66.31	Peak
5	0.09	17.74	22.84	40.58	108.23	-67.65	Peak
6	0.14	15.17	20.11	35.28	104.67	-69.39	Peak

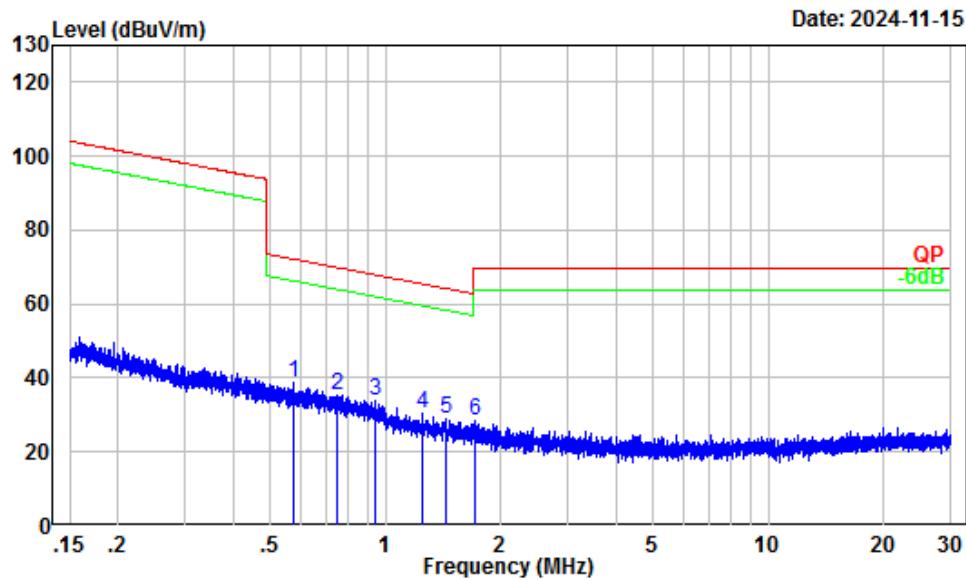

Site : Chamber A
Condition : 3m
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.58	2.58	36.34	38.92	-33.45 Peak
2	0.75	0.54	34.85	35.39	-34.68 Peak
3	0.94	-1.14	35.06	33.92	-34.11 Peak
4	1.25	-2.46	33.06	30.60	-34.90 Peak
5	1.44	-3.10	31.80	28.70	-35.57 Peak
6	1.71	-4.05	32.55	28.50	-41.04 Peak

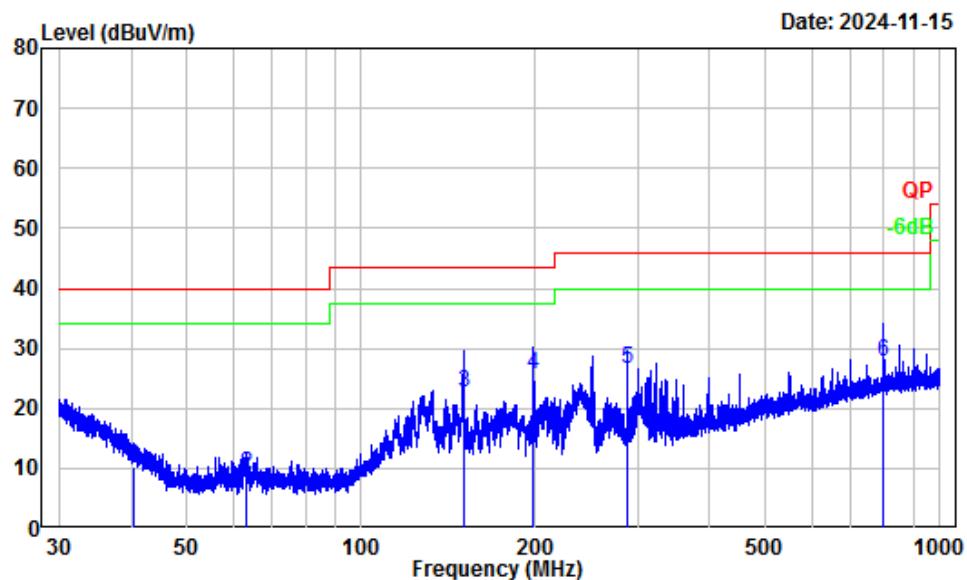30MHz-1GHz: (Maximum output power mode BLE 1M, Low Channel)**Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB
1	40.35	-12.61	22.72	10.11	40.00	-29.89	QP
2	63.40	-18.07	27.24	9.17	40.00	-30.83	QP
3	150.01	-12.46	35.00	22.54	43.50	-20.96	QP
4	197.98	-13.28	38.90	25.62	43.50	-17.88	QP
5	287.99	-11.22	37.71	26.49	46.00	-19.51	QP
6	800.03	-2.14	30.00	27.86	46.00	-18.14	QP

Vertical

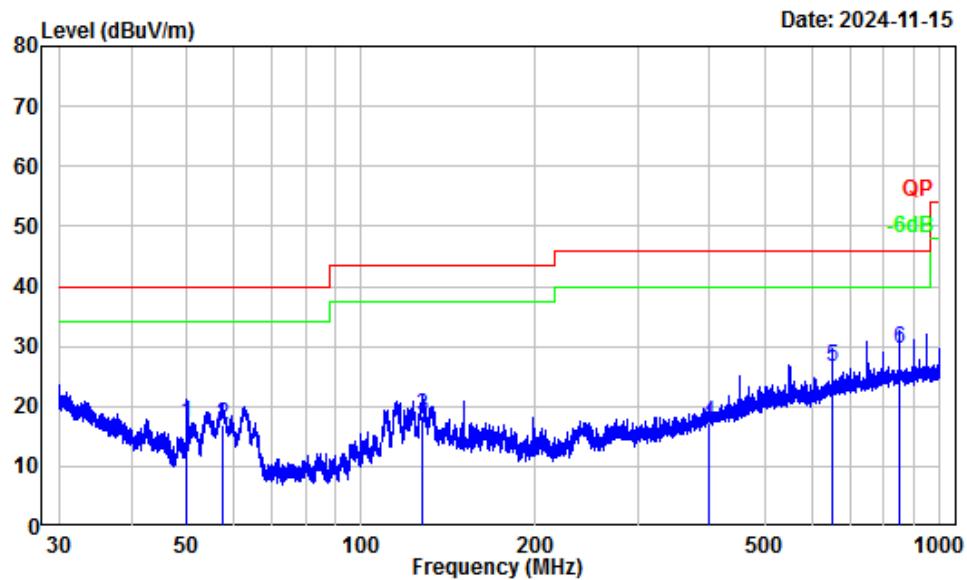


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.99	-17.92	35.06	17.14	40.00	-22.86	QP
2	57.70	-18.25	35.02	16.77	40.00	-23.23	QP
3	127.44	-11.12	29.66	18.54	43.50	-24.96	QP
4	400.08	-8.41	25.55	17.14	46.00	-28.86	QP
5	650.23	-4.13	30.80	26.67	46.00	-19.33	QP
6	850.29	-1.72	31.27	29.55	46.00	-16.45	QP

For Adapter 2


9 kHz-30MHz: (Maximum output power mode BLE 1M, Low Channel)

Parallel (Worst case)

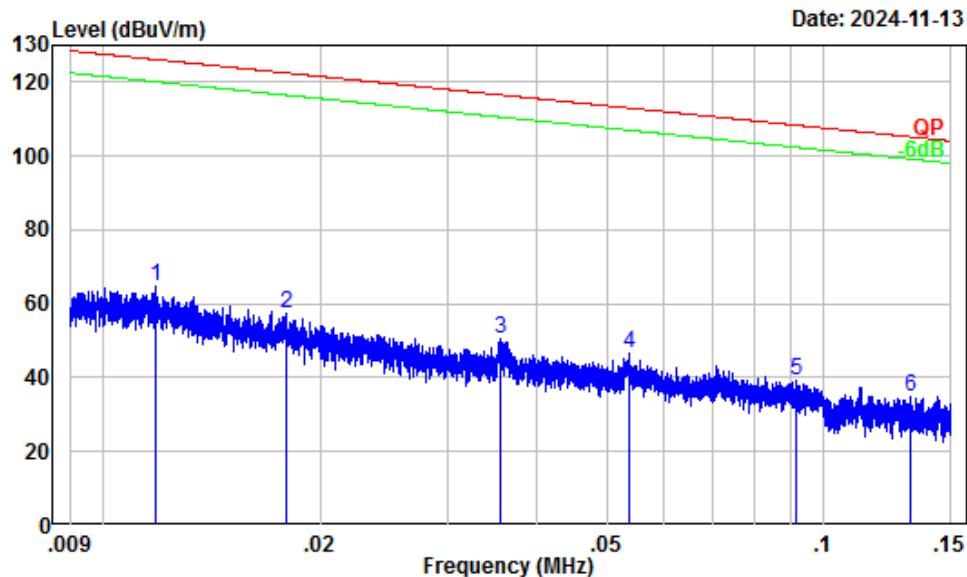


Site : Chamber A
Condition : 3m
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	36.75	27.92	64.67	126.14	-61.47	Peak
2	0.02	33.63	23.88	57.51	122.52	-65.01	Peak
3	0.04	26.24	24.32	50.56	116.57	-66.01	Peak
4	0.05	22.57	23.89	46.46	113.01	-66.55	Peak
5	0.09	17.91	21.23	39.14	108.39	-69.25	Peak
6	0.13	15.57	19.41	34.98	105.21	-70.23	Peak

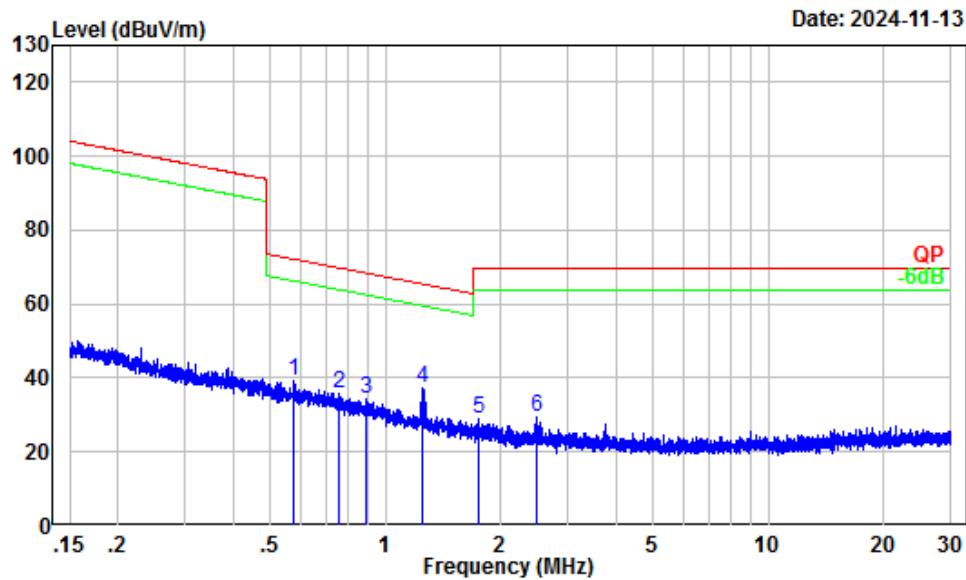

Site : Chamber A
Condition : 3m
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su


Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.58	2.55	36.90	39.45	72.33 -32.88 Peak
2	0.76	0.38	35.45	35.83	69.92 -34.09 Peak
3	0.89	-0.76	34.93	34.17	68.53 -34.36 Peak
4	1.26	-2.48	39.83	37.35	65.45 -28.10 Peak
5	1.75	-4.21	33.08	28.87	69.54 -40.67 Peak
6	2.50	-5.48	34.89	29.41	69.54 -40.13 Peak

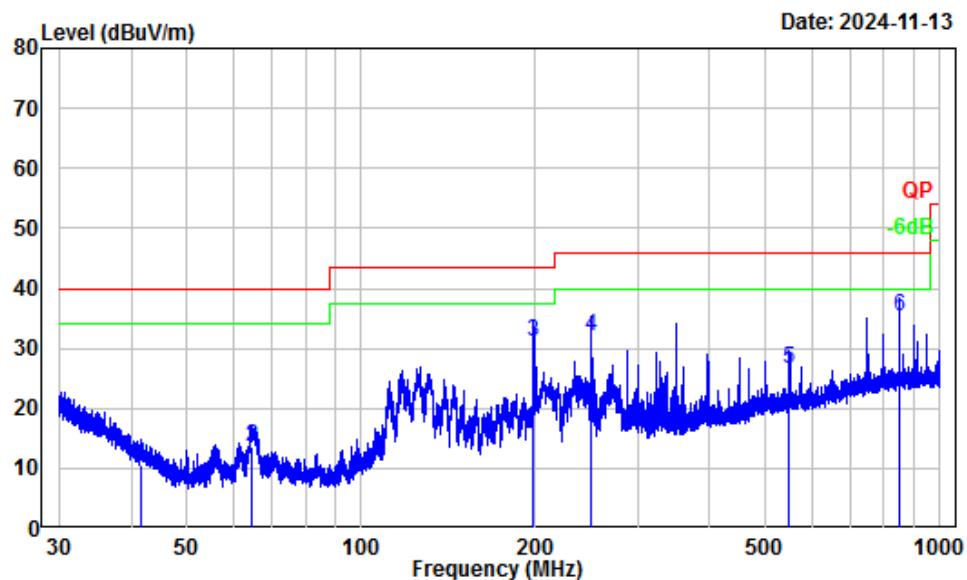30MHz-1GHz: (Maximum output power mode BLE 1M, Low Channel)**Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB
1	41.57	-13.52	24.17	10.65	40.00	-29.35	QP
2	64.57	-18.00	31.47	13.47	40.00	-26.53	QP
3	197.98	-13.28	44.49	31.21	43.50	-12.29	QP
4	249.97	-13.09	45.22	32.13	46.00	-13.87	QP
5	549.98	-5.43	32.08	26.65	46.00	-19.35	QP
6	850.29	-1.72	36.92	35.20	46.00	-10.80	QP

Vertical

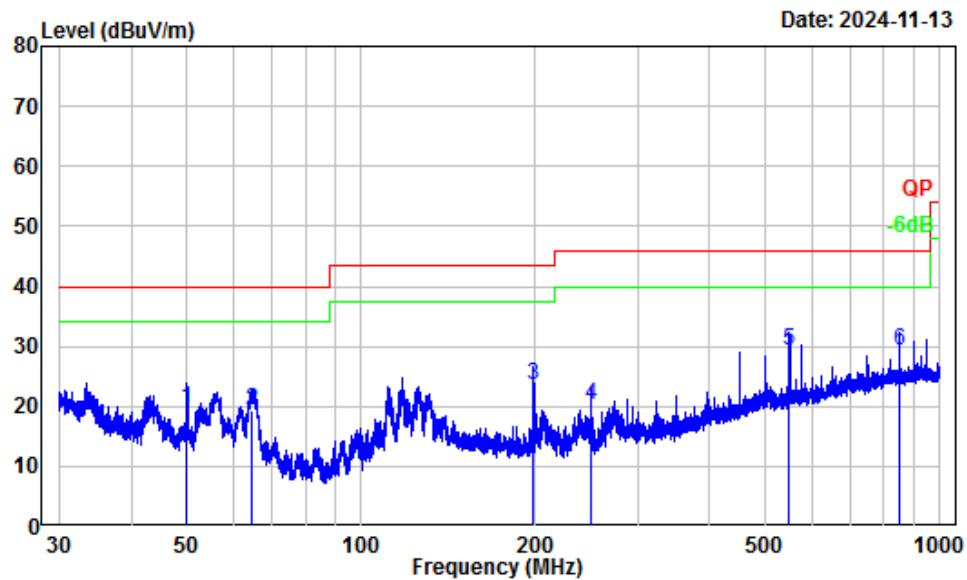


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dB _{uV}	dB _{uV/m}	dB _{uV/m}	dB	
1	49.99	-17.92	37.59	19.67	40.00	-20.33	QP
2	64.66	-18.00	37.29	19.29	40.00	-20.71	QP
3	197.98	-13.28	36.73	23.45	43.50	-20.05	QP
4	249.97	-13.09	33.40	20.31	46.00	-25.69	QP
5	549.98	-5.43	34.84	29.41	46.00	-16.59	QP
6	850.29	-1.72	31.09	29.37	46.00	-16.63	QP


For POE
9 kHz-30MHz: (Maximum output power mode BLE IM, Low Channel)

Parallel (Worst case)

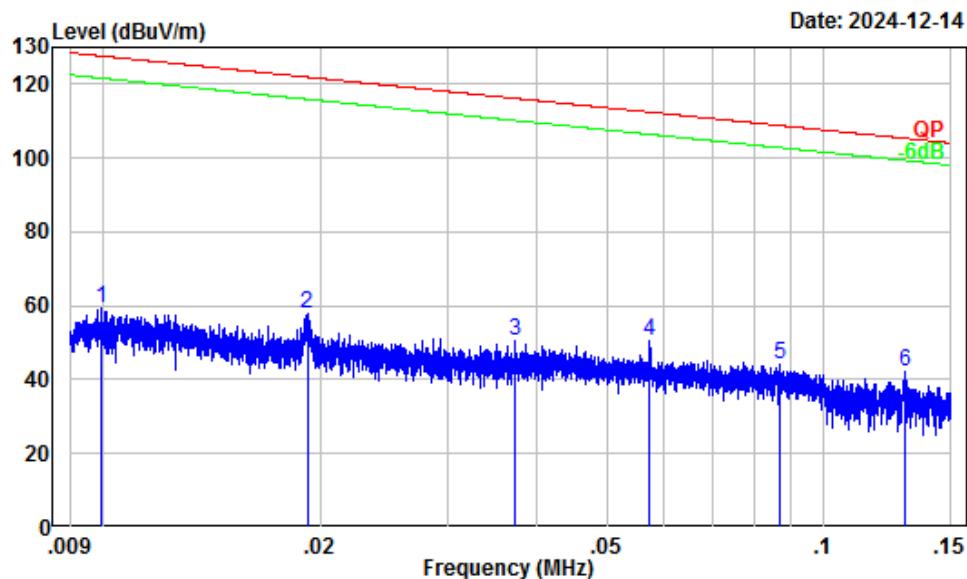


Site : Chamber A
Condition : 3m
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 0.3KHz VBW:1KHz
Tester : Anson Su

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	0.01	32.31	26.90	59.21	127.66	-68.45	Peak
2	0.02	30.55	27.40	57.95	121.94	-63.99	Peak
3	0.04	27.73	22.70	50.43	116.16	-65.73	Peak
4	0.06	25.67	24.70	50.37	112.45	-62.08	Peak
5	0.09	22.91	21.26	44.17	108.82	-64.65	Peak
6	0.13	20.24	22.16	42.40	105.33	-62.93	Peak

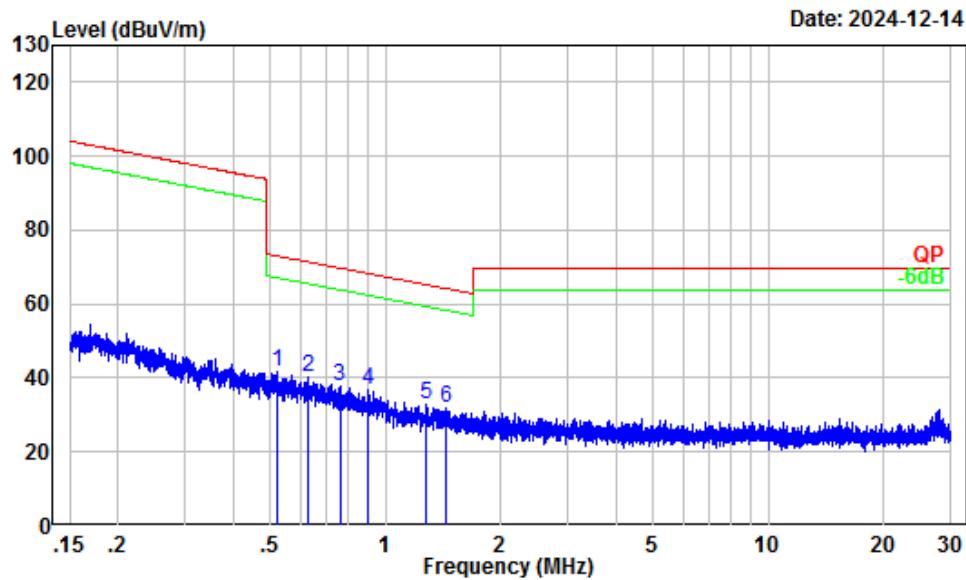

Site : Chamber A
Condition : 3m
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 10KHz VBW:30KHz
Tester : Anson Su


Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	0.52	6.13	35.60	41.73	73.24	-31.51	Peak
2	0.63	4.81	35.39	40.20	71.58	-31.38	Peak
3	0.76	3.18	34.47	37.65	69.90	-32.25	Peak
4	0.91	1.91	34.83	36.74	68.36	-31.62	Peak
5	1.28	0.42	32.69	33.11	65.30	-32.19	Peak
6	1.45	-0.05	32.06	32.01	64.20	-32.19	Peak

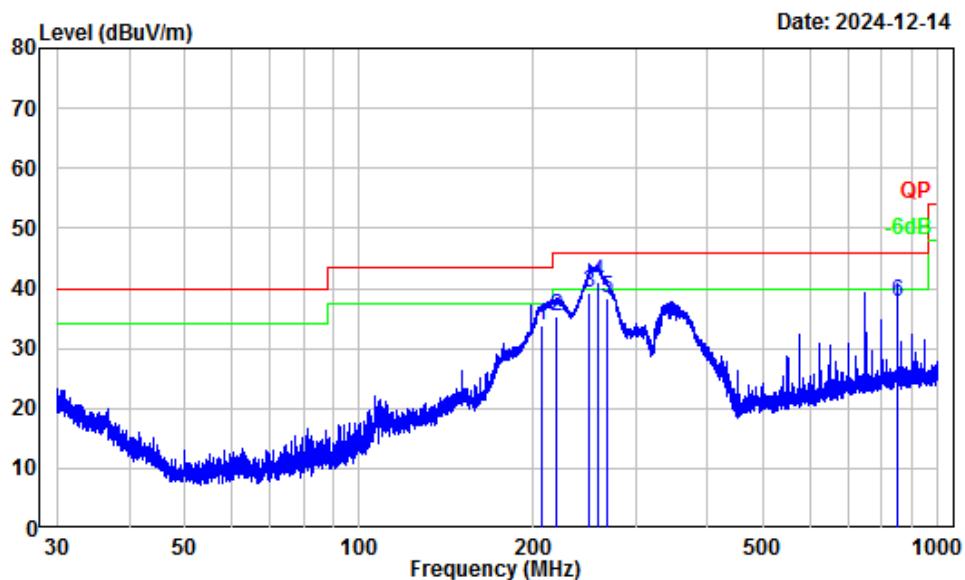30MHz-1GHz: (Maximum output power mode BLE 1M, Low Channel)**Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 120KHz
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	207.12	-13.69	47.50	33.81	43.50	-9.69 QP
2	219.65	-14.20	49.50	35.30	46.00	-10.70 QP
3	249.97	-13.09	52.20	39.11	46.00	-6.89 QP
4	257.76	-12.91	54.00	41.09	46.00	-4.91 QP
5	267.55	-12.05	50.30	38.25	46.00	-7.75 QP
6	850.29	-1.72	39.51	37.79	46.00	-8.21 QP


Vertical

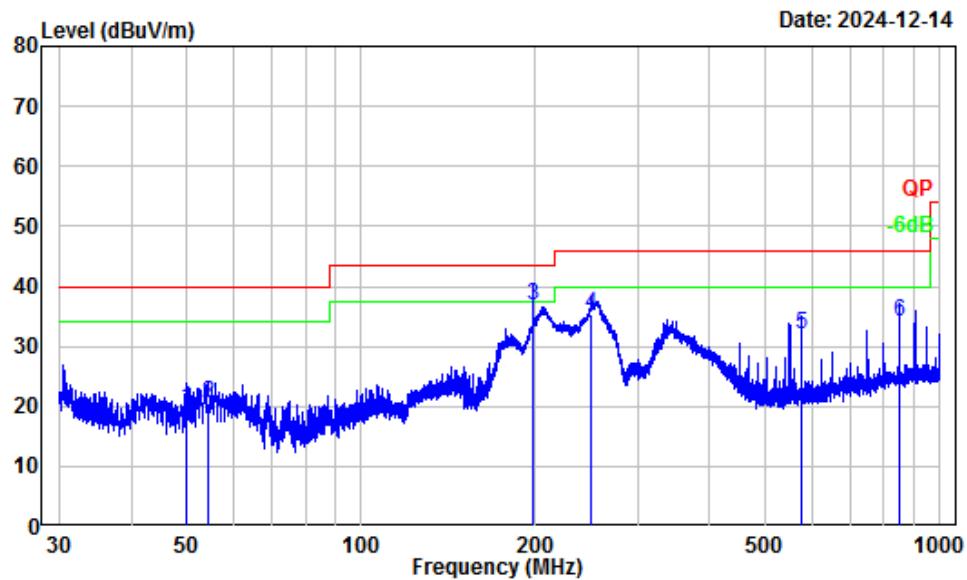

Site : Chamber A
Condition : 3m Vertical
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 120KHz
Tester : Anson Su


Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	49.97	-17.91	37.49	19.58	40.00	-20.42	QP
2	54.19	-18.32	38.94	20.62	40.00	-19.38	QP
3	198.07	-13.26	50.17	36.91	43.50	-6.59	QP
4	249.97	-13.09	48.26	35.17	46.00	-10.83	QP
5	576.14	-5.25	37.36	32.11	46.00	-13.89	QP
6	850.29	-1.72	35.69	33.97	46.00	-12.03	QP

For Model: J640 Pro (Worse case: Adapter 2)
9 kHz-30MHz: (Maximum output power mode BLE 1M, Low Channel)
Parallel (worst case)

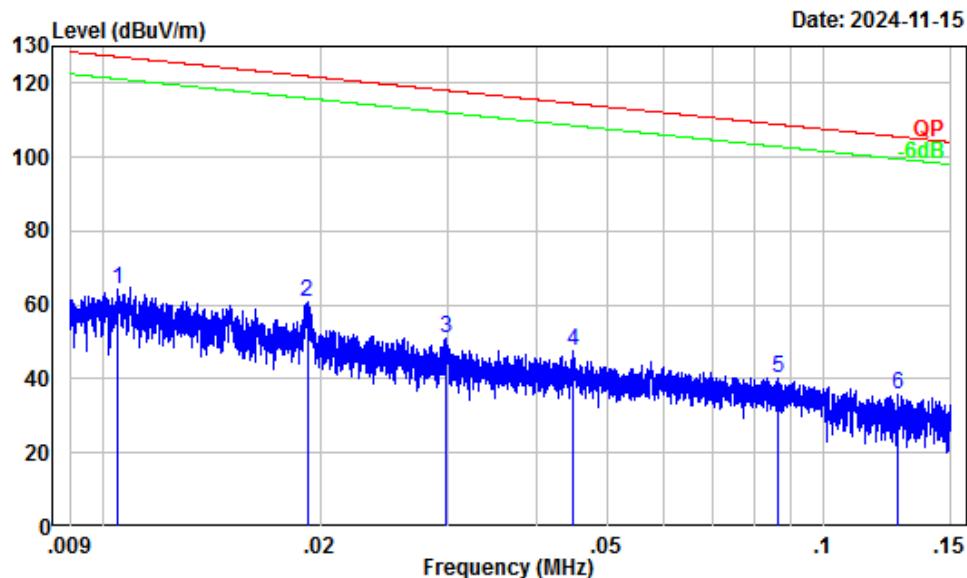


Site : Chamber A
Condition : 3m
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	0.01	37.43	27.05	64.48	127.18	-62.70 Peak
2	0.02	32.99	27.75	60.74	121.94	-61.20 Peak
3	0.03	27.56	23.28	50.84	118.11	-67.27 Peak
4	0.04	24.21	23.46	47.67	114.57	-66.90 Peak
5	0.09	18.38	21.93	40.31	108.86	-68.55 Peak
6	0.13	15.80	19.78	35.58	105.54	-69.96 Peak

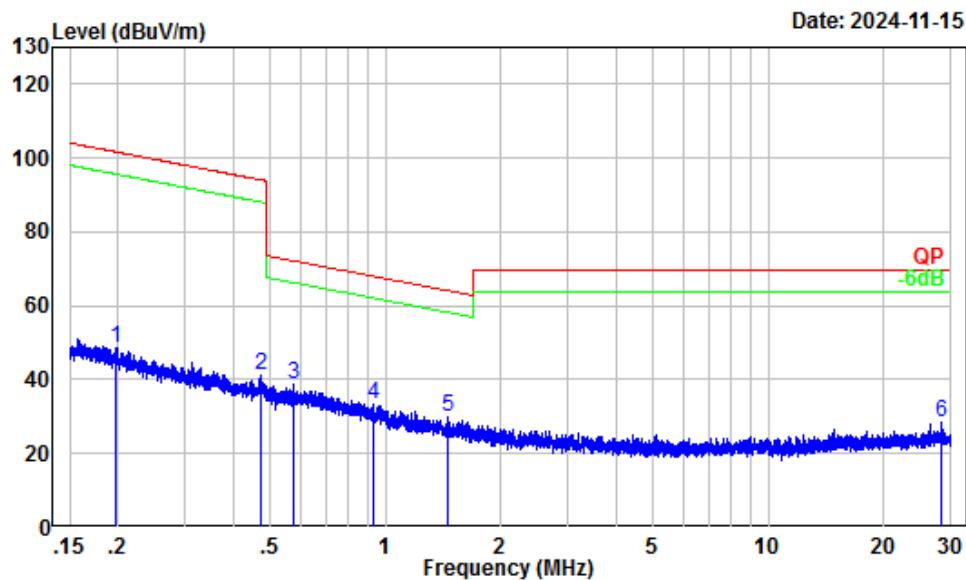

Site : Chamber A
Condition : 3m
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su


	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dB _{uV}	dB _{uV/m}	dB _{uV/m}	dB	
1	0.20	12.45	36.26	48.71	101.64	-52.93	Peak
2	0.47	4.02	36.98	41.00	94.08	-53.08	Peak
3	0.58	2.54	36.06	38.60	72.33	-33.73	Peak
4	0.93	-1.06	34.63	33.57	68.13	-34.56	Peak
5	1.45	-3.16	33.22	30.06	64.17	-34.11	Peak
6	28.23	-4.73	32.95	28.22	69.54	-41.32	Peak

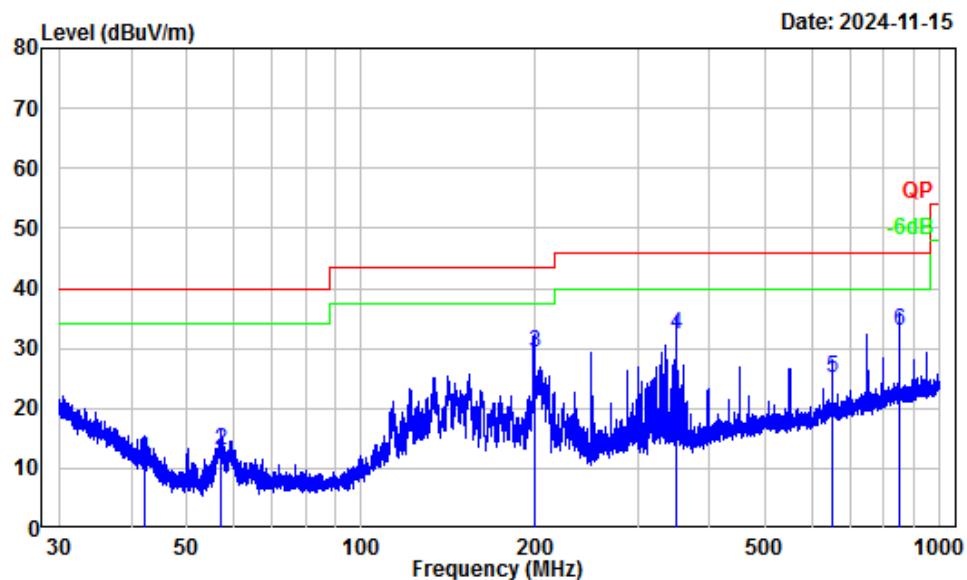30MHz-1GHz: (Maximum output power mode BLE 1M, Low Channel)**Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB
1	42.34	-14.95	26.35	11.40	40.00	-28.60	QP
2	57.27	-19.05	32.18	13.13	40.00	-26.87	QP
3	199.90	-12.49	41.72	29.23	43.50	-14.27	QP
4	350.02	-12.14	44.31	32.17	46.00	-13.83	QP
5	650.23	-7.10	32.21	25.11	46.00	-20.89	QP
6	850.29	-4.11	36.87	32.76	46.00	-13.24	QP


Vertical

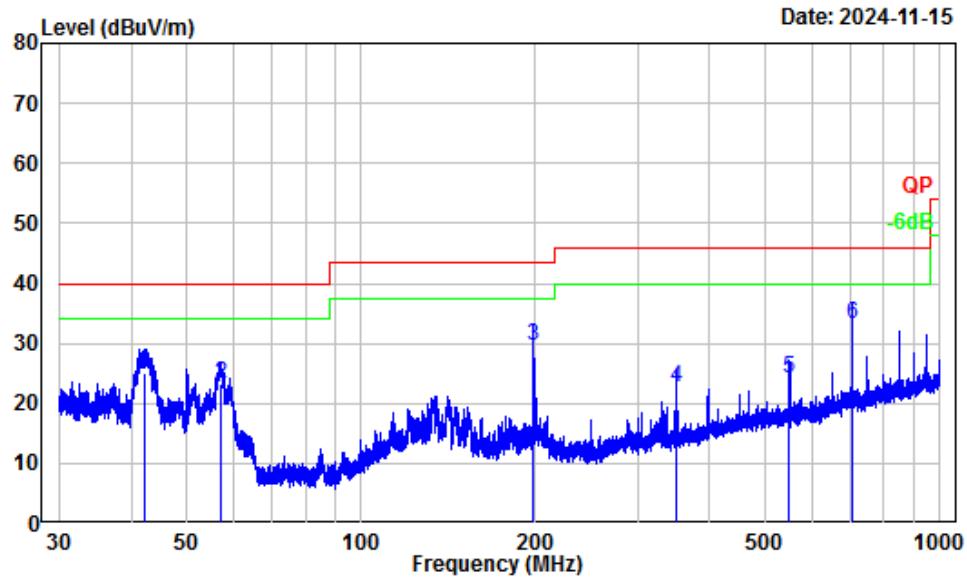

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Y98834E-RF
Test Mode : Transmitting
Tester : Anson Su


	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.19	-14.84	39.94	25.10	40.00	-14.90	QP
2	57.32	-19.05	42.44	23.39	40.00	-16.61	QP
3	197.98	-12.59	42.27	29.68	43.50	-13.82	QP
4	350.02	-12.14	34.67	22.53	46.00	-23.47	QP
5	549.98	-8.53	32.77	24.24	46.00	-21.76	QP
6	704.53	-6.49	39.81	33.32	46.00	-12.68	QP

For POE
9 kHz-30MHz: (Maximum output power mode BLE 1M, Low Channel)
Parallel (worst case)

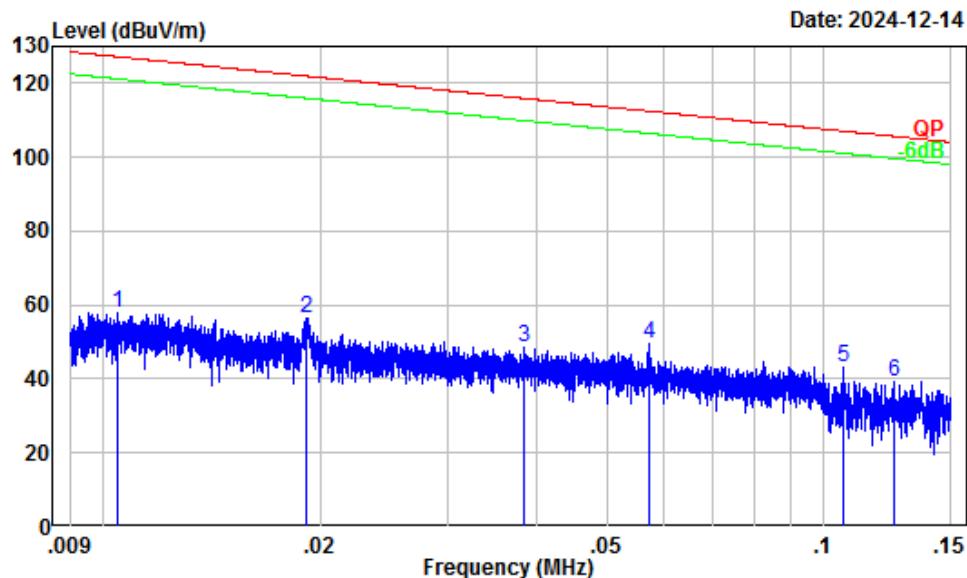


Site : Chamber A
Condition : 3m
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 0.3KHz VBW:1KHz
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark
		Level	Level	Line	
1	0.01	32.21	25.53	57.74	127.19 -69.45 Peak
2	0.02	30.56	26.07	56.63	121.96 -65.33 Peak
3	0.04	27.63	21.10	48.73	115.93 -67.20 Peak
4	0.06	25.68	23.84	49.52	112.46 -62.94 Peak
5	0.11	21.62	21.55	43.17	107.07 -63.90 Peak
6	0.13	20.51	18.91	39.42	105.65 -66.23 Peak

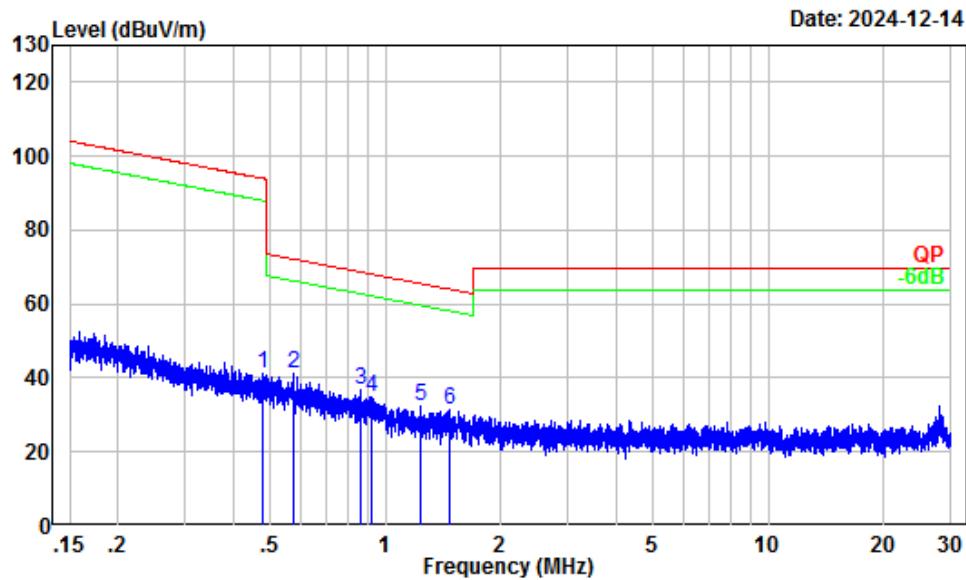

Site : Chamber A
Condition : 3m
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 10KHz VBW:30KHz
Tester : Anson Su


Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	0.48	6.81	34.64	41.45	94.01	-52.56	Peak
2	0.58	5.45	35.63	41.08	72.35	-31.27	Peak
3	0.86	2.26	34.54	36.80	68.83	-32.03	Peak
4	0.92	1.80	33.17	34.97	68.21	-33.24	Peak
5	1.24	0.53	31.72	32.25	65.57	-33.32	Peak
6	1.47	-0.11	31.26	31.15	64.07	-32.92	Peak

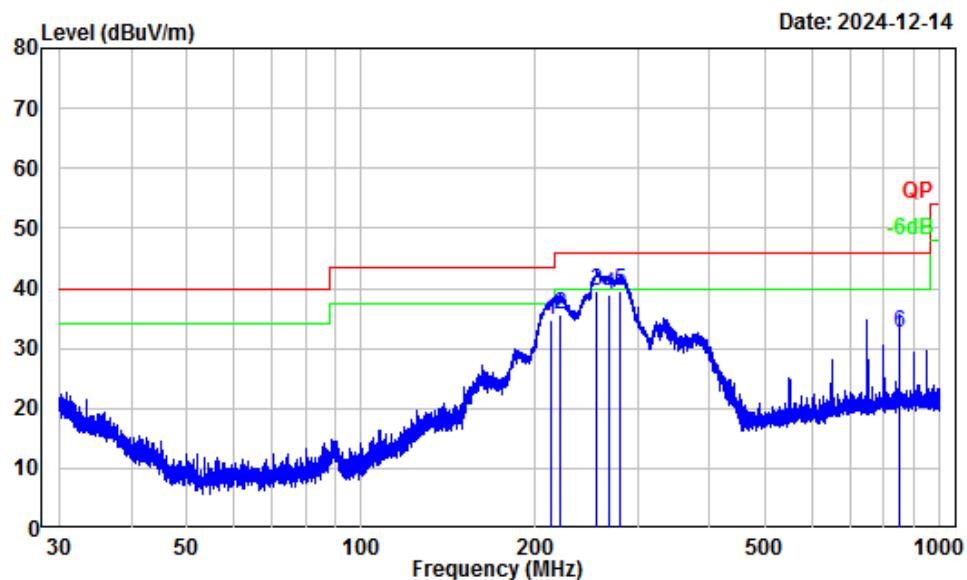30MHz-1GHz: (Maximum output power mode BLE 1M, Low Channel)**Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 0.3KHz VBW:1KHz
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	212.18	-15.79	50.60	34.81	43.50	-8.69 QP
2	220.13	-15.91	51.63	35.72	46.00	-10.28 QP
3	255.40	-14.91	54.58	39.67	46.00	-6.33 QP
4	267.31	-13.96	52.90	38.94	46.00	-7.06 QP
5	280.52	-13.15	52.60	39.45	46.00	-6.55 QP
6	850.29	-5.12	37.73	32.61	46.00	-13.39 QP

Vertical

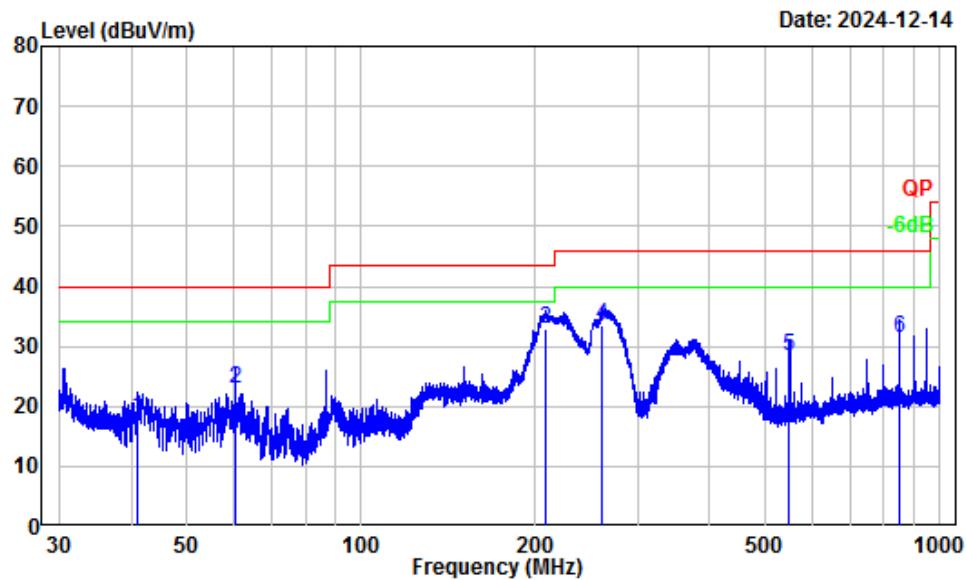

Site : Chamber A
Condition : 3m Vertical
Project Number : 2401Y98834E-RF
Test Mode : Transmitting
Detector QP RBW: 0.3KHz VBW:1KHz
Tester : Anson Su

Freq	Factor	Read	Limit	Over	Remark	
		Level	Level	Line		
1	41.06	-13.78	32.02	18.24	40.00	-21.76 QP
2	60.47	-18.86	41.92	23.06	40.00	-16.94 QP
3	207.76	-15.43	48.22	32.79	43.50	-10.71 QP
4	260.83	-14.56	47.98	33.42	46.00	-12.58 QP
5	549.98	-8.26	36.51	28.25	46.00	-17.75 QP
6	850.29	-5.12	36.58	31.46	46.00	-14.54 QP

1-25 GHz: (Adapter 2 was tested)

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)					
	Reading (dB μ V)	PK/AV										
BLE 1M												
Low Channel 2402MHz												
4804.00	47.28	PK	H	2.42	49.70	74	-24.30					
4804.00	33.48	AV	H	2.42	35.90	54	-18.10					
4804.00	47.45	PK	V	2.42	49.87	74	-24.13					
4804.00	33.72	AV	V	2.42	36.14	54	-17.86					
Middle Channel 2440MHz												
4880.00	47.33	PK	H	2.58	49.91	74	-24.09					
4880.00	34.62	AV	H	2.58	37.20	54	-16.80					
4880.00	47.35	PK	V	2.58	49.93	74	-24.07					
4880.00	35.54	AV	V	2.58	38.12	54	-15.88					
High Channel 2480MHz												
4960.00	47.42	PK	H	2.69	50.11	74	-23.89					
4960.00	36.64	AV	H	2.69	39.33	54	-14.67					
4960.00	47.04	PK	V	2.69	49.73	74	-24.27					
4960.00	36.28	AV	V	2.69	38.97	54	-15.03					
BLE 2M												
Low Channel 2402MHz												
4804.00	46.42	PK	H	2.42	48.84	74	-25.16					
4804.00	33.89	AV	H	2.42	36.31	54	-17.69					
4804.00	46.36	PK	V	2.42	48.78	74	-25.22					
4804.00	33.47	AV	V	2.42	35.89	54	-18.11					
Middle Channel 2440MHz												
4880.00	46.53	PK	H	2.58	49.11	74	-24.89					
4880.00	34.73	AV	H	2.58	37.31	54	-16.69					
4880.00	46.35	PK	V	2.58	48.93	74	-25.07					
4880.00	34.42	AV	V	2.58	37.00	54	-17.00					
High Channel 2480MHz												
4960.00	46.61	PK	H	2.69	49.30	74	-24.70					
4960.00	35.86	AV	H	2.69	38.55	54	-15.45					
4960.00	46.32	PK	V	2.69	49.01	74	-24.99					
4960.00	35.45	AV	V	2.69	38.14	54	-15.86					


Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

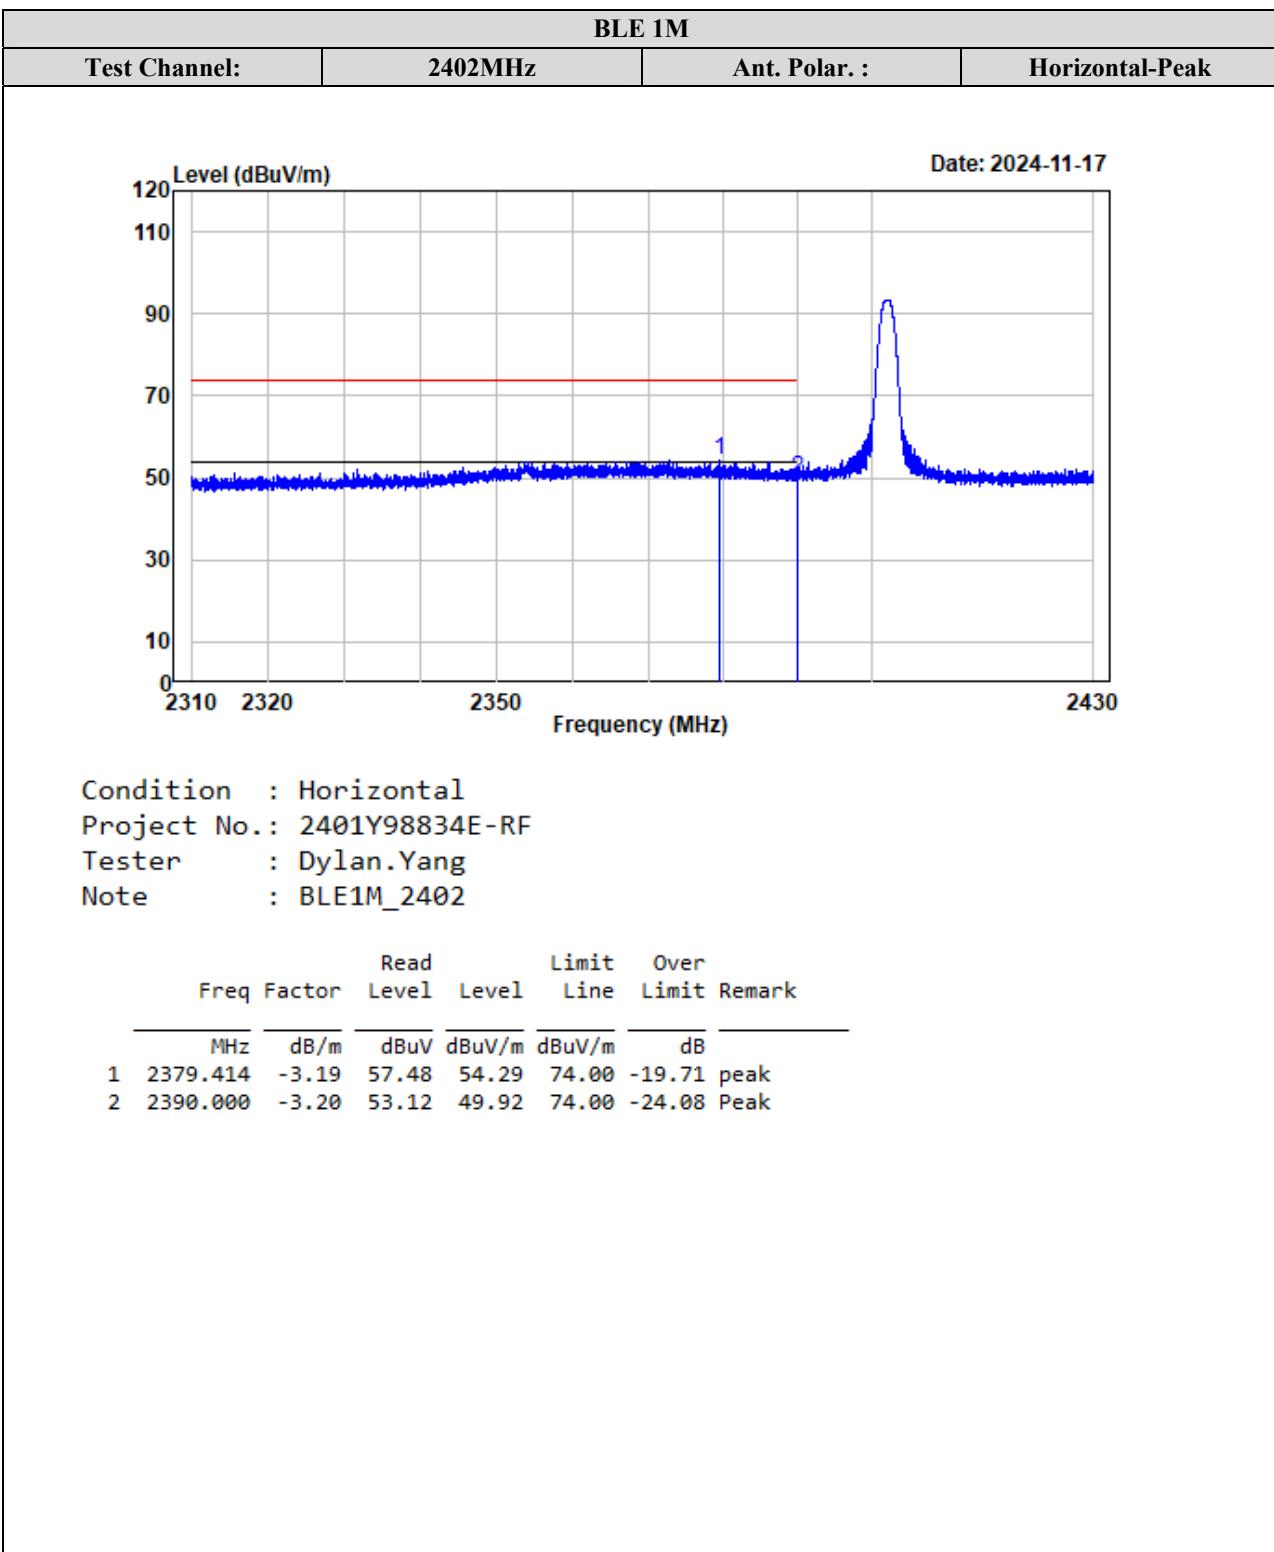
Test plots for Band Edge Measurements (Radiated):

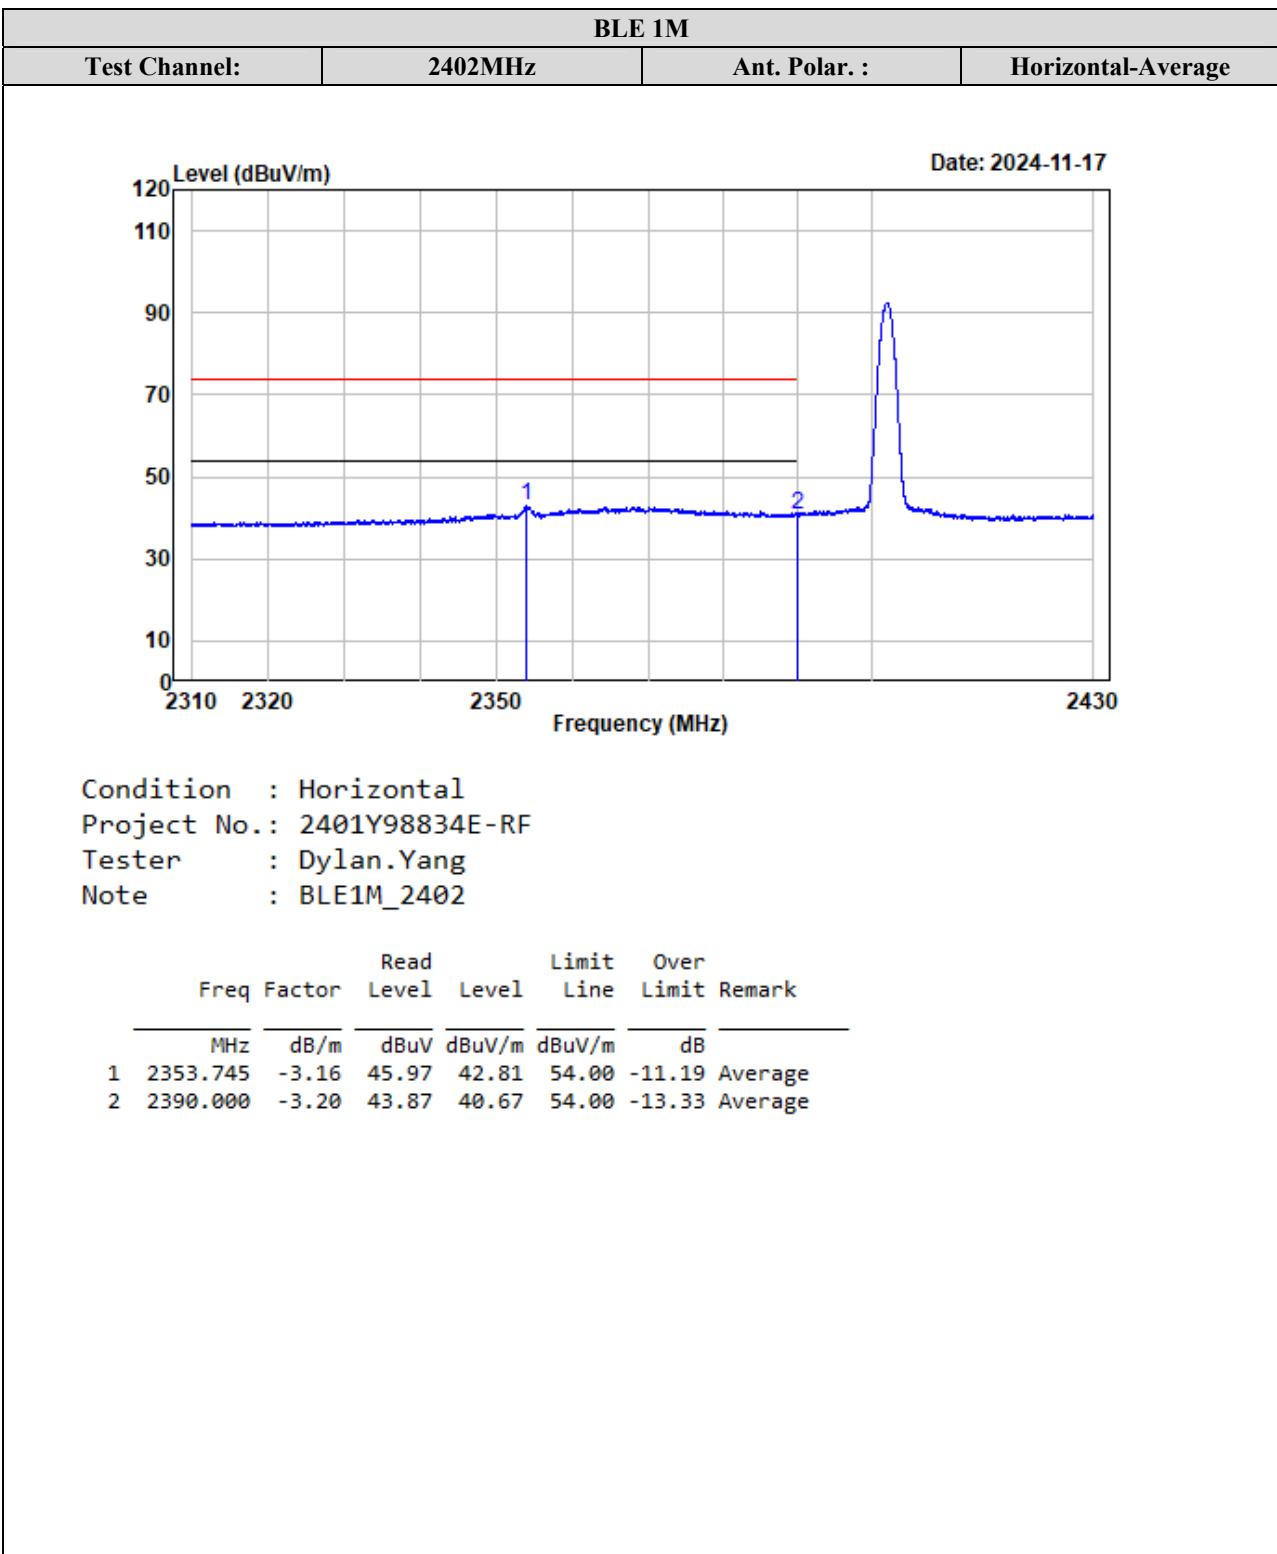


Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=3kHz

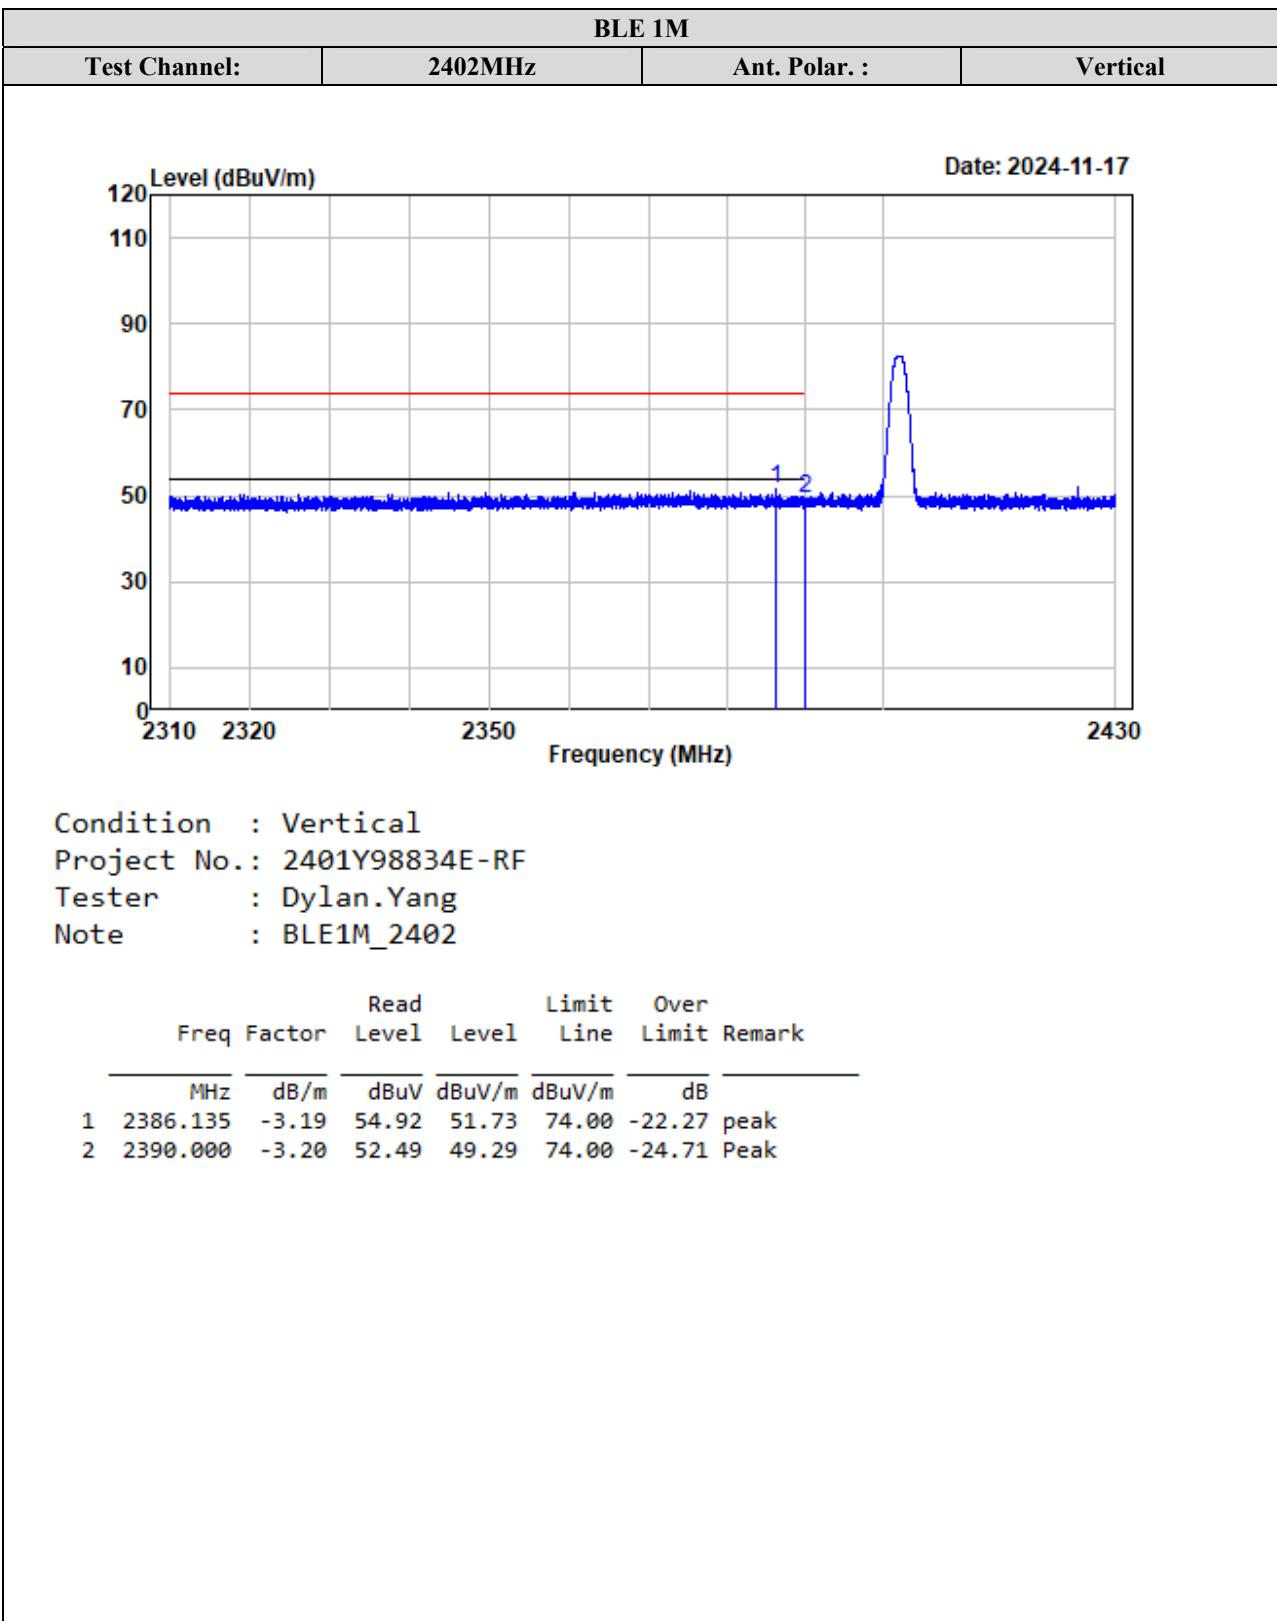


Test Channel:	2480MHz	Ant. Polar. :	Horizontal-Peak
---------------	---------	---------------	-----------------

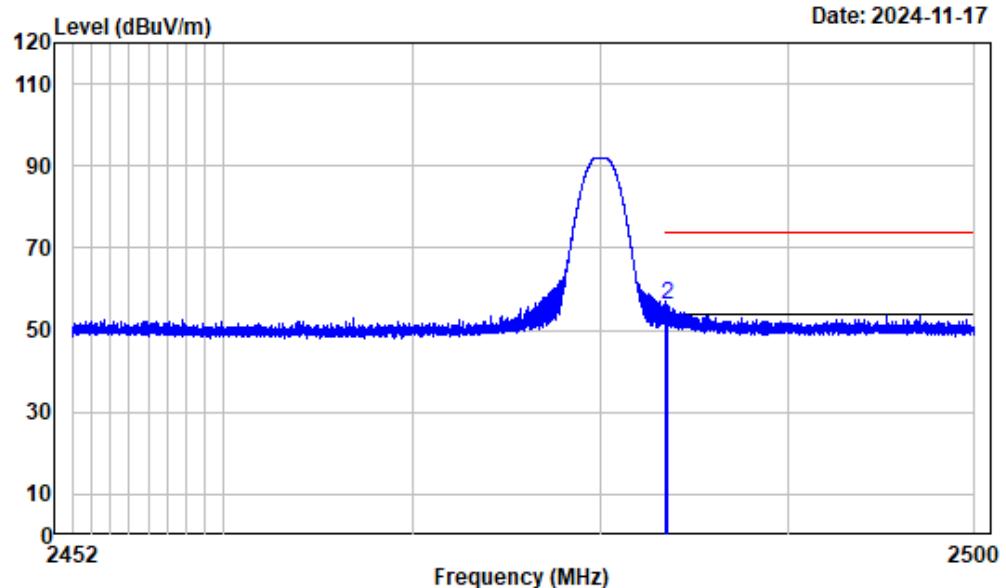


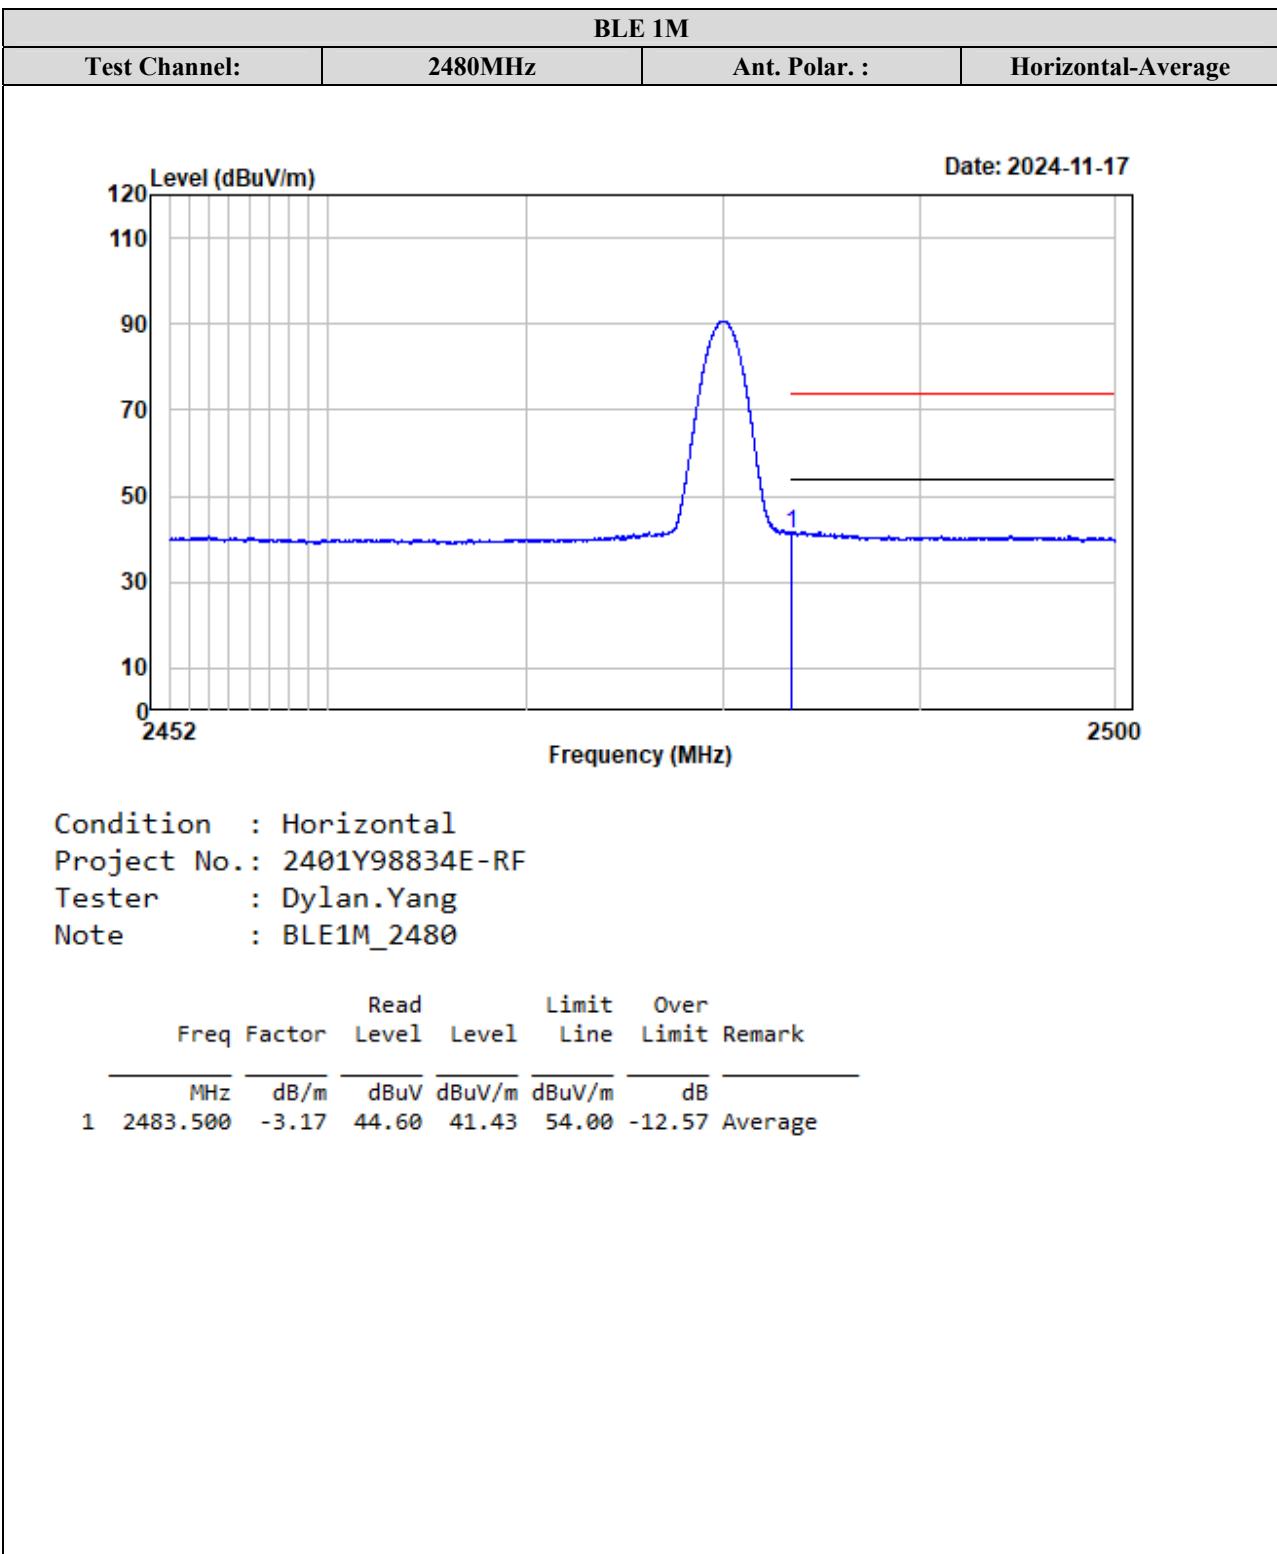

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=3kHz

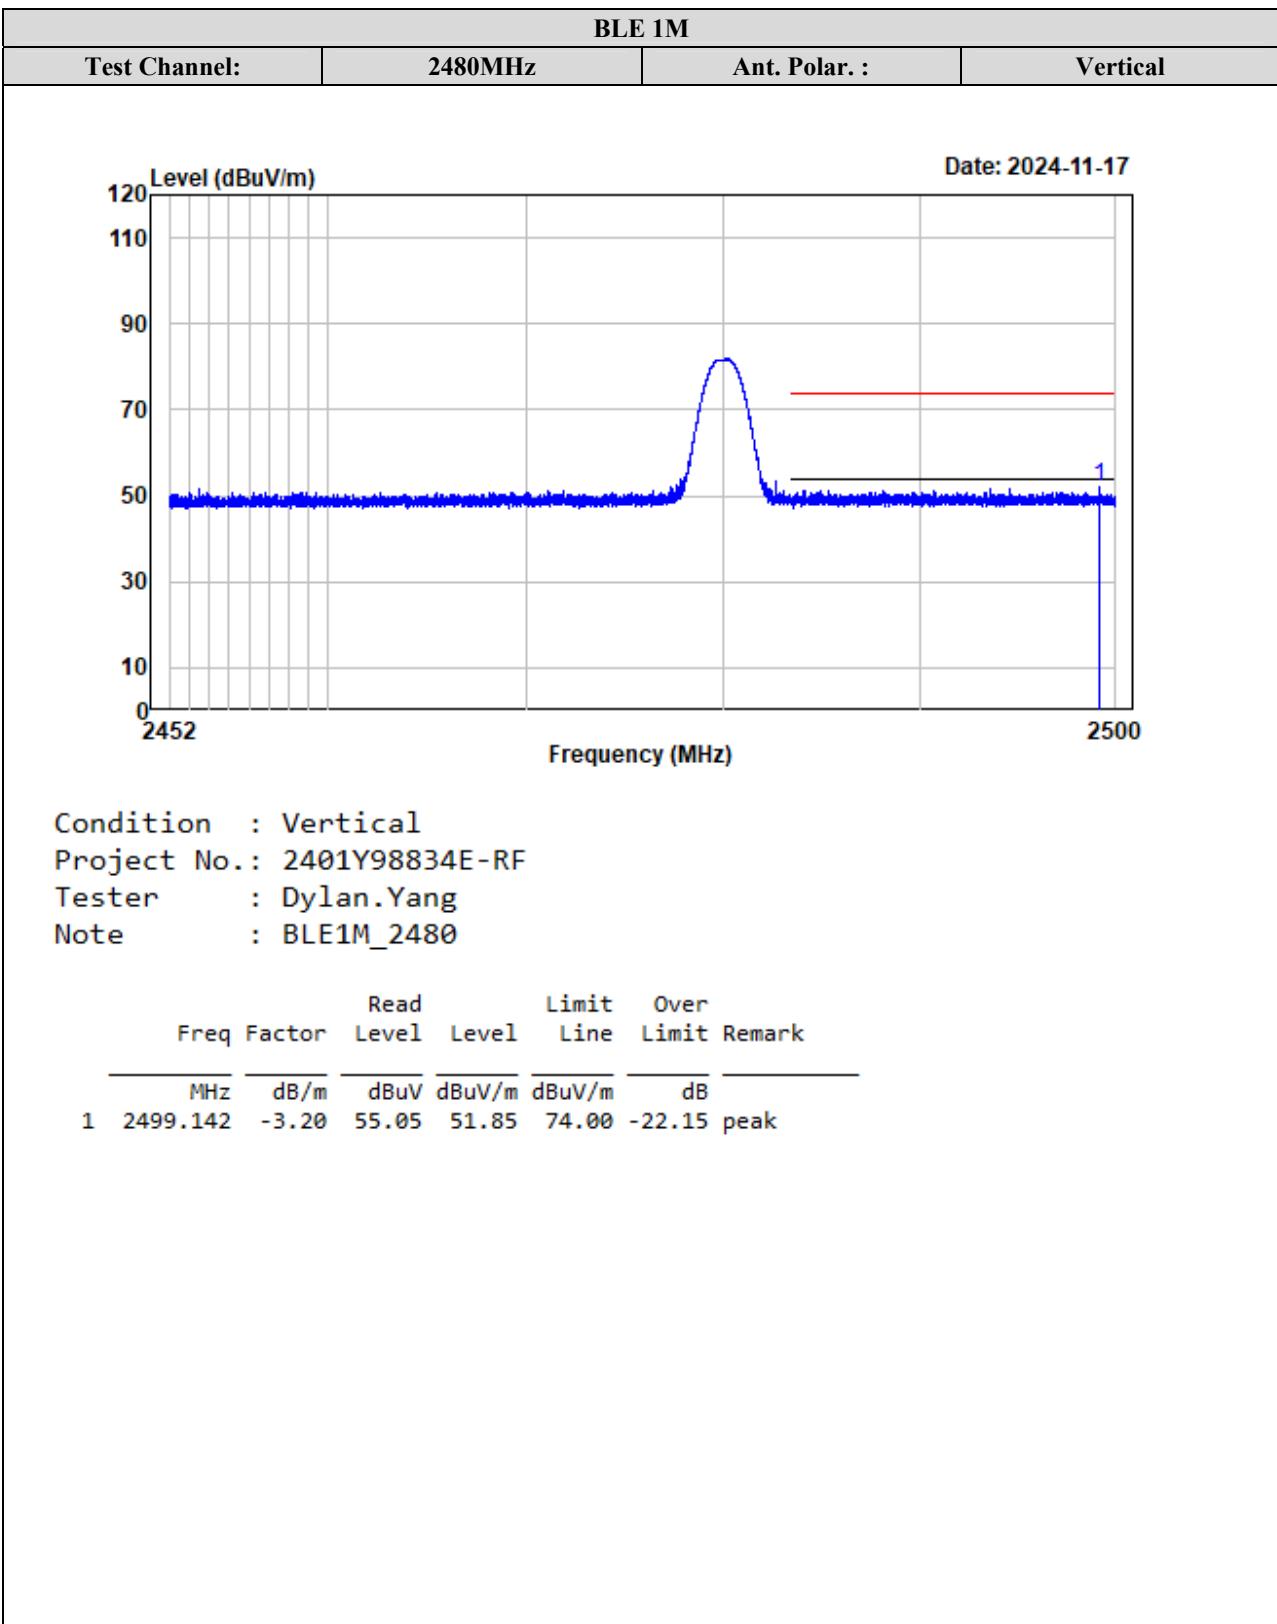


BLE 2M			
Test Channel:	2402MHz	Ant. Polar. :	Horizontal-Peak

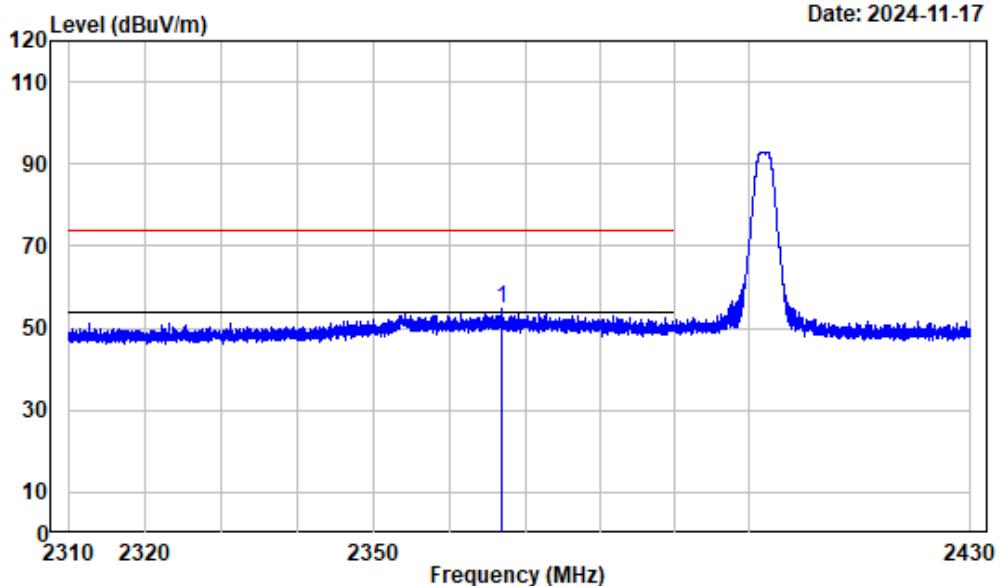


Condition : Horizontal
Project No.: 2401Y98834E-RF
Tester : Dylan.Yang
Note : BLE2M_2402


Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	2366.782	-3.16	58.01	54.85	74.00	-19.15	peak

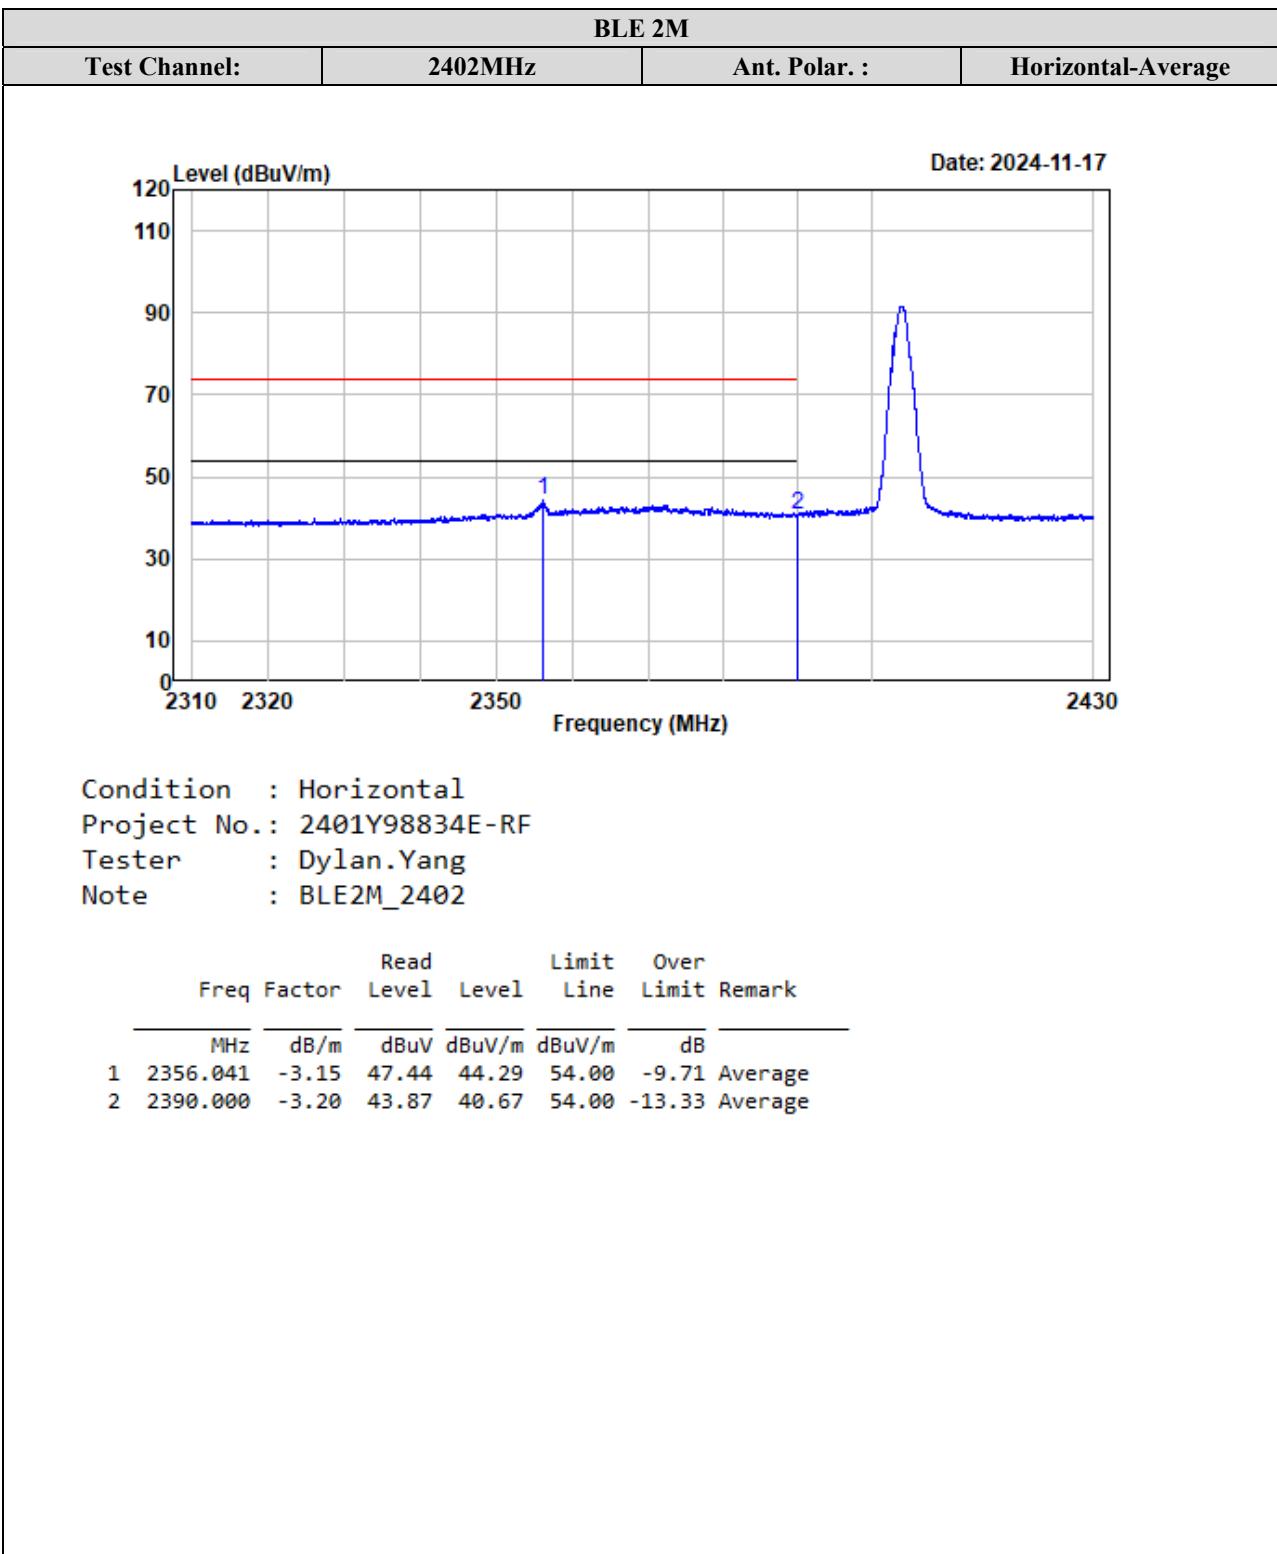

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

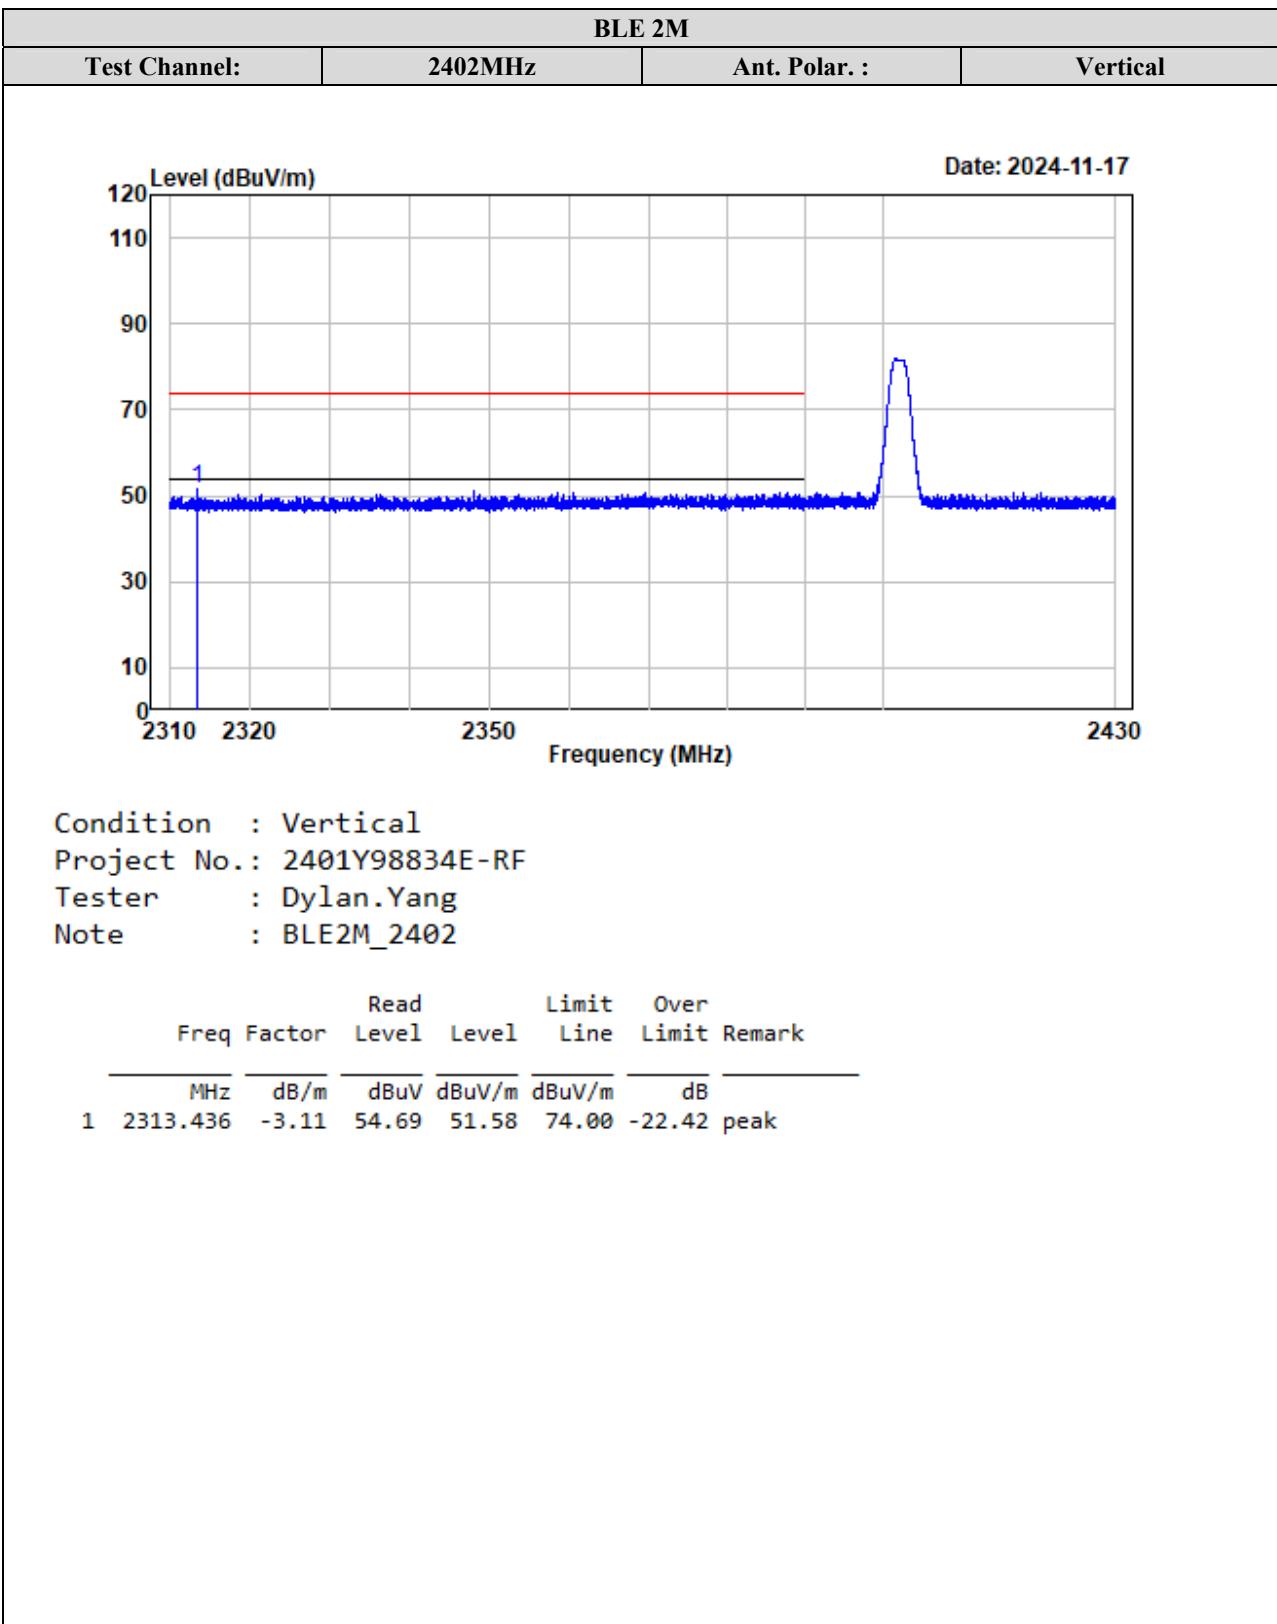


BLE 2M			
Test Channel:	2480MHz	Ant. Polar. :	Horizontal-Peak

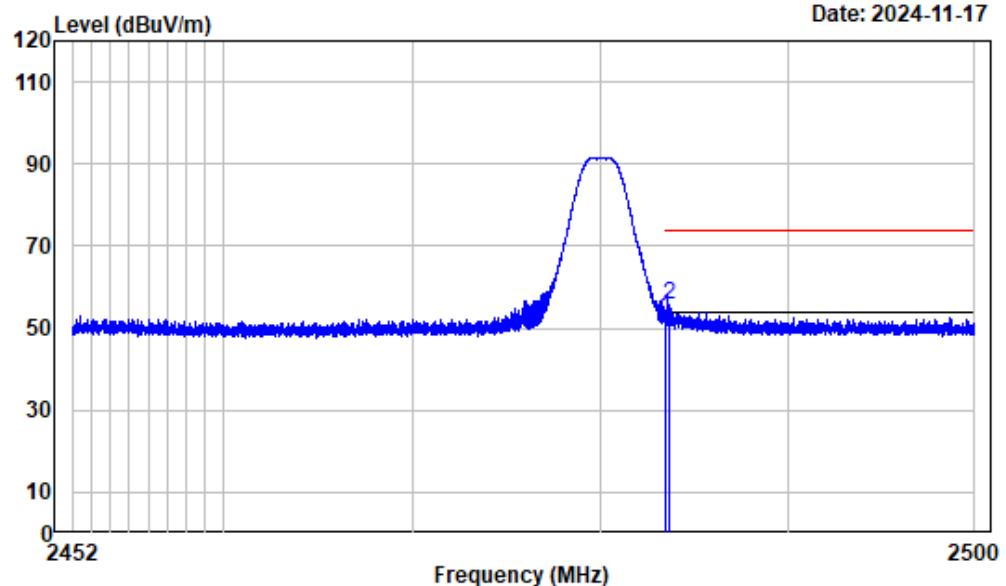



Condition : Horizontal
Project No.: 2401Y98834E-RF
Tester : Dylan.Yang
Note : BLE2M_2480


Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	2483.500	-3.17	55.62	52.45	74.00	-21.55	Peak
2	2483.672	-3.17	58.77	55.60	74.00	-18.40	peak

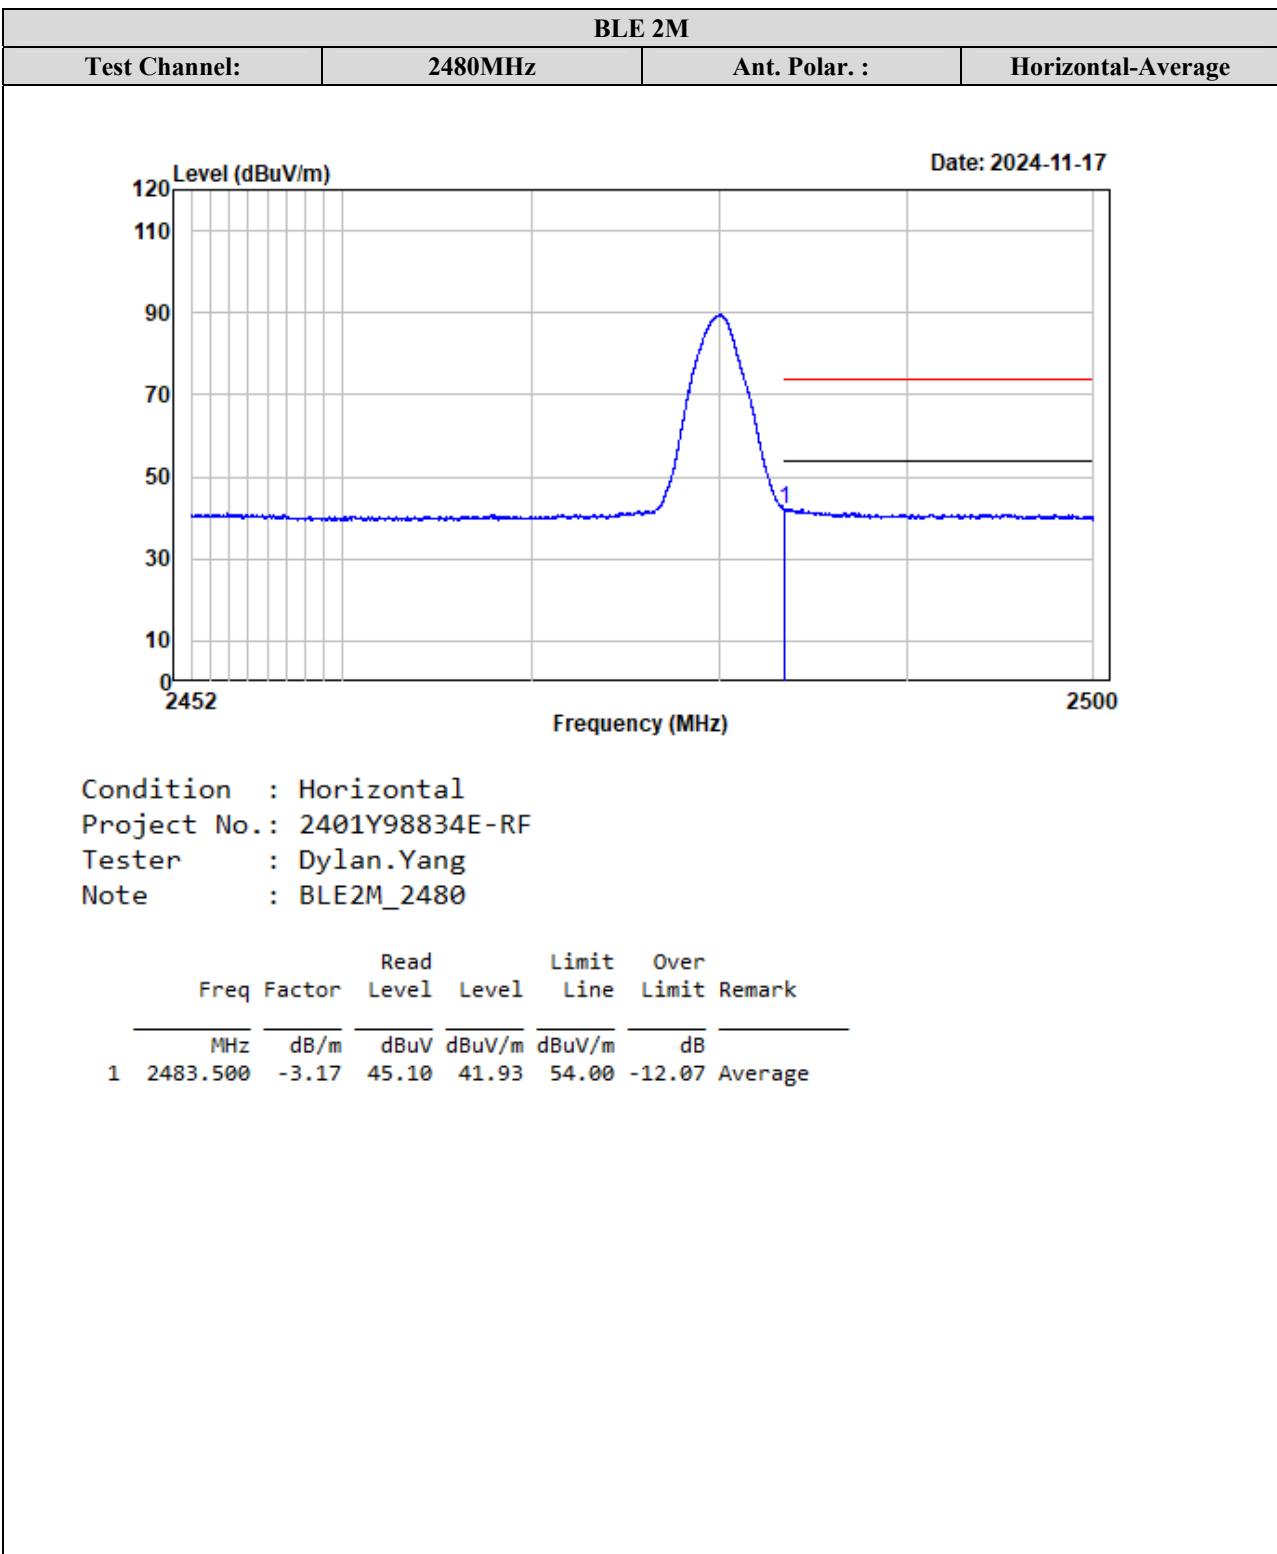



Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

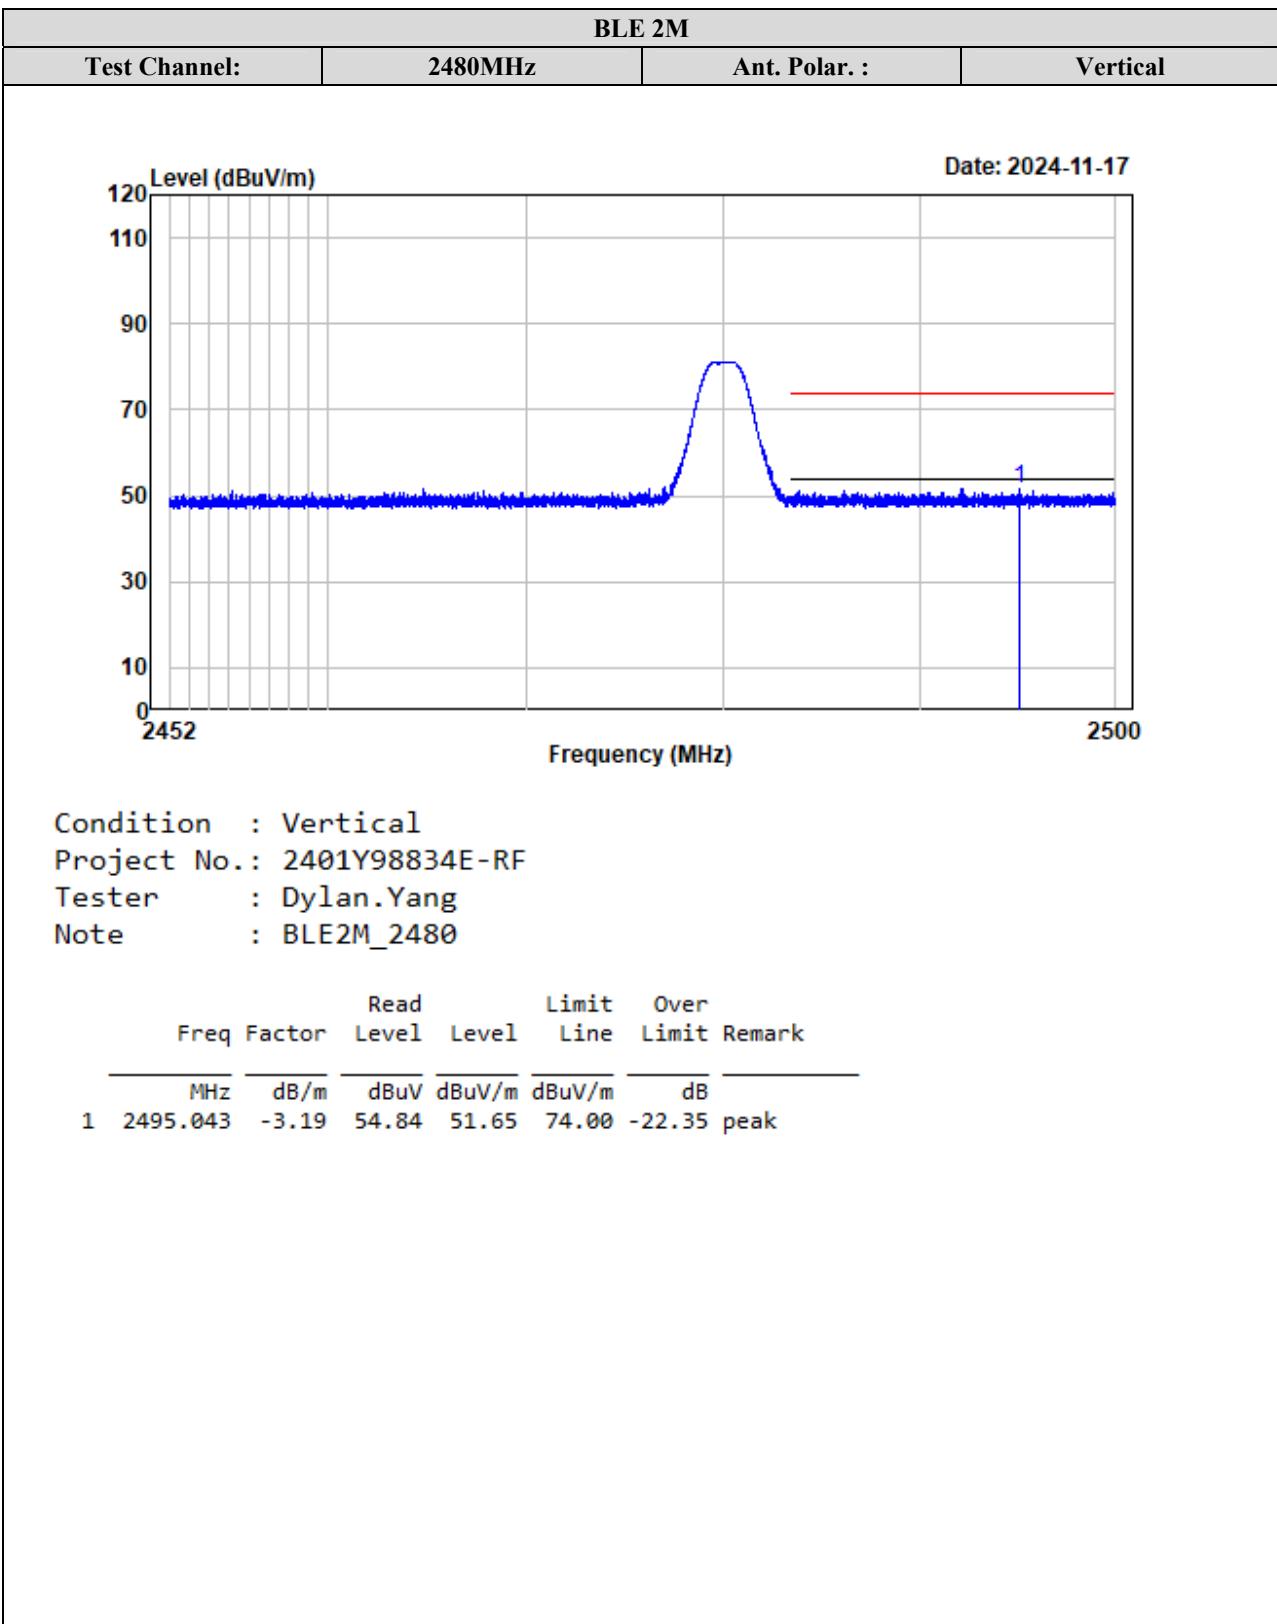


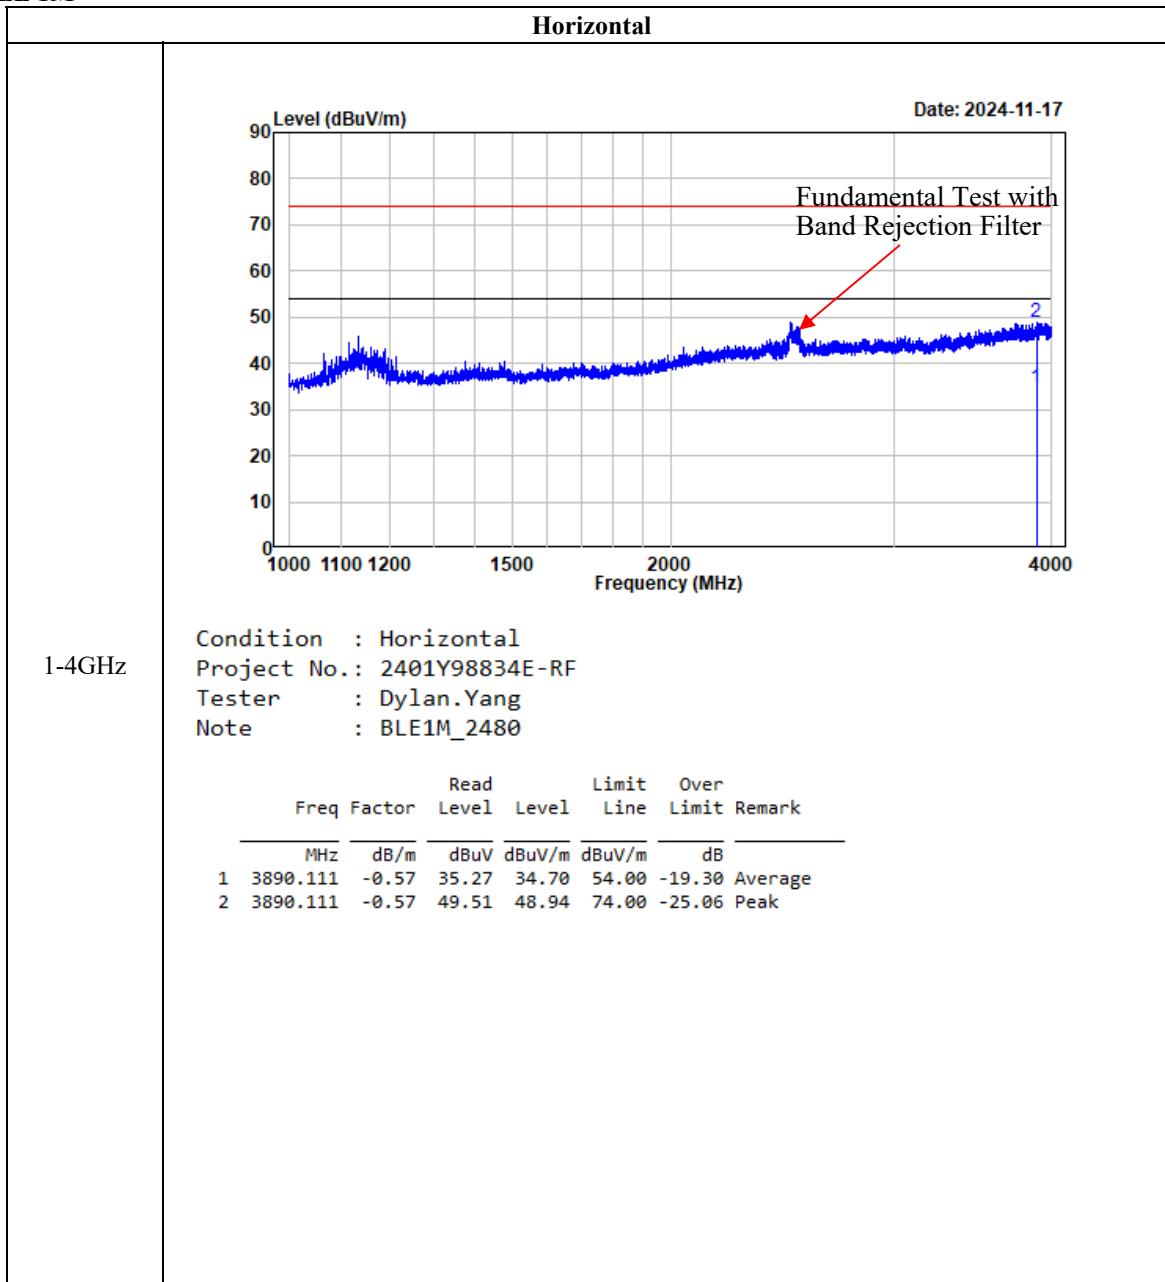Listed with the worst harmonic margin test plot:**BLE 1M**

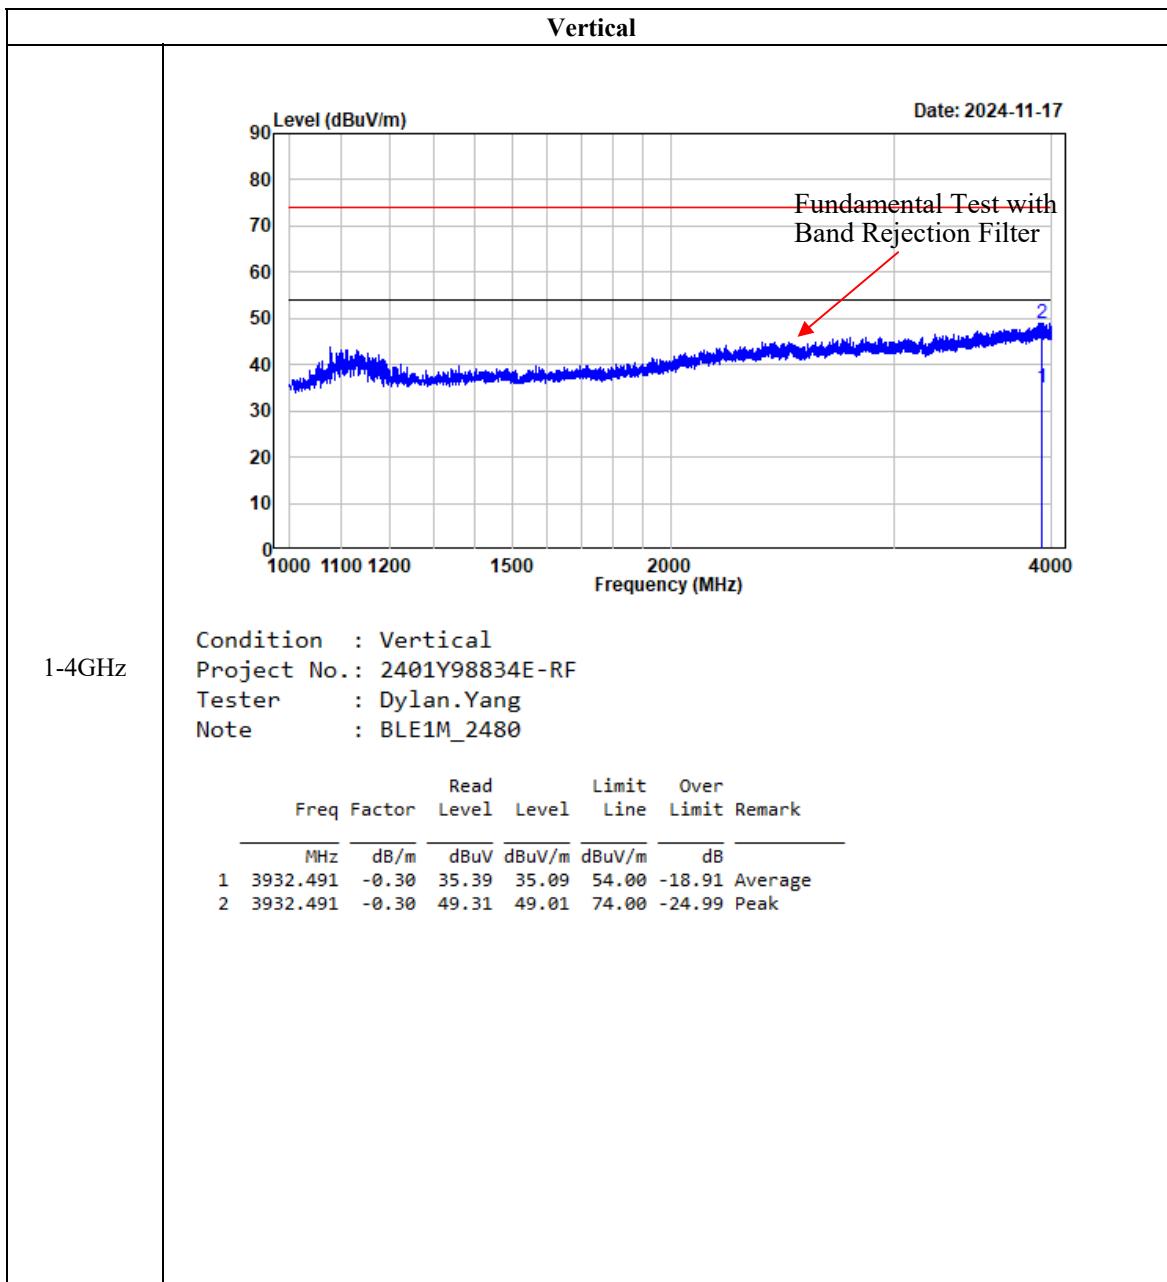


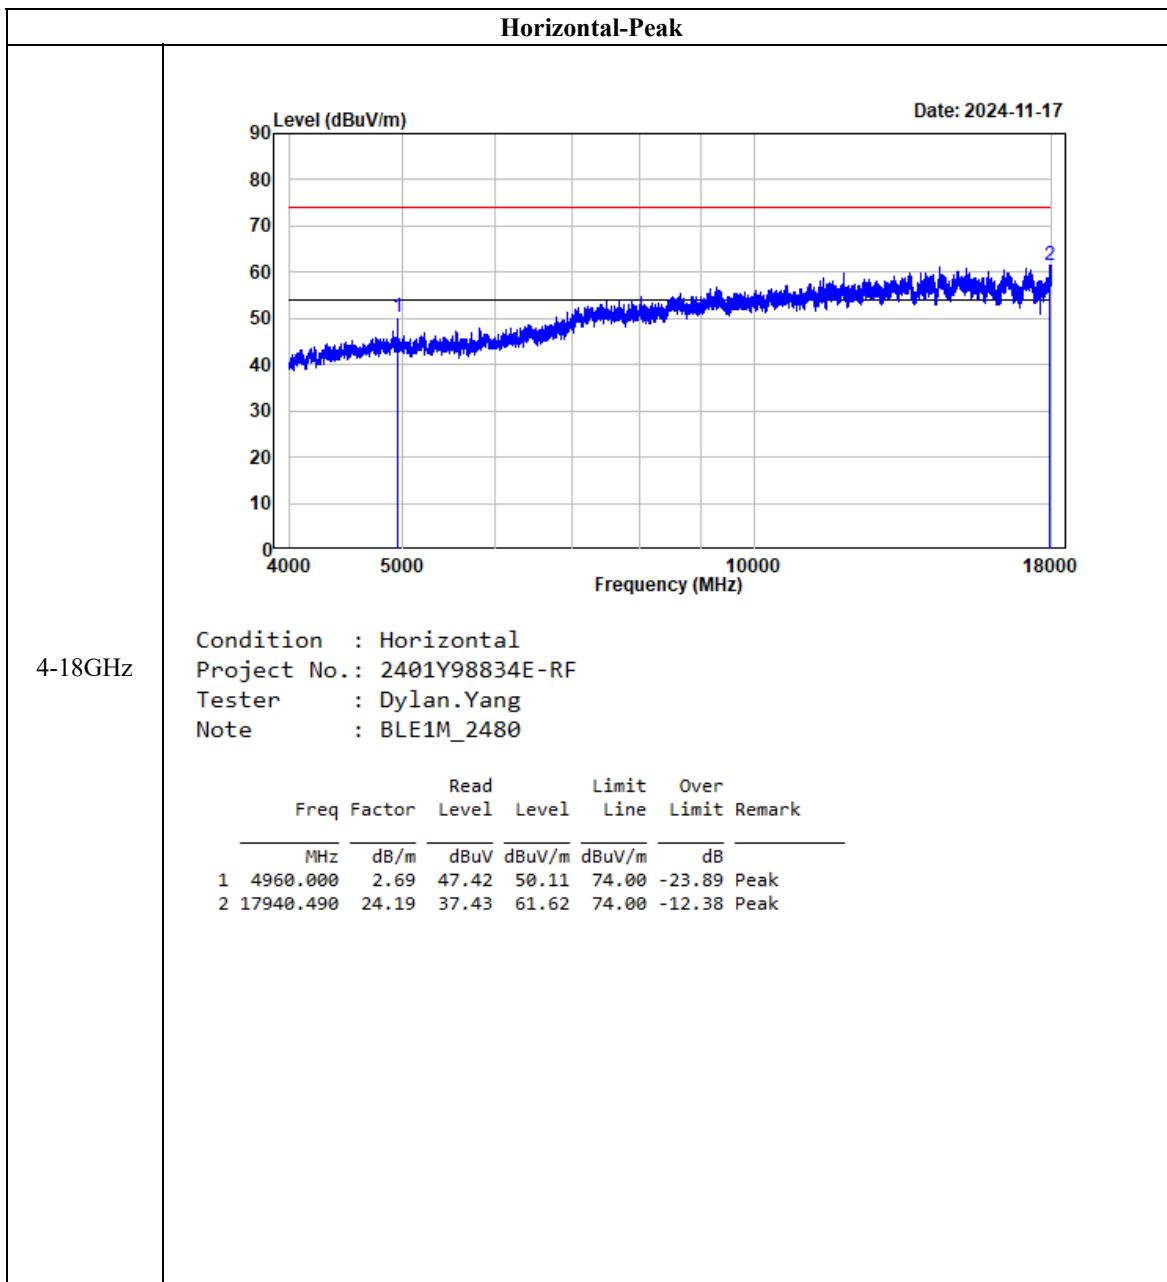

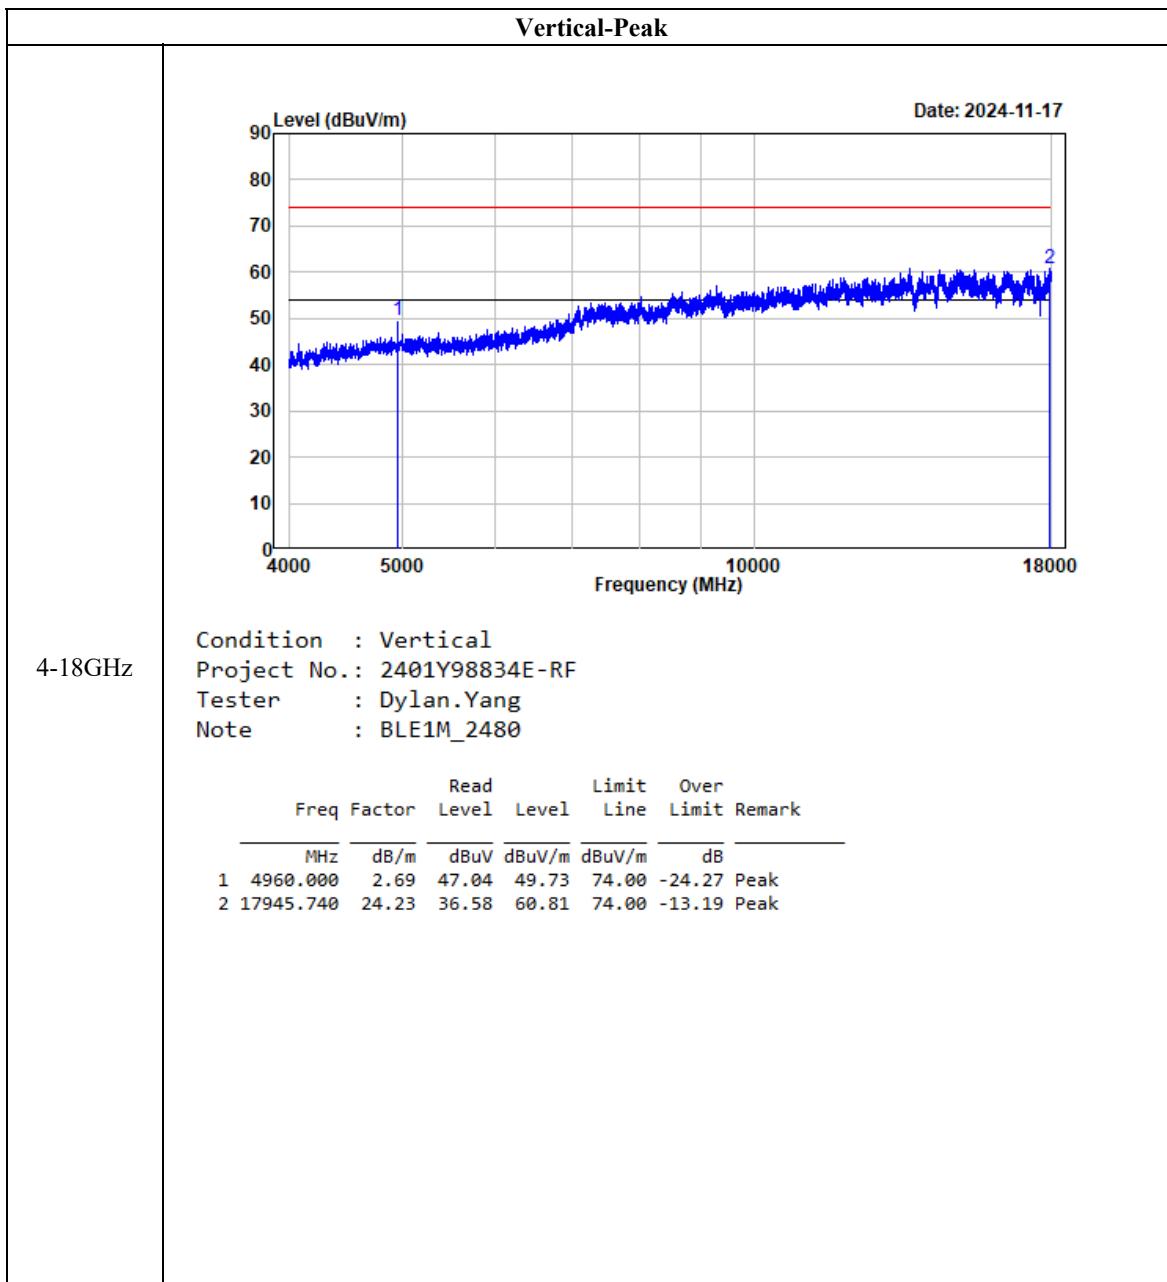


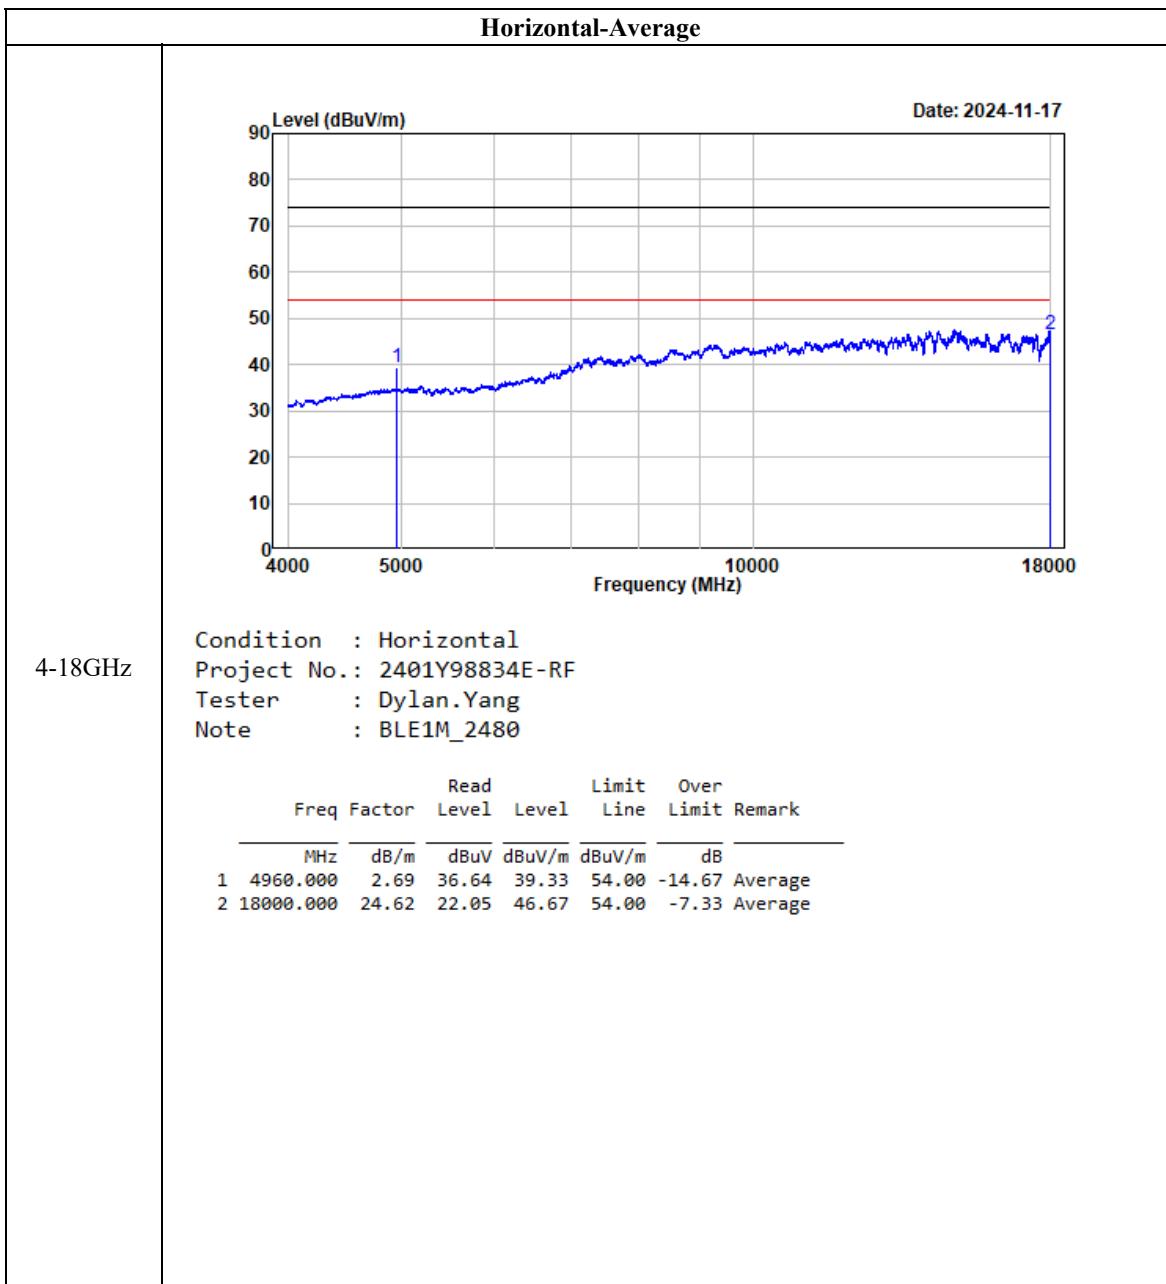


Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

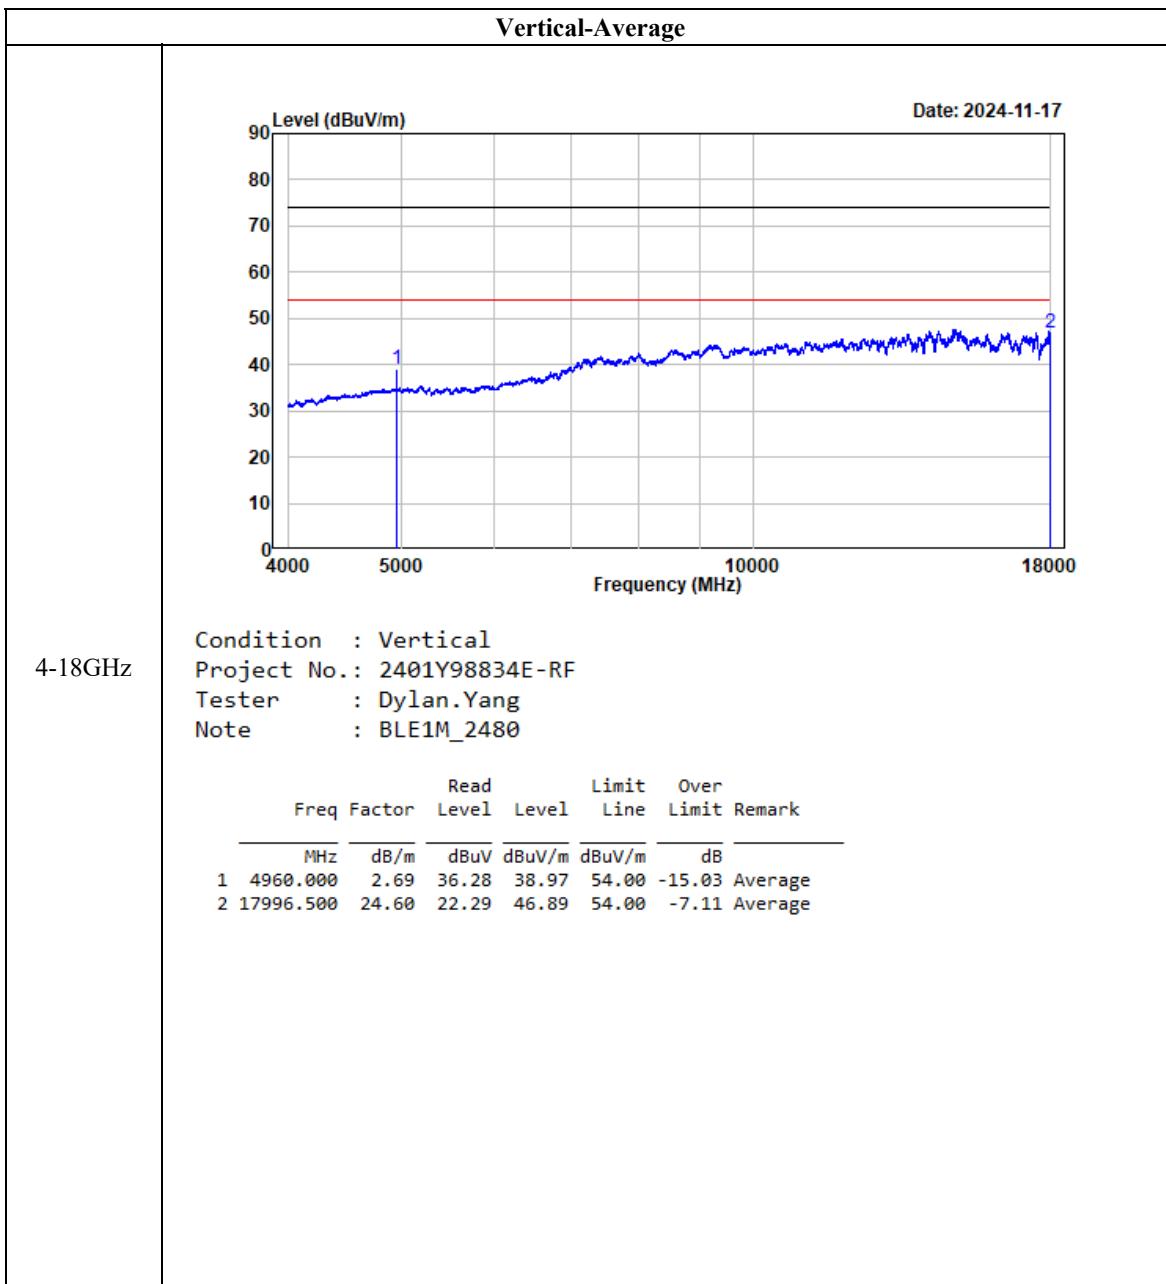



Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

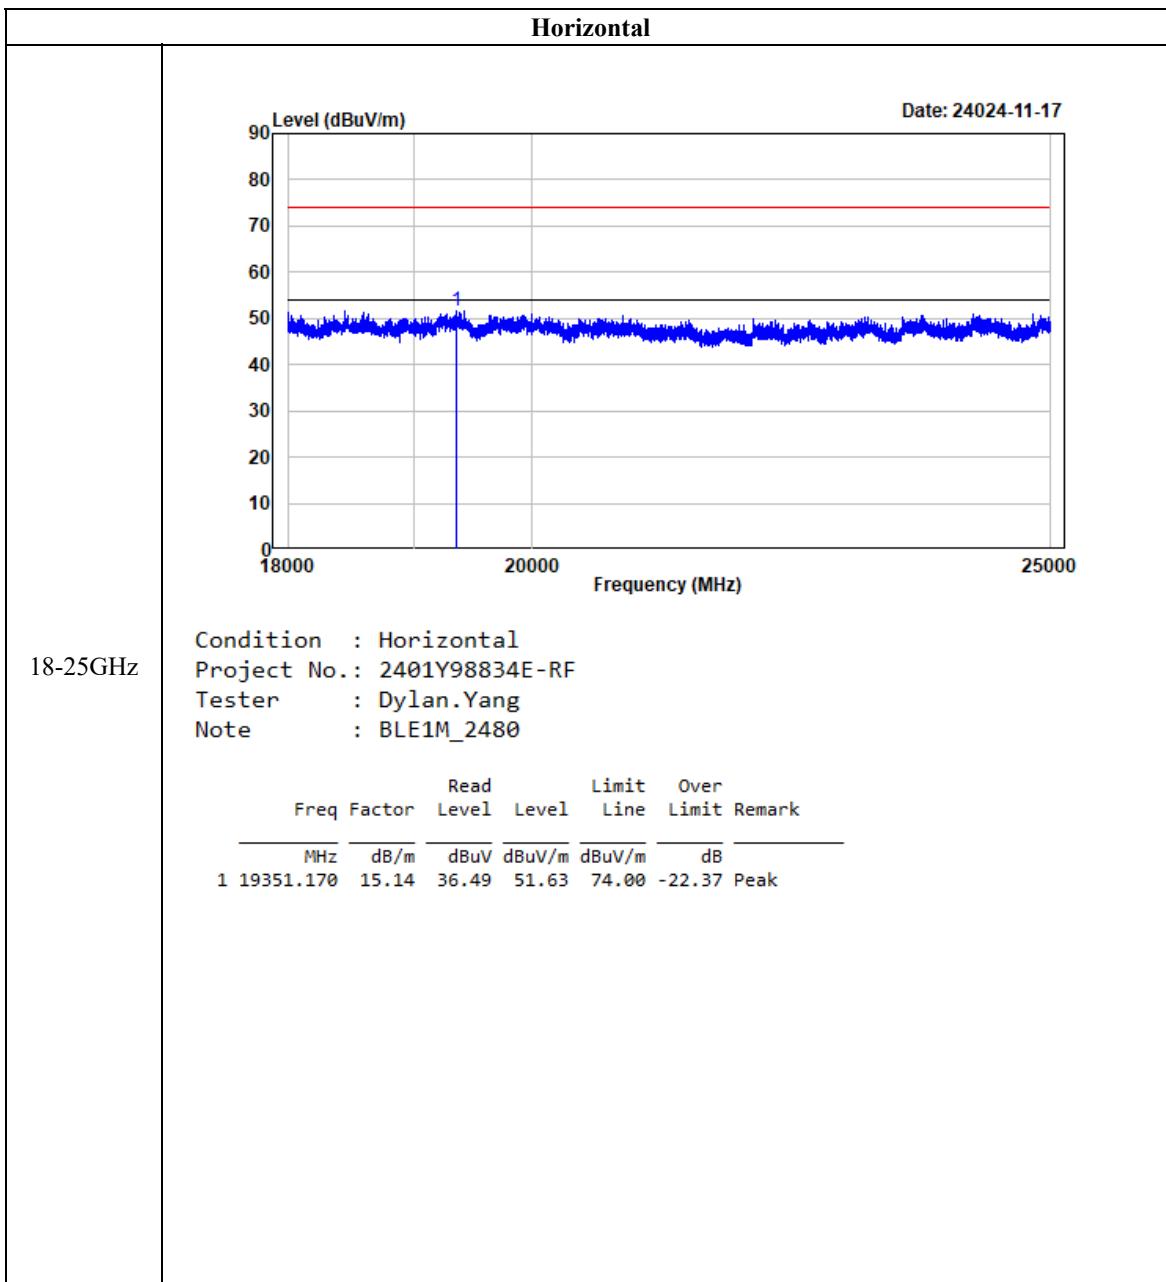


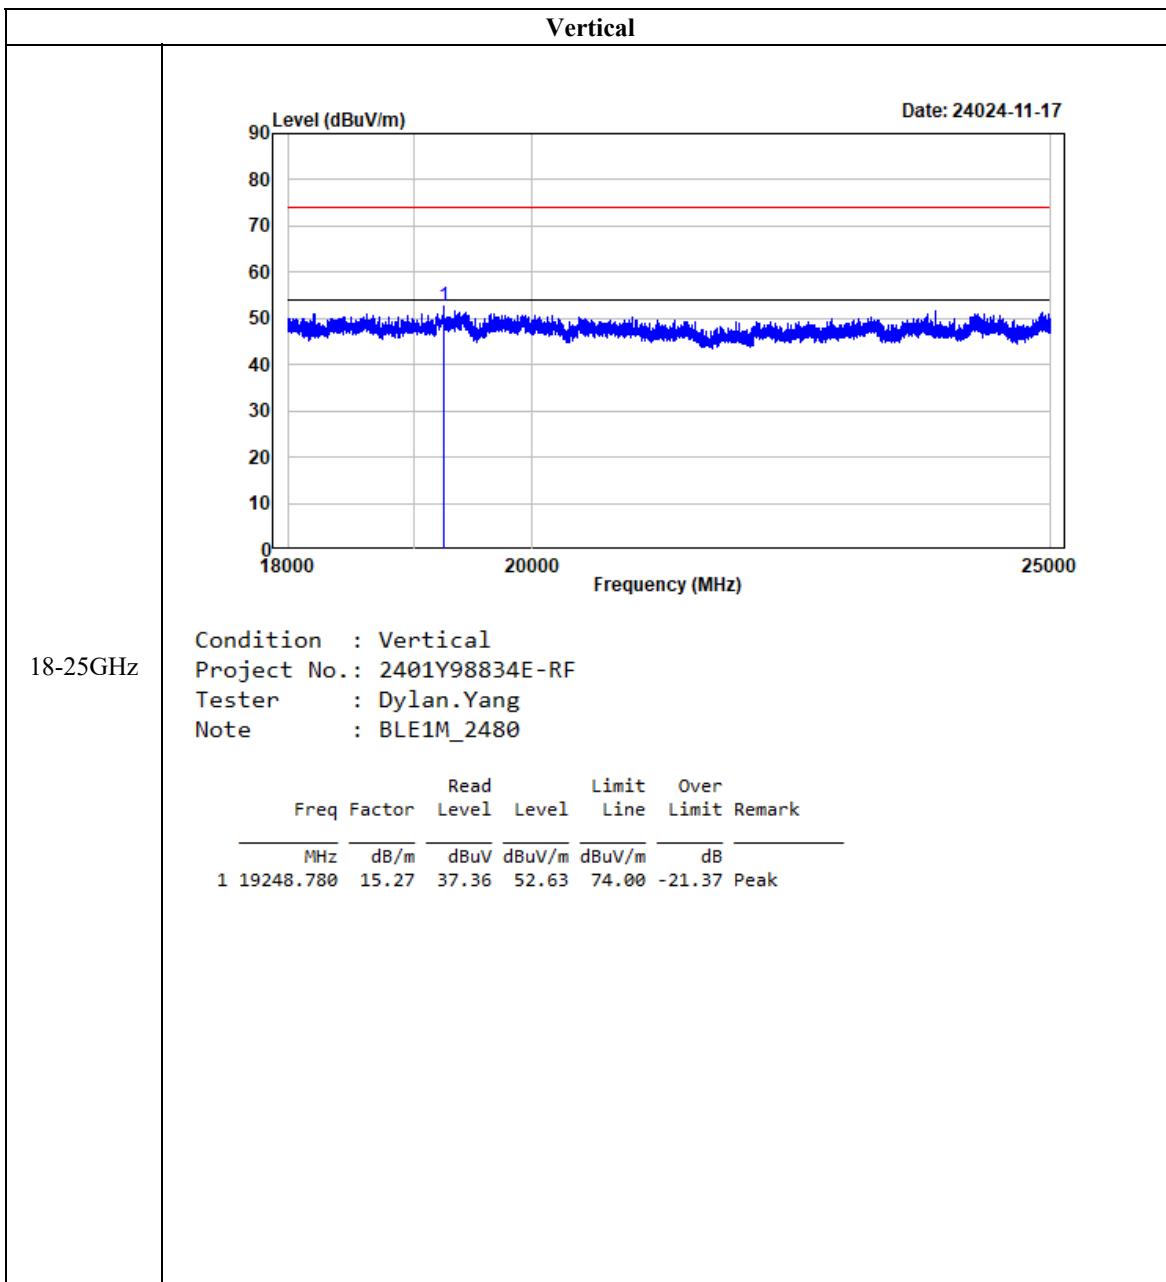



BLE 2M

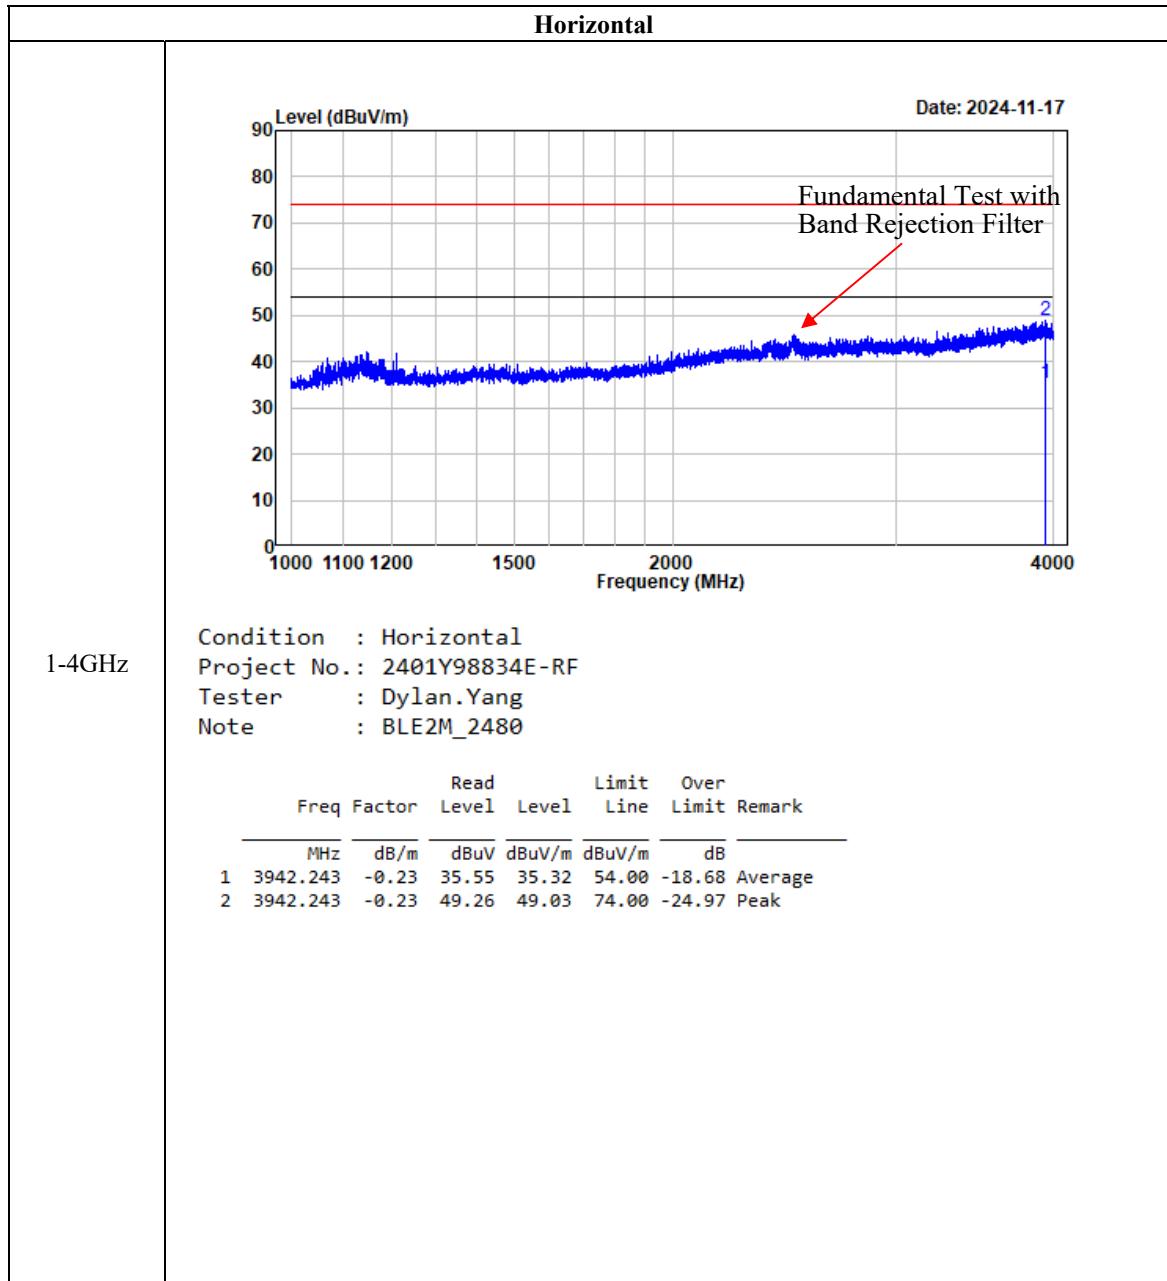

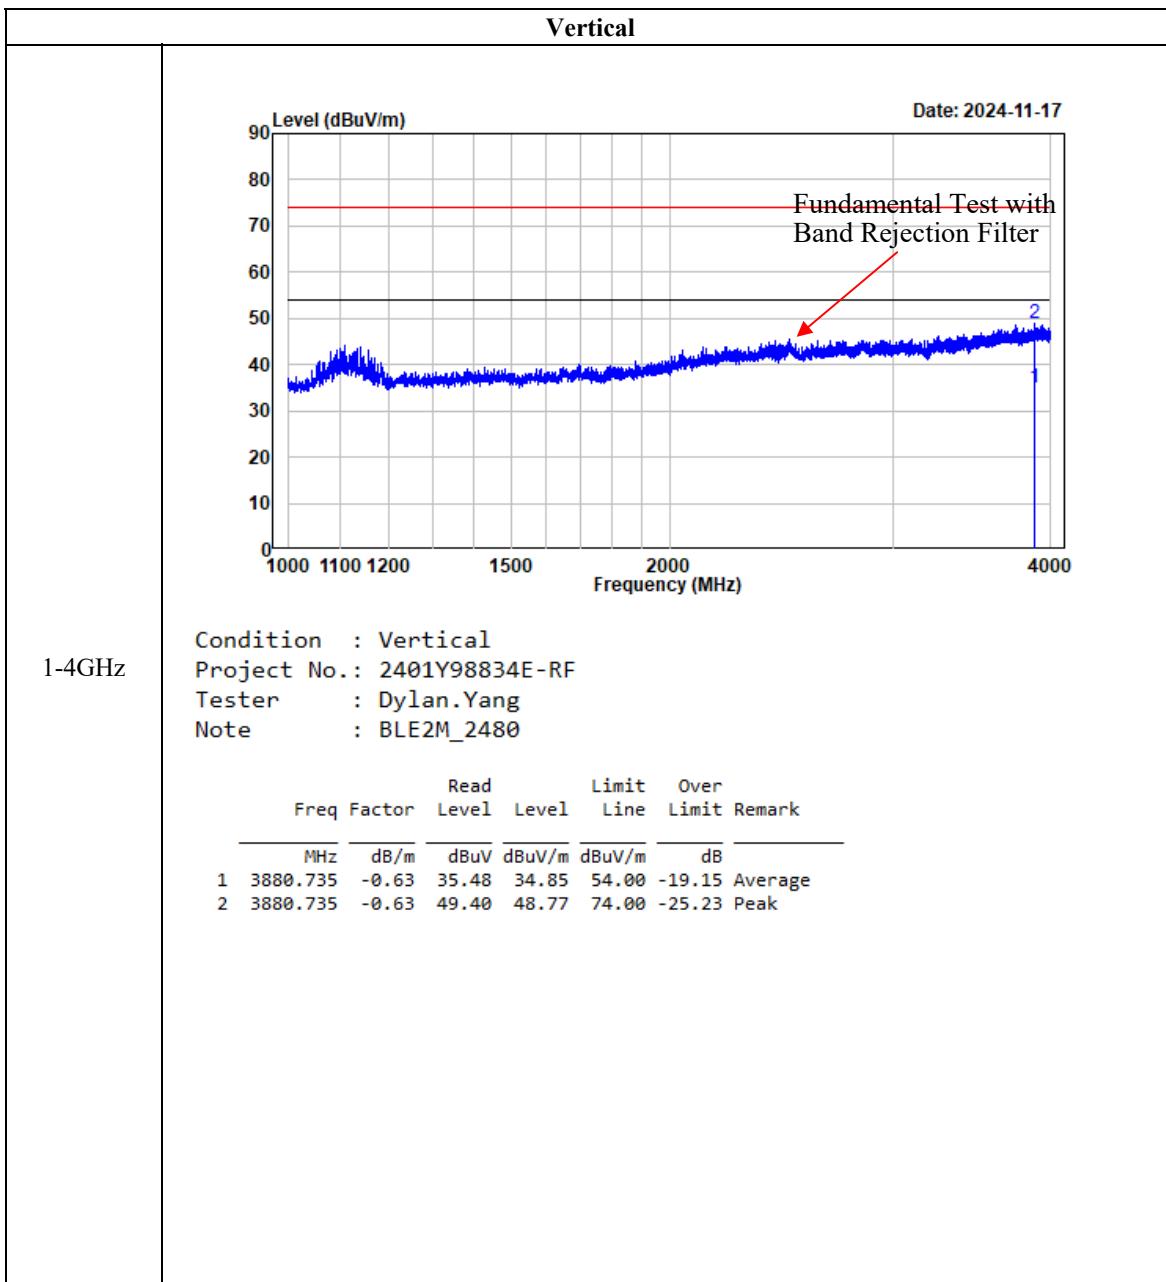


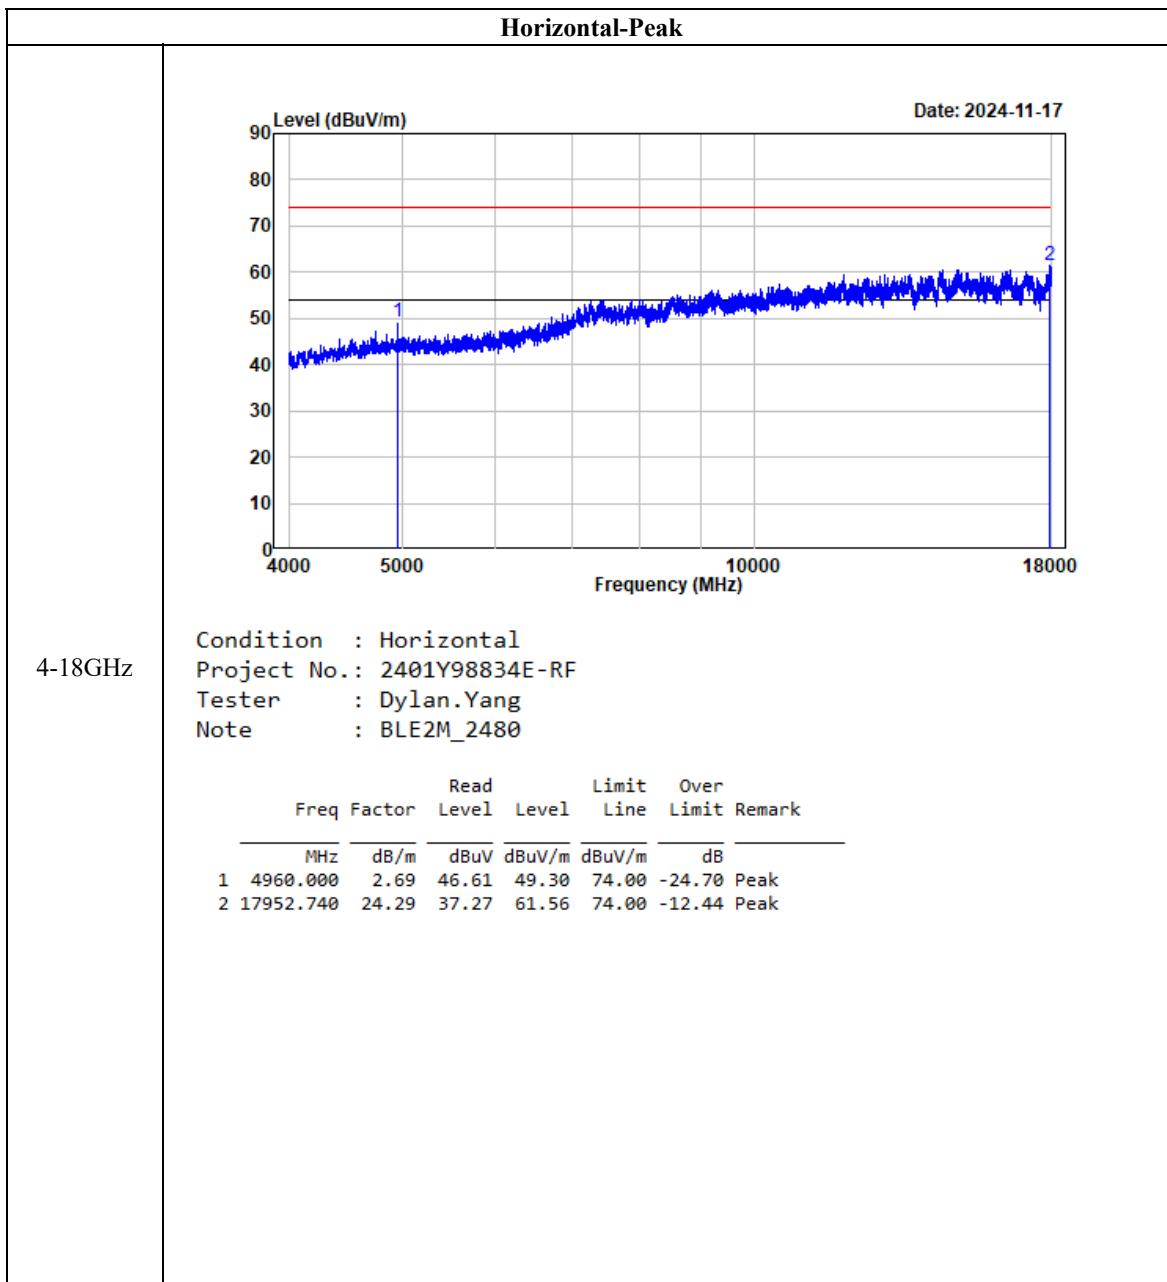

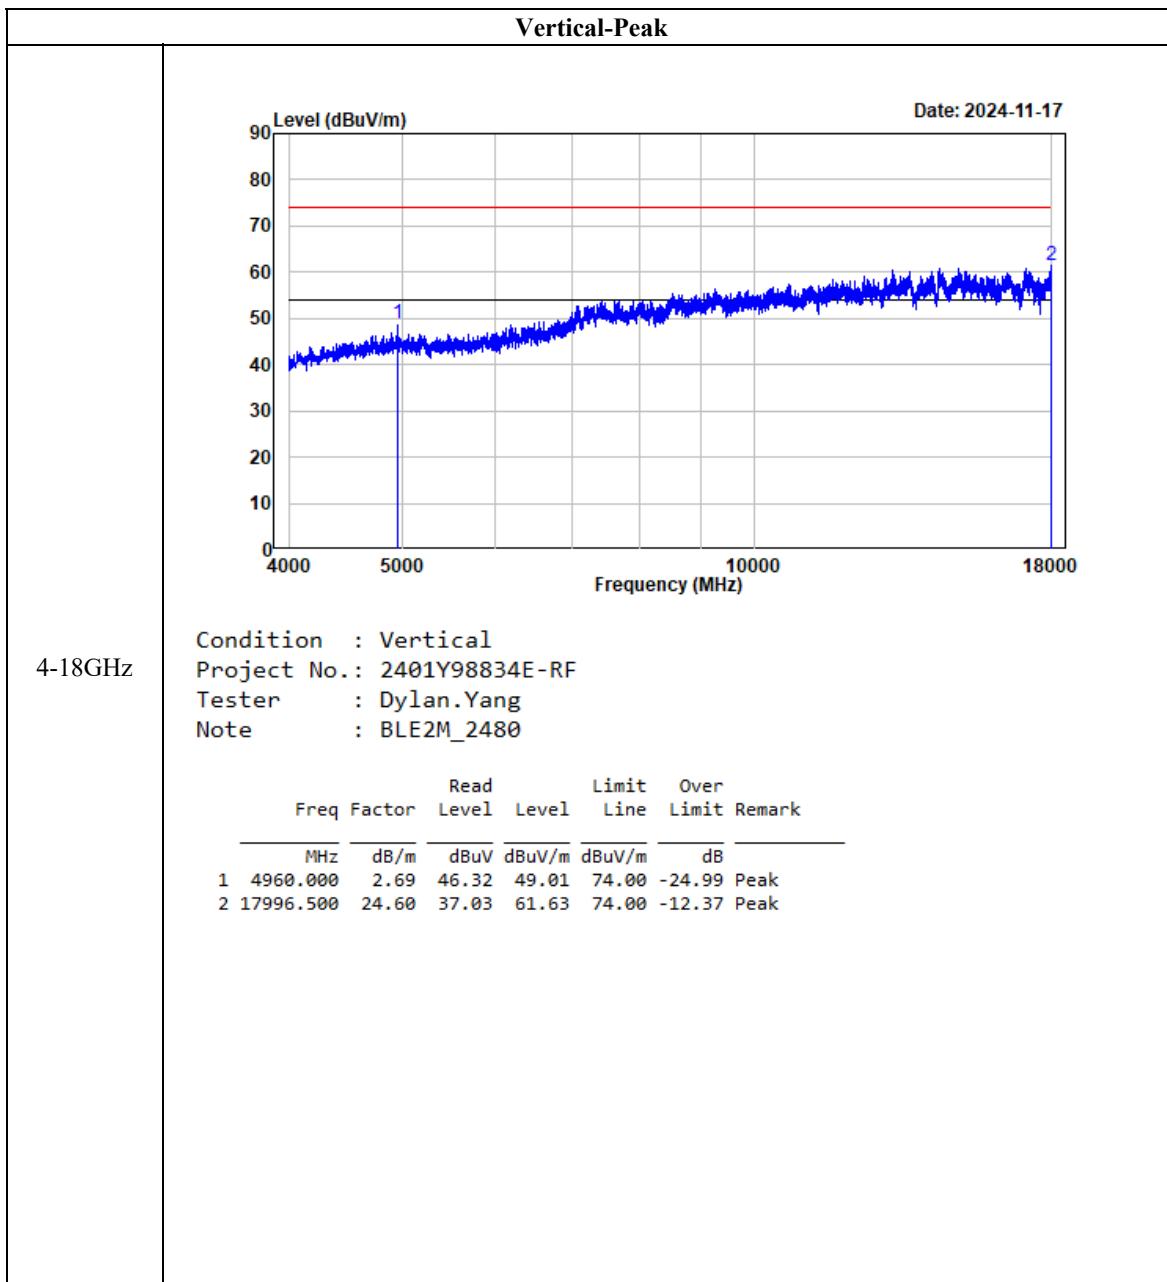


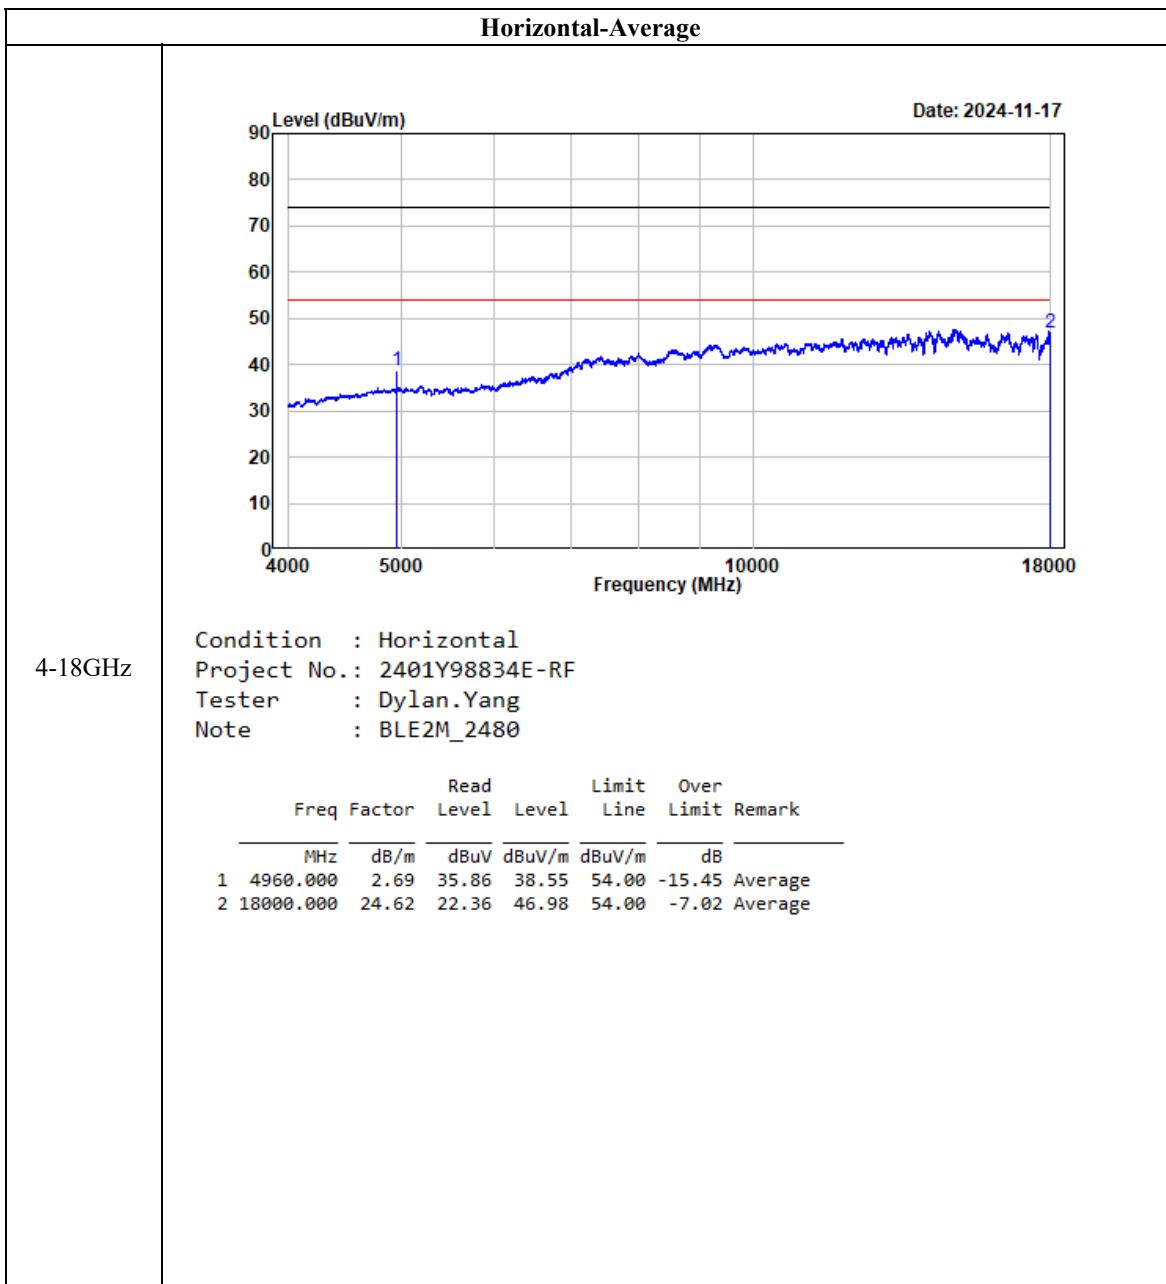


Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

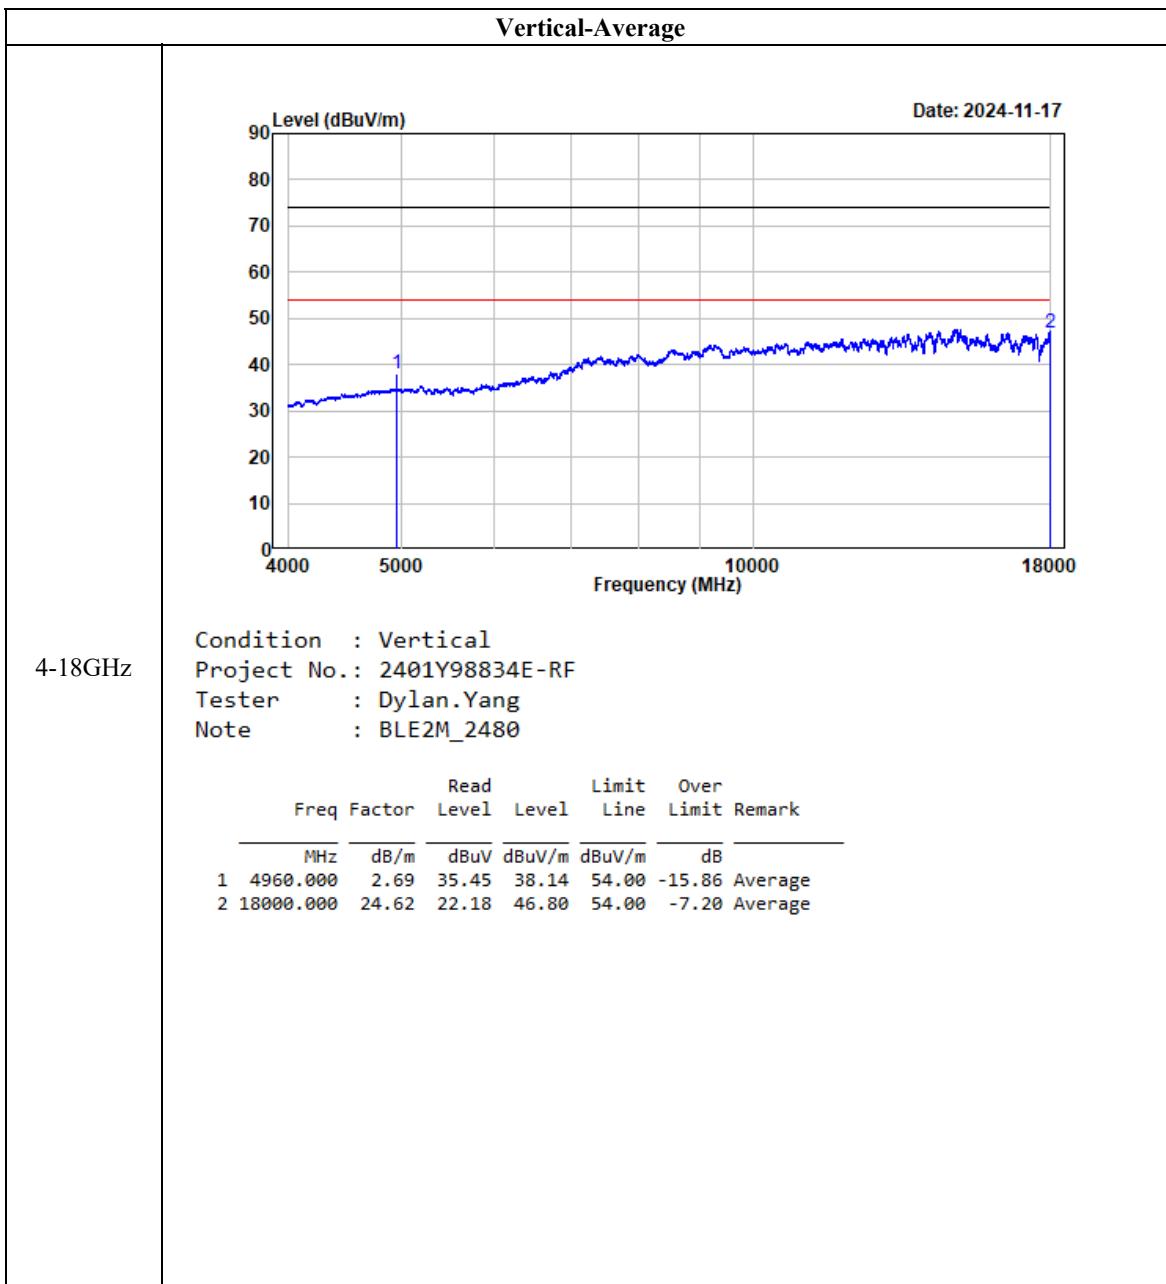

Note: Spectrum Analyzer Setting: RBW=1MHz, VBW=5kHz

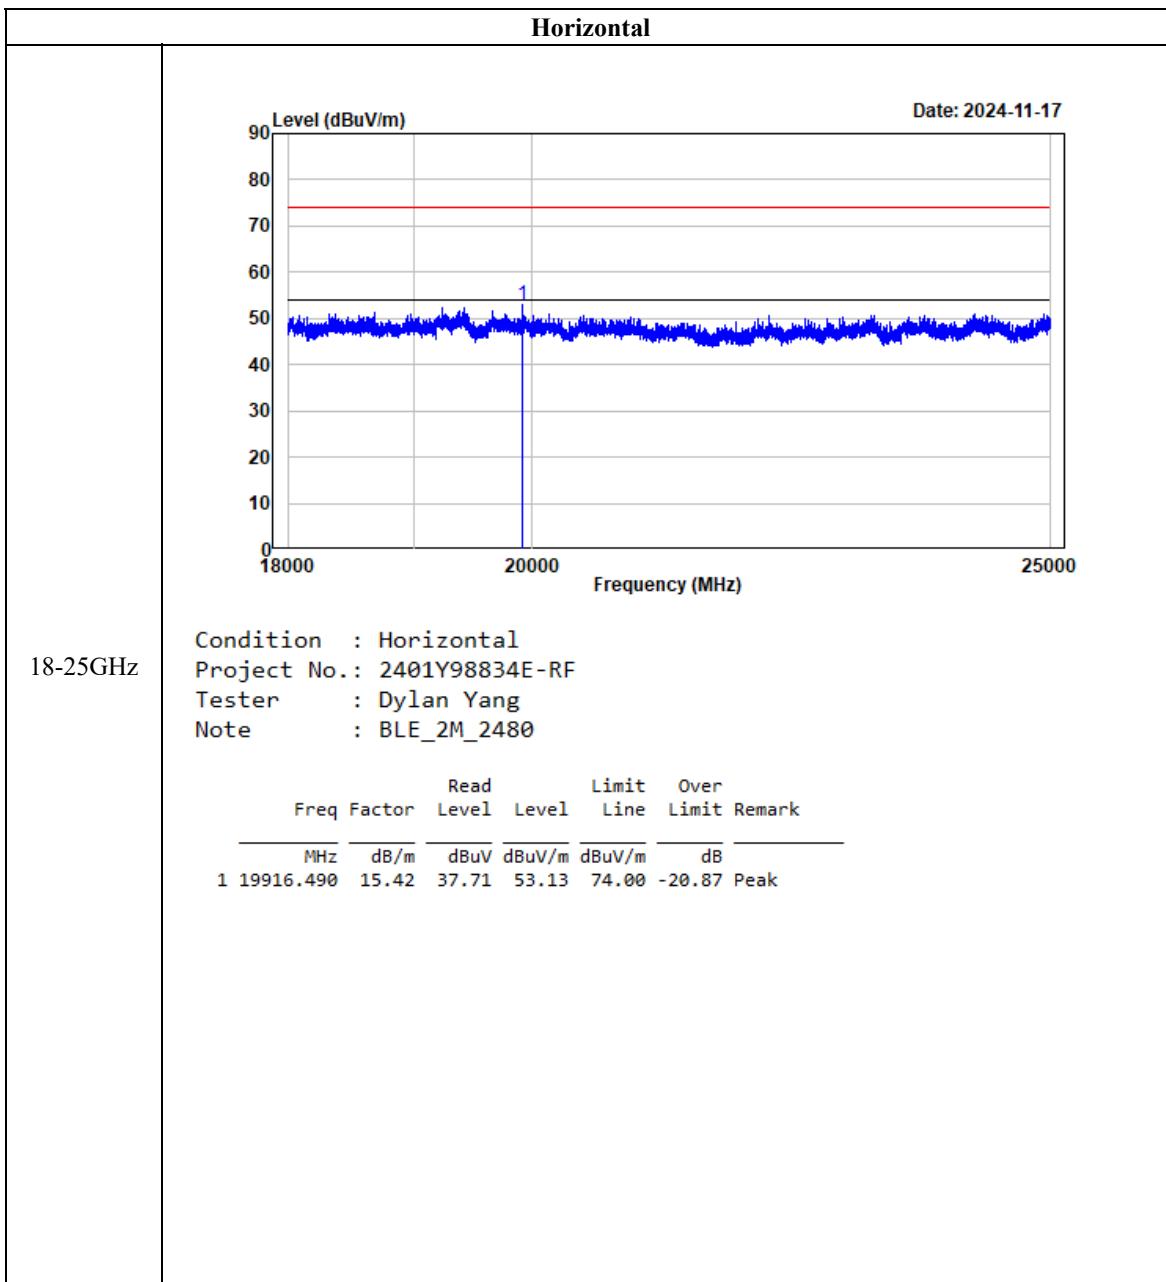

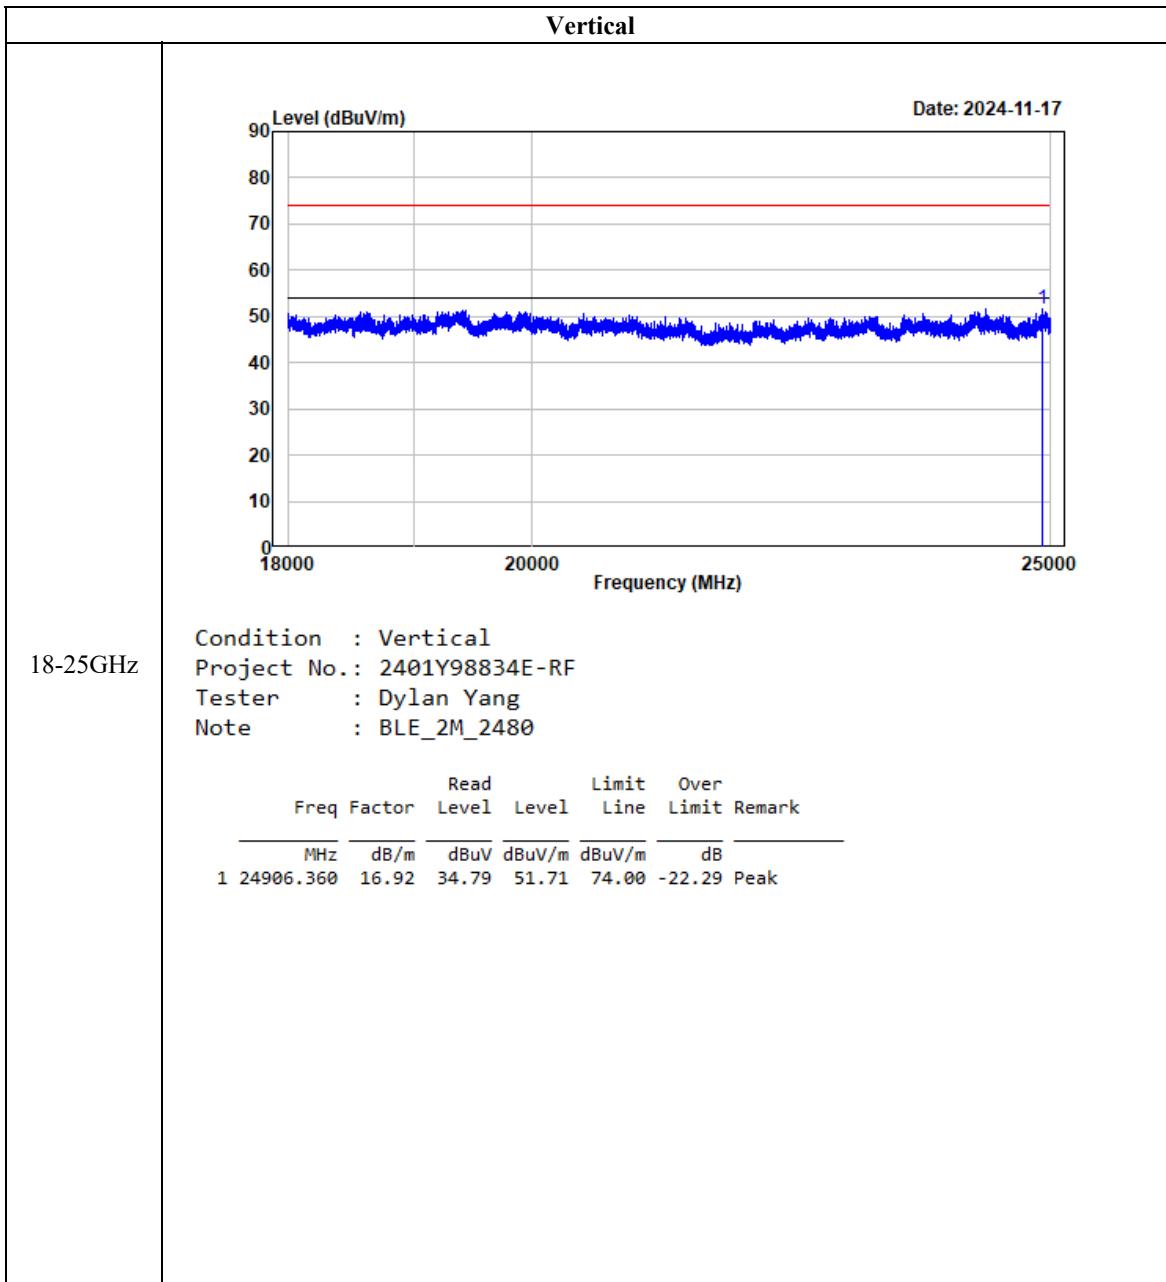

FCC §15.247(a) (2), RSS-GEN § 6.7 & RSS-247 § 5.2 (a) - 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH

Standard Applicable

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).


Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3& RSS-Gen §6.7

- a. Set RBW = 100 kHz.
- b. Set the VBW $\geq [3 \times \text{RBW}]$.
- c. Detector = peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Procedure as below

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW (for RSS rules, VBW shall not be smaller than three times the RBW, unless otherwise specified by the applicable requirement).
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data maybe reported in addition to the plot(s).

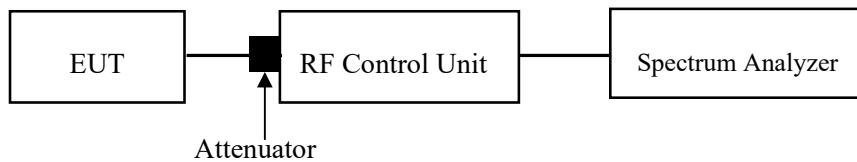

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	57 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-11-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (3), RSS-247 §5.4 (d) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.
4. Set the RBW \geq DTS bandwidth.
5. Set the VBW $\geq [3 \times \text{RBW}]$.
6. Set span $\geq [3 \times \text{RBW}]$.
7. Sweep time = auto couple.
8. Detector = peak.
9. Trace mode = max hold.
10. Allow the trace to stabilize.
11. Use peak marker function to determine the peak amplitude level.

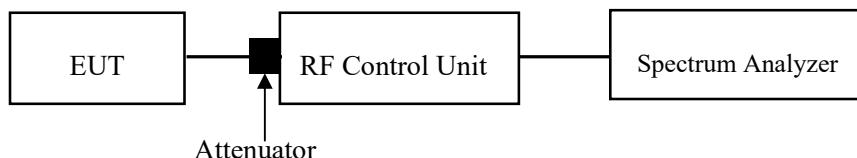

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	57 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-11-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(e), RSS-247 §5.2 (b) – POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


According to RSS-247 §5.2 b):

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power)

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set analyzer center frequency to DTS channel center frequency
3. Set the span to 1.5 times the DTS bandwidth.
4. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{RBW}$.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

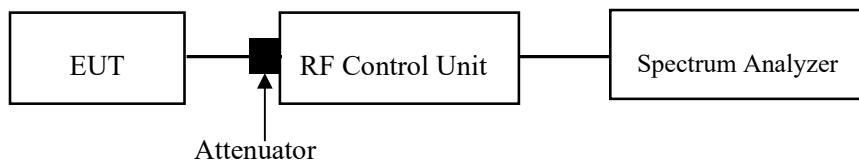

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable loss.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	57 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-11-16.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 §5.5 - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Set the RBW =100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak
4. Sweep time = auto couple.
5. Trace mode=max hold
6. All trace to fully stabilize
7. Use the peak marker function to determine the maximum amplitude level.
Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11.
Report the three highest emissions relative to the limit.

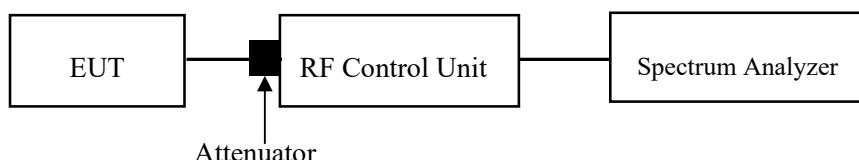

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	57 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-11-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

DUTY CYCLE


Duty Cycle

Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

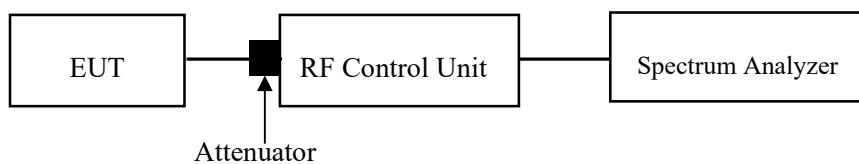

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	57 %
ATM Pressure:	101 kPa

The testing was performed by Navilite Cai on 2024-11-16.

EUT operation mode: Transmitting

Test Result: Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment 2401Y98834E-RF External photo and 2401Y98834E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Y98834E-RF Test Setup photo.


APPENDIX


Appendix A: DTS Bandwidth


Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.65	0.5	PASS
		2440	0.65	0.5	PASS
		2480	0.65	0.5	PASS
BLE_2M	Ant1	2402	1.13	0.5	PASS
		2440	1.13	0.5	PASS
		2480	1.14	0.5	PASS

Test Graphs

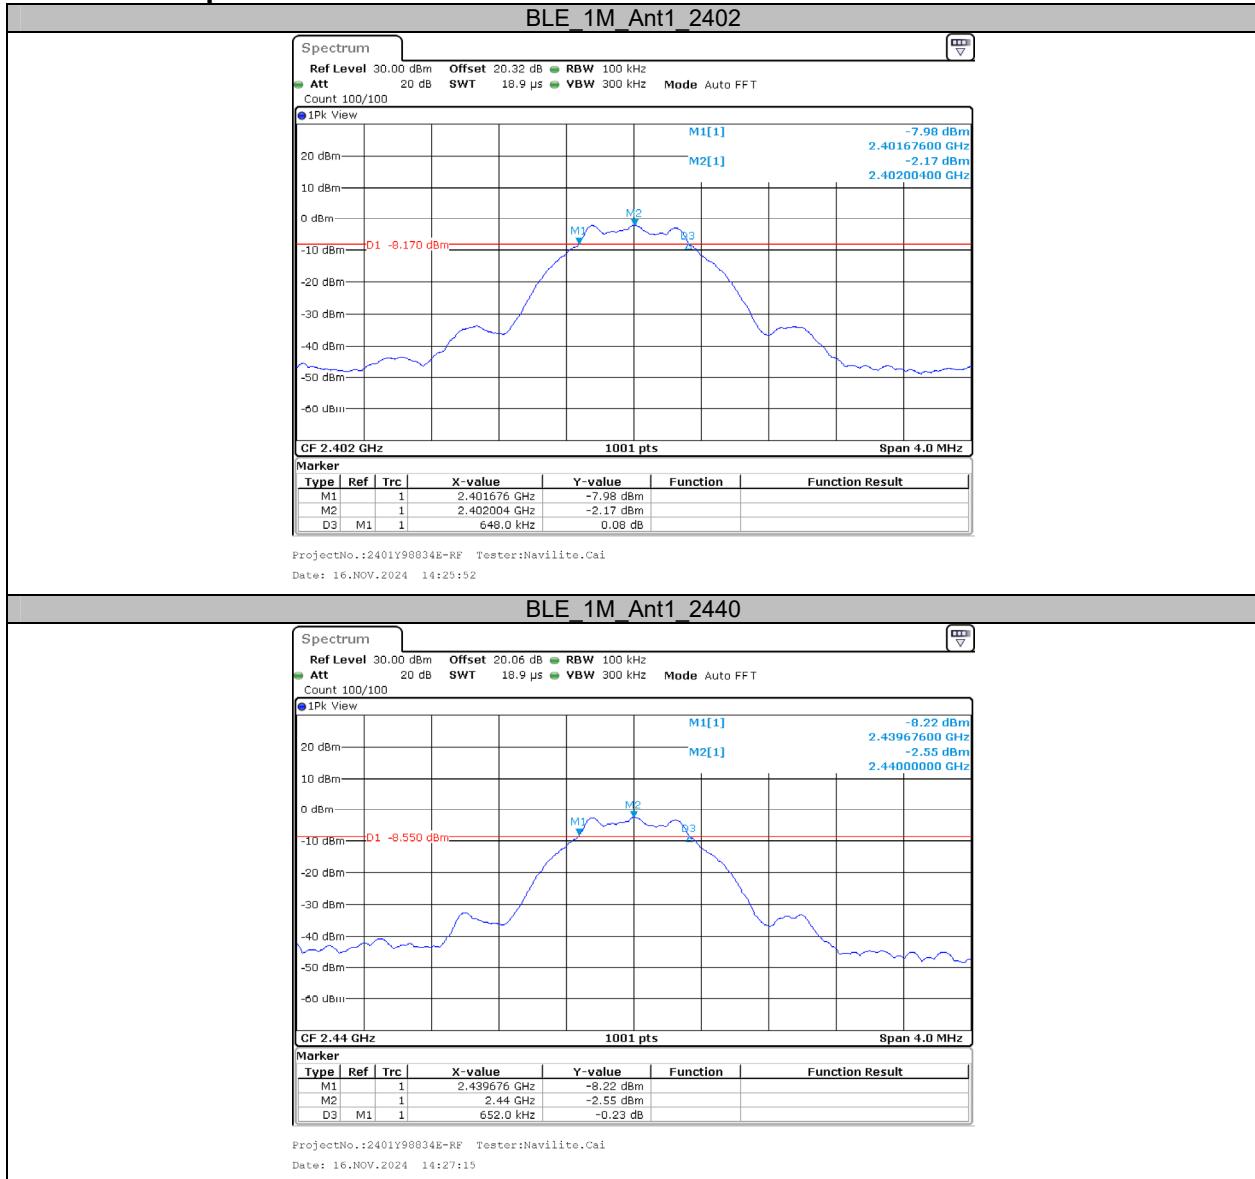

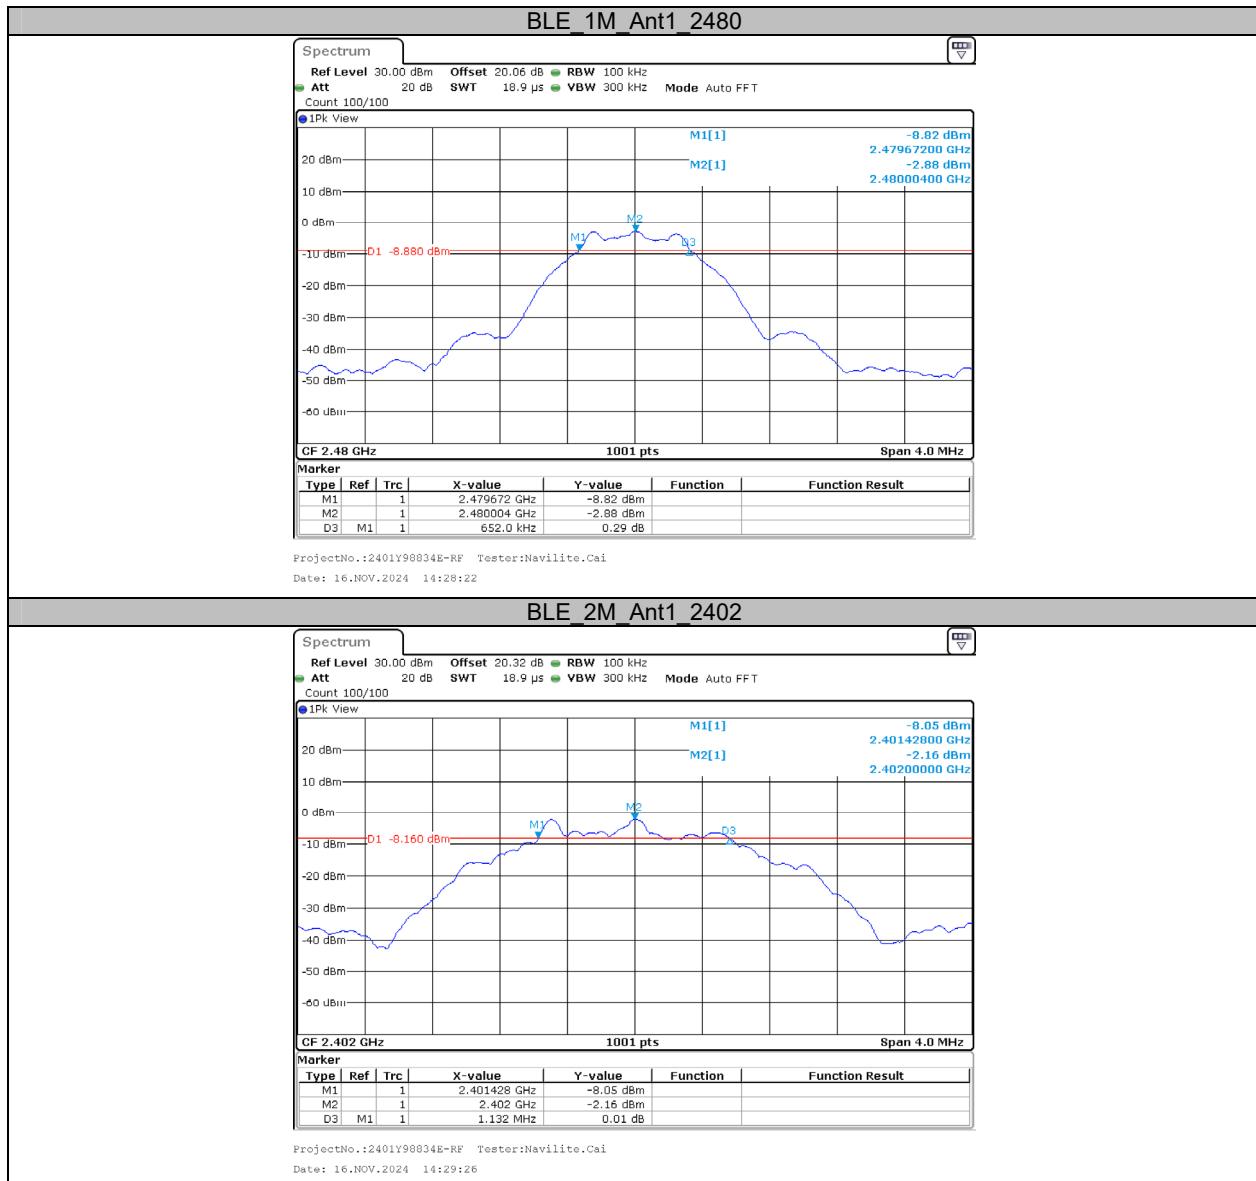


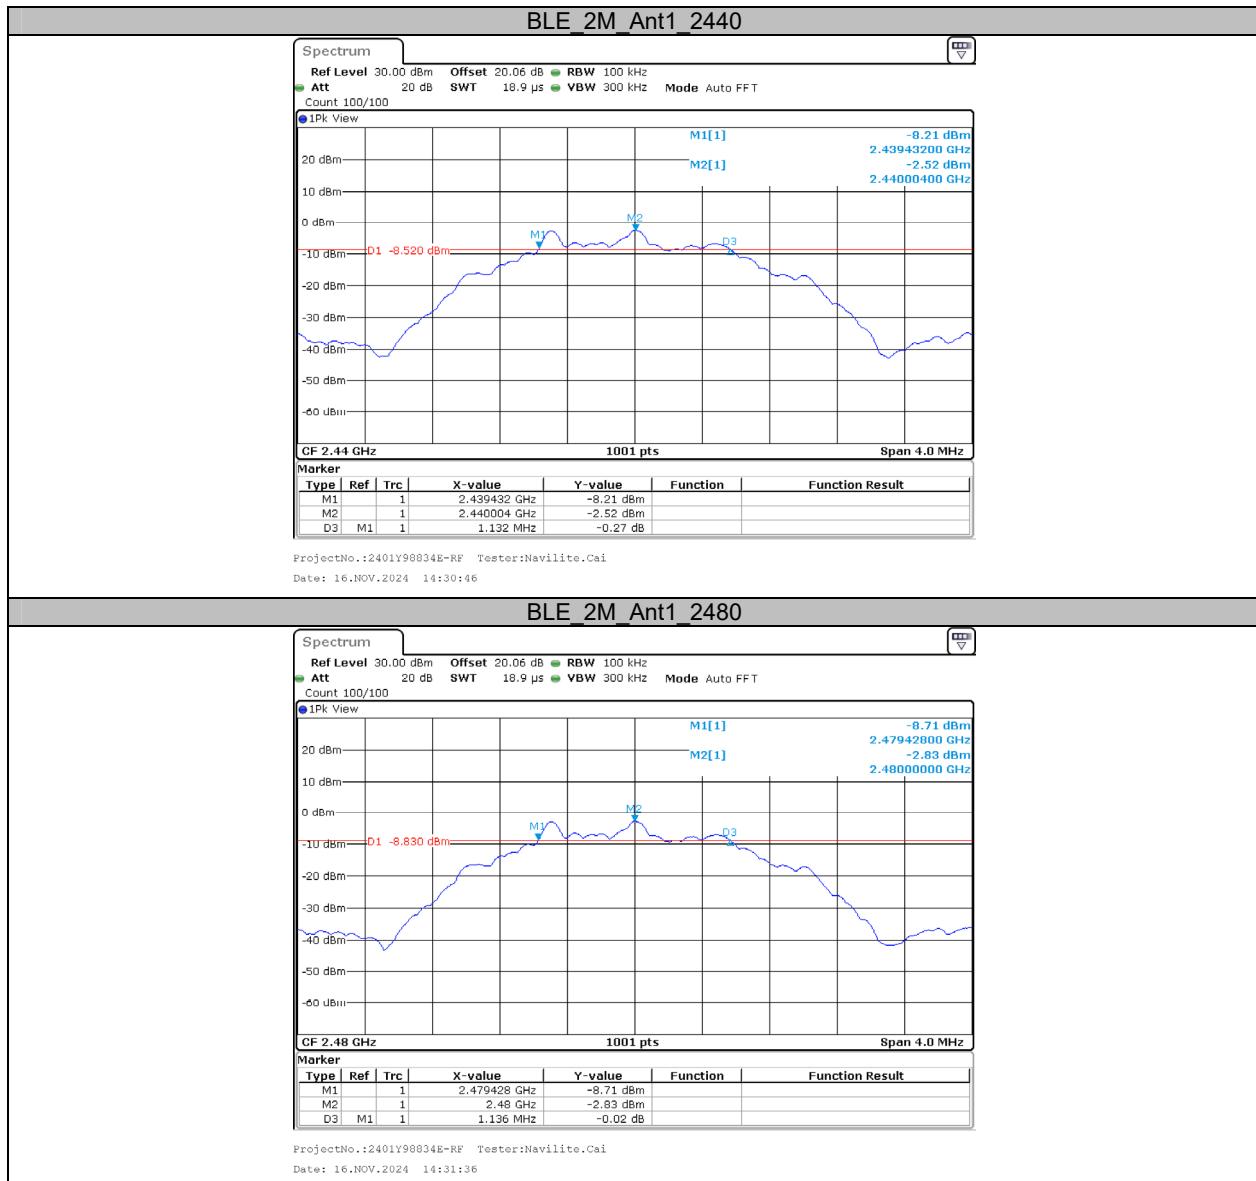



Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.010	---	---
		2440	1.010	---	---
		2480	1.010	---	---
BLE_2M	Ant1	2402	2.006	---	---
		2440	2.014	---	---
		2480	2.010	---	---

Test Graphs

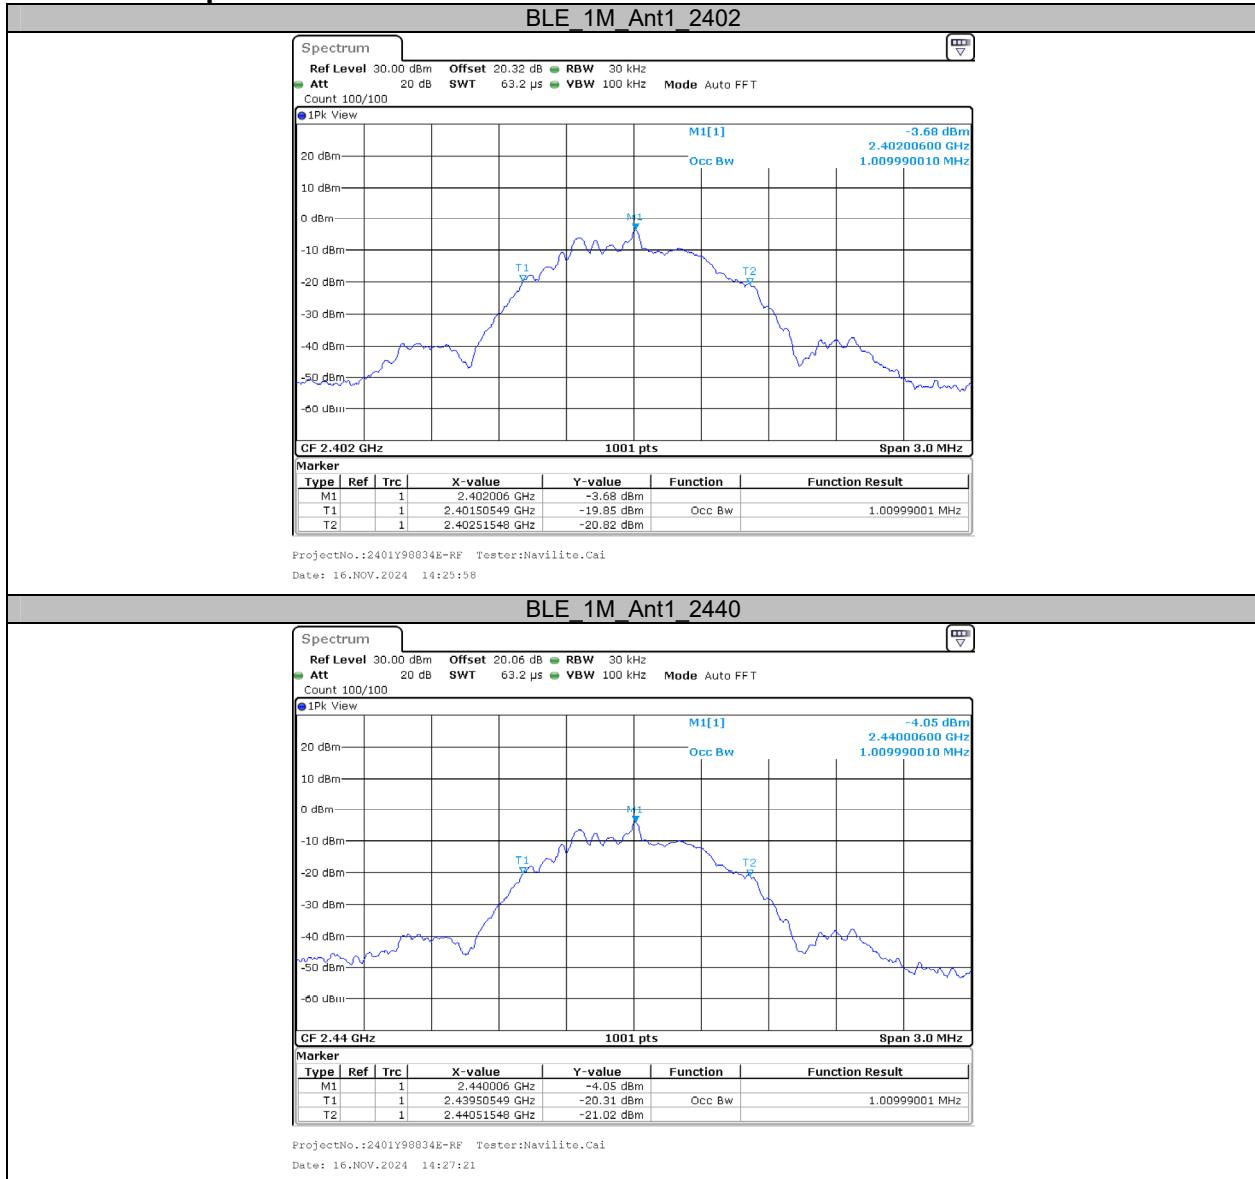

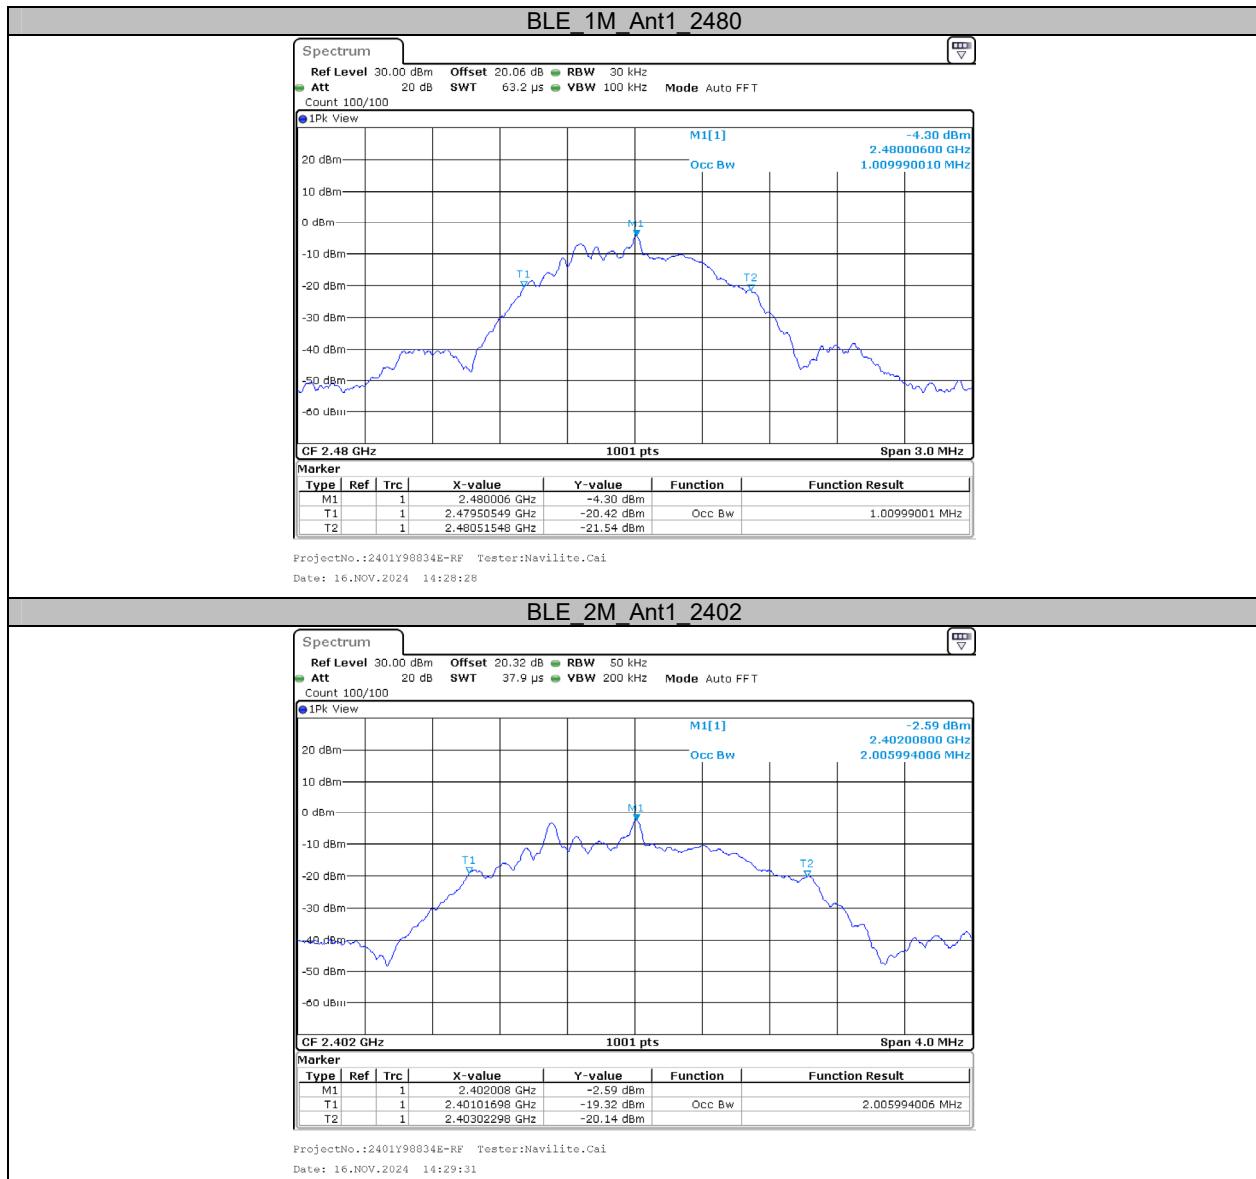

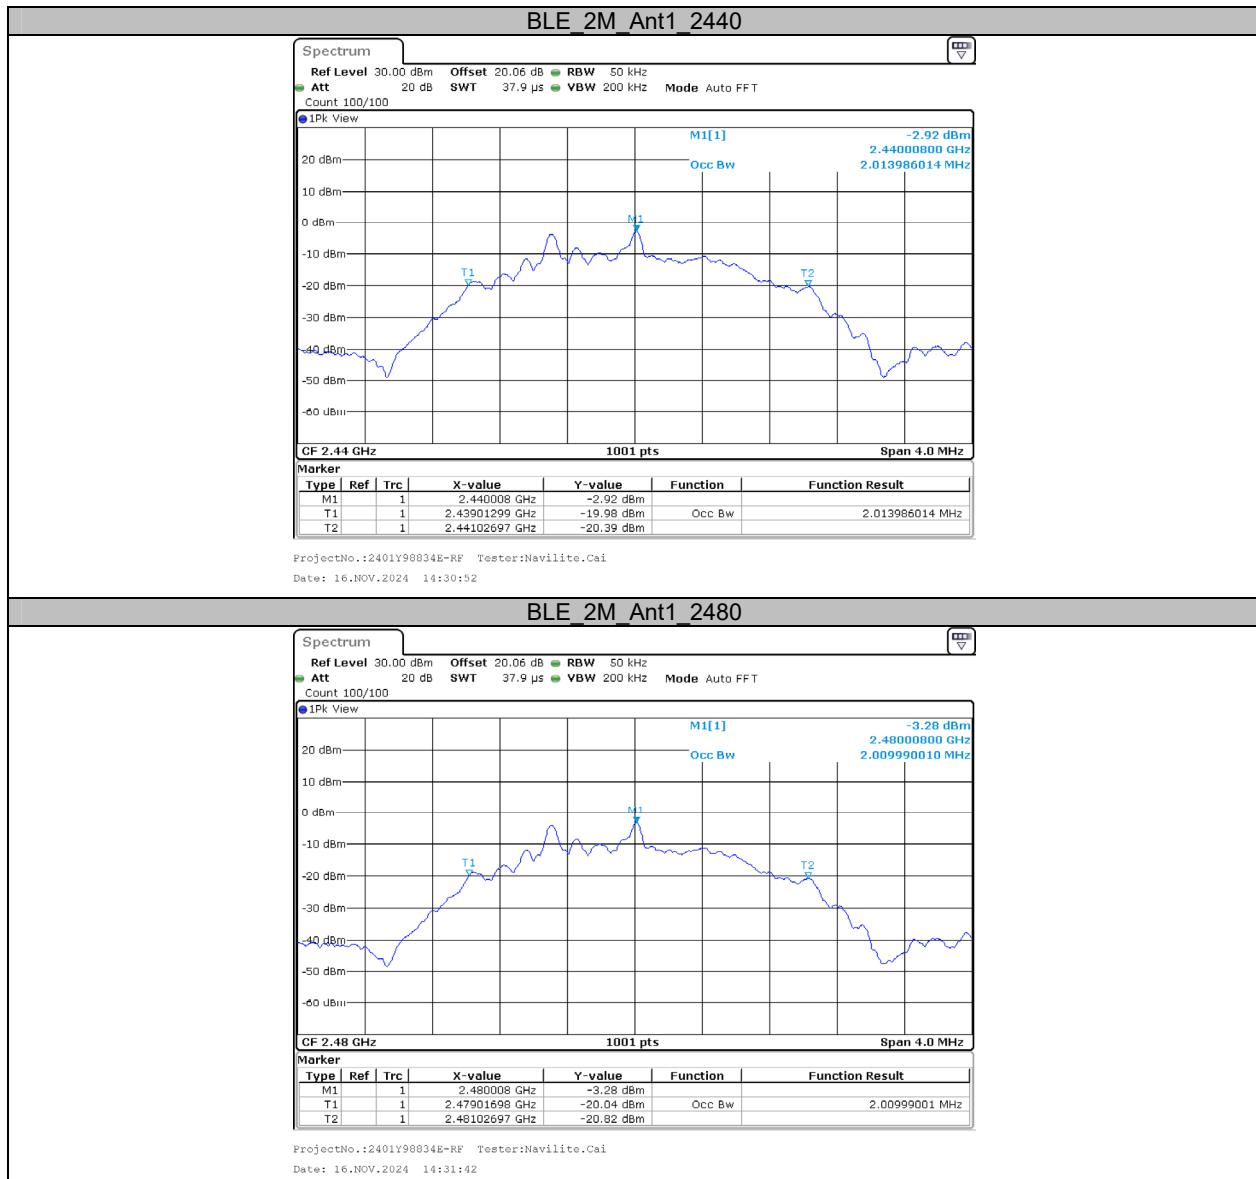



Appendix C: Maximum conducted output power


Test Result

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Peak Power Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
BLE_1M	Ant1	2402	-1.97	≤30	3.23	≤36	PASS
		2440	-2.25	≤30	2.95	≤36	PASS
		2480	-2.58	≤30	2.62	≤36	PASS
BLE_2M	Ant1	2402	-2.01	≤30	3.19	≤36	PASS
		2440	-2.19	≤30	3.01	≤36	PASS
		2480	-2.60	≤30	2.60	≤36	PASS

Test Graphs Peak

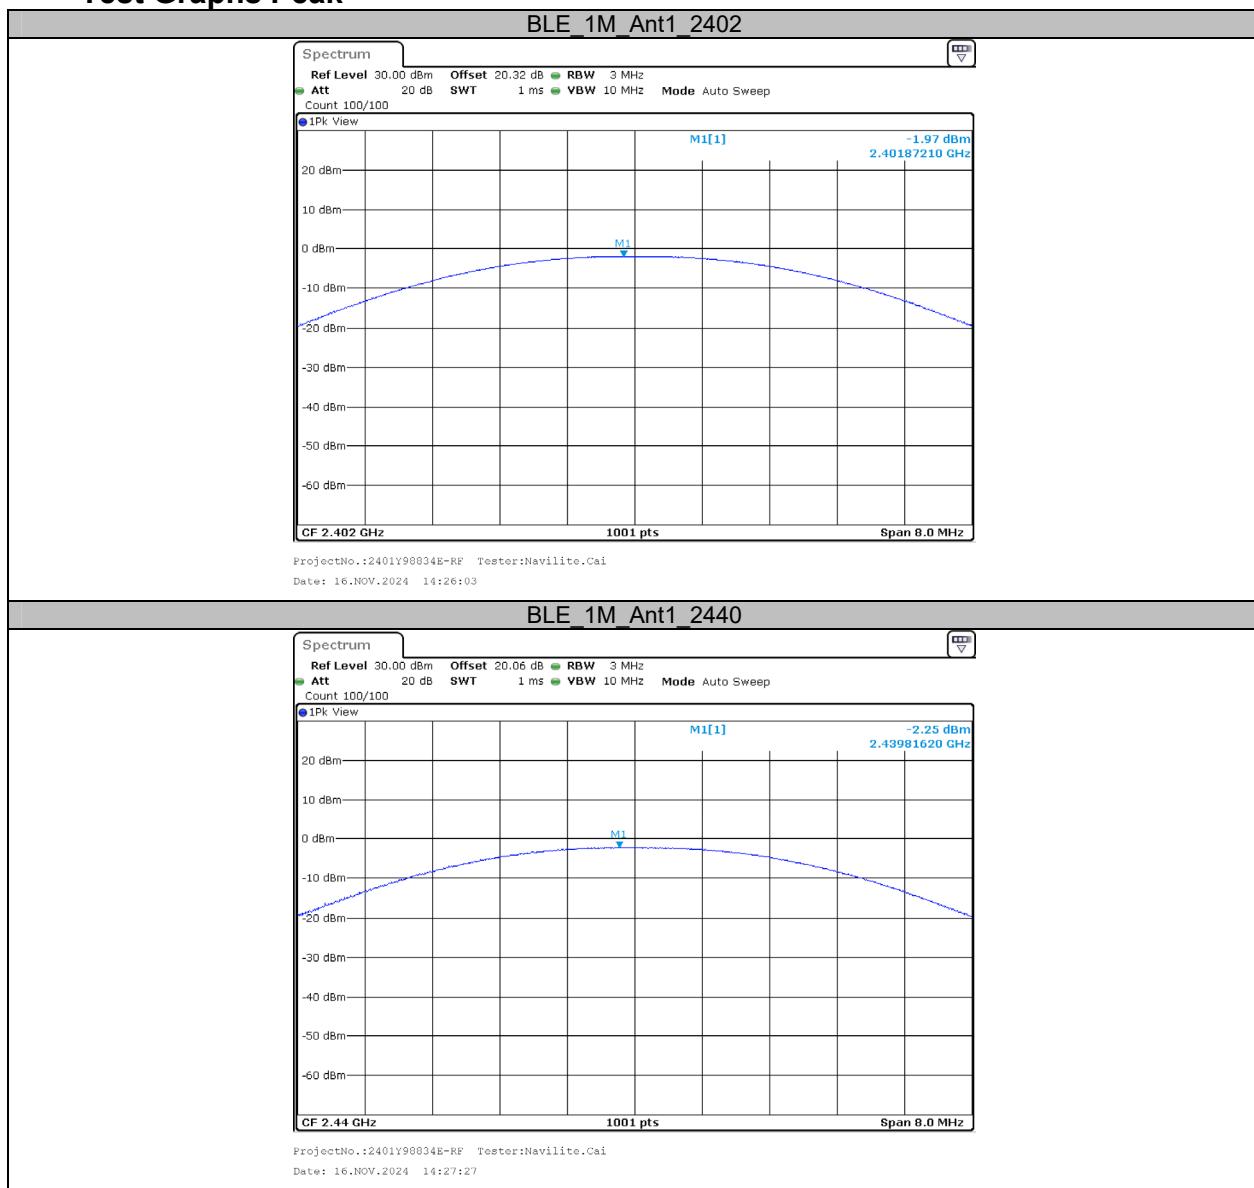

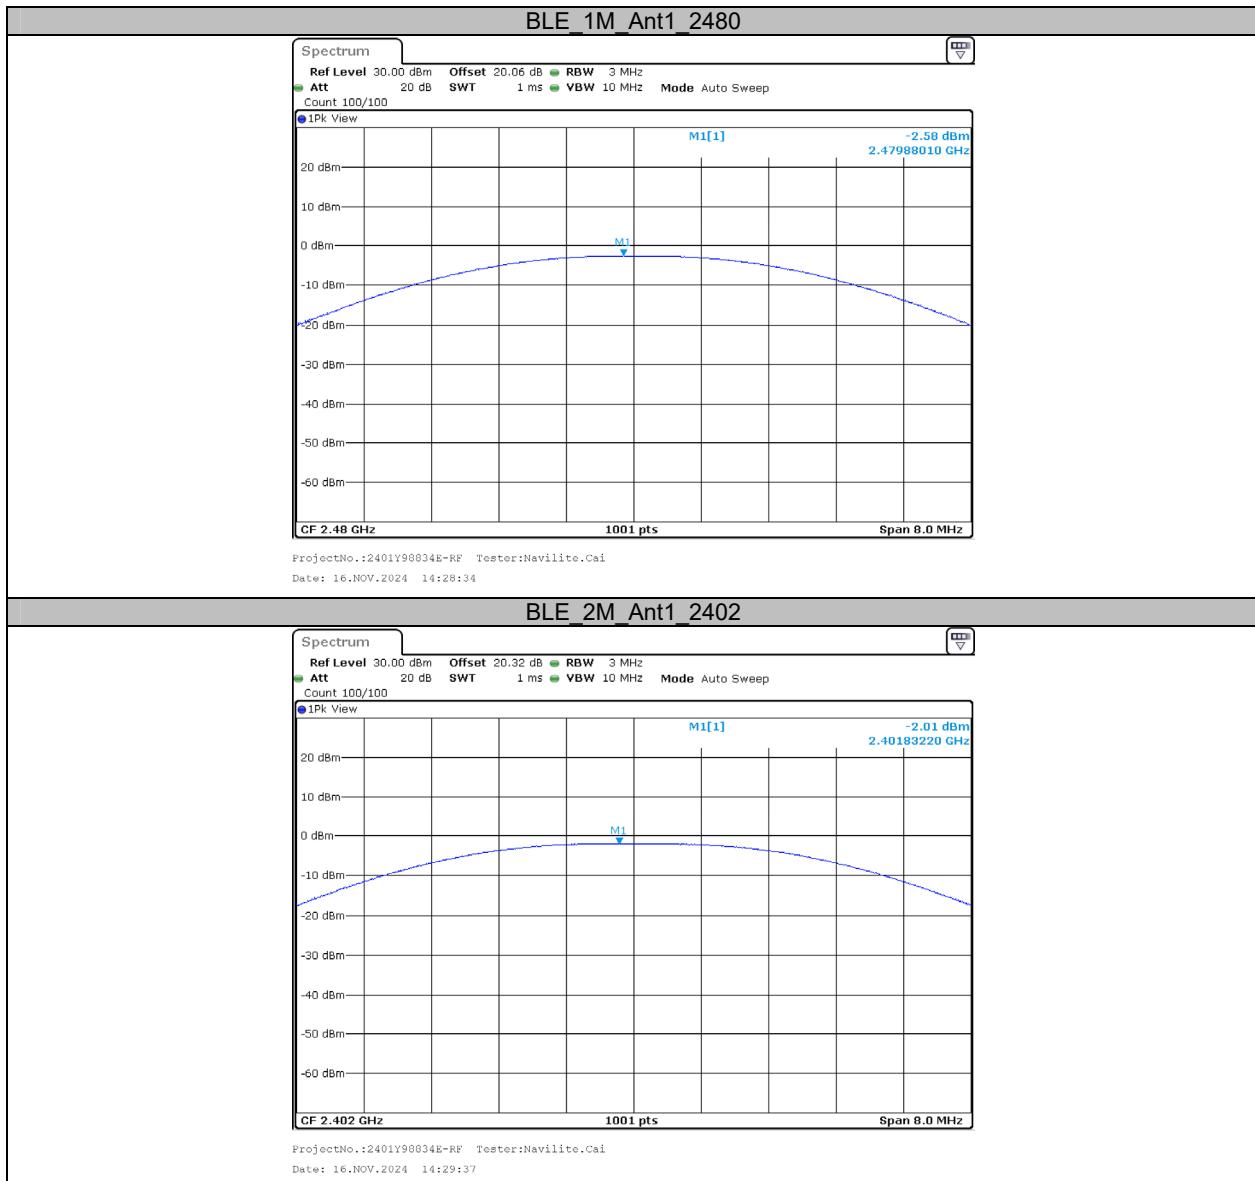


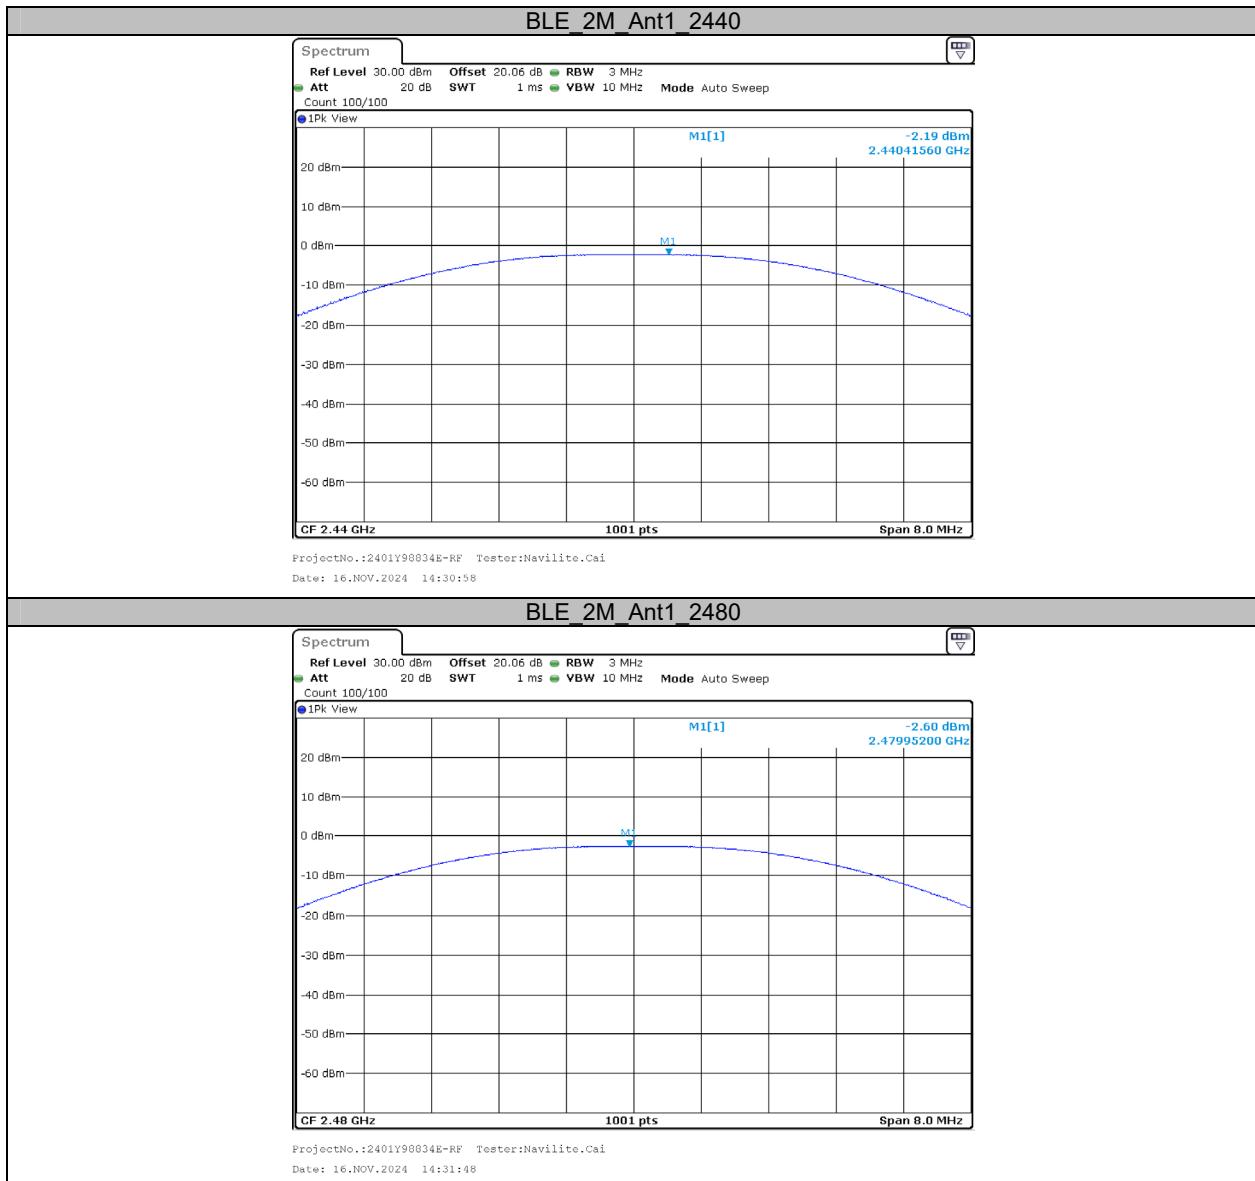



Appendix D: Maximum power spectral density**Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-17.71	≤8.00	PASS
		2440	-17.88	≤8.00	PASS
		2480	-18.24	≤8.00	PASS
BLE_2M	Ant1	2402	-19.04	≤8.00	PASS
		2440	-18.93	≤8.00	PASS
		2480	-19.60	≤8.00	PASS

Test Graphs

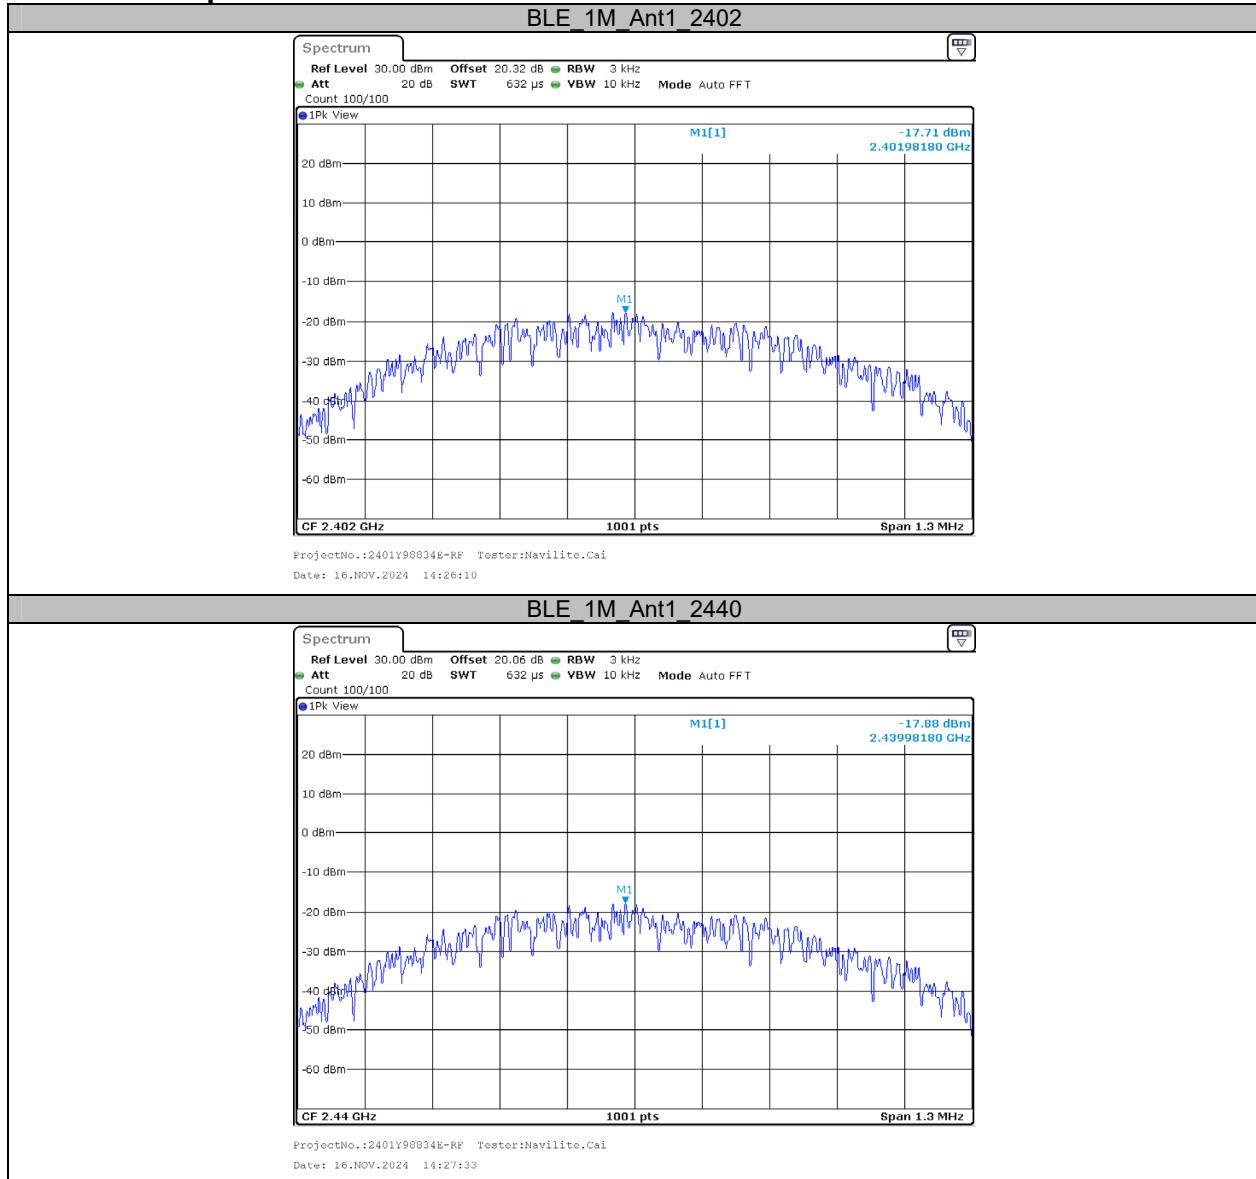


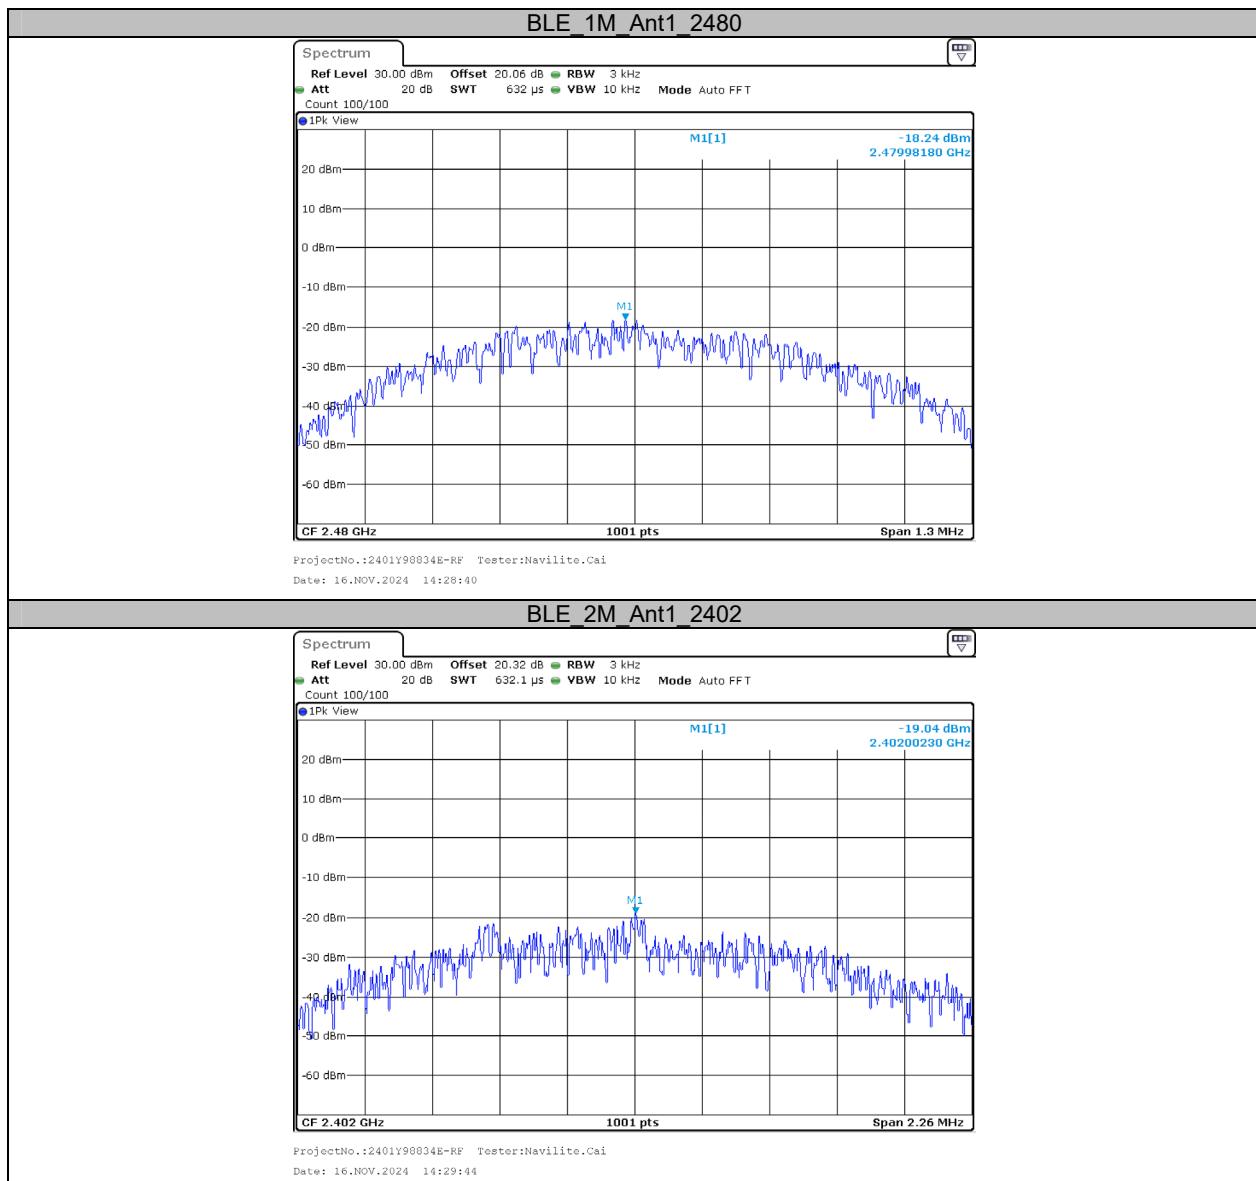


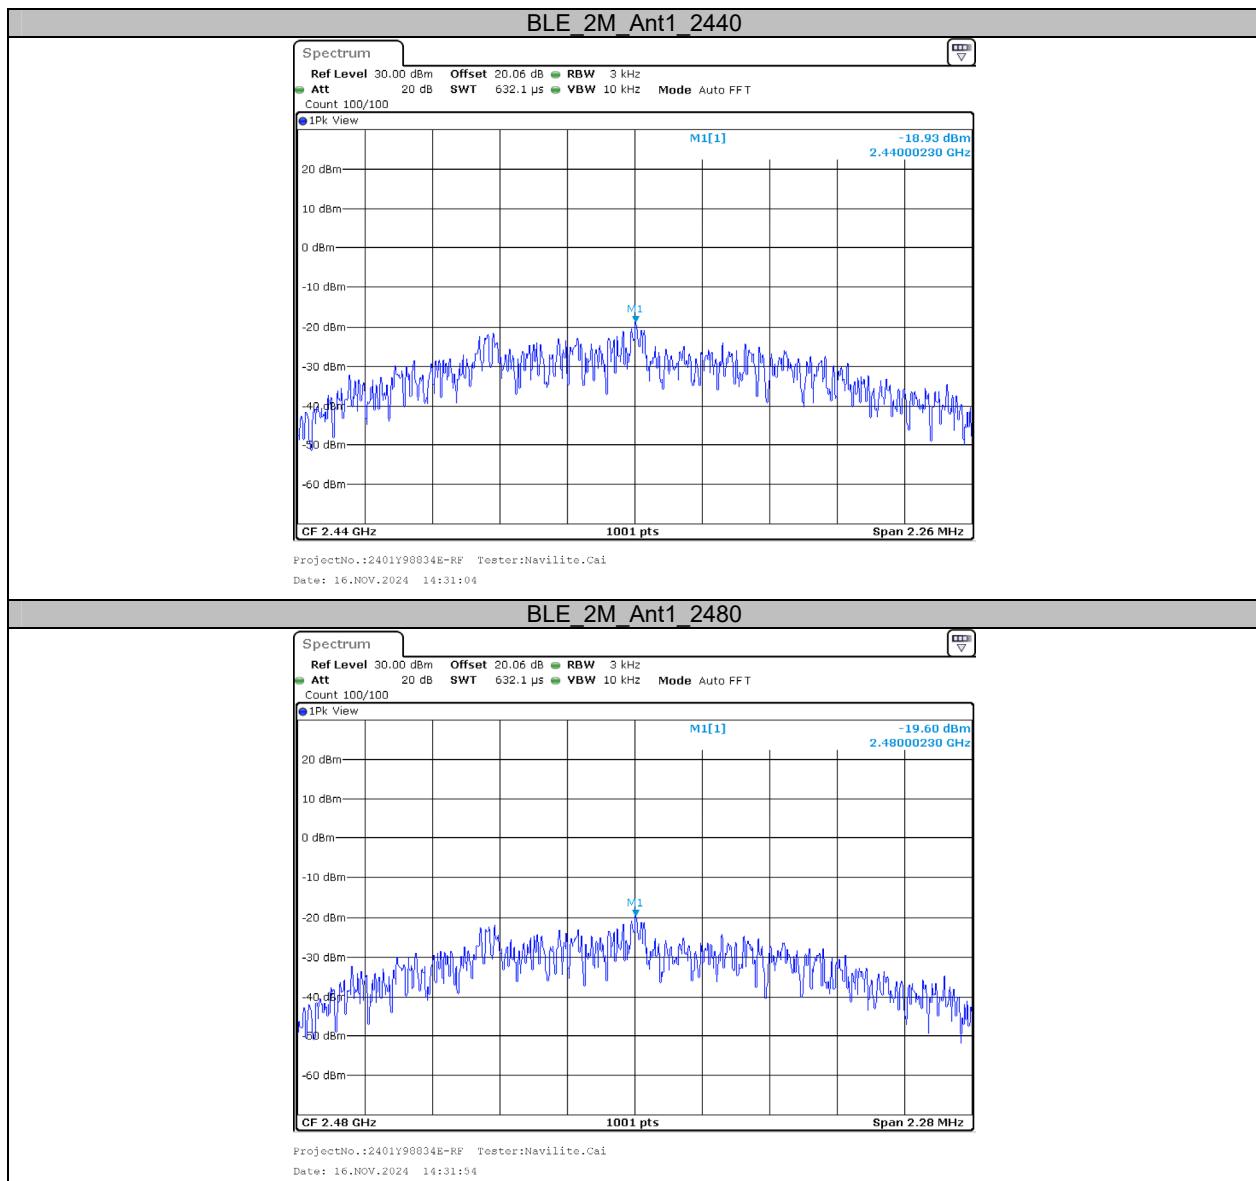

Appendix E: Band edge measurements

Test Graphs

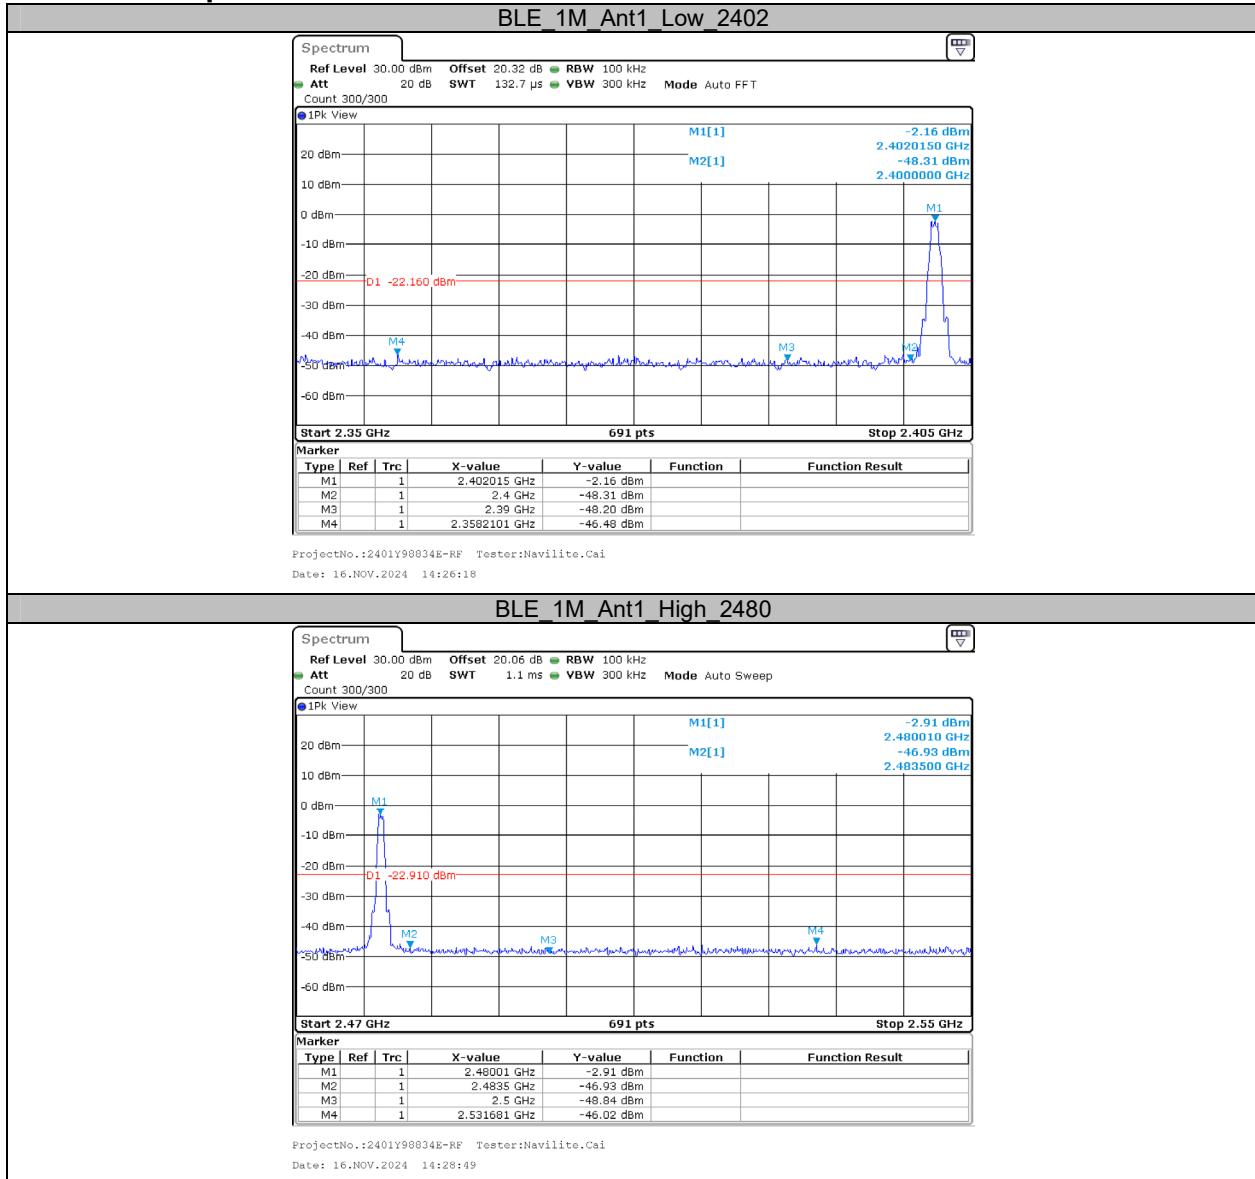


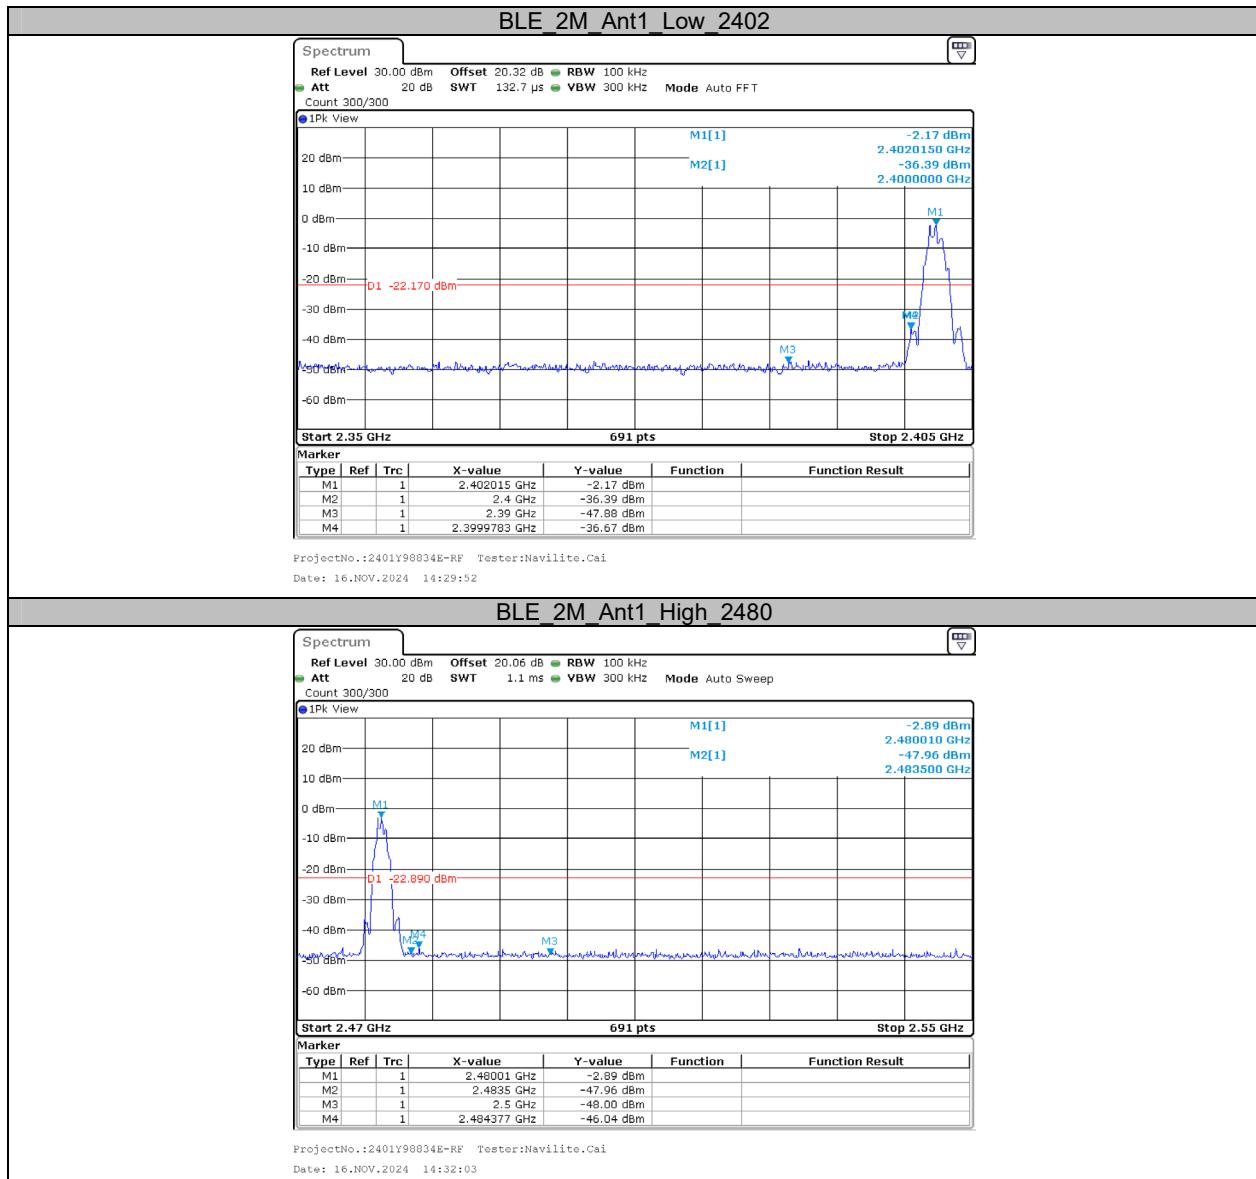

Appendix F: Duty Cycle**Test Result**

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T [HZ]	VBW Setting (Hz)
BLE_1M	Ant1	2440	0.41	0.62	66.13	2349	3000
BLE_2M	Ant1	2440	0.23	0.63	36.51	4348	5000

Test Graphs

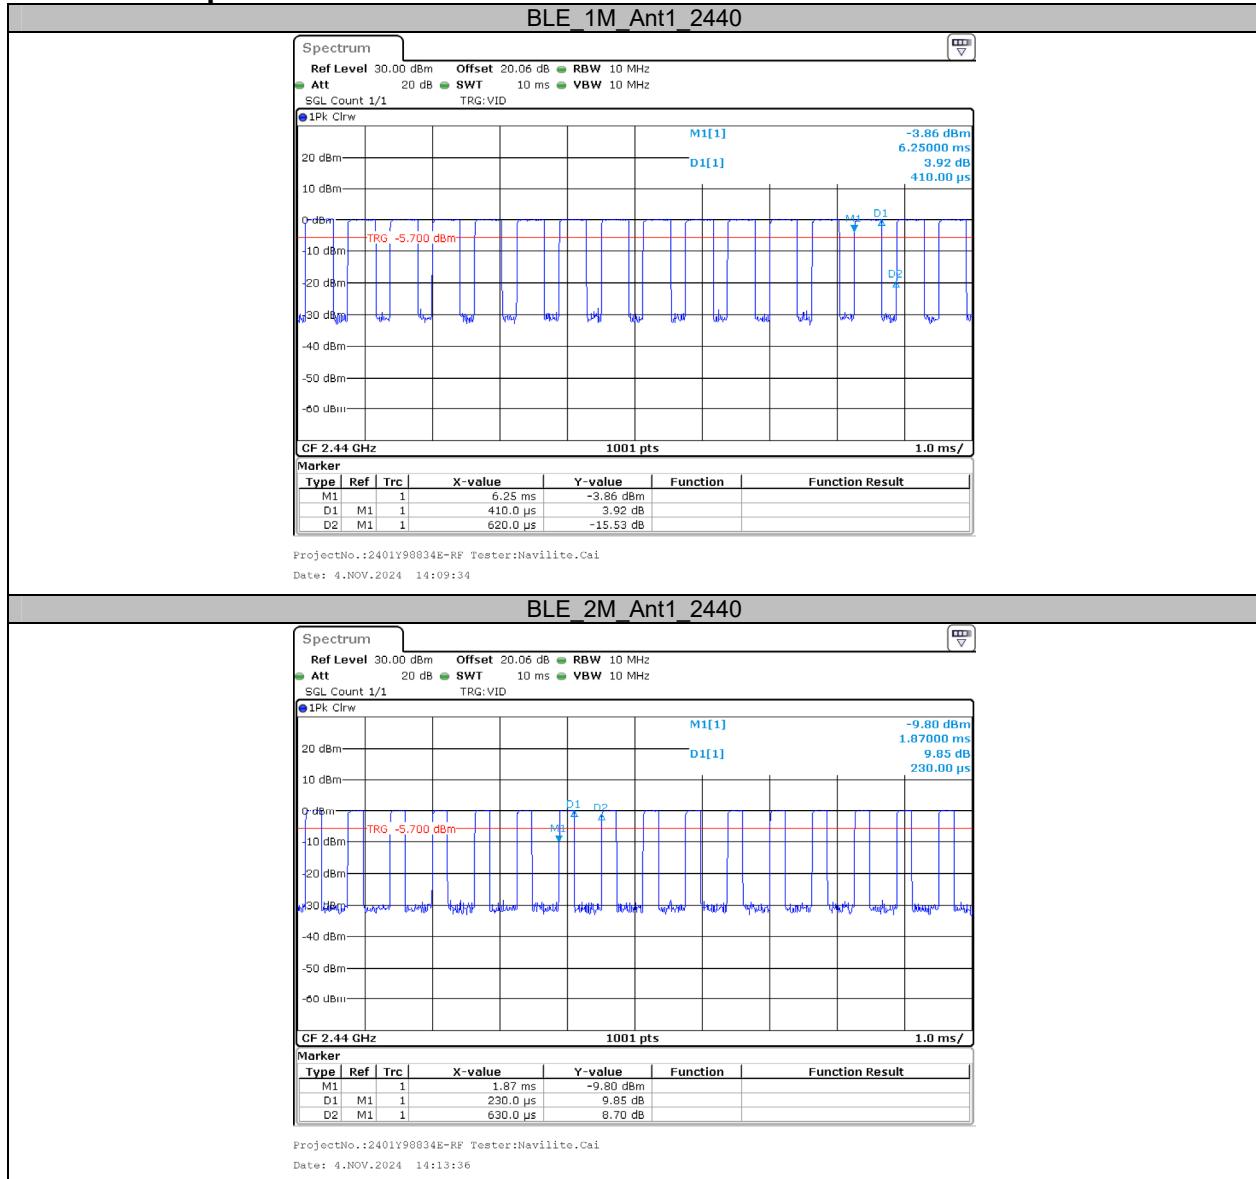

***** END OF REPORT *****