





# **FCC Test Report**

Report No.: AGC14499241203FR03

FCC ID : 2APPZ-W635W

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Phone

BRAND NAME : Fanvi

**MODEL NAME** : W635W, W635W-S

**APPLICANT**: Fanvil Technology Co., Ltd

**DATE OF ISSUE** : May 14, 2025

**STANDARD(S)** : FCC Part 15 Subpart C §15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 102


# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 14, 2025	Valid	Initial Release




# **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	8
2.4 Related Submittal(S) / Grant (S)	g
2.5 Test Methodology	g
2.6 Special Accessories	g
2.7 Equipment Modifications	<u>C</u>
2.8 Antenna Requirement	g
2.9 Description of Test Software	10
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	12
3.4 Measurement Uncertainty	12
3.5 List of Equipment Used	13
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	15
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	16
4.5 Summary of Test Results	16
5. Description of Test Modes	
6. Duty Cycle Measurement	19
7. RF Output Power Measurement	
7.1 Provisions Applicable	21
7.2 Measurement Procedure	21
7.3 Measurement Setup (Block Diagram of Configuration)	21
7.4 Measurement Result	22
8. 6dB Bandwidth Measurement	23
8.1 Provisions Applicable	23
8.2 Measurement Procedure	23
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Result	24
9. Power Spectral Density Measurement	37





	9.1 Provisions Applicable	37
	9.2 Measurement Procedure	
	9.3 Measurement Setup (Block Diagram of Configuration)	38
	9.4 Measurement Result	38
10	. Conducted Band Edge and Out-of-Band Emissions	45
	10.1 Provisions Applicable	
	10.2 Measurement Procedure	45
	10.3 Measurement Setup (Block Diagram of Configuration)	45
	10.4 Measurement Result	46
11	. Radiated Spurious Emission	60
	11.1 Measurement Limits	60
	11.2 Measurement Procedure	60
	11.3 Measurement Setup (Block Diagram of Configuration)	63
	11.4 Measurement Result	
12	. AC Power Line Conducted Emission	91
	12.1 Measurement Limits	91
	12.2 Block Diagram of Line Conducted Emission Test	91
	12.3 Preliminary Procedure of Line Conducted Emission Test	92
	12.4 Final Procedure of Line Conducted Emission Test	92
	12.5 Test Result of Line Conducted Emission Test	92
Αŗ	pendix I: Photographs of Test Setup	101
-	ppendix II: Photographs of Test EUT	





# 1. General Information

,		
Fanvil Technology Co., Ltd		
10/F Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China		
Fanvil Technology Co., Ltd		
10/F Block A, Dualshine Global Science Innovation Center, Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China		
N/A		
N/A		
Phone		
Fanvil		
W635W		
W635W-S		
W635W does not have a scanning head, W635W-S has a scanning head.		
Dec. 10, 2024		
Dec. 10, 2024~Feb. 10, 2025		
No any deviation from the test method		
Normal		
Pass		
AGCER-FCC-2.4GWLAN-V1		

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk bai	
	Jack Gui (Project Engineer)	May 14, 2025
Reviewed By	Bibo shang	
	Bibo Zhang (Reviewer)	May 14, 2025
Approved By	Angole Li	
	Angela Li (Authorized Officer)	May 14, 2025



Page 6 of 102

#### 2. Product Information

# 2.1 Product Technical Description

Equipment Type	WLAN 2.4G		
Frequency Band	2400MHz ~ 2483.5MHz		
Operation Frequency	2412MHz ~ 2462MHz		
Output Power (Average)	IEEE 802.11b:14.63dBm; IEEE 802.11g:13.36dBm;		
Output i ower (Average)	IEEE 802.11n(HT20):12.20dBm; IEEE 802.11n(HT40):10.96dBm		
Output Power (Peak)	IEEE 802.11b:17.30dBm; IEEE 802.11g:21.29dBm;		
Output I ower (I eak)	IEEE 802.11n(HT20):20.36dBm; IEEE 802.11n(HT40):19.31dBm		
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS		
iviodulation	802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM		
	802.11b:1/2/5.5/11Mbps		
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps		
	802.11n: up to 150Mbps		
Number of channels	11		
Hardware Version	RevB_WW		
Software Version	W635W_DG000_241128		
Antenna Designation	FPC Antenna		
Antenna Gain	3.46dBi		
Power Supply	DC 3.87V 4800mAh by battery or DC 5V from adapter		

#### Note:

- 1. The Phone W635W and the Phone Station CH25 are shipped as a set, and the set model name is V76.
- 2. The Phone W635W and the Phone Station CH001 are shipped as a set, and the set model name is W635W.
- 3. The Phone W635W-S and the Phone Station CH25 are shipped as a set, and the set model name is V76.
- 4. The Phone W635W-S and the Phone Station CH001 are shipped as a set, and the set model name is W6 35W-S.



Page 7 of 102

# 2.2 Table of Carrier Frequency

#### For 2412-2462MHz:

# 11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

# 7 channels are provided for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



Page 8 of 102

#### 2.3 IEEE 802.11n Modulation Scheme

					N	N	Data Ra	te(Mbps)		
MCS Index	Nss	Modulation	R	N <sub>BPSC</sub>	N <sub>BPSC</sub> N <sub>CBPS</sub>		N <sub>DBPS</sub>		800nsGI	
Пасх					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	Guard interval	



Page 9 of 102

# 2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2APPZ-W635W**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.5 Test Methodology

The tests were performed according to following standards:

No. Identity Document Title		Document Title	
	1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
	2	FCC 47 CFR Part 15	Radio Frequency Devices
	3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

#### 2.6 Special Accessories

Refer to section 4.4.

#### 2.7 Equipment Modifications

Not available for this EUT intended for grant.

# 2.8 Antenna Requirement

# **Standard Requirement**

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.46dBi.




# 2.9 Description of Test Software

# For IEEE 802.11 mode:

The test utility software used during testing was "Qualcomm Radio Control Tool", and the version was "4.0.00132.0".

# Software Setting Diagram

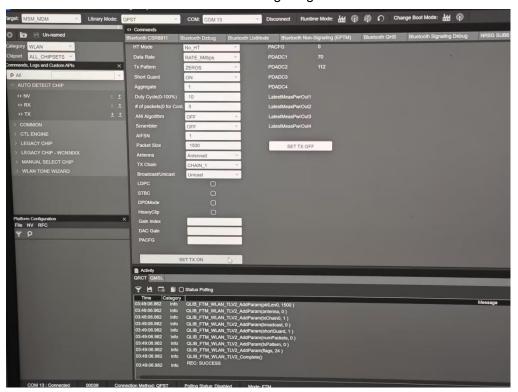

Test Mode	Channel	Power Index
802.11b	L/M/H	16
802.11g	L/M/H	15
802.11n-HT20	L/M/H	14
802.11n-HT40	L/M/H	12



Page 11 of 102

#### 3. Test Environment

#### 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

# FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 12 of 102

# 3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

# 3.4 Measurement Uncertainty

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		
Uncertainty Duty Cycle	U <sub>c</sub> = ±2 %		




Page 13 of 102

# 3.5 List of Equipment Used

• F	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
$\boxtimes$	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2024-02-01	2025-01-31		
$\boxtimes$	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13		
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27		
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-3-27	2026-03-26		
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23		
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22		
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		

<ul><li>A</li></ul>	AC Power Line Conducted Emission									
Illead Leguinment No. I lest Equinment   Manufacturer   Model No.   Serial No.						Next Cal. Date (YY-MM-DD)				
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23			
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2024-02-01	2026-01-31			
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27			





<ul> <li>Te</li> </ul>	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



Page 15 of 102

# 4. System Test Configuration


# 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 4.3 Configuration of Tested System

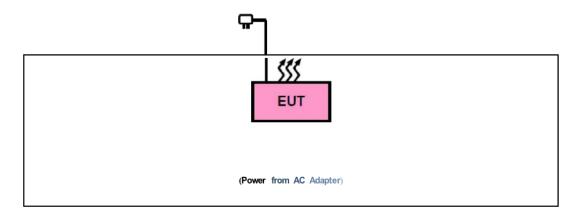



Page 16 of 102

# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

	3 restricted series remained the management							
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable			
1	Adapter1#	Zhuzhoudachuan Electronic Technology CO., Ltd	DCTQC18WUS-C0	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5V 3A/9V 2A/12V 1.5A				
2	Adapter2#	Dongguan City Gangqi Electronic Co. LTD.	GQ15-050300-ZU	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5V 3A				
3	Adapter3#	CHENZHOU FRECOM ELECTRONICS CO., LTD		Input: AC 100-240V 50/60Hz, 0.3A Output: DC 5V 2A	1.0m unshielded			
4	Charger1#	Fanvil Technology Co., Ltd	CH25					
5	Charger2#	Fanvil Technology Co., Ltd	CH001					
6	Battery	Shenzhen Guangwei Electronic Technology Co., Ltd.	FV-BA001	DC 3.87V 4800mAh				
7	LAN Cable				1.0m unshielded			
8	USB Cable				3.0m unshielded			
9	USB Cable				1.5m unshielded			



Page 17 of 102

# 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



Page 18 of 102

# 5. Description of Test Modes

Summary table of Test Cases					
Test Item	Data Rate / Modulation				
rest item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM)				
	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps(Battery powered)				
	Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps(Battery powered)				
	Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps(Battery powered)				
	Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps(Battery powered)				
	Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps(Battery powered)				
Radiated & Conducted	Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps (Battery powered)				
Test Cases	Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps(Battery powered)				
	Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps(Battery powered)				
	Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps(Battery powered)				
	Mode 10: 802.11n-HT40_TX CH03_2422 MHz_MCS0 Mbps(Battery powered)				
	Mode 11: 802.11n-HT40_TX CH06_2437 MHz_ MCS0 Mbps(Battery powered)				
	Mode 12: 802.11n-HT40_TX CH09_2452 MHz_ MCS0 Mbps(Battery powered)				
	Mode 1: 2.4G WLAN + Battery + USB Cable 3m+ Base Charger1#+ AC Adapter1#				
AC Conducted	Mode 2: 2.4G WLAN + Battery + USB Cable 3m+ Base Charger1# AC Adapter2#				
Emission	Mode 3: 2.4G WLAN + Battery + Base Charger2# + AC Adapter3#				
	Mode 4: 2.4G WLAN + Battery + AC Adapter3#				

#### Note:

- 1. The battery is full-charged during the test.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



Page 19 of 102


# 6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)
IEEE 802.11b	1	99	0.04
IEEE 802.11g	6	98	0.09
IEEE 802.11n-HT20	MCS0	98	0.09
IEEE 802.11n-HT40	MCS0	94	0.27


#### Remark:

- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the Low channel measurement value.





The test plots as follows:

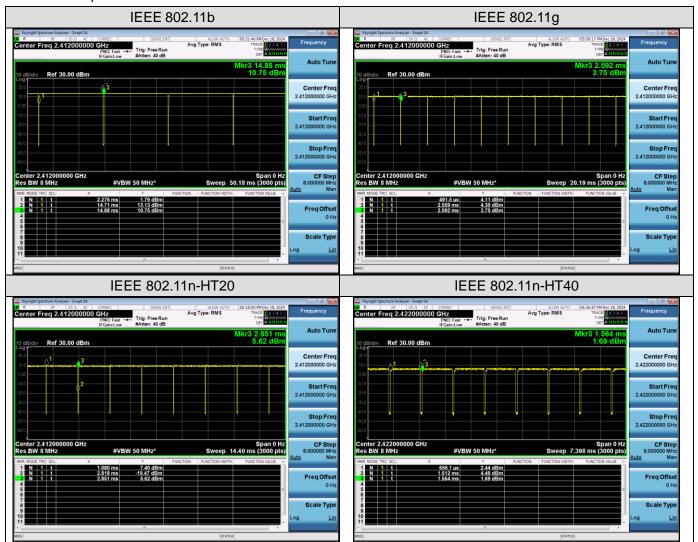



Page 21 of 102

# 7. RF Output Power Measurement

## 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

#### 7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Method PM is Measurement using an RF AV power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

#### 7.3 Measurement Setup (Block Diagram of Configuration)

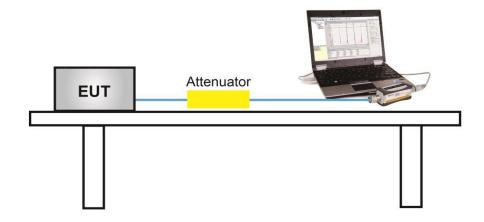



Page 22 of 102

#### 7.4 Measurement Result

	-	Test Data of Conducted	Output Power		
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Result
	2412	14.40	17.09	≤30	Pass
802.11b	2437	13.84	16.48	≤30	Pass
	2462	14.63	17.30	≤30	Pass
	2412	13.28	21.29	≤30	Pass
802.11g	2437	12.26	20.30	≤30	Pass
	2462	13.36	21.22	≤30	Pass
	2412	12.03	20.36	≤30	Pass
802.11n20	2437	11.38	19.72	≤30	Pass
	2462	12.20	20.33	≤30	Pass
	2422	10.96	19.31	≤30	Pass
802.11n40	2437	10.38	18.49	≤30	Pass
	2452	10.63	18.29	≤30	Pass



Page 23 of 102

#### 8. 6dB Bandwidth Measurement


## 8.1 Provisions Applicable

The minimum 6dB bandwidth shall be 500 kHz.

#### **8.2 Measurement Procedure**

- The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
  was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

# 8.3 Measurement Setup (Block Diagram of Configuration)

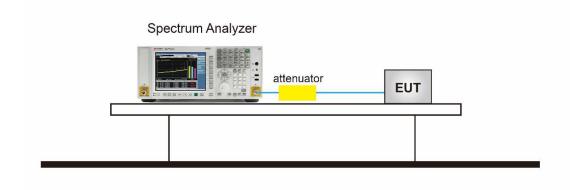




Page 24 of 102


#### 8.4 Measurement Result

	Test Dat	a of Occupied Band	width and DTS Band	lwidth	
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Result
	2412	13.953	9.067	≥0.5	Pass
802.11b	2437	13.779	8.112	≥0.5	Pass
	2462	13.818	8.105	≥0.5	Pass
	2412	16.682	15.699	≥0.5	Pass
802.11g	2437	16.611	15.778	≥0.5	Pass
	2462	16.637	15.464	≥0.5	Pass
	2412	17.837	16.089	≥0.5	Pass
802.11n20	2437	17.825	16.236	≥0.5	Pass
	2462	17.823	15.787	≥0.5	Pass
	2422	35.733	33.868	≥0.5	Pass
802.11n40	2437	36.114	34.094	≥0.5	Pass
	2452	36.410	36.506	≥0.5	Pass







#### **Test Graphs of Occupied Bandwidth**

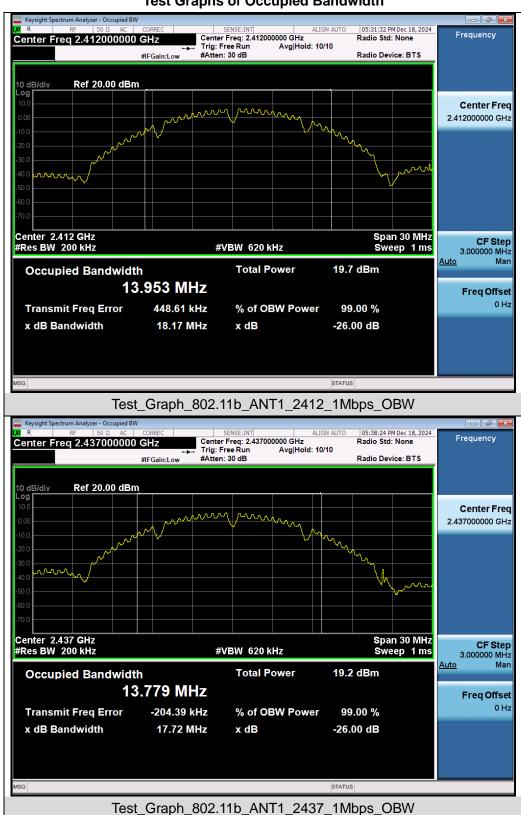


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






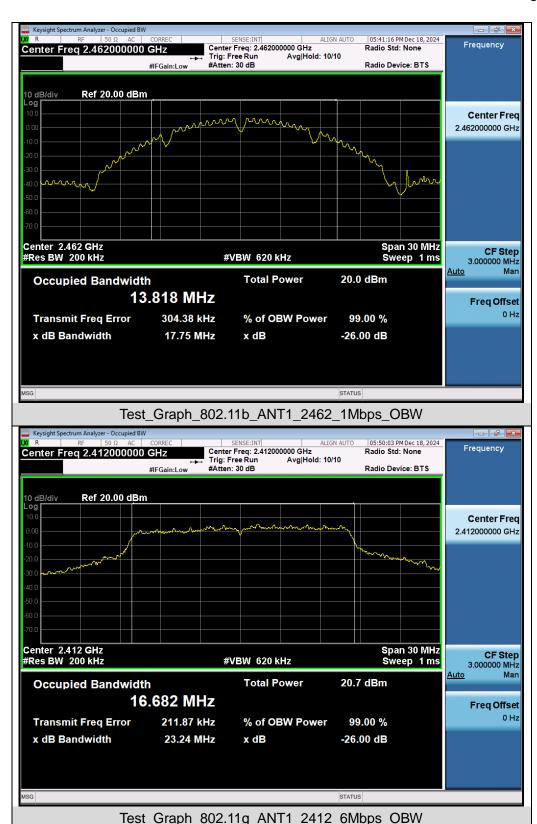















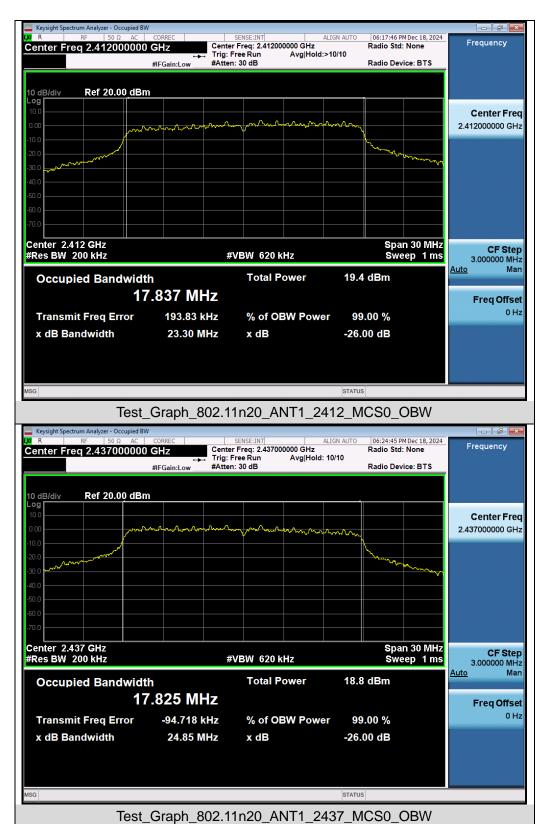







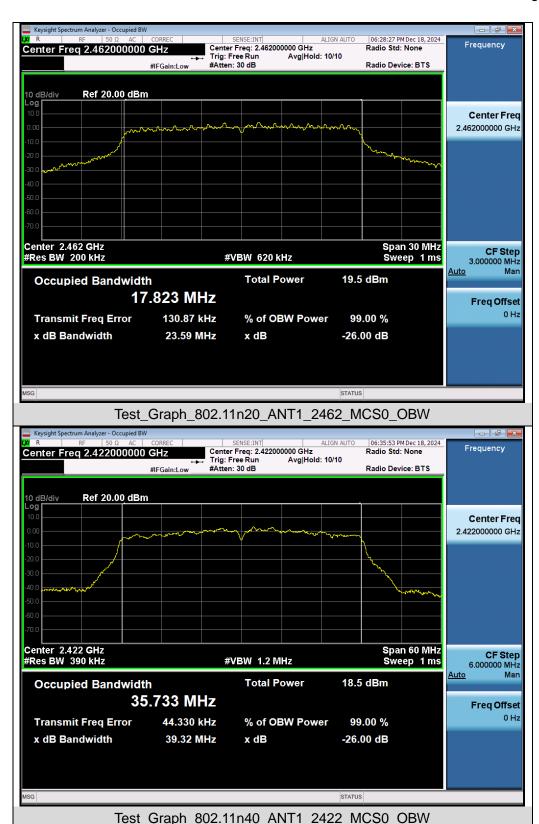






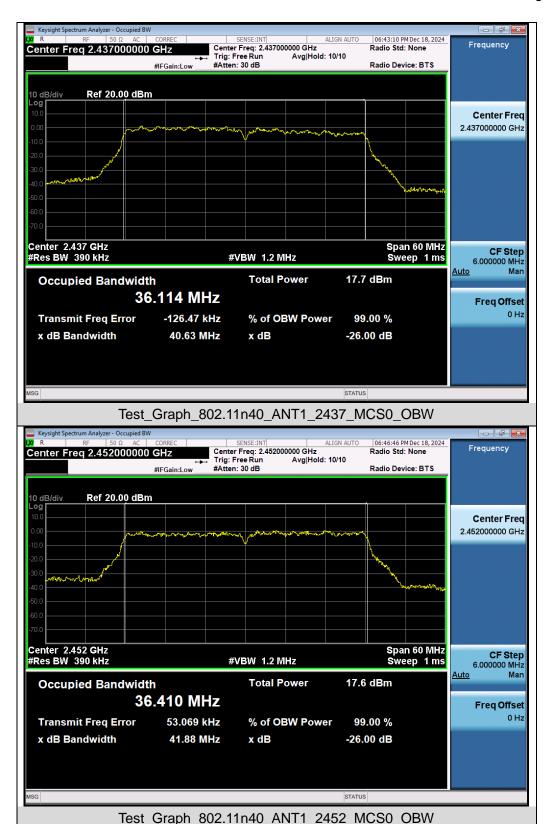






#### Test Graphs of DTS Bandwidth

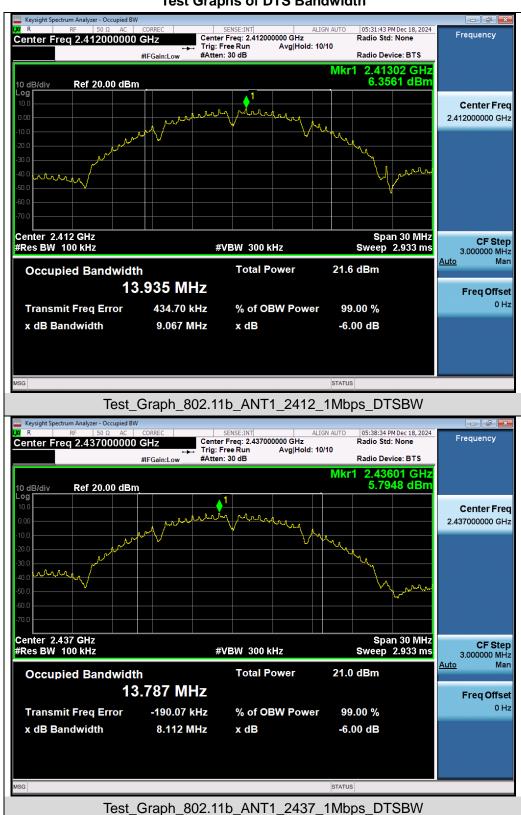


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.















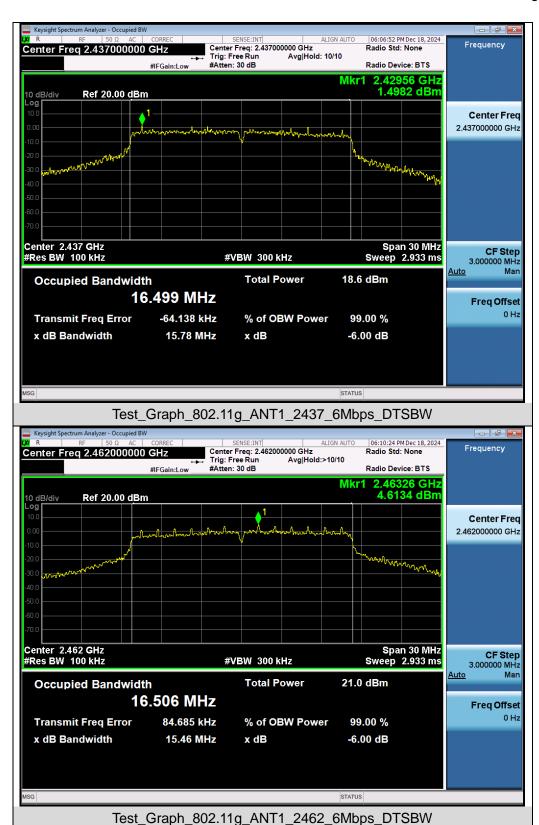







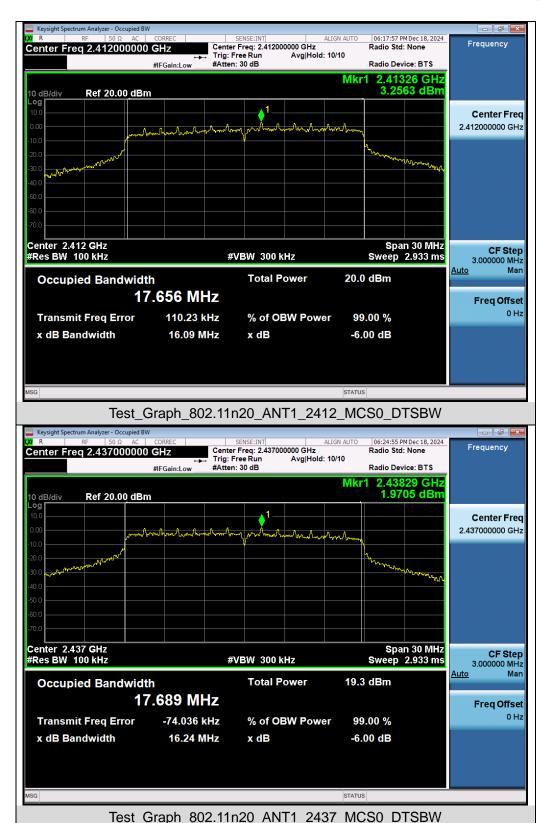






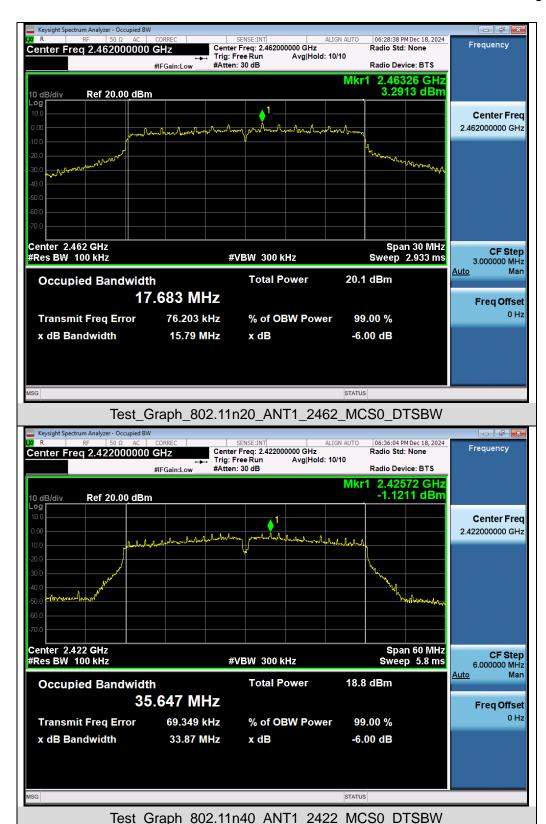





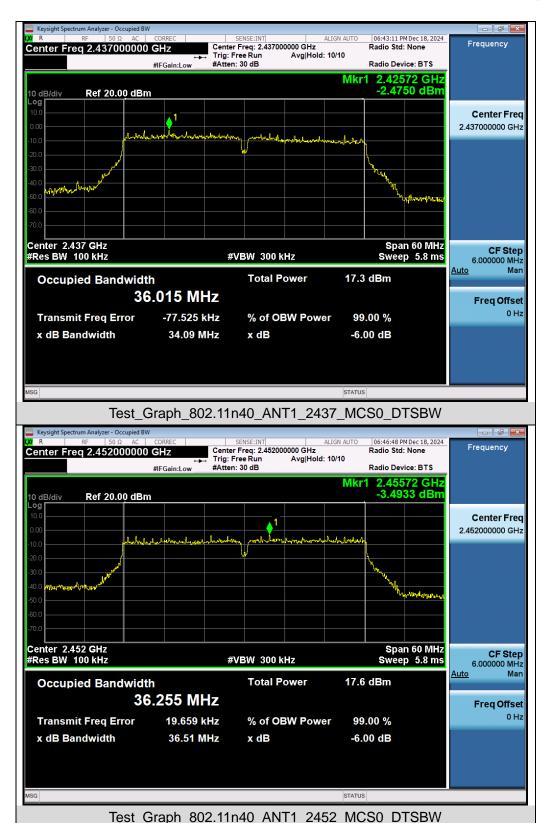



Page 37 of 102

# 9. Power Spectral Density Measurement

# 9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 9.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW  $\geq$  [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- 9. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of 10\*log(3kHz/20kHz) = -8.23 dB is added to the measurement result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.


☐ For Average power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz ≤ RBW ≤ 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of the maximum PSD is 3 kHz, a constant factor of 10\*log(3kHz/20kHz) = -8.23 dB is added to the measurement result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.




Report No.: AGC14499241203FR03 Page 38 of 102

# 9.3 Measurement Setup (Block Diagram of Configuration)

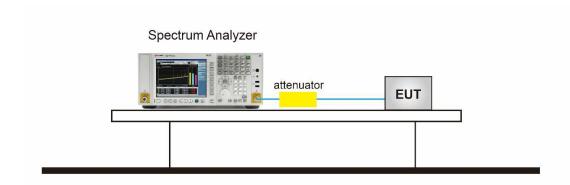

## 9.4 Measurement Result

Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Frequency (MHz)	Power Spectral Power Spectral density density (dBm/20kHz) (dBm/3kHz)		Limit (dBm/3kHz)	Result
2412		6.446	-1.793	≪8	Pass
802.11b	2437	5.728 -2		≪8	Pass
	2462	6.584	-1.655	≪8	Pass
	2412	-2.651	-10.89	≪8	Pass
802.11g	2437	-4.889	-13.128	≪8	Pass
	2462	-3.380	-11.619	≪8	Pass
	2412	-4.717	-12.956 ≤8		Pass
802.11n20	2437	-5.122	-13.361	≪8	Pass
	2462	-4.934	-13.173	≪8	Pass
802.11n40	2422	-7.914	-16.153	≤8	Pass
	2437	-8.959	-17.198	≤8	Pass
	2452	-9.369	-17.608	≪8	Pass






## **Test Graphs of Conducted Output Power Spectral Density**





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11b\_ANT1\_2437\_1Mbps\_PSD







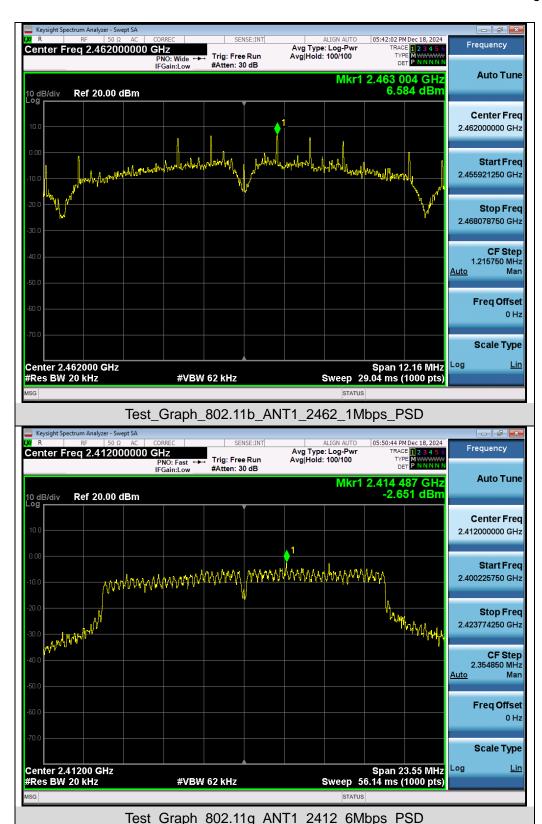







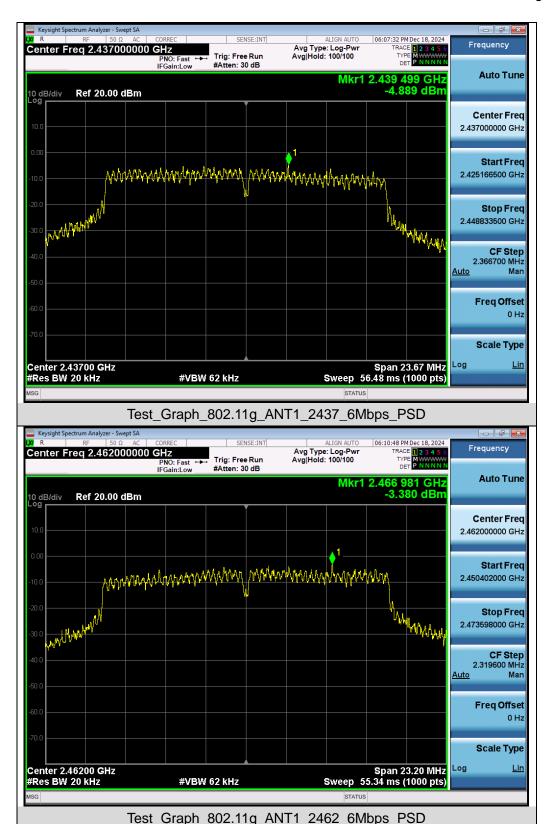







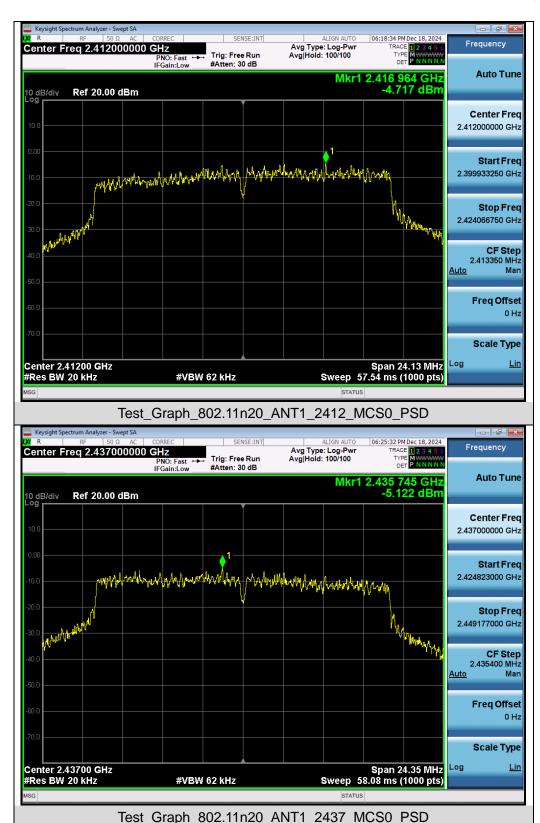






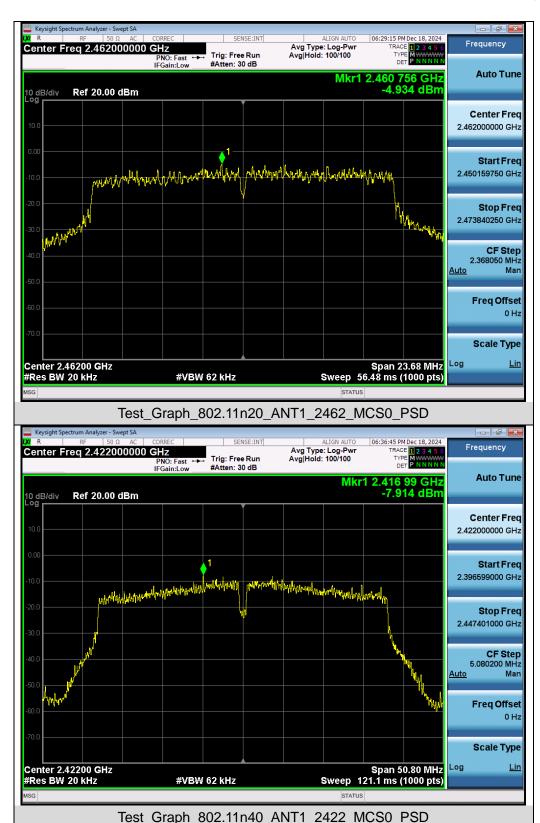





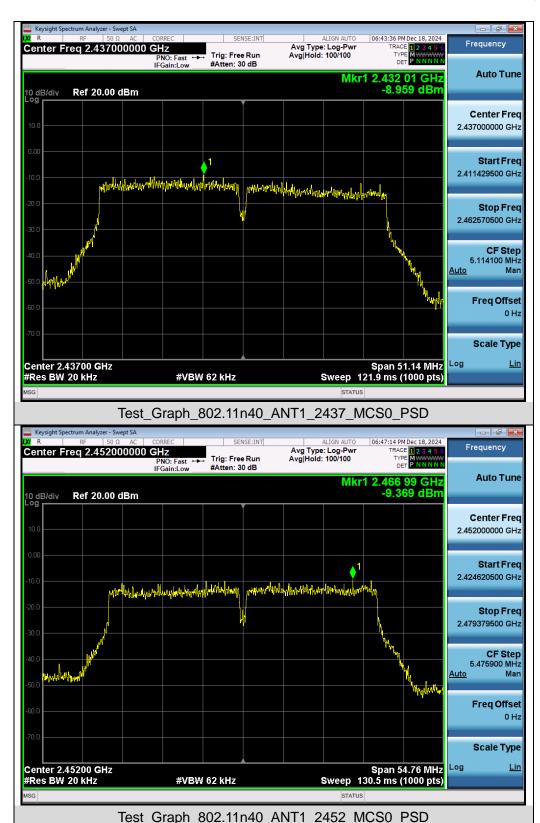



10. Conducted Band Edge and Out-of-Band Emissions

## 10.1 Provisions Applicable

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 10.2 Measurement Procedure


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
  - 1. Set instrument center frequency to DTS channel center frequency.
  - Set the span to ≥ 1.5 times the DTS bandwidth.
  - 3. Set the RBW = 100 kHz.
  - 4. Set the VBW  $\geq$  3 x RBW.
  - 5. Detector = peak.
  - 6. Sweep time = auto couple.
  - 7. Trace mode = max hold.
  - 8. Allow trace to fully stabilize.
  - Use the peak marker function to determine the maximum PSD level.
  - Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
  - 11. For reference level values, please refer to DTS bandwidth test.
- Step 2: Measurement Procedure Out of Band Emission
  - 1. Set RBW = 100 kHz.
  - 2. Set VBW ≥ 300 kHz.
  - 3. Detector = peak.
  - 4. Sweep = auto couple.
  - 5. Trace Mode = max hold.
  - 6. Allow trace to fully stabilize.
  - 7. Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

# 10.3 Measurement Setup (Block Diagram of Configuration)

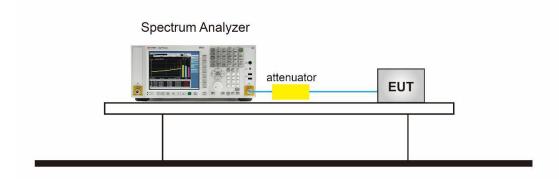


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



#### 10.4 Measurement Result

## Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

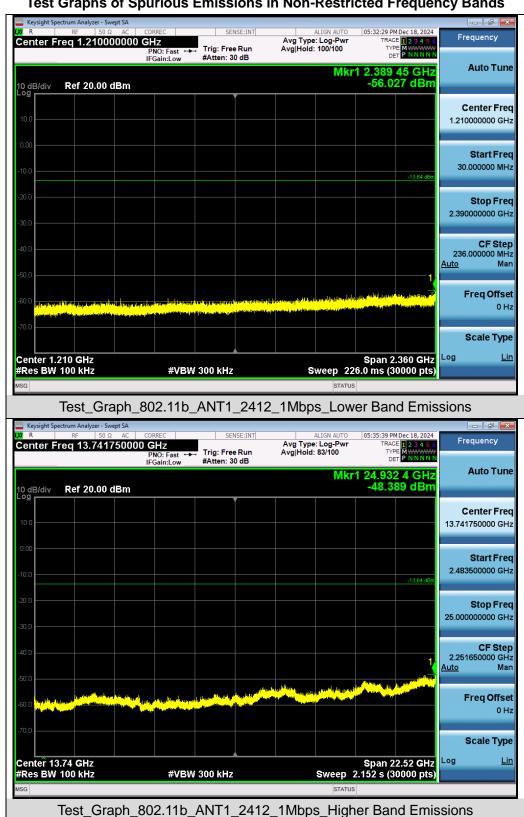




Freq Offset 0 Hz

Scale Type

Span 22.52 GHz Sweep 2.152 s (30000 pts)




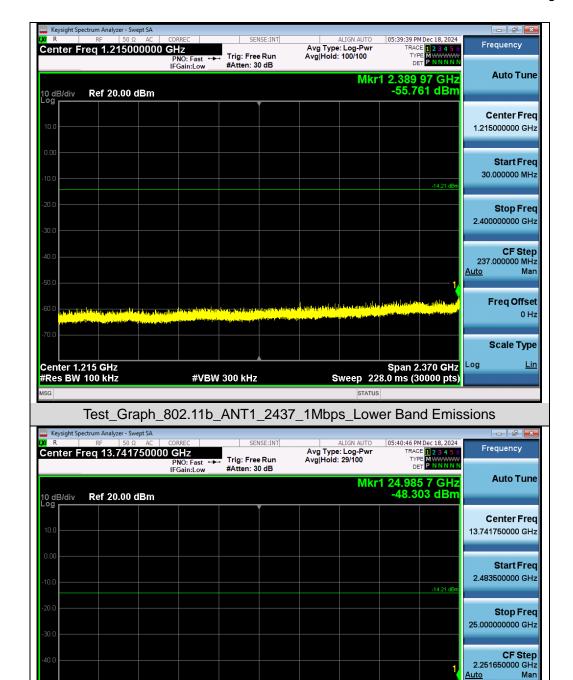


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11b\_ANT1\_2437\_1Mbps\_Higher Band Emissions

#VBW 300 kHz






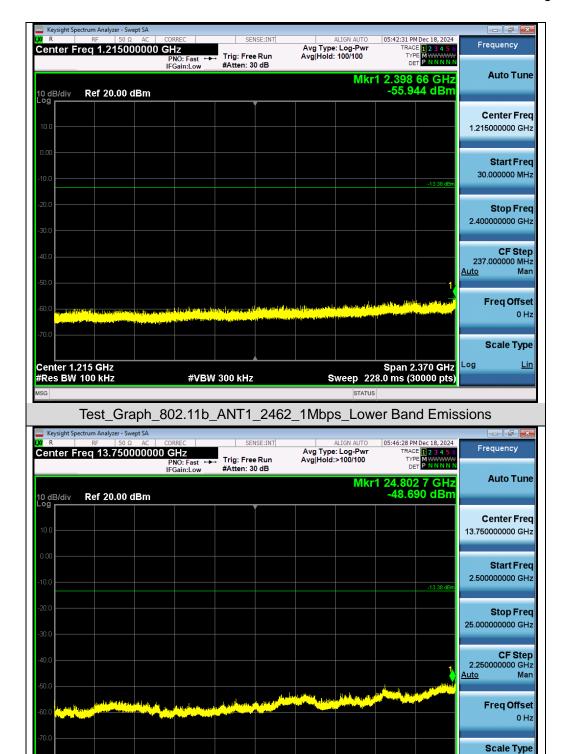

Test\_Graph\_802.11b\_ANT1\_2462\_1Mbps\_Higher Band Emissions

#VBW 300 kHz

Span 22.50 GHz Sweep 2.152 s (30000 pts)



2.251650000 GHz

Freq Offset 0 Hz


Scale Type

Man

<u>Auto</u>

Span 22.52 GHz Sweep 2.152 s (30000 pts)




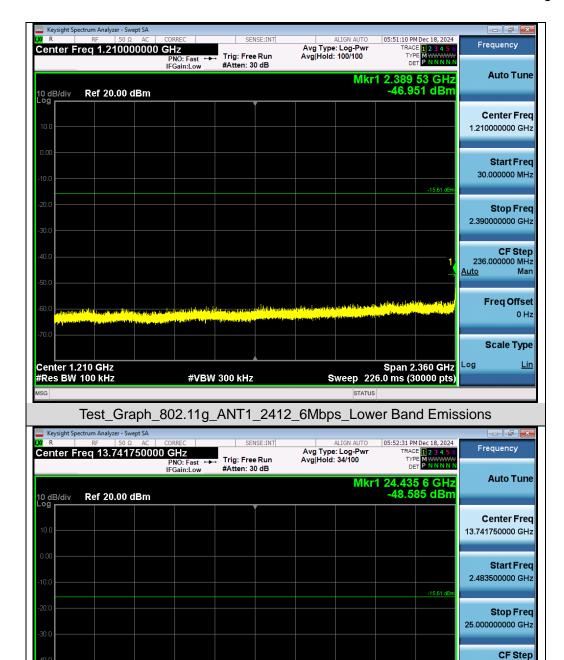

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Higher Band Emissions


#VBW 300 kHz



Scale Type

Span 22.52 GHz Sweep 2.152 s (30000 pts)




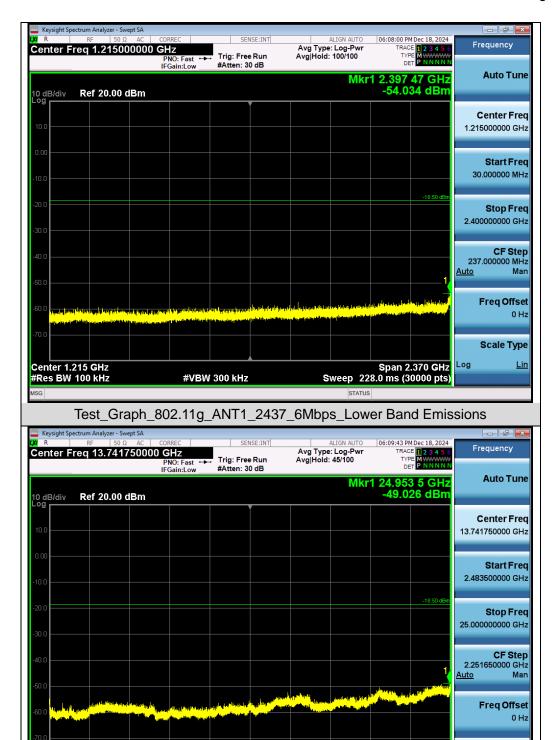

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2437\_6Mbps\_Higher Band Emissions


#VBW 300 kHz



Scale Type

Span 22.50 GHz Sweep 2.152 s (30000 pts)




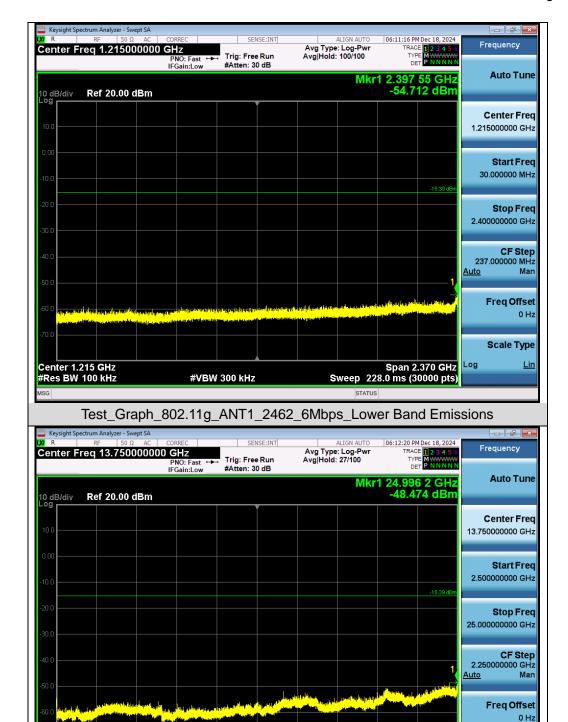

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2462\_6Mbps\_Higher Band Emissions

#VBW 300 kHz



Stop Freq 25.000000000 GHz

**CF Step** 2.251650000 GHz

Freq Offset 0 Hz


Scale Type

Man

<u>Auto</u>

Span 22.52 GHz Sweep 2.152 s (30000 pts)




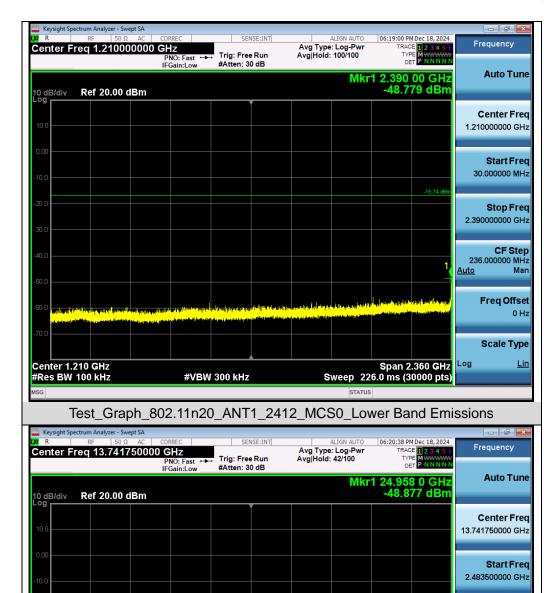

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n20 ANT1 2412 MCS0 Higher Band Emissions

#VBW 300 kHz



**CF Step** 2.251650000 GHz

Freq Offset 0 Hz


Scale Type

Man

<u>Auto</u>

Span 22.52 GHz Sweep 2.152 s (30000 pts)




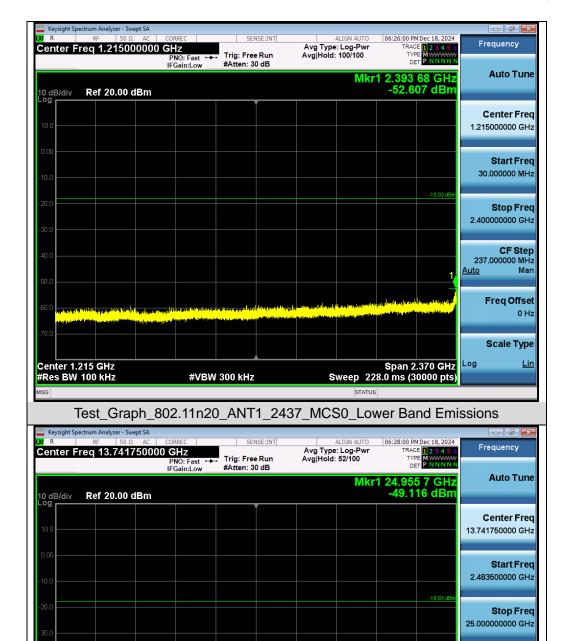


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n20\_ANT1\_2437\_MCS0\_Higher Band Emissions

#VBW 300 kHz






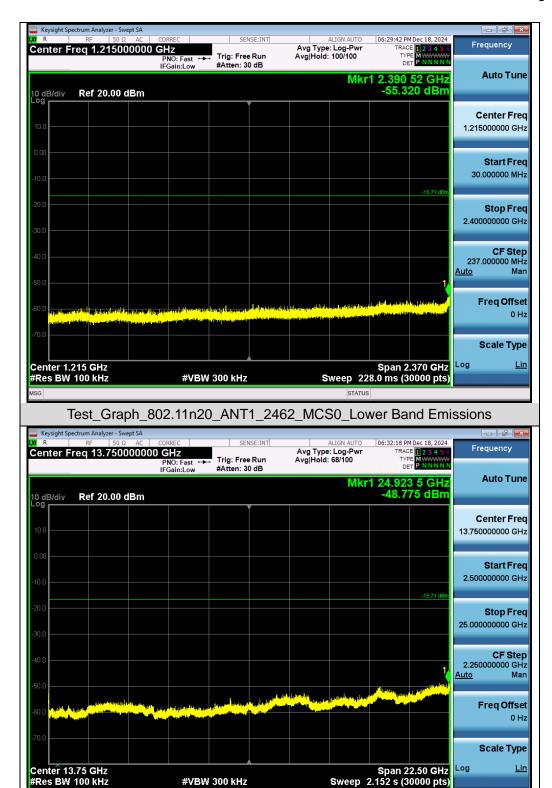

Test Graph 802.11n20 ANT1 2462 MCS0 Higher Band Emissions

#VBW 300 kHz




Freq Offset 0 Hz

Scale Type

Span 22.52 GHz Sweep 2.152 s (30000 pts)




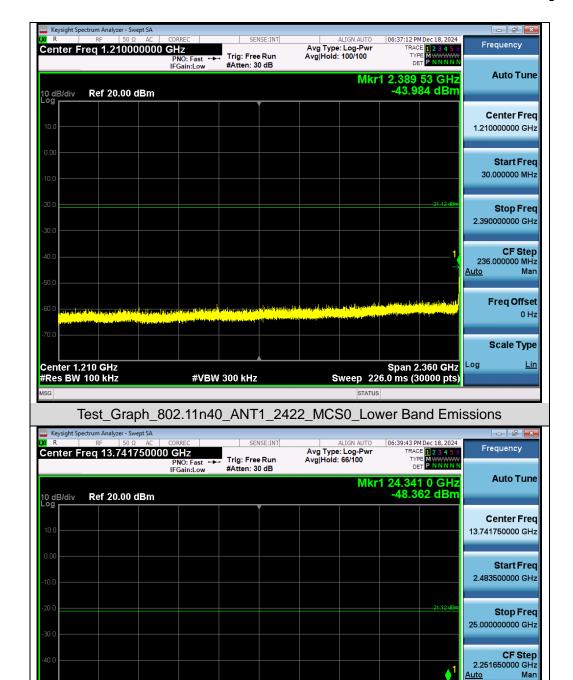

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 2422 MCS0 Higher Band Emissions

#VBW 300 kHz



2.483500000 GHz

**CF Step** 2.251650000 GHz

Freq Offset 0 Hz


Scale Type

<u>Auto</u>

Span 22.52 GHz Sweep 2.152 s (30000 pts) Stop Freq 25.000000000 GHz

Man




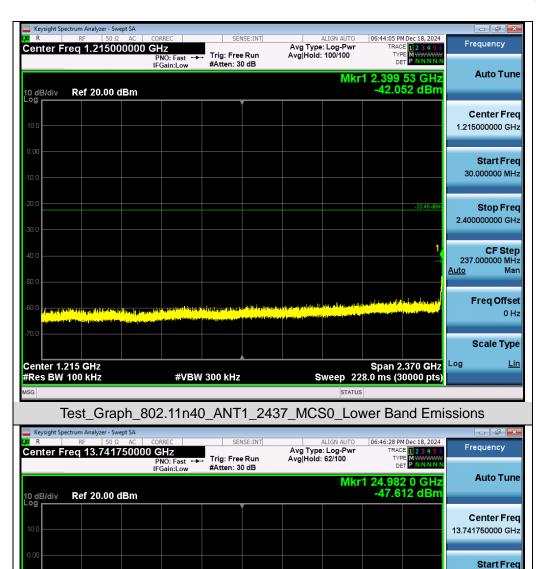

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n40\_ANT1\_2437\_MCS0\_Higher Band Emissions


#VBW 300 kHz



Scale Type

Span 22.50 GHz Sweep 2.152 s (30000 pts)




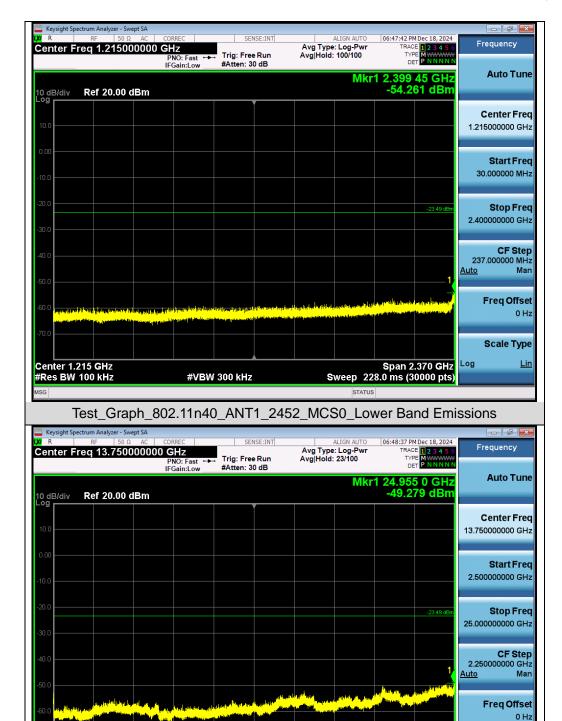

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11n40 ANT1 2452 MCS0 Higher Band Emissions

#VBW 300 kHz






## Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

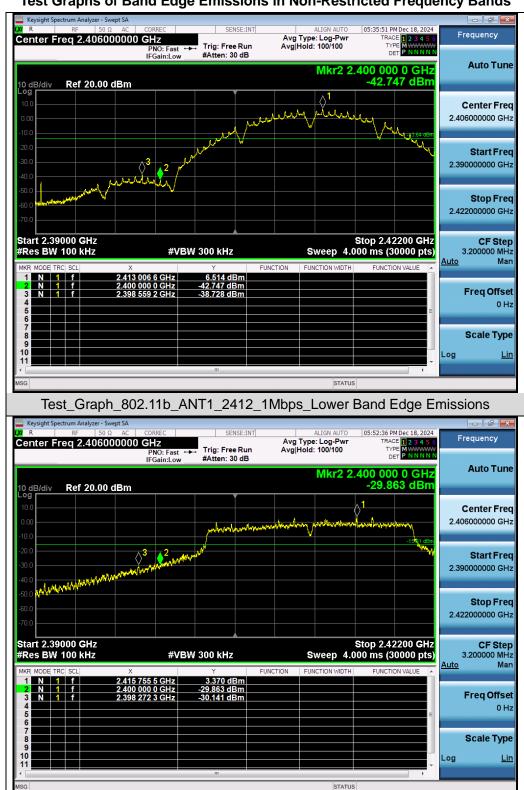


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Lower Band Edge Emissions





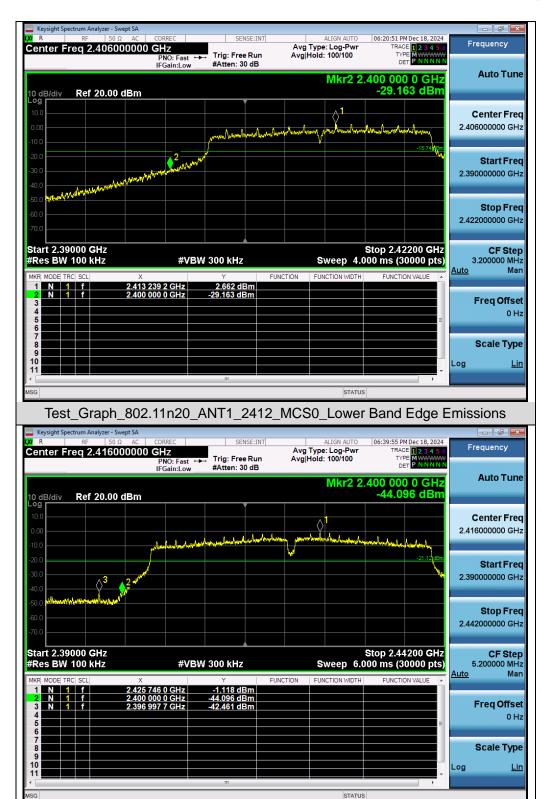

Test Graph 802.11n40 ANT1 2422 MCS0 Lower Band Edge Emissions



Page 60 of 102

# 11. Radiated Spurious Emission

#### 11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the



Page 61 of 102

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- ◆ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting			
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP			
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP			
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP			
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average			

Receiver Parameter	Setting		
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP		



Page 62 of 102

## Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

## Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


## Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




# 11.3 Measurement Setup (Block Diagram of Configuration)


## Radiated Emission Test Setup 9kHz-30MHz

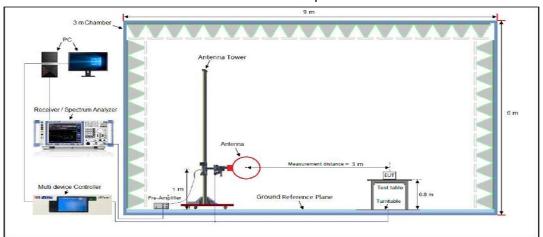

## Radiated Emission Test Setup 30MHz-1000MHz

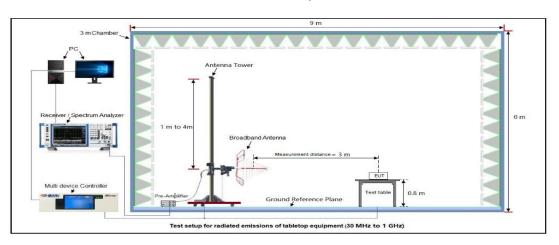

# Radiated Emission Test Setup Above 1000MHz

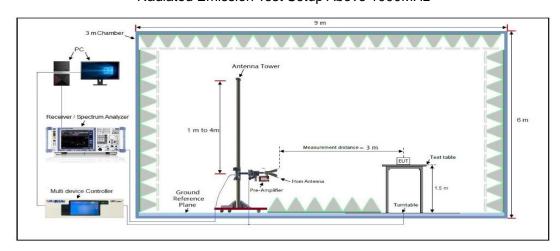




## 11.4 Measurement Result

## Radiated Emission at 9kHz-30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	Phone	Model Name	W635W		
Temperature	18.5℃	Relative Humidity	56.1%		
Pressure	960hPa	Test Voltage	DC 3.87V by battery		
Test Mode	Mode 3	Antenna Polarity	Horizontal		

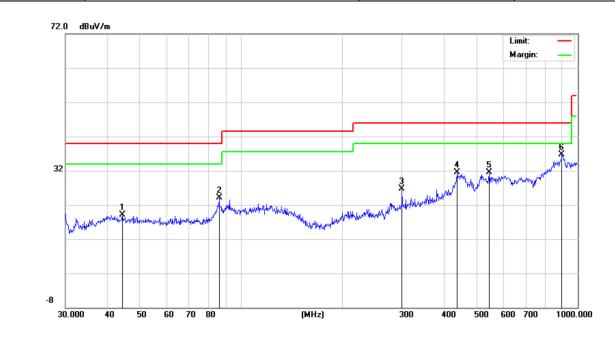

Final Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.2752	19.20	13.60	40.00	20.8	100	190	Horizontal
2	85.8984	24.04	14.01	40.00	15.96	100	210	Horizontal
3	300.3672	26.64	16.50	46.00	19.36	100	80	Horizontal
4	437.1199	31.50	24.48	46.00	14.5	100	260	Horizontal
5	545.1826	31.59	23.98	46.00	14.41	100	180	Horizontal
6	896.9965	36.62	31.42	46.00	9.38	100	110	Horizontal



Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	Phone	Model Name	W635W		
Temperature	18.5℃	Relative Humidity	56.1%		
Pressure	960hPa	Test Voltage	DC 3.87V by battery		
Test Mode	Mode 3	Antenna Polarity	Vertical		

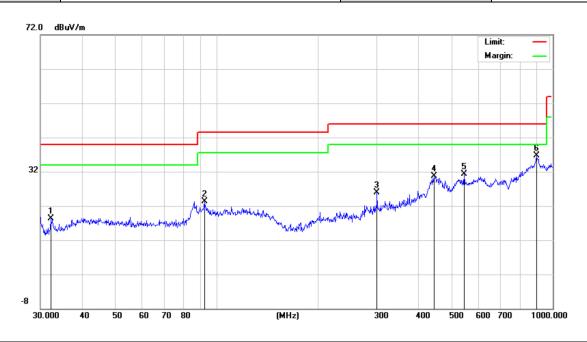

#### **Final Data List** Limit Freq. Level Factor Margin Height Angle NO. Polarity [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] 1 32.1795 18.26 10.54 40.00 21.74 100 100 Vertical 2 92.1388 23.40 14.98 43.50 20.1 100 190 Vertical 300.3672 46.00 20.11 100 70 3 25.89 16.50 Vertical 443.2943 46.00 15.24 4 30.76 24.98 100 280 Vertical 31.40 5 545.1826 23.98 46.00 14.6 100 190 Vertical 6 36.62 31.03 46.00 9.38 100 150 893.8567 Vertical

**RESULT: Pass**